

**INDEX OF SHEETS**

SEE SHEET NO. 2

**STATE OF TEXAS**  
**DEPARTMENT OF TRANSPORTATION**  


---

**PLANS OF PROPOSED**  
**HIGHWAY ROUTINE MAINTENANCE CONTRACT**

**TYPE OF WORK:**

**BASE REPAIR & OVERLAY**

PROJECT NO. : 6470-68-001

HIGHWAY : IH 10 WB FR

LIMITS OF WORK: FROM 0.85 MI. WEST OF WALLACE RD. TO 0.246 MILES EAST OF WALLACE RD.

ROADWAY LENGTH: 5,871.00' / 1.11 MI

FHWA TEXAS DIVISION	MAINTENANCE PROJECT NO.		SHEET NO.
	RMC 647068001		1
STATE	DISTRICT	COUNTY	
TEXAS	BMT	CHAMBERS	
CONTROL	SECTION	JOB	HIGHWAY NO.
6470	68	001	IH 10 WB FR

MGR. NO. 052


MAINT. SECTION 01

AREA OF DISTURBED SOIL = 0.000 ACRES

**FINAL PLANS**

DATE LET : \_\_\_\_\_  
 DATE WORK BEGAN: \_\_\_\_\_  
 DATE WORK COMPLETED: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 USED \_\_\_\_\_ OF \_\_\_\_\_ DAYS ALLOTTED  
 PROJECT COST: \_\_\_\_\_  
 PROJECT CONSTRUCTED AND FINAL  
 PLANS PREPARED BY: \_\_\_\_\_  
 \_\_\_\_\_ DATE

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH BC (1) - 21 THRU BC (12) - 21 AND THE TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

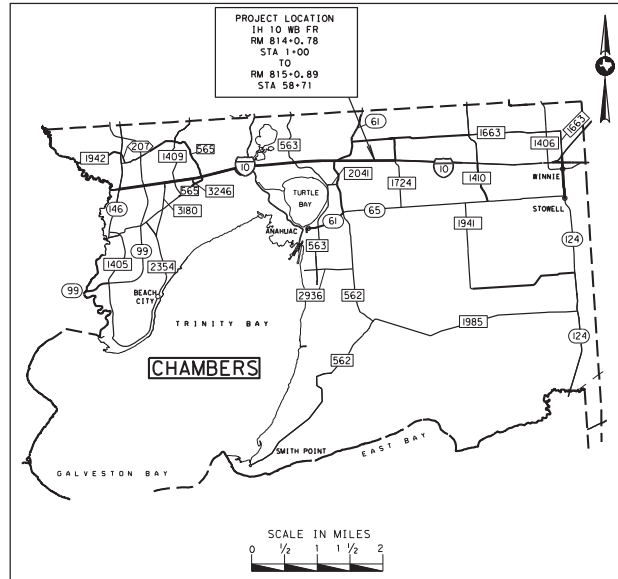

EXCEPTIONS: NONE  
 EQUATIONS: NONE  
 RAILROAD CROSSINGS: NONE

SPECIFICATIONS ADOPTED BY TEXAS DEPARTMENT OF TRANSPORTATION, SEPTEMBER 1, 2024, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

© 2024  
 BY TEXAS DEPARTMENT OF TRANSPORTATION  
 ALL RIGHTS RESERVED.

SUBMITTED FOR LETTING: 8/22/2024

DocuSigned by: *[Signature]*  
 5CAE84E05D77... AREA ENGINEER

RECOMMENDED FOR LETTING: 8/27/2024

DocuSigned by: *[Signature]*  
 7EC9299F... DIRECTOR OF MAINTENANCE

APPROVED FOR LETTING: 8/27/2024

DocuSigned by: *[Signature]*  
 578CD749506D4... STRICT ENGINEER

FILE: T:\LIBERDES\APSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DGNN\INDEX OF SHEETS.dgn  
DATE: 8/21/2024

**SHEET DESCRIPTION**

**GENERAL**

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3 LOCATION MAP
- 4-5 TYPICAL SECTIONS
- 6-10 GENERAL NOTES
- 11 ESTIMATE AND QUANTITY
- 12-13 QUANTITY SUMMARIES

**TRAFFIC CONTROL PLAN**

- 14-25 BC (1)-21 THRU BC (12)-21
- 26 TCP(2-6)-18
- 27 TCP(3-1)-13
- 28 TCP(3-3)-14
- 29 TCP(6-2)-12
- 30 TCP(6-3)-12
- 31 TCP(6-4)-12
- 32 TCP(6-5)-12
- 33 TCP PHASE 1
- 34 TCP PHASE 2
- 35 WZ(RS)-22
- 36 WZ(STPM)-23
- 37 WZ(UL)-13

**ROADWAY DETAILS**

- 38-42 LAYOUT AND ROADWAY DATA
- 43 HOT MIX LONGITUDINAL AND PAVEMENT EDGE JOINT DETAILS
- 44 TYPICAL BASE REPAIR DETAILS
- 45 TREATMENT FOR VARIOUS EDGE CONDITIONS
- 46 TYPICAL DRIVEWAY DETAILS
- 47-48 CRCP(1)-23
- 49 SETP-PD
- 50 TE (HMAC)-11

**TRAFFIC ITEMS**

- 51 FPM(1)-22
- 52 FPM(2)-22
- 53 FPM(3)-22
- 54 SUMMARY OF SMALL SIGNS
- 55 SIGN DESIGN
- 56 SMD (GEN)-08
- 57 SMD (SLIP-1)-08
- 58 SMD (SLIP-2)-08
- 59 TSR(3)-13
- 60 TSR(4)-13

**ENVIRONMENTAL**

- 61 EPIC

DS



DocuSigned by:

*[Signature]*

8/22/2024

5CAE84E05D7F456...


**INDEX OF SHEETS**




FED. RD. DIV. NO.	MAINTENANCE PROJECT			SHEET NO.
6				2
STATE	DISTRICT	COUNTY		
TEXAS	BMT	CHAMBERS		
CONTROL	SECTION	JOB	HIGHWAY NO.	
6470	68	001	IH 10 WB FR	

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE BY A \*\* HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

FILE: T:\LIBERDES\POSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DGN\LOCATION MAP .dgn  
 DATE: 8/21/2024 1:41:52 PM

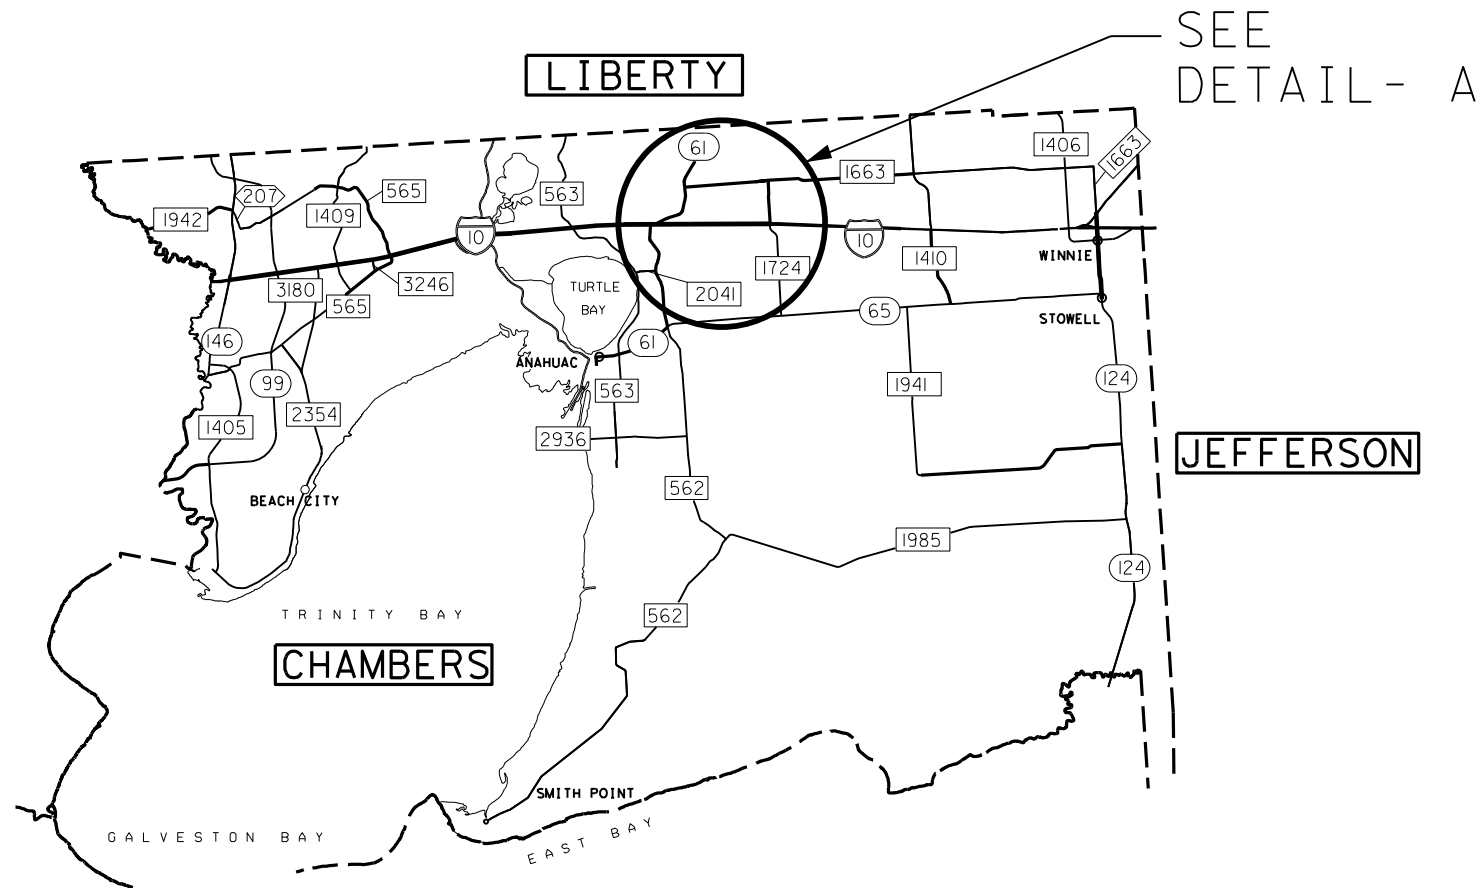


SEE  
DETAIL - A

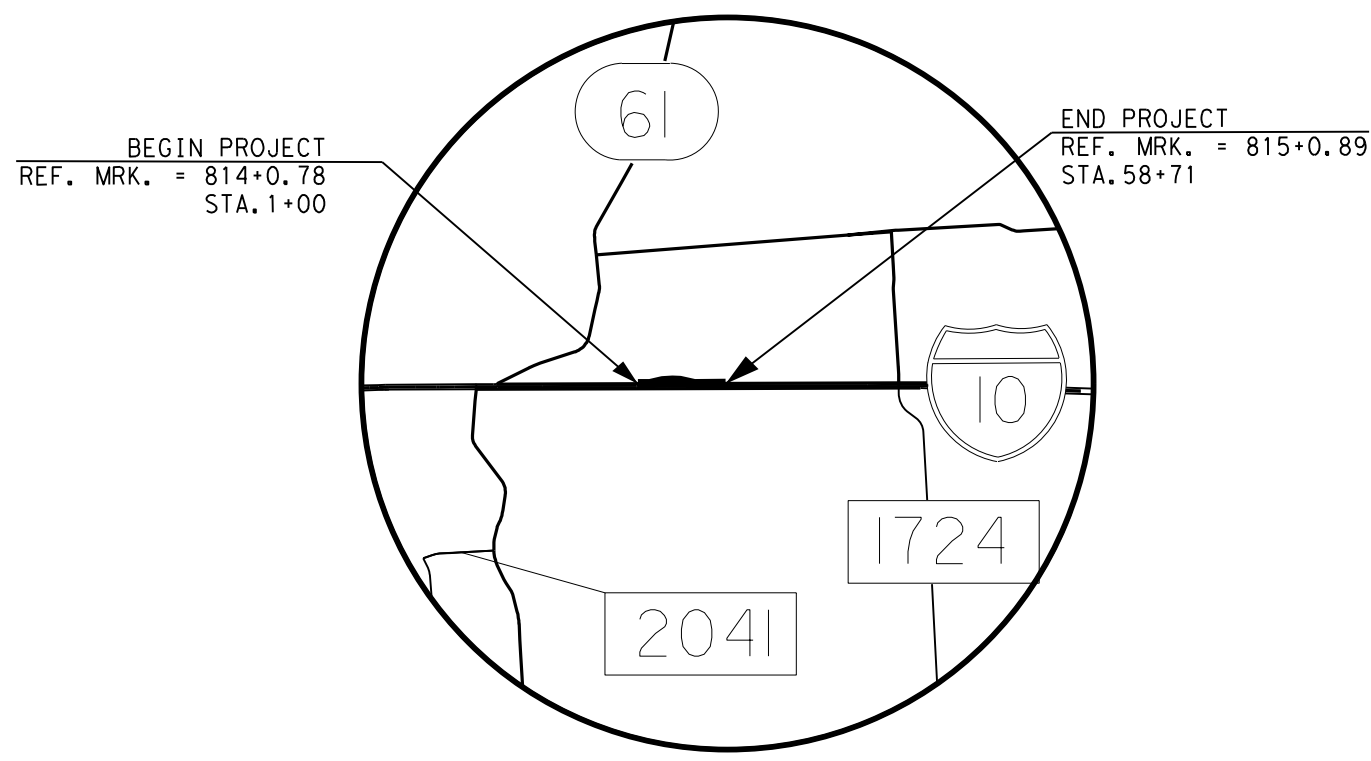

DETAIL - A  
N. T. S.

\*NOTE:  
COORDINATE WITH ANAHUAC MAINTENANCE SECTION SUPERVISOR, KEVIN EMERSON, 409-267-3611 FOR STOCKPILE LOCATION




DS

DocuSigned by:  
*[Signature]*  
5CAE84E05D7F456... 8/22/2024

LOCATION MAP




FED. RD. DIV. NO.	MAINTENANCE PROJECT			SHEET NO.
6				3
STATE	DISTRICT	COUNTY		
TEXAS	BMT	CHAMBERS		
CONTROL	SECTION	JOB	HIGHWAY NO.	
6470	68	001	IH 10 WB FR	

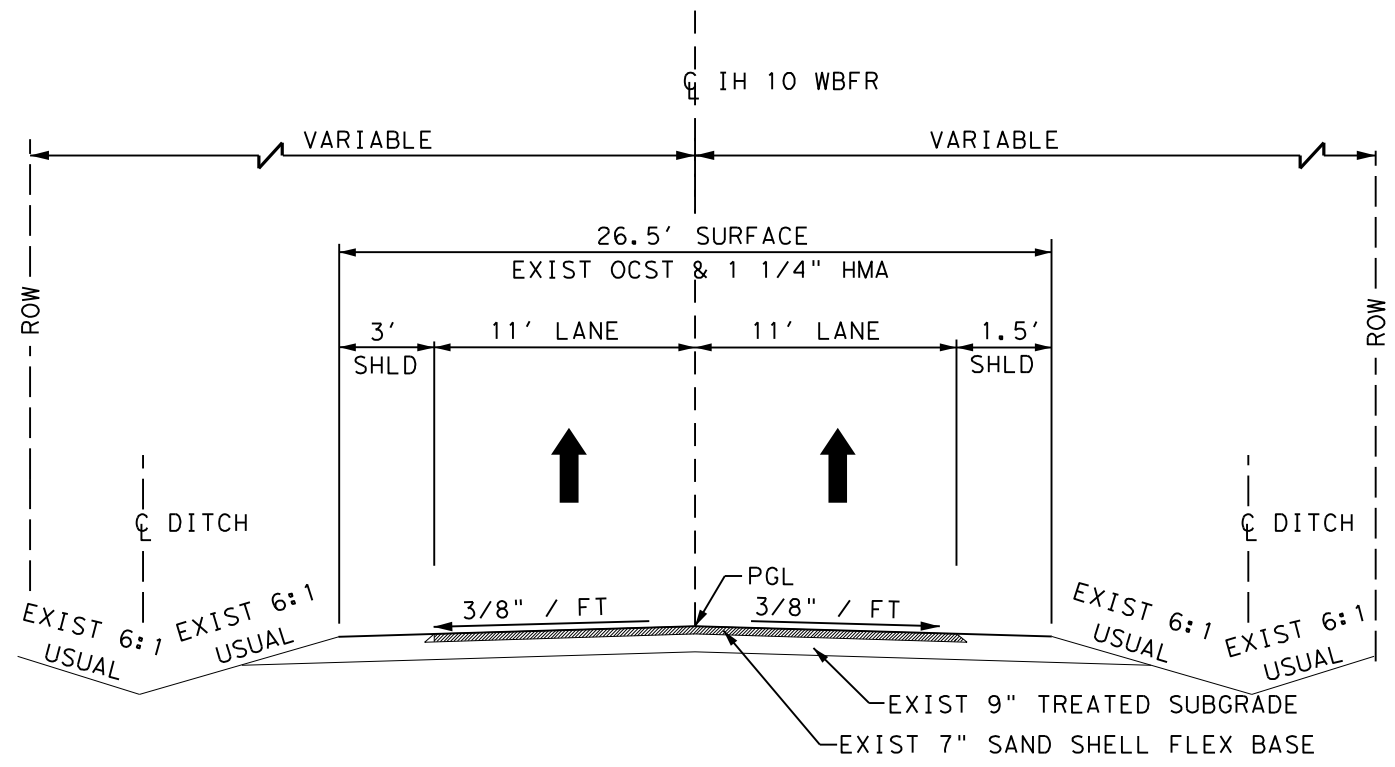

**EXISTING TYPICAL SECTION**

STA. 1+00 TO STA. 58+71

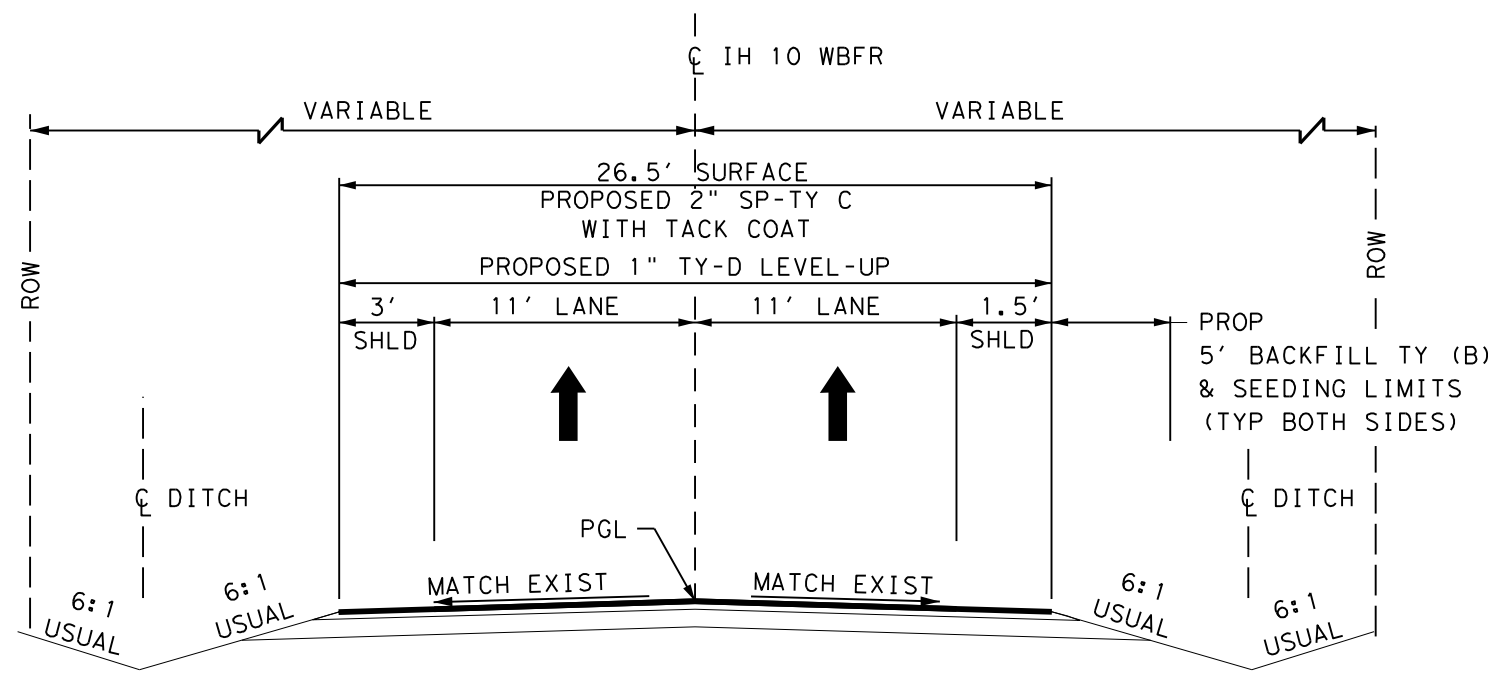

**PROPOSED TYPICAL SECTION**

STA. 1+00 TO STA. 58+71

DS

DocuSigned by: *[Signature]* 8/22/2024  
5CAE84E05D7F456...


**IH 10 WB FR**

**TYPICAL SECTIONS**

SCALE NTS


Texas Department of Transportation  
SHEET 1 OF 2

FHWA TEXAS DIVISION				SHEET NO.
				4
STATE	DISTRICT	COUNTY		
TEXAS	BMT	CHAMBERS		
CONTROL	SECTION	JOB	HIGHWAY NO.	
6470	68	001	IH 10 WB FR	

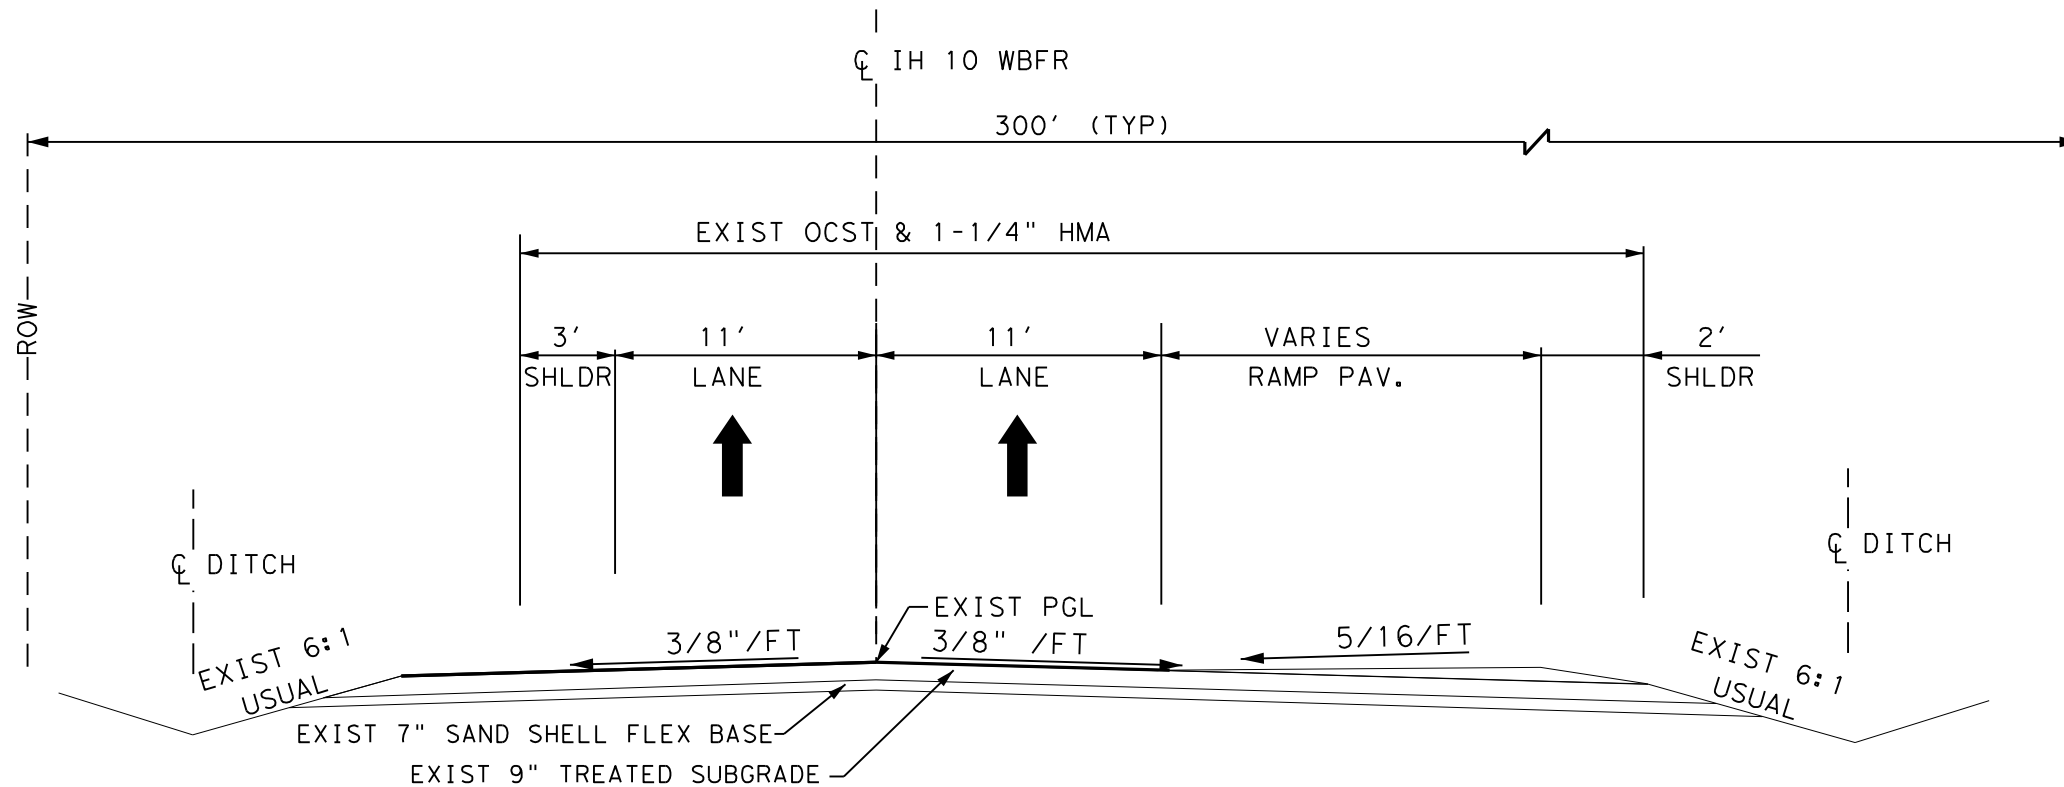

**EXISTING TYPICAL SECTION**

STA. 0+75 TO STA. 2+75  
STA. 56+09 TO STA. 58+09

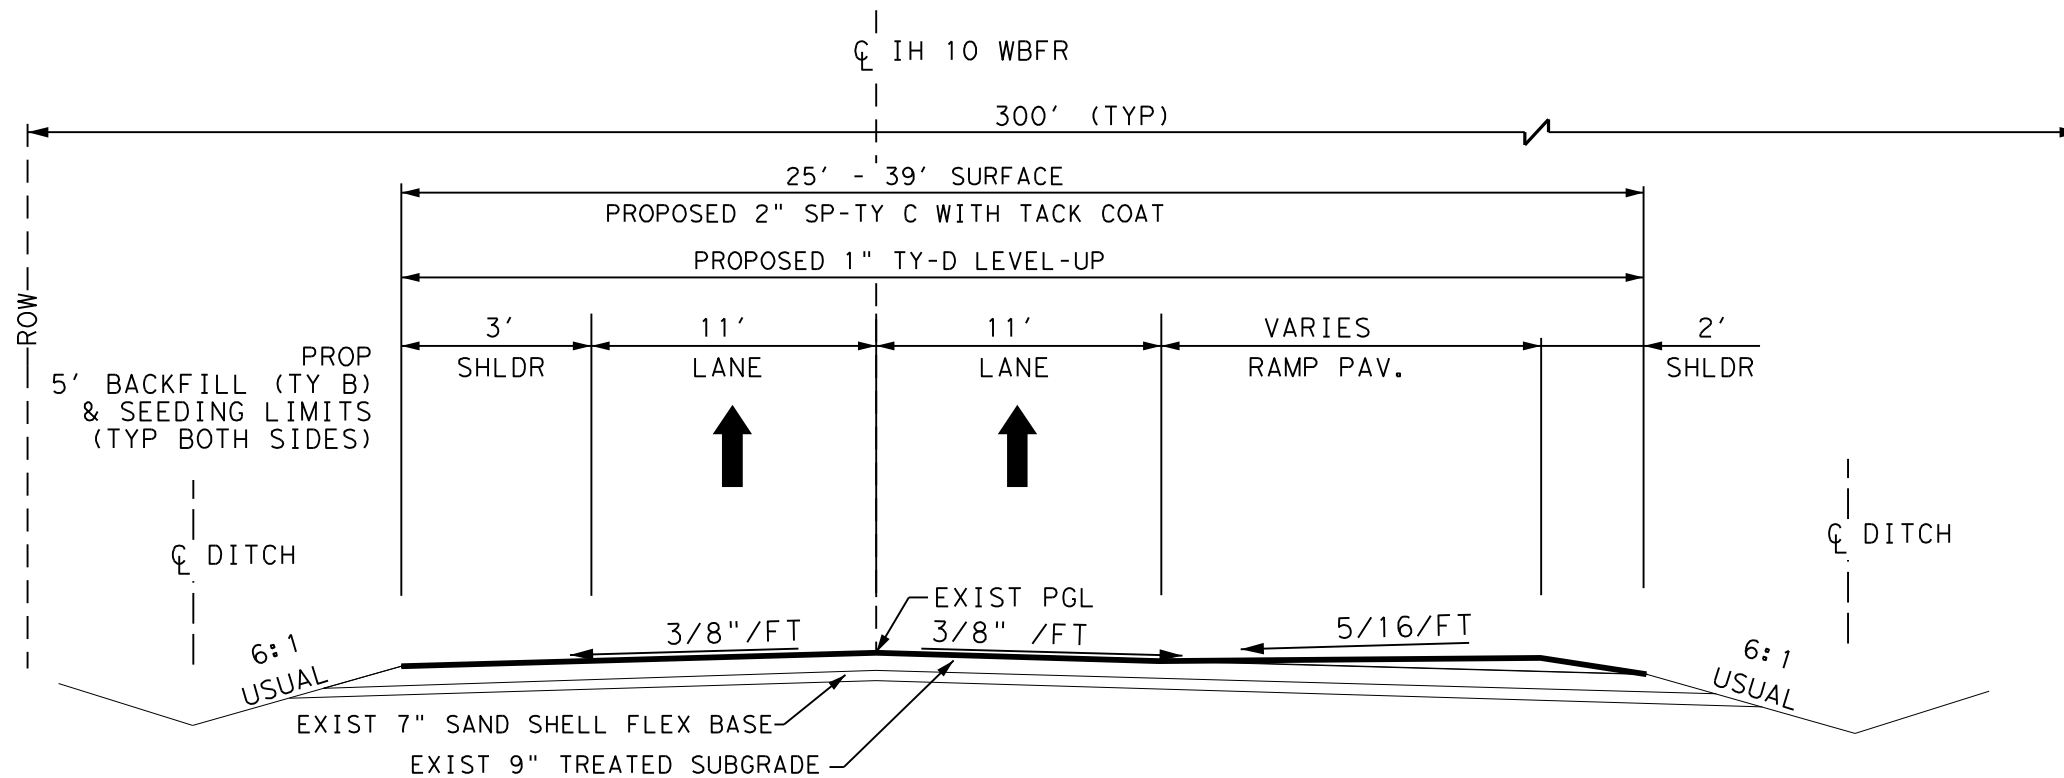

**PROPOSED TYPICAL SECTION**

STA. 0+75 TO STA. 2+75  
STA. 56+09 TO STA. 58+09

DS

DocuSigned by:  
*[Signature]* 8/22/2024  
5CAE84E05D7F456...

**IH 10 WB FR**

**TYPICAL SECTIONS**

SCALE NTS  
Texas Department of Transportation  
SHEET 2 OF 2

FHWA TEXAS DIVISION		SHEET NO.	5
STATE	DISTRICT	COUNTY	
TEXAS	BMT	CHAMBERS	
CONTROL	SECTION	JOB	HIGHWAY NO.
6470	68	001	IH 10 WB FR

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

**GENERAL NOTES:**

**General:**

Contractor questions on this project are to be addressed to the following individuals:

Name Roberto Rodriguez, P.E.

Email [Roberto.M.Rodriguez@txdot.gov](mailto:Roberto.M.Rodriguez@txdot.gov)

Name Dan Thompson, P.E.

Email [Daniel.Duke.Thompson@txdot.gov](mailto:Daniel.Duke.Thompson@txdot.gov)

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All Contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Prior to beginning work, the Contractor is required to attend a preconstruction meeting in the office of the Liberty Area Engineer located at 209 Layl Drive.

The Contractor will notify the Engineer or TxDOT representative by 8:15 A.M. of that working day if no work is to be performed during that day.

Work on this Contract is not to be considered complete until the Contractor receives written notification from the Area Engineer. Contractor will not demobilize from project until this written notification has been presented. Oral notification will not constitute official notification that work is complete.

The Contractor will comply with all ordinances and regulations of local, municipal, and county governments as well as the Texas Natural Resources Conservation Commission/Texas Commission on Environmental Quality which may be applicable to this Contract.

Arrange work so that no machinery or equipment will be closer than 30 feet to the roadway after sunset unless authorized nor storage of materials will be permitted at Maintenance Section yards, District Office, or highway right of way.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

There will be no lane closures during major holidays as directed.

Protect all areas of the Right of Way which are not included in the actual limits of the proposed construction areas from destruction. Restore any damaged areas to as good or better. No payment will be made for this work.

Assume full responsibility for location of underground utility installations which may exist, and notification to the utility involved in case of conflict or damage and will be the responsibility of the Contractor for damage that occurs due to negligence. Consider this work to be subsidiary to the pertinent bid Items of the Contract.

Law enforcement will be considered for this Contract under the following conditions unless otherwise directed:

- Traffic shifts at intersections where unexpected or sudden queuing is anticipated;
- Complex intersections where flaggers may not be able to maintain adequate traffic control.

Provide one full-time off-duty uniformed officer, with transportation jurisdiction and full police powers in the county or city in which the project is located, during construction as directed. The officers must be able to show proof of certification by the Texas Commission on Law Enforcement Officers Standards. Coordinate with local law enforcement and arrange for law enforcement as directed or agreed. Complete the daily tracking form provided by the Department and submit invoices that agree with the tracking form for payment at the end of each month approved services were provided. Peace Officer will be paid by force account, and must be approved.

The vehicle used must be a marked law enforcement vehicle in the city or county where the project is located.

**Item 6: Control of Materials**

Flammable and combustible materials will be stored at a designated location as approved. Do not store flammable and combustible materials under or adjacent to Bridge class structures. Daily removal of these materials will be considered incidental work.

**Item 7: Legal Relations and Responsibilities**

Furnish all materials, labor and incidentals required to provide for traffic across the highway and for temporary ingress and egress to private property in accordance with Section 7.2.4 of the 2014 Standard Specifications at no additional cost to the State. Consider this work to be subsidiary to the pertinent bid Items of the Contract.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

The Contractor will be completely responsible for the immediate removal of any material that gets upon any vehicle because of their operation.

**Item 8: Prosecution and Progress**

Compute and charge working days in accordance with Section 8.3.1.4 Standard Workweek.

Work hours between 8:00 a.m. and 4:00 p.m.

No work allowed on Saturday unless approved by the Engineer.

Submit monthly progress schedules in accordance with Section 8.5.5.2.3. Failure to supply updated project schedule may result in the Engineer withholding progress (monthly) payments.

Submit a schedule of the proposed work to the Area Engineer at the preconstruction meeting. If at any time during the Contract the work progress is behind the initial schedule, submit documentation indicating how the project will be accelerated to ensure project completion in the remaining Contract time.

The Contractor must maintain a fluent English-Speaking person or have an answering system to answer the telephone between the hours of 8:00 am and 5:00 pm Monday through Friday. It is the Contractor's responsibility to keep the Engineer notified of the correct telephone number.

Ensure enough workers, equipment and materials are available to continuously and diligently prosecute the work to conclusion. Not enough resources resulting in poor performance may be grounds for default.

Adjoining projects may be in progress during the construction of a portion of this project. Plan and prosecute the sequence of construction and the traffic control plan with adjacent construction projects, if applicable. Manage construction of all phases to minimize disruption to traffic.

Maintain one open lane of traffic during construction, unless otherwise approved.

**Item 134: Backfilling Pavement Edges**

Backfilling pavement edges quantity by station includes both sides of the roadway. Backfill the pavement edges daily so that no drop-off conditions exist.

Furnish Type B material. Type B millings from planing operations and excavated material from base repairs can be used.

Size RAP so that all material passes the two-inch sieve. Use RAP that does not contain deleterious material such as clay or organic material.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

**Item 164: Seeding for Erosion Control**

Apply cellulose mulch fiber seeding in areas designated in the plans or as directed. Prior to seeding, finish the areas designated to a smooth surface for a uniform application of seed.

Seed disturbed areas that are not worked in 14 days.

Should areas of natural growth be deemed by the engineer to have sufficient cover, seeding in such areas will be eliminated upon order of the engineer.

**Item 168: Vegetative Watering**

Equip water trucks with sprinkler systems capable of covering the entire area to be seeded or sodded from the roadway.

Water all newly placed sod or seeded areas the same day of installation. Thereafter, maintain the sod or seeded areas in a well-watered condition and at no time allow the areas to dry to the condition that water stress is evident.

Mechanical watering may not be required during periods of adequate moisture as determined.

Rate of application is approximate. Actual rate may be modified as directed by the engineer. Comply with stabilization requirements for 70% grass coverage; uniform vegetative coverage is required. During this period, meter and operate water equipment under pumping pressure capable of delivering the required quantities of water necessary. For Permanent seeding each cycle will be executed weekly for 12 weeks, unless directed otherwise. For Temporary seeding each cycle will be executed weekly for 6 weeks, unless directed otherwise.

Provide a log book showing daily water usage and receipts of water applied, in addition to metering the water equipment.

**Item 344: Superpave Mixtures**

Do not place longitudinal joints in the wheel path.

Use trackless tack coat.

Use aggregate that meets the SAC requirement of class A for all surface mixes. RAP aggregate must meet the requirements of Table 1.

Aggregates used on shoulders and ramps are required to meet SAC requirements. Provide mix designs. Mix designs must be verified and approved.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

Remove all vegetation from pavement edges, intersections, curbs and gutters and driveways before planning or ACP operations. This work will not be paid for directly but will be subsidiary to the various bid Items.

Operate the spreading and finishing machine at a uniform forward speed consistent with the plant production rate, hauling capability, and roller train capacity to result in a continuous operation. The speed will be slow enough, so that stopping between trucks is not ordinarily required. If the Engineer determines sporadic delivery of material is adversely affecting the HMA placement, the Engineer may require paving operations to cease until acceptable methods are employed to minimize starting and stopping of the paver.

**Item 351: Flexible Pavement Structure Repair**

The repair areas will require full depth saw-cut when milling is not used. Consider this work to be subsidiary to the various bid items of the contract.

Provide Flexible Pavement Repair with material meeting the requirements of Item 341, Type B (PG 64-22) unless approved otherwise. Place Hot Mix with a constant longitudinal surface grade and tie in flush with the existing surface at each end and both sides of the repair area.

Minimum patch sizes will be one half lane in width and 10' in length.  
 Match the existing cross slope in the repair areas, unless directed otherwise.

All repair locations must be filled the same day they are excavated. No open cut areas will be allowed overnight.  
 Some repair areas may consist of cement treated base. If this material is encountered, it will be removed and paid for as flexible pavement structure repair under this Item.

Depth of repair will typically match existing pavement depth but may be increased to remove weak subgrade or decreased if existing pavement is determined to be stable when directed.  
 All excavated areas to be filled by the end of each workday and opened to traffic.

Use a vibratory roller with drum type A or B to accomplish sufficient compaction.

Testing for asphalt concrete materials provided under this Item in accordance with respective specifications may be waived provided there is sufficient evidence from other ongoing TxDOT projects to establish conformance with the respective specifications.

Pavement repair will be constructed so that all travel lanes are open by the end of each defined working day. Do not leave open repair or lane closure at night.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

**Item 354: Planing and Texturing Pavement**

Where the underlying flexible base is exposed during the planing operation, prime this area with an asphalt at a rate as directed and patch with an approved HMA material, at the end of the day's operation in which it occurs. These items of work will not be paid for directly but will be subsidiary to Item 354.

Prior to leaving for the day, place a hot mix cold laid wedge of mix to prevent an abrupt bump or drop at the end of milling. Consider this subsidiary to various bid Items.

**Item 502: Barricades, Signs, and Traffic Handling**

Remove all traffic control devices from the roadway, off the right of way, when they are not in use. Devices scheduled to be used within 3 days may be placed along the shoulder of the roadway or right of way when not in use, or stored in other approved areas on the project. Cover any construction signs that are not in effect that are installed in a fashion that will not allow them to be removed from the right of way easily.

Furnish and maintain all barricades and warning signs, including all temporary and portable traffic control devices necessary to complete construction. Construct and place in accordance with the barricades and construction standards, latest Texas MUTCD, and the traffic control plans, or as directed.

Place no construction signs in conflict with existing signs. If placement of construction signs for the Contract blocks existing signs, make adjustment with confirmation from the Engineer.

Plan work sequence in a manner that will cause the minimum interference with traffic during construction operations.

Work will not be allowed on the roadway without either a proper lane closure or shoulder closure. Closures will be as detailed on the plans as directed.

Provide certified flaggers at each side road intersection and ensure they have communication with the certified flaggers controlling the movement of traffic on the highway.

Construct all work zone signs, sign supports, and barricades from material other than wood unless approved.

Metal posts, if used, are to be galvanized.

Aluminum signs, if used, will meet the following minimum thickness requirements:

Square Feet	Minimum Thickness
Less than 7.5	0.080 inches
7.5 to 15	0.100 inches
Greater than 15	0.125 inches



**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

After completion of the project when removing the barricades and signs, fill in any holes left by the barricades of sign supports and restore the area in which the signs were removed to its original condition.

Work zone enhancements to improve the effectiveness of the Traffic Control Plan that could not be foreseen in the project planning and design stage will be paid for in accordance with Article 9.7, "Payment for Extra Work and Force Account Method". These enhancements will be mutually agreed and based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid Items if it does not slow the implementation of enhancement.

Remove all traffic control devices from the roadway, off the right of way, when they are not in use. Devices scheduled to be used within 3 days may be placed 30 feet from the edge of road when not in use, or stored in other approved areas on the project.

Provide shadow vehicles with Certified Truck Mounted Attenuators (TMA) for lane closures during construction.

The use of an orange reflectorized safety vest and a white safety hat will be required by persons performing flagging operations and each person will be certified and properly instructed in flagging procedures.

Maintain all barricades and warning signs, including all temporary and portable traffic control devices necessary during the various phases of construction, in accordance with the BC and TCP standards on the plans, the latest version of the Texas Manual on Uniform Traffic Control Devices, and as directed.

Provide and maintain flaggers at such points and for such periods of time as may be required to provide for the safety and convenience of public travel and Contractor's personnel, and as shown on the plans or as directed.

Provide Type "C" flashing arrow panel to be used in connection with the lane closure signing. Furnishing, maintaining, and operating these devices in a manner acceptable to the Engineer will be at the Contractor's expense.

Limit lane closures to one mile.

**Item 503: Portable Changeable Message Sign**

Portable changeable message signs (PCMS) will be required while work is taking place.

Message on the sign will be as specified on BC(6)-21, Provide screen type "Continuous Line Matrix".

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

When possible, PCMS units should be located in advance of the last available alternate route before lane closure. They may also be relocated to improve advance warning in case of unanticipated queuing or congestion.

Messages to be provided are: PHASE 1: EXIT 815 CLOSED

PHASE 2: USE EXIT 817

Engineer may change message at his discretion.

**Item 504: Field Office and Laboratory**

Provide Type B Structure Laboratory Field Office for Asphalt Testing.

Furnish and install adequate equipment, outlets, lighting, air-conditioning, heating, and ventilation. Provide partitioned restroom furnished with restroom supplies, a lavatory, and a flush toilet connected to a sewer or septic tank.

Additional required appurtenances:

1. Additional workbench and tables at least 3 ft. wide, 6 ft. long, and 3 ft. high.
2. Minimum two chairs and one desk, filing cabinets, solar screen blinds or shades.
3. An operational telephone system.
4. Water fountain or bottled water fountain able to provide cold water and have cup dispenser and cups.
5. Use an internet service provider (ISP) that can provide more than one computer access to ISP account at one time. ISP provider must be able to supply a minimum 100 gigabyte download speed per account.
6. Adequately power ventilate the room for the ignition oven. Provide a NEMA 6-50R (208/240 volt, 50 amp) outlet within 2.25 ft. of the ignition oven location and an independent exhaust outlet to the outside.
7. located a maximum of 8 ft. from the oven. Provide a level, sturdy and fireproof surface for the ignition oven with a minimum of 6 in. clearance between the furnace and other vertical surfaces.
8. Door openings must be 48-inches minimum width. If steps are required to gain access to the facility's 48-inch doors provide a landing dock with minimum dimension of 60 inches wide by 60 inches deep. The strong floor and landing of the facility will support the weight of all equipment and personnel providing a stable, essentially zero deflection during testing operations, acceptable to the Engineer.
9. Shared SuperPave Gyrotory Compactor will be furnished to the Engineer under the asphalt concrete pavement.

**County: Chambers**  
**Highway: IH-10 WB FR**

**CONTROL: 6470-68-001**

**Item 505: Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)**

In addition to the shadow vehicles with TMA that are specified as being required on the traffic control plan for this project, provide one additional shadow vehicles with TMA for paving operations and one for striping operations.  
 The Contractor will use the same additional TMA for both of these operations.

**Item 506: Temporary Erosion, Sedimentation, and Environmental Controls**

It is not anticipated that any erosion, sedimentation, or environmental control devices will be need on this project. The SW3P for this project will consist of the use of any temporary erosion control measures deemed necessary or as shown on these plans. This work will be paid for in accordance with Article 9.7., "Payment for Extra Work and Force Account Method."

**Item 585: Ride Quality for Pavement Surfaces**

Use Surface Test Type B – Schedule 3 to evaluate ride quality of "Ride Quality for Pavement Surfaces."

**Item 662: Work Zone Pavement Markers**

Place work zone short term pavement markings (tabs) as directed on the same day as mill and inlay operation. Final day of Mill and Inlay operations shall be non-removable striping.

**Item 666: Reflectorized Pavement Markings**

Furnish Type II drop-on glass beads.



CONTROLLING PROJECT ID 6470-68-001

DISTRICT Beaumont  
HIGHWAY IH0010

COUNTY Chambers

# Estimate & Quantity Sheet

CONTROL SECTION JOB				6470-68-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00211186			
COUNTY				Chambers			
HIGHWAY				IH0010			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	104-7011	REMOV CONC (DRIVEWAYS)	SY	92.000		92.000	
	132-7003	EMBANK (FNL)(OC)(TY B)	CY	10.000		10.000	
	134-7002	BACKFILL (TY B)	STA	58.000		58.000	
	164-7005	BROADCAST SEED (TEMP_WARM)	SY	6,412.000		6,412.000	
	168-7001	VEGETATIVE WATERING	TGL	7.713		7.713	
	341-7003	D-GR HMA TY-B PG64-22 (EXEMPT)	TON	191.000		191.000	
	341-7046	D-GR HMA TY-D PG64-22 (LEVEL-UP)	TON	941.000		941.000	
	341-7082	TACK COAT	GAL	1,167.000		1,167.000	
	344-7020	SP MIXES SP-C SAC-A PG70-22	TON	1,883.000		1,883.000	
	344-7077	TACK COAT	GAL	1,167.000		1,167.000	
	351-7005	FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	SY	2,671.000		2,671.000	
	354-7032	PLANE ASPH CONC PAV(0" TO 2")	SY	1,813.000		1,813.000	
	360-7047	CONC PVMT (CRCP)(HES) (8")	SY	84.000		84.000	
	432-7001	RIPRAP (CONC)(4 IN)	CY	2.500		2.500	
	464-7003	RC PIPE (CL III)(18 IN)	LF	16.000		16.000	
	467-7308	SET (TY II) (18 IN) (RCP) (6: 1) (P)	EA	2.000		2.000	
	496-7004	REMOV STR (SET)	EA	2.000		2.000	
	500-7001	MOBILIZATION	LS	1.000		1.000	
	502-7001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	2.000		2.000	
	503-7001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	30.000		30.000	
	505-7001	TMA (STATIONARY)	DAY	30.000		30.000	
	505-7003	TMA (MOBILE OPERATION)	DAY	2.000		2.000	
	530-7007	DRIVEWAYS (CONC) (HES)	SY	37.000		37.000	
	530-7010	DRIVEWAYS (ACP)	SY	150.000		150.000	
	644-7001	IN SM RD SN SUP&AM TY10BWG(1)SA(P)	EA	3.000		3.000	
	644-7004	IN SM RD SN SUP&AM TY10BWG(1)SA(T)	EA	8.000		8.000	
	644-7073	REMOVE SM RD SN SUP&AM	EA	11.000		11.000	
	662-7112	WK ZN PAV MRK SHT TERM (TAB)TY W	EA	433.000		433.000	
	666-7023	REFL PAV MRK TY I (W)8"(SLD)(090MIL)	LF	510.000		510.000	
	666-7407	REFL PAV MRK TY I (W)6"(BRK)(090MIL)	LF	1,450.000		1,450.000	
	666-7410	REFL PAV MRK TY I (W)6"(SLD)(090MIL)	LF	5,771.000		5,771.000	
	666-7422	REFL PAV MRK TY I (Y)6"(SLD)(090MIL)	LF	5,771.000		5,771.000	
	668-7089	PREFAB PM TY C (W)(24")(SLD)	LF	24.000		24.000	
	672-7006	REFL PAV MRKR TY II-C-R	EA	84.000		84.000	

DISTRICT	COUNTY	CCSJ	SHEET
Beaumont	Chambers	6470-68-001	11

### ROADWAY ITEMS

ROADWAY	STATION			LENGTH	AVERAGE PAVEMENT WIDTH	SURFACE AREA	104	132	134	164	168	341	341	341	344	344
							7011	7003	7002	7005	7001	7003	7046	7082	7020	7077
							REMOV CONC (DRIVEWAYS) SY	EMBANK (FNL)(OC)(TY B)	BACKFILL (TY B)	BROADCAST SEED (TEMP) (WARM)	VEGETATIVE WATERING (1.4 GAL/SY)	D-GR HMA TY-B PG64-22 (EXEMPT)	D-GR HMA TY-D PG64-22 (LEVEL-UP)	TACK COAT	SP MIXES SP-C SAC-A PG76-22	TACK COAT
BASIS OF ESTIMATE											1.4GAL/SY		113 LBS/SY	.07 GAL/SY	226 LBS / SY	.07 GAL/SY
UNIT OF MEASURE		LF	LF	SY	SY	CY	STA	SY	TGL	TON	TON	GAL	TON	GAL		
IH 10 WB FR	1+00 TO 13+50	1250	26	3611	0	0	13	1389	1.008	0	204	253	408	253		
	13+50 TO 26+50	1300	26	3756	37	0	13	1444	0.969	0	212	263	424	263		
	26+50 TO 39+50	1300	26	3756	55	10	13	1444	0.969	191	212	263	424	263		
	39+50 TO 52+50	1300	26	3756	0	0	13	1444	0.969	0	212	263	424	263		
	52+50 TO 58+71	621	26	1794	0	0	6	690	2.029	0	101	126	203	126		
IH 10 WBFR PROJECT TOTALS							92	10	58	6412	7.713	191	941	1167	1883	1167

### ROADWAY ITEMS CON'T

ROADWAY	STATION			LENGTH	AVERAGE PAVEMENT WIDTH	SURFACE AREA	351	354	360	432	464	467	496	503	505	505
							7005	7032	7047	7001	7003	7308	7004	7001	7001	7003
							FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	PLANE ASPH CONC PAV(0" TO 2")	CONC PVMT (CRCP)(HES)(8")	RIPRAP (CONC)(4 IN)	RC PIPE (CL III)(18 IN)	SET (TY ii) (18 IN) (RCP) (6:1) (P)	REMOV STR (SET)	PORTABLE CHANGEABLE MESSAGE SIGN	TMA (STATIONARY)	TMA (MOBILE OPERATION)
BASIS OF ESTIMATE																
UNIT OF MEASURE		LF	LF	SY	SY	SY	SY	CY	LF	EA	EA	DAY	DAY	DAY		
IH 10 WB FR	1+00 TO 13+50	1250	26	3611	0	888	0	0	0	0	0	0	0	0		
	13+50 TO 26+50	1300	26	3756	0	37	0	0	0	0	0	0	0	0		
	26+50 TO 39+50	1300	26	3756	377	0	84	2.5	16	2	2	30	30	2		
	39+50 TO 52+50	1300	26	3756	1733	0	0	0	0	0	0	0	0	0		
	52+50 TO 58+71	621	26	1794	561	888	0	0	0	0	0	0	0	0		
IH 10 WBFR PROJECT TOTALS							2671	1813	84	2.5	16	2	2	30	30	2

### ROADWAY ITEMS CON'T

ROADWAY	STATION			LENGTH	AVERAGE PAVEMENT WIDTH	SURFACE AREA	530	530
							7007	7010
							DRIVEWAYS (CONC)(HES)	DRIVEWAYS (ACP)
BASIS OF ESTIMATE								
UNIT OF MEASURE		LF	LF	SY	SY	SY		
IH 10 WB FR	1+00 TO 13+50	1250	26	3611	0	38		
	13+50 TO 26+50	1300	26	3756	37	0		
	26+50 TO 39+50	1300	26	3756	0	12		
	39+50 TO 52+50	1300	26	3756	0	100		
	52+50 TO 58+71	621	26	1794	0	0		
IH 10 WBFR PROJECT TOTALS							37	150

### BASIS OF ESTIMATE

ITEM NUMBER	DESCRIPTION	RATE	UNIT
168-7001	VEGETATIVE WATERING	1.4 GAL/SY	TGL
341-7046	D-GR HMA TY-D PG64-22 (LEVEL-UP)	113 LBS/SY	TONS
341-7082	TACK COAT	0.07 GAL/SY	GAL
344-7020	SP MIXES SP-C SAC-A PG76-22	226 IBS / SY	TONS
344-7077	TACK COAT	0.07 GAL/SY	GAL

### QUANTITY SUMMARIES

FED. RD. DIV. NO.	MAINTENANCE PROJECT NUMBER			SHEET NO.
6				12
STATE	DIST.	COUNTY		
TEXAS	BMT	CHAMBERS		
CONT.	SECT.	JOB	HIGHWAY NO.	
6470	68	001	IH 10 WB FR	

### WZ PAVEMENT MARKINGS

ROADWAY	STATION			662
				7112
				WK ZN PAV MRK SHT TERM (TAB)TY W-2
IH 10 WB FR	UNIT OF MEASURE			EA
	1+00	TO	13+50	94
	13+50	TO	26+50	98
	26+50	TO	39+50	98
	39+50	TO	52+50	98
	52+50	TO	58+71	47
IH 10 WBFR PROJECT TOTALS				433

### PERMANENT PAVEMENT MARKINGS

ROADWAY	STATION			LENGTH	666				668	672
					7023	7407	7410	7422	7089	7006
				REFL PAV MRK TY I (W)8"(SLD)(090MIL)	REFL PAV MRK TY I (W)6"(BRK)(090MIL)	REFL PAV MRK TY I (W)6"(SLD)(090MIL)	REFL PAV MRK TY I (Y)6"(SLD)(090MIL)	PREFAB PM TY C (W)(24")(SLD)	REFL PAV MRKR TY II-C-R	
IH 10 WB FR	UNIT OF MEASURE			LF	LF		LF	LF	LF	EA
	1+00	TO	13+50	1250	200	300	1250	1250	0	22
	13+50	TO	26+50	1300	0	300	1300	1300	12	16
	26+50	TO	39+50	1300	0	300	1300	1300	0	16
	39+50	TO	52+50	1300	0	300	1300	1300	12	16
	52+50	TO	58+71	621	310	250	621	621	0	14
IH 10 WBFR PROJECT TOTALS				510	1450	5771	5771	24	84	

### SIGNS

ROADWAY	STATION			644	644	644
				7001	7004	7073
				IN SM RD SN SUP&AM TY10BWG(1)SA(P)	IN SM RD SN SUP&AM TY10BWG(1)SA(T)	REMOVE SM RD SN SUP&AM
IH 10 WB FR	UNIT OF MEASURE			EA	EA	EA
	1+00	TO	13+50	1	0	1
	13+50	TO	26+50	2	4	6
	26+50	TO	39+50	0	0	0
	39+50	TO	52+50	0	3	3
	52+50	TO	58+71	0	1	1
IH 10 WBFR PROJECT TOTALS				3	8	11

NOTE: SIGNS 9 & 10 UTILIZE ONE POST

## QUANTITY SUMMARIES

FED. RD. DIV. NO.	MAINTENANCE PROJECT NUMBER			SHEET NO.
6				13
STATE	DIST.	COUNTY		
TEXAS	BMT	CHAMBERS		
CONT.	SECT.	JOB	HIGHWAY NO.	
6470	68	001	IH 10 WB FR	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions that may appear hereon.

DATE: 8/21/2024 1:42:36 PM  
 FILE: T:\LIBERDES\POSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB

**BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:**

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

**WORKER SAFETY NOTES:**


- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

**COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES**


- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p><b>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT</b>  <a href="http://www.txdot.gov">http://www.txdot.gov</a></p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12

 Texas Department of Transportation		Traffic Safety Division Standard
<p><b>BARRICADE AND CONSTRUCTION                  GENERAL NOTES                  AND REQUIREMENTS</b></p> <p><b>BC (1) -21</b></p>		
FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT SECT	JOB
REVISIONS	6470 68	001
4-03 7-13	DIST	COUNTY
9-07 8-14	BMT	CHAMBERS
5-10 5-21		SHEET NO. 14


**TYPICAL LOCATION OF CROSSROAD SIGNS**

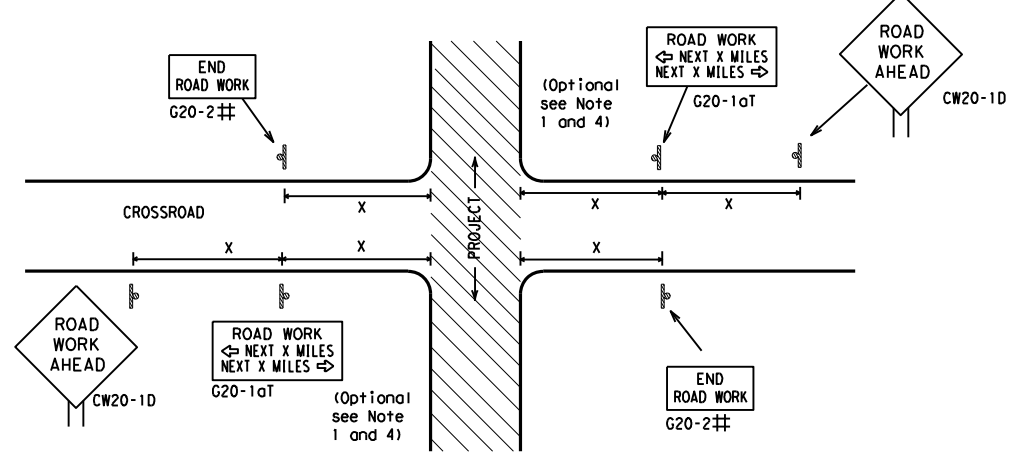

## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

**T-INTERSECTION**

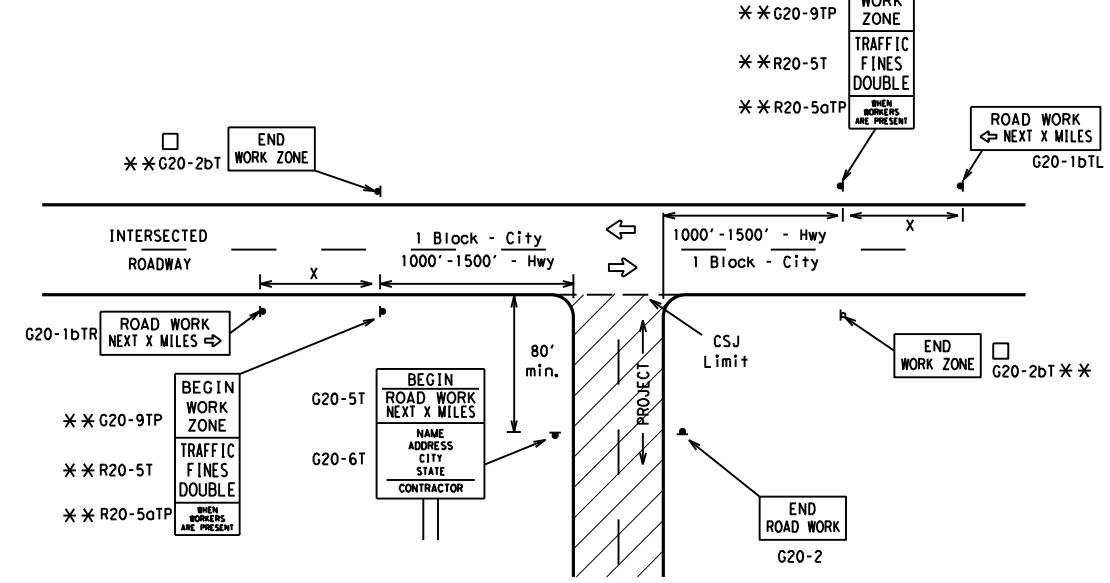

**CSJ LIMITS AT T-INTERSECTION**

1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

**TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING<sup>1,5,6</sup>**

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 <sup>4</sup>	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 <sup>2</sup>
			65	700 <sup>2</sup>
			70	800 <sup>2</sup>
			75	900 <sup>2</sup>
			80	1000 <sup>2</sup>
			*	* <sup>3</sup>


\* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

**GENERAL NOTES**


1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

**WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS**

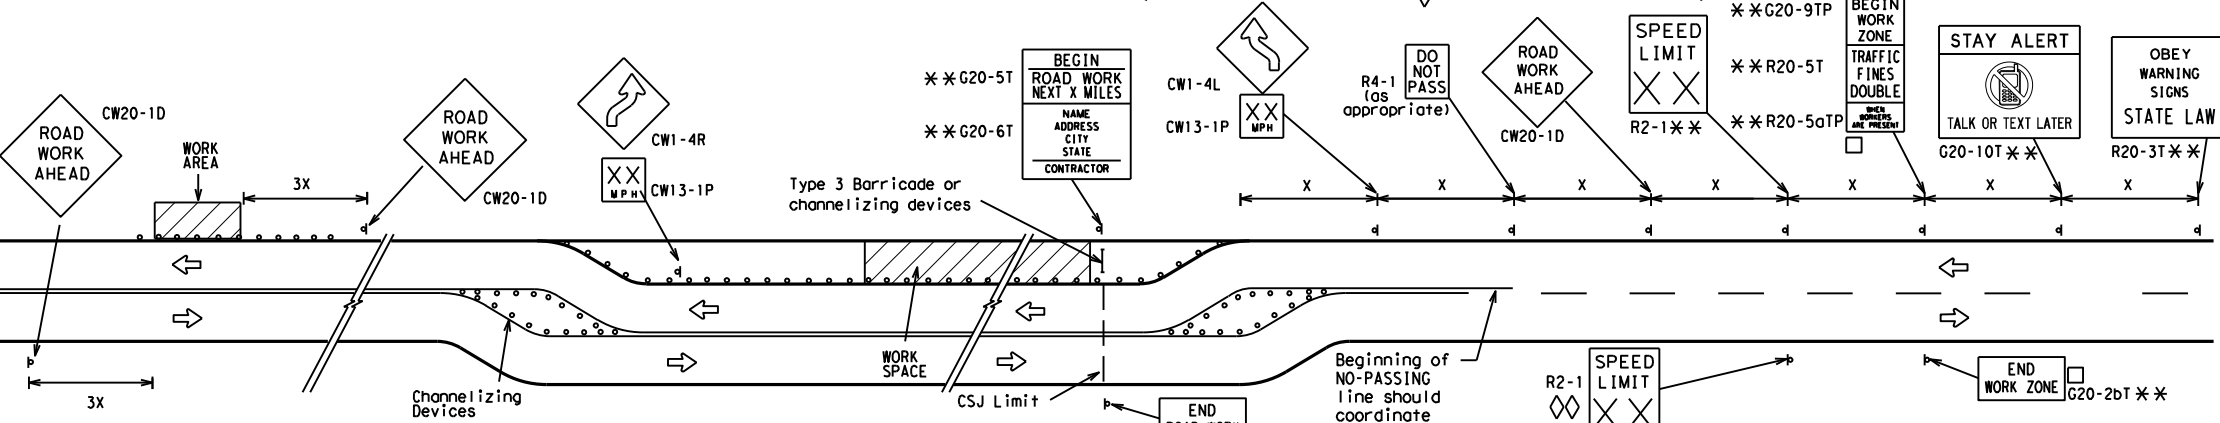


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS**

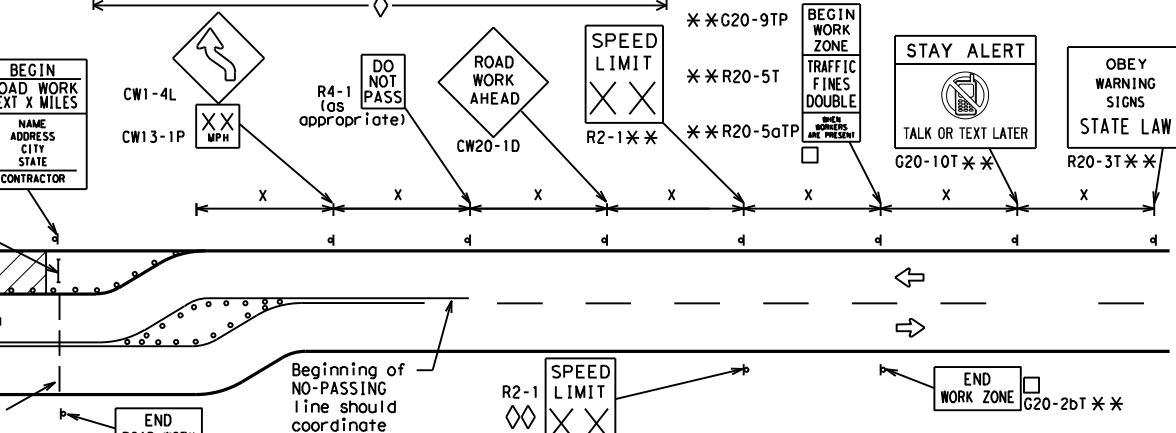

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS**

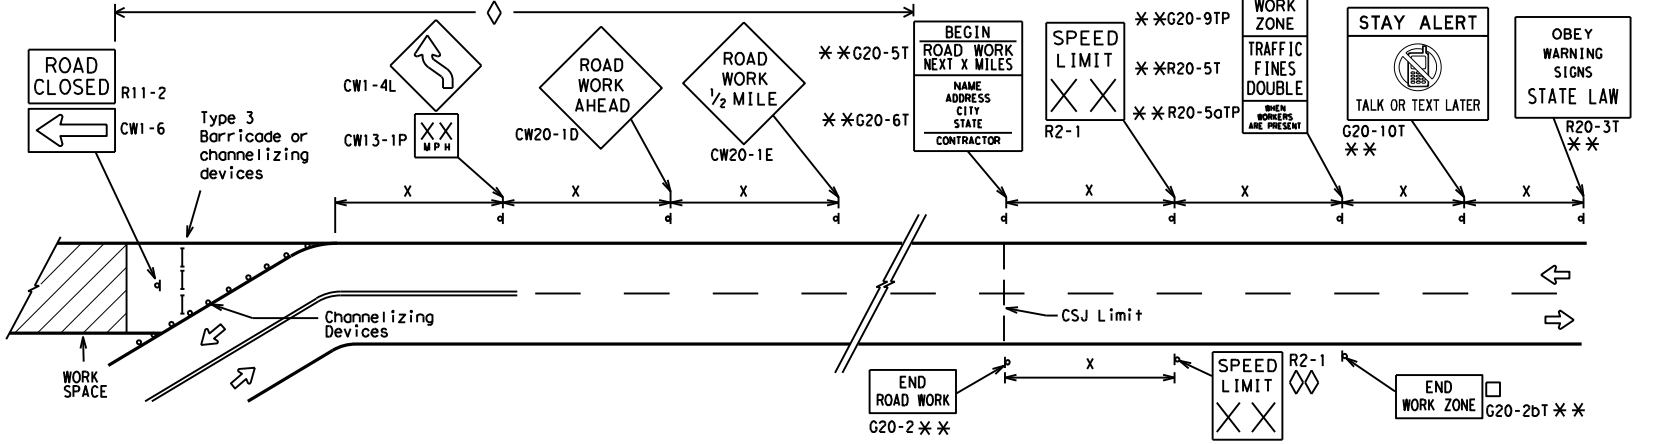

**NOTES**

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

**LEGEND**

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



**BARRICADE AND CONSTRUCTION PROJECT LIMIT**

**BC(2)-21**


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	BMT	CHAMBERS	15	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in the original drawings or specifications. DATE: 8/21/2024 1:42:37 PM FILE: T:\LIBRARY\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 WB BASE PLAN AND COVER STANDARD BC(2)-21.dgn

# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

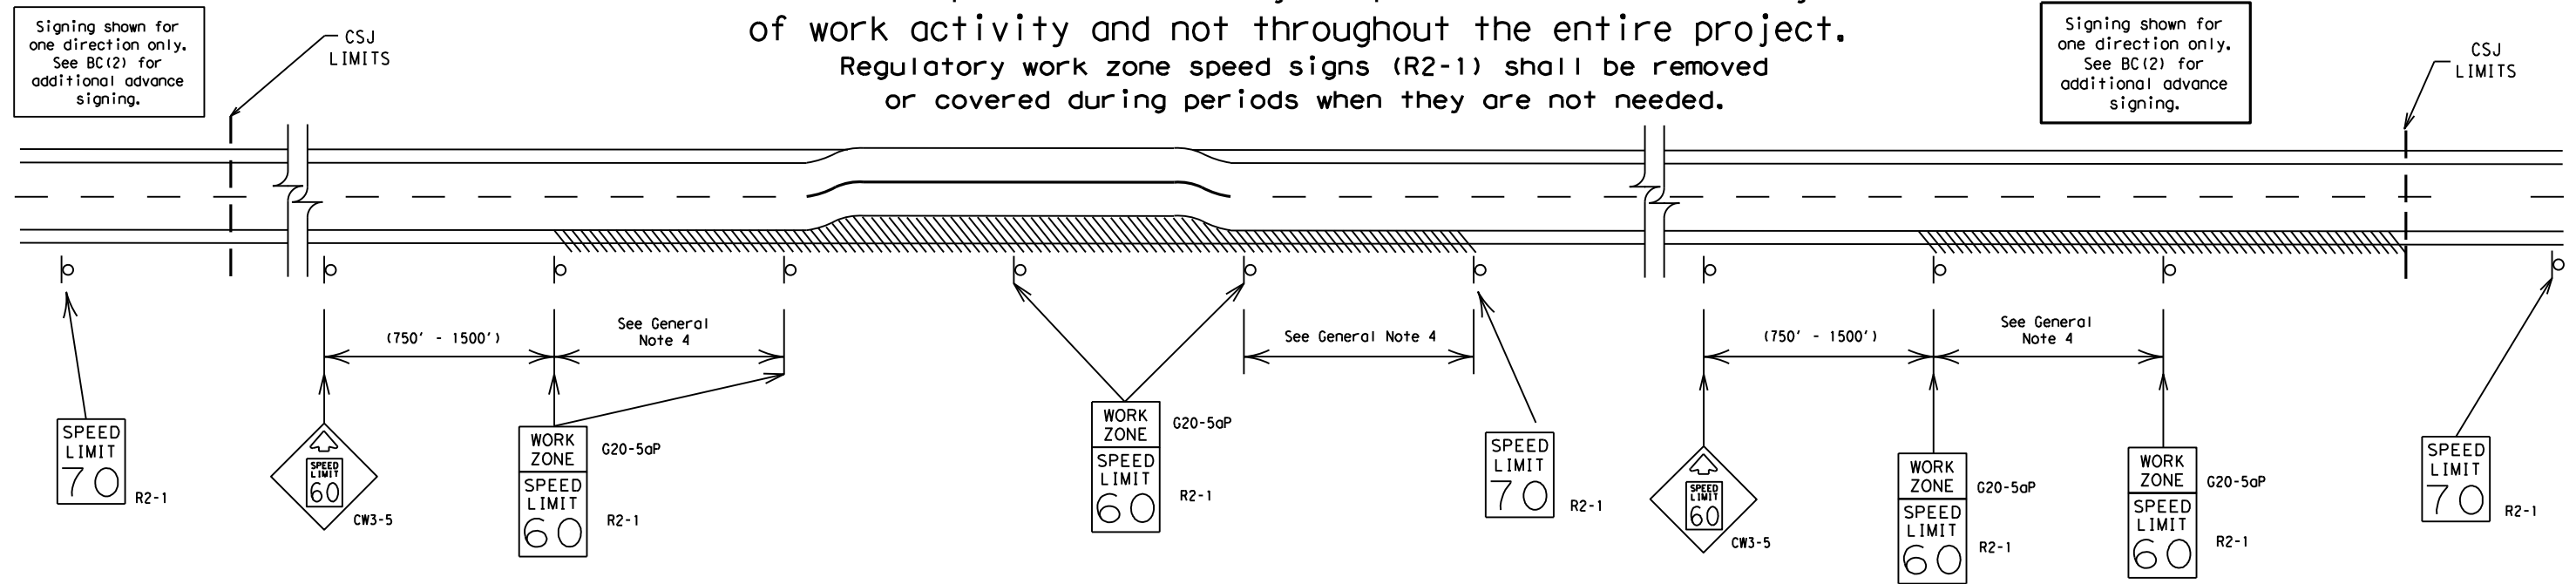

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

## GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
  - Law enforcement.
  - Flagger stationed next to sign.
  - Portable changeable message sign (PCMS).
  - Low-power (drone) radar transmitter.
  - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion or use of this standard in any project. DATE: 8/21/2024 1:42:39 PM FILE: T:\LIBERDES\POSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB 645116.PDF

SHEET 3 OF 12

		Traffic Safety Division Standard	
BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT			
BC (3) -21			
FILE:	bc-21.dgn	DW: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT
REVISIONS		JOB	HIGHWAY
9-07	8-14	6470 68	001 IH 10 WB FR
7-13	5-21	DIST	COUNTY
		BMT	CHAMBERS
		SHEET NO.	16




**TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS**

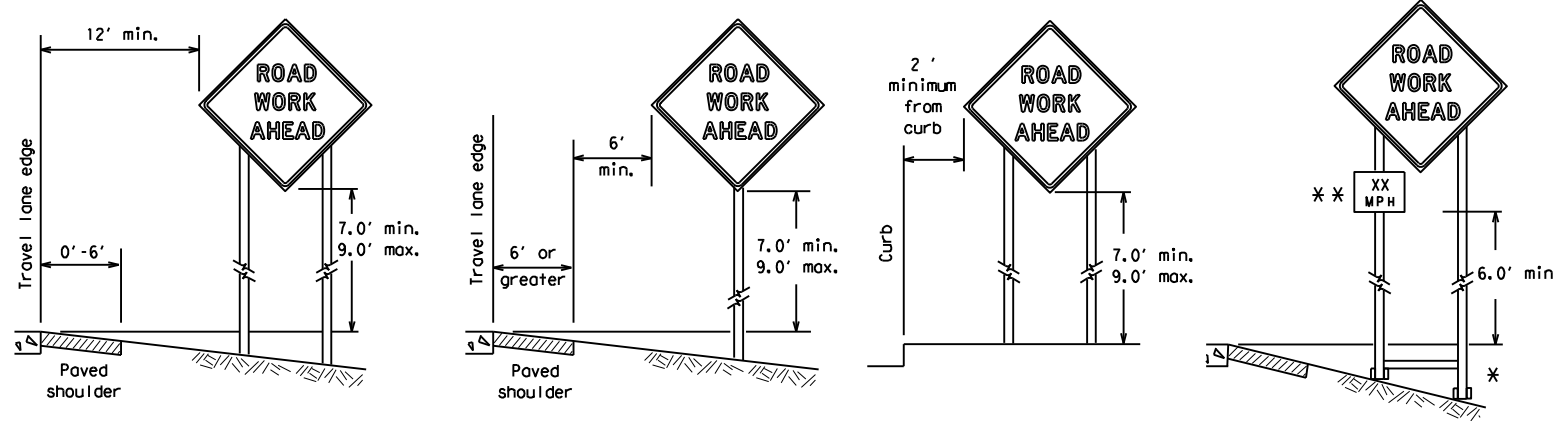

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\*\* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

**ATTACHMENT FOR SIGN SUPPORTS**

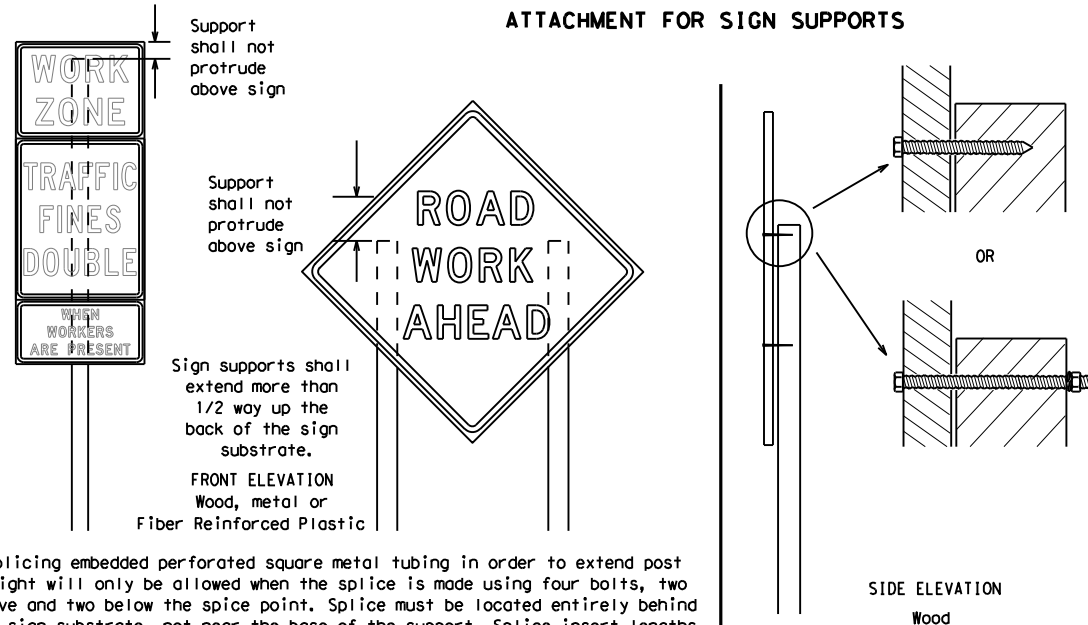


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

**Nails shall NOT be allowed.**  
Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

**STOP/SLOW PADDLES**

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflective when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

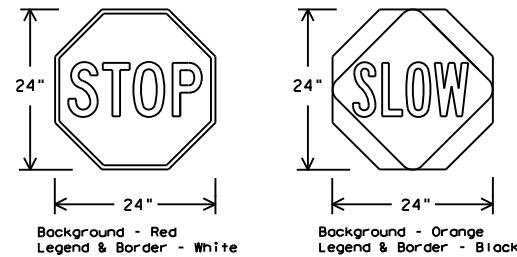

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

**CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS**

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTC list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

**GENERAL NOTES FOR WORK ZONE SIGNS**

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTC) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

**DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)**

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - a. Long-term stationary - work that occupies a location more than 3 days.
  - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - d. Short, duration - work that occupies a location up to 1 hour.
  - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

**SIGN MOUNTING HEIGHT**

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

**SIZE OF SIGNS**

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

**SIGN SUBSTRATES**

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTC lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

**REFLECTIVE SHEETING**

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

**SIGN LETTERS**

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

**REMOVING OR COVERING**

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

**SIGN SUPPORT WEIGHTS**

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTC list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

**FLAGS ON SIGNS**

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12



**BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES**


BC (4) -21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	68	001	10	WB FR			
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	BMT	CHAMBERS	17					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 8/21/2024 1:42:40 PM  
FILE: T:\LIBRARY\SE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\CON STANDARDS\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats for incorrect results or damages resulting from its use.

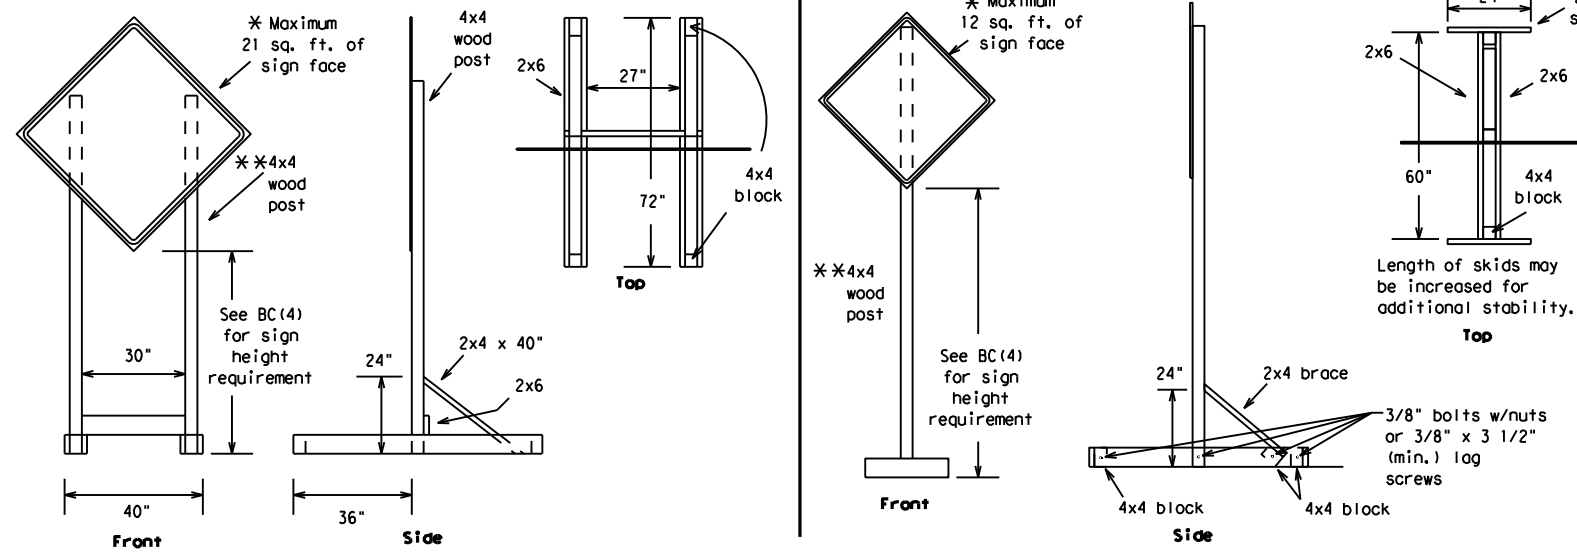


### SKID MOUNTED WOOD SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

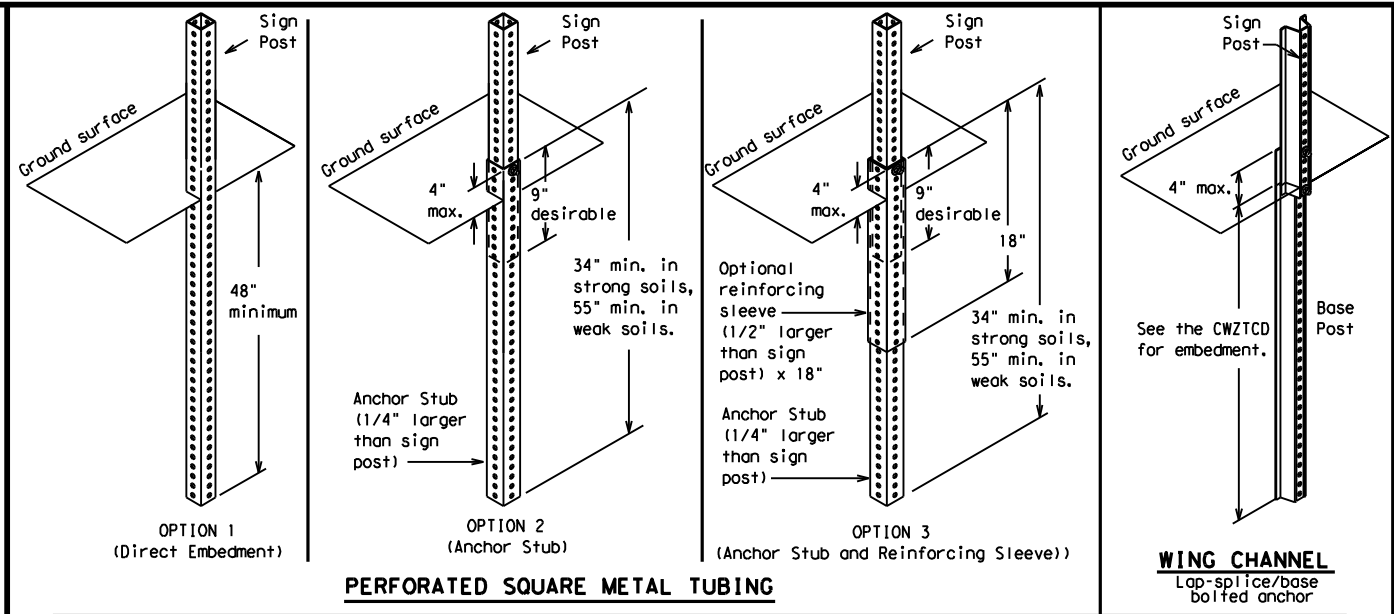

### GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support.  
 The maximum sign square footage shall adhere to the manufacturer's recommendation.  
 Two post installations can be used for larger signs.

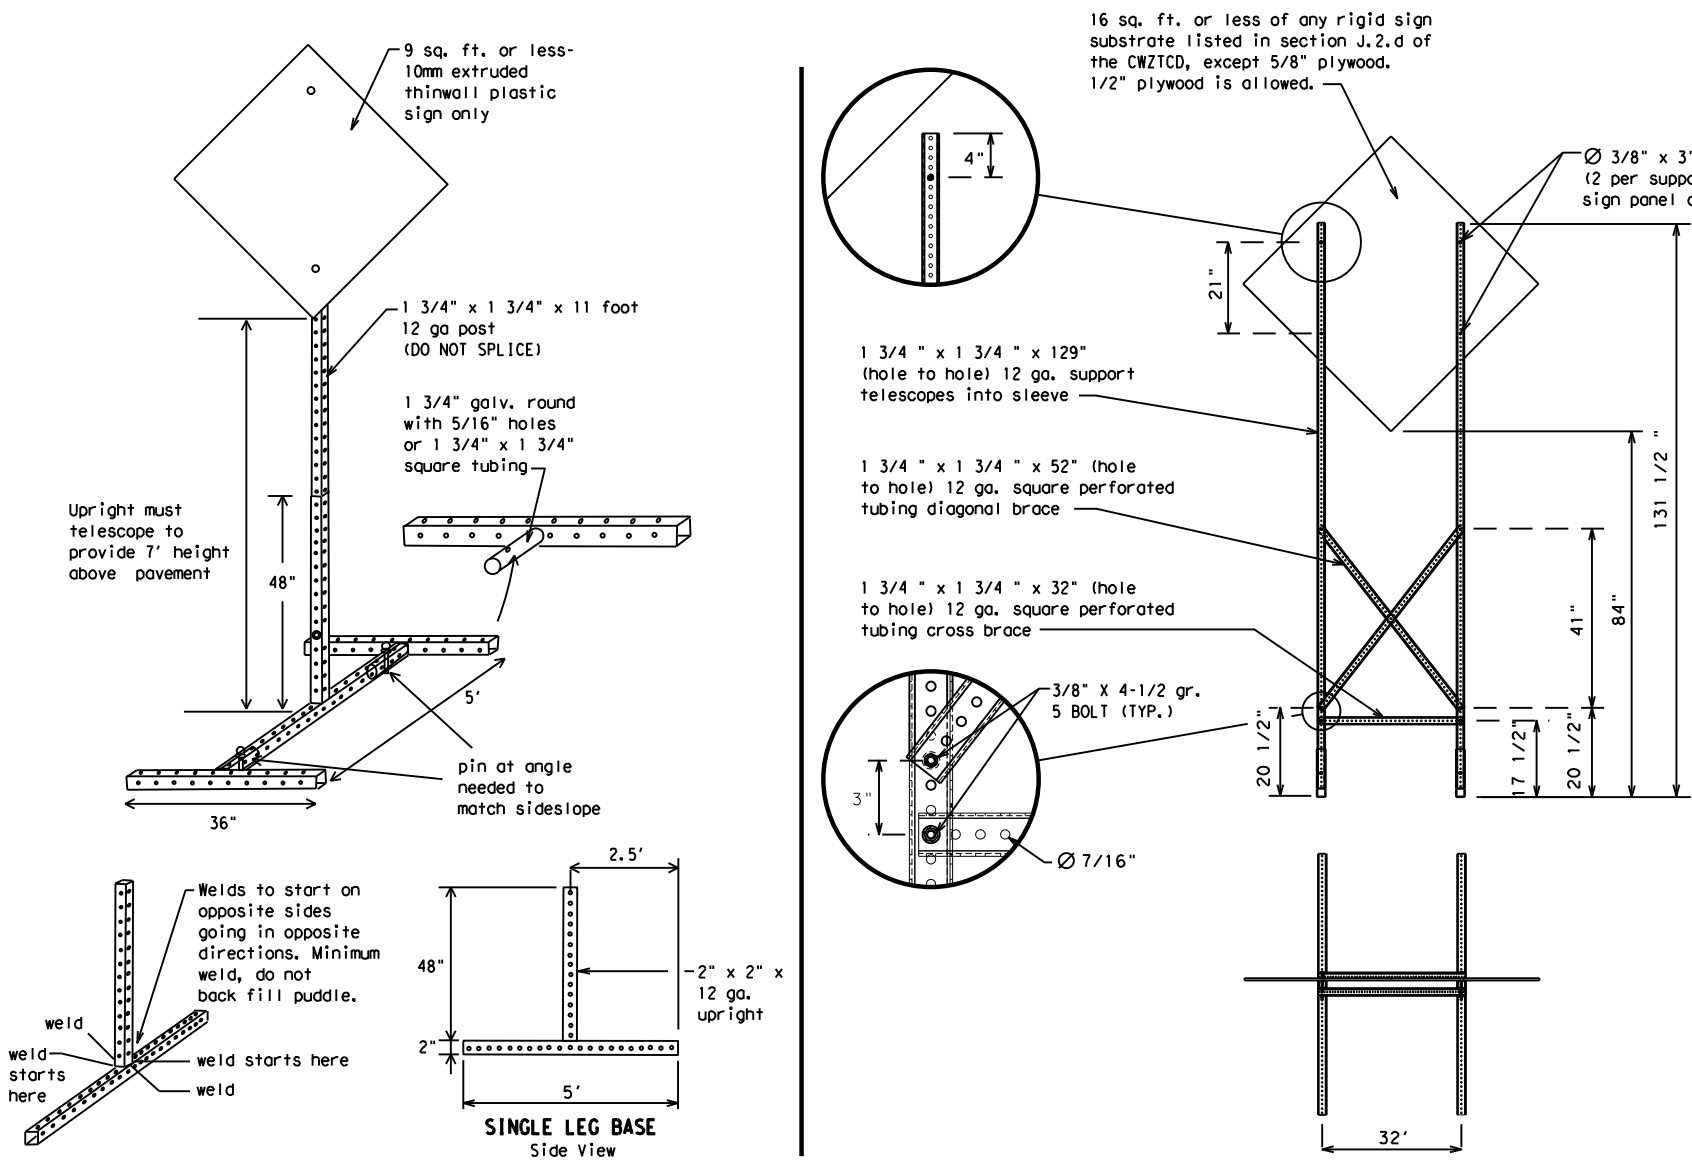

### SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

### WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

### OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

- ### GENERAL NOTES
- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
  - No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
  - When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- \* See BC(4) for definition of "Work Duration."
  - \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
  - ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

## BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS	6470	68	001	IH 10 WB FR					
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	BMT	CHAMBERS	18					

DATE: 8/21/2024 1:42:41 PM  
 FILE: T:\LIBERDES\PMSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 WB BASE REP AND OVERLAY\CON STANDARDS\BC-21.dgn

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

# RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

## PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLRs
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	Hwy	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHs
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number

## Phase 1: Condition Lists

### Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

### Other Condition List

ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT

ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

## Phase 2: Possible Component Lists

### Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

### Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

### Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

### \*\* Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

\*\* See Application Guidelines Note 6.

## APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

## WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.


## FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12


<h3>BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)</h3>			
<h2>BC (6) - 21</h2>			
FILE:	bc-21.dgn	DWG:	TxDOT
© TxDOT	November 2002	CONT:	SECT:
REVISIONS:	6470	68	001
9-07	8-14	DIST:	CHAMBERS
7-13	5-21	BMT:	CHAMBERS
HIGHWAY			SHEET NO.
			19

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

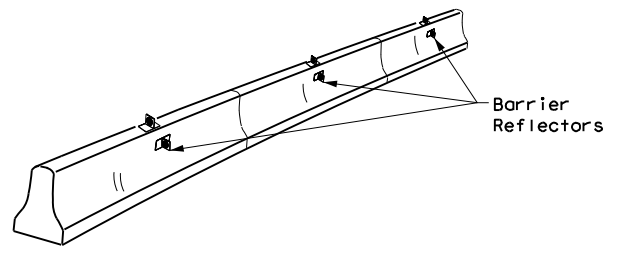


**CONCRETE TRAFFIC BARRIER (CTB)**

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

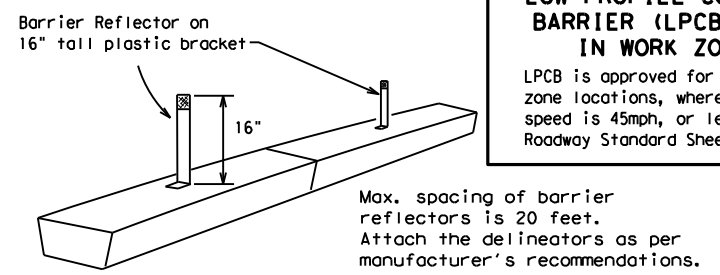

**LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES**

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

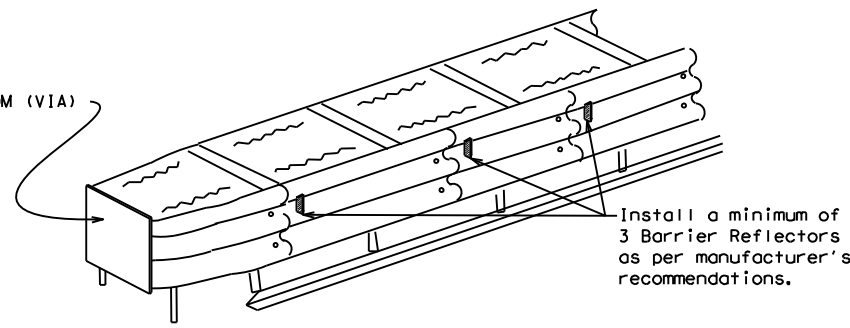

**DELINEATION OF END TREATMENTS**

**END TREATMENTS FOR CTB'S USED IN WORK ZONES**

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

**BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS**

**WARNING LIGHTS**



- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B<sub>FL</sub> or C<sub>FL</sub> Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

**WARNING LIGHTS MOUNTED ON PLASTIC DRUMS**

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.


**WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS**

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.



Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

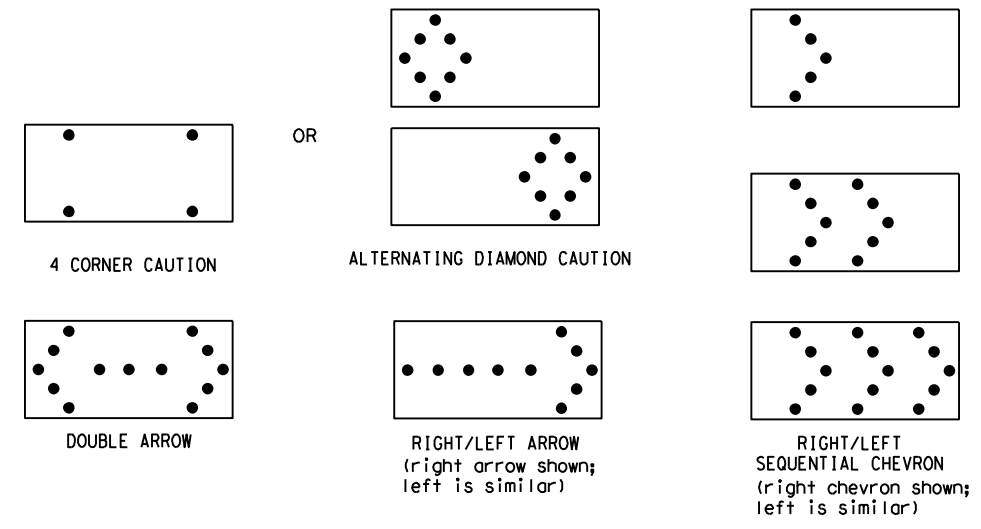

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

**ATTENTION**

Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

**FLASHING ARROW BOARDS**

SHEET 7 OF 12

**TRUCK-MOUNTED ATTENUATORS**

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



**BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR**

**BC (7) -21**

FILE:	bc-21.dgn	DW:	TxDOT	CR:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	68	001	IH 10 WB FR				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	BMT	CHAMBERS	20					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:42:44 PM  
 FILE: T:\LIBRERESPSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001\_IH-10 FR WB BASE REP AND OVERLAY\CON STANDARDS\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:42:45 PM  
 FILE: T:\LIBERES\NPSE MAINTENANCE\NFY 25\NFY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DGN\STANDARDS\bc-21.dgn

**GENERAL NOTES**

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

**GENERAL DESIGN REQUIREMENTS**

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

**RETROREFLECTIVE SHEETING**

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


**BALLAST**

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

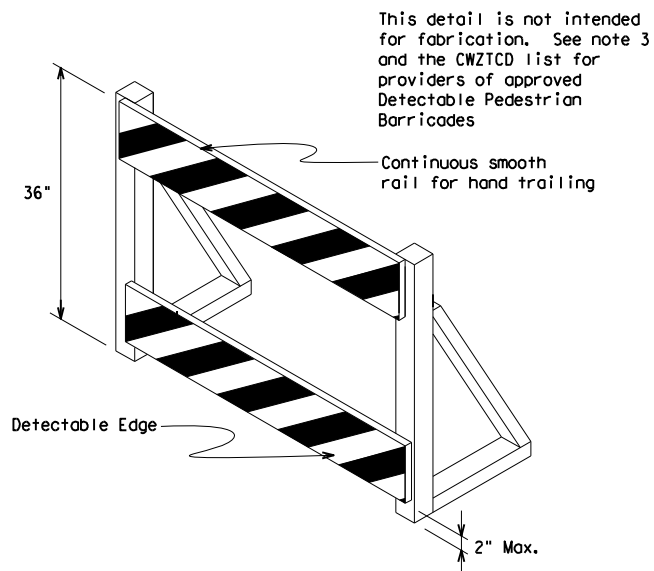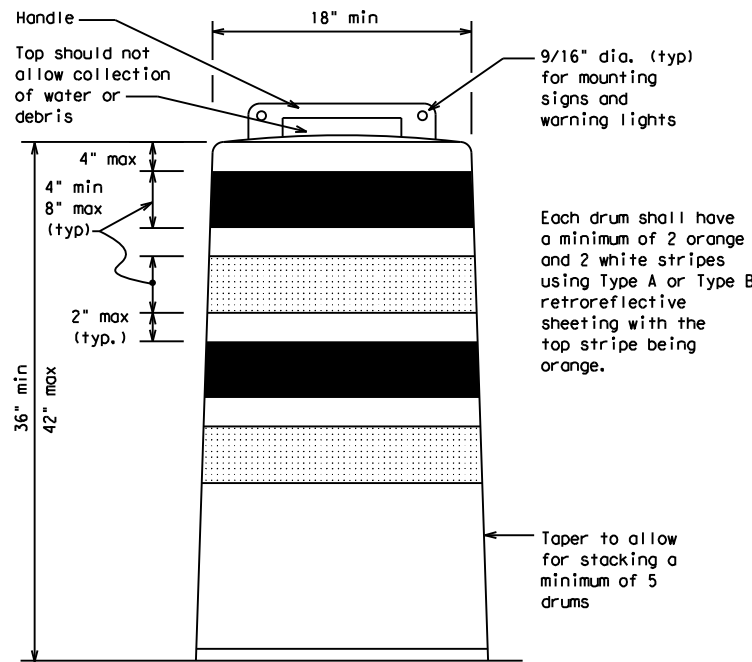

**DETECTABLE PEDESTRIAN BARRICADES**

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

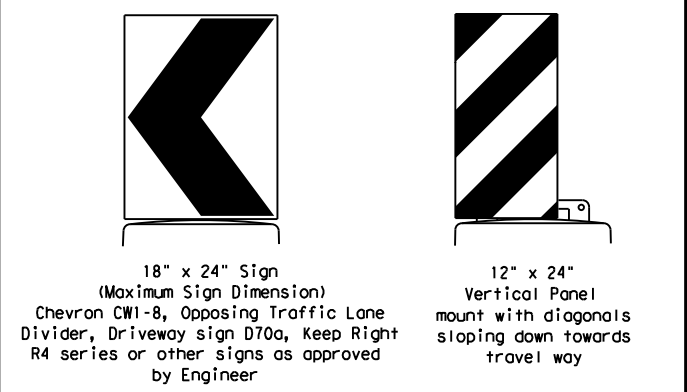

**18" x 24" Sign**  
 (Maximum Sign Dimension)  
 Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer

**12" x 24" Vertical Panel**  
 mount with diagonals sloping down towards travel way

**SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS**

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B<sub>FL</sub> or Type C<sub>FL</sub> Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12

Traffic Safety Division Standard


## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

### BC (8) - 21

FILE: bc-21.dgn	DW: TxDOT	CR: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
4-03 8-14	DIST	COUNTY	SHEET NO.	
9-07 5-21	BMT	CHAMBERS	21	
7-13				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:42:47 PM  
 FILE: T:\LIBRARY\SE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 WB BASE REP AND OVERLAY\CON STANDARDS\bc-21.dgn

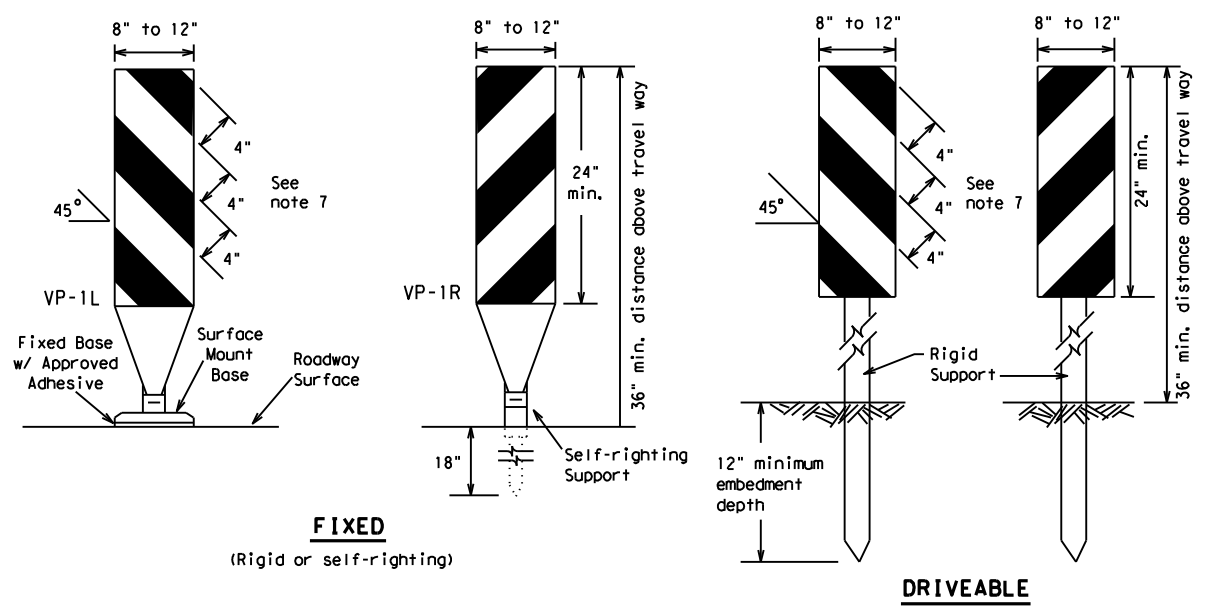

**FIXED**  
(Rigid or self-righting)

**DRIVEABLE**

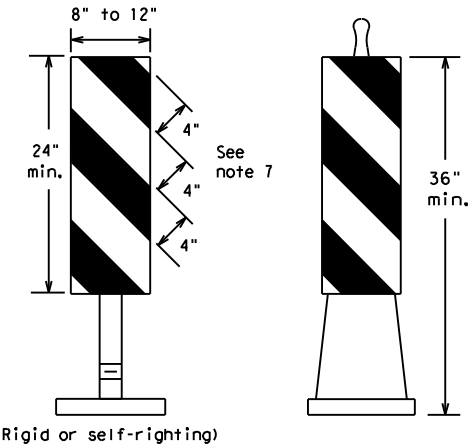


(Rigid or self-righting)

**PORTABLE**


**VERTICAL PANELS (VPs)**

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

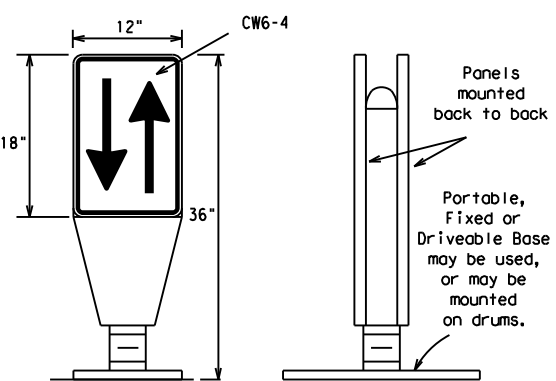


**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

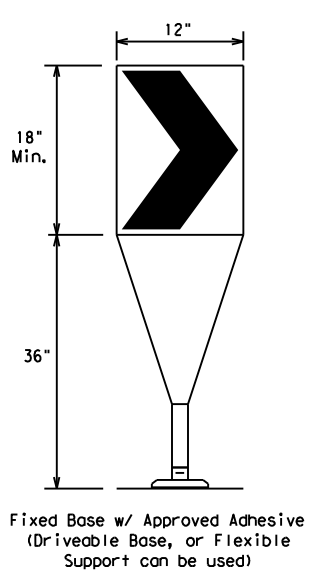

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

**CHEVRONS**

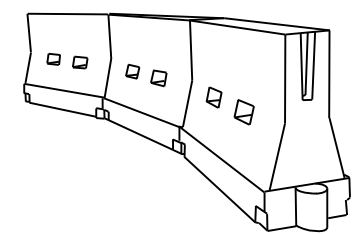

**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

**GENERAL NOTES**

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * *			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

\* \* \* Taper lengths have been rounded off.  
 L=Length of Taper (FT.) W=Width of Offset (FT.)  
 S=Posted Speed (MPH)

**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

SHEET 9 OF 12



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (9) - 21**


FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	BMT	CHAMBERS	22	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPE 3 BARRICADES**

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




**TYPICAL STRIPING DETAIL FOR BARRICADE RAIL**

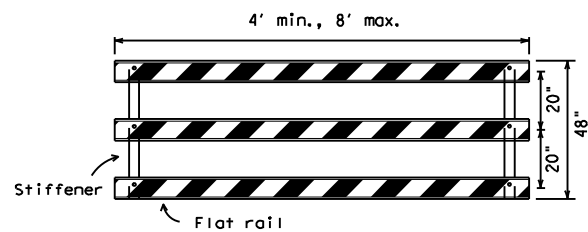


Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

**TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES**

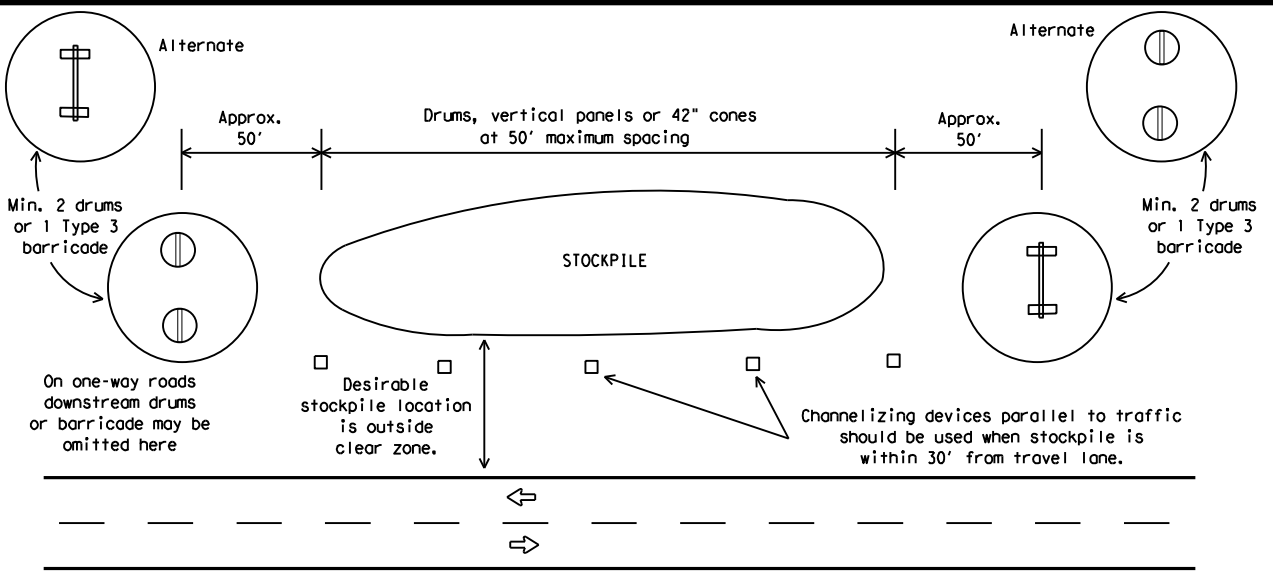


**TRAFFIC CONTROL FOR MATERIAL STOCKPILES**

Each roadway of a divided highway shall be barricaded in the same manner.

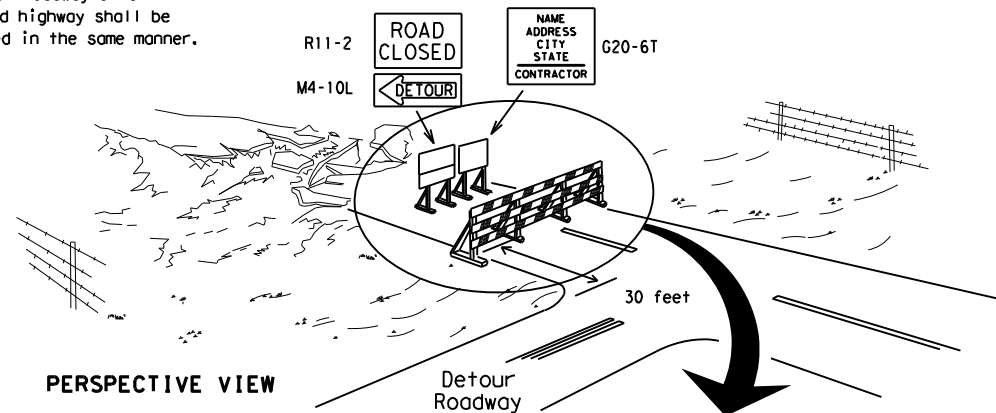

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

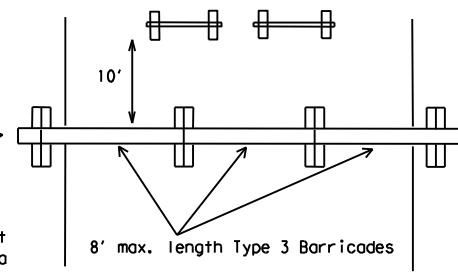


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

**TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION**

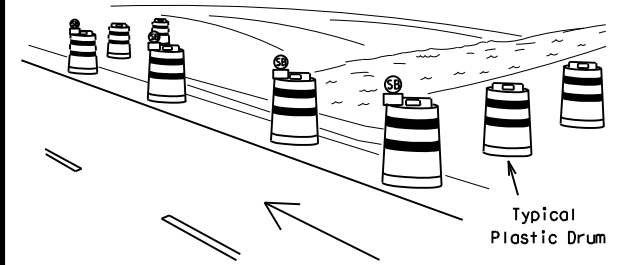

PERSPECTIVE VIEW

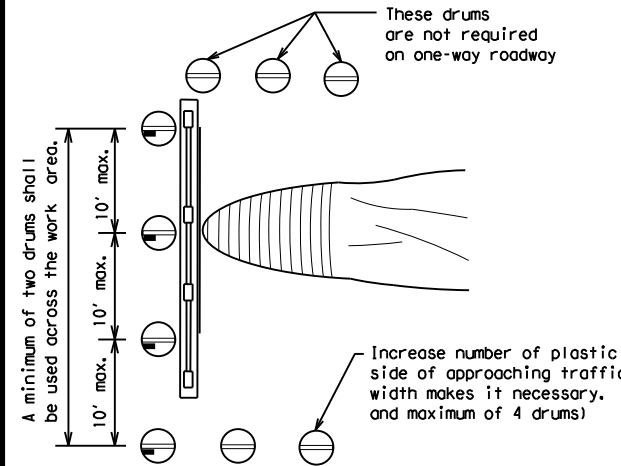


PLAN VIEW

**CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS**

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

A minimum of two drums shall be used across the work area. Increase number of plastic drums on the side of approaching traffic if the crown width makes it necessary. (minimum of 2 and maximum of 4 drums)

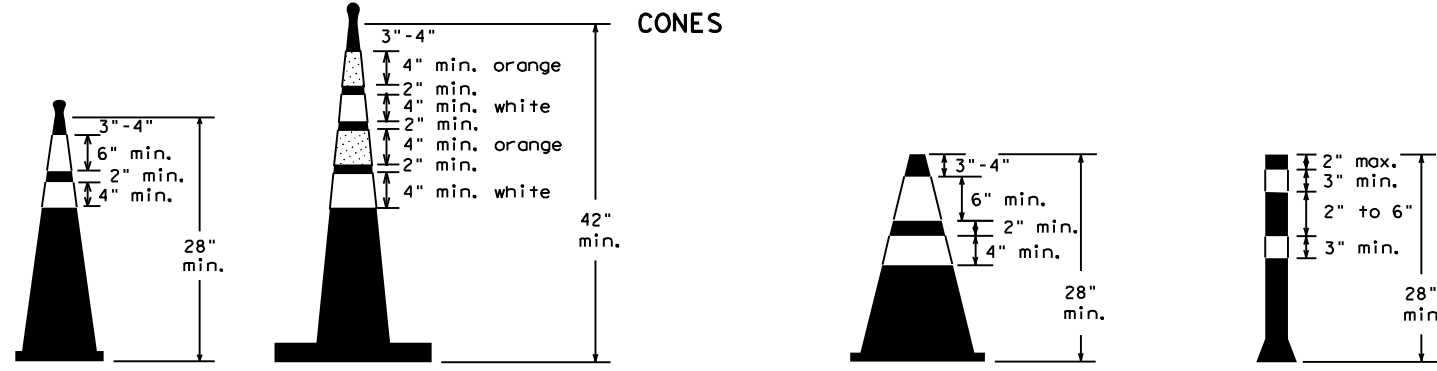

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.  
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (10) - 21**

FILE: bc-21.dgn	DW: TxDOT	CR: TxDOT	DR: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	BMT	CHAMBERS	23	

DATE: 8/21/2024 1:42:48 PM  
 FILE: T:\LIBRARY\SE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\CON STANDARDS\bc-21.dgn

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

## Temporary Flexible-Reflective Roadway Marker Tabs

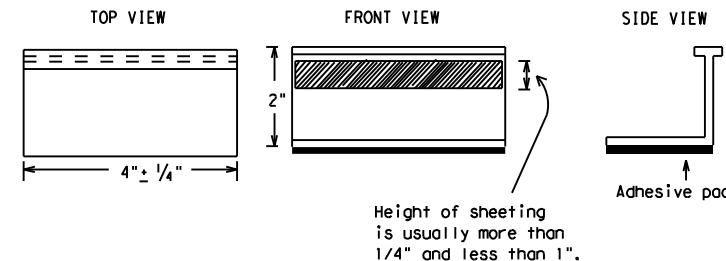

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE  
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER  
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

### RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
 YELLOW - (two amber reflective surfaces with yellow body).  
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

**BC(11)-21**





FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	BMT	CHAMBERS	<b>24</b>	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:42:49 PM  
 FILE: T:\LIBERDES\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001\_IH-10\_FR\_WB





### PAVEMENT MARKING PATTERNS

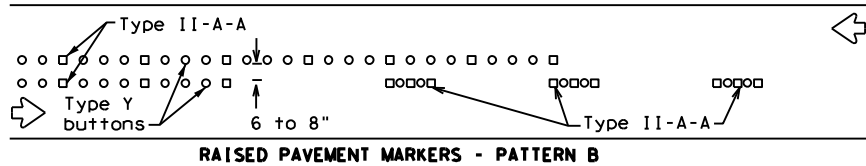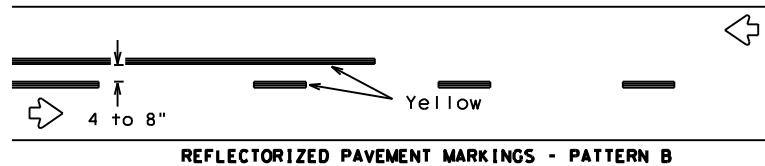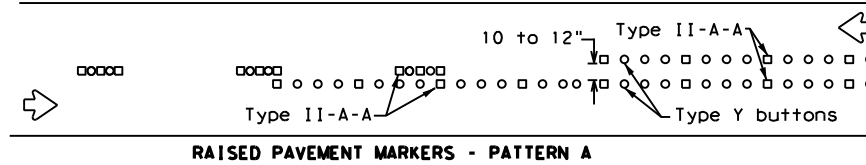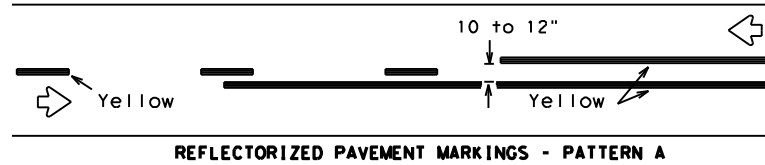



Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

### CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

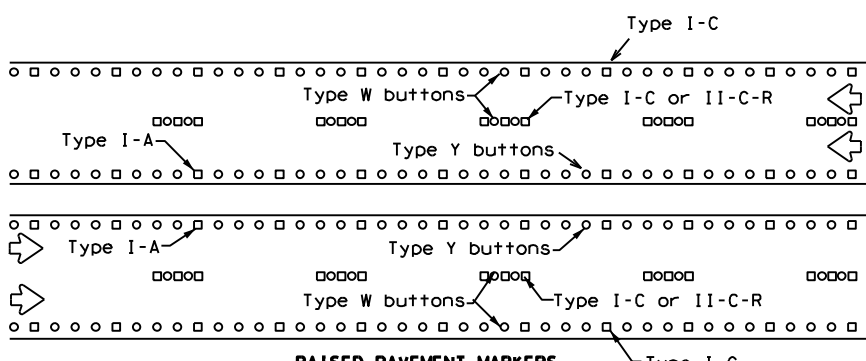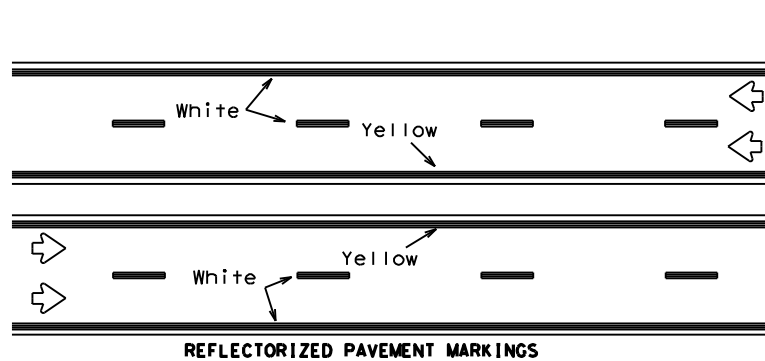



Prefabricated markings may be substituted for reflectorized pavement markings.

### EDGE & LANE LINES FOR DIVIDED HIGHWAY

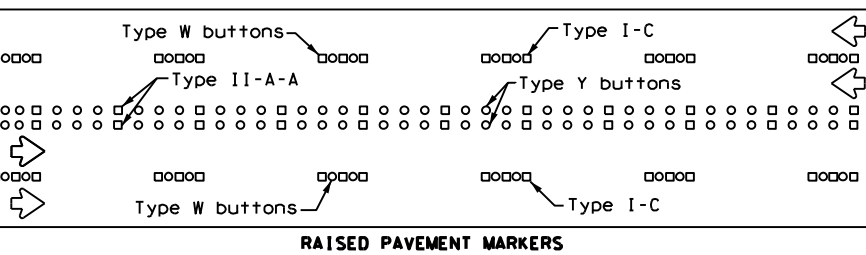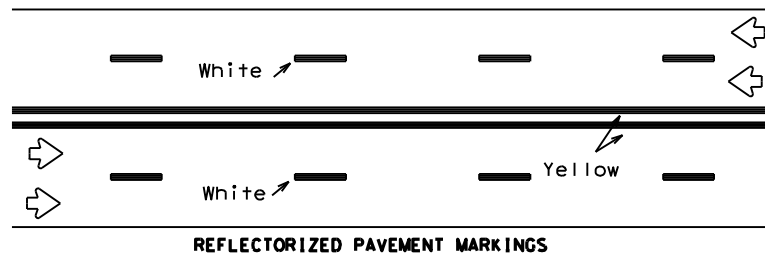

Prefabricated markings may be substituted for reflectorized pavement markings.


### LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

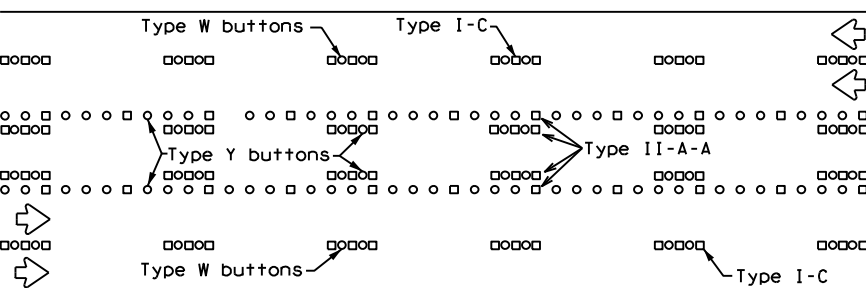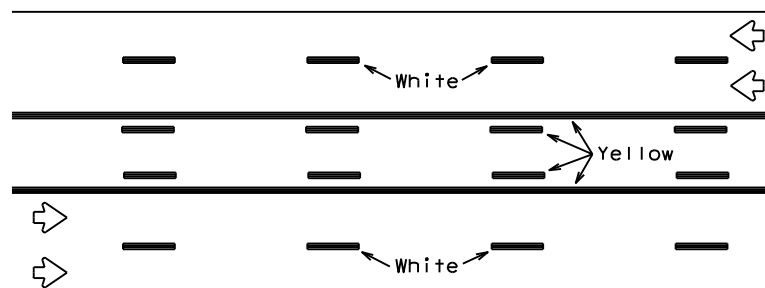



Prefabricated markings may be substituted for reflectorized pavement markings.

### TWO-WAY LEFT TURN LANE


### STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

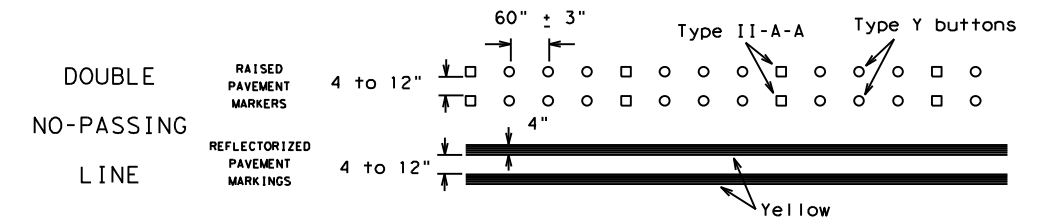


### SOLID LINES

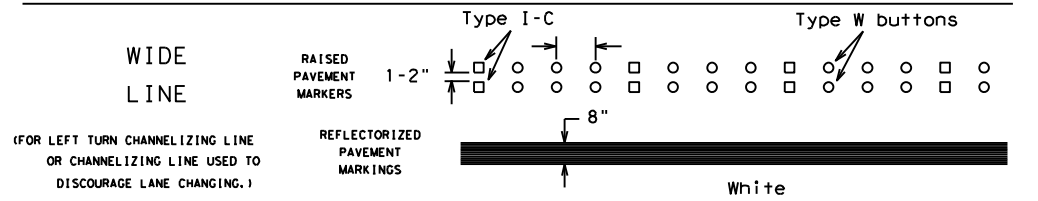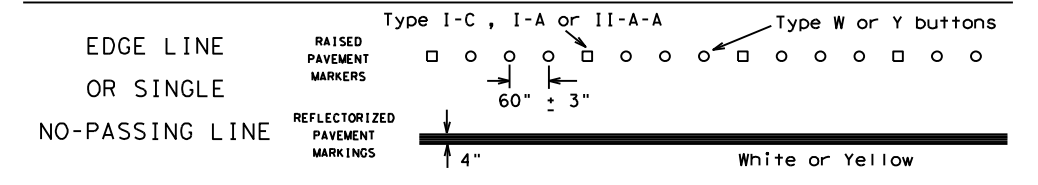

### BROKEN LINES

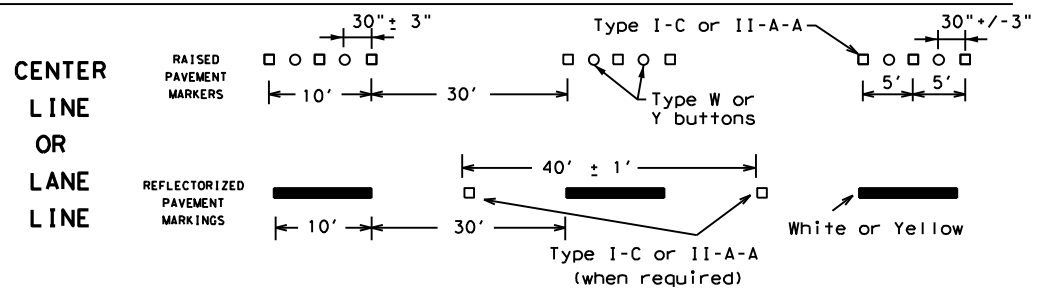


### AUXILIARY OR LANEDROP LINE

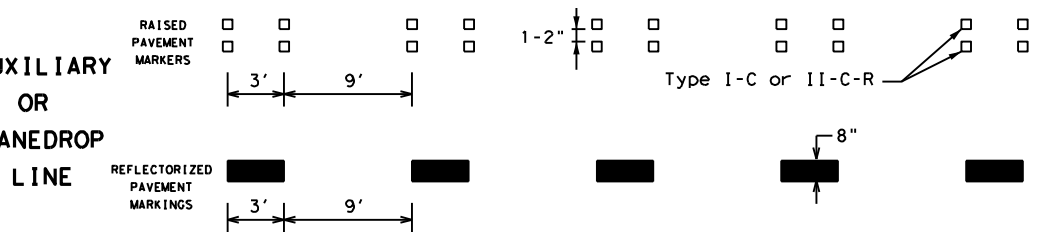

### REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

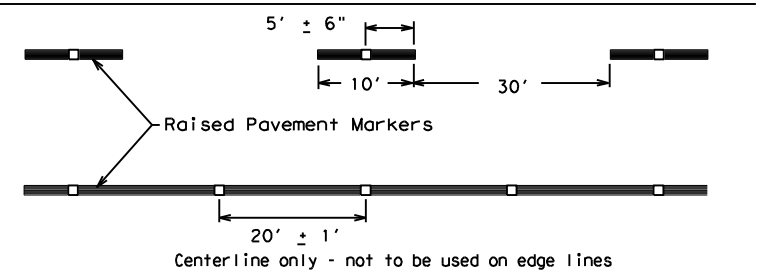

SHEET 12 OF 12



### BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."




FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	BMT	CHAMBERS	25	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:42:50 PM  
 FILE: T:\LIBERDES\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCN\STANDARDS\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided herein. TxDOT is not responsible for any damages resulting from its use.

DATE: 8/21/2024 1:42:52 PM  
 FILE: T:\LIBERDES\NPSE MAINTENANCE\NY 25\NY 25\_RMC 6470-68-001 IH-10 FR WB BMT\TxDOT\TRAFFIC CONTROL PLANS\TCP (2-6) - 18.dgn

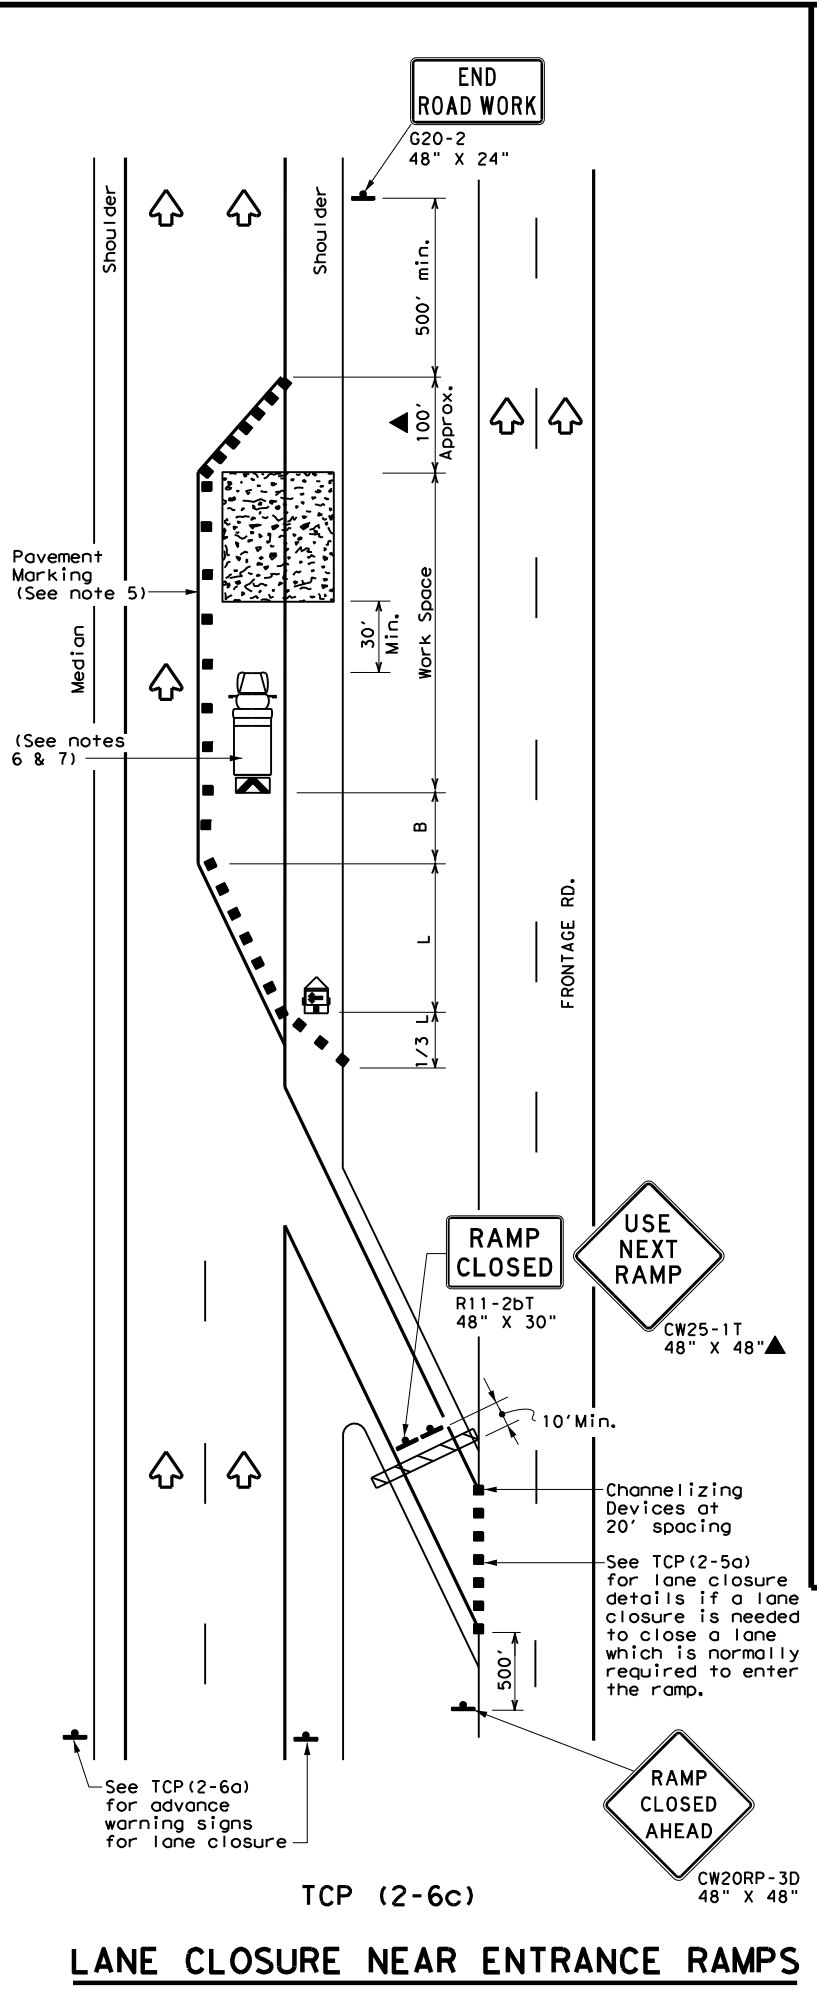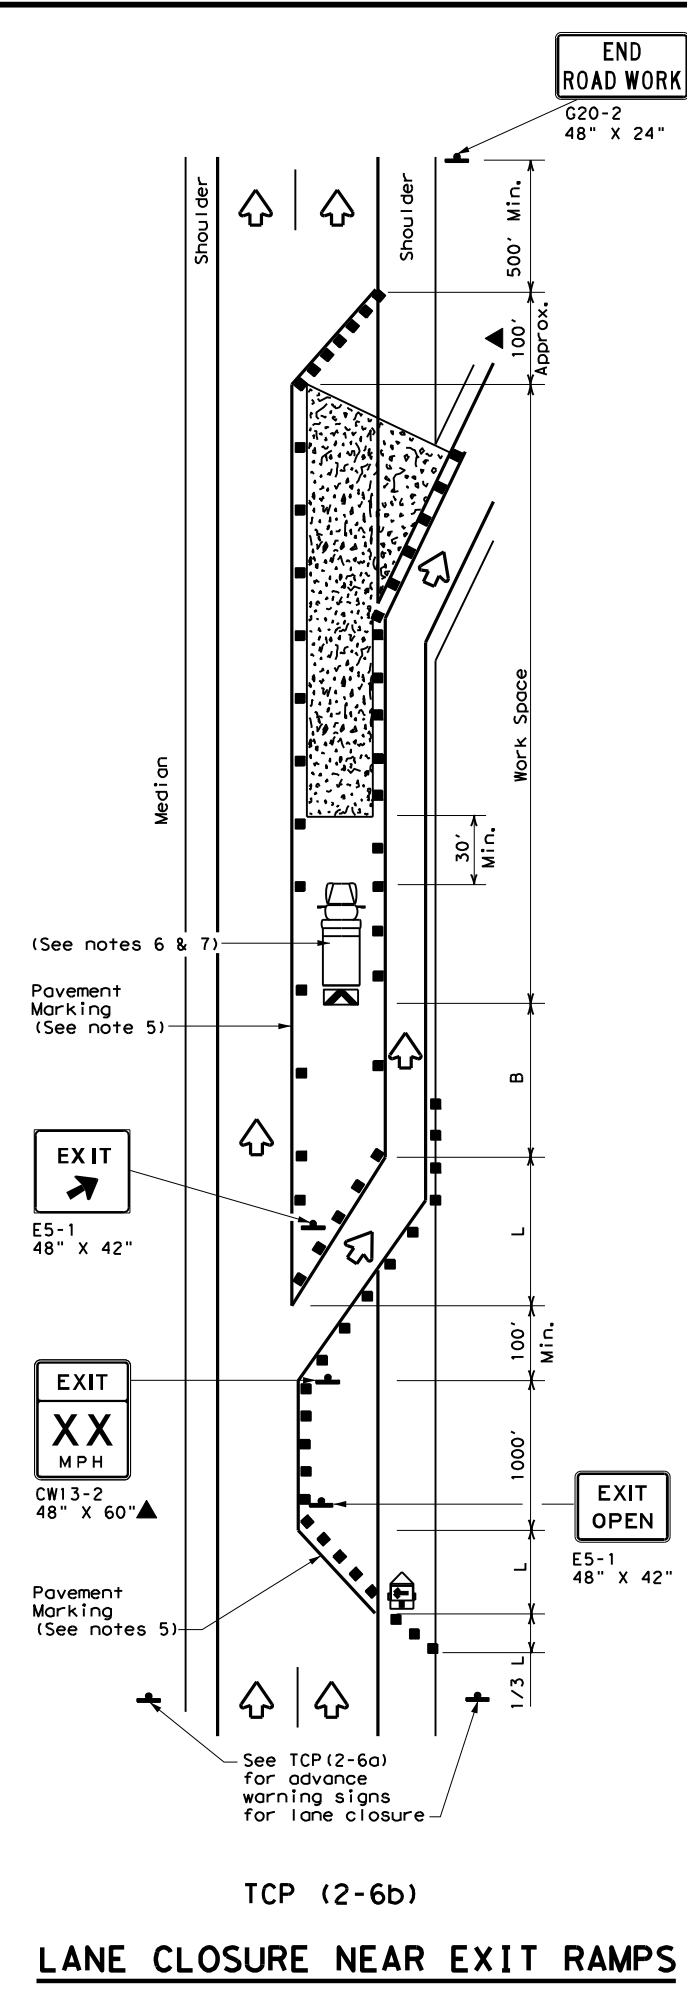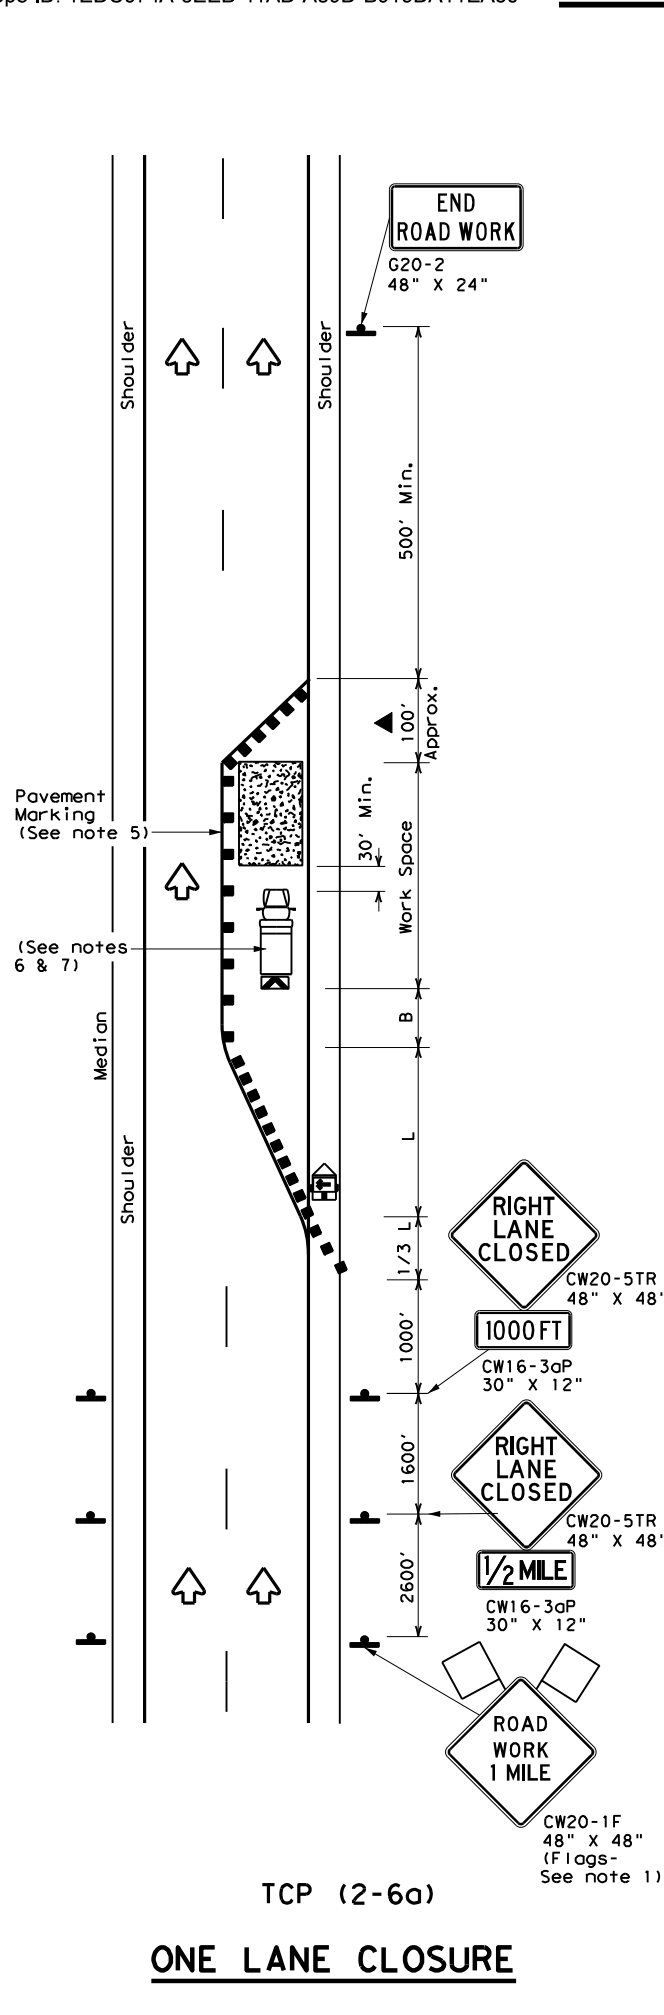

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L = Length of Taper (FT) W = Width of Offset (FT) S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
			✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
  - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
  - Channelizing devices used along the work space or along tangent sections may be supplemented with vertical panels (VP) placed on every other channelizing device. If night time conditions make it difficult to see at least two VPs, the VPs may be placed on each channelizing device.
  - The placement of pavement markings may be omitted on intermediate-term stationary work zones with the approval of the Engineer.
  - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
  - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

Texas Department of Transportation  
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN**  
**LANE CLOSURES ON**  
**DIVIDED HIGHWAYS**


**TCP (2-6) - 18**

FILE: tcp2-6-18.dgn	DW: _____	CK: _____	DW: _____	CK: _____
© TxDOT December 1985	CONT: _____	SECT: _____	JOB: _____	HIGHWAY: _____
REVISIONS	6470	68	001	IH 10 WB FR
2-94 4-98	DIST: _____	COUNTY: _____	SHEET NO. _____	
8-95 2-12	BMT	CHAMBERS	26	
1-97 2-18				


166

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions that may appear hereon.


DATE: 8/21/2024 1:42:53 PM  
 FILE: T:\LIBERDES\PMSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMS\PROJECTS\TRAFFIC CONTROL PLAN\TCP3-1.dgn

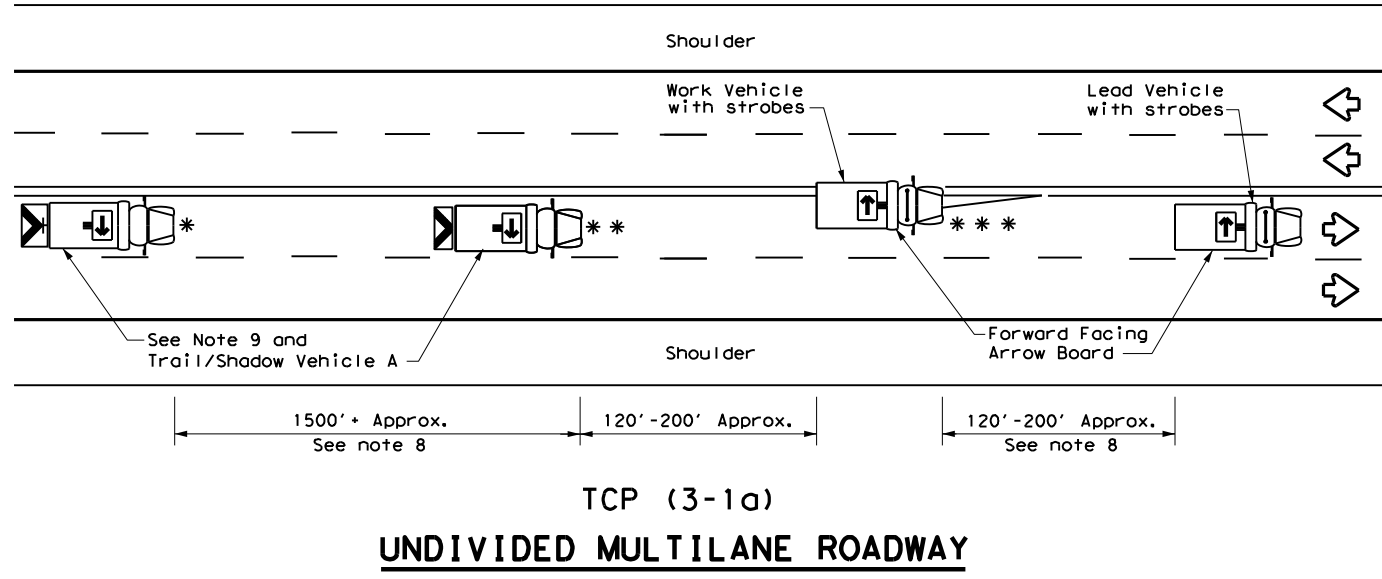


**TCP (3-1a)**  
**UNDIVIDED MULTILANE ROADWAY**

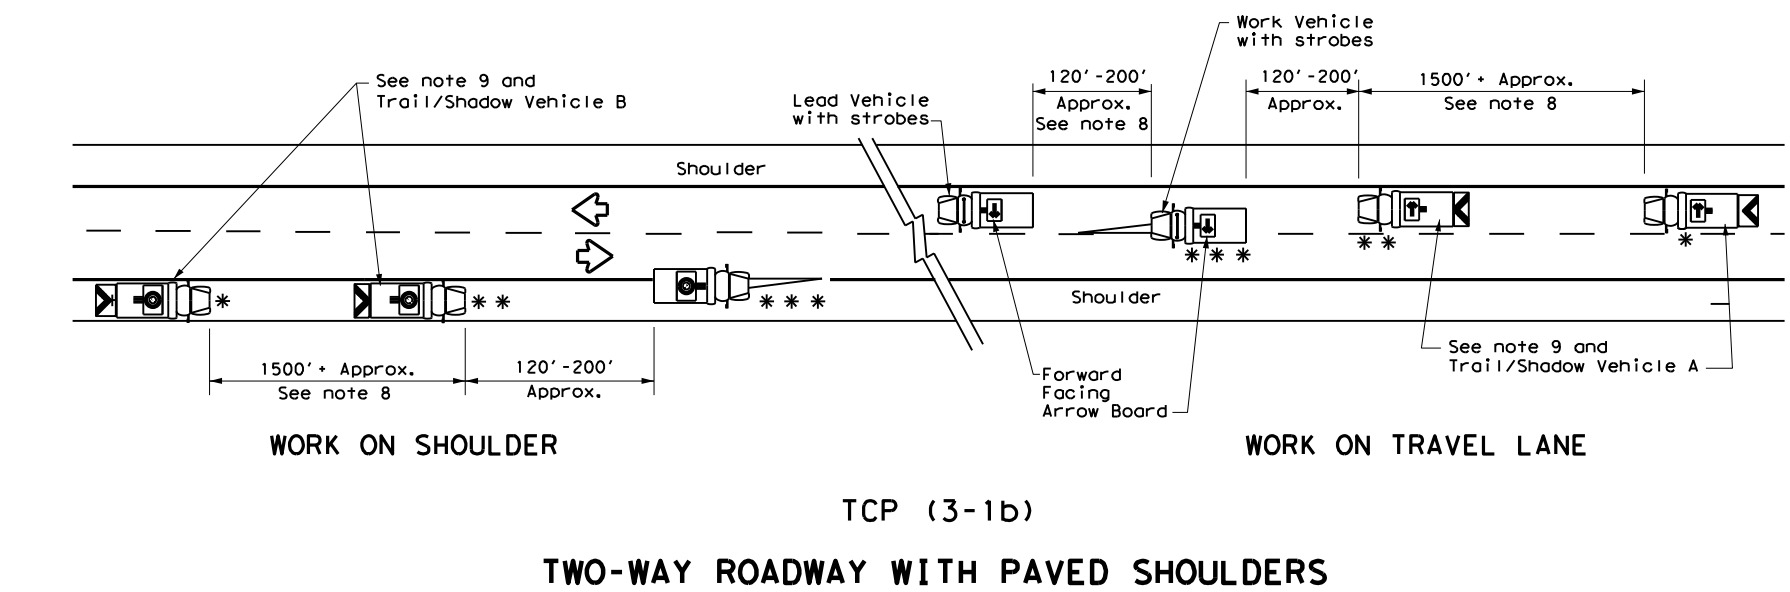


**TCP (3-1b)**  
**TWO-WAY ROADWAY WITH PAVED SHOULDERS**

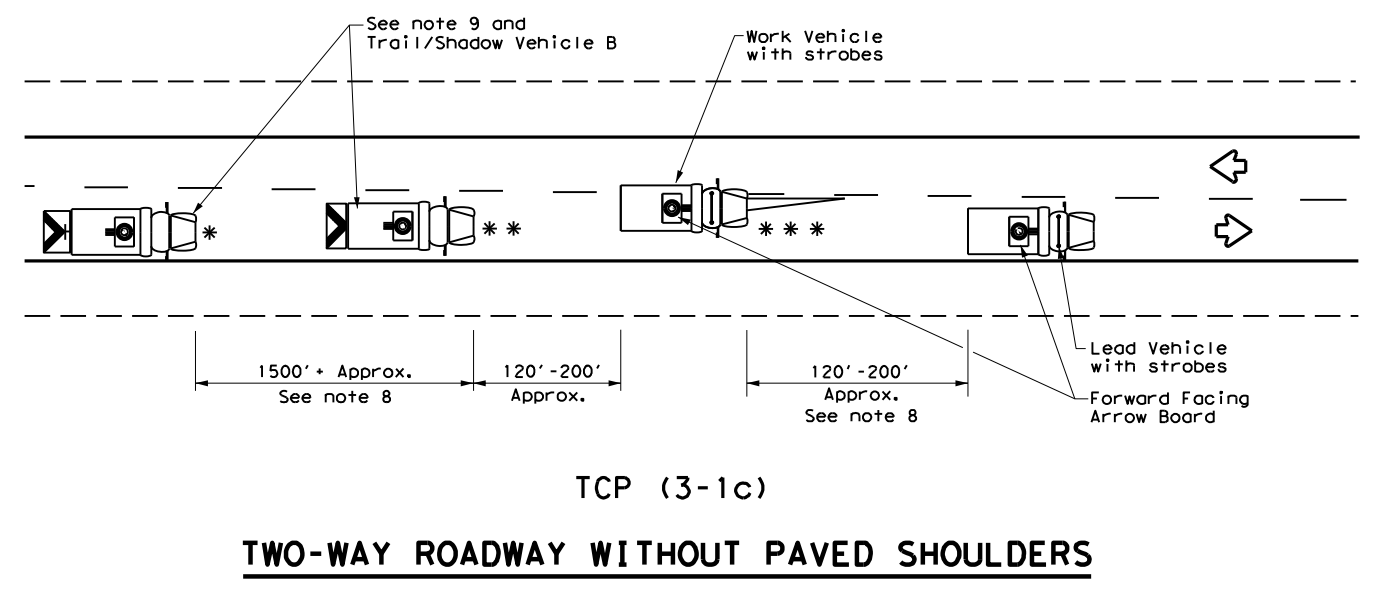

**TCP (3-1c)**  
**TWO-WAY ROADWAY WITHOUT PAVED SHOULDERS**

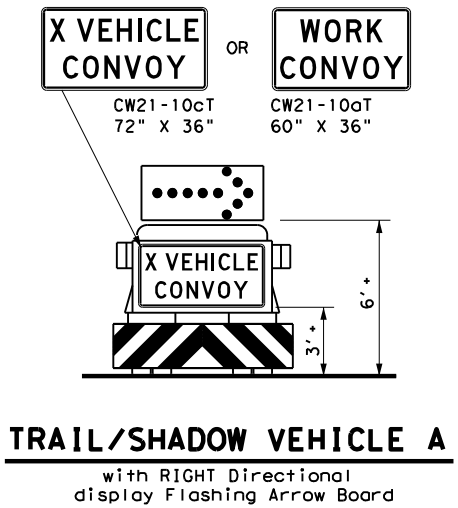

**TRAIL/SHADOW VEHICLE A**  
with RIGHT Directional display Flashing Arrow Board

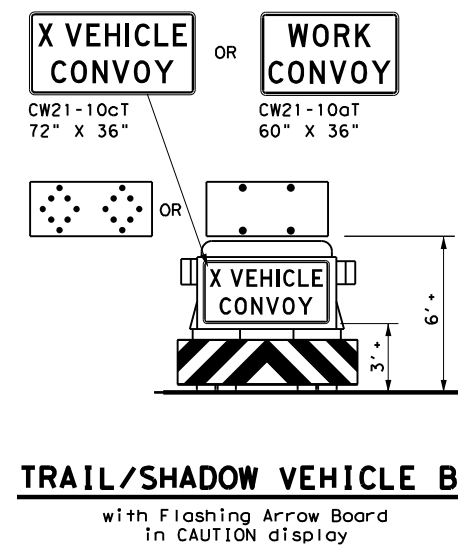


**TRAIL/SHADOW VEHICLE B**  
with Flashing Arrow Board in CAUTION display

LEGEND			
*	Trail Vehicle	ARROW BOARD DISPLAY	
**	Shadow Vehicle		
***	Work Vehicle		RIGHT Directional
	Heavy Work Vehicle		LEFT Directional
	Truck Mounted Attenuator (TMA)		Double Arrow
	Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**GENERAL NOTES**

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. "X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY" (CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the rearmost protection vehicle.

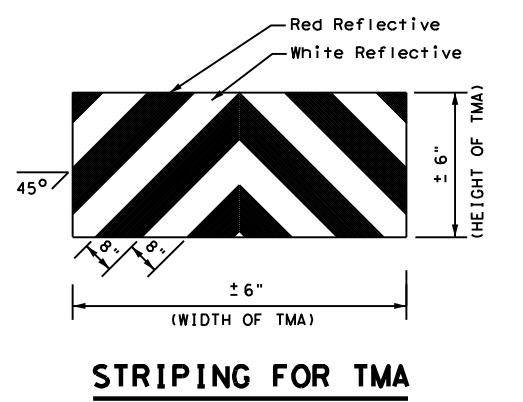

**STRIPING FOR TMA**


Texas Department of Transportation  
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN  
 MOBILE OPERATIONS  
 UNDIVIDED HIGHWAYS


TCP(3-1)-13

FILE: tcp3-1.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
2-94 4-98				
8-95 7-13				
1-97				
BMT	CHAMBERS			SHEET NO. 27


DATE: 8/21/2024 1:42:55 PM  
 FILE: T:\LIBERDES\PMSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMS\TRAFFIC CONTROL PLAN\TRAFFIC CONTROL PLAN.dgn  
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of electronic files to paper or for any errors or omissions resulting from its use.

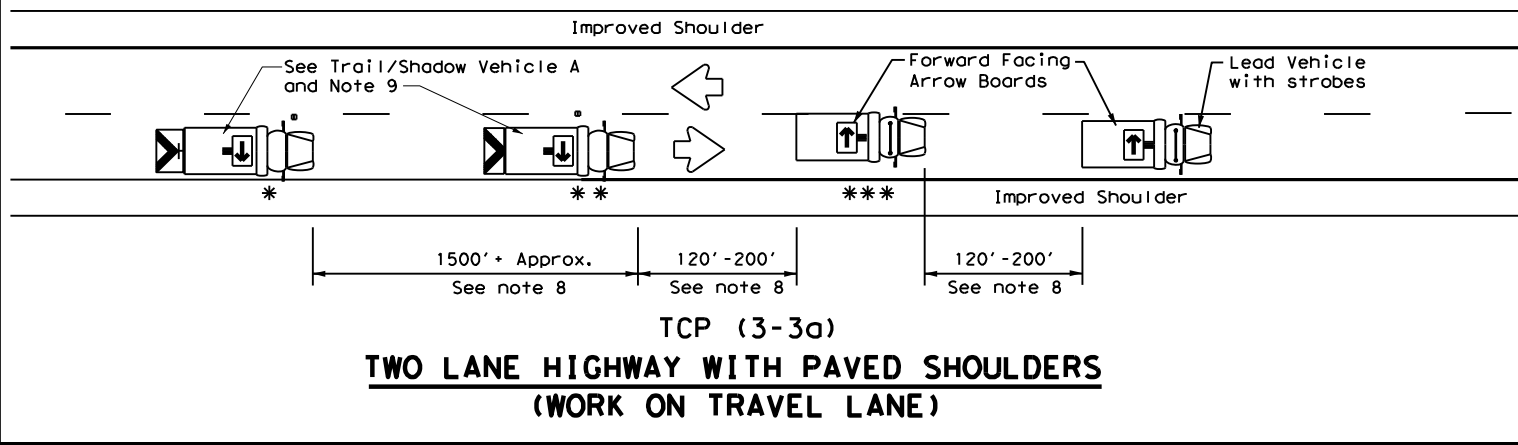


**TCP (3-3a)**  
**TWO LANE HIGHWAY WITH PAVED SHOULDERS**  
**(WORK ON TRAVEL LANE)**

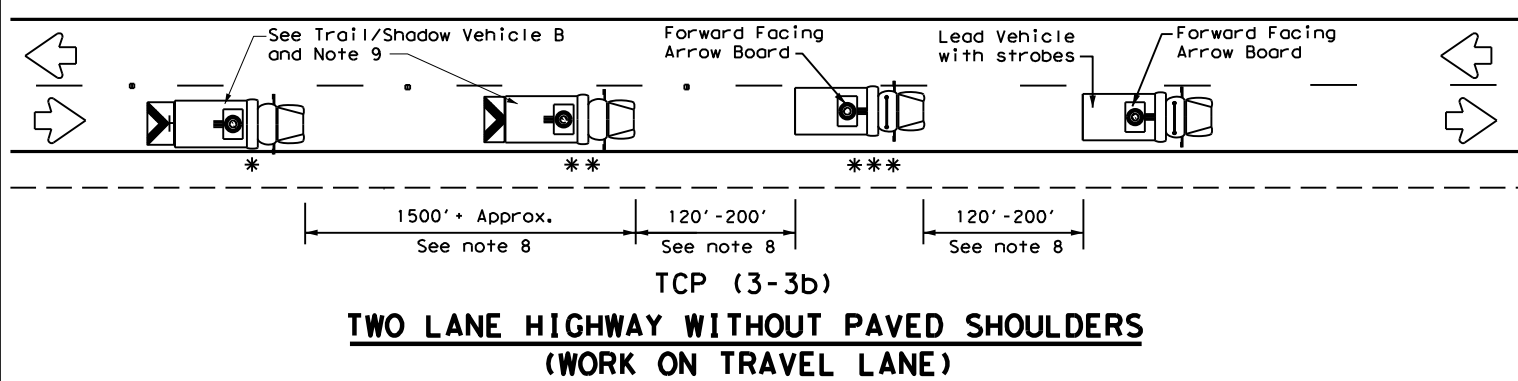


**TCP (3-3b)**  
**TWO LANE HIGHWAY WITHOUT PAVED SHOULDERS**  
**(WORK ON TRAVEL LANE)**

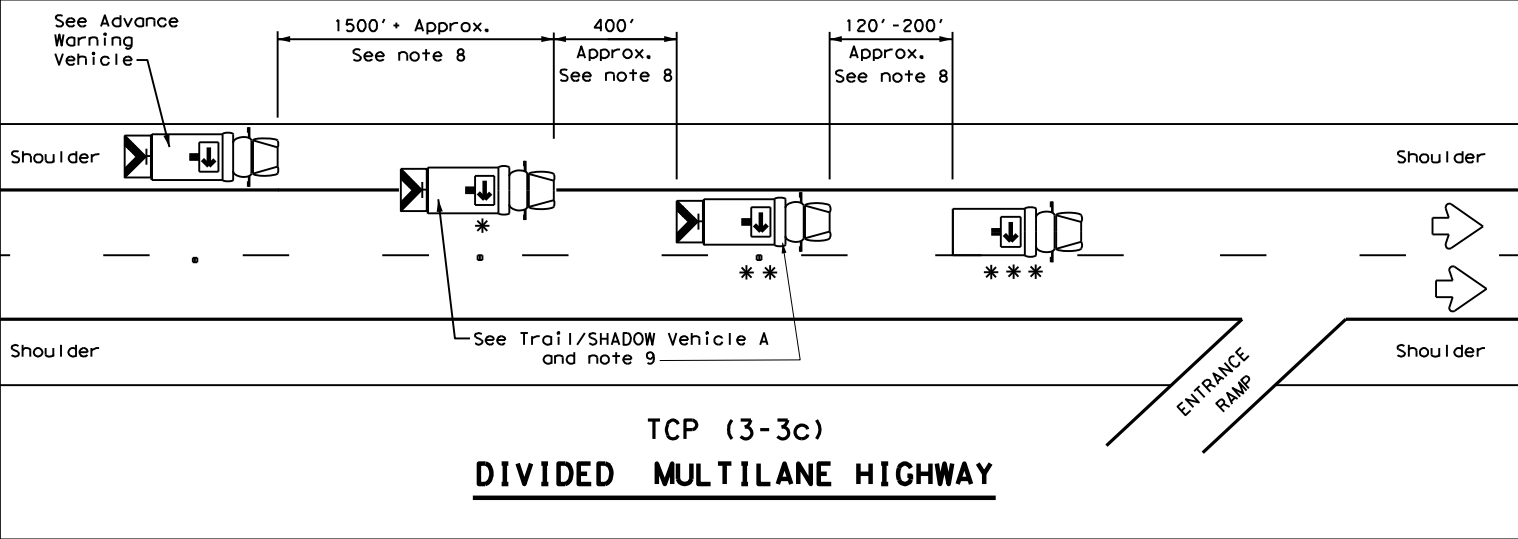


**TCP (3-3c)**  
**DIVIDED MULTILANE HIGHWAY**

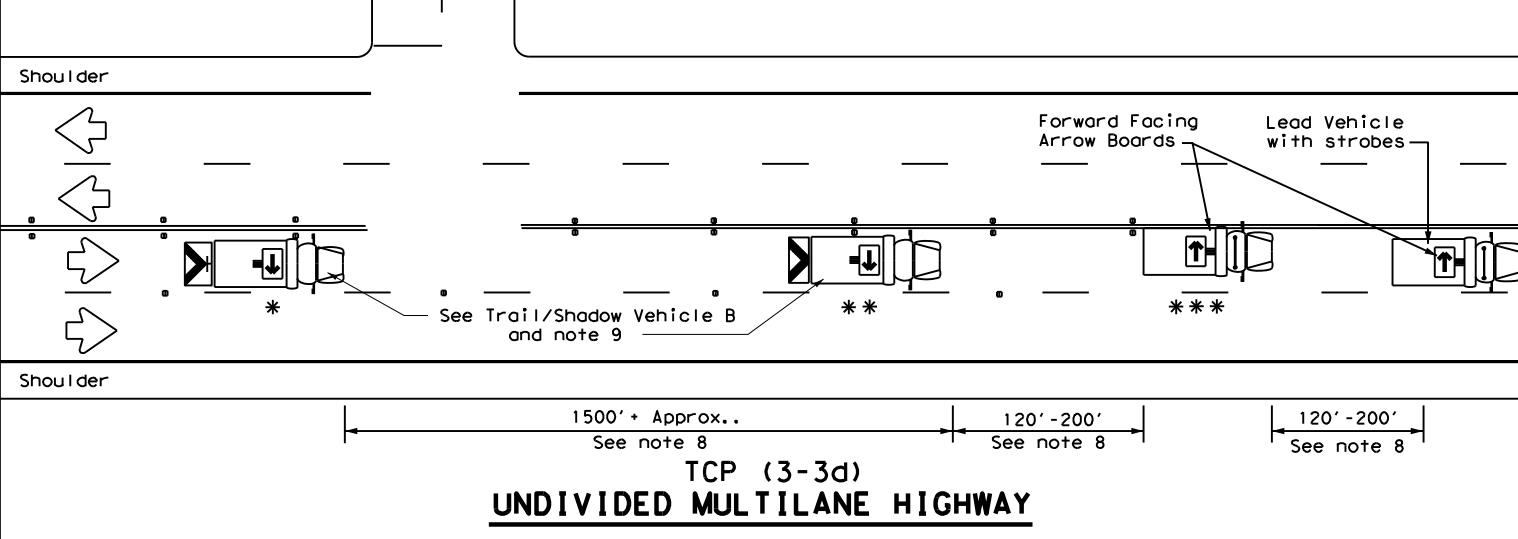


**TCP (3-3d)**  
**UNDIVIDED MULTILANE HIGHWAY**

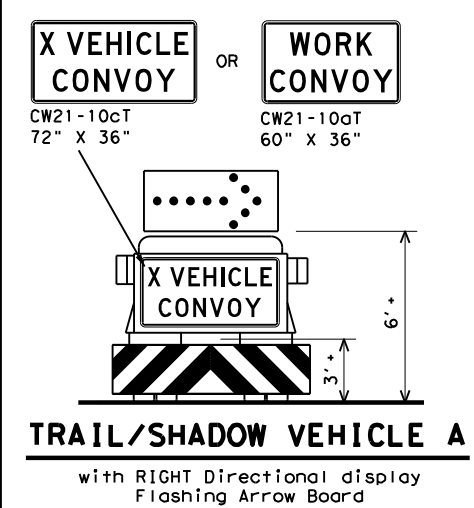


**TRAIL/SHADOW VEHICLE A**  
 with RIGHT Directional display  
 Flashing Arrow Board

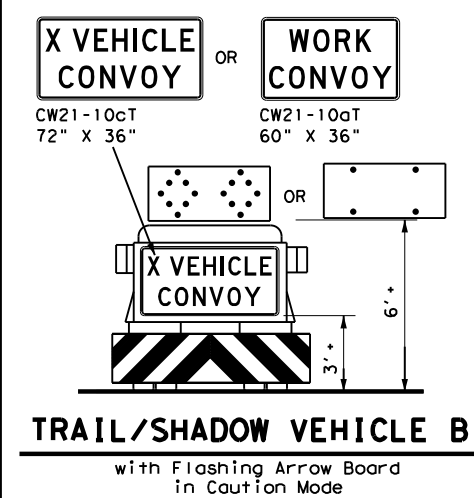

**TRAIL/SHADOW VEHICLE B**  
 with Flashing Arrow Board  
 in Caution Mode

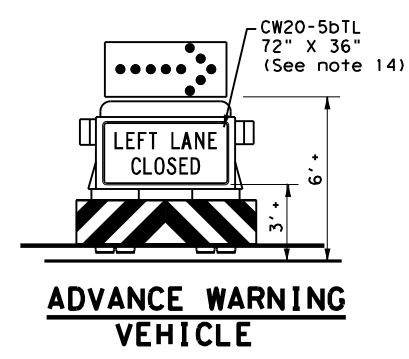

**ADVANCE WARNING VEHICLE**

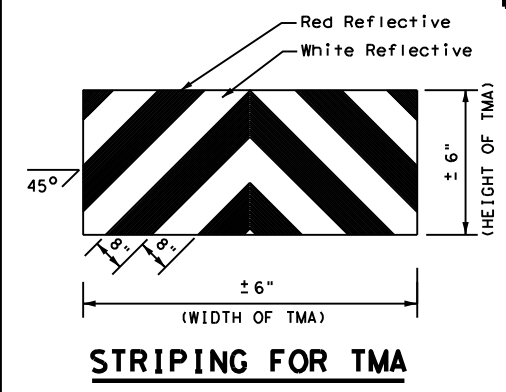

**STRIPING FOR TMA**

LEGEND		
* Trail Vehicle	ARROW BOARD DISPLAY	
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
		LEFT Directional
		Double Arrow
		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**GENERAL NOTES**

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
11. A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
12. For divided highways with three or four lanes in each direction, use TCP(3-2).
13. Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
14. The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
15. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.


Texas Department of Transportation  
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN**  
**MOBILE OPERATIONS**  
**RAISED PAVEMENT**  
**MARKER INSTALLATION/**  
**REMOVAL**  
**TCP (3-3) - 14**


FILE: tcp3-3.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	BMT	CHAMBERS	28	
1-97 7-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions that may appear hereon.

DATE: 8/21/2024 1:42:56 PM  
 FILE: T:\LIBERDES\NPSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMT\CP\CP\TCP\TCP6-2.dgn

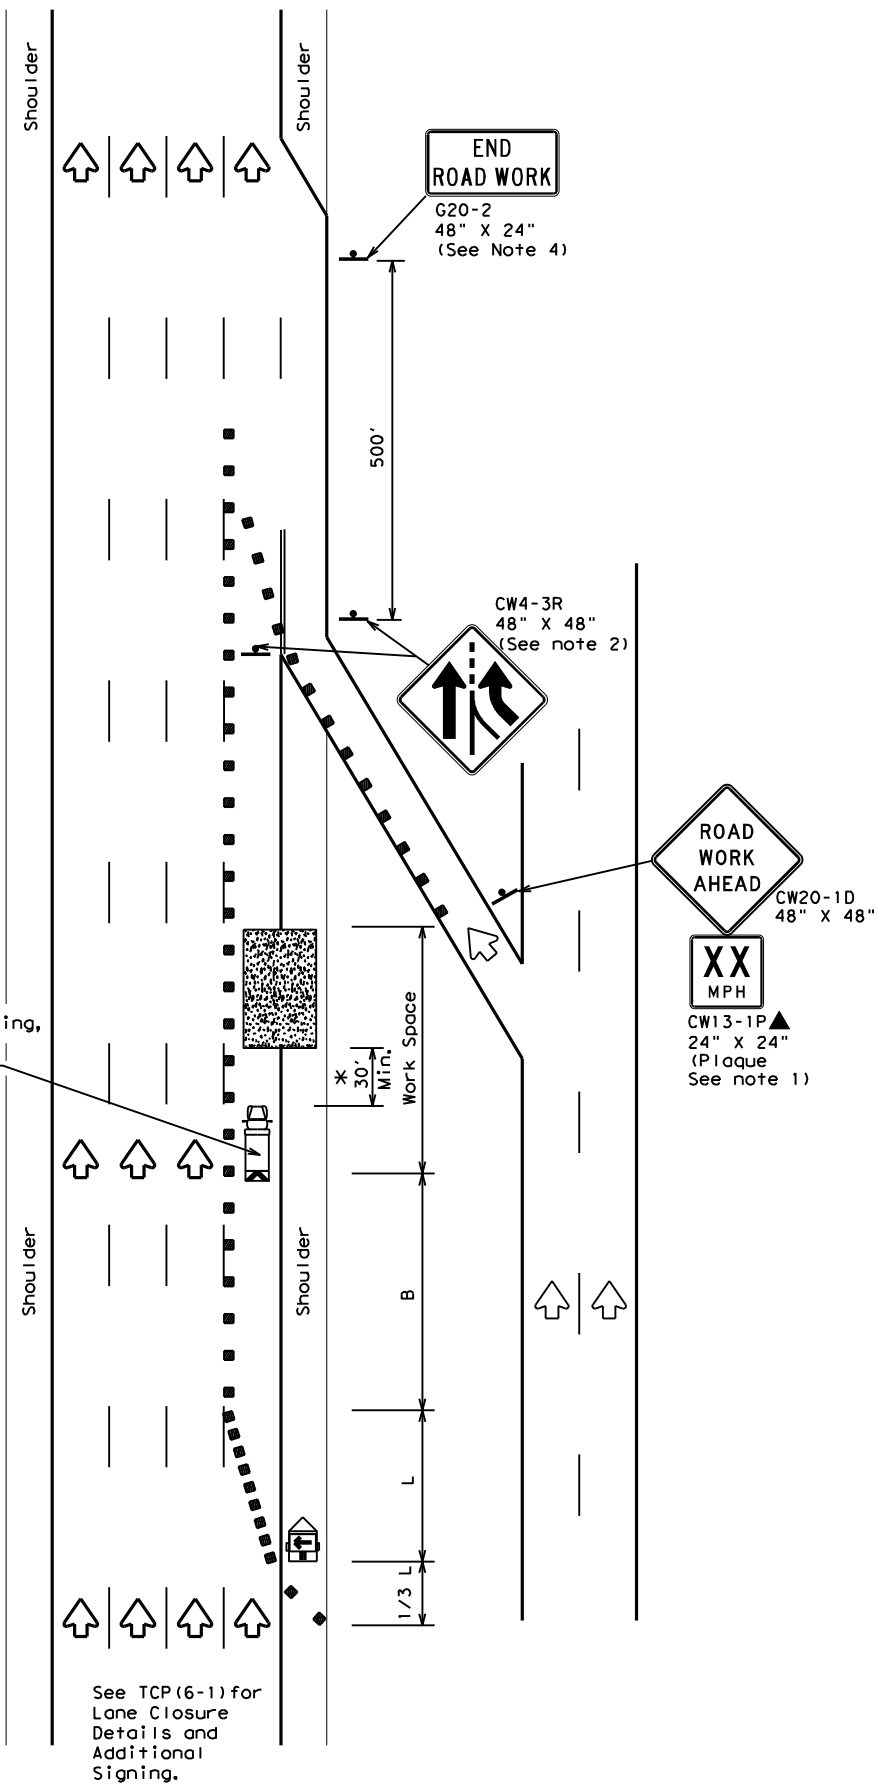

TCP (6-2a)  
**ENTRANCE RAMP OPEN**  
**WORK WITHIN 500' OF RAMP**

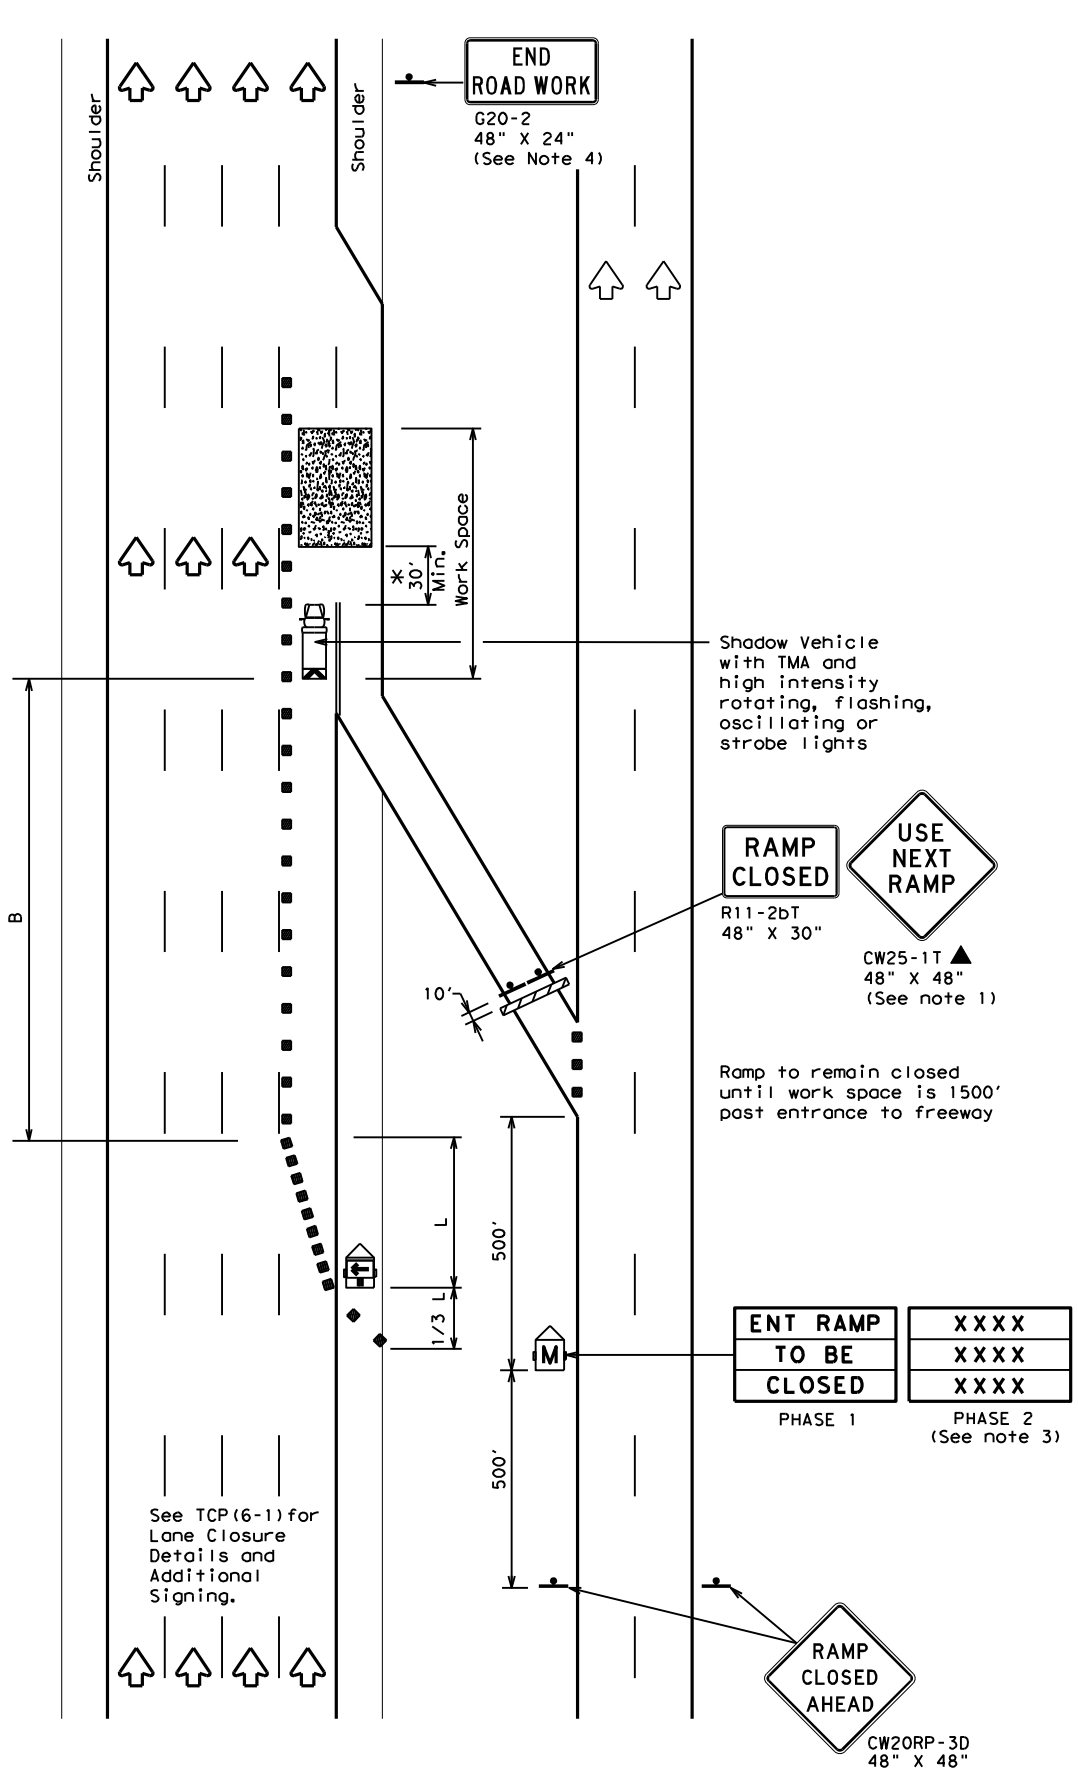

TCP (6-2b)  
**ENTRANCE RAMP CLOSED**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

\*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

**GENERAL NOTES**

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- ADDED LANE Symbol (CW4-3) sign may be omitted when sign between ramp and mainlane can be seen from both roadways.
- See "Advance Notice List" on BC(6) for recommended date and time formatting options for PCMS Phase 2 message.
- The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

\*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




**TRAFFIC CONTROL PLAN**  
**WORK AREA NEAR RAMP**


**TCP (6-2) - 12**

FILE:	tcp6-2.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	February 1994	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	68	001	IH 10 WB FR				
1-97	8-98			DIST	COUNTY	SHEET NO.			
4-98	8-12			BMT	CHAMBERS	29			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided. This standard is not intended to be used in any manner that would constitute an advertisement, solicitation, or promotional material.

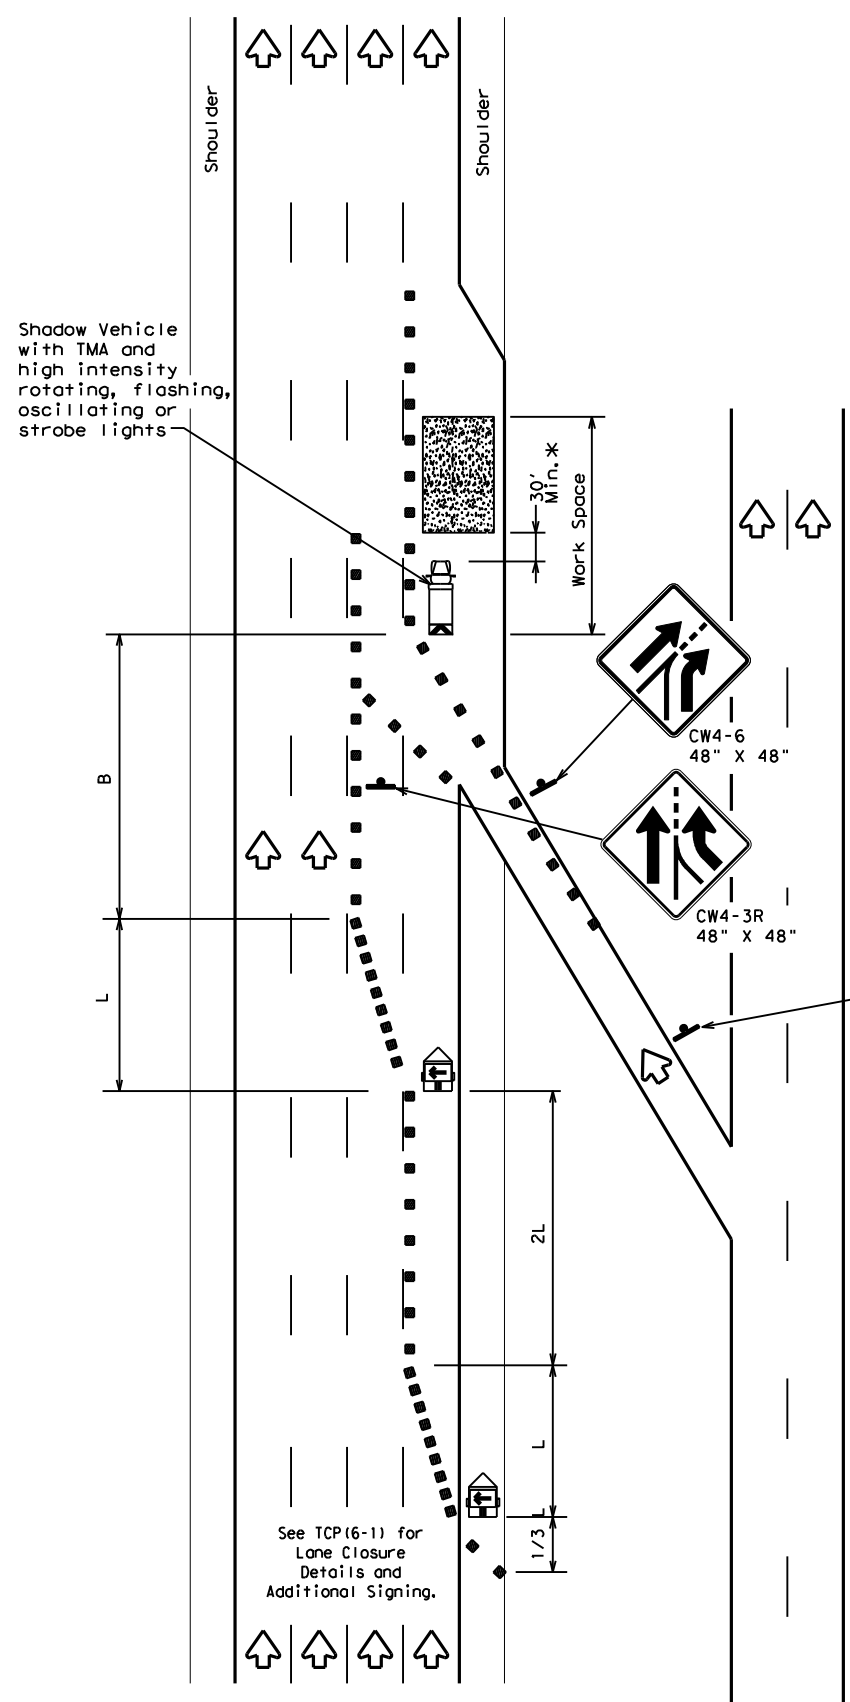

TCP (6-3a)  
ENTRANCE RAMP OPEN

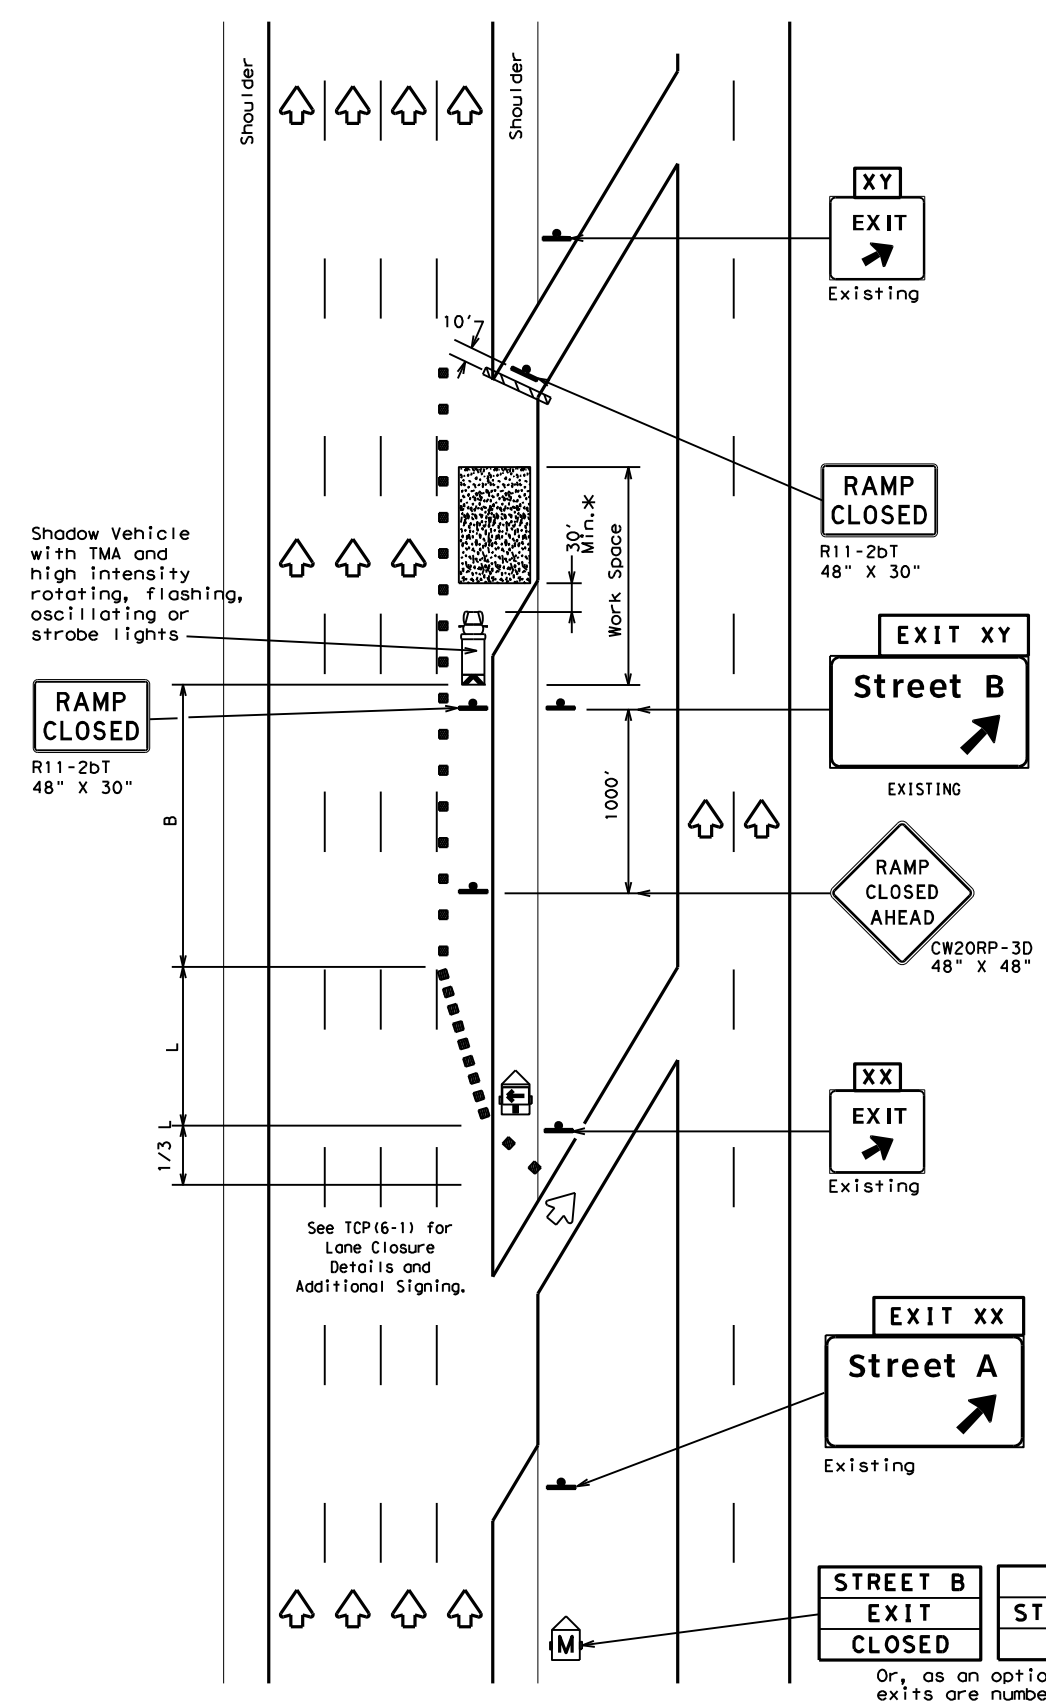

TCP (6-3b)  
EXIT RAMP CLOSED  
TRAFFIC EXITS PRIOR TO CLOSED RAMP

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L" **			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES:  
1. All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.

\*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




**TRAFFIC CONTROL PLAN  
WORK AREA BEYOND RAMP**


**TCP (6-3) - 12**

FILE: tcp6-3.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1994	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
1-97 8-98	DIST	COUNTY	SHEET NO.	
4-98 8-12	BMT	CHAMBERS	30	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard. DATE: 8/21/2024 1:42:59 PM FILE: T:\LIBERDES\NPSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMS\PROJECTS\TRAFFIC CONTROL\TRAFFIC CONTROL PLAN\TRAFFIC CONTROL PLAN.dgn

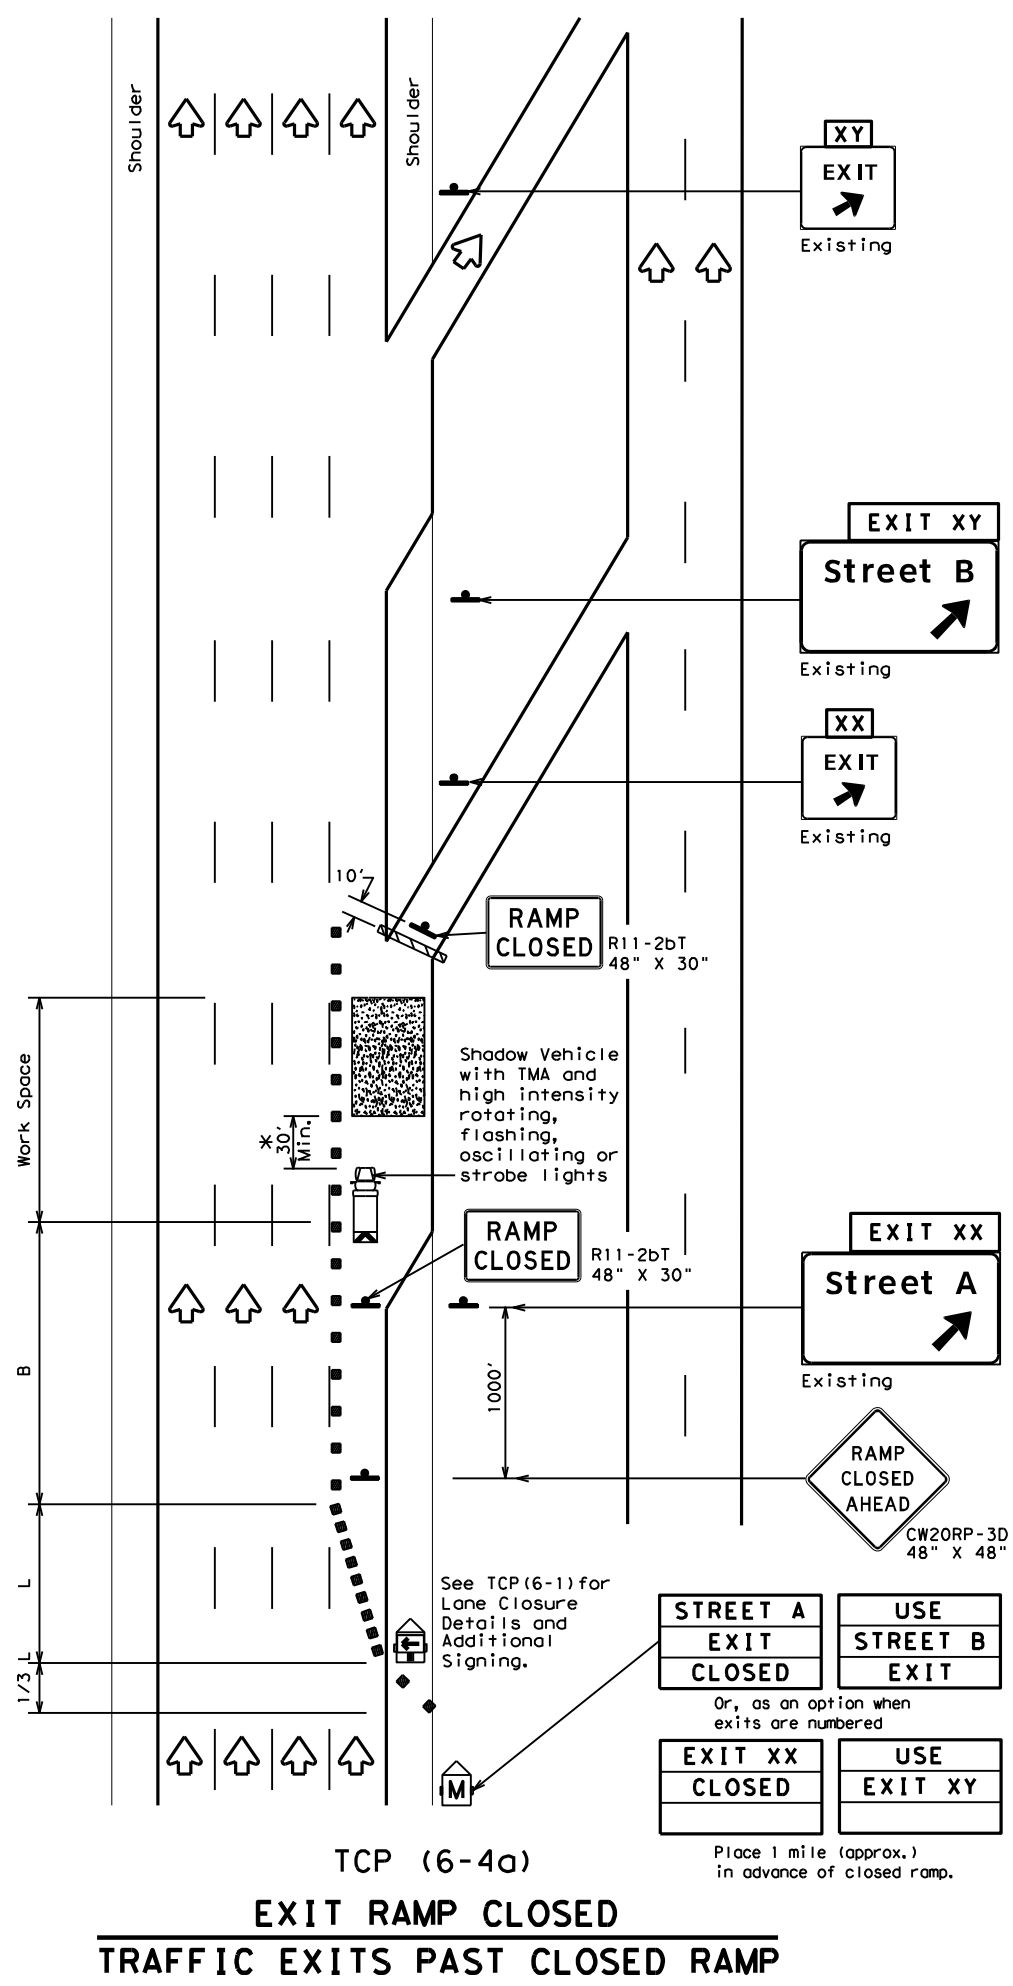

**TCP (6-4a)**  
**EXIT RAMP CLOSED**  
**TRAFFIC EXITS PAST CLOSED RAMP**

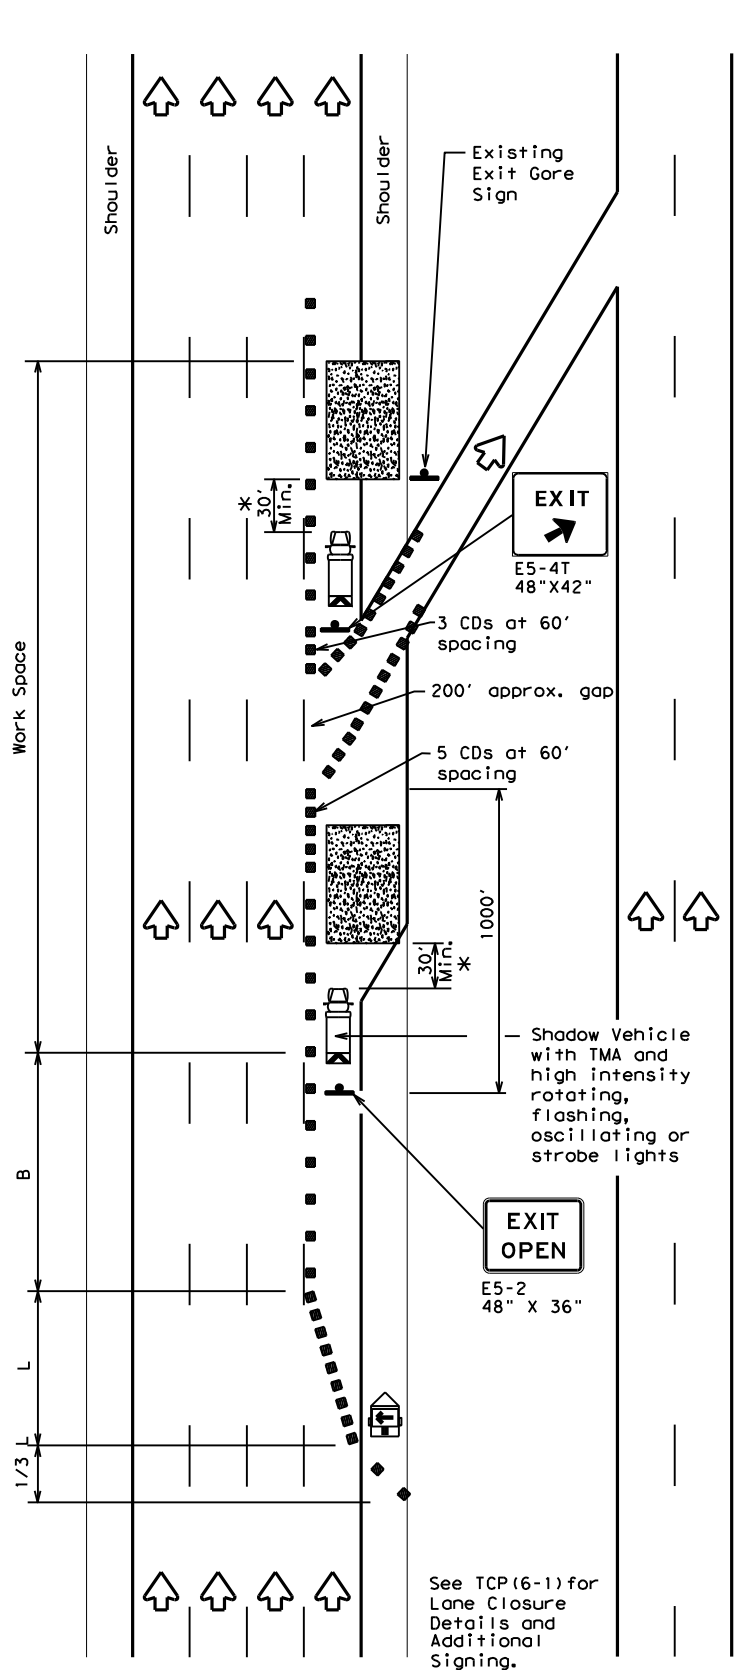

**TCP (6-4b)**  
**EXIT RAMP OPEN**

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

- GENERAL NOTES**
- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
  - See BC Standards for sign details.

\*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




**TRAFFIC CONTROL PLAN**  
**WORK AREA AT EXIT RAMP**


**TCP (6-4) - 12**

FILE: tcp6-4.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1994	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
1-97 8-98	DIST	COUNTY	SHEET NO.	
4-98 8-12	BMT	CHAMBERS	31	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any manner. DATE: 8/21/2024 1:43:01 PM FILE: T:\LIBERDES\NPSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMSH\TTC\TRAFFIC CONTROL PLANS\TCP (6-5) - 12.dgn

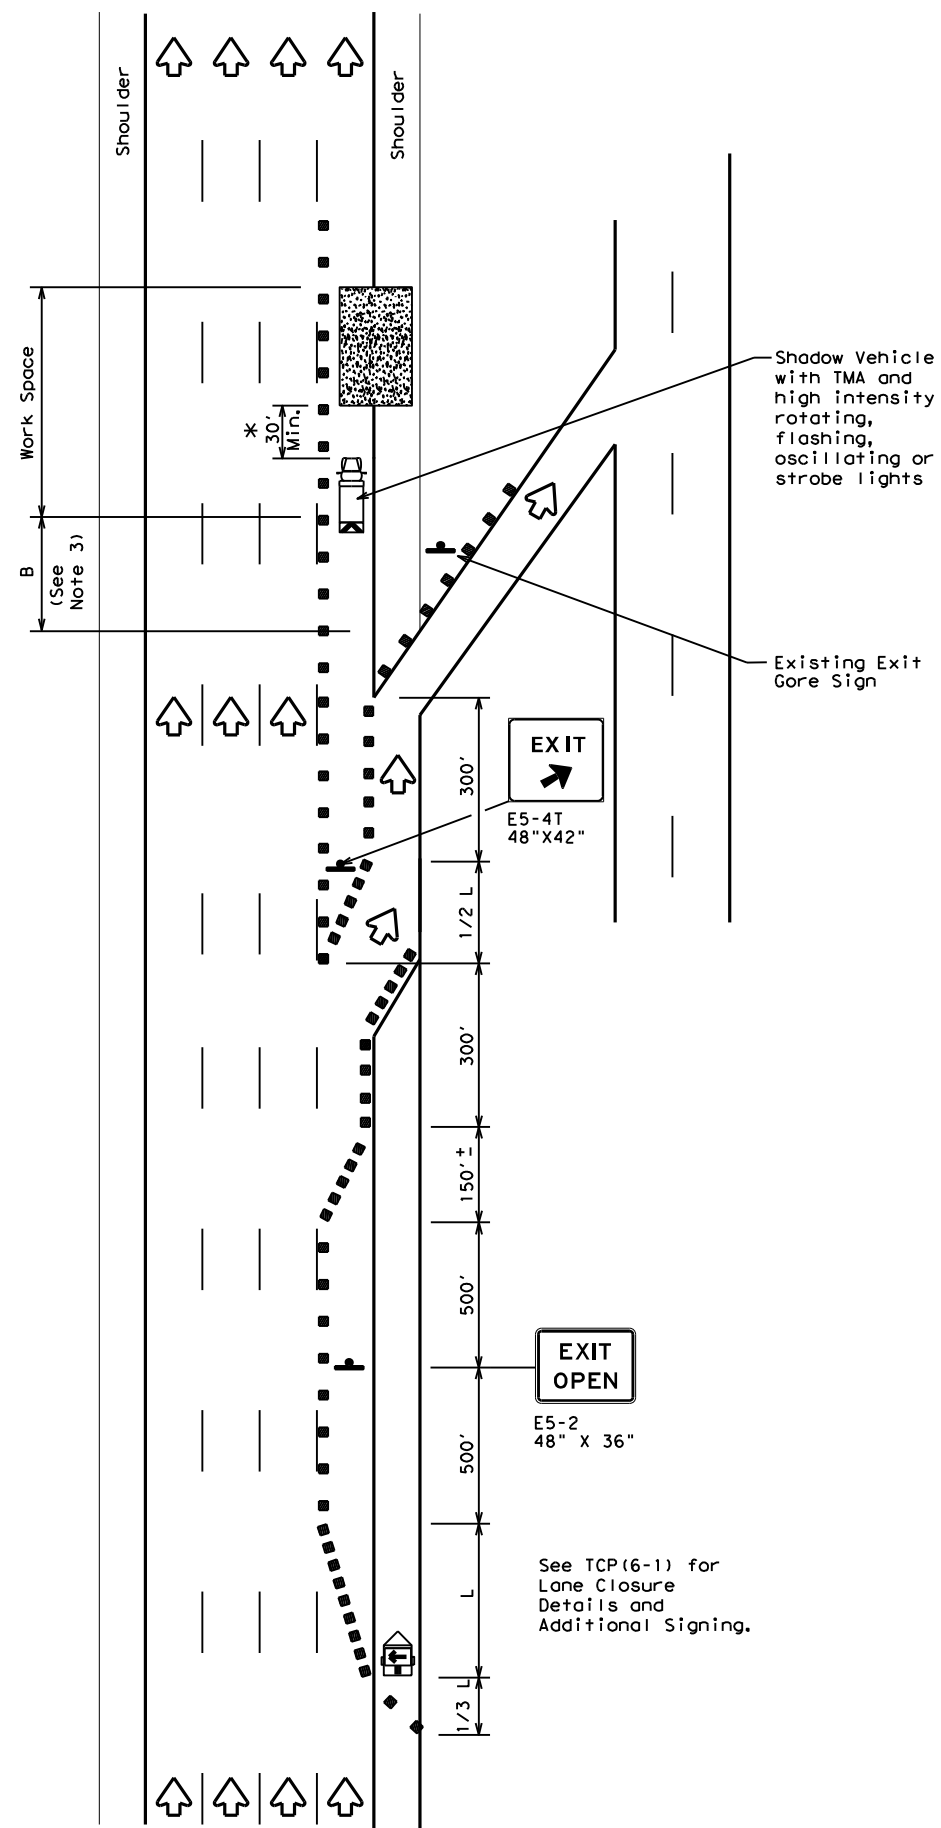

TCP (6-5a)  
**EXIT RAMP OPEN**

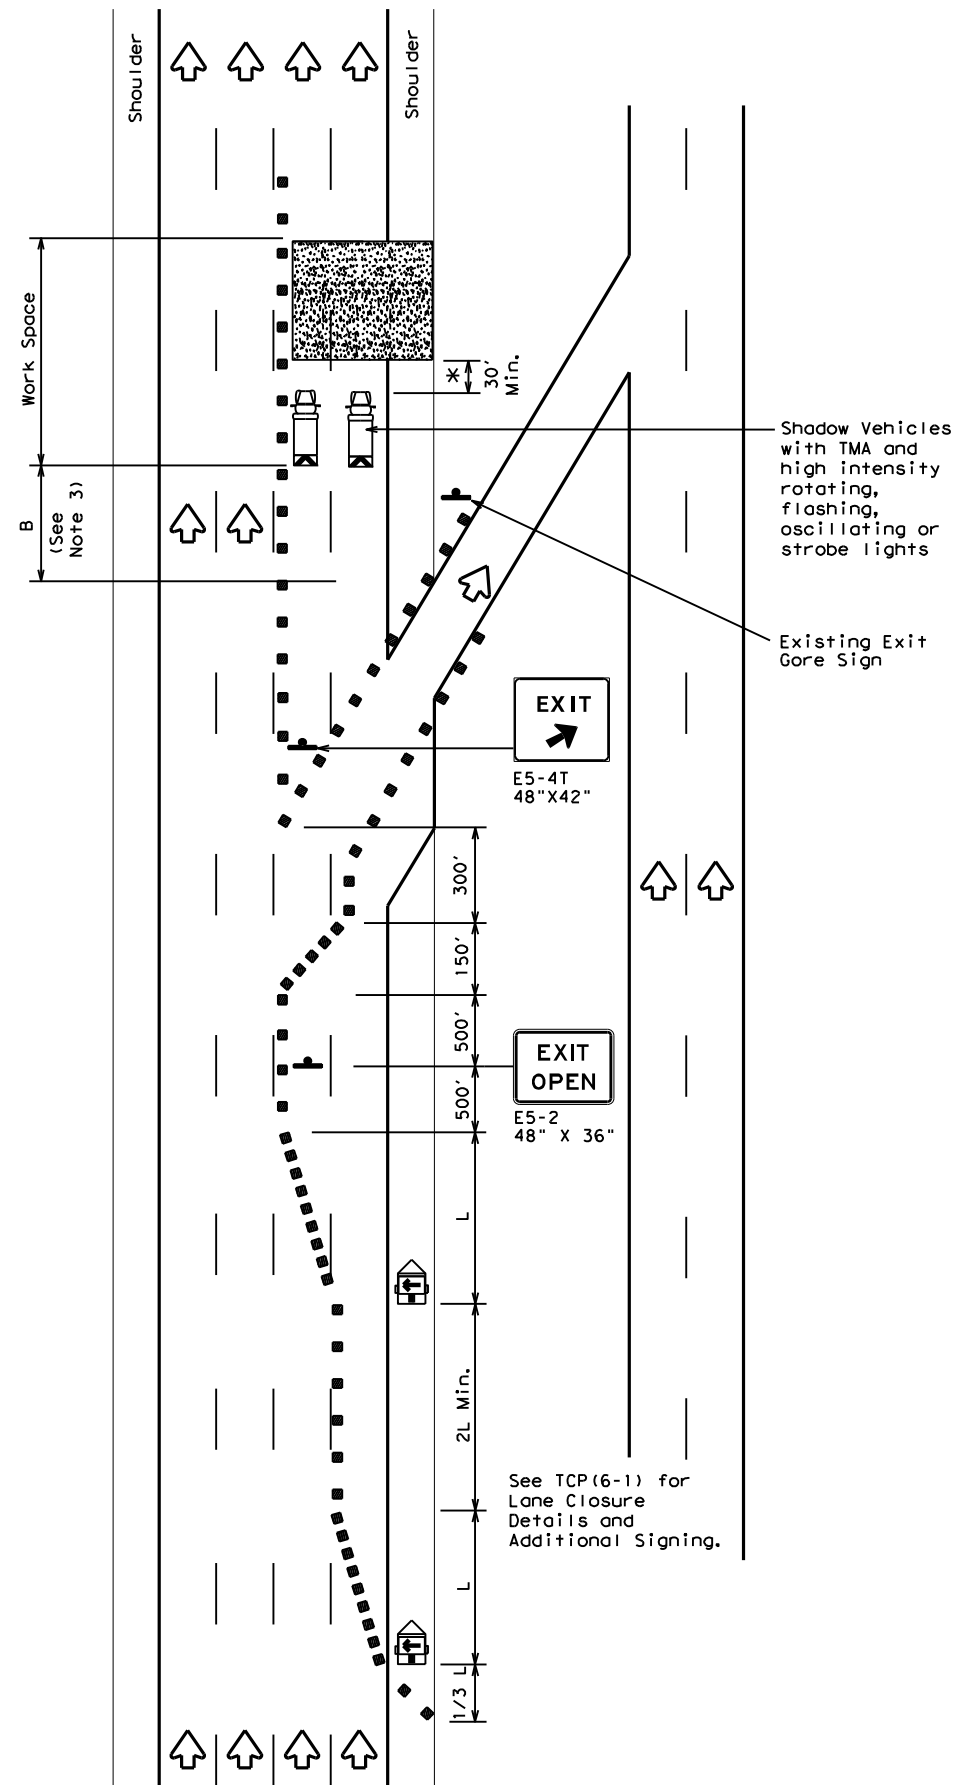

TCP (6-5b)  
**EXIT RAMP OPEN  
TWO LANE CLOSURE WITHIN  
1500' PAST EXIT RAMP**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

\*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

**GENERAL NOTES**

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- See BC standards for sign details.
- If adequate longitudinal buffer length "B" does not exist between the work space and the exit ramp, consideration should be given to closing the ramp.

\*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.





**TRAFFIC CONTROL PLAN  
WORK AREA BEYOND EXIT RAMP**

**TCP (6-5) - 12**

FILE:	tcp6-5.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	February 1998	CONT	SECT	JOB	HIGHWAY				
	REVISIONS	6470	68	001	IH 10 WB FR				
1-97	8-98								
4-98	8-12	DIST	COUNTY	SHEET NO.					
		BMT	CHAMBERS	32					



LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Work Zone

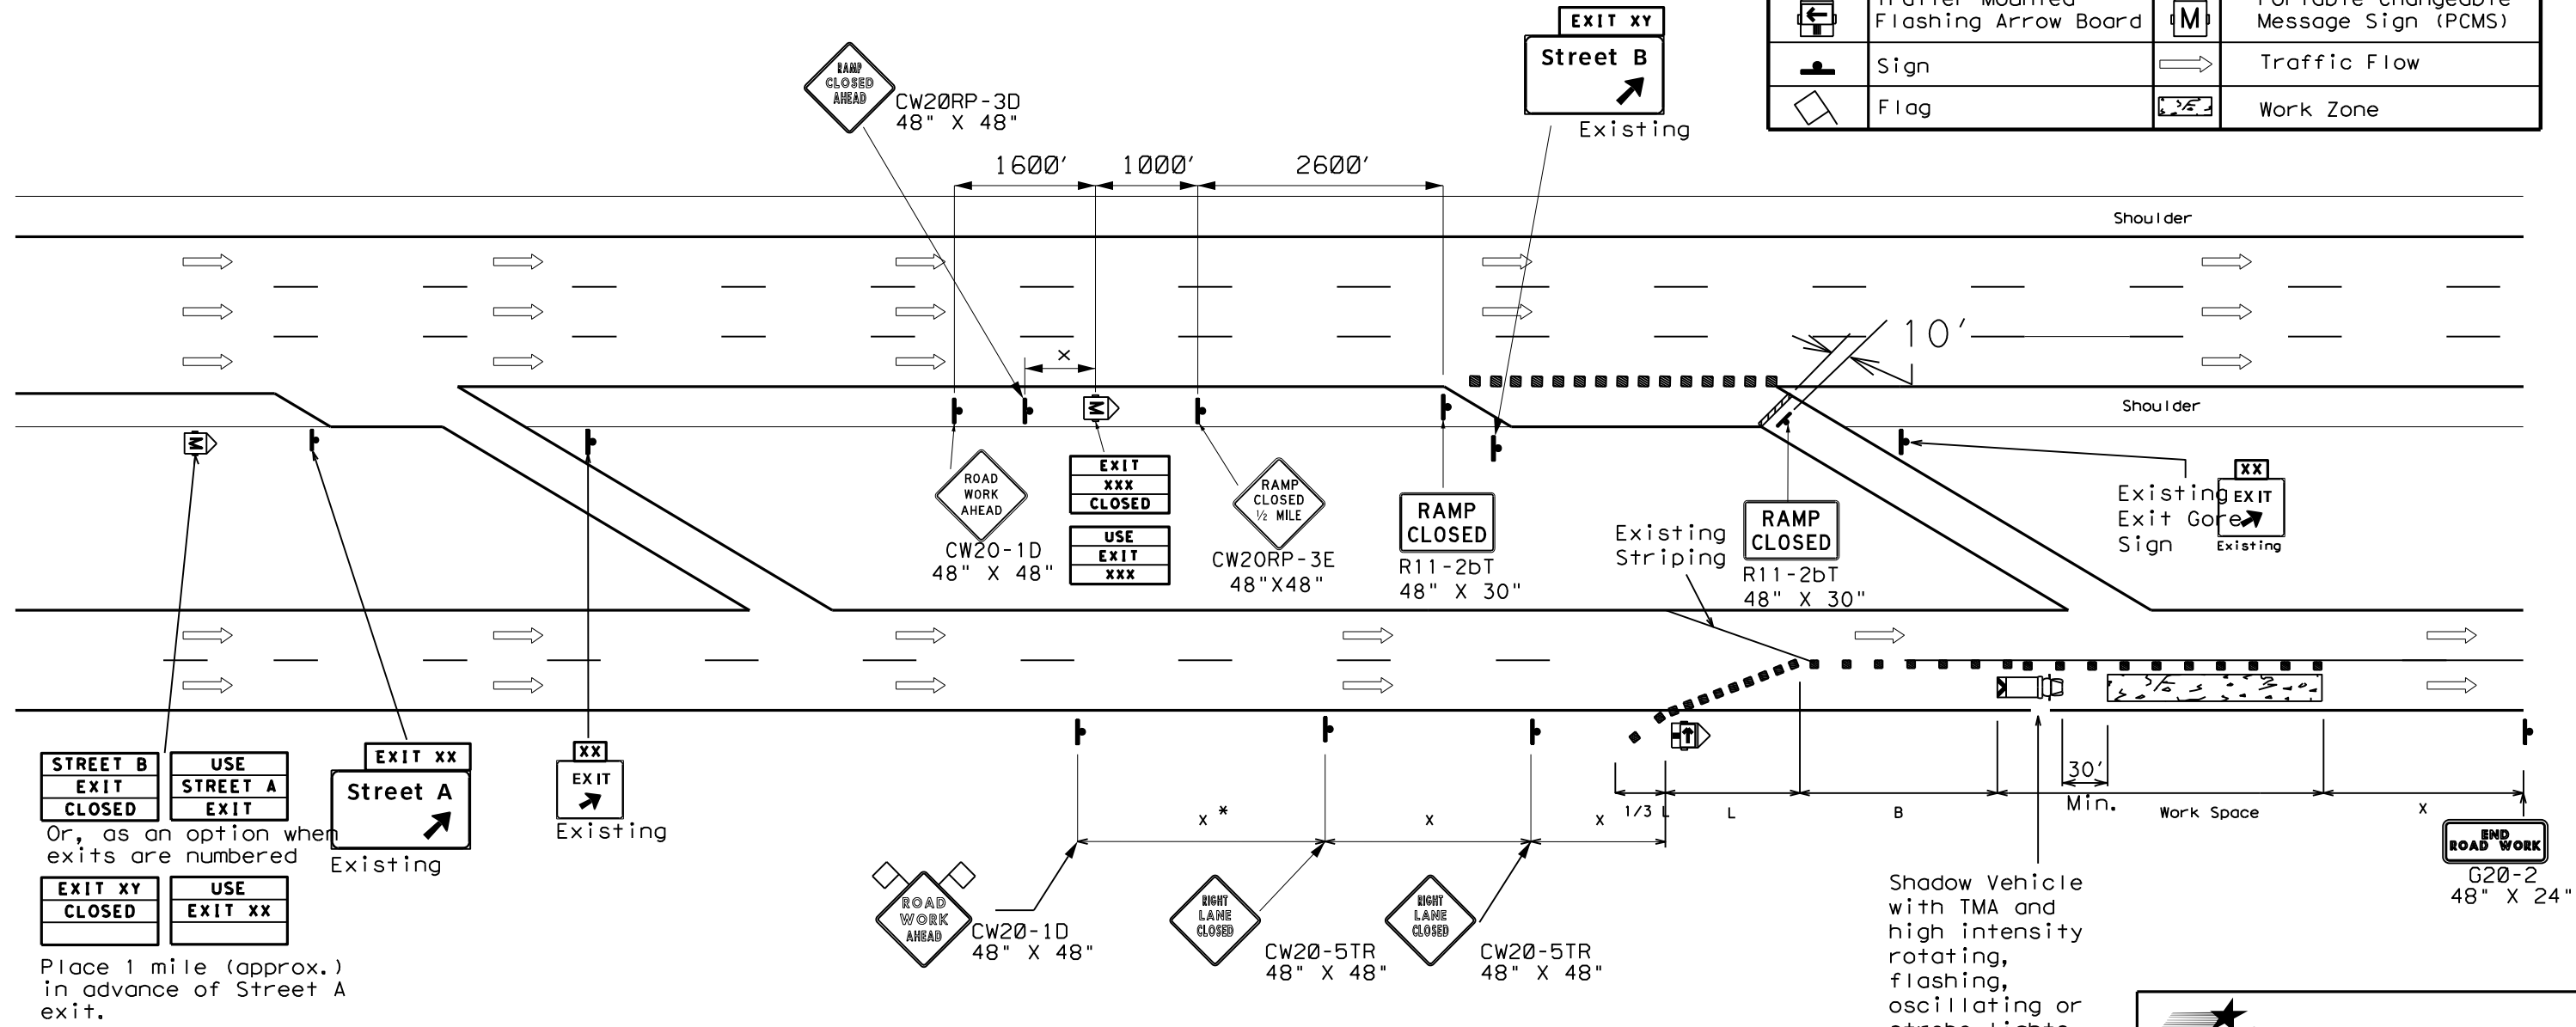

Or, as an option when exits are numbered  
Place 1 mile (approx.) in advance of Street A exit.

SEE STANDARD DRAWING FOR MORE INFORMATION

**GENERAL NOTES**

- The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the visibility of the work zone is less than 1500 feet.

DocuSigned by:  
  
 8/22/2024  
 5CAE84E05D7F456...

Posted Speed	Formula	Minimum Desirable Taper Lengths			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'





**LANE CLOSURE  
TCP Phase 1**

FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
			33
STATE	DIST	COUNTY	
	BMT	CHAMBERS	
CONT	SECT	JOB	HIGHWAY
6470	68	001	IH 10 WB FR

DATE: 8/22/2024 \$FILEL\$

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Work Zone

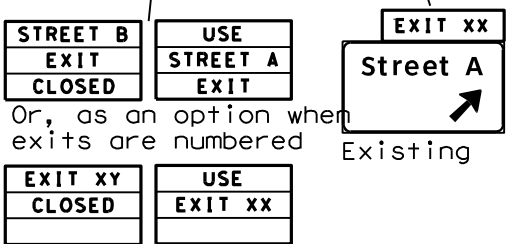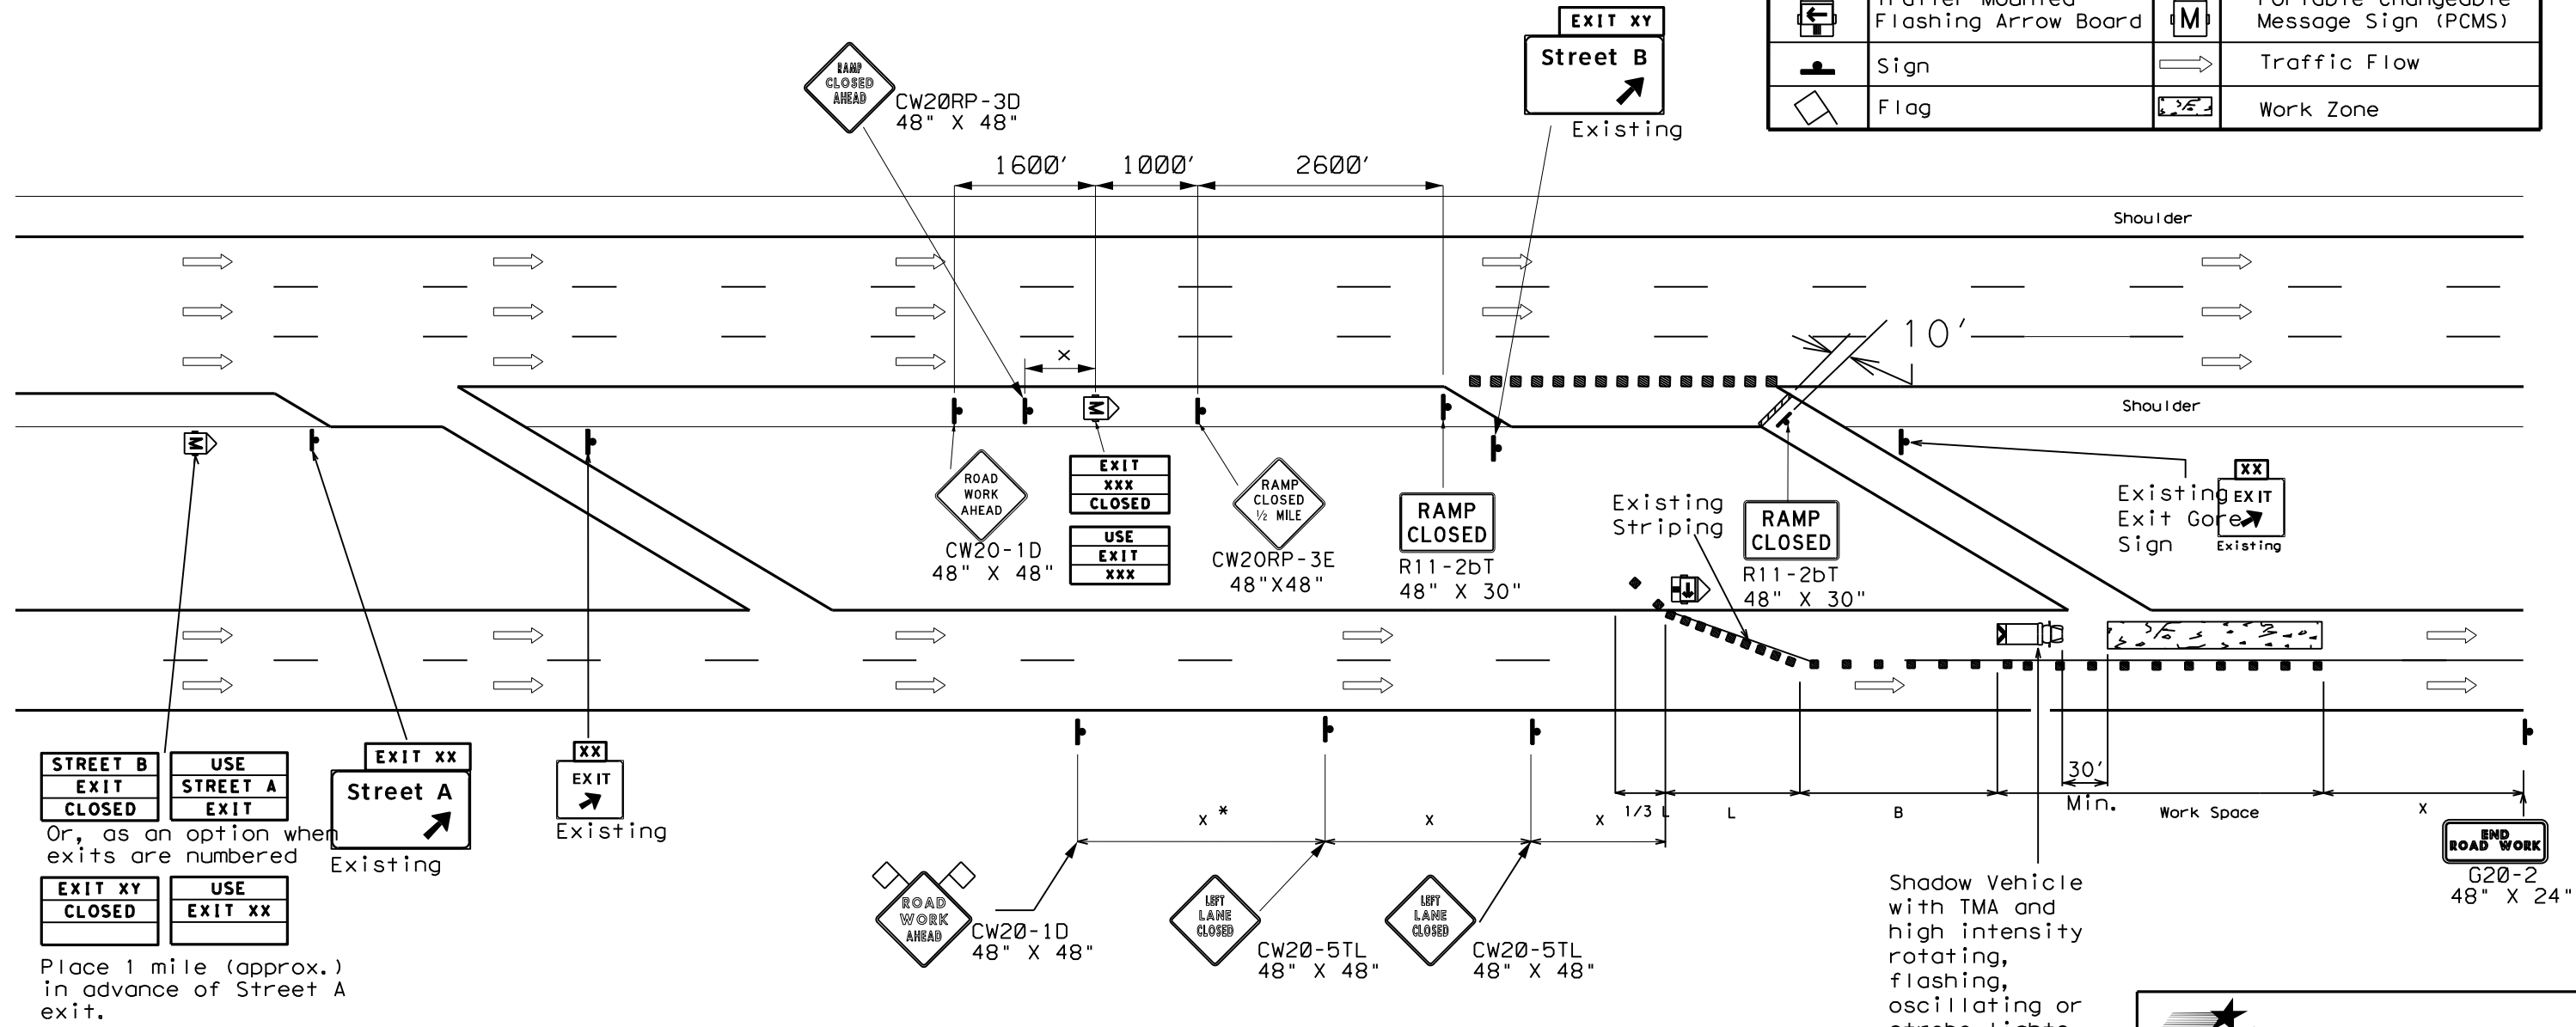

SEE STANDARD DRAWING FOR MORE INFORMATION

**GENERAL NOTES**

1. The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the visibility of the work zone is less than 1500 feet.



DocuSigned by: 8/22/2024

Posted Speed	Formula	Minimum Desirable Taper Lengths			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'




**LANE CLOSURE  
TCP Phase 2**

FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
			34
STATE	DIST	COUNTY	
	BMT	CHAMBERS	
CONT	SECT	JOB	HIGHWAY
6470	68	001	1H 10 WB FR


DATE: 8/21/2024 1:43:05 PM  
 FILE: T:\LIBERDES\NPSE MAINTENANCE\NFY 25\NFY 25 RMC 6470-68-001 IH-10 FR WB BATS\TSP\WZ\RS-22.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into digital format or for any errors or omissions that may appear in this document.

**Warning sign and rumble strip sequence in opposite direction is same as below.**

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

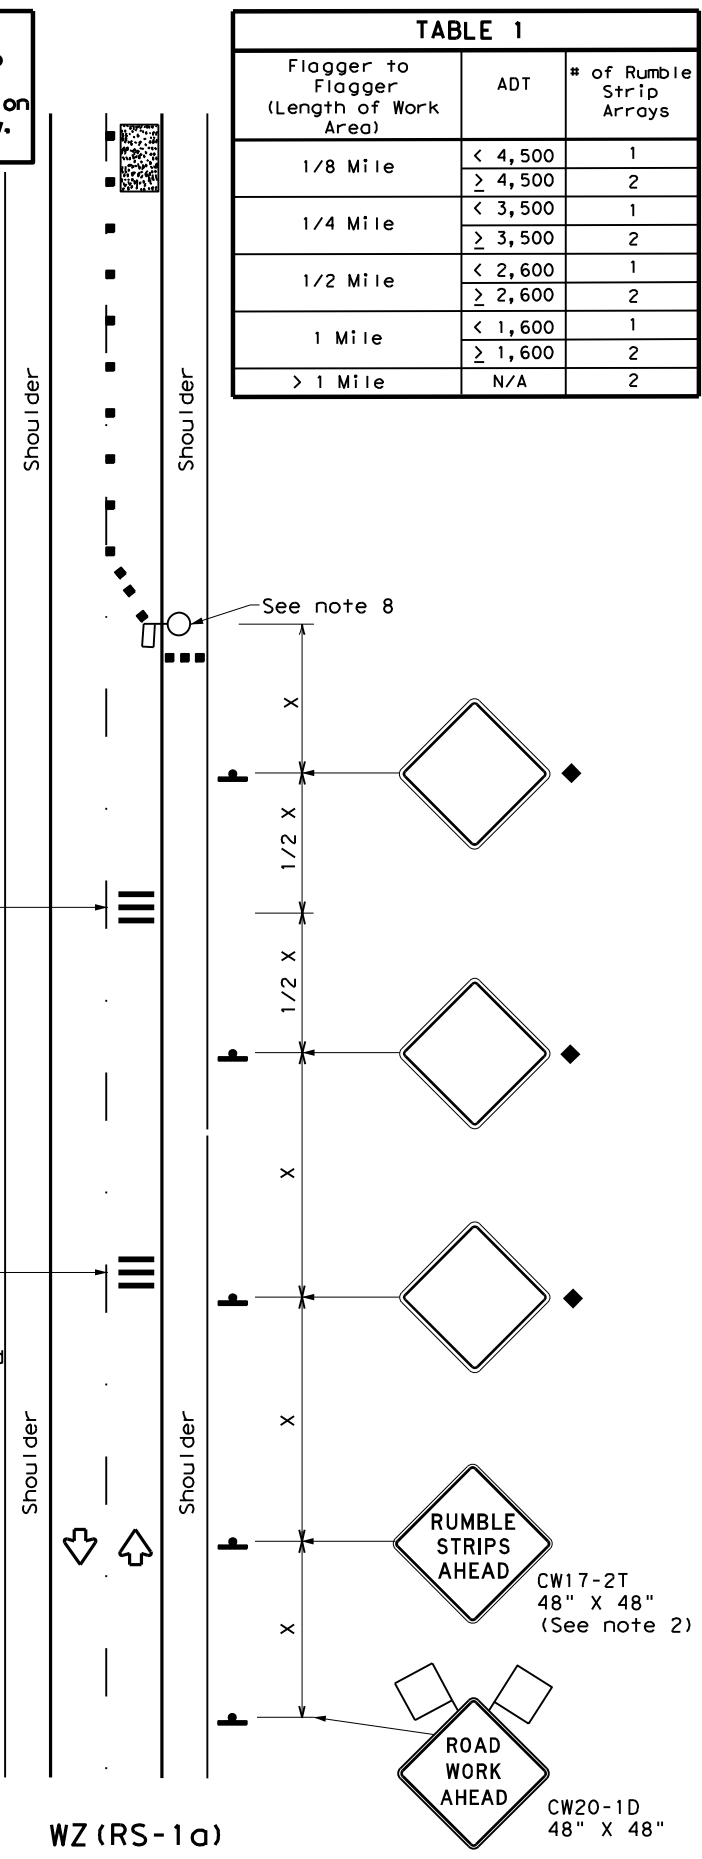

**RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION**

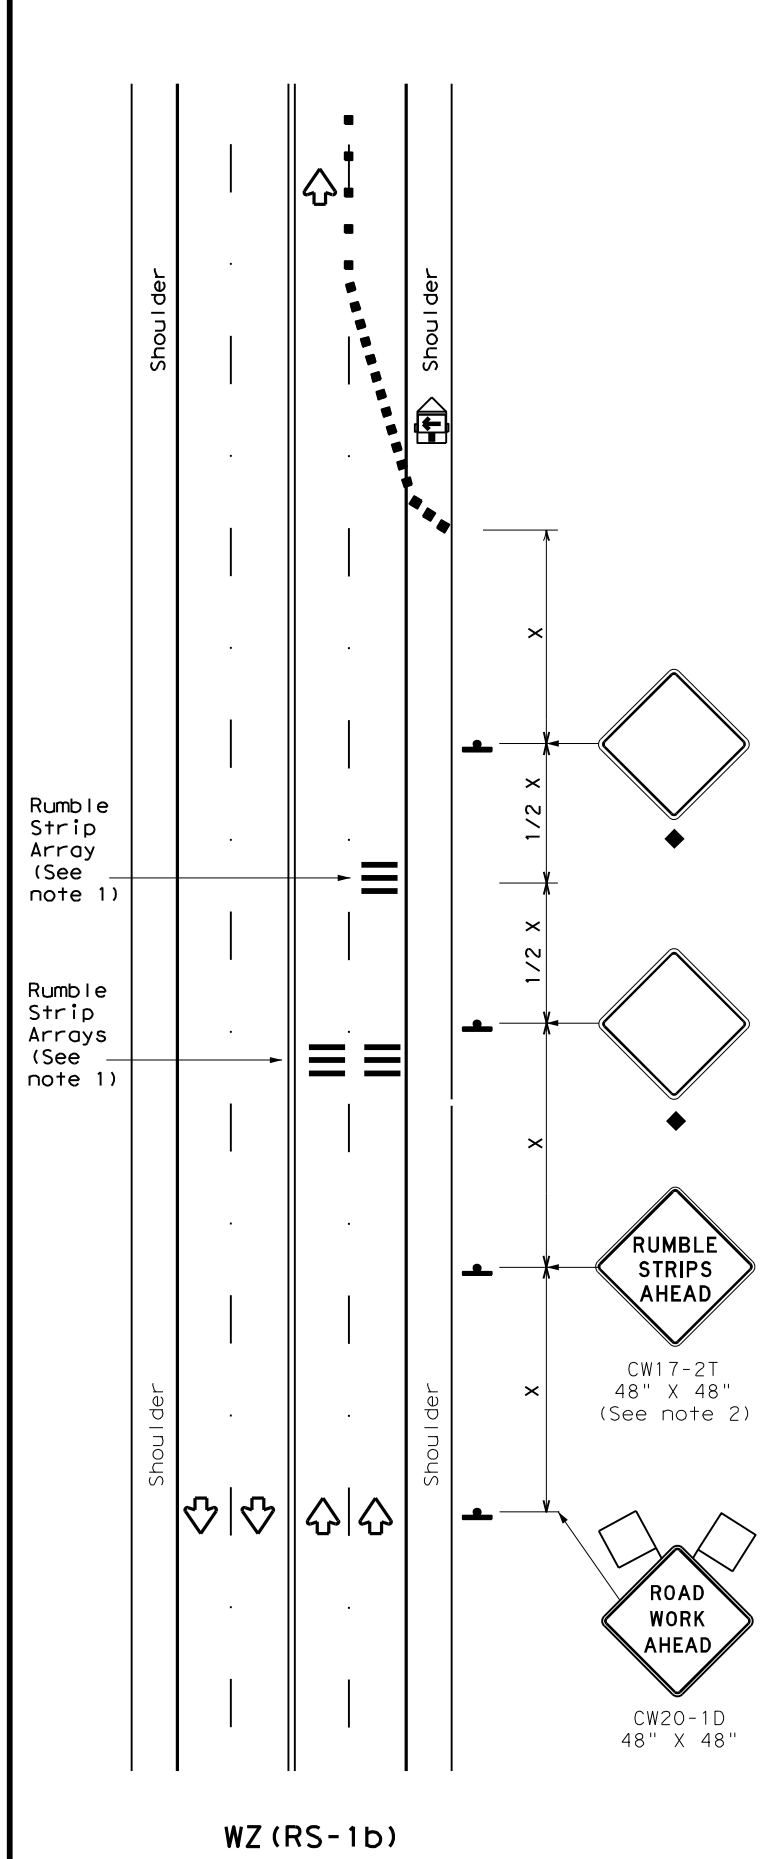

**RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY**

**GENERAL NOTES**

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT)  
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

\* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.


Texas Department of Transportation  
 Traffic Safety Division Standard

## TEMPORARY RUMBLE STRIPS

### WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	BMT	CHAMBERS	35	

# WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

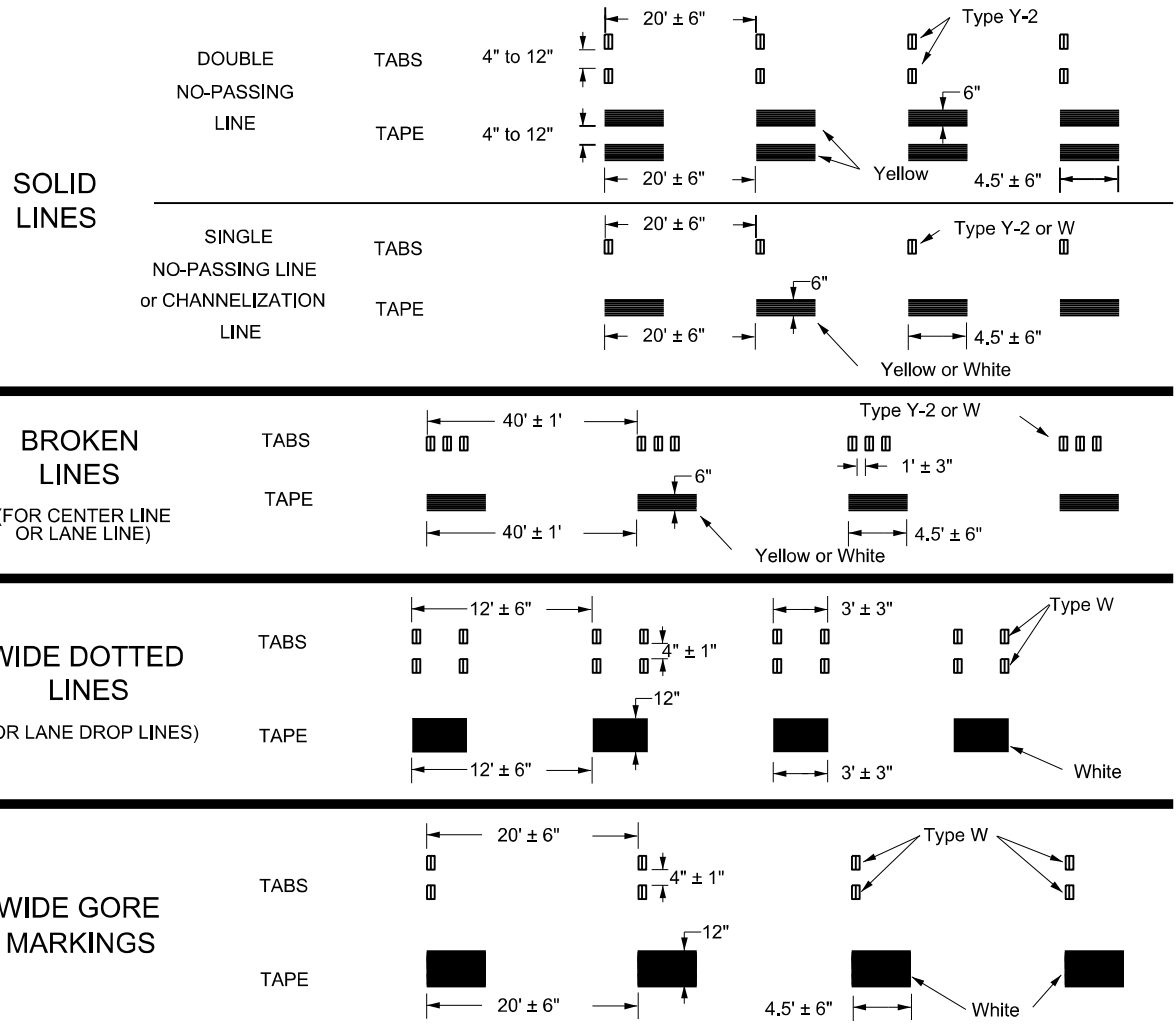


**NOTES:**

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

**TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)**

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

# WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

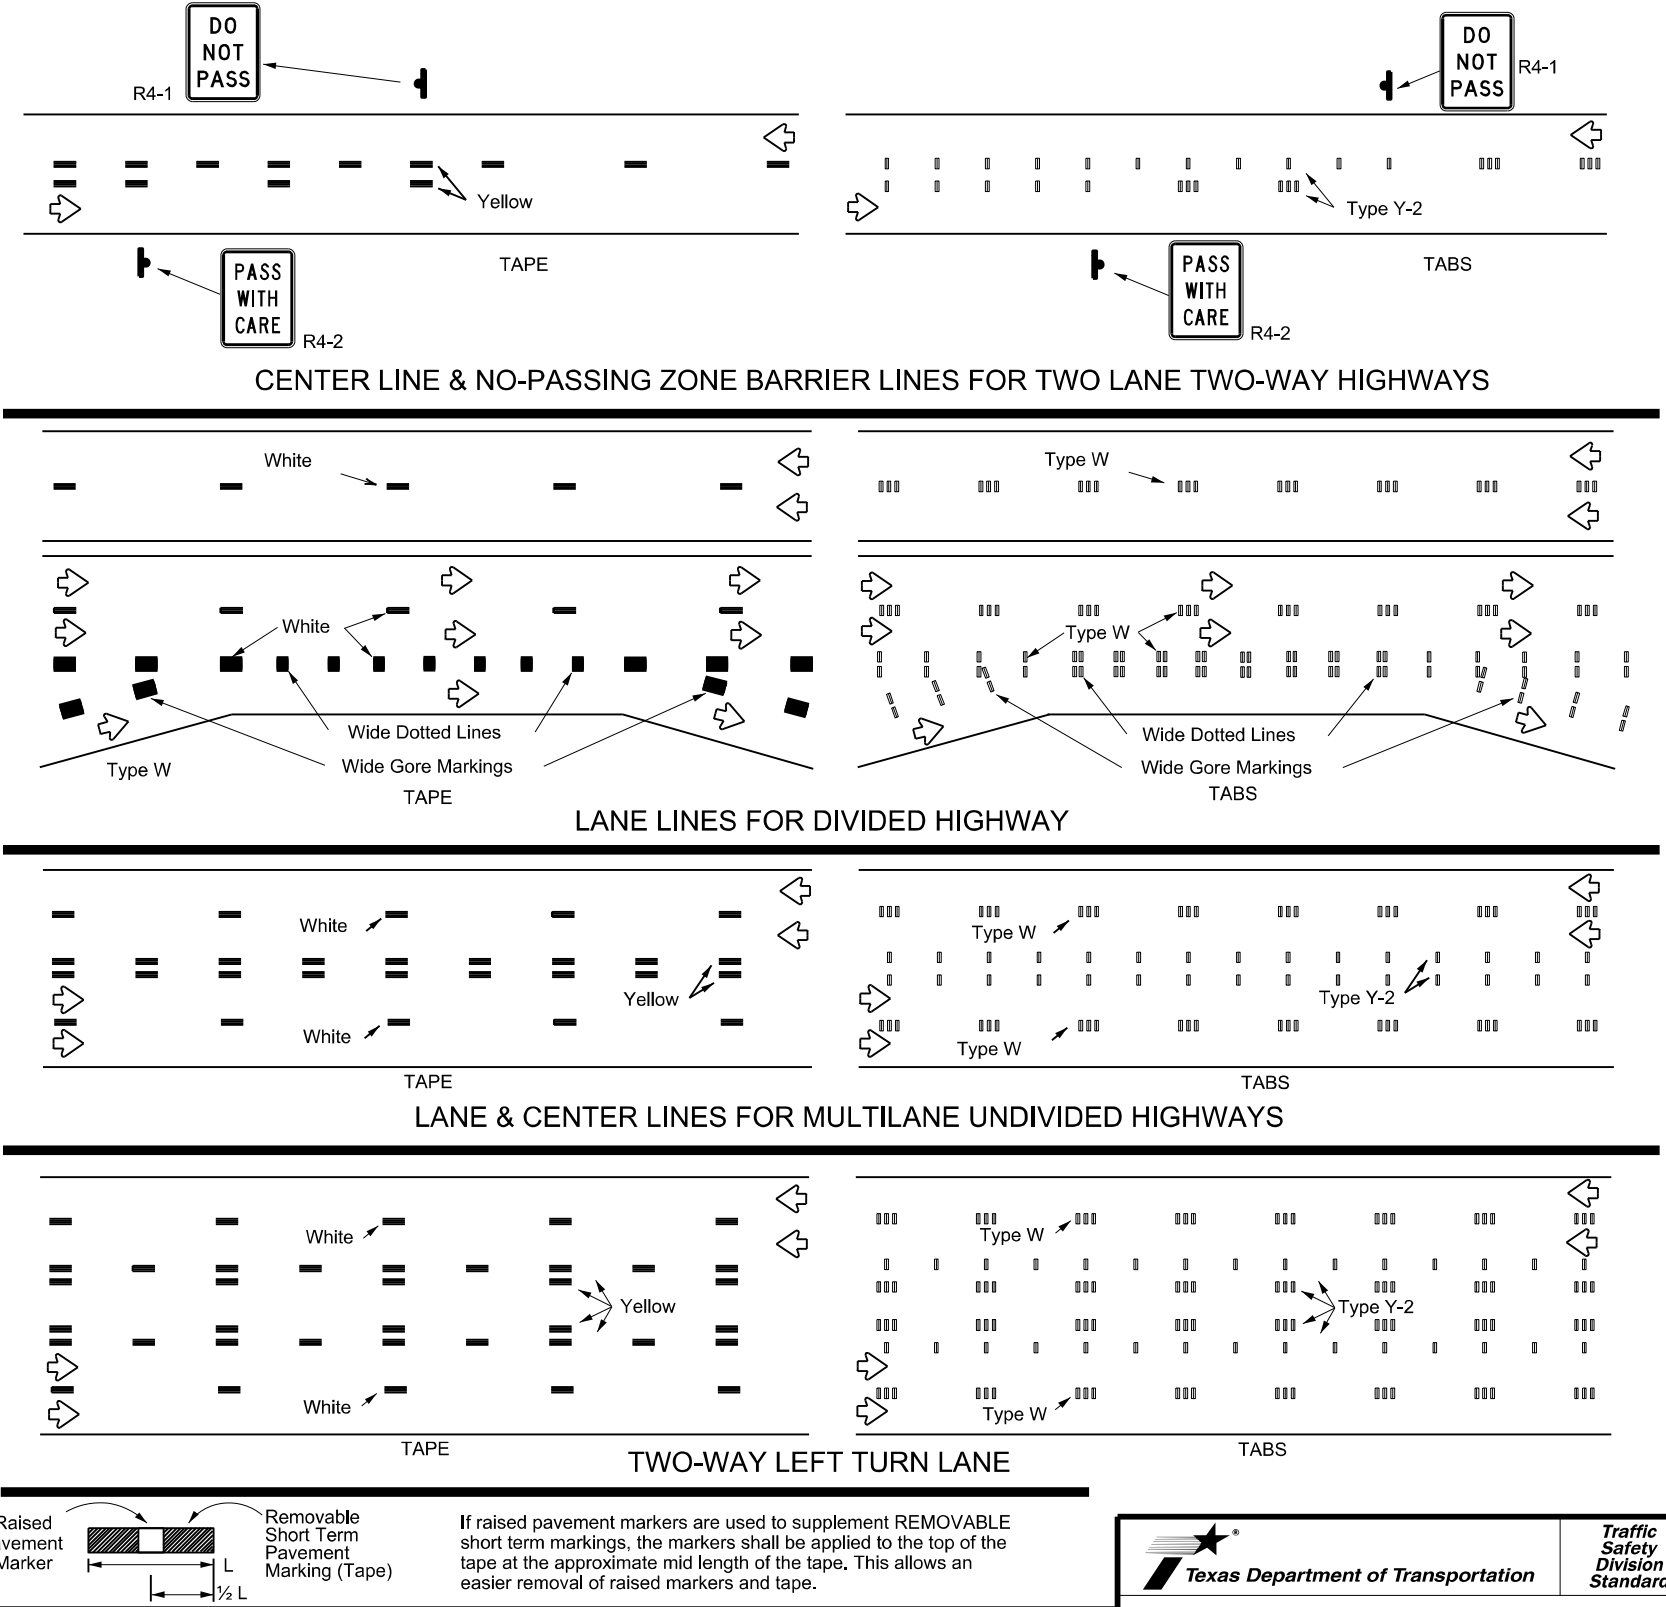

**PREFABRICATED PAVEMENT MARKINGS**

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.
- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

**RAISED PAVEMENT MARKERS**

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

**DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)**

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:

[http://www.txdot.gov/business/contractors\\_consultants/material\\_specifications/default.htm](http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm)

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.







## WORK ZONE SHORT TERM PAVEMENT MARKINGS

### WZ(STPM)-23

FILE: wzsstpm-23.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2023	CONT 6470	SECT 68	JOB 001	HIGHWAY IH 10 WB FR
4-92 7-13 1-87 2-23 3-03	REVISIONS		DIST BMT	COUNTY CHAMBERS
				SHEET NO. 36

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions that may appear hereon.

DATE: 8/21/2024 1:43:08 PM  
 FILE: T:\LIBERDES\NPSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMS\PHOTOS\WZUL\WZUL-13.dgn

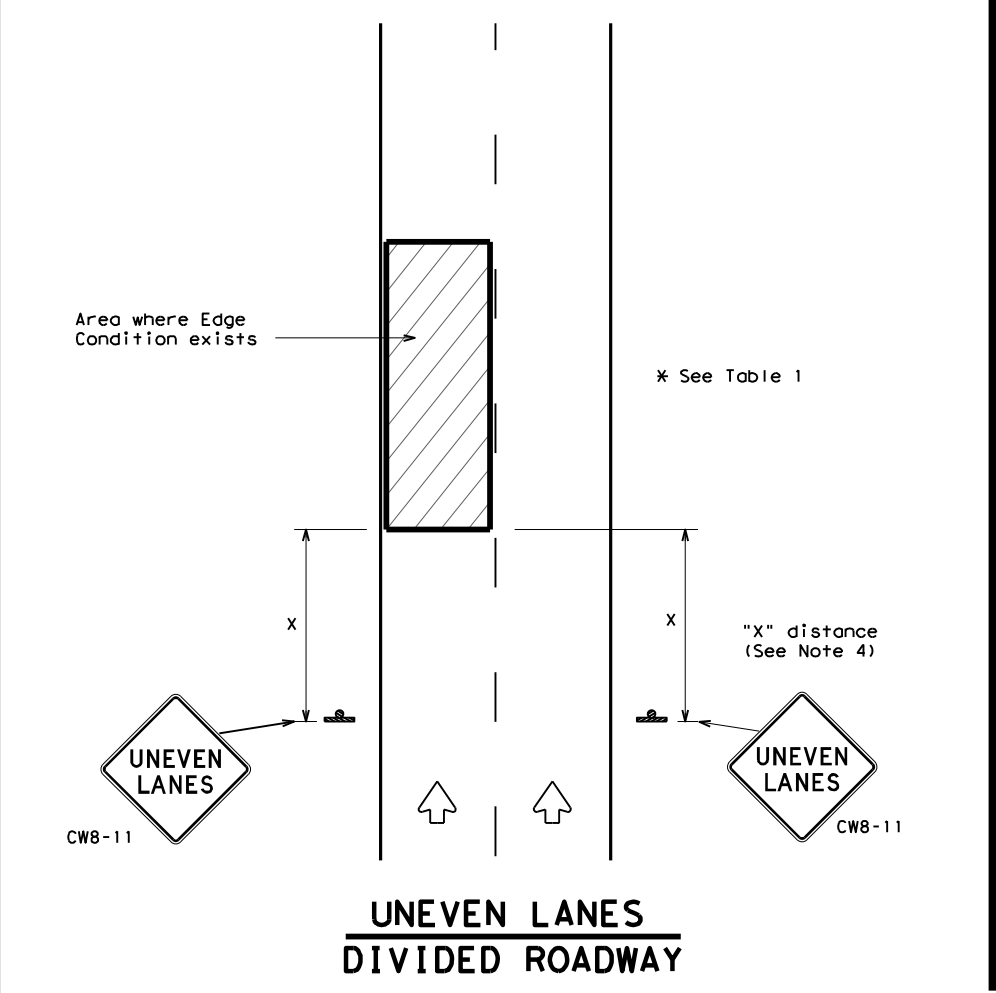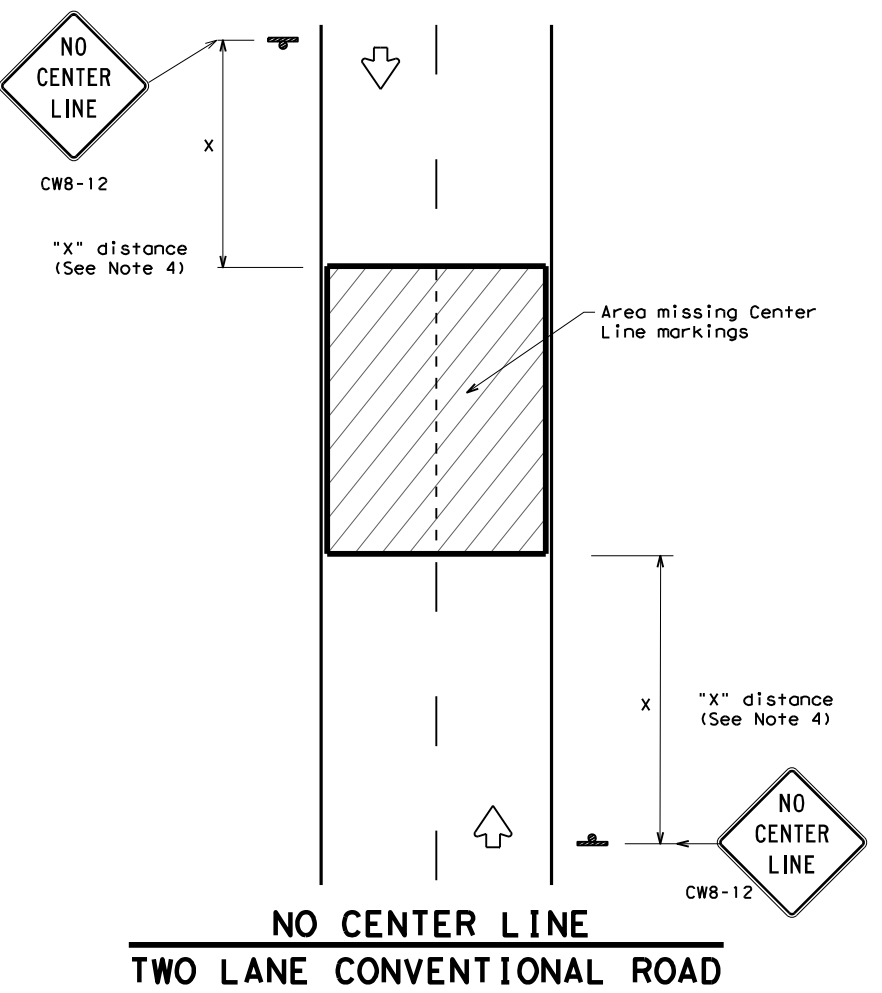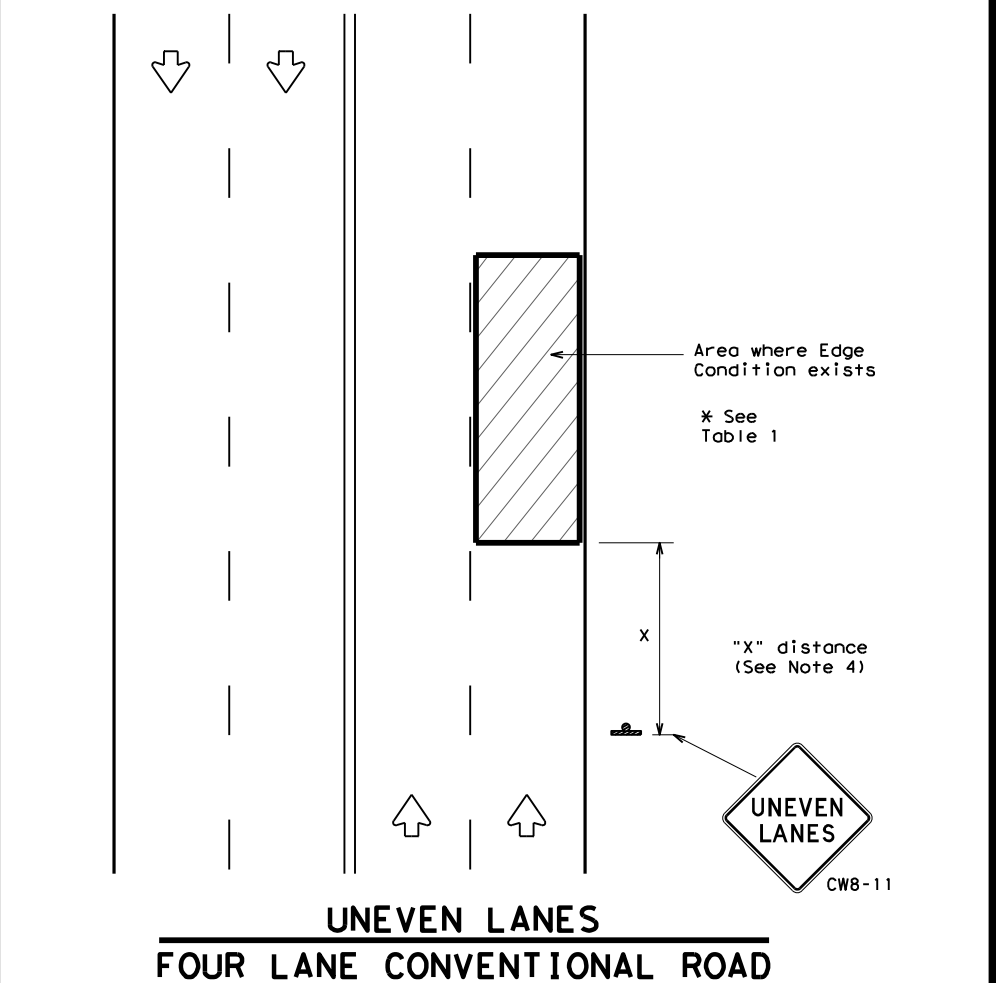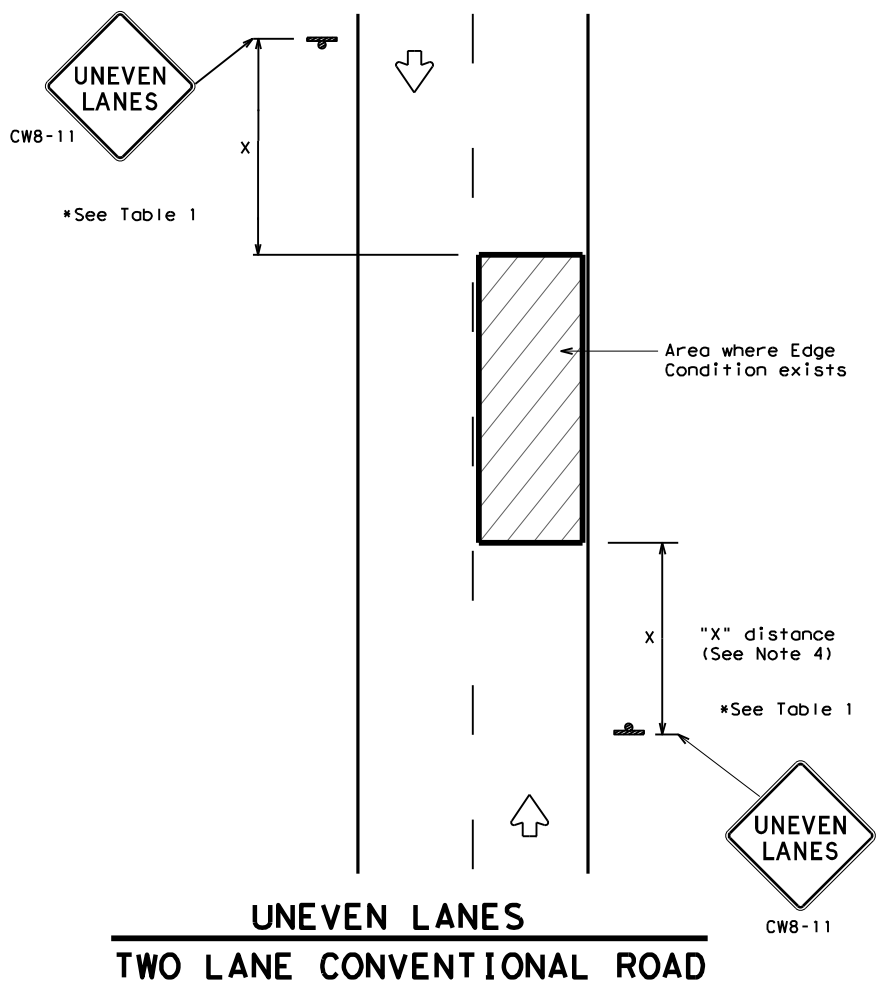

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY (REMOVABLE) PREFABRICATED PAVEMENT MARKINGS	DMS-8241
SIGN FACE MATERIALS	DMS-8300

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B <sub>FL</sub> OR TYPE C <sub>FL</sub> SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

**GENERAL NOTES**

1. If spalling or holes occur, ROUGH ROAD (CW8-8) signs should be placed in advance of the condition and be repeated every two miles where the condition persists.
2. UNEVEN LANES (CW8-11) signs shall be installed in advance of the condition and repeated every mile. Signs installed along the uneven lane condition may be supplemented with the NEXT XX MILES (CW7-3aP) plaque or Advisory Speed (CW13-1P) plaque.
3. NO CENTER LINE (CW8-12) signs and temporary pavement markings as per the WZ(STPM) standard shall be installed if yellow centerlines separating two way traffic are obscured or obliterated. Repeat NO CENTER LINE signs every two miles where the center line markings are not in place. The signs and markings shall remain in place until permanent pavement markings are installed.
4. Signs shall be spaced at the distances recommended as per BC standards.
5. Additional signs may be required as directed by the Engineer. Signs shall remain in place until final surface is applied. Signs shall be considered subsidiary to Item 502 "BARRICADES, SIGNS AND TRAFFIC HANDLING."
6. Signs shall be fabricated and mounted on supports as shown on the BC standards and/or listed on the "Compliant Work Zone Traffic Control Devices" list.
7. Short term markings shall not be used to simulate edge lines.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition.

Edge Condition	Edge Height (D)	* Warning Devices
①	Less than or equal to: 1/4" (maximum-planing) 1/2" (typical-overlay)	Sign: CW8-11
②	Less than or equal to 3"	Sign: CW8-11
③	Distance "D" may be a maximum of 3" if uneven lanes with edge condition 2 or 3 are open to traffic after work operations cease. Uneven lanes should not be open to traffic when "D" is greater than 3".	

**TRAFFIC CONTROL DURING PLANING, OVERLAY AND LEVELING OPERATIONS ARE SHOWN ELSEWHERE IN THE PLANS.**





MINIMUM WARNING SIGN SIZE	
Conventional roads	36" x 36"
Freeways/expressways, divided roadways	48" x 48"



**SIGNING FOR UNEVEN LANES**

**WZ (UL) - 13**

FILE: wzu-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT	April 1992	CONT	SECT	JOB
REVISIONS	6470	68	001	HW 10 WB FR
8-95 2-98 7-13	DIST	COUNTY	SHEET NO.	
1-97 3-03	BMT	CHAMBERS	37	

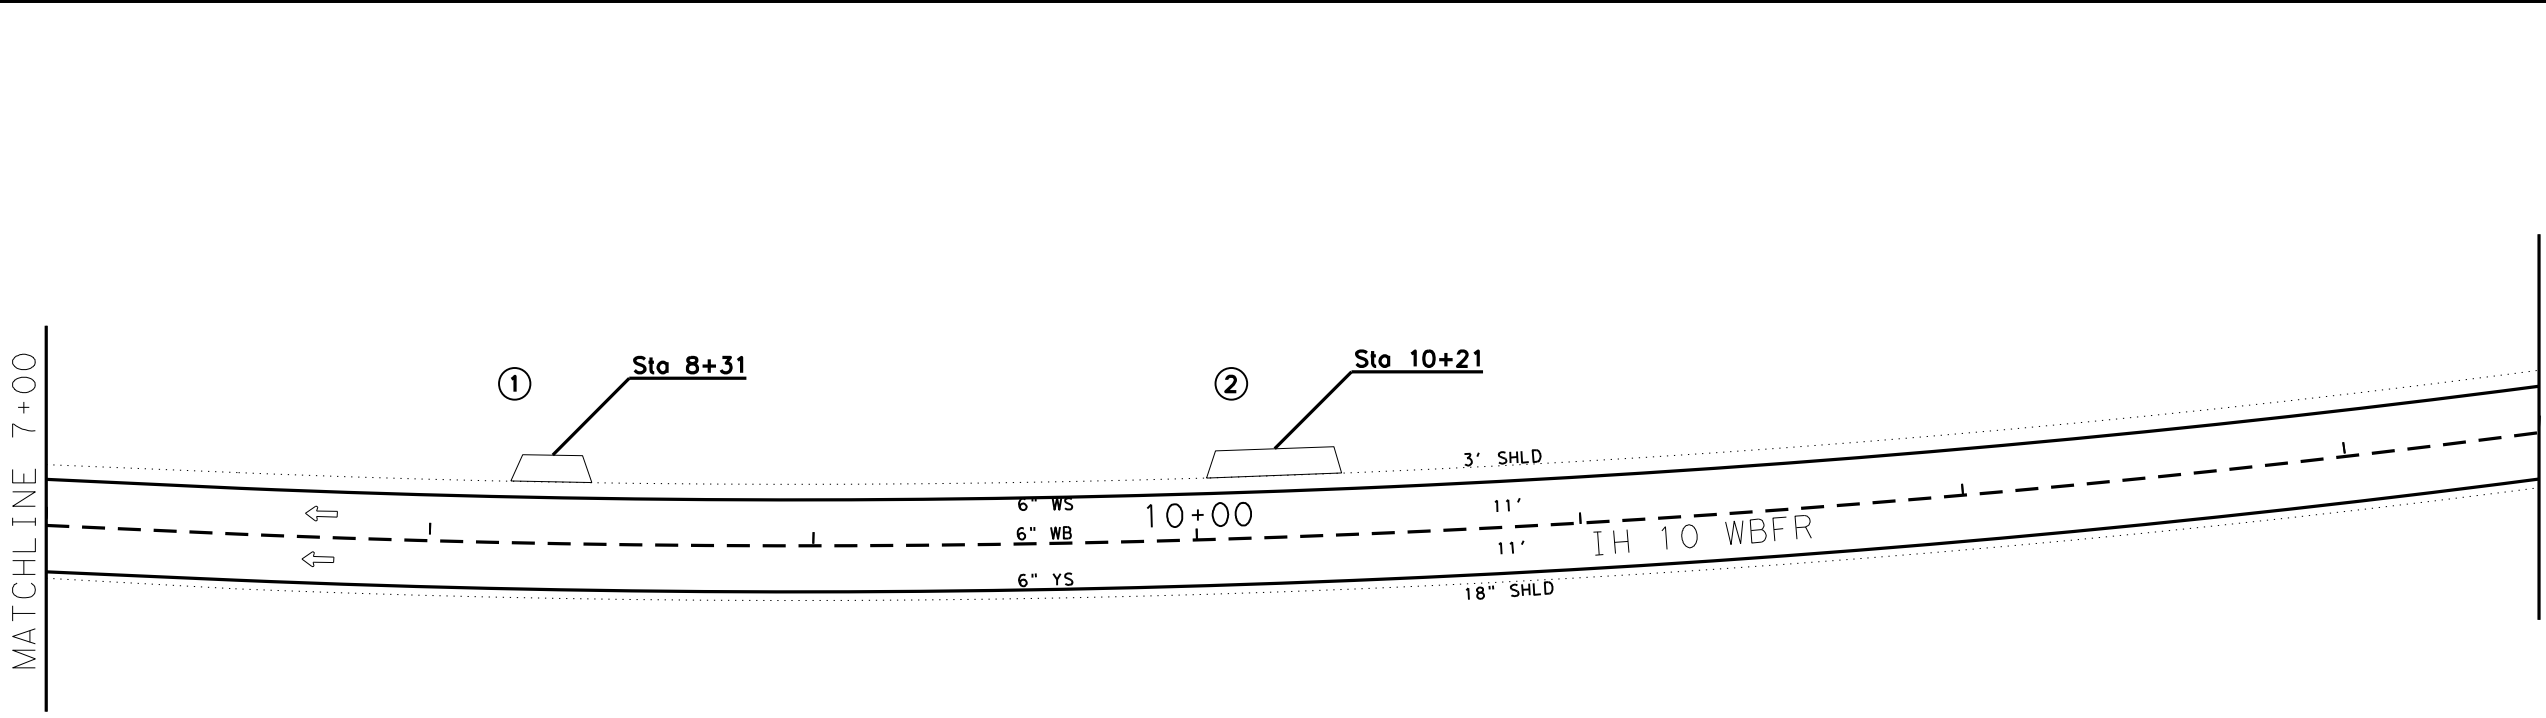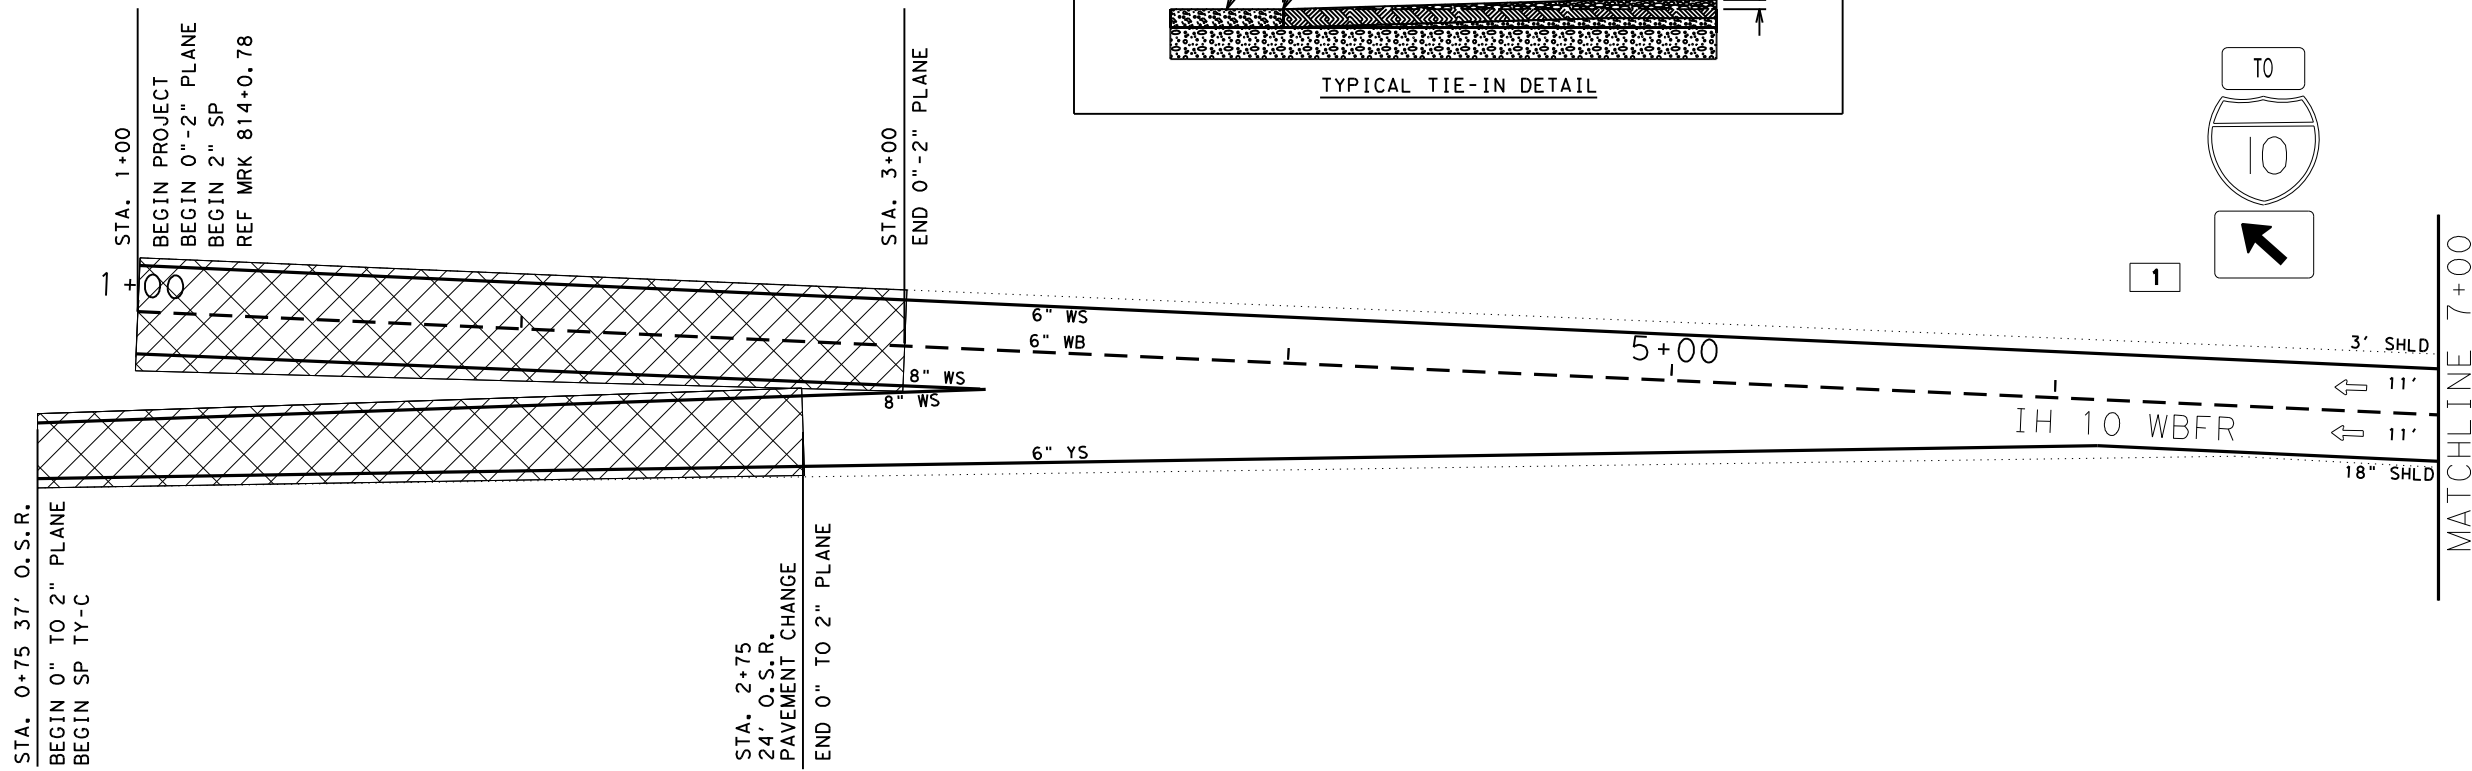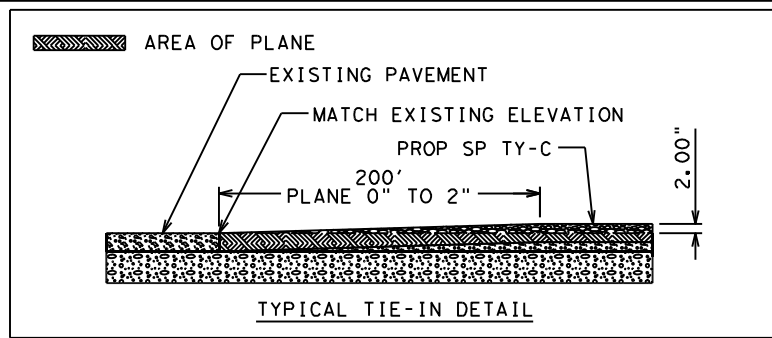



DocuSigned by: *[Signature]*  
8/22/2024  
5CAE84E05D7F456...

**LAYOUT AND ROADWAY DATA**  
SHEET 1 OF 5

LEGEND			
-----	EDGE OF PAVEMENT	2YS	DOUBLE YELLOW SOLID
-----	MBGF	[Hatched Box]	AREA OF PLANE TRANSITION
WS	WHITE SOLID	[White Box]	## SIGN ID
WB	WHITE BROKEN	[Cross-hatched Box]	PLANING AREA
YS	YELLOW SOLID	[Circle]	# DRIVEWAY ID
YB	YELLOW BROKEN		

N. T. S.

6470	68	001	IH 10 WB FR
DIST	COUNTY		SHEET NO.
BMT	CHAMBERS		38

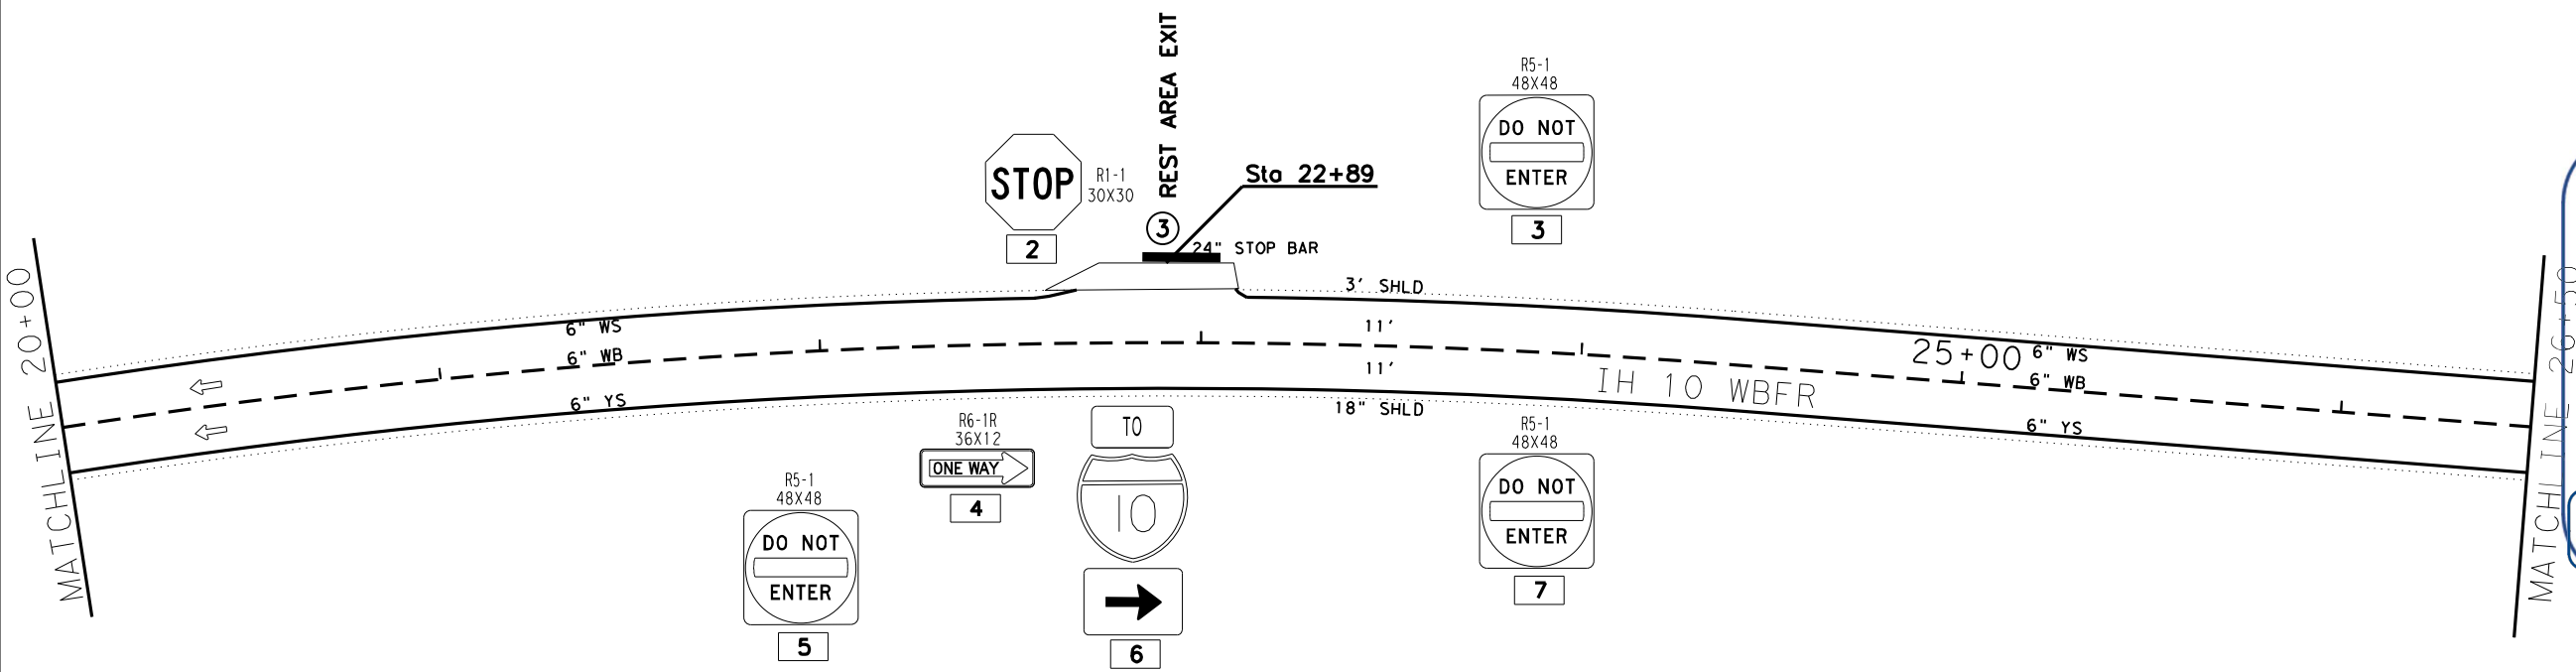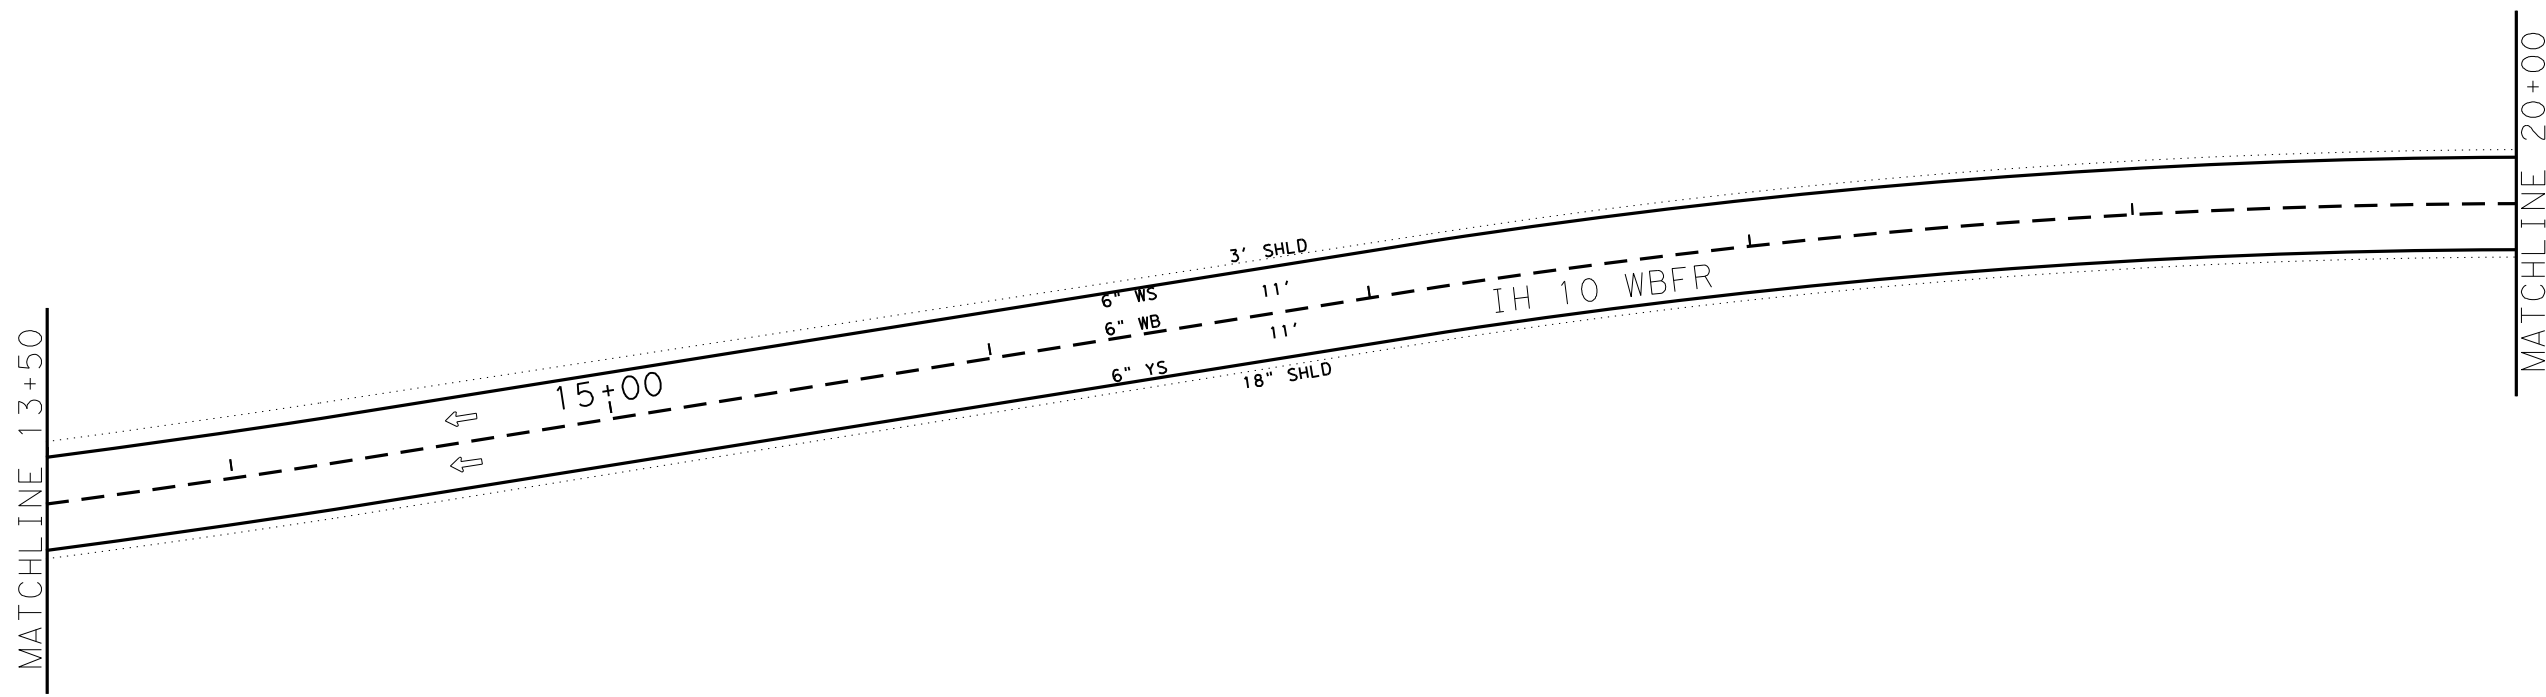

DocuSigned by:  
 5CAE84E05D7F456...  
 8/22/2024



**LAYOUT AND ROADWAY DATA**

SHEET 2 OF 5

LEGEND			
-----	EDGE OF PAVEMENT	2YS	DOUBLE YELLOW SOLID
-----	MBGF	[Hatched Box]	AREA OF PLANE TRANSITION
WS	WHITE SOLID	[White Box]	** SIGN ID
WB	WHITE BROKEN	[Yellow Box]	PLANING AREA
YS	YELLOW SOLID	[Circle]	# DRIVEWAY ID
YB	YELLOW BROKEN		

N. T. S.

CONT	SECT
6470	68
JOB	
001	
HIGHWAY	
IH 10 WB FR	
DIST	COUNTY
BMT	CHAMBERS
SHEET NO.	
39	

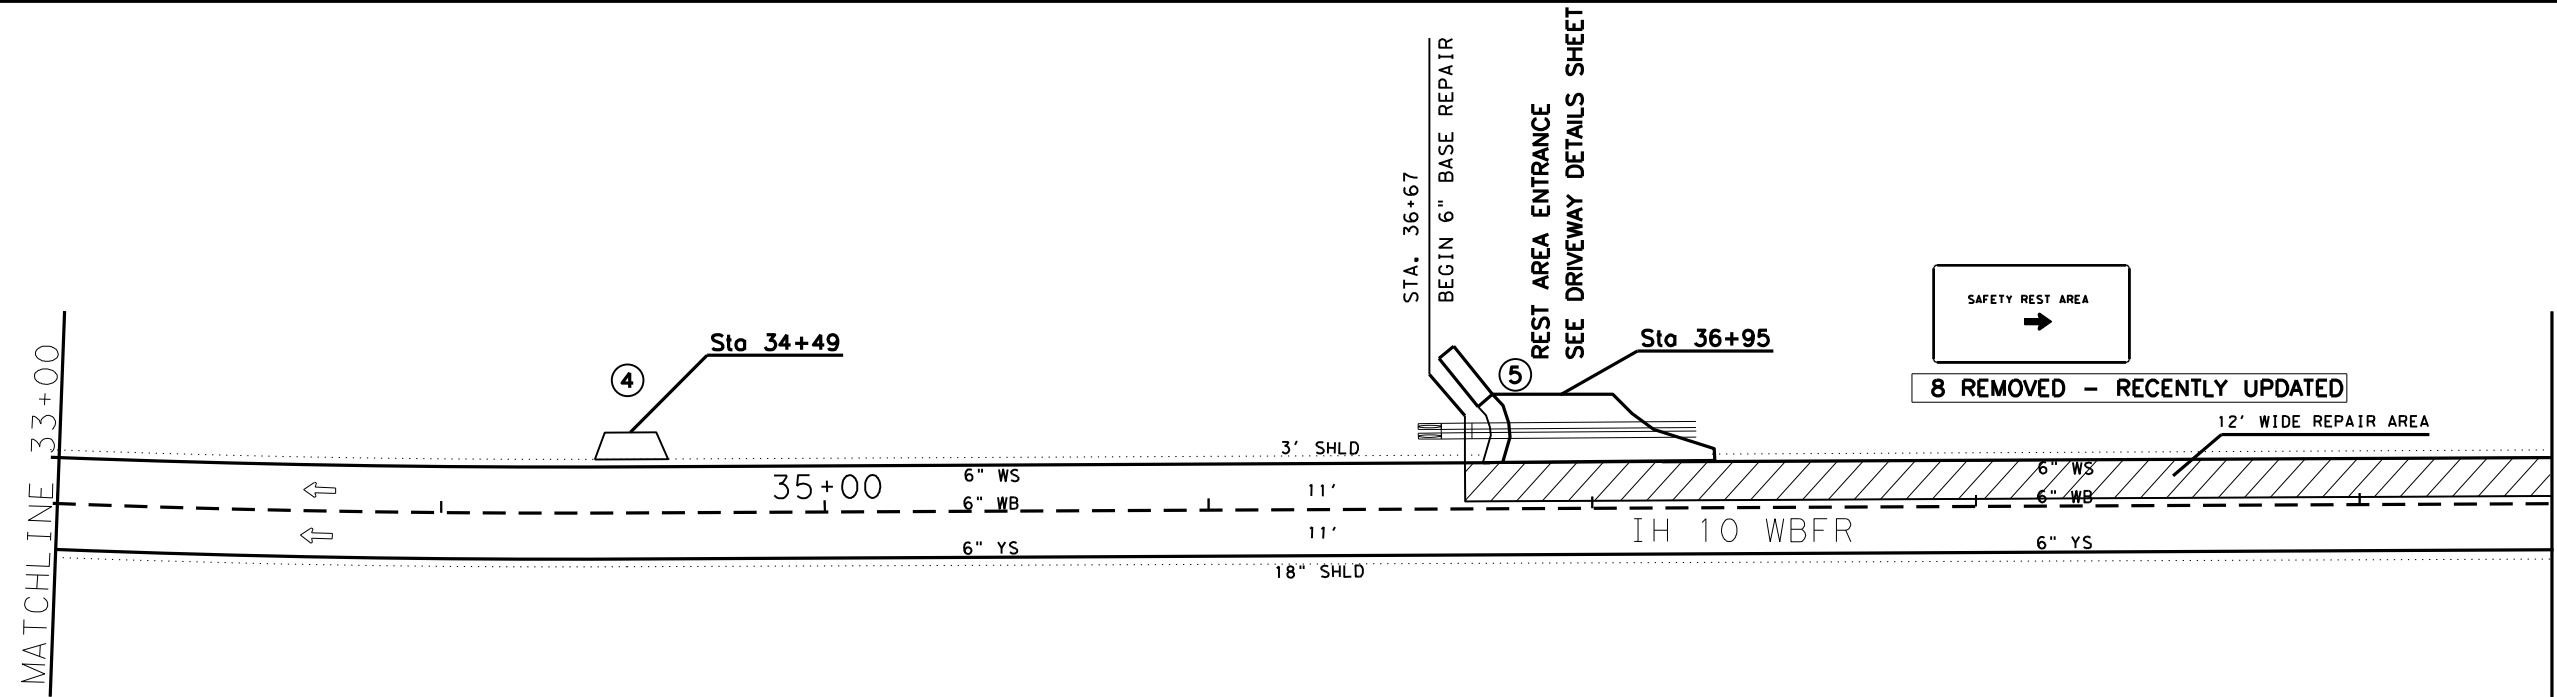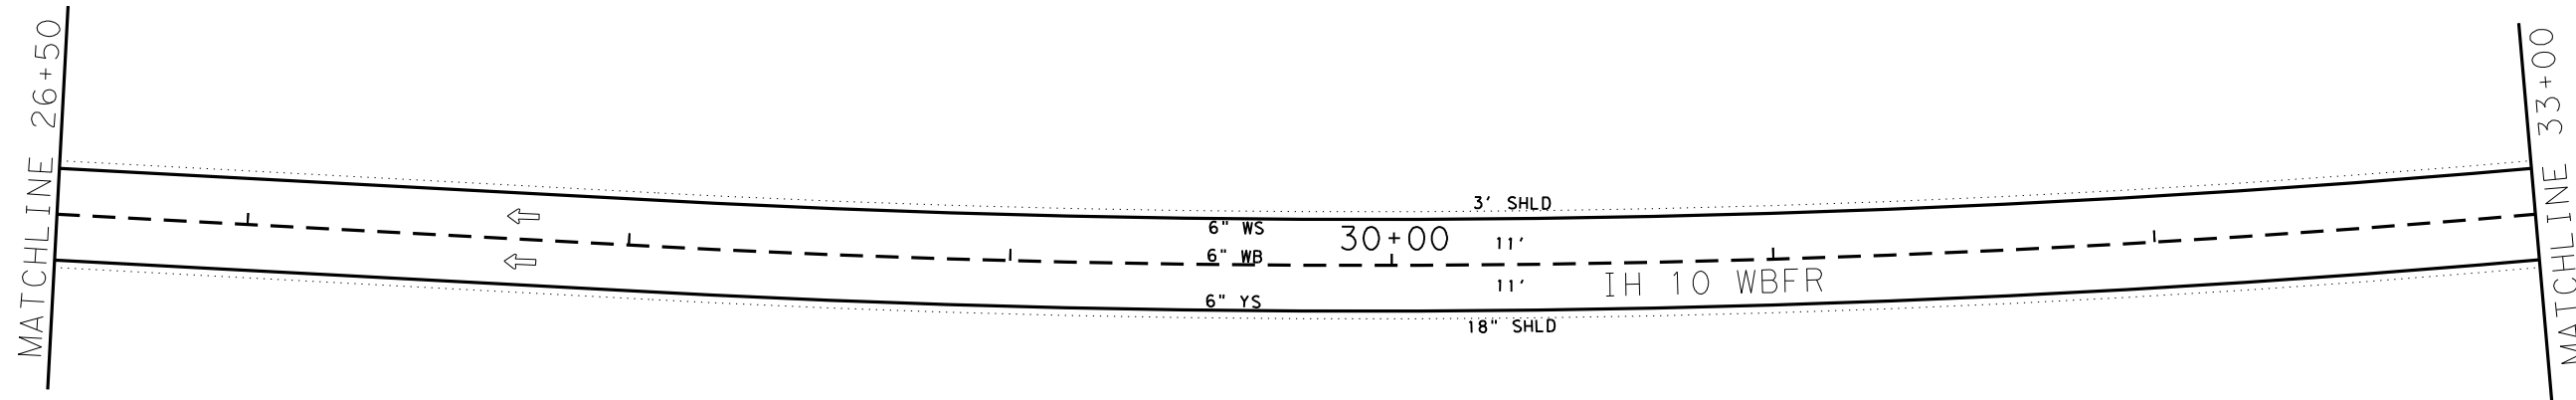

DocuSigned by:  
  
 8/22/2024  
 5CAE84E05D7F456...



**LAYOUT AND ROADWAY DATA**  
 SHEET 3 OF 5

LEGEND			
-----	EDGE OF PAVEMENT	2YS	DOUBLE YELLOW SOLID
-----	MBGF	[Hatched Box]	AREA OF PLANE TRANSITION
WS	WHITE SOLID	[White Box]	** SIGN ID
WB	WHITE BROKEN	[Hatched Box]	PLANING AREA
YS	YELLOW SOLID	[Circle]	# DRIVEWAY ID
YB	YELLOW BROKEN		

N. T. S.

CONT	SECT
6470	68
JOB	
001 IH 10 WB FR	
HIGHWAY	
DIST	COUNTY
BMT	CHAMBERS
SHEET NO.	
40	



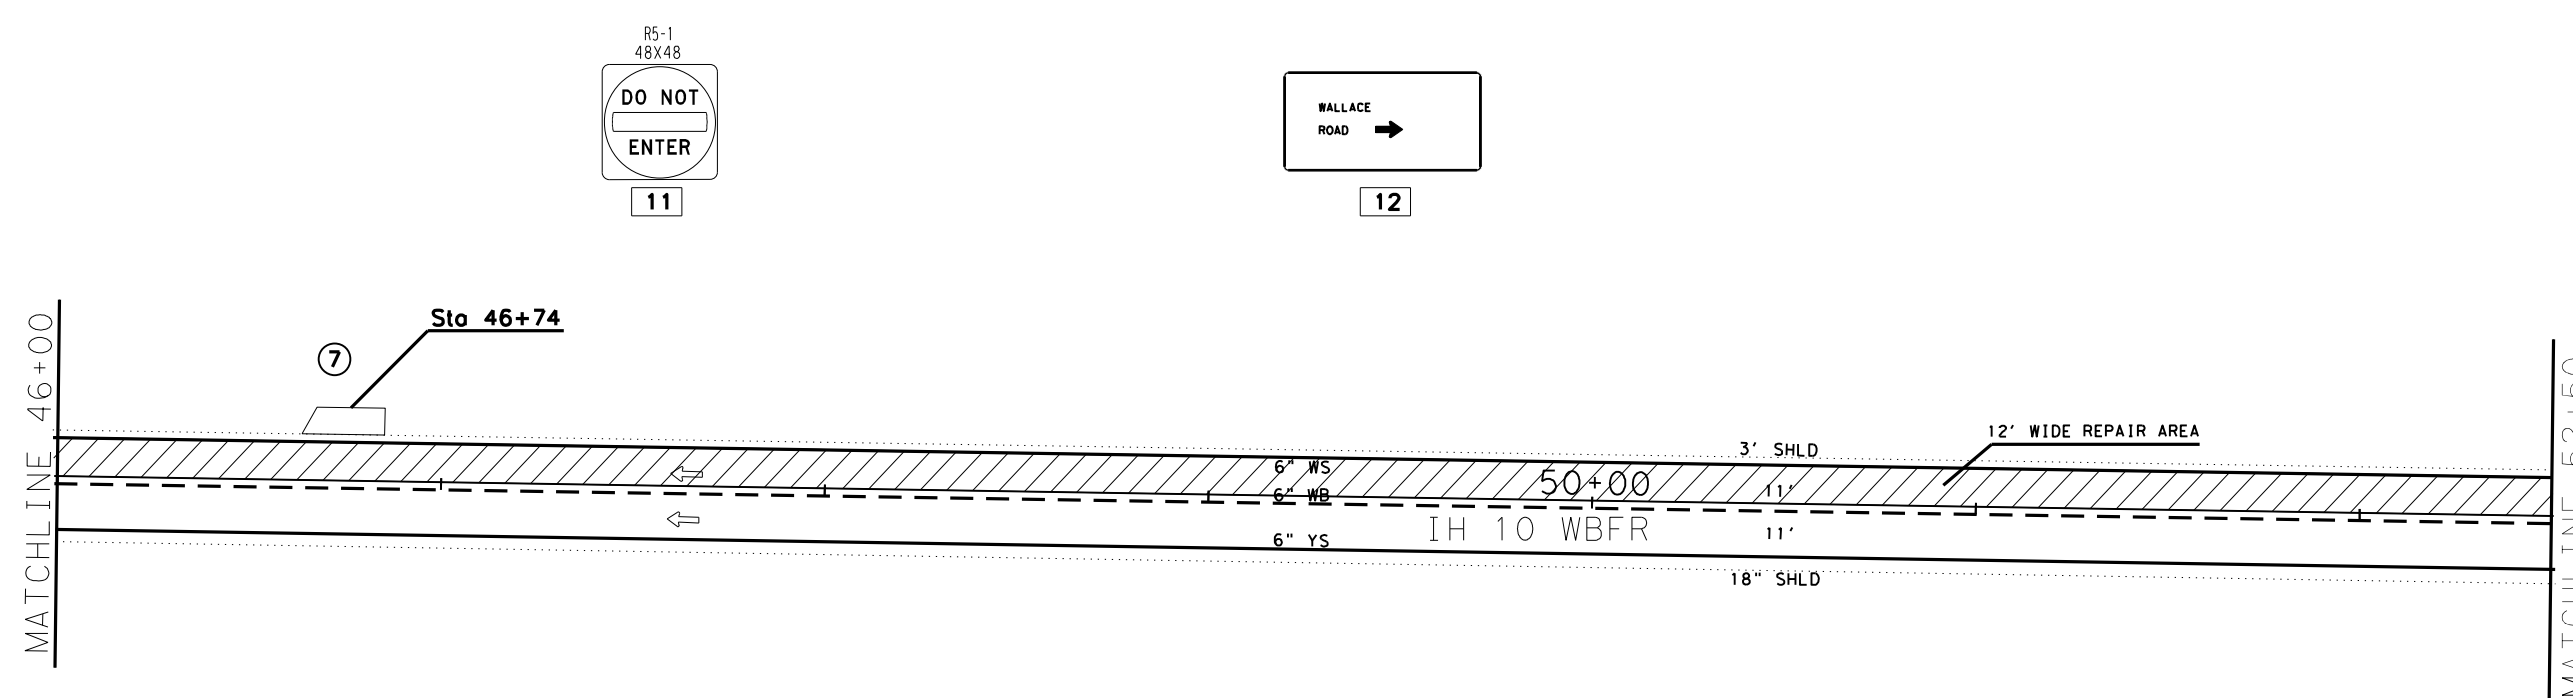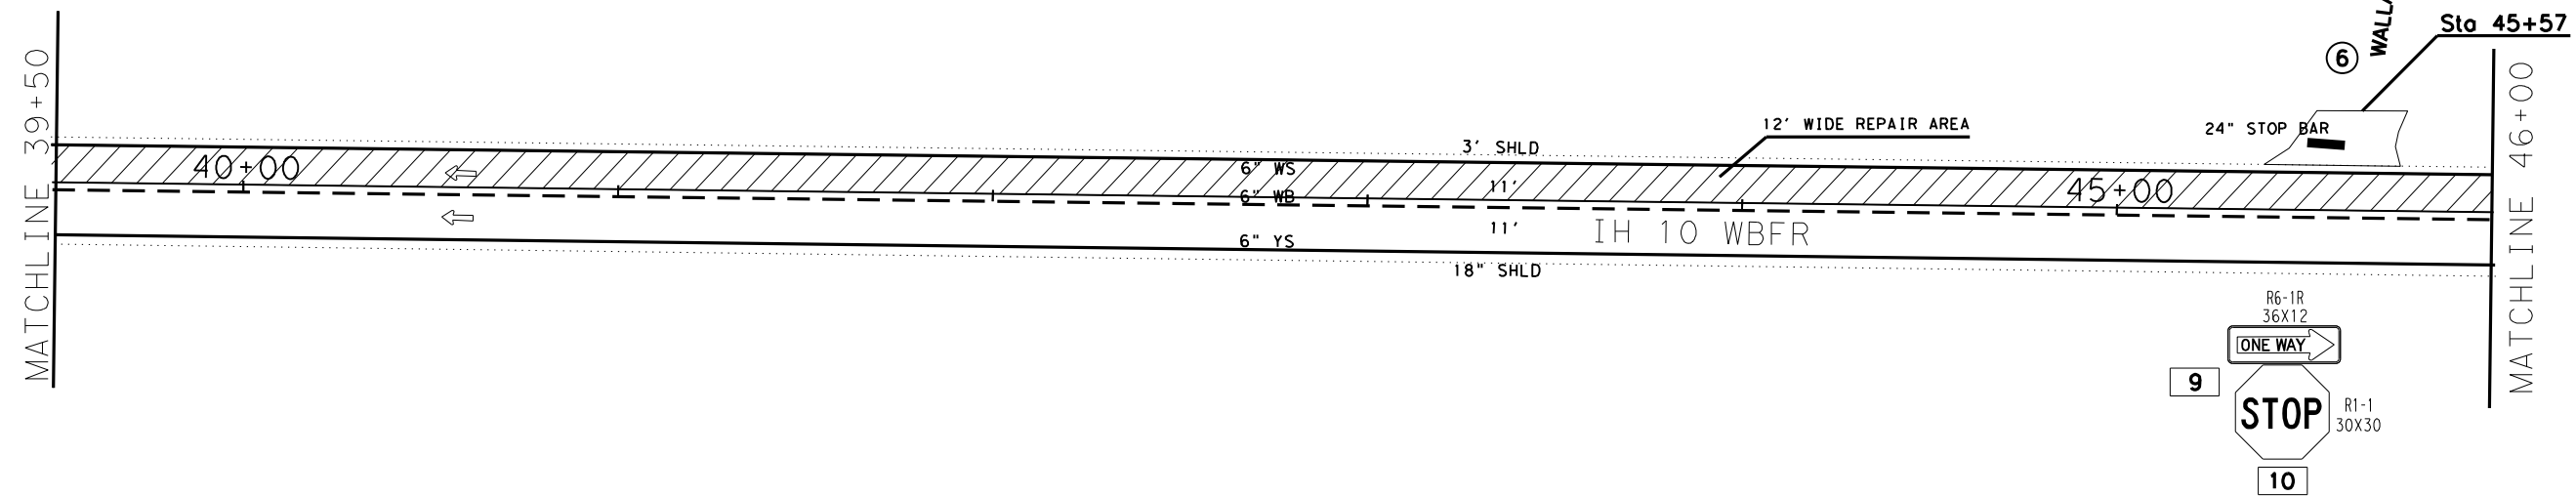

DocuSigned by: 8/22/2024  
5CAE84E05D7F456...



**LAYOUT AND ROADWAY DATA**  
SHEET 4 OF 5

LEGEND			
-----	EDGE OF PAVEMENT	2YS	DOUBLE YELLOW SOLID
-----	MBGF		AREA OF PLANE TRANSITION
WS	WHITE SOLID	##	SIGN ID
WB	WHITE BROKEN		PLANING AREA
YS	YELLOW SOLID	#	DRIVEWAY ID
YB	YELLOW BROKEN		

N. T. S.

CONT	SECT	JOB	HIGHWAY
6470	68	001	IH 10 WB FR
DIST	COUNTY	SHEET NO.	
BMT	CHAMBERS	41	

R4-3b  
48X48  
DO NOT  
CROSS  
DOUBLE  
WHITE LINE  
13

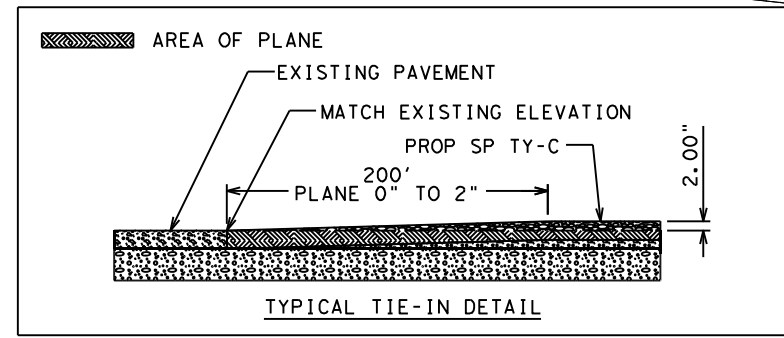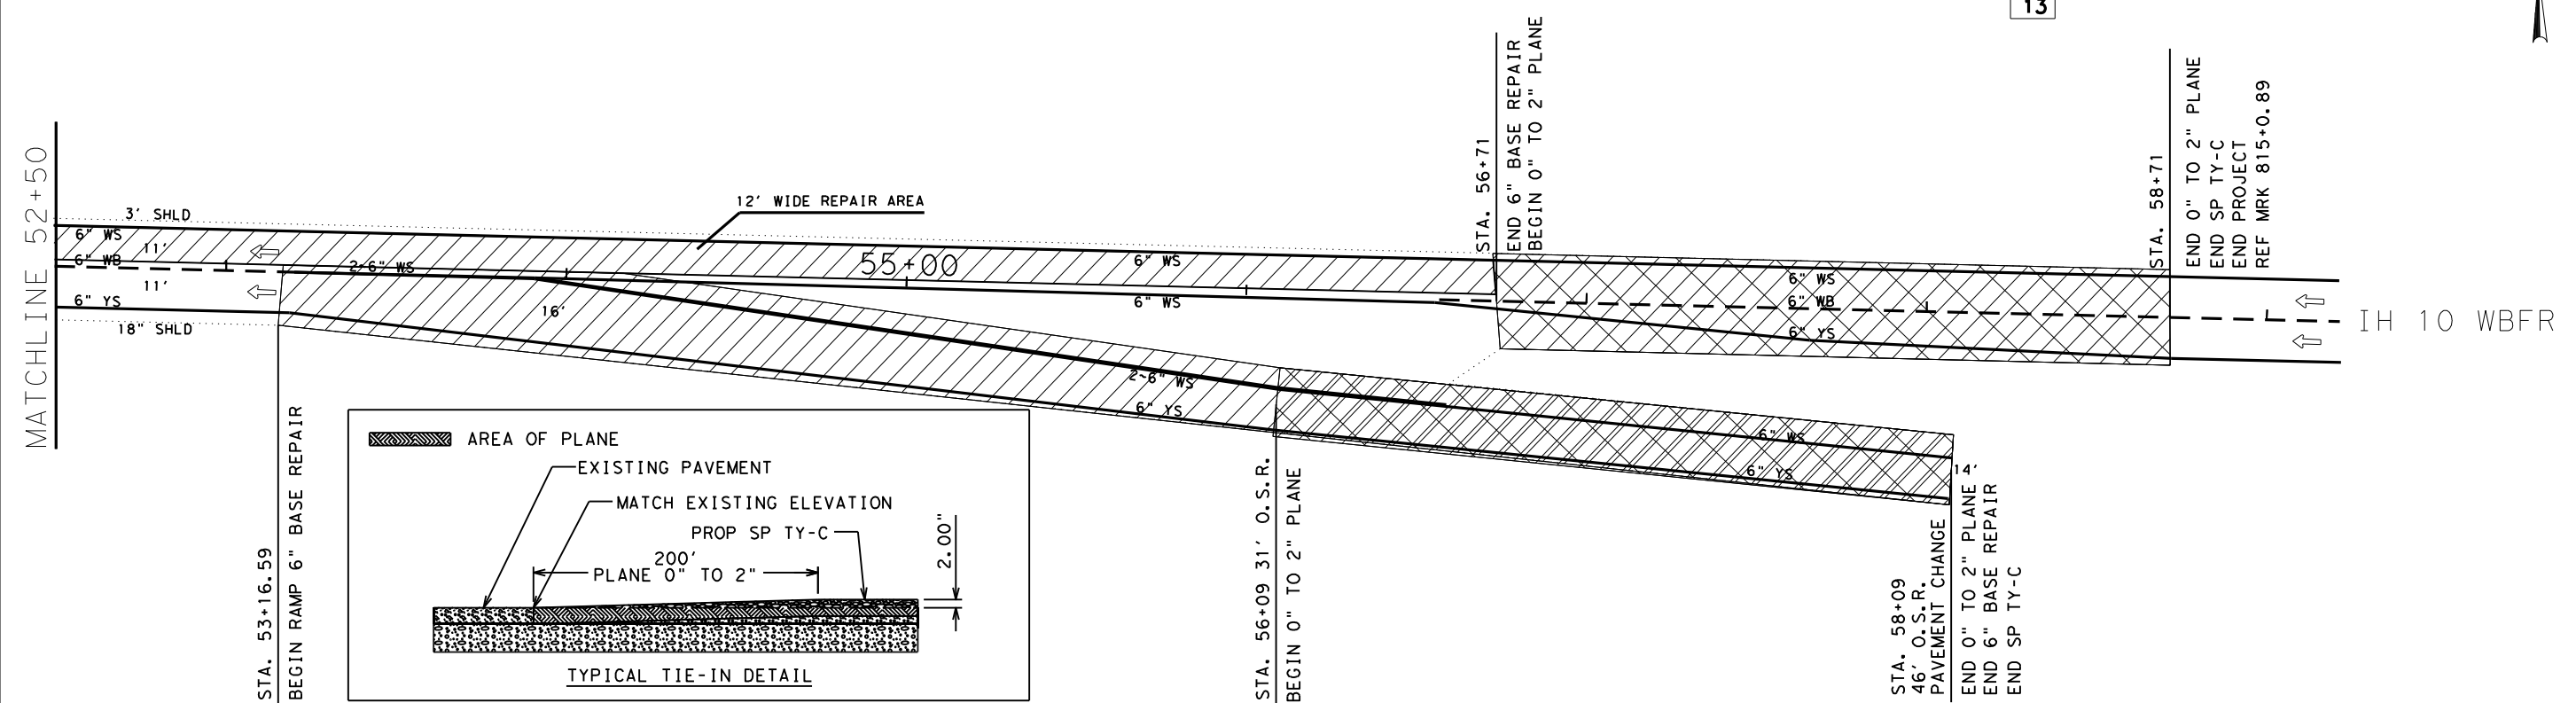

DS






DocuSigned by: *[Signature]* 8/22/2024  
5CAE84E05D7F456...

**LAYOUT AND ROADWAY DATA**  
SHEET 5 OF 5

LEGEND			
-----	EDGE OF PAVEMENT	2YS	DOUBLE YELLOW SOLID
-----	MBGF	[Hatched Box]	AREA OF PLANE TRANSITION
WS	WHITE SOLID	[White Box]	## SIGN ID
WB	WHITE BROKEN	[Cross-hatched Box]	PLANING AREA
YS	YELLOW SOLID	[Circle]	# DRIVEWAY ID
YB	YELLOW BROKEN		

CONT	SECT	JOB	HIGHWAY
6470	68	001	IH 10 WB FR
DIST	COUNTY	SHEET NO.	
BMT	CHAMBERS	42	

N. T. S.

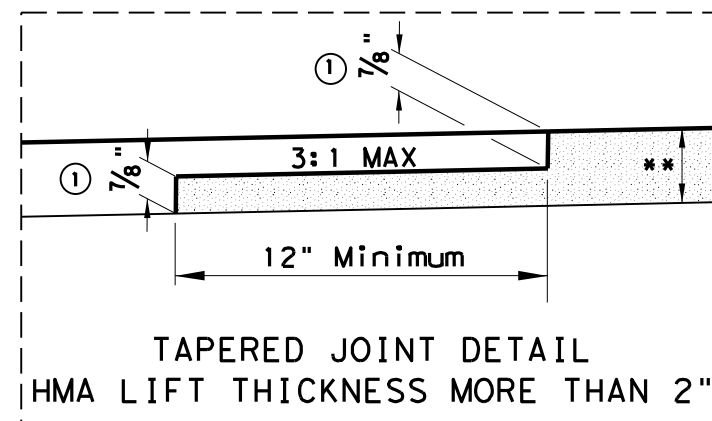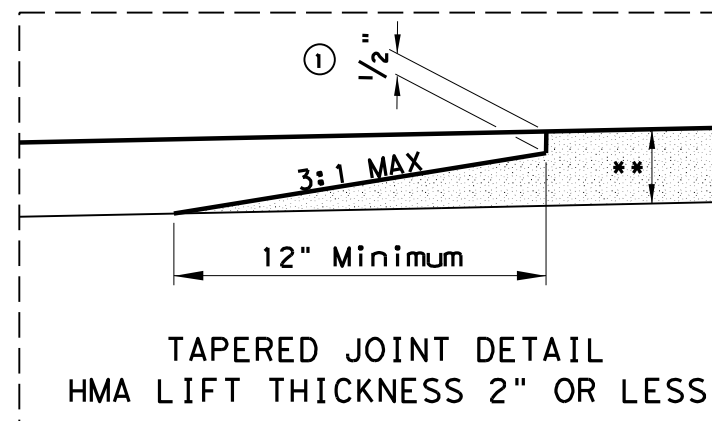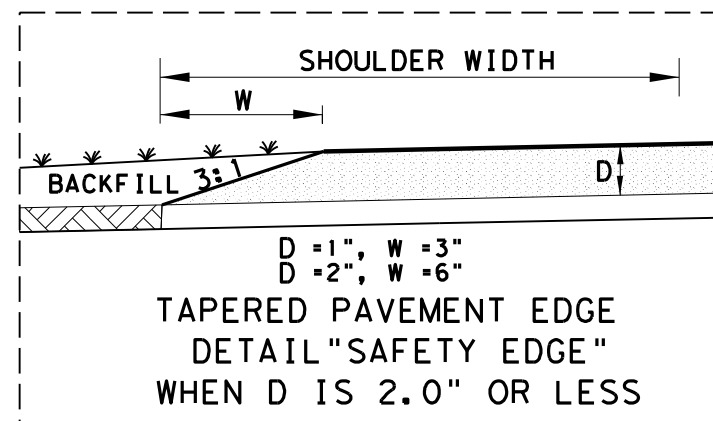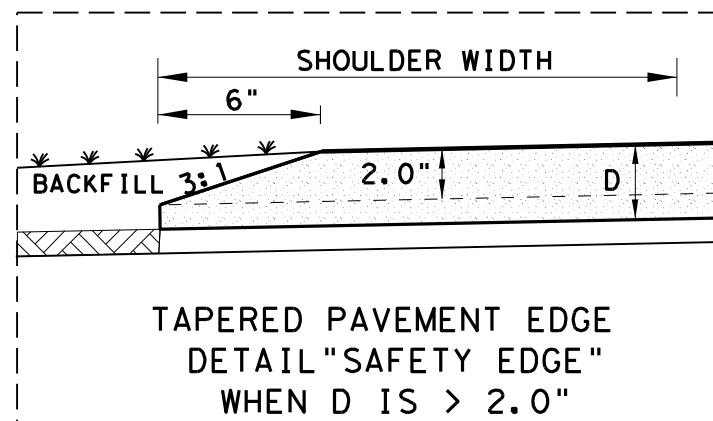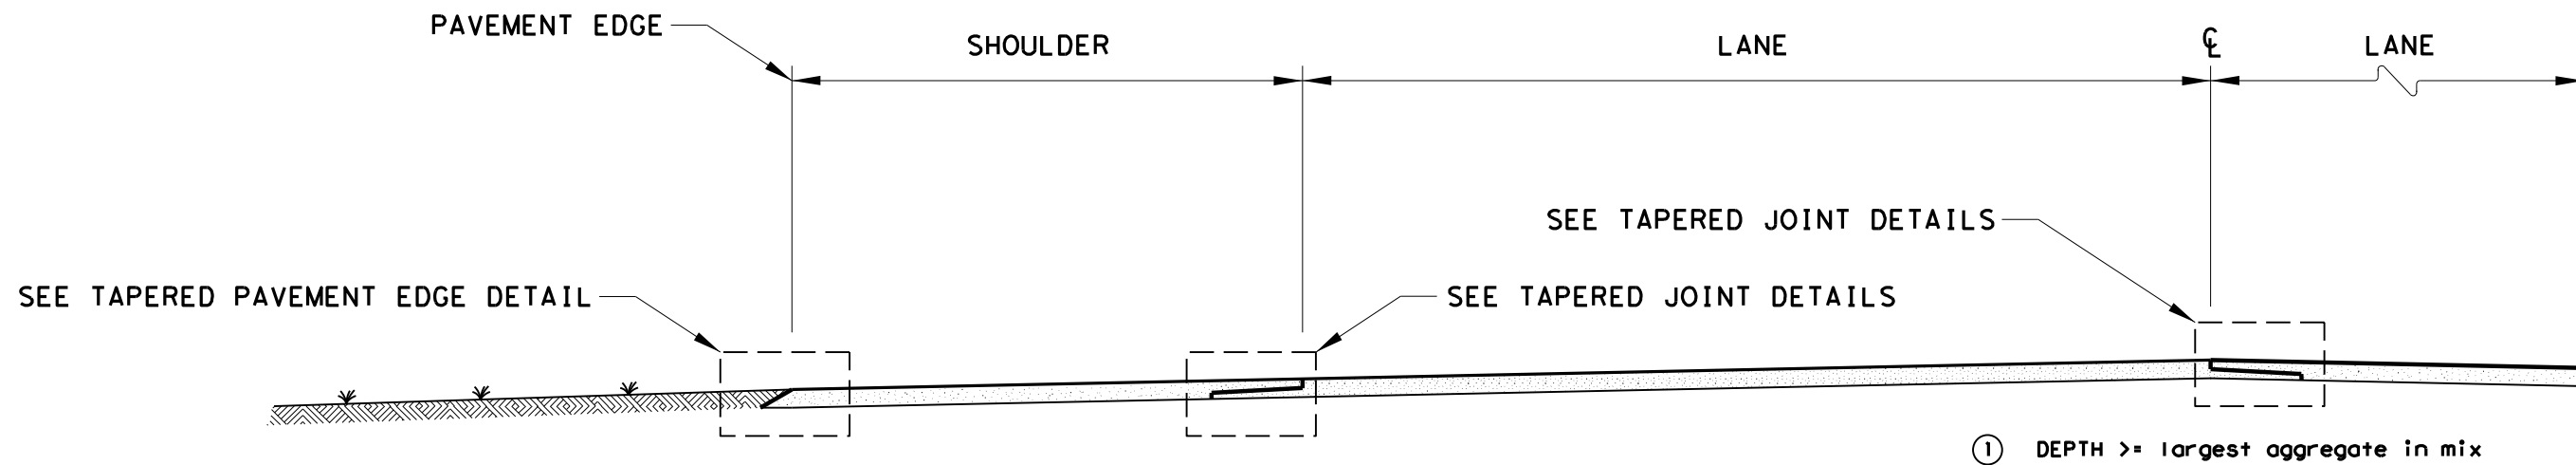

\*\* SEE LAYOUT SHEETS FOR DEPTH AND TYPE OF HMA.

DS

**NOTES:**

LONGITUDINAL JOINTS SHALL BE CONSTRUCTED BY TAPERING THE BITUMINOUS MAT. THE TAPERED PORTION SHALL EXTEND BEYOND THE NORMAL LANE WIDTH. THE TAPERED PORTION OF THE MAT SHALL BE CONSTRUCTED BY THE USE OF AN APPROVED SCREED ATTACHMENT WHICH WILL PRODUCE THE DESIRED SHAPE WITH THE MAIN SCREED. USE OF AN EXTERNAL STRIKE-OFF DEVICE TO MODIFY THE MAT SHAPE AFTER PASSING OF THE SCREED WILL NOT BE ALLOWED. TACK COAT SHALL BE APPLIED TO THE IN-PLACE TAPER BEFORE THE ADJACENT MAT IS PLACED. FINAL DENSITY REQUIREMENTS FOR THE ENTIRE PAVEMENT, INCLUDING THE TAPER AREA, WILL REMAIN UNCHANGED.

PAVEMENT EDGES SHALL BE CONSTRUCTED BY TAPERING THE BITUMINOUS MAT. THE TAPERED PORTION SHALL BE PLACED WITHIN THE NORMAL LANE WIDTH UNLESS OTHERWISE SHOWN ON THE PLANS. THE TAPERED PORTION OF THE MAT SHALL BE CONSTRUCTED BY THE USE OF AN APPROVED SCREED ATTACHMENT WHICH WILL PRODUCE THE DESIRED SHAPE WITH THE MAIN SCREED. USE OF AN EXTERNAL STRIKE-OFF DEVICE TO MODIFY THE MAT SHAPE AFTER PASSING OF THE SCREED WILL NOT BE ALLOWED. COMPACTION OF THE PAVEMENT EDGE TAPER WILL BE REQUIRED TO AS NEAR TO FINAL DENSITY AS POSSIBLE.



DocuSigned by:


8/22/2024

5CAE84E05D7F456...


**HOT MIX  
LONGITUDINAL  
AND  
PAVEMENT EDGE  
JOINT DETAILS**



FHWA TEXAS DIVISION		SHEET NO. 43	
STATE	DISTRICT	COUNTY	
TEXAS	BMT	CHAMBERS	
CONTROL	SECTION	JOB	HIGHWAY NO.
6470	68	001	1H 10 WB FR

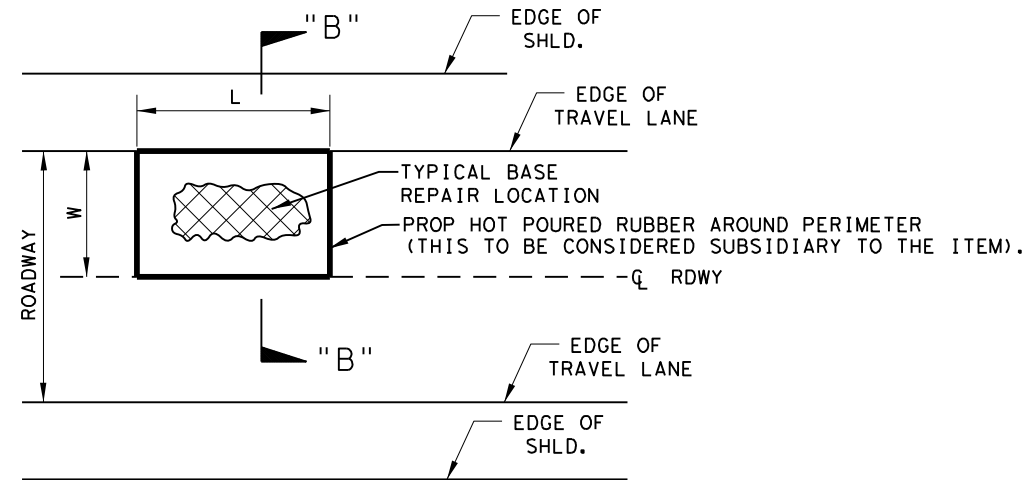

**TYPICAL BASE REPAIR**

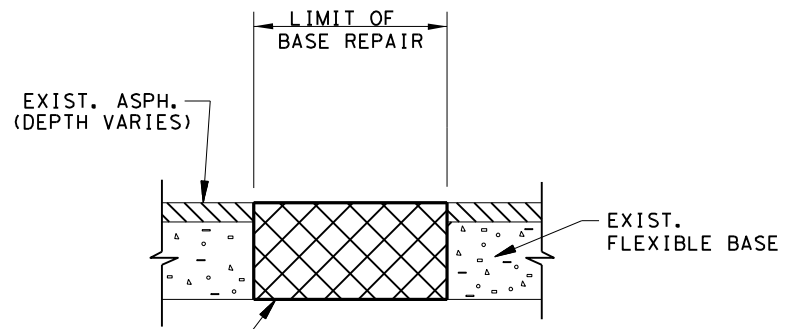

PROP. 6" HOT MIX ASPHALT (TY-B, PG 64-22)  
COMPACTED IN 2-3" LIFTS.

**SECTION "B-B"**

**GENERAL NOTES:**

1. HOT MIX ASPHALT WILL BE COMPACTED TO MAX 4" LIFTS.
2. DEPTH FOR SOME PATCHES MAY VARY AS DETERMINED.
3. THE CONTRACTOR WILL REPAIR AND OPEN THE SECTION TO TRAFFIC THE SAME DAY THE AREA IS EXCAVATED. IF THE CONTRACTOR HAS TO PLACE ANY TYPE OF TEMPORARY MATERIAL IN THE EXCAVATED AREA TO OPEN THE LANE TO TRAFFIC, IT WILL BE AT THEIR EXPENSE.

DS

DocuSigned by:  
*[Signature]*  
5CAE84E05D7F456...


8/22/2024

**TYPICAL  
BASE REPAIR DETAILS  
N. T. S.**


© 2024					
FED. RD. DIV. NO.	STATE	MAINTENANCE PROJECT NO.			SHEET NO.
6	TEXAS				44
STATE DIST. NO.	COUNTY	CONT.	SECT.	JOB	HWY. NO.
BMT	CHAMBERS	6470	68	001	1H 10 WB FR

### DEFINITION OF TREATMENT ZONES FOR VARIOUS EDGE CONDITIONS


Edge Height (D) in Inches versus Lateral Clearance (Y) in Feet

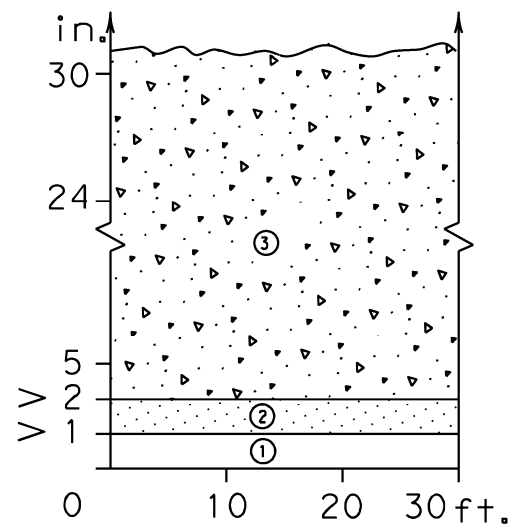

Edge Condition I  
S = (3:1) (or flatter)

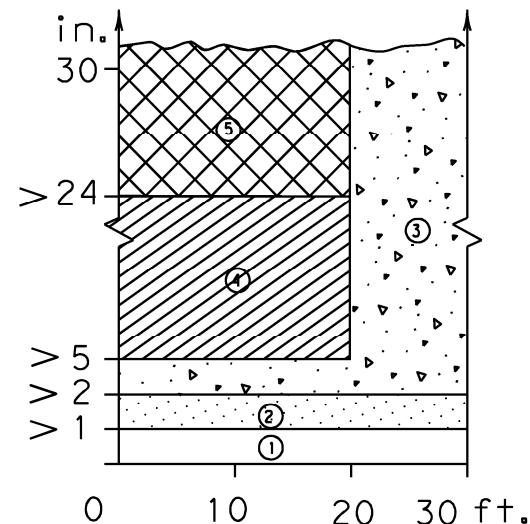

Edge Condition II  
S = ((2.99):1) to (1:1)

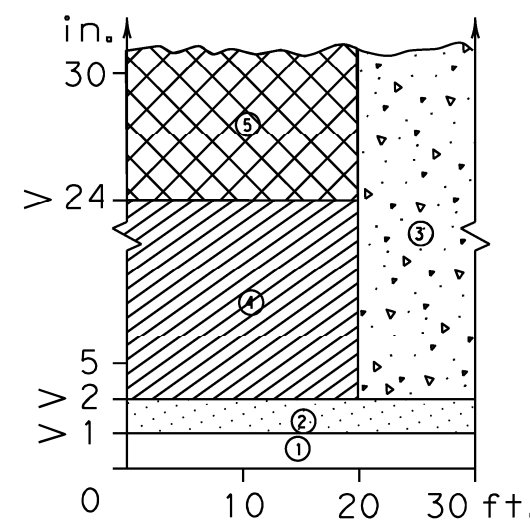

Edge Condition III  
S is steeper than (1:1)






FIGURE-1: CONDITIONS INDICATING USE OF POSITIVE BARRIER FOR ZONE 5 ( [Cross-hatched symbol] )

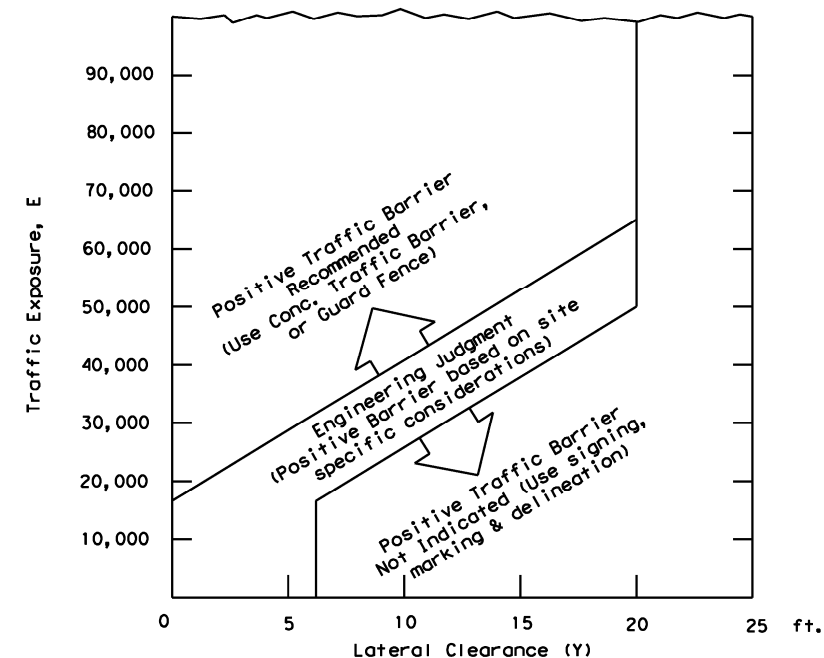

- E = ADT x T  
Where ADT is that portion of the average daily traffic volume traveling within 20 feet (generally two adjacent lanes) of the edge dropoff condition; and, T is the duration time in years of the dropoff condition.
- Figure-1 provides a practical approach to the use of positive barriers for the protection of vehicles from pavement drop-offs. Other factors, such as the presence of heavy machinery, construction workers, or the mix and volume of traffic may make the use of positive barriers appropriate, even when the edge condition alone may not justify the use of a barrier.
- An approved end treatment should be provided for any positive barrier end located within a lateral offset of 20 feet from the edge of the travel lane.

Warning Device or Traffic Barrier  
6" White Edge Line or Edge of Lanes being used for maintenance of traffic.

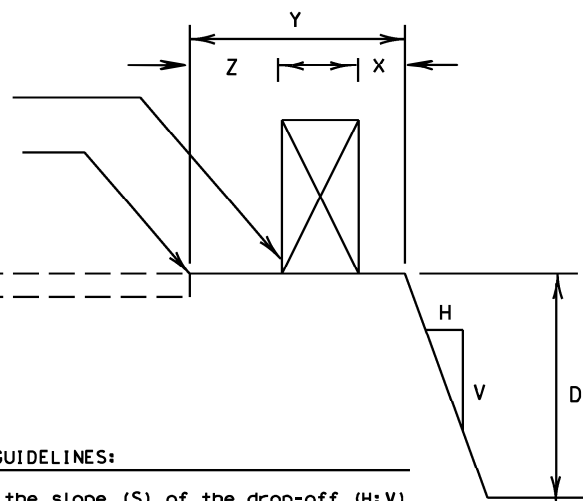

FACTORS CONSIDERED IN THE GUIDELINES:


- The "Edge Condition" is the slope (S) of the drop-off (H:V). The "Edge Height" is the depth of the drop-off "D".
- Distance "X" is to be the maximum practical under job conditions. Two feet minimum for high speed conditions. Distance "Y" is the lateral clearance from edge of travel lane to edge of dropoff. Distance "Z" does not have a minimum.
- In addition to the factors considered in the guidelines, each construction zone drop-off situation should be analyzed individually, taking into account other variables, such as: traffic mix, posted speed in the construction zone, horizontal curvature, and the practicality of the treatment options.
- The conditions for indicating the use of positive or protective barriers are given by Zone-5 and Figure-1. Traffic barriers are primarily applicable for high speed conditions. Urban areas with speeds of 30 mph or less may have a lesser need for signing, delineation, and barriers. Right-angled edges, however, with "D" greater than 2 inches and located within a lateral offset of 6 feet, may indicate a higher level of treatment.
- If the distance "Y" must be less than 3 feet, the use of a positive barrier may not be feasible. In such a case, consider either: 1) narrowing the lanes to a desired 11 to 12 feet or 10 foot minimum (see CW20-8 sign), or 2) provide an edge slope such as Edge Condition I.

Zone	Treatment Types Guidelines:
①	No treatment.
②	CW 8-11 "Uneven Lanes" signs.
③	CW 8-9a "Shoulder Drop-Off" or CW 8-11 signs plus vertical panels.
④	CW 8-9a or CW 8-11, signs plus drums. Where restricted space precludes the use of drums, use vertical panels. An edge fill may be provided to change the edge slope to that of the preferable Edge Condition I.
⑤	Check indications (Figure-1) for positive barrier. Where positive barrier is not indicated, the treatment shown above for Zone- 4 may be used after consideration of other applicable factors.

Edge Condition Notes:

- Edge Condition I: Most vehicles are able to traverse an edge condition with a slope rate of (3 to 1) or flatter. The slope must be constructed with a compacted material capable of supporting vehicles.
- Edge Condition II: Most vehicles are able to traverse an edge condition with a slope between (2.99 to 1) and (1 to 1) so long as "D" does not exceed 5 inches. Under-carriage drag on most automobiles will occur when "D" exceeds 6 inches. As "D" exceeds 24 inches, the possibility for rollover is greater in most vehicles.
- Edge Condition III: When slopes are greater than (1 to 1) and where "D" is greater than 2 inches, a more difficult control factor may exist for some vehicles, if not properly treated. For example, where "D" is greater than 2 inches and up to 24 inches different types of vehicles may experience different steering control at different edge heights. Automobiles might experience more steering control differential when "D" is greater than 2 inches and up to 5 inches. Trucks, particularly those with high loads, have more steering control differential when "D" is greater than 5 inches and up to 24 inches. When "D" exceeds 24 inches, the possibility of rollover is greater for most vehicles.
- Milling or overlay operations that result in Edge Condition III should not be in place without appropriate warning treatments, and these conditions should not be left in place for extended periods of time.

These guidelines apply to temporary traffic control areas or work zones where continuous pavement edges or drop-offs exists parallel and adjacent to a lane used by traffic. The edge conditions may be present between shoulders and travel lanes, between adjacent or opposing travel lanes, or at intermediate points across the width of the paved surface. Due to the variability in construction operations, tolerances in the variables may be allowed by the engineer. These guidelines do not apply to short term operations. These guidelines do not constitute a rigid standard or policy; rather, they are guidance to be used in conjunction with engineering judgement. These guidelines may be updated on the Design Division's on-line manuals.



Date 8/22/2024  
DocuSigned by:




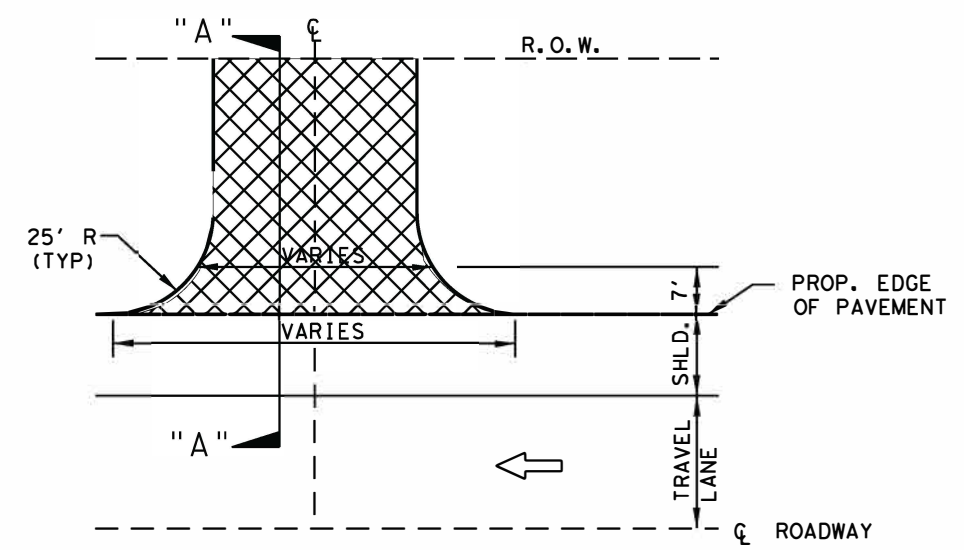
## TREATMENT FOR VARIOUS EDGE CONDITIONS (MOD)

© TxDOT August 2000		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS					
CONT	SECT	JOB		HIGHWAY	
03-01	6470 68	001		IH 10 WB FR	
08-01 correct typos		DIST	COUNTY	SHEET NO.	
		BMT	CHAMBERS	45	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:


 PROPOSED SP DRIVEWAY TAPER



**TYPICAL PLAN @ ASPHALT COUNTY ROADS AND CITY STREETS AND DRIVEWAYS**


**NOTES:**

MATERIAL SPECIFICATIONS, TYPES AND RATES SHALL CONFORM TO ITEM 344.

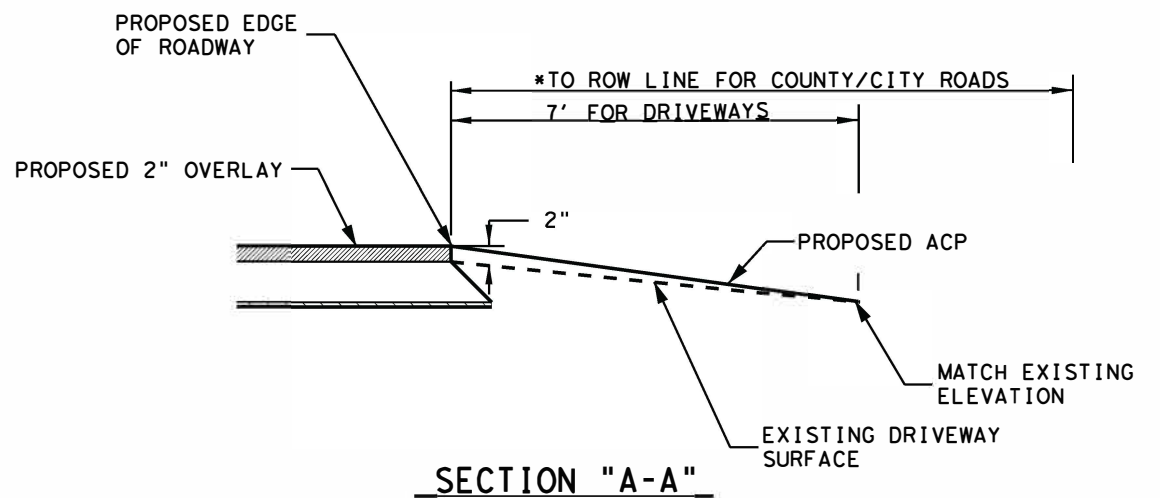


DRIVEWAYS	STATION/LEFT/RIGHT	MATERIAL	AREA
			SY
1	8+31 L	ASPHALT	12
2	10+21 L	ASPHALT	26
3	22+89 L	CONCRETE	37
4	34+49 L	ASPHALT	12
*5	36+95 L	CONCRETE	0
6	45+57 L	ASPHALT	84
7	46+74 L	ASPHALT	16
<b>ASPHALT TOTAL</b>			<b>150</b>
<b>CONCRETE TOTAL</b>			<b>37</b>


NOTE: CONTRACTOR WILL USE SP MIXES SP-C PG 70-22 \* SEE DETAIL - USE ITEM 360

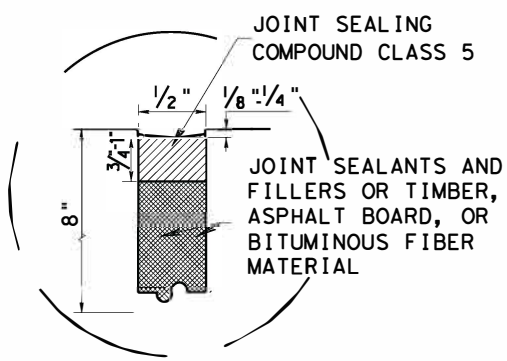


**JOINT SEALANT DETAIL**

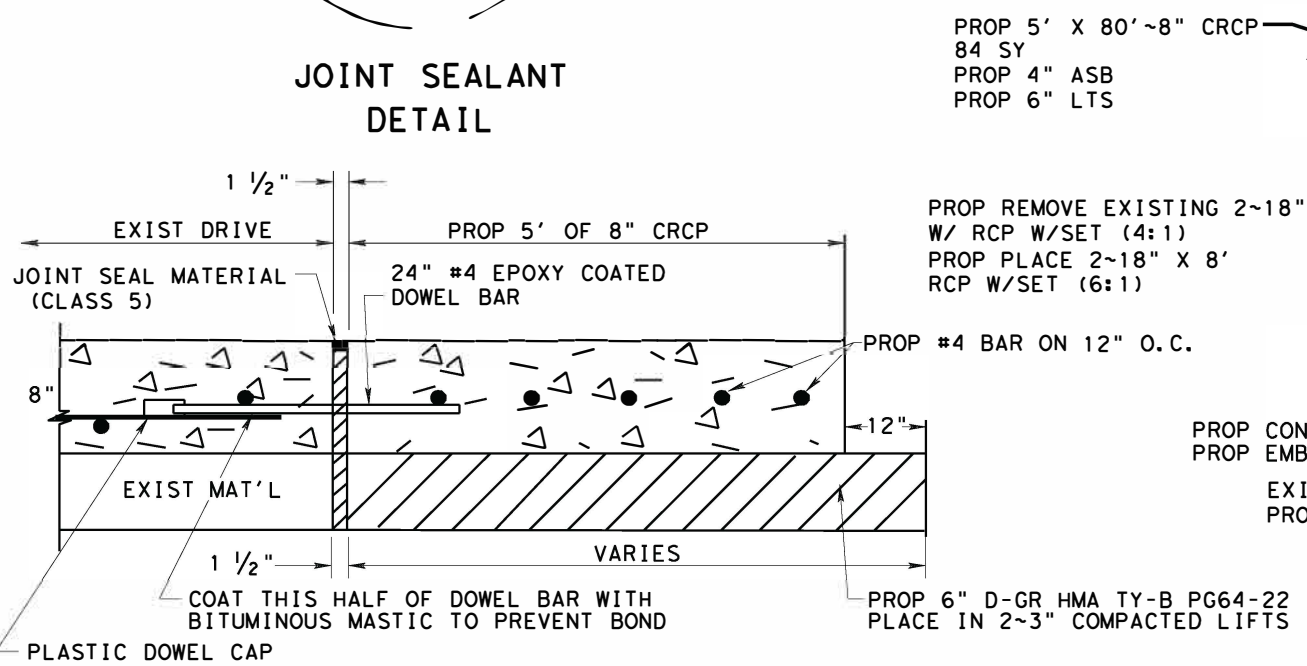


**TIE-IN DETAIL DRIVEWAY 5 - DOWEL ASSEMBLY AND EXPANSION JOINT**

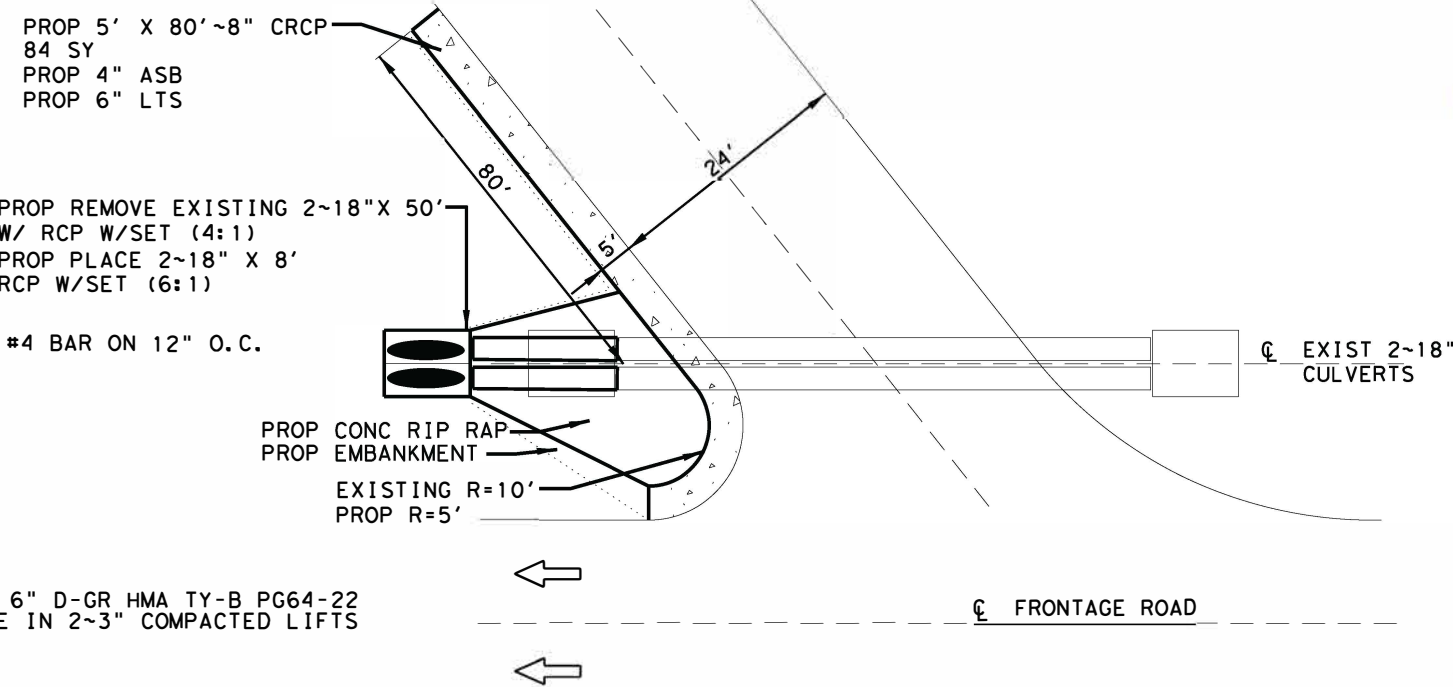

**DRIVEWAY 5 DETAIL**

DocuSigned by:  
  
 8/22/2024  
 5CAE84E05D7F456...

**TYPICAL DRIVEWAY DETAILS**  
NTS



FED. RD. DIV. NO.	SHEET NO.	
6	46	
STATE	DIST.	COUNTY
TEXAS	BMT	CHAMBERS
CONT.	SECT.	JOB
6470	68	001
HIGHWAY NO.		
IH 10 WB FR		

DATE: 8/21/2024  
FILE: T:\LIBERDES\PMSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCGN\STANDARDS\DRIVEWAY DETAILS.dgn


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:43:22 PM  
 FILE: T:\LIBERDES\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCGN\STANDARDS\crp123.dgn

SLAB THICKNESS AND BAR SIZE		LONGITUDINAL STEEL BARS	FIRST SPACING AT EDGE OR JOINT	LONG. STEEL VERTICAL POSITION FROM BOTTOM OF PAVEMENT
T (IN.)	BAR SIZE	SPACING C (IN.)	SPACING a (IN.)	T1 (IN.)
7.0	#5	6.5	3 TO 4	3.5
7.5	#5	6.0	3 TO 4	3.75
8.0	#6	9.0	3 TO 4	4.0
8.5	#6	8.5	3 TO 4	4.25
9.0	#6	8.0	3 TO 4	4.5
9.5	#6	7.5	3 TO 4	4.75
10.0	#6	7.0	3 TO 4	5.0
10.5	#6	6.75	3 TO 4	5.5
11.0	#6	6.5	3 TO 4	6.0
11.5	#6	6.25	3 TO 4	6.5
12.0	#6	6.0	3 TO 4	7.0
12.5	#6	5.75	3 TO 4	7.5
13.0	#6	5.5	3 TO 4	8.0


SLAB THICKNESS (IN.)	TRANSVERSE STEEL		TIE BARS AT LONGITUDINAL CONTRACTION JOINT (SECTION Z-Z)		TIE BARS AT LONGITUDINAL CONTRACTION JOINT (SECTION Y-Y)	
	BAR SIZE	SPACING (IN.)	BAR SIZE	SPACING (IN.)	BAR SIZE	SPACING (IN.)
7.0 - 7.5	#5	48	#5	48	#5	24
8.0 - 13.0	#5	48	#6	48	#6	24

\*CONTRACTOR MAY USE #6 REINFORCING STEEL INSTEAD OF #5 REINFORCING STEEL OR COMBINATION OF EACH SIZE

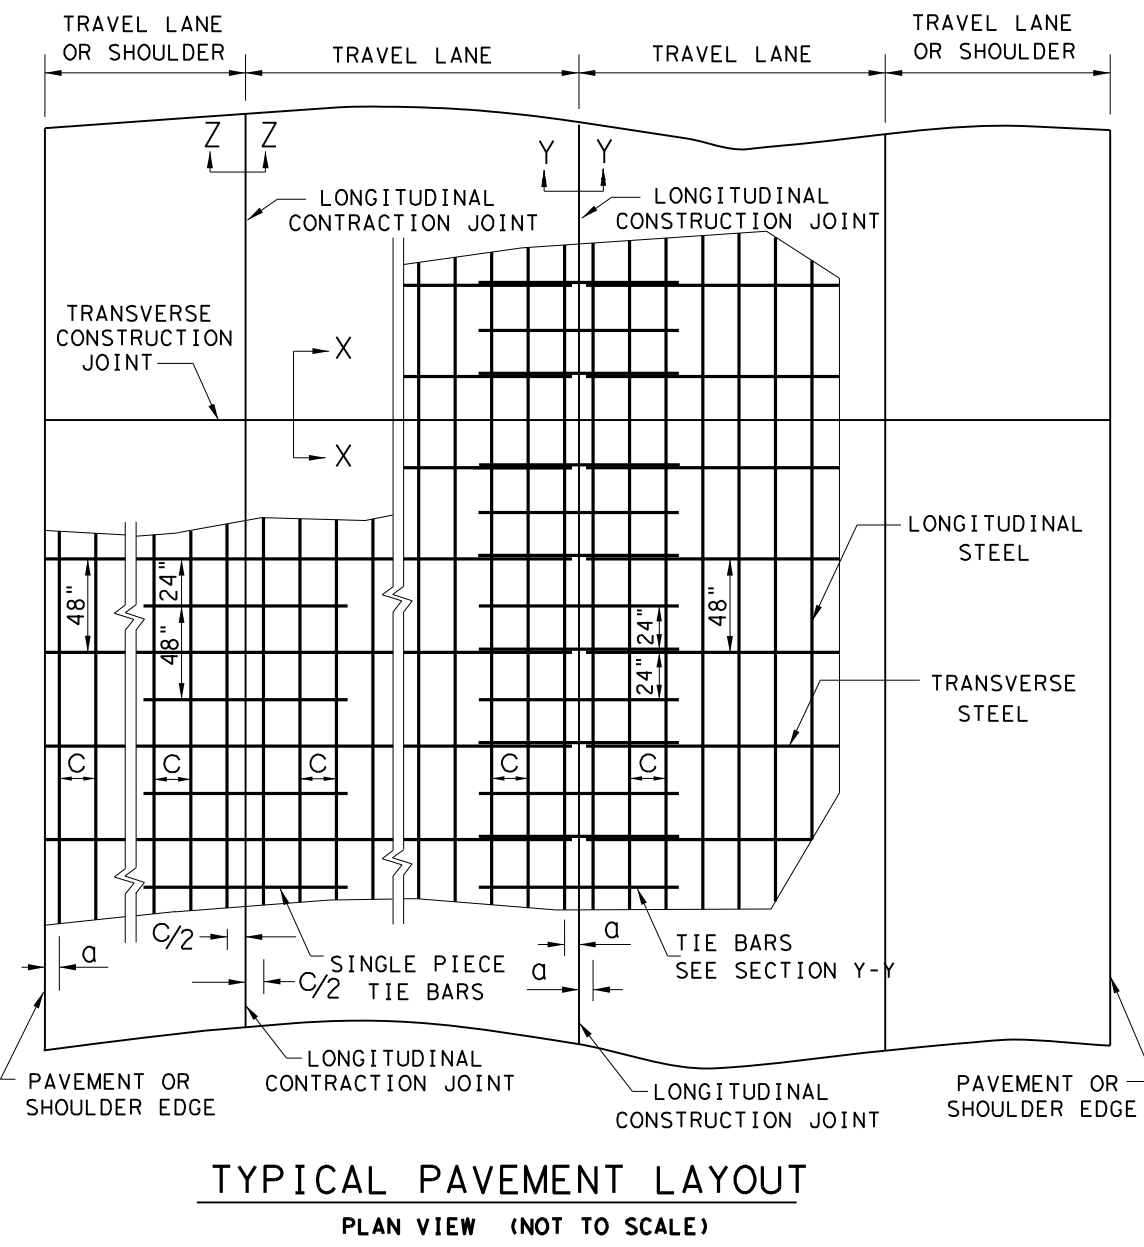


**GENERAL NOTES**


1. DETAILS FOR PAVEMENT WIDTH, PAVEMENT THICKNESS AND THE CROWN CROSS-SLOPE SHALL BE SHOWN ELSEWHERE IN THE PLANS. FOR PAVEMENTS WIDER THAN 100 FT. WITHOUT A FREE LONGITUDINAL JOINT, ADDITIONAL DETAIL MAY BE SHOWN ELSEWHERE IN THE PLANS.
2. USE COARSE AGGREGATES WITH A RATED COEFFICIENT OF THERMAL EXPANSION (COTE) OF NOT MORE THAN  $5.5 \times 10^{-6}$  IN/IN/°F AS LISTED IN THE CONCRETE RATED SOURCE QUALITY CATALOG (CRSQC).
3. ALL THE REINFORCING STEEL AND TIE BARS SHALL BE DEFORMED STEEL BARS CONFORMING TO ASTM A 615 (GRADE 60) OR ASTM A 996 (GRADE 60) OR ABOVE. STEEL BAR SIZES AND SPACINGS SHALL CONFORM TO TABLE NO.1 AND TABLE NO.2.
4. STEEL BAR PLACEMENT TOLERANCE SHALL BE +/- 1 IN. HORIZONTALLY AND +/- 0.5 IN. VERTICALLY. CALCULATED AVERAGE BAR SPACING (CONCRETE PLACEMENT WIDTH / NUMBER OF LONGITUDINAL BARS) SHALL CONFORM TO TABLE NO.1.
5. ADJUST REINFORCING STEEL VERTICALLY USING SHIMS OR OTHER METHODS, AS APPROVED, TO MEET VERTICAL TOLERANCES PRIOR TO CONCRETE PLACEMENT.
6. PAVEMENT WIDTHS OF MORE THAN 15 FT. SHALL HAVE A LONGITUDINAL JOINT (SECTION Z-Z OR SECTION Y-Y). THESE JOINTS SHALL BE LOCATED WITHIN 6 IN. OF THE LANE LINE UNLESS THE JOINT LOCATION IS SHOWN ELSEWHERE ON THE PLANS.
7. THE MINIMUM PROJECTION OF TIE BARS INTO THE ADJACENT PLACEMENT IS 22.5 IN. FOR #6 BARS AND 18.5 IN. FOR #5 BARS.
8. SEE STANDARD SHEET "CONCRETE CURB AND CURB AND GUTTER," FOR DETAILS WHEN TYING CONCRETE CURB OR CURB GUTTER AT A LONGITUDINAL JOINT.
9. REPLACE MISSING OR DAMAGED TIE BARS WITHOUT ADDITIONAL COMPENSATION BY DRILLING MIN.10 IN. DEEP AND GROUTING TIE BARS WITH TYPE III, CLASS C EPOXY. MEET THE PULL-OUT TEST REQUIREMENTS IN ITEM 361.
10. OMIT TIE BARS LOCATED WITHIN 18-IN. OF THE TRANSVERSE CONSTRUCTION JOINTS (SECTION X-X). USE HAND-OPERATED IMMERSION VIBRATORS TO CONSOLIDATE THE CONCRETE ADJACENT TO ALL FORMED JOINTS.
11. THE DETAIL FOR THE JOINT SEALANT AND RESERVOIR IS SHOWN ON STANDARD SHEET "CONCRETE PAVING DETAILS, JOINT SEALS."

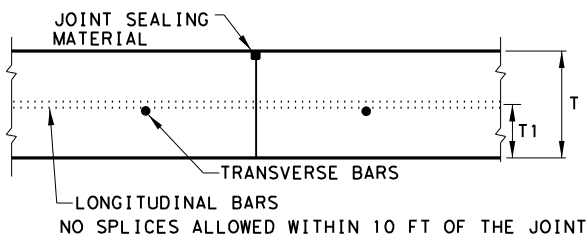

TRANSVERSE CONSTRUCTION JOINT  
SECTION X - X

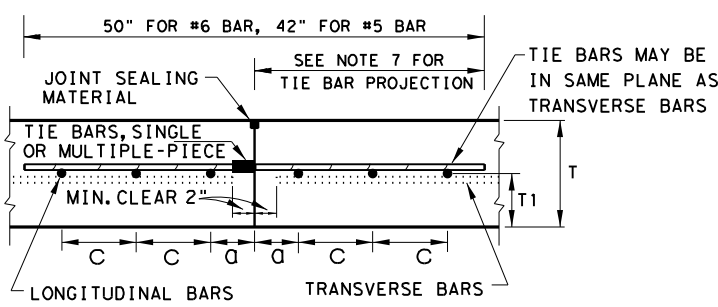

LONGITUDINAL CONSTRUCTION JOINT  
SECTION Y - Y

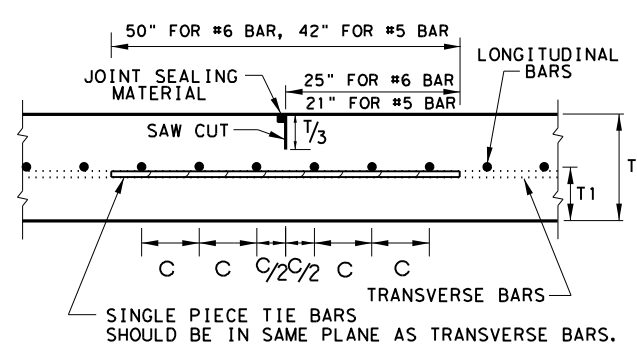


LONGITUDINAL CONTRACTION JOINT  
SECTION Z - Z

		Design Division Standard	
<b>CONTINUOUSLY REINFORCED CONCRETE PAVEMENT</b> <b>ONE LAYER STEEL BAR PLACEMENT</b> <b>T - 7 TO 13 INCHES</b> <b>CRCP (1) - 23</b>			
FILE: crcp123.dgn	DN: TxDOT	CK: KM	DW: CES
© TxDOT: APRIL 2023	CONT	SECT	JOB
APRIL 2023	6470	68	001
REVISOR: LONG. STEEL VERTICAL LOCATION	DIST	COUNTY	SHEET NO.
REVISOR: TIE BAR AT TRANSVERSE	BMT	CHAMBERS	47


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:43:23 PM  
 FILE: T:\LIBERES\PMSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCGN\STANDARDS\crcp123.dgn

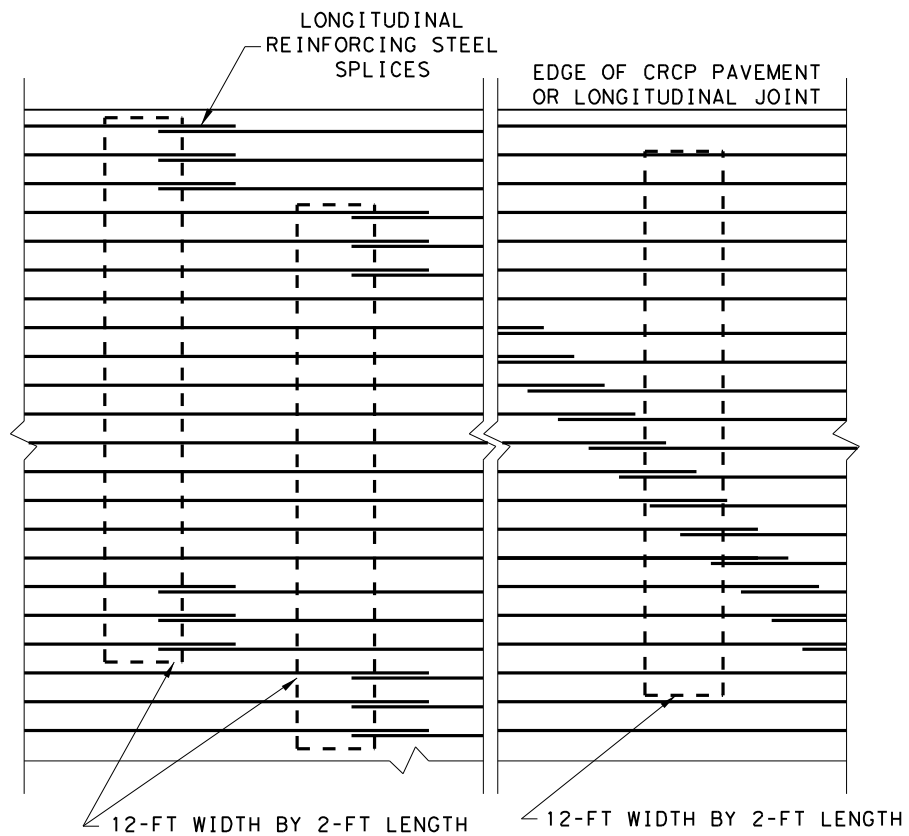


STAGGER THE LAP LOCATIONS SO THAT NO MORE THAN 1/3 OF THE LONGITUDINAL STEEL IS SPLICED IN ANY GIVEN 12-FT. WIDTH AND 2-FT. LENGTH OF THE PAVEMENT. ANY OTHER LAP CONFIGURATION MEETING THIS REQUIREMENT WILL BE ALLOWED.


**EXAMPLES OF LAP CONFIGURATION**  
 PLAN VIEW (NOT TO SCALE)

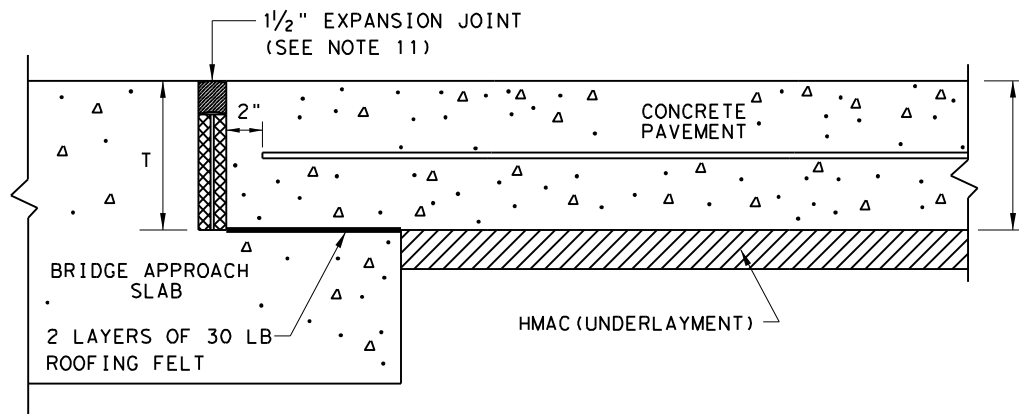

**TRANSVERSE EXPANSION JOINT DETAIL**  
 AT BRIDGE APPROACH

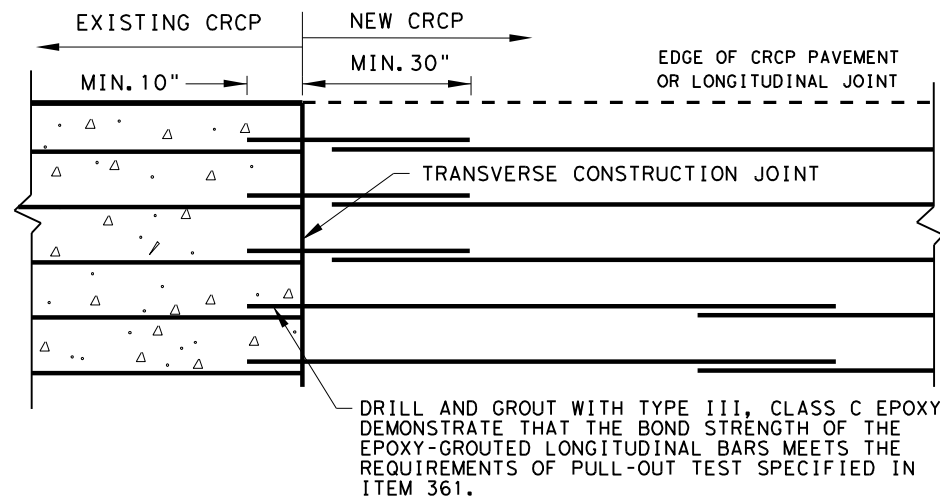


**OPTION A: DRILL AND EPOXY**  
 PLAN VIEW (NOT TO SCALE)

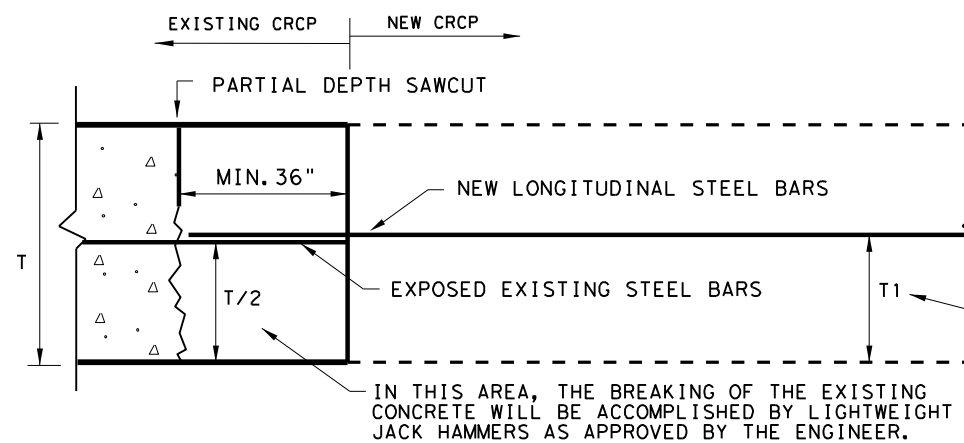


**OPTION B: BREAKBACK AND LAP**

**TRANSVERSE TIE JOINT DETAIL**  
 NEW CRCP TO EXISTING CRCP

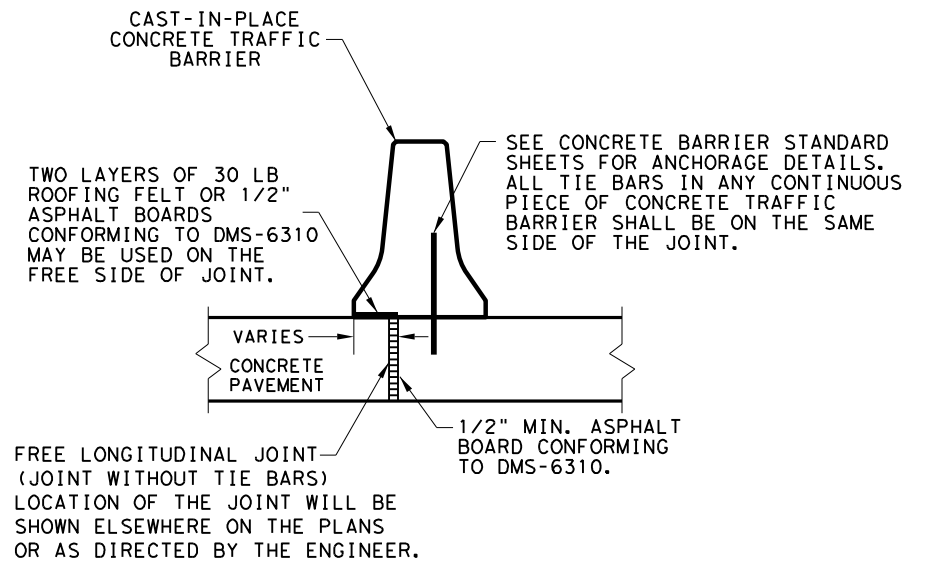

**CENTERLINE FREE LONGITUDINAL JOINT DETAIL**

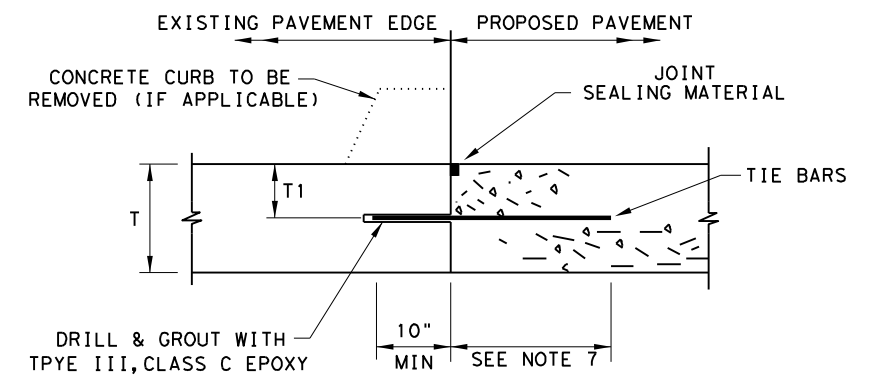

- BEFORE CONCRETE PLACEMENT, PERFORM PULL-OUT TESTS ON EPOXY-GROUTED TIE BARS IN ACCORDANCE WITH ITEM 360.
- SPACE TIE BARS AT 24" SPACING. USE #6 TIE BARS FOR 8" AND THICKER PAVEMENTS, USE #5 TIE BARS FOR LESS THAN 8" THICK PAVEMENTS.

**LONGITUDINAL WIDENING JOINT DETAIL**


SHEET 2 OF 2

		Design Division Standard	
<b>CONTINUOUSLY REINFORCED CONCRETE PAVEMENT</b> <b>ONE LAYER STEEL BAR PLACEMENT</b> <b>T - 7 to 13 INCHES</b> <b>CRCP (1) - 23</b>			
FILE: crcp123.dgn	DN: TxDOT	CK: KM	DW: CES
© TxDOT: APRIL 2023	CONT SECT	JOB	HIGHWAY
APRIL 2023: MODIFIED EXPANSION JOINT DETAIL AT BRIDGE APPROACH	6470 68	001	IH 10 WB FR
DIST	COUNTY	SHEET NO.	
BMT	CHAMBERS	48	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 8/21/2024 1:43:24 PM  
 FILE: T:\LIBRER\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\CON STANDARDS\CD-SETP-PD-20.dgn

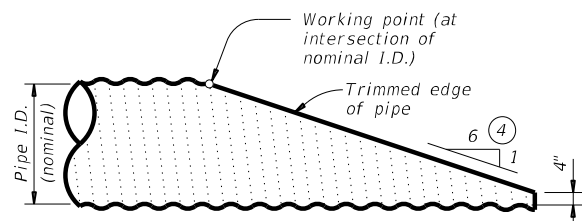


NOTE: All cross pipes, calculations, and dimensions are based on the pipe culverts mitered as shown in this detail. Alternate styles of mitered ends will require that appropriate adjustments be made to the values presented on this standard.

**SIDE ELEVATION OF TYPICAL PIPE CULVERT MITER**


(Showing corrugated metal pipe (CMP) culvert. Details at reinforced concrete pipe (RCP) culvert are similar.)

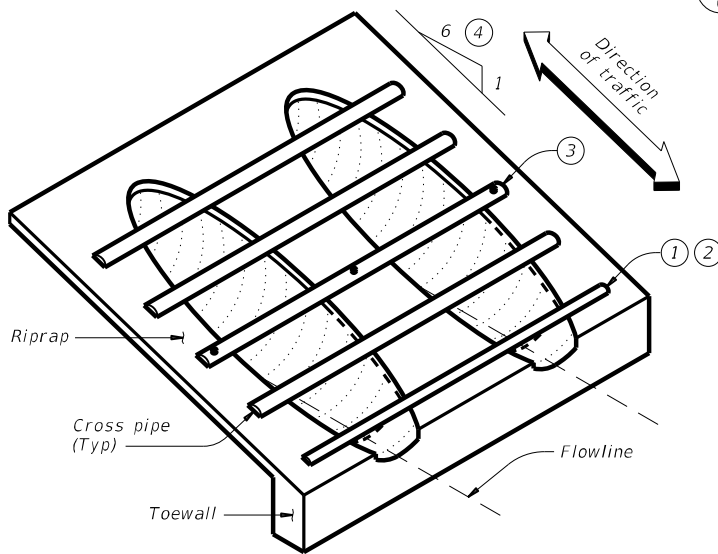


**ISOMETRIC VIEW OF TYPICAL INSTALLATION**

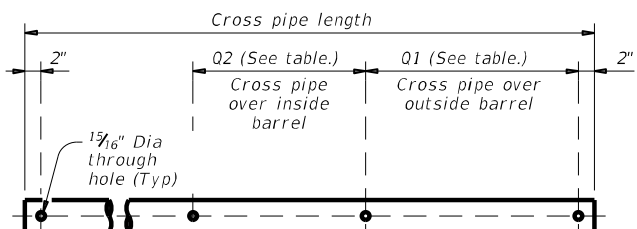

**PIPE WITH BOLTED ANCHOR**

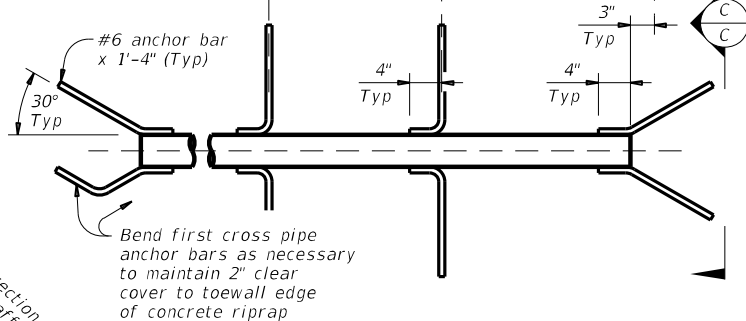


**PIPE WITH ANCHOR BARS**

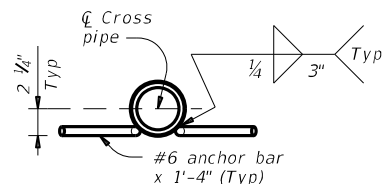


**SECTION C-C**

**CROSS PIPE DETAILS**

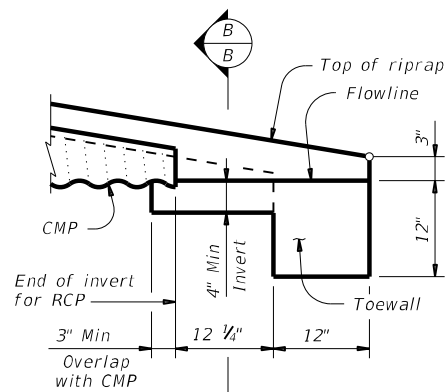

**DETAIL "A"**


(Showing invert with corrugated metal pipe (CMP) culvert. Reinforced concrete pipe (RCP) culvert details are similar. Cross pipes not shown for clarity.)

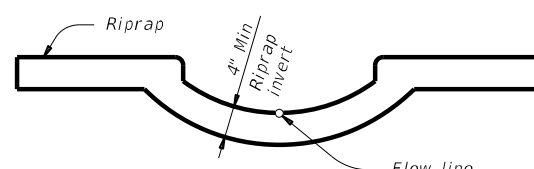


**SECTION B-B**

(Cross pipes not shown for clarity.)


Limits of riprap (to be included with SET for payment) ⑤

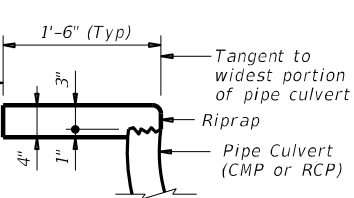

**SHOWING TYPICAL PIPE CULVERT AND RIPRAP**

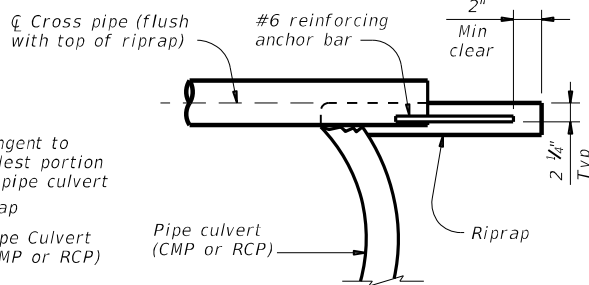

**SHOWING CROSS PIPE WITH ANCHOR BAR**

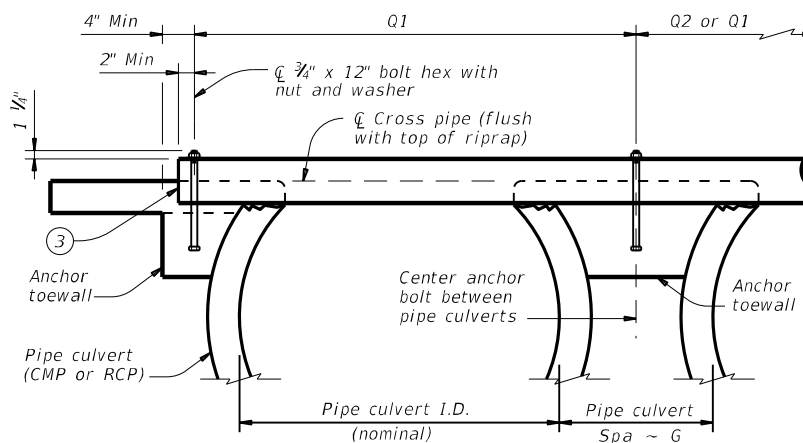

**SHOWING CROSS PIPE WITH BOLTED ANCHOR**

**SECTION A-A**

**CROSS PIPE LENGTHS, REQUIRED PIPE SIZES, AND RIPRAP QUANTITIES**

Nominal Culvert I.D.	Conc Riprap (CY) ⑥	Pipe Culvert Spa ~ G	Single Barrel ~ Q1	Multi-Barrel ~ Q1	Q2	Conditions for Use of Cross Pipes	Cross Pipe Sizes
12"	0.6	0' - 9"	N/A	2' - 1"	1' - 9"	3 or more pipe culverts	3" Std (3.500" O.D.)
15"	0.7	0' - 11"	N/A	2' - 5"	2' - 2"		
18"	0.8	1' - 2"	N/A	2' - 10"	2' - 8"		
21"	0.9	1' - 4"	N/A	3' - 2"	3' - 1"		
24"	0.9	1' - 7"	N/A	3' - 6"	3' - 7"	3 or more pipe culverts	3 1/2" Std (4.000" O.D.)
27"	1.0	1' - 8"	N/A	3' - 10"	3' - 11"	2 or more pipe culverts	
30"	1.1	1' - 10"	N/A	4' - 2"	4' - 4"	All pipe culverts	
33"	1.2	1' - 11"	4' - 2"	4' - 5"	4' - 8"	All pipe culverts	4" Std (4.500" O.D.)
36"	1.3	2' - 1"	4' - 5"	4' - 9"	5' - 1"	All pipe culverts	
42"	1.5	2' - 4"	4' - 11"	5' - 5"	5' - 10"	All pipe culverts	5" Std (5.563" O.D.)
48"	1.7	2' - 7"	5' - 5"	6' - 0"	6' - 7"	All pipe culverts	
54"	2.0	3' - 0"	5' - 11"	6' - 9"	7' - 6"	All pipe culverts	
60"	2.2	3' - 3"	6' - 5"	7' - 4"	8' - 3"	All pipe culverts	
66"	2.4	3' - 3"	6' - 11"	7' - 10"	8' - 9"	All pipe culverts	5" Std (5.563" O.D.)
72"	2.7	3' - 4"	7' - 5"	8' - 5"	9' - 4"	All pipe culverts	


- The proper installation of the first cross pipe is critical for vehicle safety. Place the top of the first cross pipe no more than 6" above the flow line.
- Provide cross pipes, except the first bottom pipe, of the size shown in the table. Provide a 3 1/2" standard pipe (4" O.D.) for the first bottom pipe.
- Install the third cross pipe from the bottom of the culvert using a bolted connection. Ensure that riprap concrete does not flow into the cross pipe so as to permit disassembly of the bolted connection to allow cleanout access. At the Contractor's option, install all other cross pipes using the bolted connection details.
- Match cross slope as shown elsewhere in the plans. Cross slope of 6:1 or flatter is required for vehicle safety.
- Riprap placed beyond the limits shown will be paid for as concrete riprap in accordance with Item 432, "Riprap."
- Quantities shown are for one end of one reinforced concrete pipe (RCP) culvert. For multiple pipe culverts or for corrugated metal pipe (CMP) culverts, quantities will need to be adjusted. Riprap quantities are for contractor's information only.

**MATERIAL NOTES:**

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise. Provide cross pipes that meet the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 (Gr B), or API 5LX52. Provide ASTM A307 bolts and nuts. Galvanize all steel components, except concrete reinforcing, after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

**GENERAL NOTES:**

Cross pipes are designed for a traversing load of 10,000 pounds at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981. Safety end treatments (SET) shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the cross pipes. Construct concrete riprap and all necessary inverts in accordance with the requirements of Item 432, "Riprap." Payment for riprap and toewall is included in the Price Bid for each Safety End Treatment.

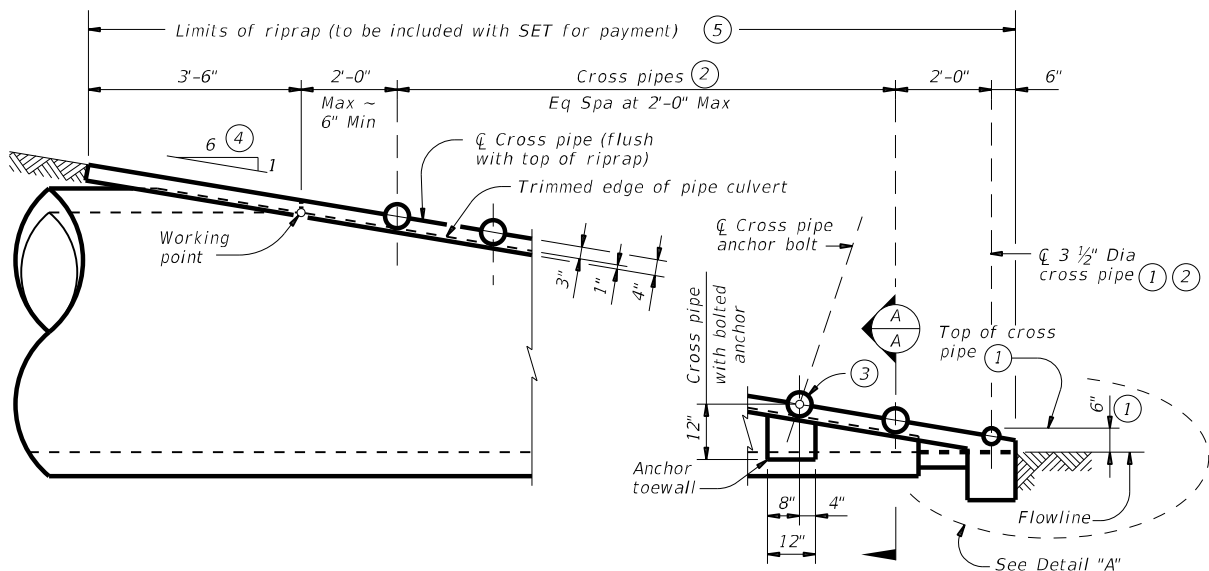

**SIDE ELEVATION OF CAST-IN-PLACE CONCRETE**

(Showing reinforced concrete pipe (RCP) culvert. Details at corrugated metal pipe (CMP) culvert are similar.)


Bridge Division Standard

SAFETY END TREATMENT  
 FOR 12" DIA TO 72" DIA  
 PIPE CULVERTS  
 TYPE II ~ PARALLEL DRAINAGE  
 SETP-PD

FILE:	DN: GAF	CK: CAT	DW: JRP	CK: GAF
©TxDOT February 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	<b>6470 68</b>	<b>001</b>	<b>IH 10 WB FR</b>	
DIST	COUNTY	SHEET NO.		
<b>BMT</b>	<b>CHAMBERS</b>	<b>49</b>		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

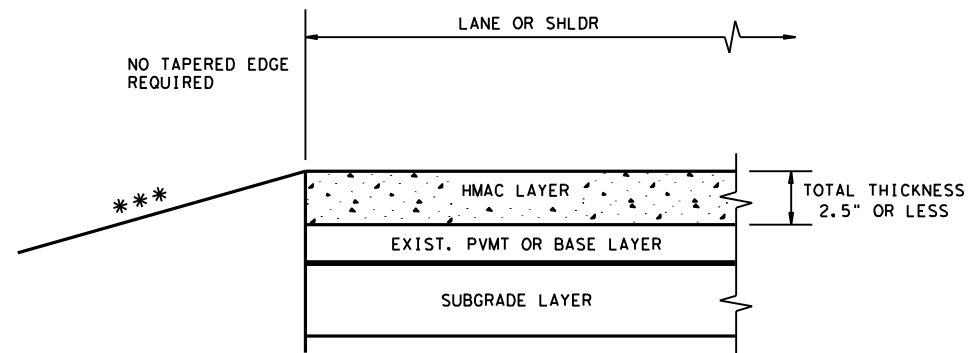

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS


**CONDITION - 1**  
THIN HMAC SURFACES OR HMAC OVERLAY  
WITH THICKNESS OF 2.5" OR LESS

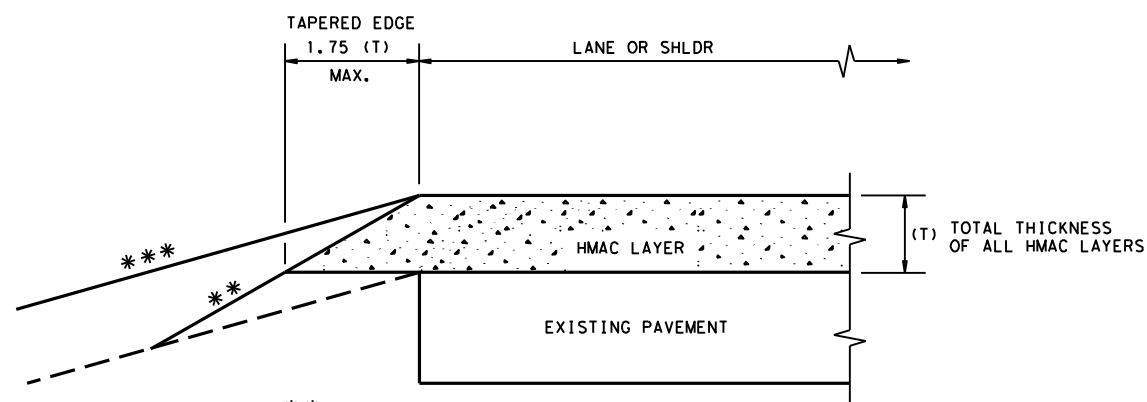

\*\* EXISTING ROADSIDE EMBANKMENT TO BE GRADED TO PRODUCE A SMOOTH LEVEL SURFACE FOR PLACEMENT OF TAPERED EDGE. THIS WORK IS SUBSIDIARY TO THE VARIOUS BID ITEMS.


\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 2**  
OVERLAY OF EXISTING PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

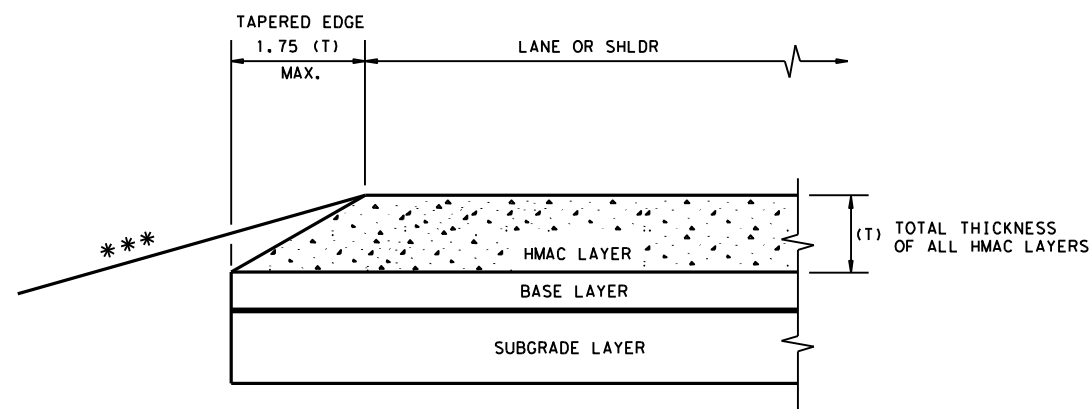

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 3**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

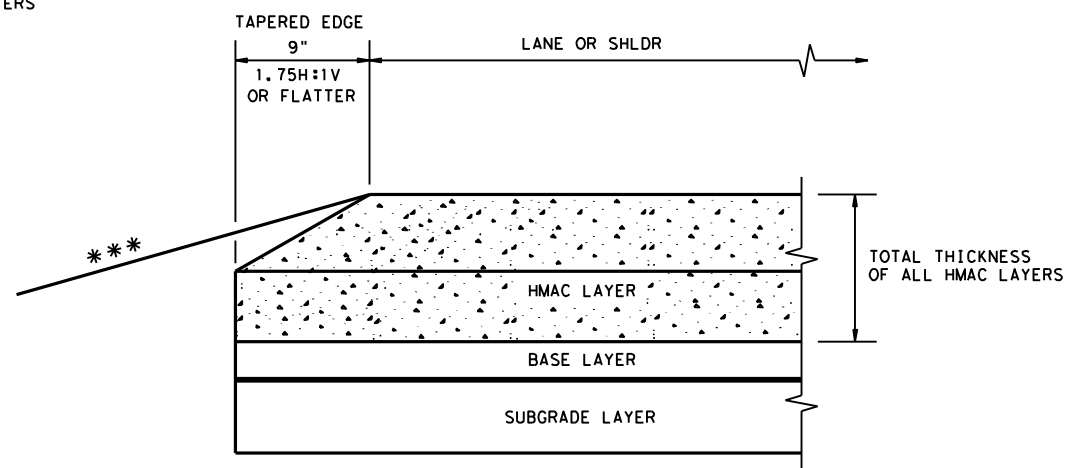

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 4**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 5" OR GREATER


**GENERAL NOTES**

1. UNLESS OTHERWISE SHOWN IN THE PLANS, A VERTICAL EDGE IS PERMISSIBLE FOR HMAC PLACED GREATER THAN 5" BELOW THE EDGE OF PAVEMENT AND FOR THICKNESS OF HMAC LESS THAN 2.5".
2. FOR FURTHER INFORMATION REGARDING THE ROADSIDE AND PAVEMENT DETAILS, SEE TYPICAL SECTIONS.
3. PAYMENT FOR TAPERED EDGE WILL BE IN ACCORDANCE WITH APPLICABLE ITEMS IN THE CONTRACT.
4. THE SLOPE OF THE TAPERED EDGE SHALL BE 1.75H:1V OR FLATTER.
5. THE TAPERED EDGE SHALL BE PRODUCED BY USE OF A SCREED ATTACHMENT CAPABLE OF PRODUCING A SMOOTH COMPACTED SURFACE. ADDITIONAL COMPACTING EFFORT BEHIND THE SCREED IS NOT REQUIRED.

(NOT TO SCALE)

				Design Division Standard	
<b>TAPERED EDGE DETAILS HMAC PAVEMENT</b>					
<b>TE (HMAC) - 11</b>					
FILE: tehmac11.dgn	DN: TxDOT	CK: RL	DW: KB	CK:	
© TxDOT January 2011	CONT	SECT	JOB	HIGHWAY	
REVISIONS	<b>6470</b>	<b>68</b>	<b>001</b>	<b>1H 10 WB FR</b>	
	DIST	COUNTY	SHEET NO.		
	<b>BMT</b>	<b>CHAMBERS</b>	<b>50</b>		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

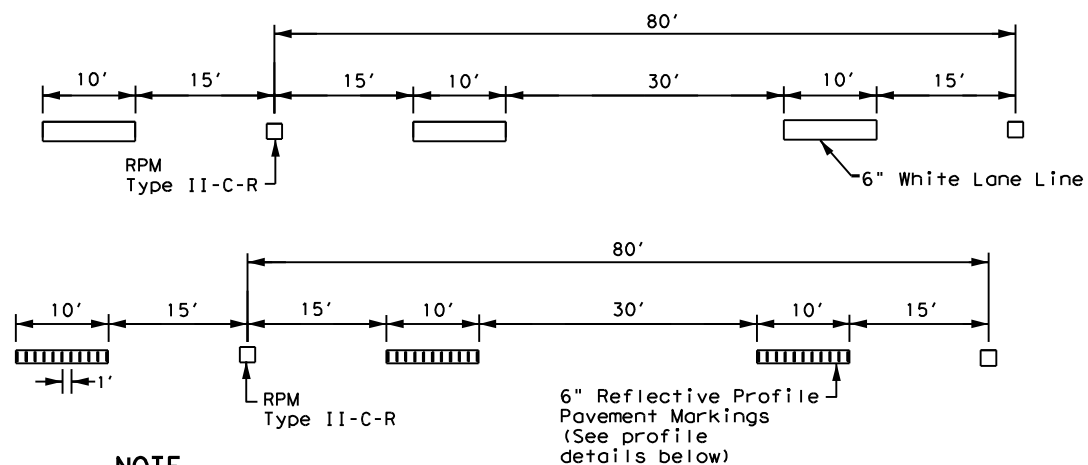

**NOTE**

ReflectORIZED raised pavement markers Type II-C-R shall be spaced on 80' centers with the clear face toward normal traffic and the red face toward wrong way traffic. All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.


**TRAFFIC LANE LINES PAVEMENT MARKING**

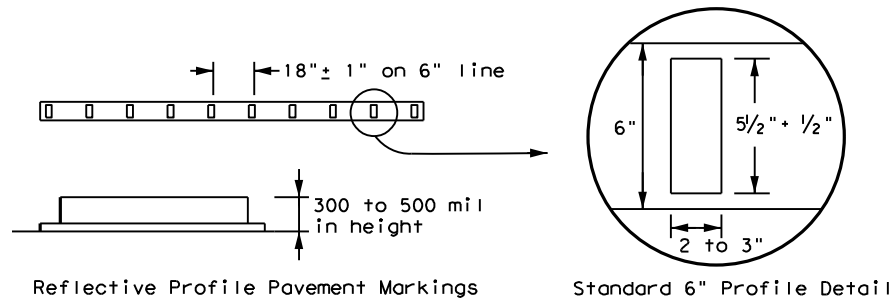

**NOTE**

Edge lines should typically be 6" wide and the materials shall be as specified in the plans. See details above if reflective profile pavement markings are to be used.


**EDGE LINE PAVEMENT MARKINGS**

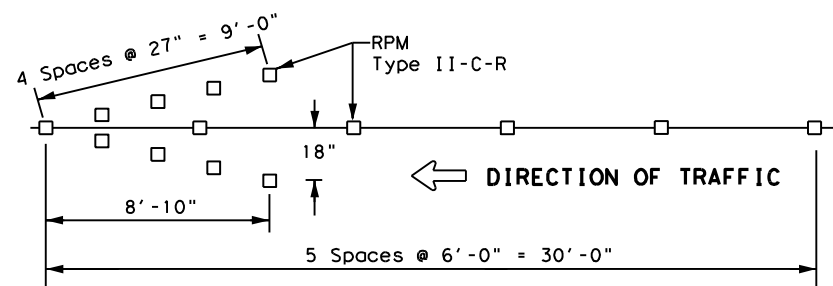


**NOTES**

1. ReflectORIZED raised pavement markers Type-II-C-R in the wrong way arrow shall have the clear face toward normal traffic and the red face toward the wrong way traffic.
2. Red reflectORIZED wrong way arrows, not to exceed two, may be placed on exit ramps. Locations of the arrows shall be as shown in the plans or as directed by the engineer.

**WRONG WAY ARROW**

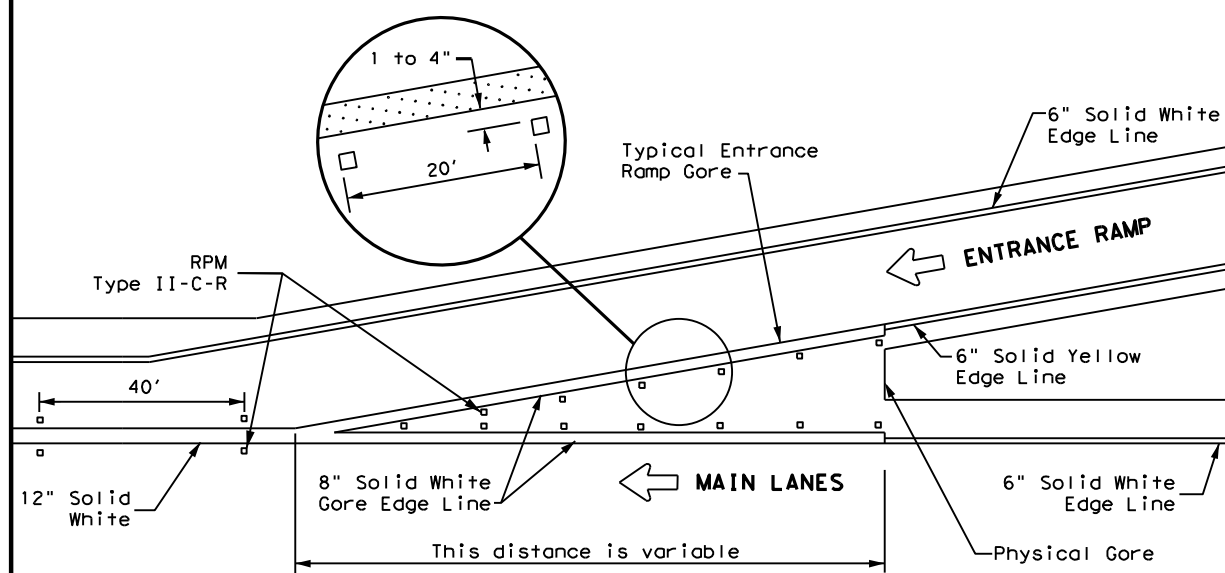


**TYPICAL ENTRANCE RAMP GORE MARKING**

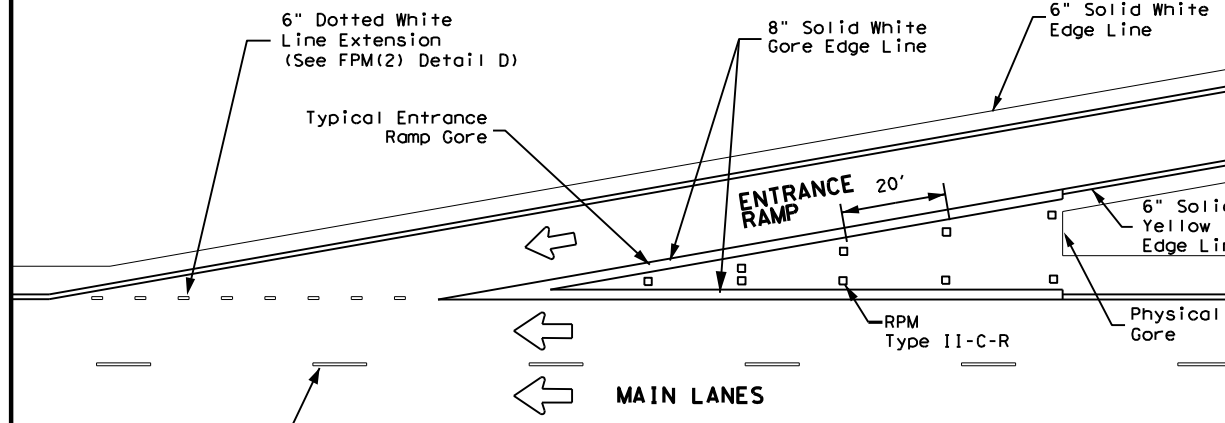

**NOTE**

See the Roadway Design Manual Chapter 3 to determine if a tapered acceleration lane may be used.

**TAPERED ACCELERATION LANE**

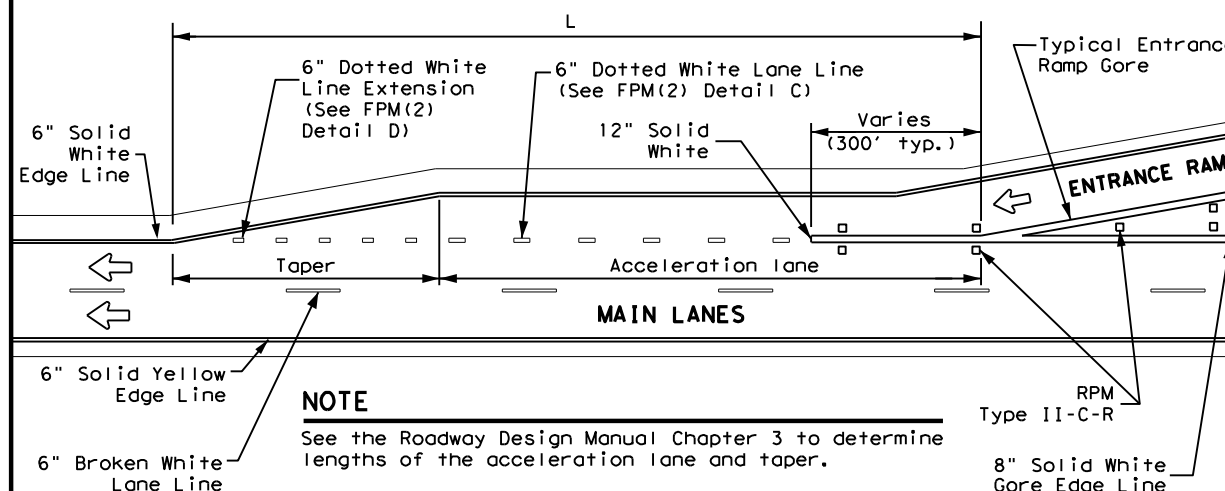

**NOTE**

See the Roadway Design Manual Chapter 3 to determine lengths of the acceleration lane and taper.

**PARALLEL ACCELERATION LANE**


MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.


LEGEND	
	Traffic flow
	Pavement marking arrows (white)
	ReflectORIZED Raised Markers (RPM) Type II-C-R

**GENERAL NOTE**

On concrete pavements the raised pavement markers shall be placed to one side of the longitudinal joints.

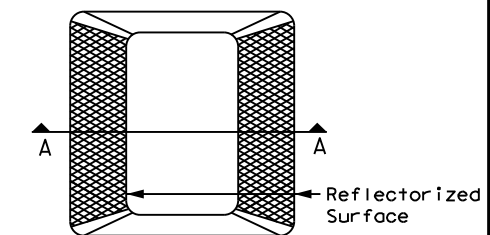

Type II (Top View)

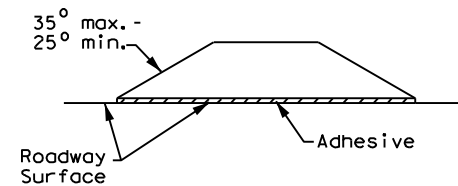

SECTION A

**REFLECTORIZED RAISED PAVEMENT MARKER (RPM)**


Texas Department of Transportation Traffic Safety Division Standard

**TYPICAL STANDARD FREEWAY PAVEMENT MARKINGS WITH RAISED PAVEMENT MARKERS FPM(1)-22**

FILE: fpm(1)-22.dgn	DN:	CK:	DW:	CK:
©TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	647068	001	IH 10 WB FR	
5-74 8-00 2-12	DIST	COUNTY	SHEET NO.	
4-92 2-08 10-22	BMT	CHAMBERS	51	
5-00 2-10				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard or for any damages resulting from its use.

DATE: 8/21/2024 1:43:29 PM  
 FILE: T:\LIBERDES\POSE MAINTENANCE\FY 25\FY 25\_RMC 6470-68-001\_IH-10\_FR\_WB\_BASIS\FPM(2)-22.dgn

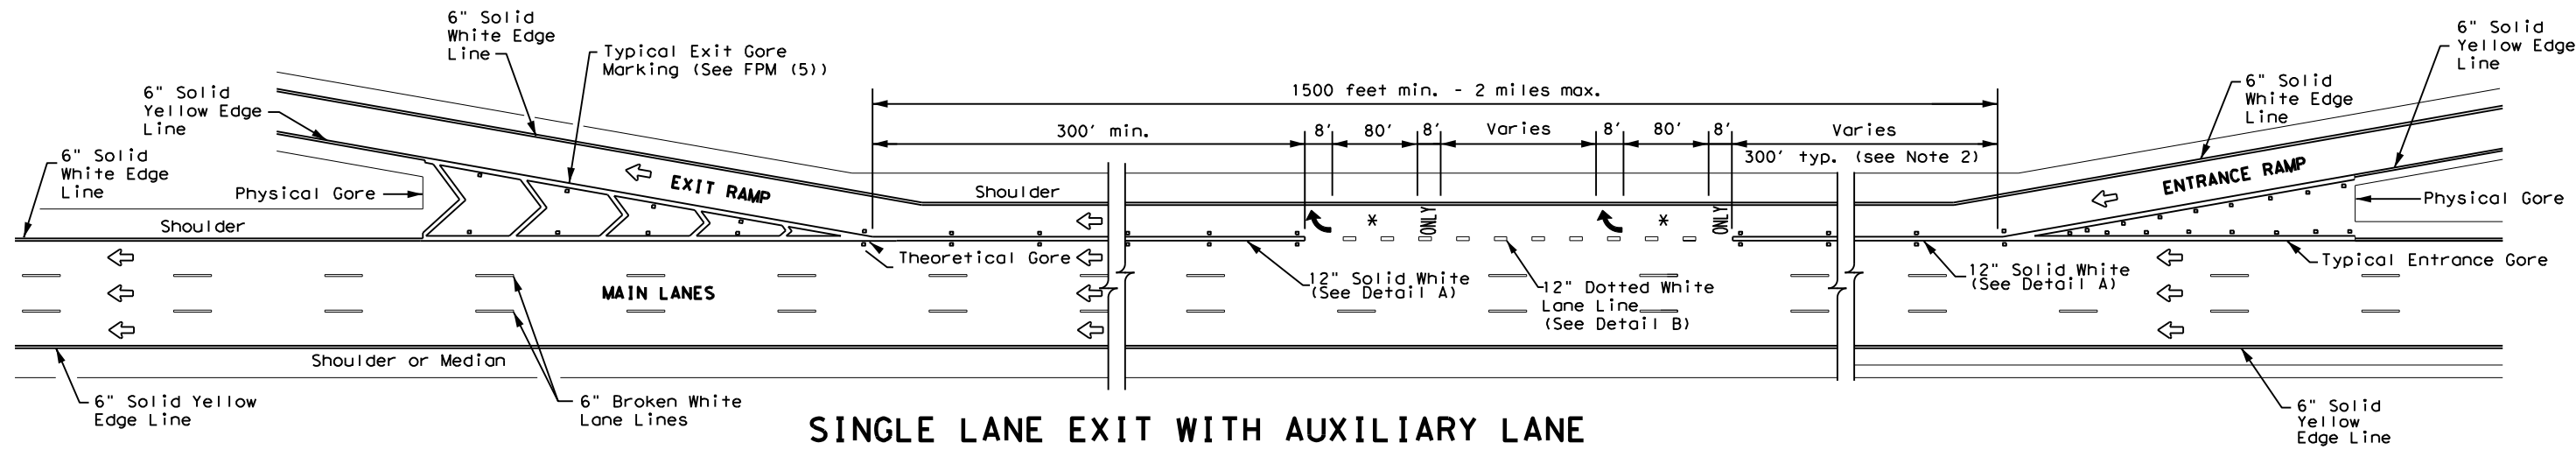


**SINGLE LANE EXIT WITH AUXILIARY LANE**

(See Note 2)

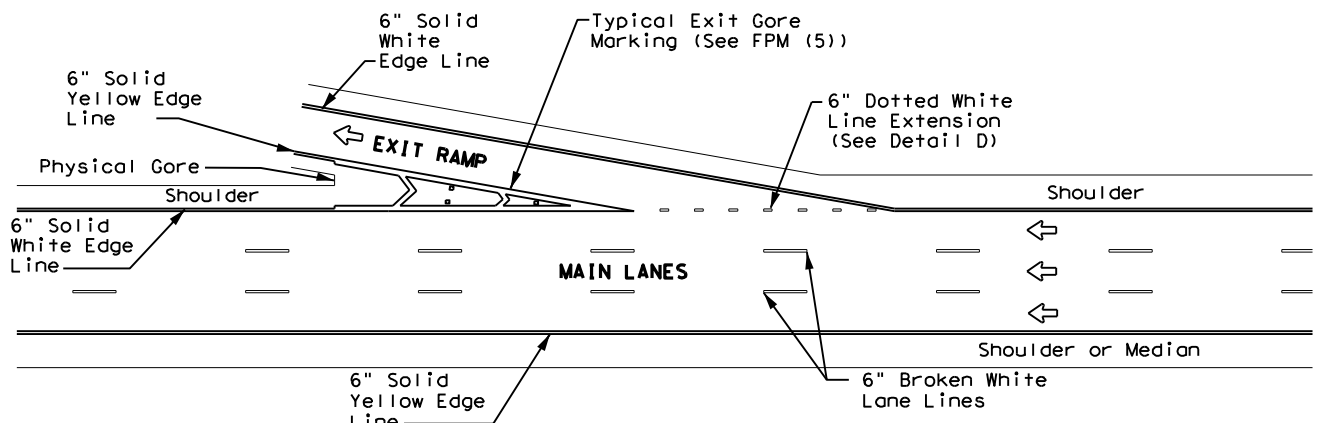


**TAPERED DECELERATION LANE**

**NOTE**  
 Reference Roadway Design Manual Chapter 3 to determine if tapered deceleration lane may be used.

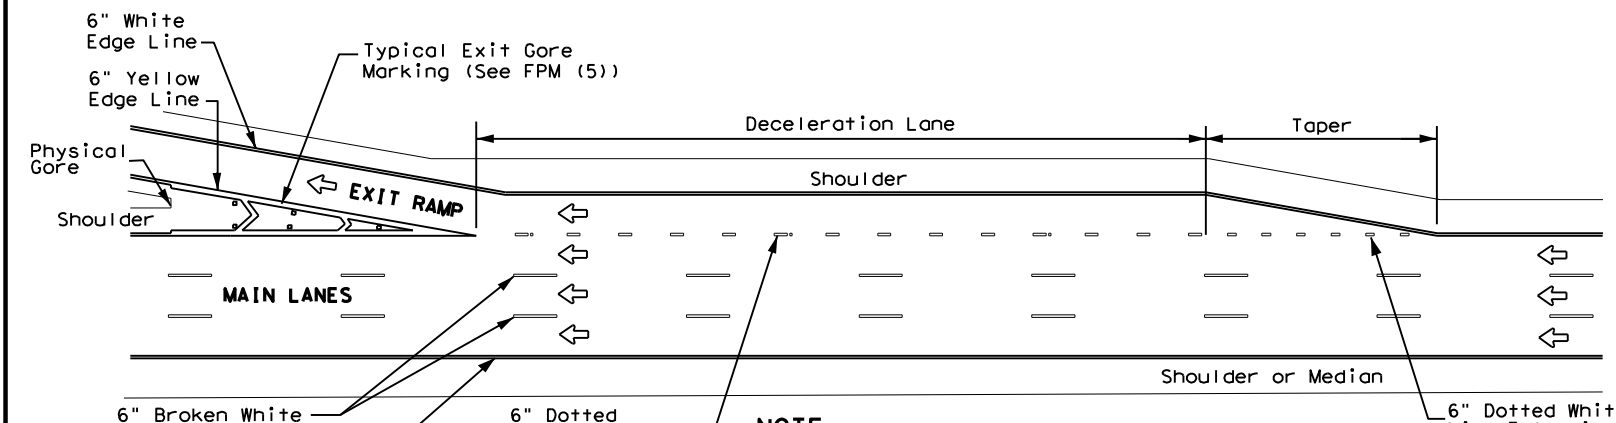


**PARALLEL DECELERATION LANE**


**NOTE**  
 Reference Roadway Design Manual Chapter 3 to determine length of deceleration lane and taper.

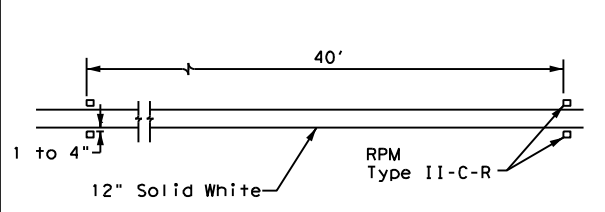


**DETAIL A**

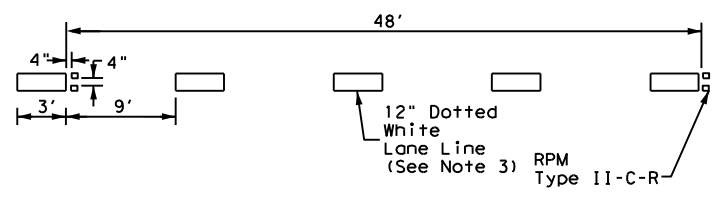

**DETAIL B**

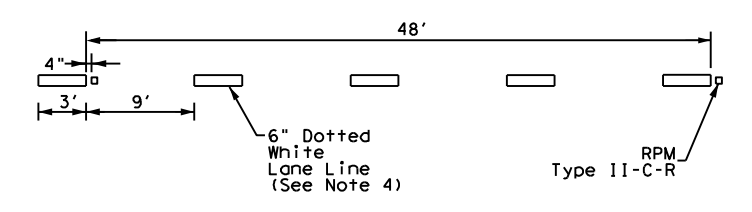

**DETAIL C**

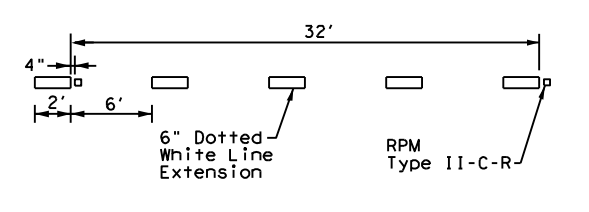

**DETAIL D**

**GENERAL NOTES**

1. Pavement markings shall be white except as otherwise noted.
2. Length of 12" white line may vary depending on location.
3. Wide (12") dotted lane line (see Detail B) is used to separate a through lane that continues beyond the interchange from an adjacent mandatory exit lane.
4. Normal (6") dotted lane line (see Detail C) is used at parallel acceleration and deceleration lanes.
5. See FPM(1) for traffic lane line pavement marking details.

**LEGEND**

	Traffic flow
	Pavement marking arrows (white)
	Reflectorized Raised Markers (RPM) Type II-C-R
	Arrow markings are optional, however "ONLY" is required if arrow is used

**MATERIAL SPECIFICATIONS**

PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.



**TYPICAL STANDARD FREEWAY PAVEMENT MARKINGS ENTRANCE AND EXIT RAMP**

**FPM(2) - 22**

FILE: fpm(2)-22.dgn	DW: DW:	CK: CK:	DW: DW:	CK: CK:
©TxDOT October 2022	CONT: 6470	SECT: 68	JOB: 001	HIGHWAY: IH 10 WB FR
REVISIONS	DIST: BMT	COUNTY: CHAMBERS	SHEET NO. 52	
2-77 5-00 2-12				
4-92 8-00 10-22				
8-95 2-10				

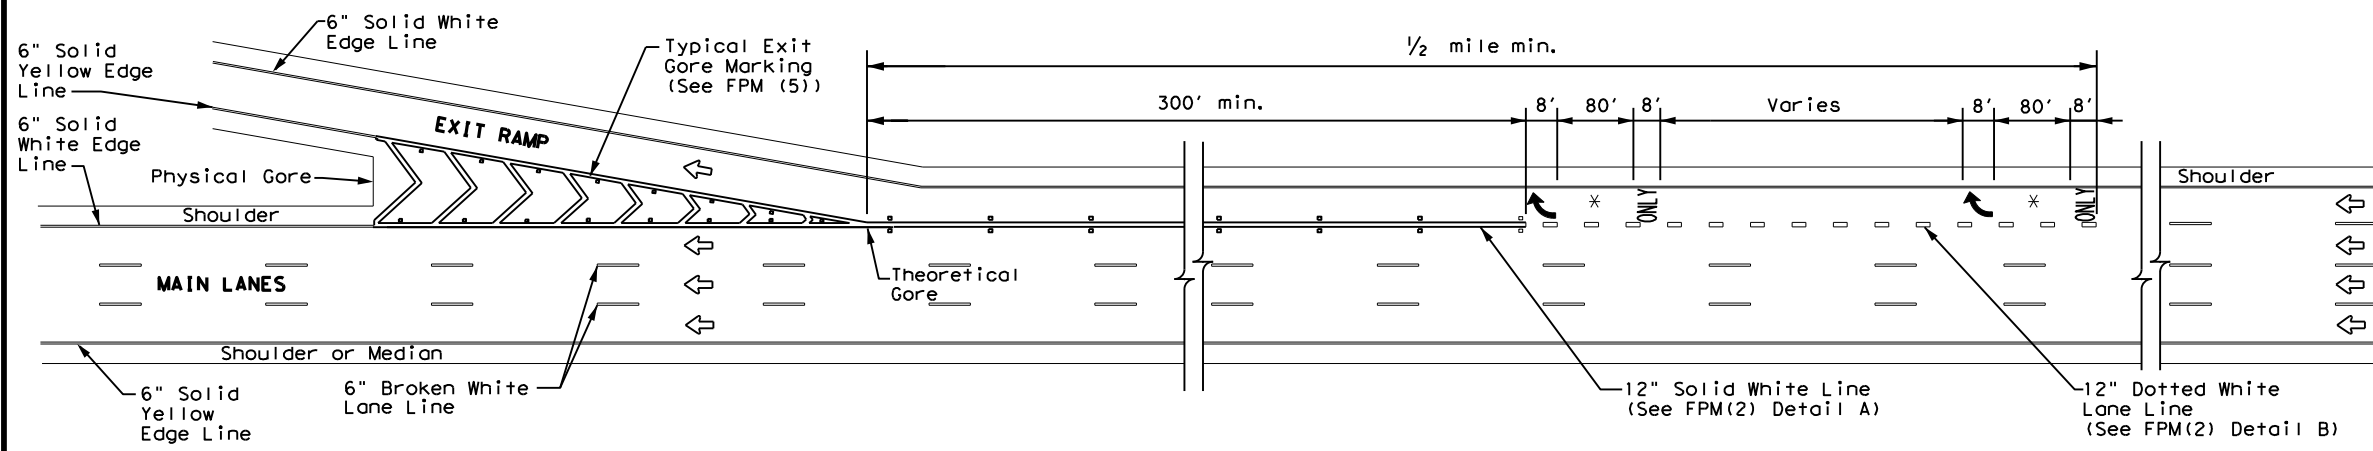


**SINGLE LANE EXIT - LANE DROP OR EXIT ONLY**


MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

LEGEND	
	Traffic flow
	Pavement marking arrows (white)
	ReflectORIZED Raised Markers (RPM) Type II-C-R
	Arrow markings are optional, however "ONLY" is required if arrow is used

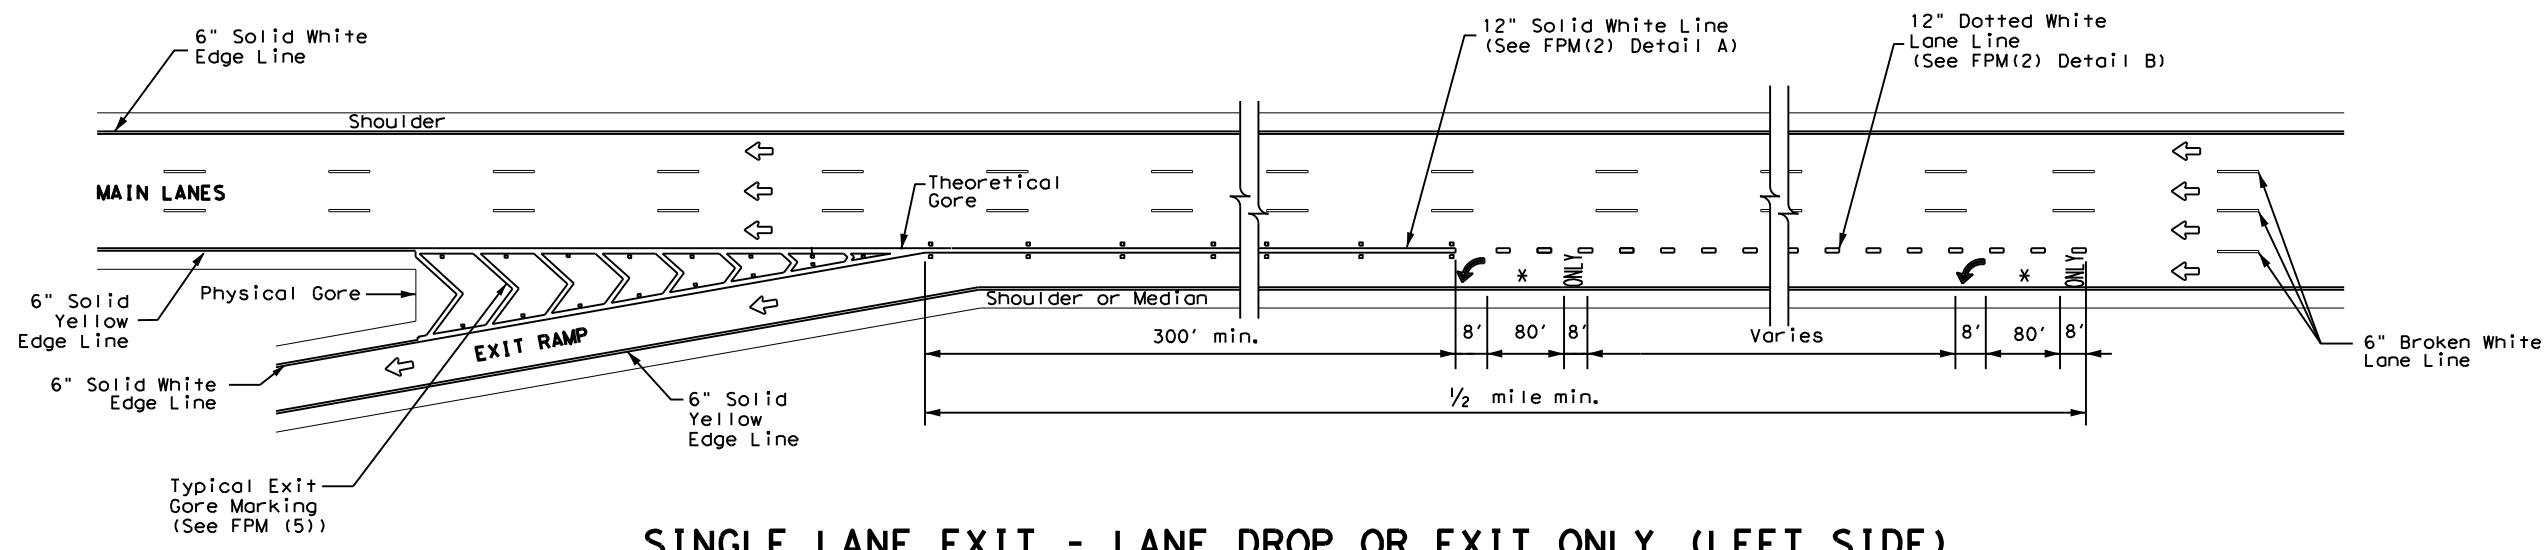

**SINGLE LANE EXIT - LANE DROP OR EXIT ONLY (LEFT SIDE)**

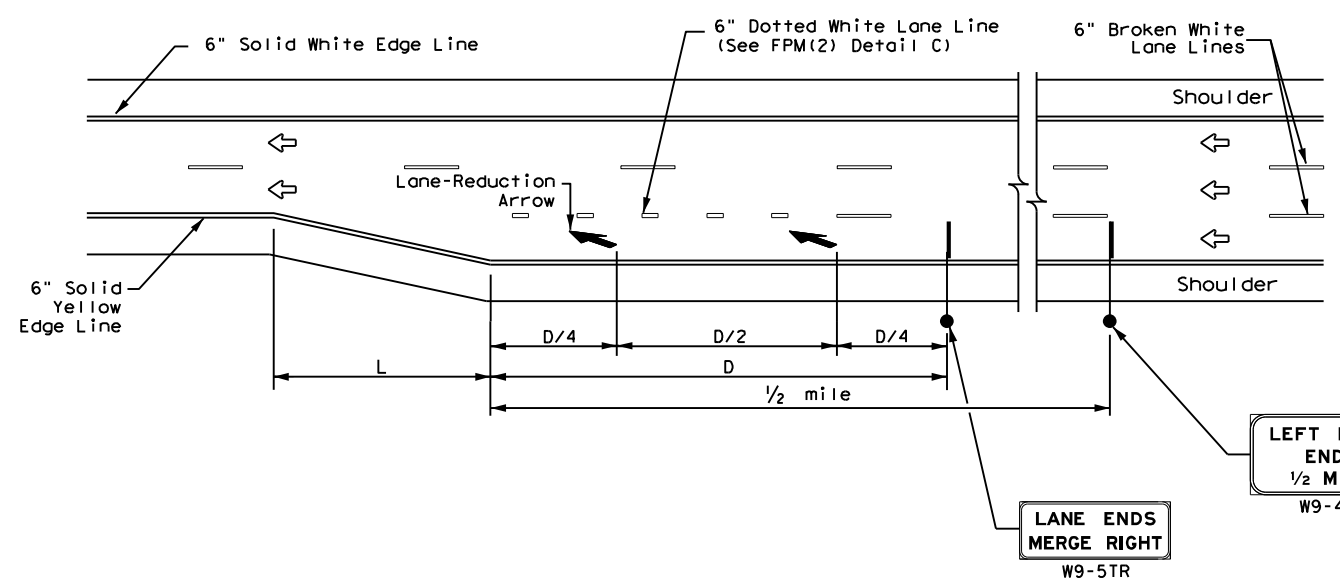

**FREEWAY LANE REDUCTION**

**NOTES**

- Large Guide signs shall conform to the TxDOT Freeway Signing Handbook.
- An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
- Arrows and sign details can be found in the Standard Highway Sign Designs for Texas (SHSD) at <http://www.txdot.gov>.
- These guidelines may also be applied to the design of a right side lane reduction. Use LANE ENDS MERGE LEFT (W9-5TL) and RIGHT LANE ENDS 1/2 MILE (W9-4TR) signs in lieu of what is shown on drawing.

ADVANCED WARNING SIGN DISTANCE (D)		
Posted Speed	D (ft)	L (ft)
45 MPH	775	L=WS
50 MPH	885	
55 MPH	990	
60 MPH	1,100	
65 MPH	1,200	
70 MPH	1,250	
75 MPH	1,350	
80 MPH	1,500	
85 MPH	1,625	

**GENERAL NOTES**

- Pavement markings shall be white except as otherwise noted.
- Length of 12" white line may vary depending on location.
- Wide (12") dotted lane line (see FPM(2) Detail B) is used to separate a through lane that continues beyond the interchange from an adjacent mandatory exit lane.
- Edge lines are not required in curb and gutter sections of frontage roads.
- See FPM(1) for traffic lane line pavement marking details.



**TYPICAL STANDARD FREEWAY PAVEMENT MARKINGS SINGLE LANE DROP (EXIT ONLY) AND LANE REDUCTION DETAILS**  
**FPM(3) - 22**

FILE: fpm(3)-22.dgn	DW: CK:	DW: CK:	CK:
© TxDOT October 2022	CONT: 6470	SECT: 68	JOB: 001
REVISIONS:	REV: 5-00	DATE: 2-12	HIGHWAY: IH 10 WB FR
	REV: 8-00	DATE: 10-22	SHEET NO.: 53
	DIST: BMT	COUNTY: CHAMBERS	

DATE: 8/21/2024 1:43:30 PM FILE: I:\LIBERDES\PMSE MAINTENANCE\FY 25\FY 25\_RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCN\STANDARDS\FPM(3)-22.dgn

# SUMMARY OF SMALL SIGNS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PLAN SHEET NO.	SIGN NO.	SIGN NOMENCLATURE	SIGN	DIMENSIONS	FLAT ALUMINUM (TYPE A)	EXAL ALUMINUM (TYPE G)	SM RD SGN ASSM TY XXXXX (X) XX (X-XXXX)				BRIDGE MOUNT CLEARANCE SIGNS (See Note 2)
							POST TYPE	POSTS	ANCHOR TYPE	MOUNTING DESIGNATION	
							FRP = Fiberglass TWT = Thin-Wall 10BWG = 10 BWG S80 = Sch 80	1 or 2	UA=Universal Conc UB=Universal Bolt SA=Slipbase-Conc SB=Slipbase-Bolt WS=Wedge Steel WP=Wedge Plastic	PREFABRICATED P = "Plain" T = "T" U = "U"	
36	1	M4-5B		24 x 12	X						
		M1-1		24 x 24	X	10BWG	1	SA	P		
		M6-2L (B)		24 x 12	X						
37, 39	2, 10	R1-1		36" x 36"	X	10BWG	1	SA	P		
37, 39	3, 5, 7, 11	R5-1		48" x 48"	X	10BWG	1	SA	T		
37, 39	4, 9	R6-1R		54" x 18"	X	10BWG	1	SA	T		
37	6	M4-5B		24 x 12	X						
		M1-1		24 x 24	X	10BWG	1	SA	P		
		M6-1B		24 x 12	X						
39	12	D21-1aTR		48 x 24	X	10BWG	1	SA	T		
40	13	R4-3b		48 x 48	X	10BWG	1	SA	T		

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080"
7.5 to 15	0.100"
Greater than 15	0.125"

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:  
<http://www.txdot.gov/>


- NOTE:**
- Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
  - For installation of bridge mount clearance signs, see Bridge Mounted Clearance Sign Assembly (BMCS) Standard Sheet.
  - For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside Signs General Notes & Details SMD(GEN).



## SUMMARY OF SMALL SIGNS

### SOSS

FILE: slums16.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT May 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
4-16	DIST	COUNTY	SHEET NO.	
8-16	BMT	CHAMBERS	54	

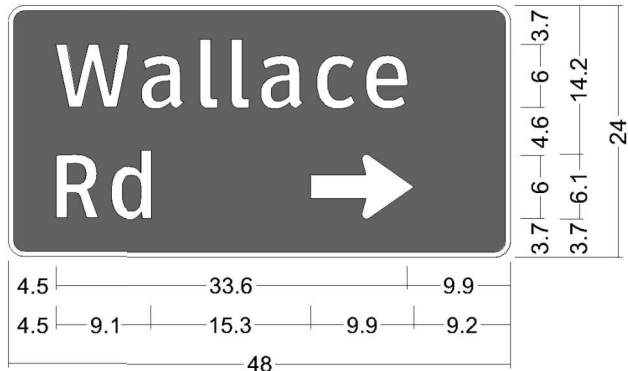

D21-1aTR\_VARx24;  
 1.5" Radius, 0.5" Border, White on, Green;  
 "Wallace", ClearviewHwy-3-W;  
 "Rd", ClearviewHwy-3-W;  
 Standard Arrow Custom 9.9" X 6.1" 0';

FILE: T:\LIBERDES\PSSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\DCN\STANDARDS\SIGN DESIGN.dgn  
 DATE: 8/21/2024 1:43:34 PM

Dimensions shown are in inches unless otherwise stated.

DS

DocuSigned by: *[Signature]* 8/22/2024  
 SCAE84E05D7F456...

**SIGN DESIGN**

© 2024 Texas Department of Transportation  
 SHEET 1 OF 1

FHWA TEXAS DIVISION	*PROJTYPE*		SHEET NO.
	RMC 647068001		55
STATE	DISTRICT	COUNTY	
TEXAS	BMT	CHAMBERS	
CONTROL	SECTION	JOB	HIGHWAY NO.
6470	68	001	IH 10 WB FR

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion or use of this standard to other formats or for incorrect results or damages resulting from its use.

## SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

**Post Type**

FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))  
 TWT = Thin-Walled Tubing (see SMD(TWT))  
 10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))  
 S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

**Number of Posts (1 or 2)**


**Anchor Type**

UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT))  
 UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))  
 WS = Wedge Anchor Steel - (see SMD(TWT))  
 WP = Wedge Anchor Plastic (see SMD(TWT))  
 SA = Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))  
 SB = Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

**Sign Mounting Designation**






P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))  
 T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))  
 U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))  
 IF REQUIRED  
 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))  
 BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))  
 WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))  
 EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))

## REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT

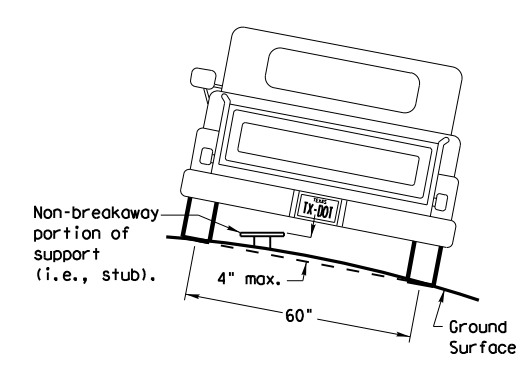


To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).

## SIGN LOCATION

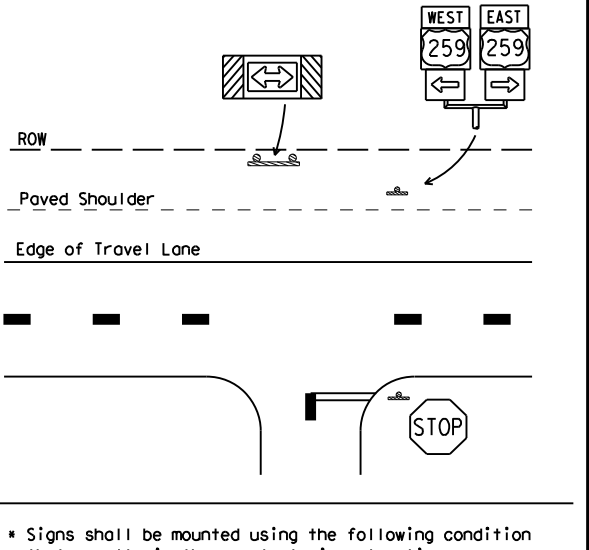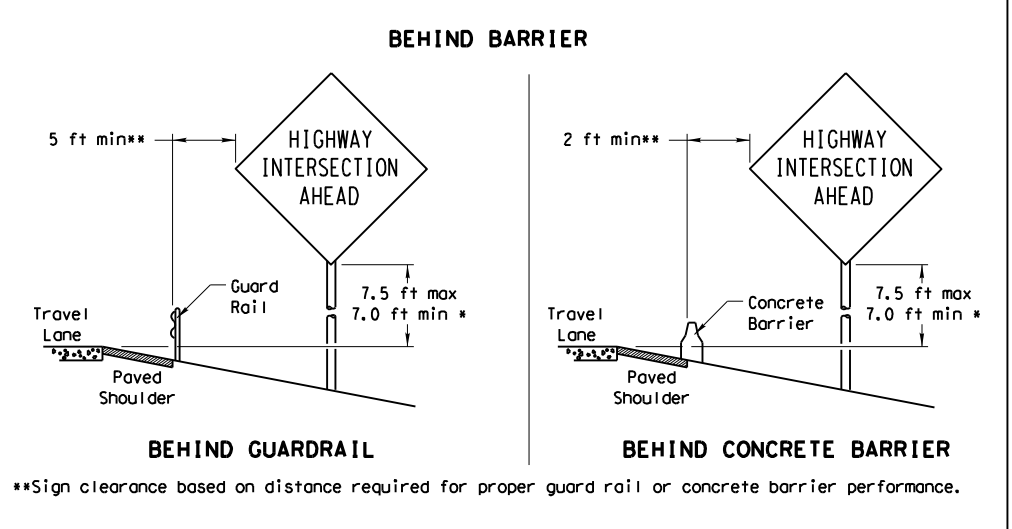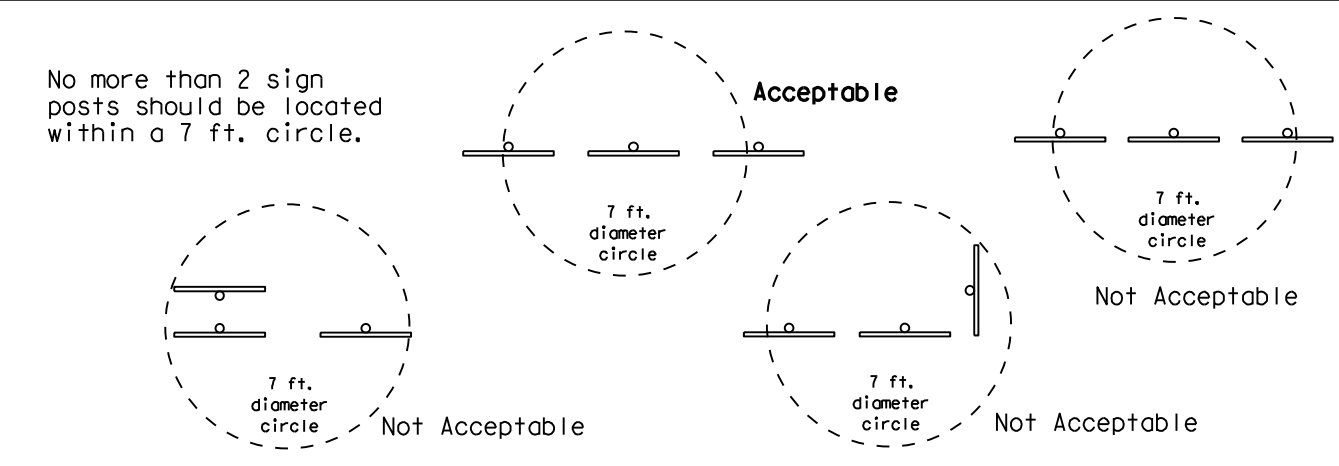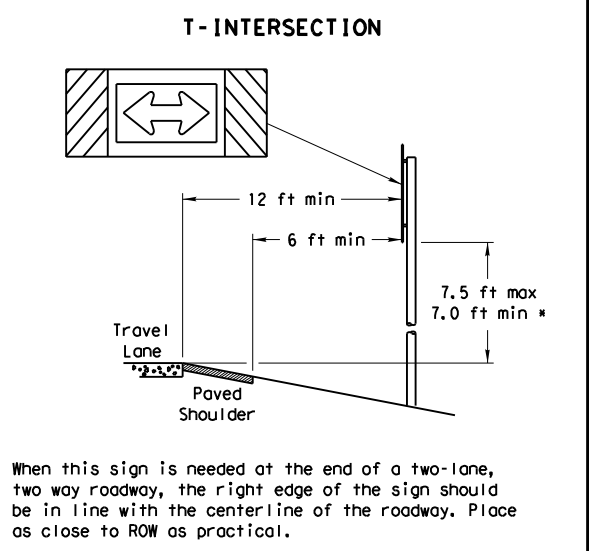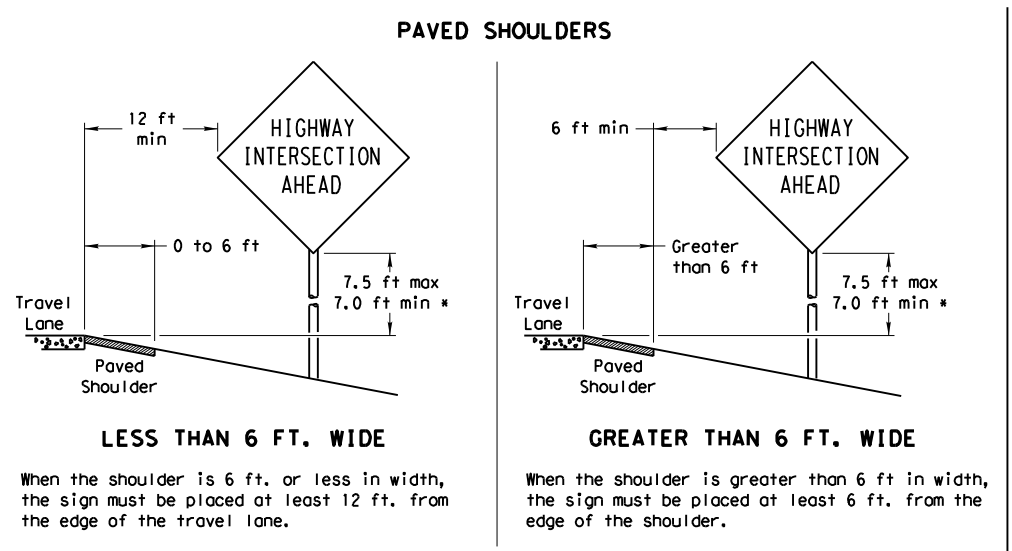

## TYPICAL SIGN ATTACHMENT DETAIL

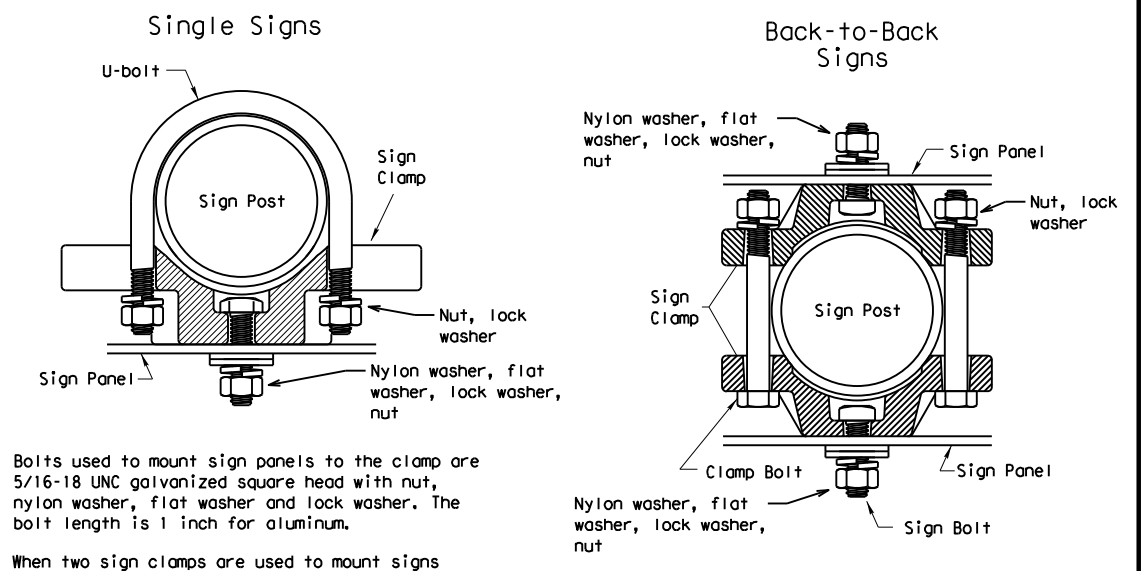


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.


Sign clamps may be either the specific size clamp or the universal clamp.

Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"


## SIGNS WITH PLAQUES

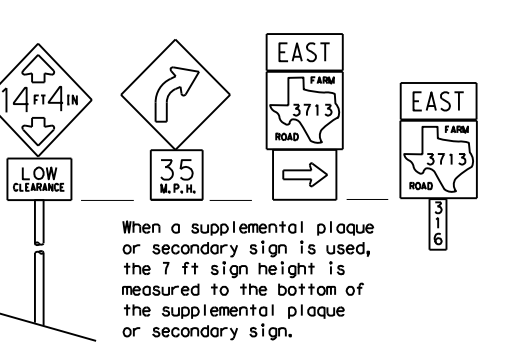

## CURB & GUTTER OR RAISED ISLAND

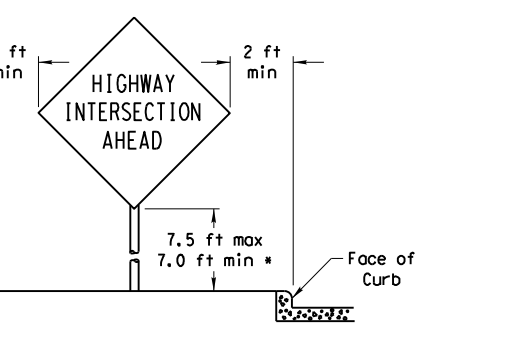

## RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

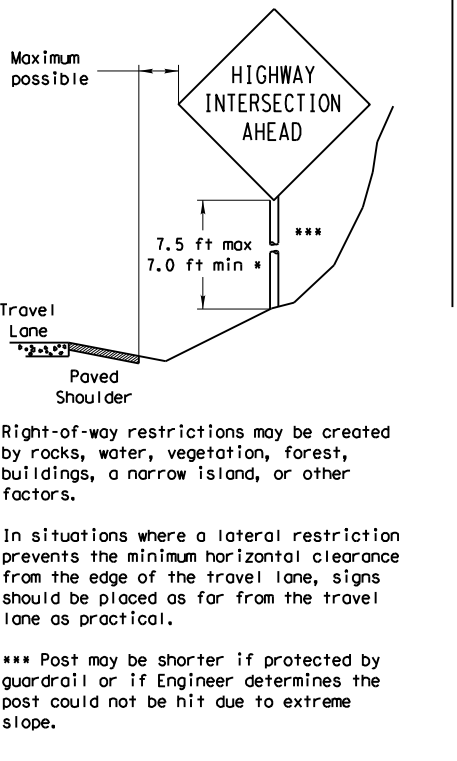

\* Signs shall be mounted using the following condition that results in the greatest sign elevation:

- a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:  
<http://www.txdot.gov/publications/traffic.htm>


**Texas Department of Transportation**  
 Traffic Operations Division

**SIGN MOUNTING DETAILS**  
**SMALL ROADSIDE SIGNS**  
**GENERAL NOTES & DETAILS**  
**SMD (GEN) -08**

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		6470	68	001	IH 10 WB FR
		DIST	COUNTY		SHEET NO.
		BMT	CHAMBERS		56



# TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

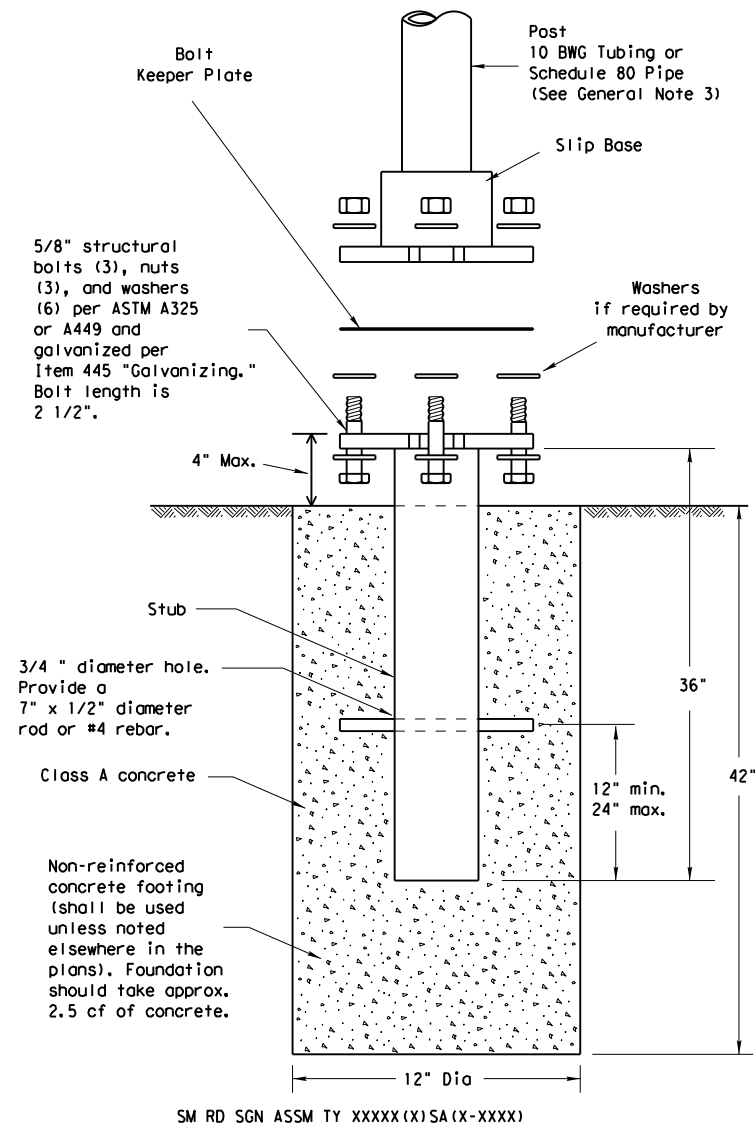

SM RD SGN ASSM TY XXXXX(X)SA(X-XXXX)

## NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. [http://www.txdot.gov/business/producer\\_list.htm](http://www.txdot.gov/business/producer_list.htm) The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

## GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
  - 10 BWG Tubing (2.875" outside diameter)
    - 0.134" nominal wall thickness
    - Seamless or electric-resistance welded steel tubing or pipe
    - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
    - Other steels may be used if they meet the following:
      - 55,000 PSI minimum yield strength
      - 70,000 PSI minimum tensile strength
      - 20% minimum elongation in 2"
    - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
    - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
    - Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
  - Schedule 80 Pipe (2.875" outside diameter)
    - 0.276" nominal wall thickness
    - Steel tubing per ASTM A500 Gr C
    - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
      - 46,000 PSI minimum yield strength
      - 62,000 PSI minimum tensile strength
      - 21% minimum elongation in 2"
    - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
    - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
    - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

## ASSEMBLY PROCEDURE


### Foundation

- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

### Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

## CONCRETE ANCHOR

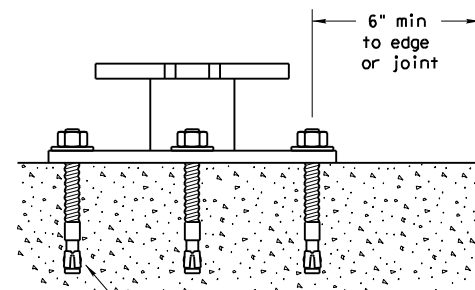


5/8" diameter Concrete Anchor - 8 places (embed a minimum of 5 1/2" and torque to min. of 50 ft-lbs). Anchor may be expansion or adhesive type.

SM RD SGN ASSM TY XXXXX(X)SB(X-XXXX)

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 8/21/2024 1:43:37 PM  
 FILE: T:\LIBERDEPSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\CON\STANDARDS\smas1.dgn



**Texas Department of Transportation**  
Traffic Operations Division





**SIGN MOUNTING DETAILS**  
**SMALL ROADSIDE SIGNS**  
**TRIANGULAR SLIPBASE SYSTEM**

**SMD(SLIP-1)-08**

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		6470	68	001	IH 10 WB FR
		DIST	COUNTY	SHEET NO.	
		BMT	CHAMBERS	57	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/21/2024 1:43:38 PM  
 FILE: T:\LIBRARY\MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BASE REP AND OVERLAY\CON-STANDARDS\smds2.dgn

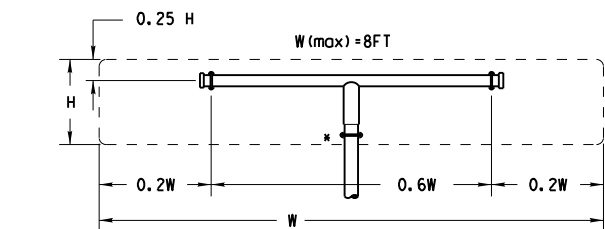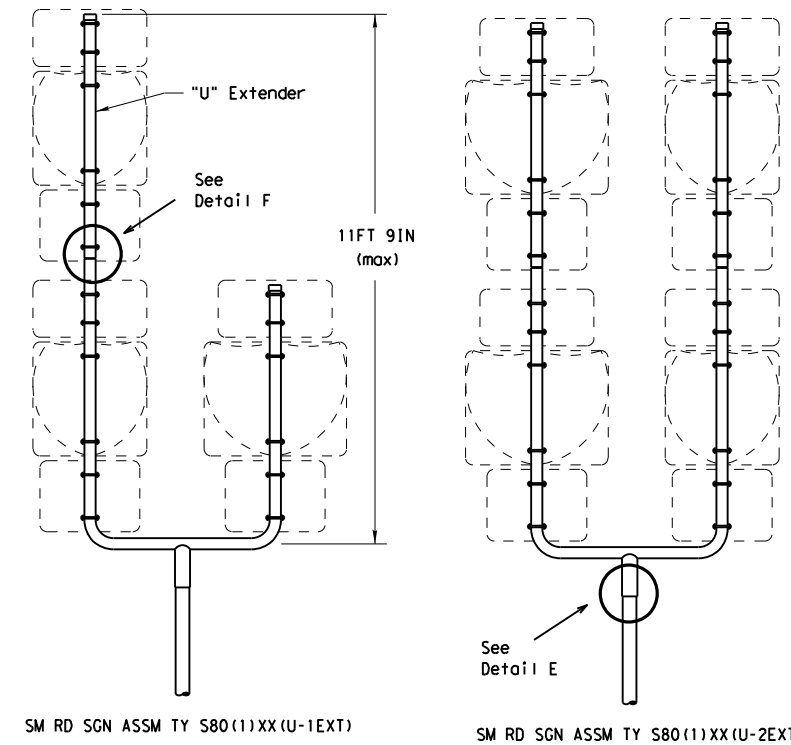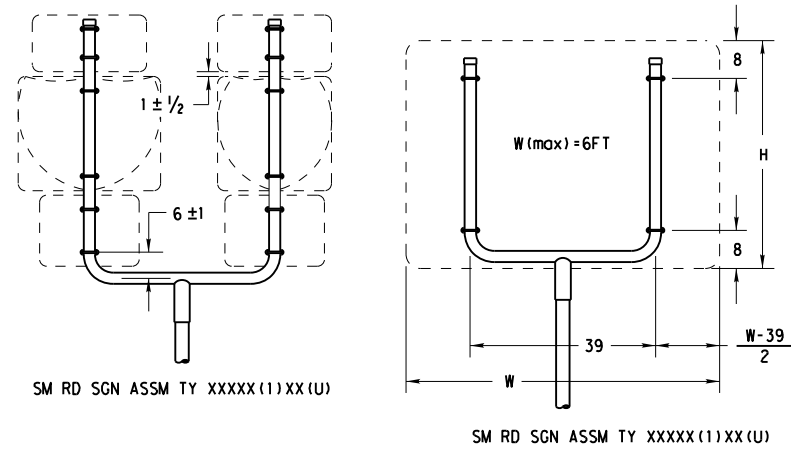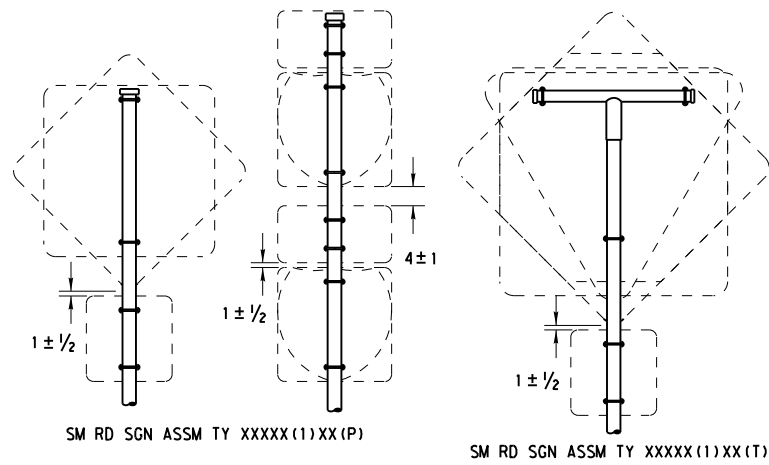


SM RD SGN ASSM TY XXXXX(1)XX(T)  
(\* - See Note 12)


All dimensions are in english unless detailed otherwise.

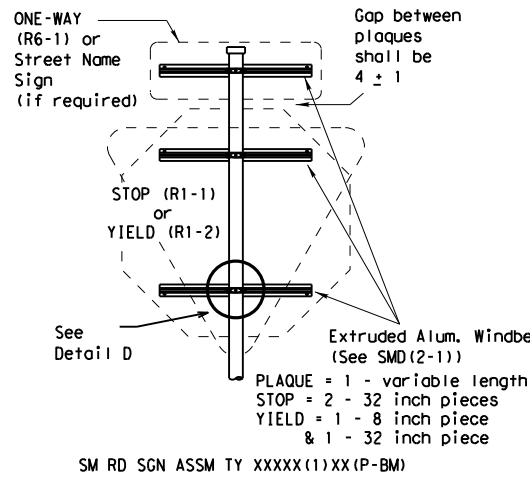


SM RD SGN ASSM TY XXXXX(1)XX(P-BM)

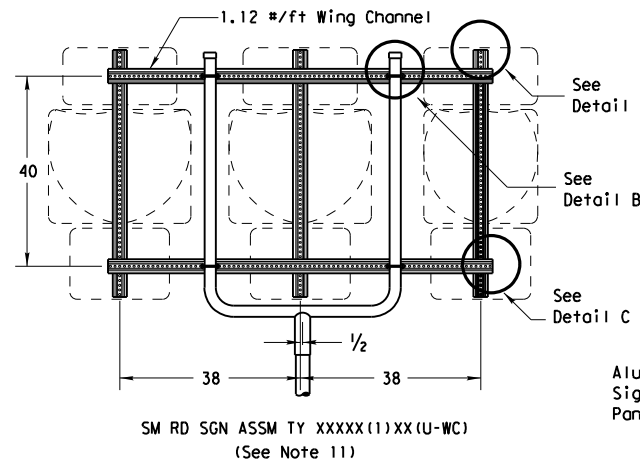


SM RD SGN ASSM TY XXXXX(1)XX(U-WC)  
(See Note 11)

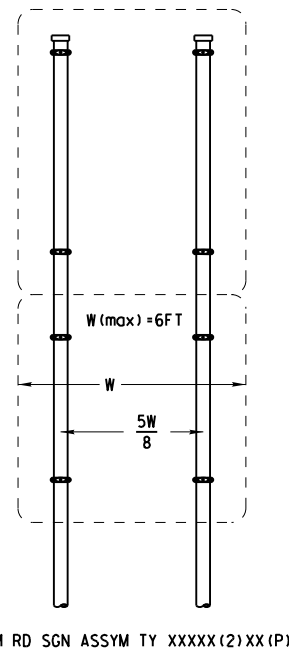


SM RD SGN ASSM TY XXXXX(2)XX(P)

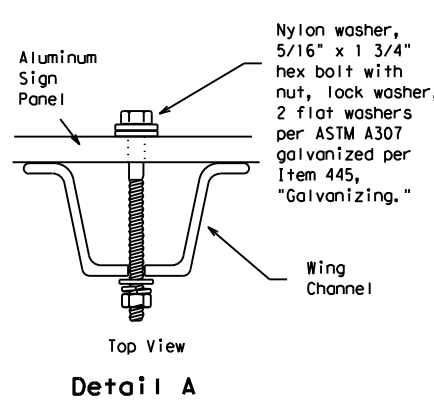

Detail A

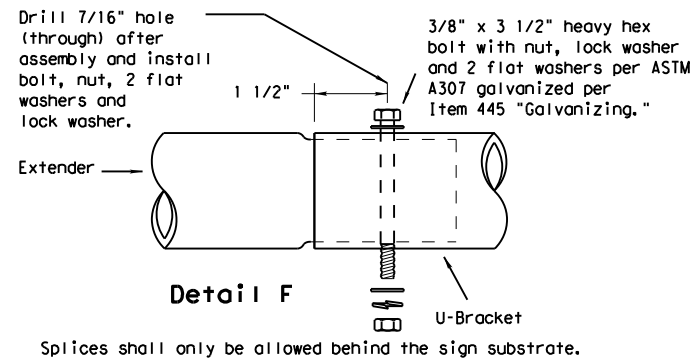


Detail F

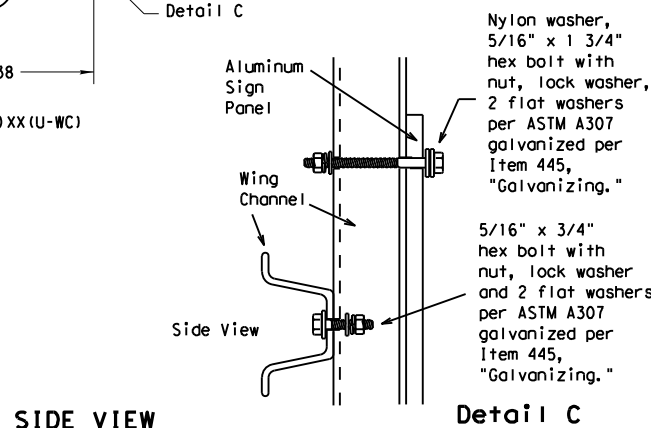


Detail C

SIDE VIEW

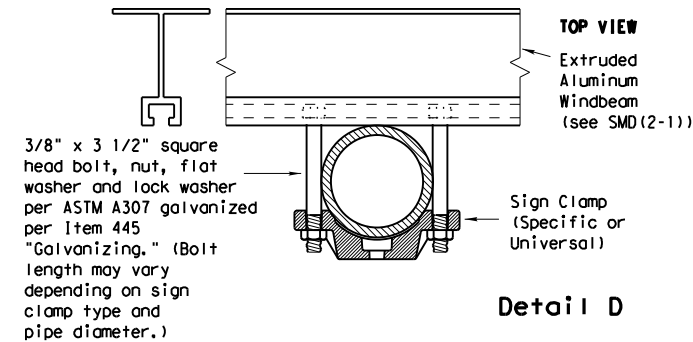


Detail D


FRICION CAP DETAIL

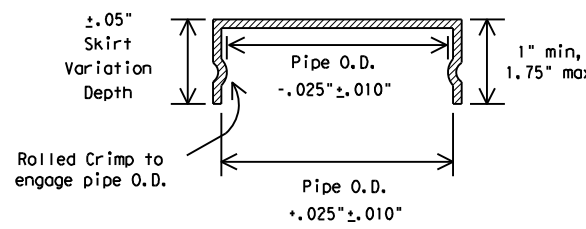

Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

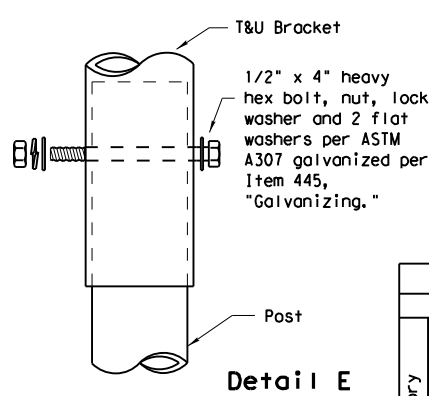

Detail E

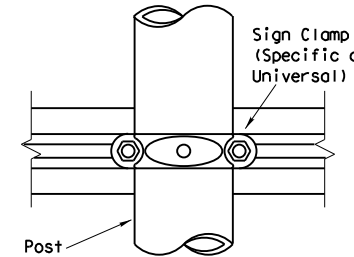

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG       | 1          | 16 SF          |
| 10 BWG       | 2          | 32 SF          |
| Sch 80       | 1          | 32 SF          |
| Sch 80       | 2          | 64 SF          |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT		
SIGN DESCRIPTION	SUPPORT	
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
Warning	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)	
Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)	



**SIGN MOUNTING DETAILS  
SMALL ROADSIDE SIGNS  
TRIANGULAR SLIPBASE SYSTEM  
SMD(SLIP-2)-08**



© TxDOT July 2002		DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CON: 6470	SECT: 68	JOB: 001	HIGHWAY: IH 10 WB FR
		DIST: BMT	COUNTY: CHAMBERS	SHEET NO.: 58	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions that may appear hereon.

DATE: 8/21/2024 1:43:39 PM  
 FILE: T:\LIBERDES\PE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB

## REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS



SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE A SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & BORDERS	ALL OTHERS	TYPE B or C SHEETING



TYPICAL EXAMPLES

## REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	ALL	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE D SHEETING
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING



TYPICAL EXAMPLES

## GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.

B	CV-1W
C	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WR
F	CV-6W

- Route sign legend (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof. White legend, symbols and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius should be trimmed or rounded.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details of roadside signs are shown in the "SMD series" Standard Plan Sheets.

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:  
<http://www.txdot.gov/>

Traffic Operations Division Standard

### TYPICAL SIGN REQUIREMENTS


#### TSR(3) - 13

FILE: tsr3-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT October 2003	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	68	001	IH 10 WB FR
12-03 7-13	DIST	COUNTY	SHEET NO.	
9-08	BMT	CHAMBERS	59	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information contained herein. TxDOT is not responsible for any damages resulting from its use.  
 DATE: 8/21/2024 1:43:41 PM  
 FILE: T:\LIBERDES\POSE MAINTENANCE\FY 25\FY 25 RMC 6470-68-001 IH-10 FR WB BMS\Signs\REGULATORY SIGNS\REGULATORY SIGNS.dgn

### REQUIREMENTS FOR RED BACKGROUND REGULATORY SIGNS

(STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)

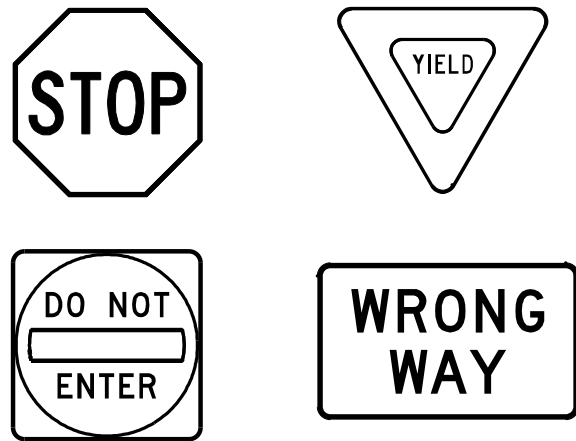

#### REQUIREMENTS FOR FOUR SPECIFIC SIGNS ONLY

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	WHITE	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE B OR C SHEETING
LEGEND	RED	TYPE B OR C SHEETING

### REQUIREMENTS FOR WHITE BACKGROUND REGULATORY SIGNS


(EXCLUDING STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)



#### TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND, BORDERS AND SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

### REQUIREMENTS FOR WARNING SIGNS

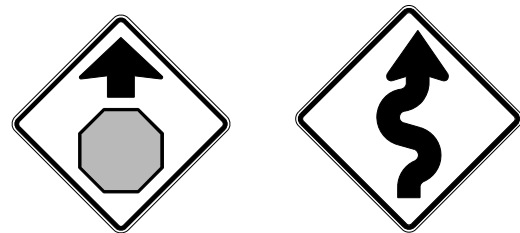

#### TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	FLOURESCENT YELLOW	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

### REQUIREMENTS FOR SCHOOL SIGNS



#### TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	FLOURESCENT YELLOW GREEN	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
SYMBOLS	RED	TYPE B OR C SHEETING

### GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- Sign legend shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend and borders shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- White legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof.
- Colored legend shall be applied by screening process with transparent colored ink, transparent colored overlay film or colored sheeting to background sheeting, or combination thereof.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details for roadside mounted signs are shown in the "SMD series" Standard Plan Sheets.

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:  
<http://www.txdot.gov/>

					Traffic Operations Division Standard
<h2>TYPICAL SIGN REQUIREMENTS</h2> <h3>TSR(4) - 13</h3>					
FILE:	tsr4-13.dgn	DW:	TxDOT	CK:	TxDOT
© TxDOT	October 2003	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS		6470	68	001	IH 10 WB FR
12-03	7-13	DIST:	COUNTY:	SHEET NO.:	
9-08		BMT:	CHAMBERS	60	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided. TxDOT is not responsible for any damages resulting from its use.

**I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402**

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

- 1. TxDOT - Beaumont District

No Action Required  Required Action

Action No.

- Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with the SW3P and revise when necessary to control pollution or as required by the Engineer.
- The project is estimated to involve less than one acre of soil disturbance. In the event the project disturbance acreage becomes equal to or greater than one acre, the CGP is applicable. Contact TxDOT project inspector for coordination with DEQC for necessary action.
- Take measures to prevent construction materials and debris including, but not limited to wastewater (i.e., cooling liquid, etc.) associated with concrete removal from entering any inlets, ditches, or waterways.

**II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404**

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions, including Regional conditions for the State of Texas, associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required: Permit # \_\_\_\_\_
- Other Nationwide Permit Required: NWP# \_\_\_\_\_

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- Maintain a neat and clean worksite next to the water and do not allow any debris to fall into the water.
- Comply with "Work In or Near Waters/Wetlands Regulatory Requirements and Best Management Practices" section found in the Beaumont District Environmental Field Guide.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

<b>Erosion</b>	<b>Sedimentation</b>	<b>Post-Construction TSS</b>
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	

**III. CULTURAL RESOURCES**

No Action Required  Required Action

Action No.

- Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

**IV. VEGETATION RESOURCES**

No Action Required  Required Action

Action No.

- No vegetation removal or trimming of any kind is allowed. Exceptions are allowed for mowed and maintained grass.

**V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.**

No Action Required  Required Action

Action No.

- If any listed species are noted in the project area, work shall cease and the TxDOT Inspector or DEQC must be notified immediately. Do not harm any encountered species.
- If caves or sinkholes are discovered on site, cease work in the area and contact the TxDOT Inspector or DEQC for guidance.
- Comply with "Wildlife: Regulatory Requirements and Best Management Practices" section found in the Beaumont District Environmental Field Guide.
- Contractor shall maintain compliance with the Migratory Bird Treaty Act (MBTA) and Texas Parks and Wildlife (TPW) Code Section 64.002. The full MBTA guidance may be found here: <https://ftp.dot.state.tx.us/pub/txdot-info/env/toolkit/350-01-gui.pdf>
- Pavement Maintenance Maintenance Program BMPs from the Maintenance EA Best Management Practices Summary Report shall be reviewed and implemented where appropriate.

**LIST OF ABBREVIATIONS**

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

**VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES**

No Action Required  Required Action

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- \* Dead or distressed vegetation (not identified as normal)
- \* Trash piles, drums, canister, barrels, etc.
- \* Undesirable smells or odors
- \* Evidence of leaching or seepage of substances
- \* Any other evidence indicating possible hazardous materials or contamination discovered on site.

List below any bridge class structure(s), not including box culverts, being replaced, rehabilitated, removed, extended or modified as part of this project, or state "None", if applicable.

If "None", then no further action is required. Otherwise TxDOT is responsible for completing asbestos assessment/inspection and evaluation for presence of lead.

Provide results below:

Structure Location	PSN	Element	Lead	Asbestos
none				

If Asbestos is present, then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary.

If Asbestos is not present, then TxDOT is still required to notify DSHS prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Hazardous Materials or Contamination Issues Specific to this Project:

Action No.

- Comply with TxDOT Standard Specification 7.12 and Special Provision 006-012 if evidence of hazardous materials or contamination is noted during construction.
- Notify TxDOT Inspector or DEQC of any hazardous materials spills including fuel, hydraulic fluid, etc.

**VII. OTHER ENVIRONMENTAL ISSUES**

(includes regional issues such as Edwards Aquifer District, etc.)

No Action Required  Required Action

Action No.

- Comply with "General Construction" section found in the Beaumont District Environmental Field Guide.

**Beaumont District Standard**

## ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS

# EPIC

FILE: epic.dgn	DN: TxDOT	CR: AM	DW: VP	CR: AR
©TxDOT February 2019	CONT	SECT	JOB	HIGHWAY
	6470	68	001	IH 10 WB FR
	DIST	COUNTY	SHEET NO.	
	BMT	CHAMBERS	61	

APPROVED BY

DATE

**DISTRICT ENVIRONMENTAL DEPARTMENT**