

FEDERAL AID PROJECT NO.			
CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY		SHEET NO.
22	MAVERICK, etc.		1

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
SEE SHEET 2	

**STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION**

**PLANS OF PROPOSED
HIGHWAY ROUTINE MAINTENANCE CONTRACT**


PROJECT NO. RMC: 6470-27-001
 PROJECT LENGTH :
 NET LENGTH = 244,569.6 FT = 46.32 MI
 PROJECT LIMITS : VARIOUS
 COUNTY : MAVERICK, ETC.
 HIGHWAY : US 277, ETC.
 RMC# 6470-27-001

FOR THE CONSTRUCTION OF SEAL COAT TYPE WORK CONSISTING OF
 SURFACE TREATMENT AND PAVEMENT MARKINGS

FINAL PLANS

LETTING DATE: _____
 DATE CONTRACTOR BEGAN WORK: _____
 DATE WORK WAS COMPLETED & ACCEPTED: _____
 FINAL CONTRACT COST: \$ _____
 CONTRACTOR : _____

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH BC (1)- 21 THRU BC (12)- 21 AND THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".

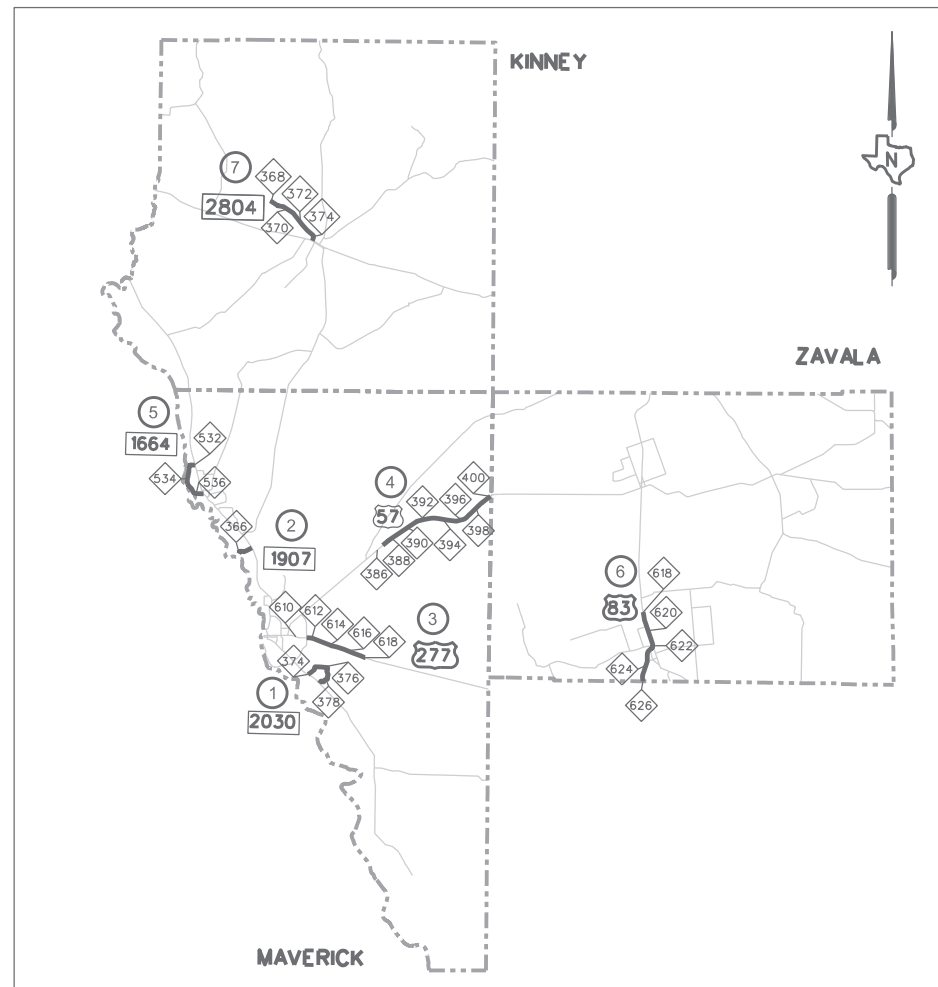

COUNTY	REF NO.	HIGHWAY	LIMITS		RMN LIMITS		LENGTH	
			FROM	TO	FROM	TO	MI	FT
MAVERICK	1	FM2030	1.95 MILES EAST OF FM1021	FM1021 SOUTH	374 -0.03	378 +0.98	5.001	26405
	2	FM1907	US277	END OF ROADWAY	366 -0.06	366 +1.59	1.641	8664
	3	US277	SL480	10,308 EAST OF US57 INTERCEPTION	610 +1.40	618 +1.28	7.876	41585
	4	US57	REF MRK 392	ZAVALA COUNTY LINE	386 +0.84	400 +0.00	13.162	69495
	5	FM1664	US277 NORTH	US277 SOUTH	532 -0.03	536 +0.78	4.811	25402
ZAVALA	6	US83	2.33 MI SOUTH OF FM1025	DIMITIT/ZAVALA COUNTY LINE	618 +0.81	626 +0.00	7.191	37968
KINNEY	7	RM2804	SL166	END	368 -0.15	374 +0.49	6.639	35054

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED WITH A SINGLE ASTERISK (*) HAVE BEEN ISSUED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

6/21/2024

DocuSigned by:
Vanessa Rosales-Herrera
 70CAB6EA8F3B42B...



SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, SEPTEMBER 1, 2024 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: SPECIAL LABOR PROVISIONS FOR STATE PROJECTS (000-008)

EXCEPTIONS: NONE
 EQUATIONS: NONE
 RAILROAD CROSSINGS: NONE




REC'D: 6/24/2024
 DocuSigned by:
Hyoung Ahn
 D1B0932D1D704C0... F MAINTENANCE

REC'D: 6/21/2024
 DocuSigned by:
Vanessa Rosales-Herrera
 70CAB6EA8F3B42B...

DW:
 CK:
 DW:
 CK:

1	TITLE SHEET
2	INDEX OF SHEETS
3-5	COUNTY LOCATION MAPS
6-7	TYPICAL SECTIONS
8-10	GENERAL NOTES
11	TCP GENERAL NOTES
12	TCP SEQUENCE OF CONSTRUCTION
13	ESTIMATE AND QUANTITIES
14-15	SUMMARY OF QUANTITIES
16-22	RPM DETAILS
23-34	BC (1)-21 THRU BC (12)-21
35	PM(1)-22
36	PM(2)-22
37	PM(3)-22
38	PM(4)-22A
39	PM(5)-22
40	RCD(1)-22
41	RCD(2)-22
42	RS(1)-23
43	RS(2)-23
44	RS(3)-23
45	RS(4)-23
46	RS(5)-23
47	TCP (3-1)-13
48	TCP (3-2)-13
49	TCP (3-3)-14
50	TCP (3-4)-13
51	TCP(SC-1)-22
52	TCP(SC-2)-22
53	TCP(SC-3)-22
54	TCP(SC-4)-22
55	TCP(SC-5)-22
56	TCP(SC-6)-22
57	TCP(SC-7)-22
58	TCP(SC-8)-22
59	TS2(PL-1)-23
60	TS2(PL-2)-23
61	WZ (STPM)-23
62	WZ (BRK)-13
63	WZ (TD)-17
64	WZ (UL)-13
65	EPIC

DATE: 6/21/2024 5:00:33 PM
 FILE: T:\LRDDST\TNT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\Index.dgn




INDEX OF SHEETS

© TxDOT 2024 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST		COUNTY	SHEET NO.
22		MAVERICK, etc.	2

CK
DW
CK
DN

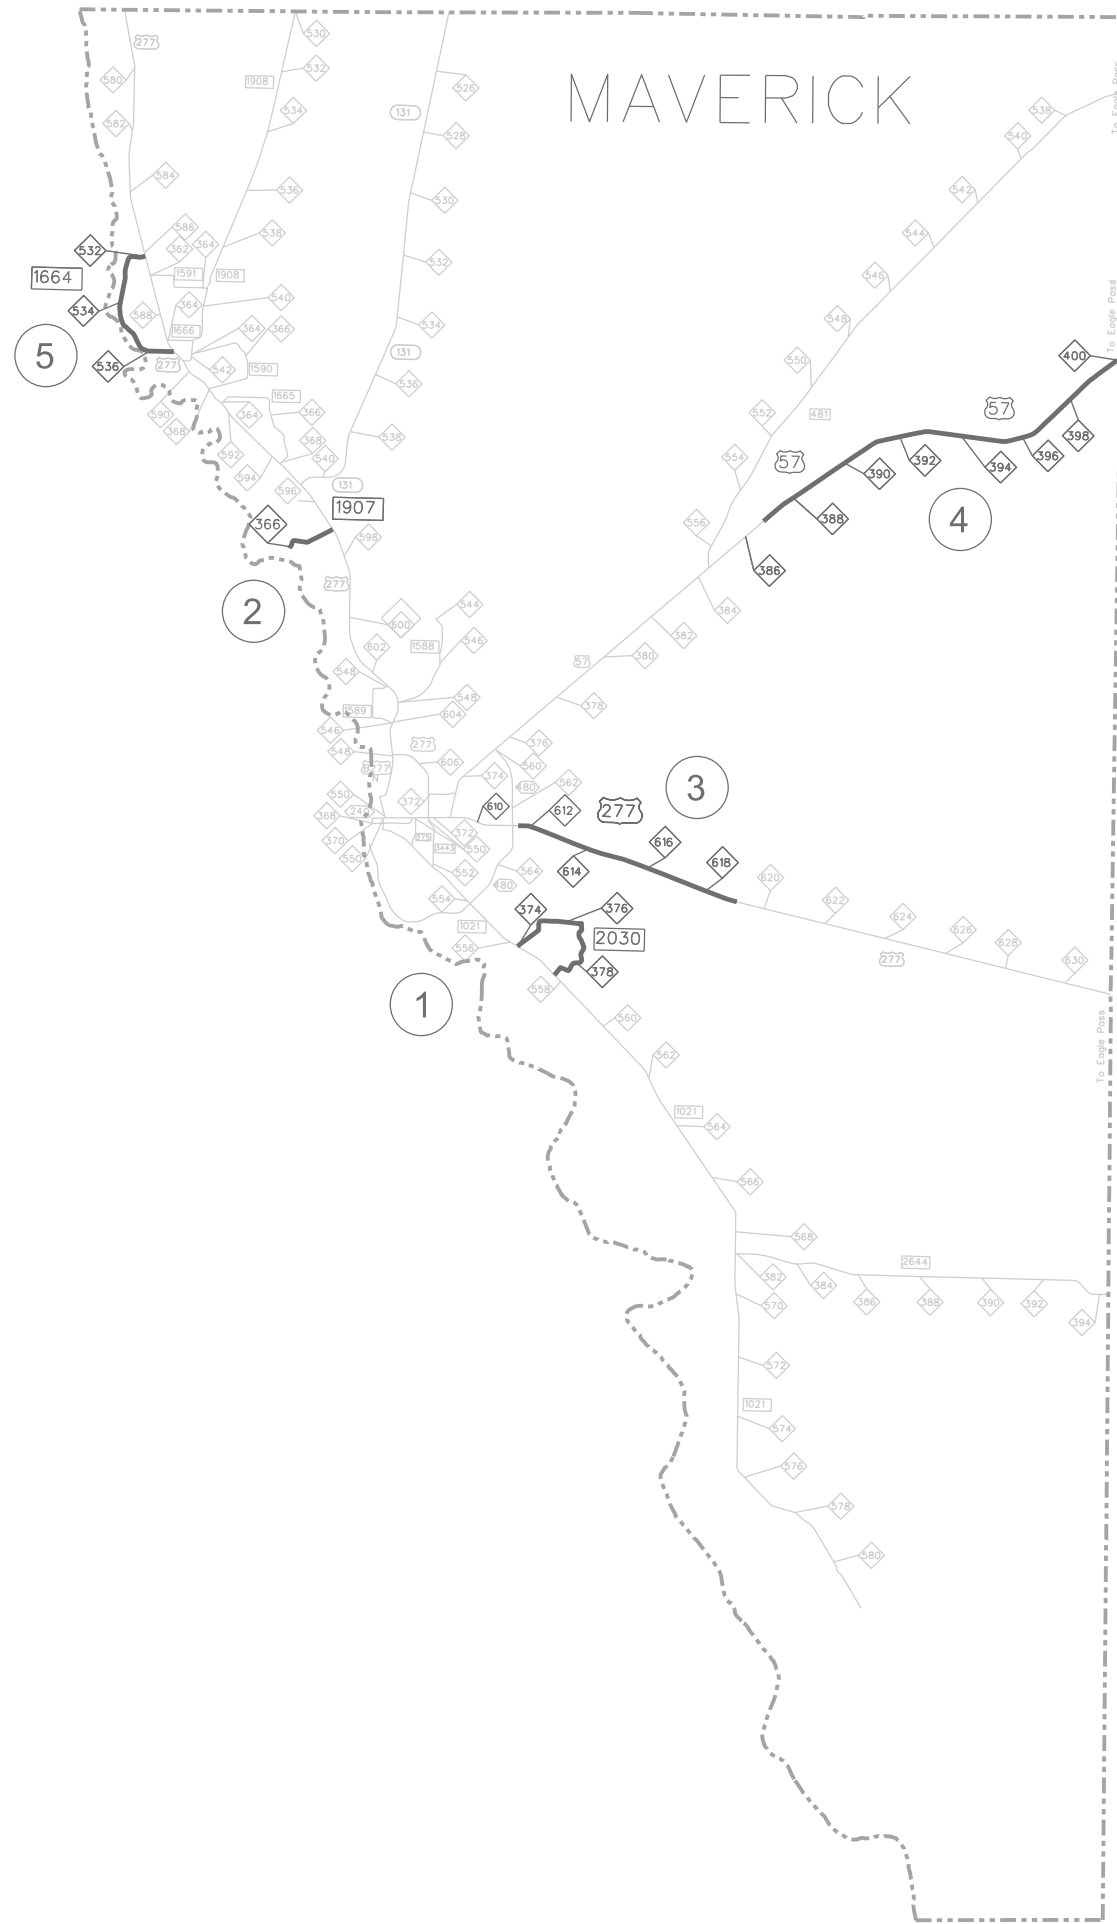

COUNTY	REF NO.	HIGHWAY	LIMITS		RMN LIMITS		LENGTH	
			FROM	TO	FROM	TO	MI	FT
MAVERICK	1	FM2030	1.95 MILES EAST OF FM1021	FM1021 SOUTH	374 -0.03	378 +0.98	5.001	26405
	2	FM1907	US277	END OF ROADWAY	366 -0.06	366 +1.59	1.641	8664
	3	US277	SL480	10.308 EAST OF US57 INTERCEPTION	610 +1.40	618 +1.28	7.876	41585
	4	US57	REF MRK 392	ZAVALA COUNTY LINE	386 +0.84	400 +0.00	13.162	69495
	5	FM1664	US277 NORTH	US277 SOUTH	532 -0.03	536 +0.78	4.811	25402

LOC #	HWY	PSN#	TYPE	LENGTH (FT.)
1	FM 2030	22-159-0-1229-06-020	CLV	32
3	US 277	22-159-0-0300-01-003	CLV	29
3	US 277	22-159-0-0300-01-004	SPAN	45
3	US 277	22-159-0-0300-01-006	CLV	46
4	US 57	22-159-0-0276-02-093	CLV	29
4	US 57	22-159-0-0276-02-027	CLV	24
4	US 57	22-159-0-0276-02-066	SPAN	600
4	US 57	22-159-0-0276-02-029	CLV	29
4	US 57	22-159-0-0276-02-031	CLV	23
4	US 57	22-159-0-0276-02-078	CLV	85
4	US 57	22-254-0-0276-03-069	CLV	86

DATE: 6/21/2024 5:00:34 PM
 FILE: T:\LRD\STMT\NTFY 2024\MINT Contract (FY24)\Seal Coat\CAD\LocationMaps.dgn



MAVERICK COUNTY
LOCATION MAP


© TxDOT 2024 SHEET 1 OF 3

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY	SHEET NO.	
22	MAVERICK	3	

CK:
DW:
CK:
DN:

COUNTY	REF NO.	HIGHWAY	LIMITS		RMN LIMITS		LENGTH	
			FROM	TO	FROM	TO	MI	FT
ZAVALA	6	US83	2.33 MI SOUTH OF FM1025	DIMITT/ZAVALA CONTY LINE	618 +0.81	626 +0.00	7.191	37968

LOC #	HWY	PSN#	TYPE	LENGTH (FT.)
6	US 83	22-254-0-0037-03-050	CLV	34
6	US 83	22-254-0-0037-03-051	CLV	22
6	US 83	22-254-0-0037-03-049	SPAN	1210

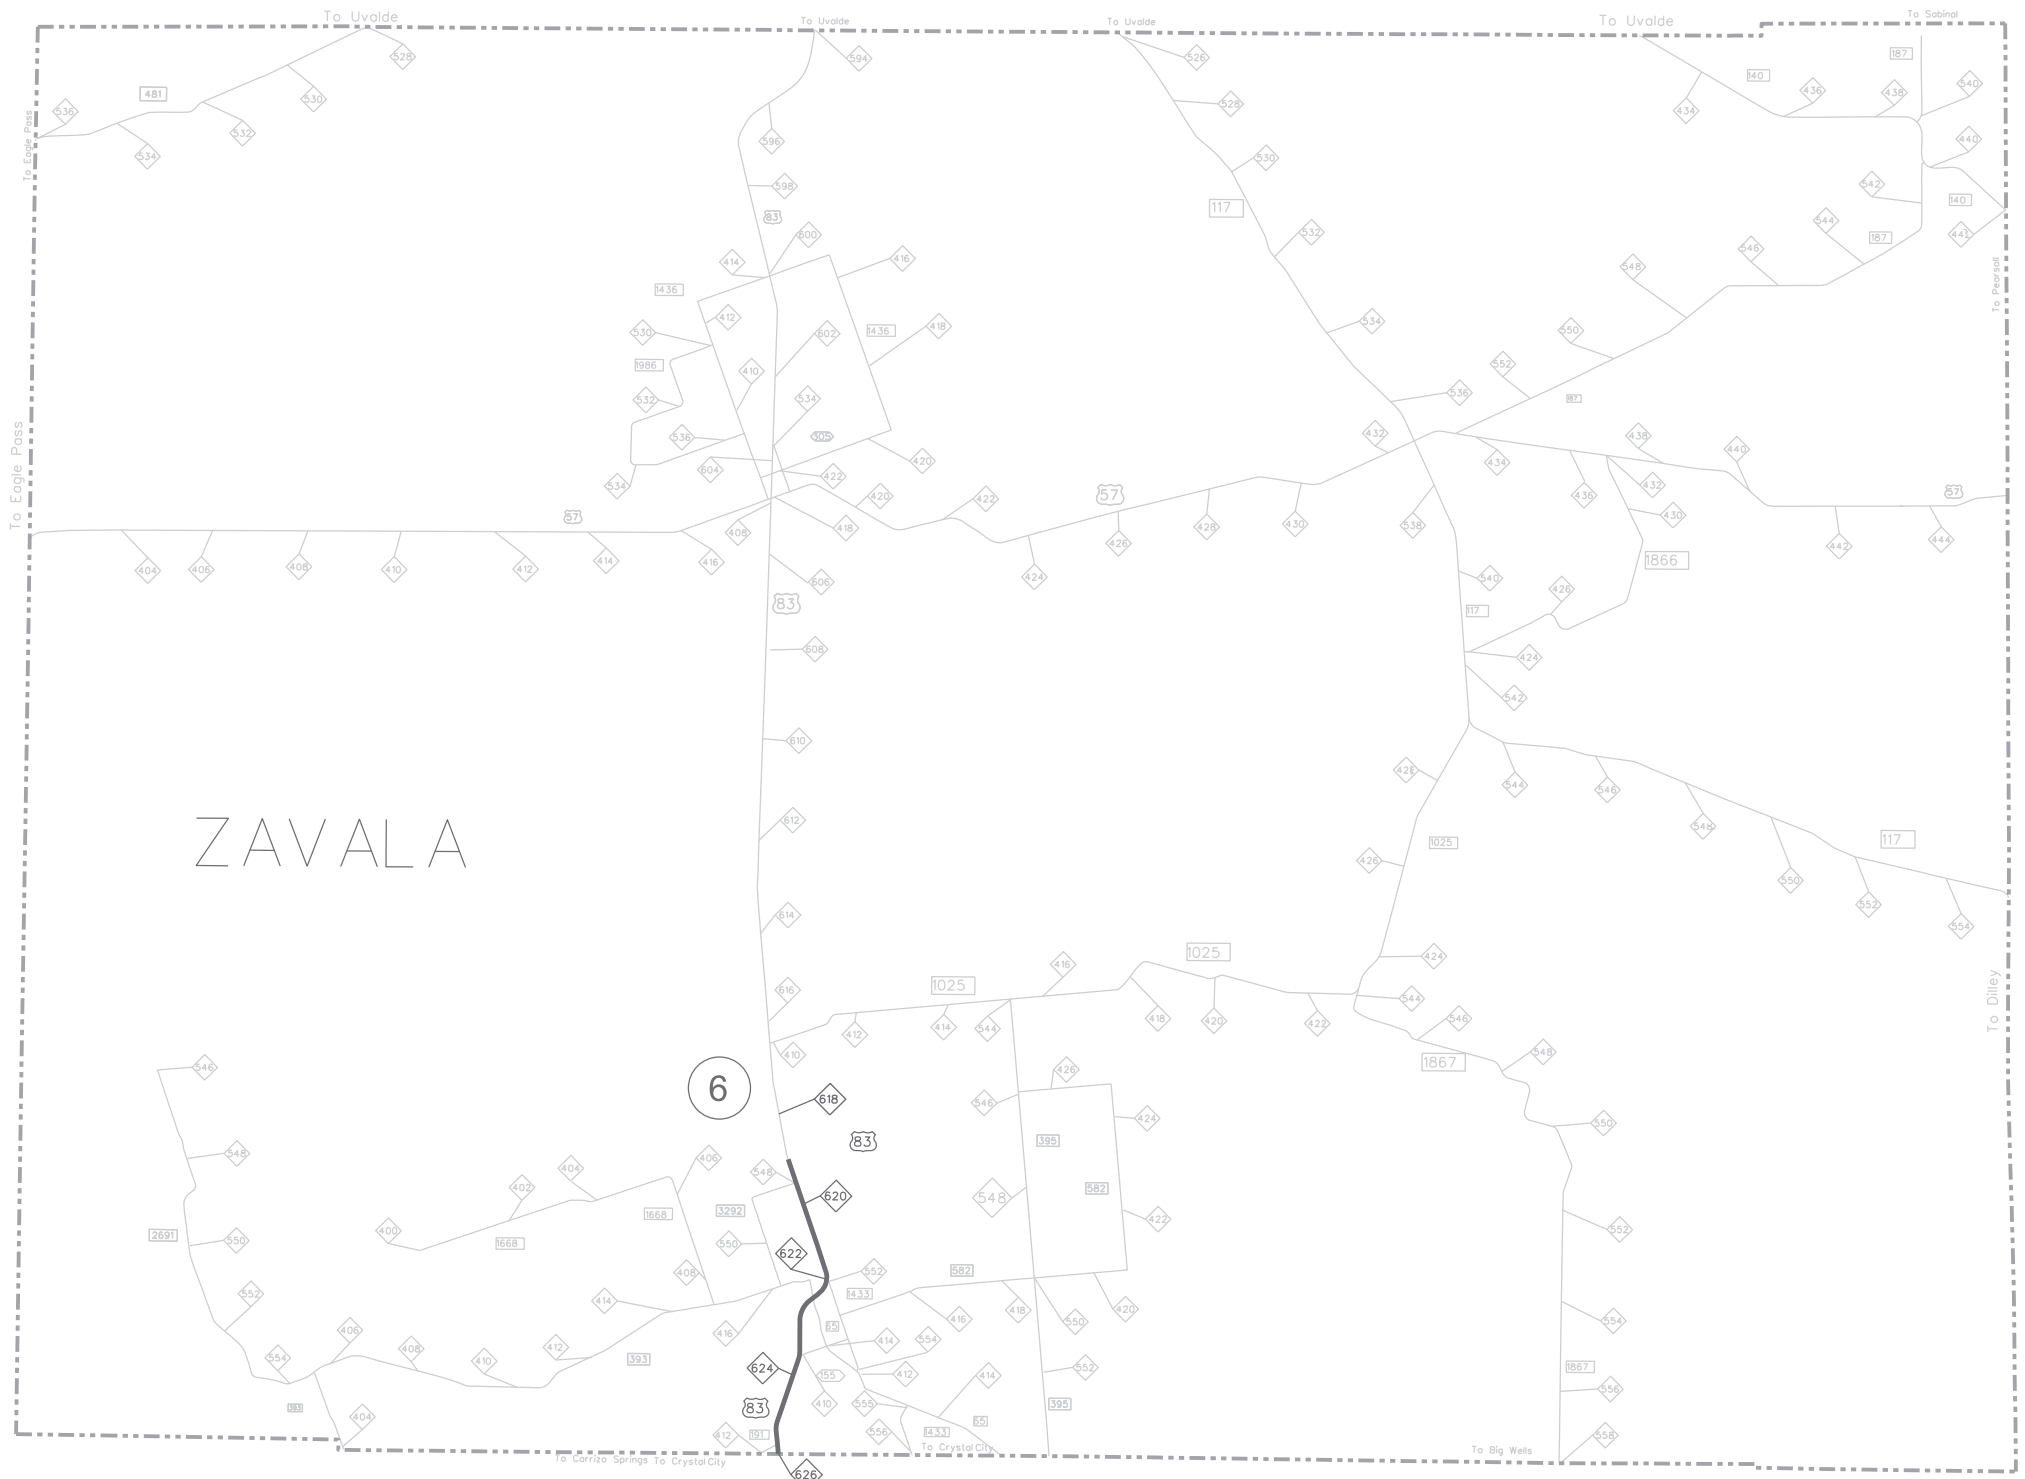

DATE: 6/21/2024 5:00:34 PM
 FILE: T:\LRDD\TMT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\LocationMaps.dgn




ZAVALA COUNTY
LOCATION MAP

© TxDOT 2024 SHEET 2 OF 3

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY	SHEET NO.	
22	ZAVALA	4	

CK:
DW:
CK:
DN:

COUNTY	REF NO.	HIGHWAY	LIMITS		RMN LIMITS		LENGTH	
			FROM	TO	FROM	TO	MI	FT
KINNEY	7	RM2804	SL166	END	368 -0.15	374 +0.49	6.639	35054

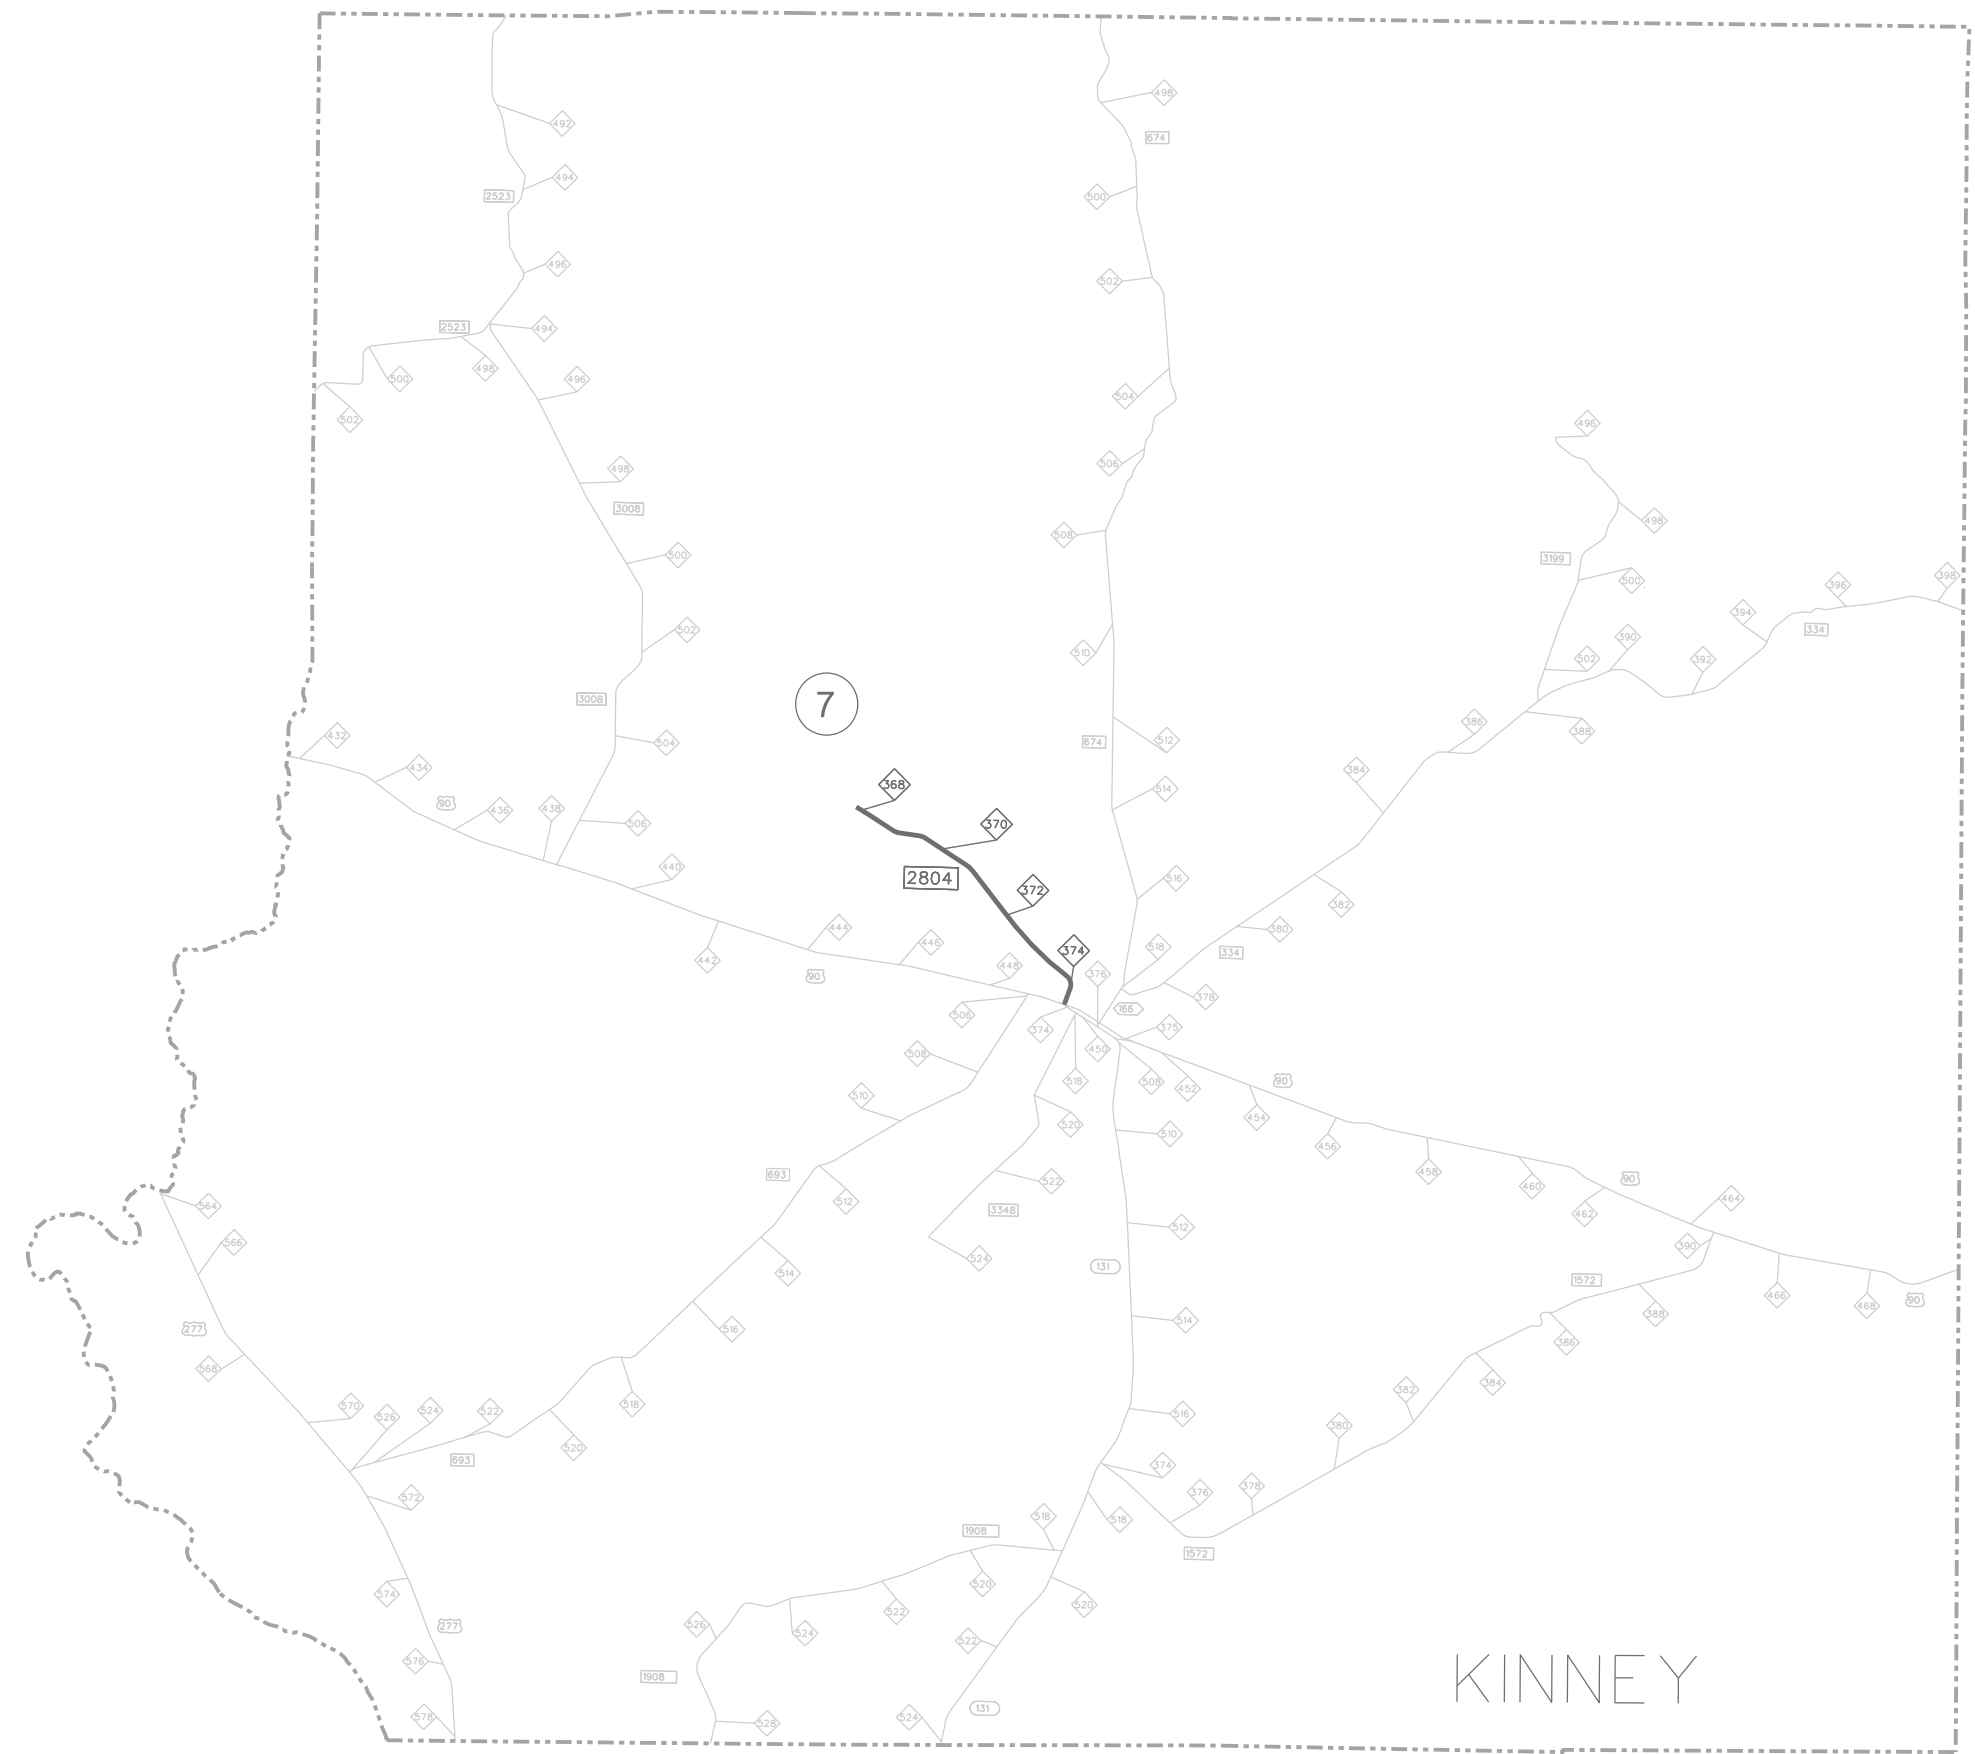

DATE: 6/21/2024 5:00:34 PM
FILE: T:\LRD\STIMNT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\LocationMaps.dgn



KINNEY COUNTY
LOCATION MAP

© TxDOT 2024 SHEET 3 OF 3

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY	SHEET NO.	
22	KINNEY	5	

DWG:
 CK:
 DN:

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA
	A	B				
LT	LT	TOTAL	RT	RT		
FT	FT	FT	FT	FT	FT	SY
2	12	24	12	2	28	38044
0	12	24	12	0	24	37805
TOTAL						75,849

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
2	MAVERICK	1	FM2030	3	0.38	90.00	PD	12228
1	MAVERICK	1	FM2030	3	0.38	90.00	PD	14177
								26405

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA
	A	B				
LT	LT	TOTAL	RT	RT		
FT	FT	FT	FT	FT	FT	SY
0	12	24	12	0	24	23105
TOTAL						23,105

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
1	MAVERICK	2	FM1907	3S	0.38	90.00	PB	8664.48
								8664.48

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA
	A	B				
LT	LT	TOTAL	RT	RT		
FT	FT	FT	FT	FT	FT	SY
8	12	24	12	8	40	24100
2	24	36	12	8	46	49386
8	12	24	12	8	40	11616
2	24	36	12	8	46	55404
8	12	24	12	8	40	57986
TOTAL						198,492

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
2	MAVERICK	3	US0277	3	0.38	90.00	PD	5422.56
2	MAVERICK	3	US0277	3	0.38	90.00	PD	9662.4
2	MAVERICK	3	US0277	3	0.38	90.00	PD	2613.6
2	MAVERICK	3	US0277	3	0.38	90.00	PD	10839.84
2	MAVERICK	3	US0277	3	0.38	90.00	PD	13046.88
								41585.28

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA
	A	B				
LT	LT	TOTAL	RT	RT		
FT	FT	FT	FT	FT	FT	SY
8	12	36	24	4	48	7744
4	24	48	24	4	56	22537
4	24	36	12	8	48	22810
8	12	24	12	8	40	36937
8	12	36	24	4	48	5519
4	24	48	24	4	56	21585
8	12	36	24	4	48	18051
8	12	24	12	8	40	34825
3	24	36	12	8	47	39209
8	12	24	12	8	40	64041
8	12	36	24	4	48	36805
4	24	48	24	4	56	7918
4	24	36	12	8	48	5914
8	12	24	12	8	40	21824
TOTAL						345717

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
2	MAVERICK	4	US0057	3	0.38	90.00	PD	1452.00
2	MAVERICK	4	US0057	3	0.38	90.00	PD	3622.08
2	MAVERICK	4	US0057	3	0.38	90.00	PD	4276.80
2	MAVERICK	4	US0057	3	0.38	90.00	PD	8310.72
2	MAVERICK	4	US0057	3	0.38	90.00	PD	1034.88
2	MAVERICK	4	US0057	3	0.38	90.00	PD	3468.96
2	MAVERICK	4	US0057	3	0.38	90.00	PD	3384.48
2	MAVERICK	4	US0057	3	0.38	90.00	PD	7835.52
2	MAVERICK	4	US0057	3	0.38	90.00	PD	7508.16
2	MAVERICK	4	US0057	3	0.38	90.00	PD	14409.12
2	MAVERICK	4	US0057	3	0.38	90.00	PD	6900.96
2	MAVERICK	4	US0057	3	0.38	90.00	PD	1272.48
2	MAVERICK	4	US0057	3	0.38	90.00	PD	1109
2	MAVERICK	4	US0057	3	0.38	90.00	PD	4910
								69495

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA
	A	B				
LT	LT	TOTAL	RT	RT		
FT	FT	FT	FT	FT	FT	SY
0	11	22	11	0	22	62094
TOTAL						62,094

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
1	MAVERICK	5	FM1664	3S	0.38	90.00	PB	25402.08
								25402.08

NOTES:



APPLICATION RATES NOTED IN PLANS ARE FOR BIDDING AND ESTIMATION PURPOSES ONLY. ACTUAL APPLICATION RATES SHALL BE DETERMINED AND ADJUSTED AS NECESSARY.

SPAN BRIDGES HAVING CONCRETE AS A RIDING SURFACE WILL NOT BE SURFACE TRATED.

AT BRIDGE LIMITS, A CLEAN LINE SHALL BE ESTABLISHED.

RATES OF APPLICATION

REFER TO TABLE FOR ASPHALT BINDER AND AGGREGATES APPLICATION RATES.

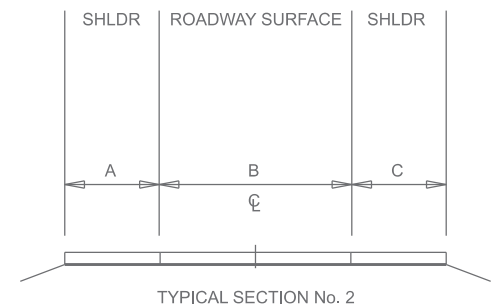

The seal appearing on this document was authorized by VANESSA I ROSALES-HERRERA P.E. 103736 on 6/21/2024

DocuSigned by:
Vanessa Rosales-Herrera
 70CAB6EA8F3B42B...



TYPICAL SECTIONS

© TxDOT 2024		SHEET 1 OF 2	
CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY		SHEET NO.
22	MAVERICK, etc.		6

CK: DW: CK: DN:

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA	
	A	B					C
	LT	TOTAL	RT				RT
FT	FT	FT	FT	FT	FT	SY	
12	12	24	12	12	48	34937	
1	24	36	12	12	49	8337	
1	24	48	24	1	50	26811	
8	23	46	23	8	62	12040	
0	31	62	31	0	62	26589	
0	31.5	63	31.5	0	63	6653	
0	34	66	32	0	66	4259	
0	24	48	24	0	48	1690	
8	12	24	12	8	40	63477	
1	19	38	19	1	40	14764	
TOTAL						199556	

DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
2	ZAVALA	6	US0083	3	0.38	90.00	PD	6550.76
2	ZAVALA	6	US0083	3	0.38	90.00	PD	1531.20
2	ZAVALA	6	US0083	3	0.38	90.00	PD	4825.92
2	ZAVALA	6	US0083	3	0.38	90.00	PD	1747.68
1	ZAVALA	6	US0083	3	0.38	90.00	PD	3859.68
1	ZAVALA	6	US0083	3	0.38	90.00	PD	950.40
1	ZAVALA	6	US0083	3	0.38	90.00	PD	580.80
1	ZAVALA	6	US0083	3	0.38	90.00	PD	316.80
2	ZAVALA	6	US0083	3	0.38	90.00	PD	14282.40
2	ZAVALA	6	US0083	3	0.38	90.00	PD	3321.92
								37968

SHLDR WIDTH	ROADWAY WIDTH (TRAVEL LANES)			SHLDR WIDTH	SEALCOAT WIDTH	SEALCOAT AREA	
	A	B					C
	LT	TOTAL	RT				RT
FT	FT	FT	FT	FT	FT	SY	
0	13	26	13	0	26	75755	
0	12	25	13	0	25	24531	
TOTAL						100,286	




DESCRIPTION								
TYPICAL SECTION	COUNTY	REF No.	HIGHWAY	GRADE	ASPH RATES (GAL/SY)	AGGR RATES (SY/CY)	AGGR Type	LENGTH (FT)
1	KINNEY	7	RM2804	3S	0.38	90.00	PB	26223.00
1	KINNEY	7	RM2804	3S	0.38	90.00	PB	8831.00
								35054.00

NOTES:
 APPLICATION RATES NOTED IN PLANS ARE FOR BIDDING AND ESTIMATION PURPOSES ONLY. ACTUAL APPLICATION RATES SHALL BE DETERMINED AND ADJUSTED AS NECESSARY.

SPAN BRIDGES HAVING CONCRETE AS A RIDING SURFACE WILL NOT BE SURFACE TREATED.

AT BRIDGE LIMITS, A CLEAN LINE SHALL BE ESTABLISHED.

RATES OF APPLICATION
 REFER TO TABLE FOR ASPHALT BINDER AND AGGREGATES APPLICATION RATES.

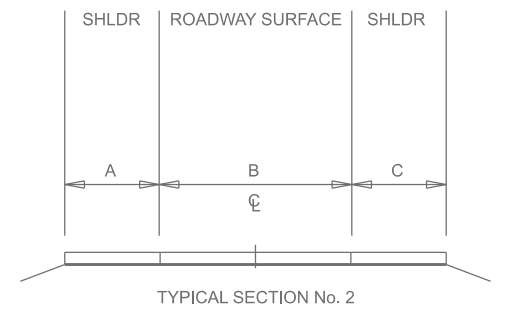

The seal appearing on this document was authorized by VANESSA I ROSALES-HERRERA P.E. 103736-02 6/21/2024

DocuSigned by:
Vanessa Rosales-Herrera
 70CAB6EA8F3B42B...



TYPICAL SECTIONS

© TxDOT 2024		SHEET 1 OF 2	
CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY	SHEET NO.	
22	MAVERICK, etc.	7	

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

GENERAL NOTES:

This contract is for the seal coat project of various counties which include Maverick, Kinney, and Zavala. Contract becomes effective upon the issuance of a Work Order by the Engineer and extends through a period of 120 Working Days. Request to use additional crews will require approval by the Engineer.

Contractor questions on this project are to be emailed to the following individual(s):

Angel Alejo at Angel.Alejo@txdot.gov
Irazema Cavazos at Irazema.Cavazos@txdot.gov

Questions may be submitted via the Letting Pre-bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

All questions submitted that generate a response will be posted through this site. This site is organized by: District, Project type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Plans may be reviewed at Laredo District office of the Texas Department of Transportation, 1817 Bob Bullock Loop, Laredo, Texas 78043. The contact persons are Angel Alejo at Angel.Alejo@txdot.gov and Irazema Cavazos at Irazema.Cavazos@txdot.gov

Questions concerning the specifications, work requirements, etc. of this contract should be directed to Vanessa Rosales-Herrera, P.E., at Vanessa.Rosales@txdot.gov.

Arrange a Pre-work Meeting between representatives of the State and the Contractor prior to beginning work. Outline the proposed work and submit plans for performing the work while always providing a safe passage for traffic. Access is available to the TxDOT Maintenance Yard during normal working hours only.

Repair any damages incurred to existing fences, signs, sign posts, curbs, or any other appurtenances caused by equipment or personnel to its original condition or as directed by the Engineer.

Maintain the right-of-way in a satisfactory appearance as shown in the plans and/or as approved by the Engineer.

Perform work expeditiously during daylight hours.

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

Conform to the Texas Manual on Uniform Traffic Control Devices (TMUTCD) for sign types for which details are not shown in the plans.

Remove all existing raised pavement markings as the work progresses or as approved by the Engineer. The work will not be paid for separately but will be subsidiary to the various bid items.

Materials removed become the property of the Contractor for proper disposal. Maintain the roadway surface and work zone striping within the project limit while the traffic control plan is in effect.

When working near aerial electrical lines and/or utility poles, provide adequate safety measures as needed to comply with the appropriate sections of Federal and State Regulations.

SUPERVISION

Prior to beginning work each day, meet with the respective Maintenance Supervisor. Discuss times, places, Contractor inspections and all other issues of the day or topics as directed by the Engineer.

For this project, the Maintenance Supervisors in charge are:

Maverick County
Charles Fite
2440 Main St.
Eagle Pass, TX 78852
(830)773-2617

Zavala County
Arnulfo Longoria
544 W US 57
Pryor, TX 78872
(830)365-4211

Kinney County
Brandon Baxter
918 East Military Highway
Brackettville, TX 78832
(830)563-2326

ITEM 5 - CONTROL OF THE WORK

Reference all existing striping and pavement markings in a manner which allow the passing/no passing zones to be re-established. Place extra reference (if needed) to ensure the markings (lane lines, edge lines, ramp gores, etc.) are in-line with signs on OSB's, TMS arrows, etc.

ITEM 7 - LEGAL RELATIONS & RESPONSIBILITIES

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

Roadway closures during the following key dates and/or special events are prohibited: January 1, Easter Weekend, the last Monday in May, July 4, the first Monday in September, the fourth Thursday in November, and December 25.

ITEM 8 - PROSECUTION AND PROGRESS

Before starting work, provide a sequence of work and estimated progress schedule meeting the requirements of Section 8.5.2, "Progress Schedule."

Nighttime work will be allowed to be performed, as approved and directed by the Engineer. Refer to the Sequence of Work, Traffic Control Plan, etc. shown in the plans, for other details. The usual open season for application of asphalt is from: April 1st to September 30th, or as approved in writing by the Engineer. The late start date for the project is May 1st to coincide with the end of the asphalt season. The minimum temperature requirements should be followed for the application of asphalt outside these dates.

ITEM 9 - MEASUREMENT AND PAYMENT

For payment through TxDOT state force account method, complete the weekly tracking forms provided by the department and submit invoices that agree with the tracking form for payment at the end of each month approved services were provided.

Submit Material on hand (MOH) payment requests at least X working days prior to the end of the month for payment on that month's estimate. For out-of-town MOH submit requests at least 10 working days prior to the end of the month.

ITEM 316 - SEAL COAT

The usual open season for application of asphalt is from: April 1st to September 30th. The minimum temperature requirements should be followed for the application of asphalt outside these dates.

All asphalt and aggregate tickets must be submitted for payment and project closure.

Remaining aggregate stockpiles must be removed no later than 30 days after all roadway locations have been sealed, unless otherwise approved by the Director of Maintenance. After this period, the aggregate becomes property of the state.

In accordance with SP 316-001, Certifications are required for department and contractor personnel.

Remove excess accumulated rock (Windrow) from edge of pavement swept by brooms. Self-propelled broom sweeper working properly and have an approved bristle size. Approved thermal probe, gauge method for temperature reading, easy and safe access.

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

Use vacuum sweeper in curb and gutter sections.
Clean area with approved method.

ITEM 438 - CLEANING AND SEALING JOINS

The contractor will advise the Engineer of any loose or damaged seal joint areas not noted in the plans. Upon approval from the Engineer, these areas will be addressed and the Contractor compensated for such additional work.

After cleaning and sealing of joints, care will be taken to assure that the bent caps and abutment seats are clean of all debris. Cleaning and removal of this excess material will not be paid for directly but will be subsidiary to this item.

Class 3 – hot poured rubber sealant shall be used with ACP overlay.
Class 4 -low modulus silicone, nonsag shall be used on vertical faces on bridge elements.
Class 7 -low modulus silicone, rapid curing, self-leveling shall be used without ACP overlay and existing armor joints.
Refer to the 2024 Standard Specification for additional information.

ITEM 500 - MOBILIZATION

"Materials-on-Hand" payments will not be considered in determining percentages used to compute mobilization payments.

ITEM 502 - BARRICADE, SIGNS AND TRAFFIC HANDLING

Designate, as the Contractor Responsible Person (CRP), an English-speaking employee on-call nights and weekends (or any other time that work is not in progress) with a local address and telephone number for maintenance of signs and barricades. This employee will be located within one (1) hour of traveling time to the project site. Notify the Engineer in writing of the name, address and telephone number of this employee. Furnish this information to local law enforcement officials.

Comply with Article 7.2., "Safety."

The time frame for the Contractor to provide properly maintained traffic control devices before they are considered to be in non-compliance with this Item is 48-hours regardless of the days of the week involved after notification is done in writing by the Engineer.

When advanced warning flashing arrow panel(s) is/are specified, it is required to maintain one standby unit in good condition at the job site ready for immediate use.

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

Provide two-way radios in areas where flagmen do not have visual contact with one another or cannot communicate with one another.

Provide shadow vehicles equipped with Truck Mounted Attenuators (TMA) as shown on Traffic Control Plan (TCP) standards. TMAs shall conform to the requirements established in the TMUTCD and the Department's Compliant Work Zone Traffic Control List.

Limit lane closures to a maximum of 2 miles. If more than one lane closure location is desired, provide a minimum of a 2 mile passing zone between locations. Provide a separate sign set up for each location.

Ensure equipment not in use, stockpile aggregate, and other working materials are:

A minimum of 30 feet from the edge of the travel lane.
Do not obstruct traffic or sight distance.
Do not interfere with the access from abutting property; or
Do not interfere with roadway drainage.

Erect signs in locations not obstructing the traveling public's view of the normal roadway signing or necessary sight distance at intersections and curves.

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

ITEM 503 - PORTABLE CHANGEABLE MESSAGE SIGN

Provide two (2) electronic portable changeable message signs as required by the Engineer. Provide backups and keep operational and available on the jobsite at all times during traffic control operations. The electronic portable changeable message signs will be made available for utilization for the entire duration of the project, including all alternative locations.

ITEM 505 - TRUCK MOUNTED ATTENUATOR (TMA) AND TRAILER

Provide 2 Truck Mounted Attenuators as required by the Engineer. Provide backup and keep operational and available on the jobsite at all times during traffic control operations. The Truck Mounted Attenuators will be made available for utilization for the entire duration of the project, including all alternative locations.

ITEM 510 - ONE-WAY TRAFFIC CONTROL

Project Number: RMC: 6470-27-001
Highway: US 277, ETC.

County: Maverick, etc.
Control: 6470-27-001

ITEM 666 - REFLECTORIZED PAVEMENT MARKINGS

Reflectivity requirements for Type I will be as per Item 666.

Pavement sealer for pavement markings will be a Type II marking and will be installed after a minimum time of 7 days and not later than 14 days after the placement of the surface treatment, unless otherwise approved by the Engineer.

Install Type I pavement marking after a minimum of 7 days after the placement of pavement sealer, unless otherwise approved by the Engineer.


Payment on Type I markings requiring retroreflective testing will be made at a 75% rate until passing test results are received.

TCP GENERAL NOTES:

1. This is a suggested Traffic Control Plan (TCP). The Contractor may submit an alternate Traffic Control Plan, signed and sealed by a Licensed Professional Engineer in Texas, for approval by the Engineer. When mutually beneficial changes are proposed to the existing Traffic Control Plan and are agreed upon by the Contractor and the Department, the plan sheets may be developed and signed and sealed by the Engineer.
2. Refer to Item 8, "Prosecution and Progress" and project General Notes for additional information regarding the Traffic Control Plan.
3. Furnish and install all Traffic Control devices, including but not limited to barricades, signs, and work zone markings, in compliance with the latest version of the Texas Manual on Uniform Traffic Control Devices (TxMUTCD), the State Standard Traffic Control Plans (TCP) sheets, and the Barricades and Construction (BC) sheets.
4. Limit the length of lane closures to a maximum of two miles. Refer to the TCP Sequence of Construction for further information. Allow for all lanes to be open to traffic during non-working hours unless otherwise specified in the sequence of construction. Any additional overnight lane closures not specified in the Sequence of Construction will require approval by the Engineer.
5. Verify the location and spacing of signs, barricades, and channelizing devices prior to their placement along vertical curves, horizontal curves, and other geometric constraints to assure visibility to all motorists.
6. The work has been identified by reference location numbers. Various reference locations can be worked on simultaneously when approved by the Engineer. Once work has begun at a reference location, it must be worked continuously through completion. Additional signing to safely guide traffic through the work area will be required as directed by the Engineer.
7. Place the traffic control devices only while work is actually in progress or a definite need exists. Always have enough barricades, channelizing devices, and signs at all times to replace those damaged.
8. Cover all existing signs that conflict with the Traffic Control Plan and uncover during non-working hours or as directed by the Engineer. Partial coverage of a sign or coverage by a material that will not cover the entire sign all the time is not permitted.
9. Vary the spacing of the signs to meet traffic conditions or as directed by the Engineer and assure that all traffic control devices and work zone pavement markings are kept in a highly visible condition (clean, upright, and at proper locations).
10. Maintain the roadway surface and work zone striping within the project while the Traffic Control Plan is in effect. Place and be responsible for all work zone pavement markings in accordance with the Standard Sheets WZ(STPM)-13, BC (10)-14, BC (11)-14, and the TxMUTCD.
11. Conduct traffic operations so as to provide the least possible interference to traffic and to permit the continuous movement of traffic in all allowable directions at all times or as permitted by the sequence of construction. Provide for safe and convenient access to abutting property, highways, public roads, and street crossings except as otherwise shown in the Sequence of Construction. The contractor will maintain at all times two-way traffic or a minimum of one lane using a pilot vehicle and flaggers.
12. Place all stockpiled material, waste material, signs, barricades, channelizing devices, and work vehicles not in use, at a minimum of 30 feet from the outer edge of the nearest travel lane.

13. Maintain all existing drainage conditions during all construction phases until the permanent drainage facilities are constructed and ready to use. Handle excavated and stockpiled material in such a way that it will not block drainage.
14. Regulate all construction traffic so as to cause a minimal inconvenience to the traveling public. At times when it is necessary for trucks to stop, unload, or cross roadways under traffic, provide warning signs and flaggers as needed to adequately protect the traveling public.
15. During non-work hours, all drop-offs are to be filled to a 3:1 maximum slope except as otherwise noted in the plans or as directed by the Engineer.
16. Notify the Engineer in writing two weeks prior to shifting traffic within each phase of the Traffic Control Plan.
17. Remove from the work all loose materials and debris resulting from construction operations at the end of each work day.
18. Maintain a minimum of one through lane open in each direction during working hours except as directed by the Engineer.
19. Moving an existing sign to a temporary location is subsidiary to this item. Installations with permanent supports at permanent locations will be paid for under the applicable bid item(s).
20. Use of portable changeable message signs as advance notice of lane closures will be required, as directed by the Engineer. For locations that are adjacent to each other, a single sign in advance of the entire work area is acceptable.
21. Place portable changeable message boards at locations requiring lane closures at least 2 weeks before the closures or as directed by the Engineer.
22. Additional signs, barricades, and channelizing devices may be required to maintain traffic during construction, as shown on TCP standards. Additional signs, barricades, etc. (if any), will be subsidiary to Items 502, "Barricades, Signs, and Traffic Handling".
23. If the contractor chooses to work multiple locations in urban/rural areas simultaneously, the contractor will be responsible for providing all applicable traffic control devices, including portable changeable message boards, at their own expense.
24. Refer to BC(6)-13 Portable Changeable Message Sign (PCMS) Standards for a listing of abbreviated words and two-word phrases that are acceptable for use on PCMS. Submit the suggested message for the board to the Engineer for approval.
25. Use plastic drums to channelize traffic when existing pavement markings have been obliterated.
26. Limit the length of daily work to that area of operation that can be completed in one work day in order to allow for two-way traffic at night. Such area must not exceed two (2) miles, unless approved by the Engineer. Within the 2 mile section, only close off the area where actual work is being performed.
27. A pilot car and radio equipped flaggers are required for all undivided roadway locations as directed by the Engineer. The pilot car with necessary flaggers, radio equipped flaggers and all signs, equipment, labor, and incidentals required for this method of traffic control will be paid for directly through Item 510.

6/21/2024 08:00:00 T:\LRDDSTMT\FY 2024\MNT Contract (FY24)\SealCoat\CAD\TCP_GeneralNotes.dgn



TCP GENERAL NOTES

DN:	DW:	STATE:	SHEET NUMBER			SHEET NO.
CK:	CK:	TEXAS	SHEET 1 OF 1			
FED. RD. DIV. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB	HIGHWAY NO.
	22	MAVERICK, etc	5470	27	001	JS277, etc

GENERAL INSTRUCTIONS

THE FOLLOWING WORK WILL BE PERFORMED ON THE ROADWAY. REFER TO THE TCP PHASES, TCP GENERAL NOTES AND CORRESPONDING PLAN SHEETS FOR MORE DETAILED INFORMATION.

INSTALL ALL APPLICABLE BARRICADES, SIGNS, WORK ZONE MARKINGS IN ACCORDANCE WITH TCP, BC AND WZ TXDOT STANDARD SHEETS FOR TRAFFIC CONTROL SETUP.

GENERAL SEQUENCES OF CONSTRUCTION

THESE ARE DISTRICT WIDE ROADWAY SURFACING SEALCOAT PROJECTS. WORK ON EACH ROADWAY PROJECT SHALL BE PERFORMED IN FIVE (5) PHASES.

PHASE I - SET UP TEMPORARY BARRICADES FOR TRAFFIC CONTROL.

PHASE II - REMOVE RPM'S AND PLACE SEAL COAT.

PHASE III - PLACE SEAL TEMPORARY PAVEMENT MARKINGS.

PHASE IV - PLACE FINAL PAVEMENT MARKINGS & RAISED PAVEMENT MARKERS.

PHASE V - PERFORM FINAL CLEAN UP.

PHASE I USE BC((1)-(12))-21 & TCP(SC-7)-21

INSTALL PROJECT BARRICADES ACCORDING TO THE BC STANDARDS BC(1)-21 THRU BC(12)-21 INCLUDED IN THE PLANS ON THE PROPOSED LOCATIONS.

SET UP TEMPORARY TRAFFIC CONTROL DEVICES AND BARRICADES FOR SURFACING OPERATIONS (TCP (SC-7)-21) ON THE PROPOSED LOCATIONS BEFORE COMMENCING WORK ON THE ROADWAY.

PHASE II USE TCP(SC-1,2,3,4,5,6,7)-21

SET UP ONE WAY-TRAFFIC CONTROL WITH PILOT CAR AND PERFORM ROADWAY SWEEPING PRIOR TO SEAL COAT OPERATIONS.

SEALCOAT EXISTING PAVEMENT SURFACE AT WIDTH SPECIFIED ON TYPICAL SECTIONS.

REFER TO "PROJECT SUMMARY" SHEET FOR LIMITS OF SEALCOAT PLACEMENT.

SEALCOAT WILL INCLUDE ANY LEFT OR RIGHT TURN LANES, FOR THE LIMITS SHOWN ON TYPICAL SECTIONS, WHERE APPLICABLE.

CONCRETE PAVEMENT AREAS AND OTHER SELECTED AREAS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER WILL BE LEFT UNDISTURBED.

WHERE APPLICABLE, THE CONTRACTOR WILL PLACE ALL TRAFFIC CONTROL SIGNS, BARRICADES, AND CHANNELIZING DEVICES FOR ONE-WAY TRAFFIC CONTROL OPERATIONS AS SHOWN ON THE TRAFFIC CONTROL PLANS. REFER TO STANDARDS AND CONSTRUCTION STANDARD SHEETS AS WELL AS GENERAL NOTES.

UPON COMPLETION OF ONE LANE, MIRROR SAME WORK TO OTHER LANE.

AT THE END OF EACH DAY, BEFORE OPENING TO TRAFFIC, WORK ZONE SHORT TERM TABS SHALL BE INSTALLED TO GUIDE TRAFFIC ACCORDING TO TCP(SC-6)-21.

PHASE III-PLACE TEMPORARY PAVEMENT MARKINGS

REMOVE WORK ZONE SHORT TERM TABS AND MARKINGS FOR THE LIMITS SHOWN.

INSTALL TEMPORARY PAVEMENT MARKINGS (PAVEMENT SEALER) BEFORE INSTALLING TYPE I PAVEMENT MARKINGS. PAVEMENT MARKING SEALER SHALL BE OF TYPE II.

PHASE IV-USE TCP (3-1)-13,TCP(3-3)-14


INSTALL FINAL PAVEMENT MARKINGS. REFER TO PM STANDARDS SHEETS AND SUPPLEMENTAL PAVEMENT MARKINGS SHEETS FOR MORE DETAILS.

TYPE I PROFILE PAVEMENT MARKINGS SHALL BE USED FOR ALL LOCATIONS ON CENTERLINES AND EDGELINES. REFER TO RS(2)-13, RS(3)-13.

PHASE V-PERFORM FINAL CLEAN UP

PERFORM FINAL CLEAN UP AND REMOVE ALL BARRICADES, AS DIRECTED BY THE ENGINEER.

6/21/2024 08:00:03 T:\LRDDST\MT\FY 2024\MMT Contract IF Y24\Seed Coat\CAD\TCP_Sequence_of_Work.dgn

 <p>TEXAS DEPARTMENT OF TRANSPORTATION © 2024</p>						
<h3>TCP SEQUENCE OF CONSTRUCTION</h3>						
DN:	DW:	STATE	SHEET NUMBER		SHEET NO.	
CK:	CC:	TEXAS	SHEET 1 OF 1			
FED. RD. DIV. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB	HIGHWAY NO.
	22	MAVERICK, etc	5470	27	001	JS277, etc



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6470-27-001

DISTRICT Laredo
HIGHWAY US0277

COUNTY Maverick

CONTROL SECTION JOB				6470-27-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00210970			
COUNTY				Maverick			
HIGHWAY				US0277			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	316-7006	ASPH (AC-20XP)	GAL	381,938.000		381,938.000	
	316-7207	AGGR (TY-PB, GR-3S)(SAC-B)	CY	2,061.000		2,061.000	
	316-7222	AGGR (TY-PD, GR-3)(SAC-B)	CY	9,107.000		9,107.000	
	438-7001	CLEANING AND SEALING EXISTING JOINTS	LF	3,682.000		3,682.000	
	500-7001	MOBILIZATION	LS	1.000		1.000	
	502-7001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	6.000		6.000	
	503-7002	PORTABLE CHANGEABLE MESSAGE SIGN	EA	2.000		2.000	
	505-7001	TMA (STATIONARY)	DAY	12.000		12.000	
	505-7002	TMA (MOBILE OPERATION)	HR	114.000		114.000	
	510-7001	ONE-WAY TRAF CONT (FLAGGER CONT)	HR	20.000		20.000	
	510-7002	ONE-WAY TRAF CONT (PILOT CAR)	HR	114.000		114.000	
	662-7112	WK ZN PAV MRK SHT TERM (TAB)TY W	EA	6,684.000		6,684.000	
	662-7114	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	24,309.000		24,309.000	
	666-7009	REFL PAV MRK TY I (W)6"(DOT)(100MIL)	LF	52,800.000		52,800.000	
	666-7024	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	LF	2,714.000		2,714.000	
	666-7036	REFL PAV MRK TY I (W)24"(SLD)(100MIL)	LF	208.000		208.000	
	666-7042	REFL PAV MRK TY I (W)(ARROW)(100MIL)	EA	10.000		10.000	
	666-7066	REFL PAV MRK TY I (W)(WORD)(100MIL)	EA	5.000		5.000	
	666-7117	REFL PAV MRK TY I (Y)12"(SLD)(100MIL)	LF	6,800.000		6,800.000	
	666-7192	RE PM TY II (W) (LN REDUCT ARW)	EA	20.000		20.000	
	666-7266	RE PROFILE PM TY I(W)6"(SLD)(100MIL)	LF	94,517.000		94,517.000	
	666-7270	RE PROFILE PM TY I(Y)6"(SLD)(100MIL)	LF	127,449.000		127,449.000	
	666-7274	RE PROFILE PM TY I(Y)6"(BRK)(100MIL)	LF	18,210.000		18,210.000	
	666-7290	TY I HIGH PERF PM (W)6"(BRK)(100MIL)	LF	22,114.000		22,114.000	
	666-7293	TY I HIGH PERF PM (W)6"(SLD)(100MIL)	LF	222,179.000		222,179.000	
	666-7302	TY I HIGH PERF PM (Y)6"(BRK)(100MIL)	LF	14,520.000		14,520.000	
	666-7305	TY I HIGH PERF PM (Y)6"(SLD)(100MIL)	LF	152,439.000		152,439.000	
	666-7347	PAVEMENT SLER 6"	LF	651,428.000		651,428.000	
	666-7356	PAVEMENT SLER (DBL ARROW)	EA	2.000		2.000	
	668-7002	PRFB RUMBLE STRIP (BLK)(1')(CENTERLINE)	LF	111,082.000		111,082.000	
	672-7002	REFL PAV MRKR TY I-C	EA	3,991.000		3,991.000	
	672-7004	REFL PAV MRKR TY II-A-A	EA	12,449.000		12,449.000	


DN: CK: DW: CK: DN:

NOTES
 1. SURFACE TREATMENT WILL EXTEND TO THE LIMITS SHOWN ON THE TYPICAL SECTIONS EXCEPT FOR ANY CONCRETE SURFACES AND BRIDGES UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

SUMMARY OF ASPHALT AND AGGREGATE ITEMS					
Ref No.	County	Highway	316	316	316
			7006	7207	7222
			ASPH (AC-20XP)	AGGR (TY-PB GR-3S SAC-B)	AGGR(TY-PD GR-3 SAC-B)
No.	CO.	HWY	GAL	CY	CY
1	MAVERICK	FM2030	28,823	-	843
2		FM1907	8,780	257	-
3		US0277	75,427	-	2,205
4		US0057	131,372	-	3,841
5		FM1664	23,596	690	-
6	ZAVALA	US0083	75,831	-	2,217
7	KINNEY	RM2804	38,109	1,114	-
TOTAL:			381,937	2,061	9,107

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS											
Ref No.	County	Highway	500	502	503	505	505	510	510	662	662
			7001	7001	7002	7001	7002	7001	7002	7114	7112
			MOBILIZATION	BARRICADES, SIGNS AND TRAFFIC HANDLING	PORTABLE CHANGEABLE MESSAGE SIGN	TMA (STATIONARY)	TMA (MOBILE OPERATION)	ONE-WAY TRAF CONT (FLAGGER CONT)	ONE-WAY TRAF CONT (PILOT CAR)	WK ZN PAV MARK SHT TERM (TAB) TY Y-2	WK ZN PAV MARK SHT TERM (TAB) TY W
No.	CO.	HWY	LS	MO	EA	DAY	HR	HR	HR	EA	EA
1	MAVERICK	FM2030				1	10	7	10	2692	
2		FM1907				1	4		4	865	
3		US0277				2	20		20	4231	1538
4		US0057				3	30		30	6802	3184
5		FM1664				1	10		10	2598	
6	ZAVALA	US0083				3	30	13	30	4249	1962
7	KINNEY	RM2804				1	10		10	2872	
TOTAL:			1	6	2	12	114	20	114	24309	6684

DATE: 6/21/2024 5:01:44 PM
 FILE: T:\LRDDST\MTNT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\Summary of Qty.dgn



SUMMARY OF QUANTITIES

© TxDOT 2024 SHEET 1 OF 2

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST		COUNTY	SHEET NO.
22		MAVERICK, etc.	14


DN: DW: CK:

NOTES
 1. SURFACE TREATMENT WILL EXTEND TO THE LIMITS SHOWN ON THE TYPICAL SECTIONS EXCEPT FOR ANY CONCRETE SURFACES AND BRIDGES UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

SUMMARY OF PAVEMENT MARKING ITEMS											
Ref No.	County	Highway	438	666	666	666	666	666	666	666	666
			7001	7009	7024	7036	7042	7066	7117	7192	7347
			CLEANING AND SEALING OF EXISTING JOINTS	REFL PAV MRK TY I (W) 6" (DOT)	REFL PAV MRK TY I (W) 8"(SLD) (100MIL)	REFL PAV MRK TY I (W) 24"(SLD) (100MIL)	REFL PAV MRK TY I (W)(ARROW) (100MIL)	REFL PAV MRK TY I (W)(WORD) (100MIL)	REFL PAV MRK I (Y) 12" (SLD) (100MIL)	RE PM TY II (W) (LN REDUCT ARW)	PAVEMENT SLER 6"
No.	CO.	HWY	LF	LF	LF	LF	EA	EA	LF	EA	LF
1	MAVERICK	FM2030	48			12					77,828
2		FM1907				12					11,427
3		US0277	118	10,560			2			4	149,965
4		US0057		36,960						14	244,807
5		FM1664	1,252			24					34,708
6	ZAVALA	US0083		5,280	2,714	148	8	5	6,800	2	115,851
7	KINNEY	RM2804	2,264			12					16,842
TOTAL:			3,682	52,800	2,714	208	10	5	6,800	20	651,428

SUMMARY OF PAVEMENT MARKING ITEMS										
666	666	666	666	666	666	666	666	668	672	672
7356	7266	7270	7274	7290	7293	7302	7305	7002	7002	7004
PAVEMENT SLER (DBL ARROW)	RE PROFILE PM TY I (W) 6"(SLD) (100MIL)	RE PROFILE PM TY I (Y) 6"(SLD) (100MIL)	RE PROFILE PM TY I (Y) 6" (BRK) (100MIL)	TY I HIGH PREF PM (W) 6" (BRK) (100ML)	TY I HIGH PREF PM (W) 6" (SLD) (100ML)	TY I HIGH PREF PM (Y) 6" (BRK) (100ML)	TY I HIGH PREF PM (Y) 6" (SLD) (100ML)	PRFB RUMBLE STRIP (BLK) (1) (CENTERLINE)	REFL PAV MRKR TY I-C	REFL PAV MRKR TY II-A-A
EA	LF	LF	LF	LF	LF	LF	LF	LF	EA	EA
	28,360	48,616	852						638	2,582
		10,260	1,167							593
				5,126	83,178	4,563	57,098	41,586	517	1,209
				10,605	139,001	8,125	87,076	69,496	1,557	2,529
		31,282	3,426							2,387
2	66,157	28,549	4,665	6,383		1,832	8,265		1,279	1,999
		8,742	8,100							1,150
2	94,517	127,449	18,210	22,114	222,179	14,520	152,439	111,082	3,991	12,449



DATE: 9/5/2024 9:02:48 AM
 FILE: T:\LRD\STMT\TY 2025\MINT Contract (FY25)\RMC\Seal Coat (upper counties)\CAD\Summary of Qty.dgn




SUMMARY OF QUANTITIES

© TxDOT 2024 SHEET 2 OF 2

CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST	COUNTY	SHEET NO.	
22	MAVERICK, etc.	15	

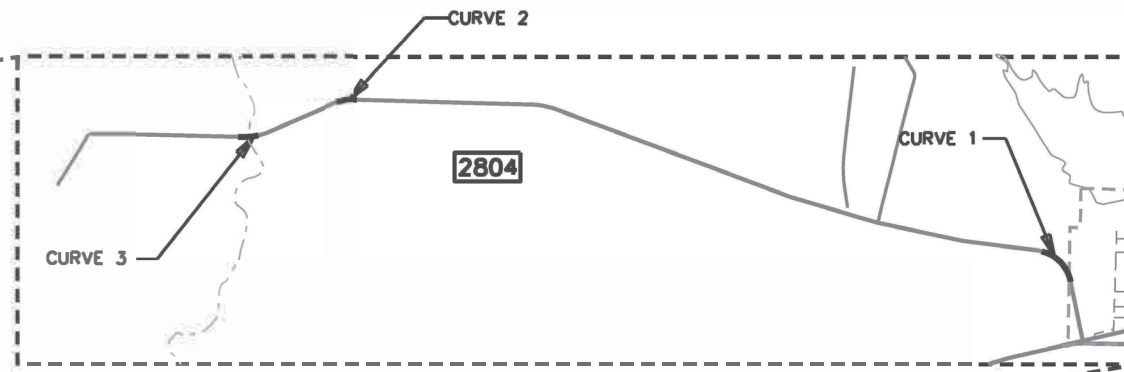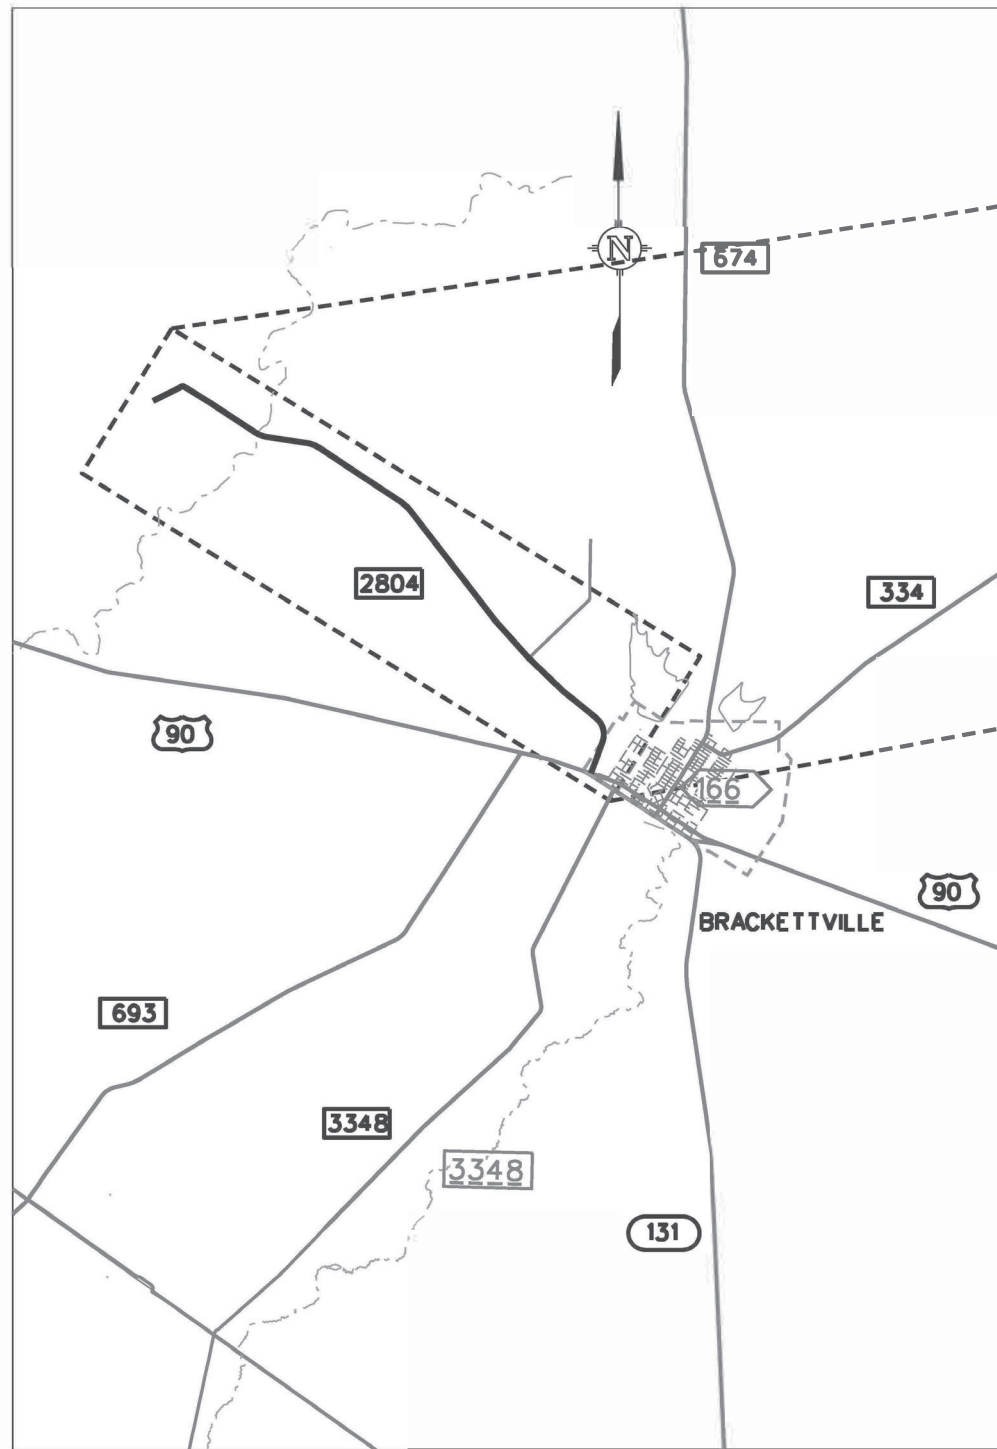

PROPOSED TY II-A-A
SEE NOTE 1 & 2

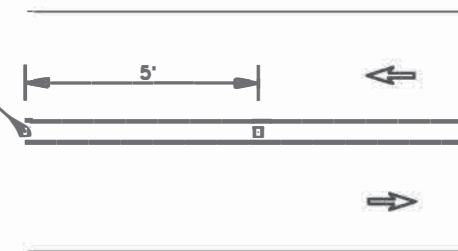

TYPICAL CURVE SECTION
N.T.S.

LEGEND
 □ - REFL PAV MRKR
 ← - DIRECTION OF TRAFFIC



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212. 6/21/2024

DocuSigned by:
 [Signature]
 633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		TOTAL QTY
				RM	RM	RM	RM	RM	RM	
672	7004	REFL PAV MRKR TY II-A-A	EA	374+0.116	373+0.806	374+0.953	375+0.173	376+0.371	376+0.623	631.00
				343.00		81.00		207.00		

NOTES:




- REFER TO STANDARD PM-(2)-22 FOR INSTALLATION OF RPM'S ON CENTER LINE.
- CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTIONS OF THIS DETAIL SHEET.




**RAISED PAVEMENT MARKERS
DETAILS FM 2804**

DR: J.T.	DW: J.T.	STATE	SHEET NUMBER			SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1			
FED. RD. DIST. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB	HIGHWAY NO.
6	22	MAVERICK	6470	27	001	US277

6/20/2024 jtoviast kinney.dgn

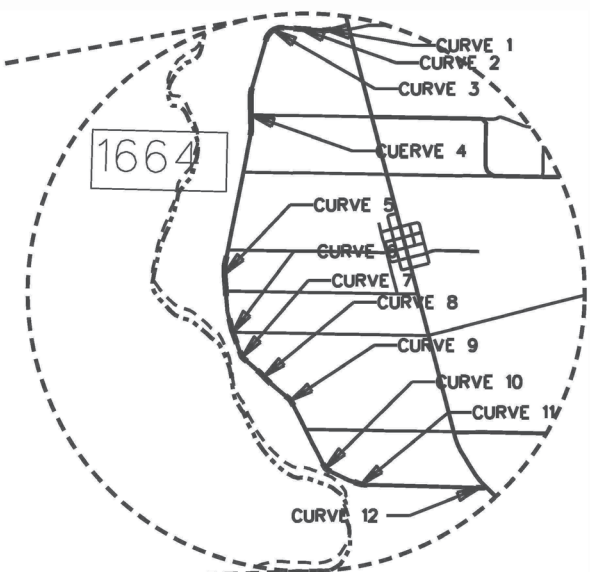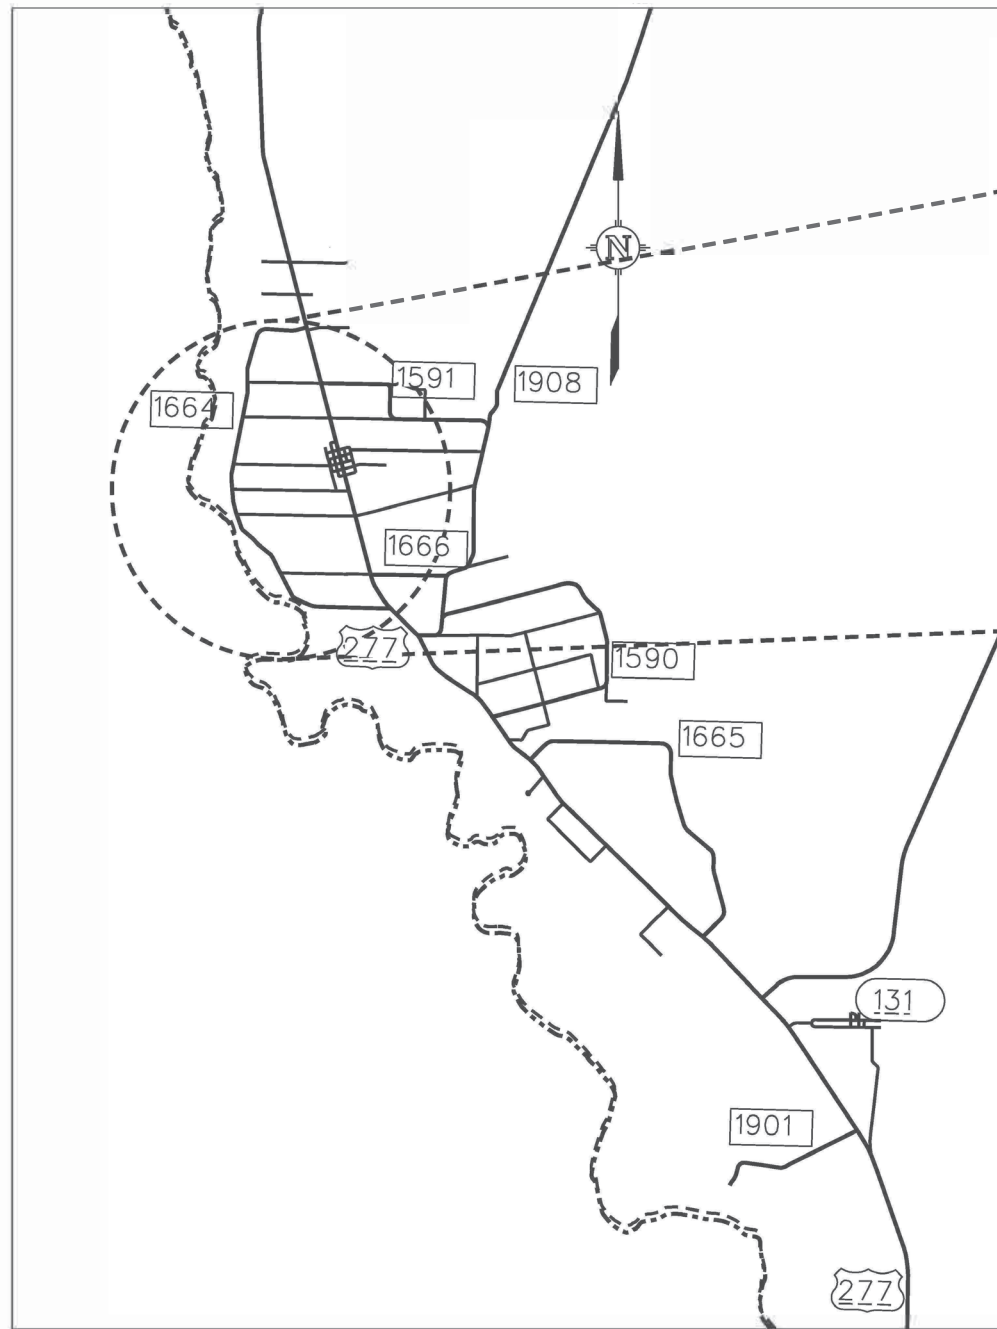

PROPOSED TY II-A-A
SEE NOTE 1 & 3

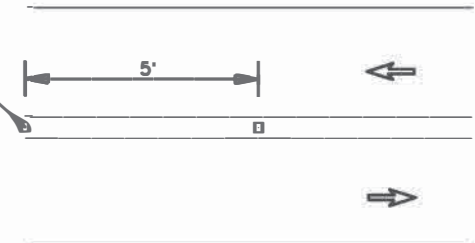

TYPICAL CURVE SECTION
N.T.S.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212. 6/21/2024

DocuSigned by: *Dennice L. Garza*
633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		CURVE 4		CURVE 5		CURVE 6	
				RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM
672	7004	REFL PAV MRKR TY II-A-A	EA	532+0.052	532+0.177	532+0.317	532+0.562	532+0.797	532+0.992	533+0.142	533+0.287	534+0.031	534+0.226	534+0.346	535+0.461
				133.00		260.00		207.00		154.00		204.00		122.00	

- NOTES:
- REFER TO STANDARD PM-(2)-22 FOR INSTALLATION OF RPM'S ON CENTER LINE.
 - RPM'S LINE SHOULD BE 4" FROM EDGE OF THE PAVEMENT MARKING.
 - CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTION OF THIS DETAIL SHEET.



CURVE 7		CURVE 8		CURVE 9		CURVE 10		CURVE 11		CURVE 12		TOTAL QTY
RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	
534+0.626	534+0.806	535+0.886	535+0.031	535+0.112	535+0.226	535+0.642	535+0.721	535+0.831	535+0.976	536+0.729	536+0.770	
191.00		154.00		114.00		80.00		154.00		44.00		1,817.00

TEXAS DEPARTMENT OF TRANSPORTATION
2024

**RAISED PAVEMENT MARKERS
DETAILS FM 1664**


DR: E.M.	DW: E.M.	STATE	SHEET NUMBER		SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1		
FED. RD. DIST. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB
6	22	MAVERICK	6470	27	001
					US277
					17

6/20/2024 EMUNOZZ Moverick.dgn

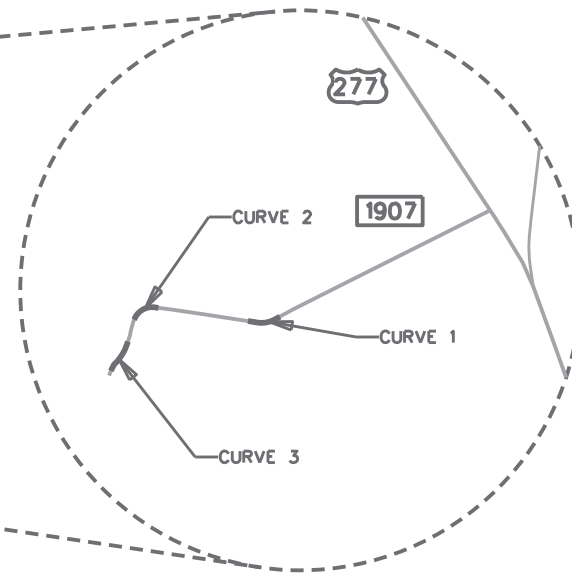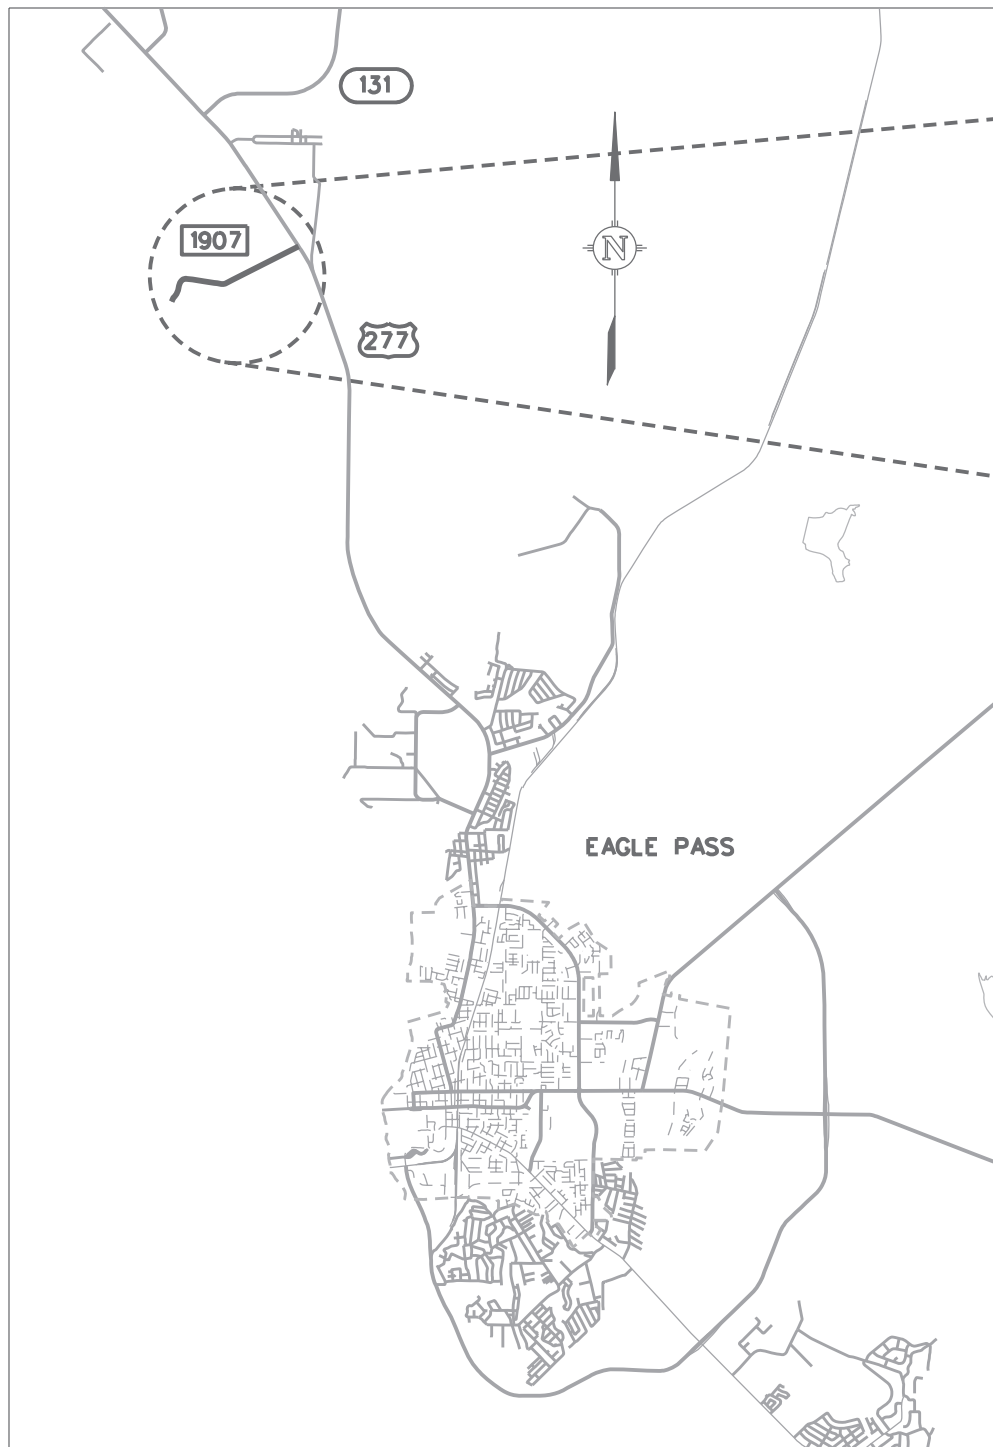


LEGEND
 □ - REFL PAV MRKR
 ← - DIRECTION OF TRAFFIC

PROPOSED BY IIA-A
 SEE NOTE 1 & 2

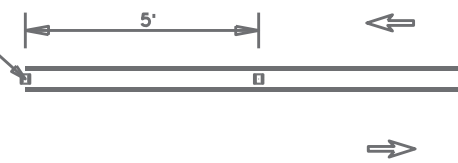

TYPICAL CURVE SECTION
 N.T.S.



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212. 6/21/2024

DocuSigned by:
 DENNICE L. GARZA
 633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		TOTAL QTY
				RM 366+0.737	RM 366+0.632	RM 366+0.297	RM 366+0.141	RM 366+0.091	RM 366-0.026	
672	7004	REFL PAV MRKR TY IIA-A	EA	112.00		166.00		125.00		403.00

NOTES:



- REFER TO STANDARD PM-(2)-22 FOR INSTALLATION OF RPM'S ON CENTER LINE.
- CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY IIA-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTIONS OF THIS DETAIL SHEET.



RAISED PAVEMENT MARKERS
 DETAILS FM 1907

DR: J.T.	DW: J.T.	STATE	SHEET NUMBER			SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1			
FED. RD. DIV. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB	HIGHWAY NO.
6	22	MAVERICK	6470	27	001	US277

6/20/2024 jtoivast Maverick.dgn

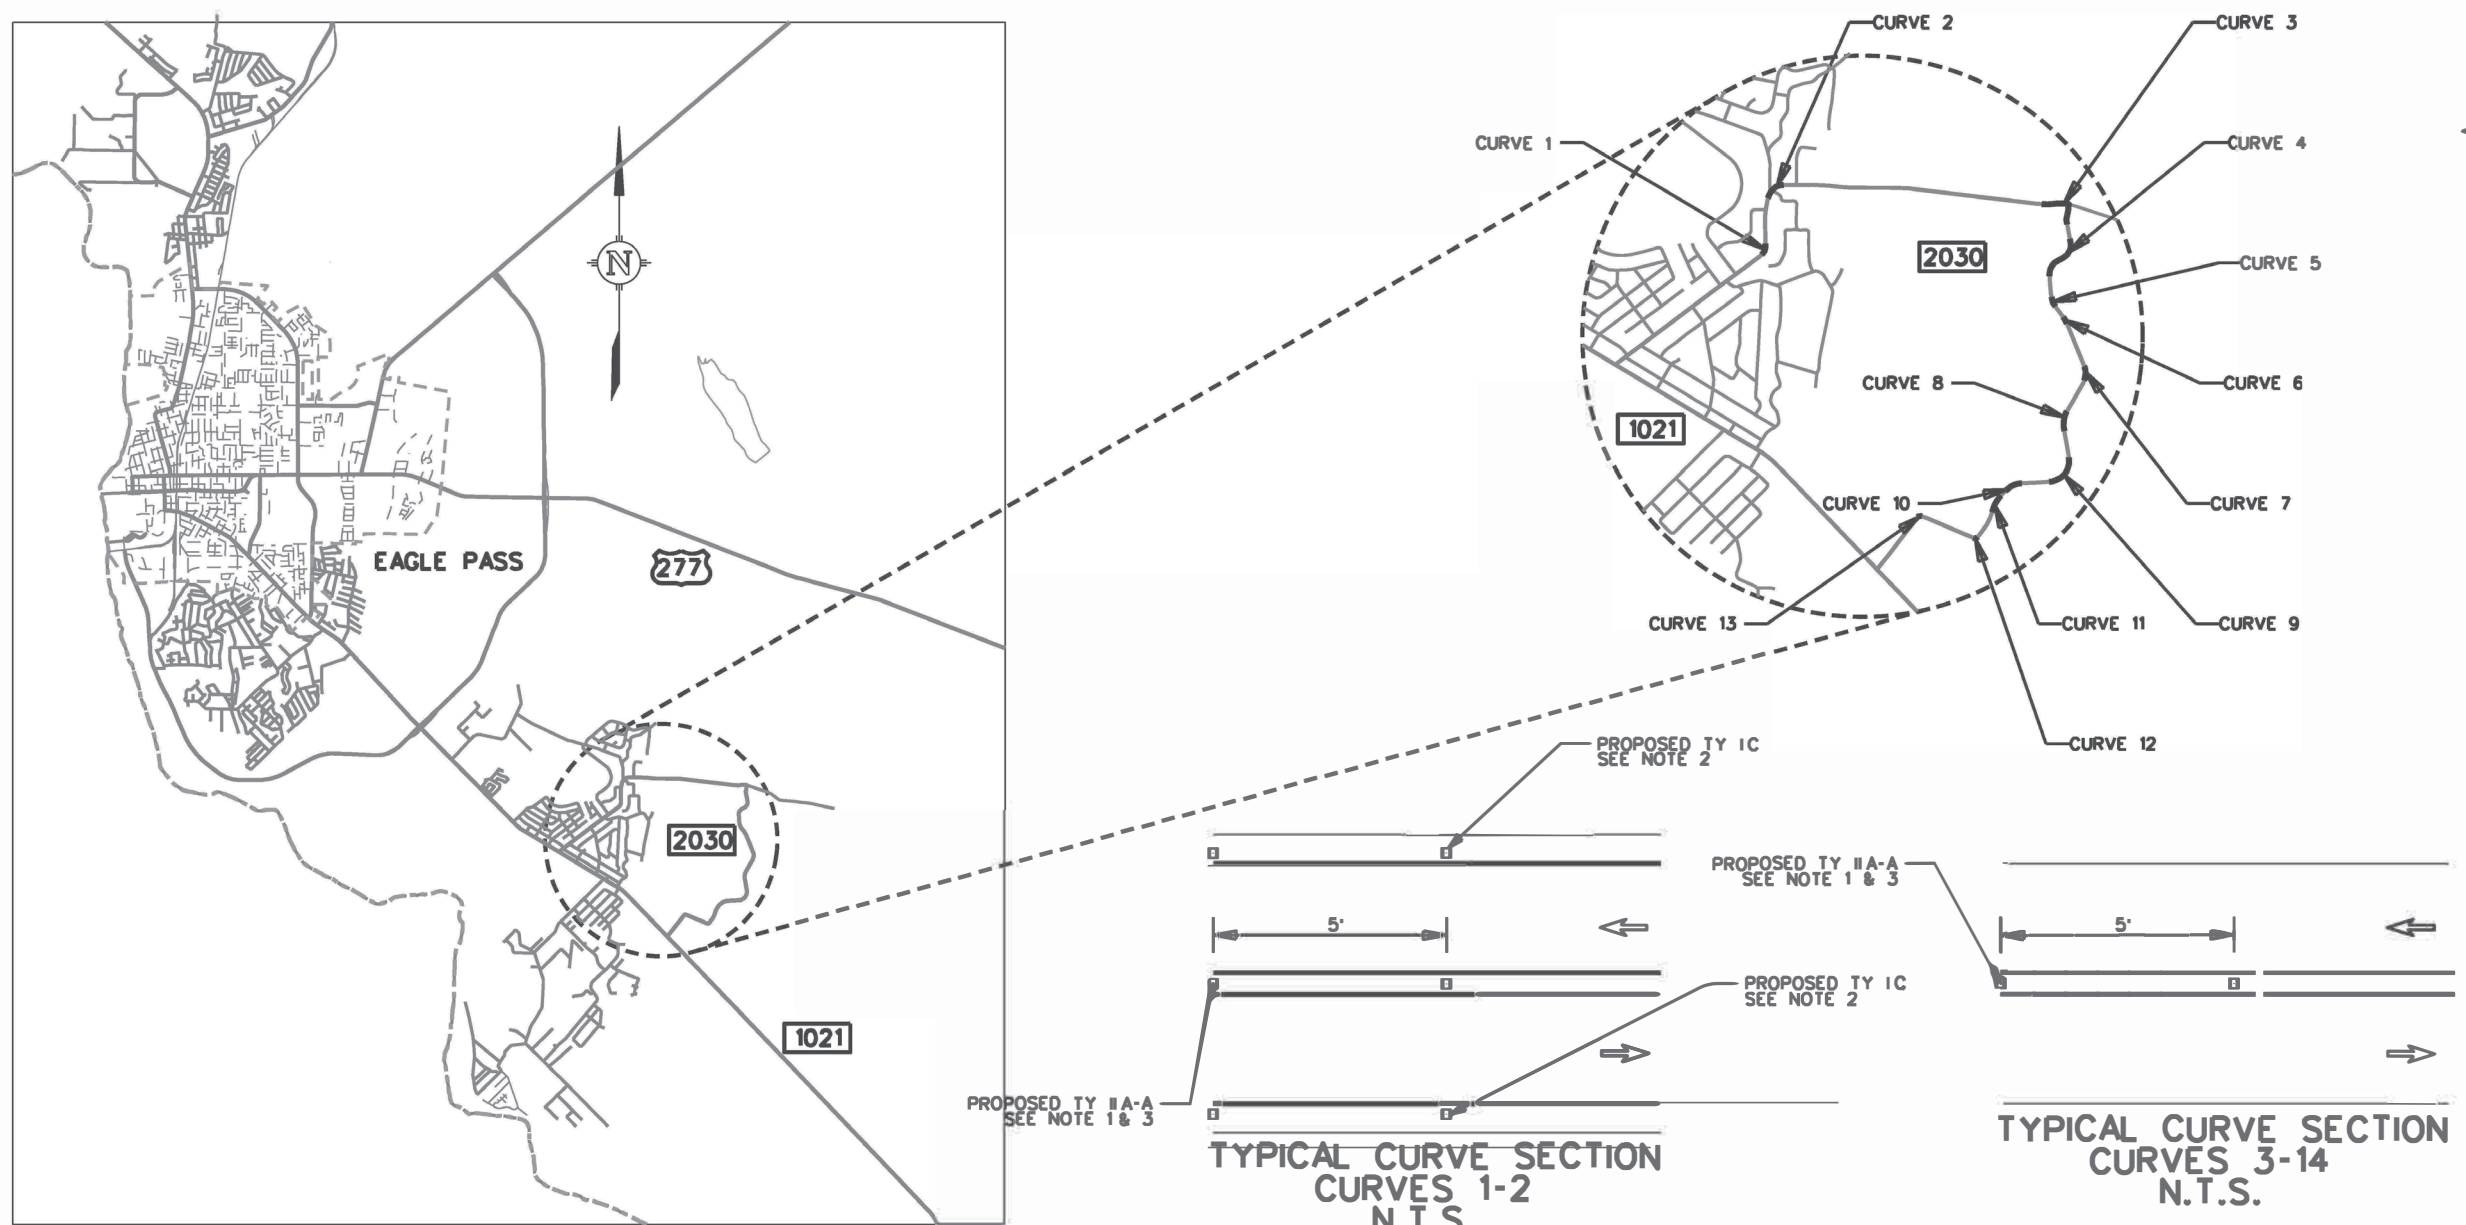

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212. 6/21/2024

DocuSigned by: *Dennice L. Garza*
633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		CURVE 4		CURVE 5		CURVE 6		CURVE 7	
				RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM
672	7002	REFL PAV MRKR TY I-C	EA	374+0.773	374+0.853	374+0.953	375+0.173	376+0.371	376+0.623	376+0.658	376+0.890	376+0.945	377+0.041	377+0.061	377+0.146	377+0.328	377+0.459
672	7004	REFL PAV MRKR TY II-A-A	EA		85.00		233.00		267.00		246.00		102.00		91.00		139.00

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 8		CURVE 9		CURVE 10		CURVE 11		CURVE 12		CURVE 13		TOTAL QTY
				RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	RM	
672	6007	REFL PAV MRKR TY I-C	EA	377+0.534	377+0.665	377+0.756	377+0.952	378+0.029	378+0.229	378+0.253	378+0.318	378+0.348	378+0.408	378+0.628	378+0.693	638.00
672	6009	REFL PAV MRKR TY II-A-A	EA		139.00		208.00		212.00		70.00		64.00		70.00	1,926.00






- NOTES:
- REFER TO STANDARD PM-(2)-22 FOR INSTALLATION OF RPM'S ON CENTER LINE.
 - RPM'S LINE SHOULD BE 4" FROM EDGE OF THE PAVEMENT MARKING.
 - CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTIONS OF THIS DETAIL SHEET.

TEXAS DEPARTMENT OF TRANSPORTATION
2024

**RAISED PAVEMENT MARKERS
DETAILS FM 2030**

DR: J.T.	DW: J.T.	STATE	SHEET NUMBER		SHEET NO.	
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1			
FED. RD. DIST. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB	HIGHWAY NO.
6	22	MAVERICK	6470	27	001	US277

6/20/2024 jtovriast Moverick.dgn

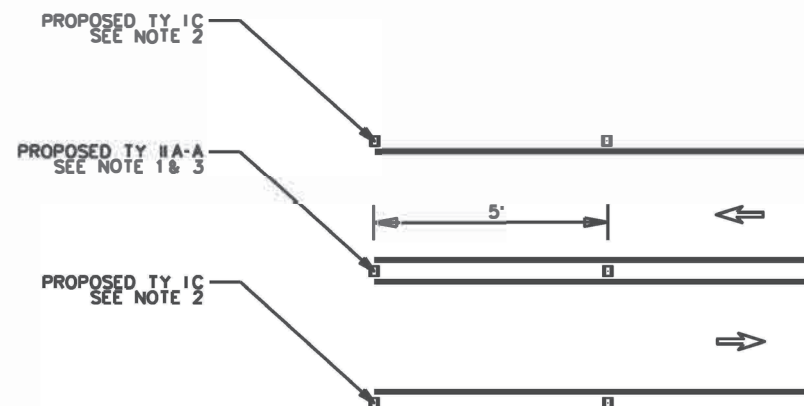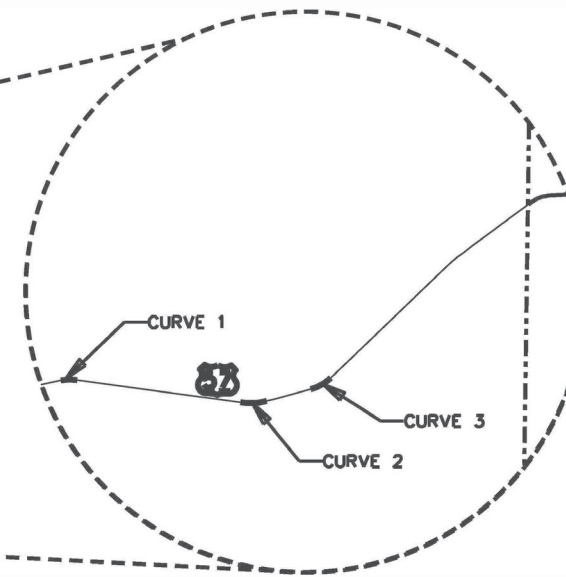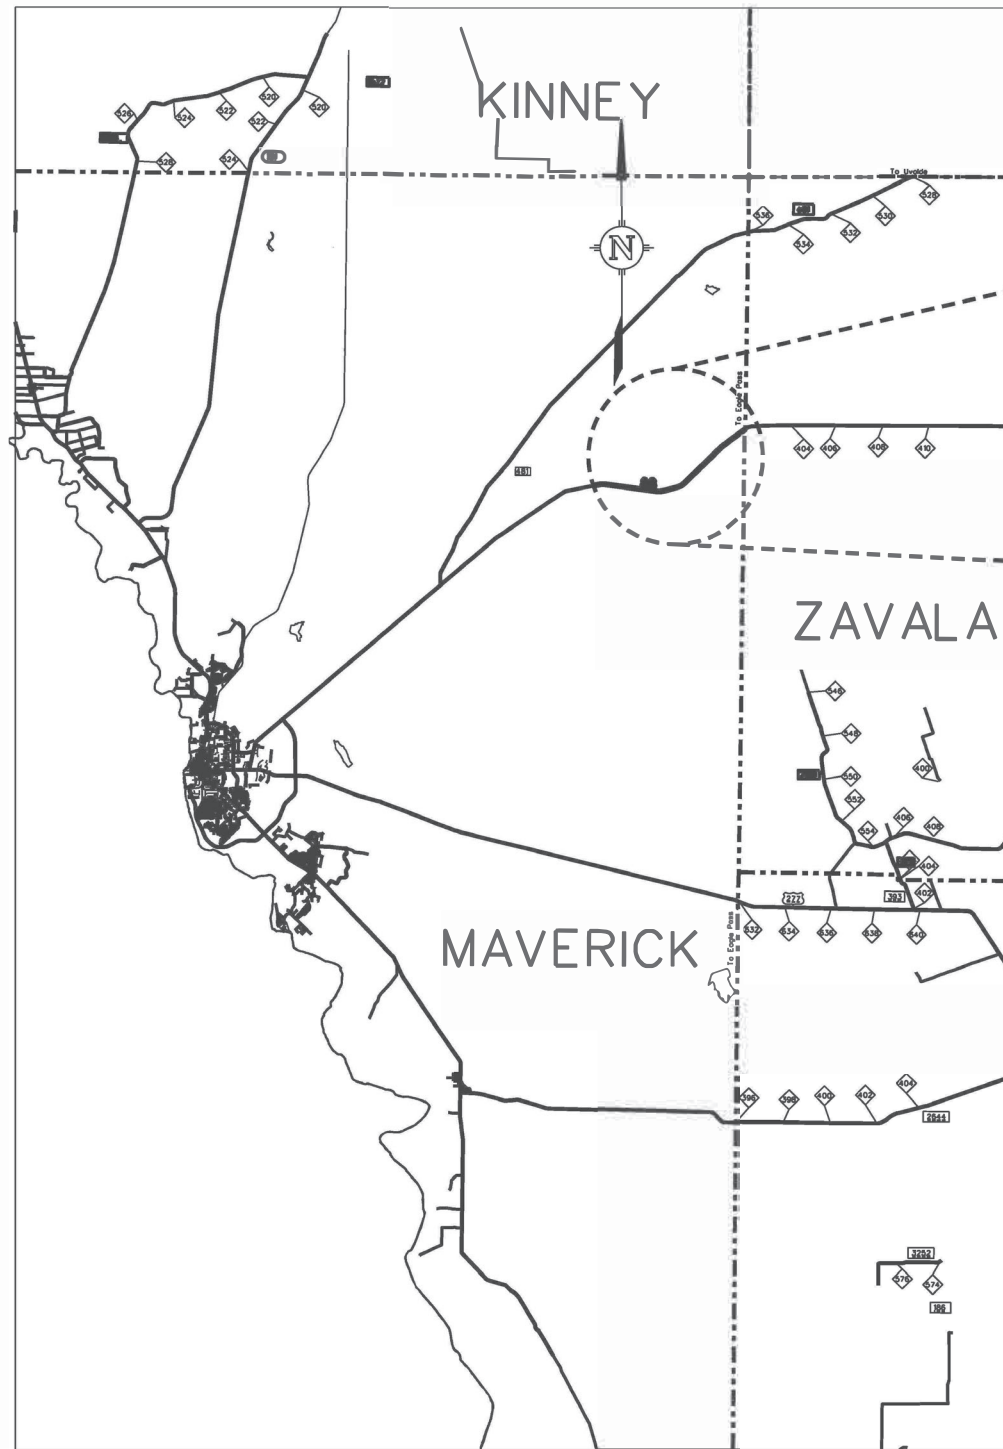

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212, 6/21/2024

DocuSigned by:
 DENNICE L. GARZA
 633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		TOTAL QTY
				RM	RM	RM	RM	RM	RM	
672	7002	REFL PAV MRKR TY I-C	EA	392+0.700	392+0.956	395+0.254	395+0.609	396+0.166	396+0.521	1,023.00
672	7004	REFL PAV MRKR TY II-A-A	EA		271.00		376.00		376.00	1,023.00

NOTES:



- REFER TO STANDARD PM(2)-22 FOR INSTALLATION OF RPM'S ON CENTER LINE.
- RPM'S LINE SHOULD BE 4" FROM EDGE OF THE PAVEMENT MARKING.
- CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTION OF THIS DETAIL SHEET.



RAISED PAVEMENT MARKERS DETAILS US 57



DR: E.M.	DW: E.M.	STATE	SHEET NUMBER		SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1		
PED. DIV. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB HIGHWAY NO.
6	22	MAVERICK	6470	27	001 US277

6/20/2024 EMUNOZZ Moverick.dgn

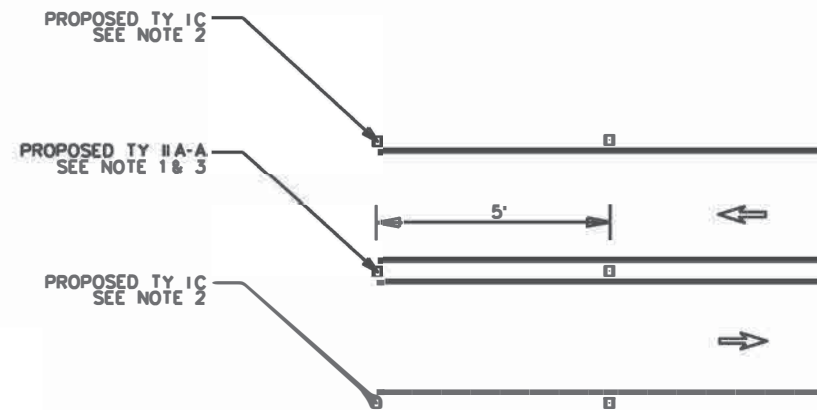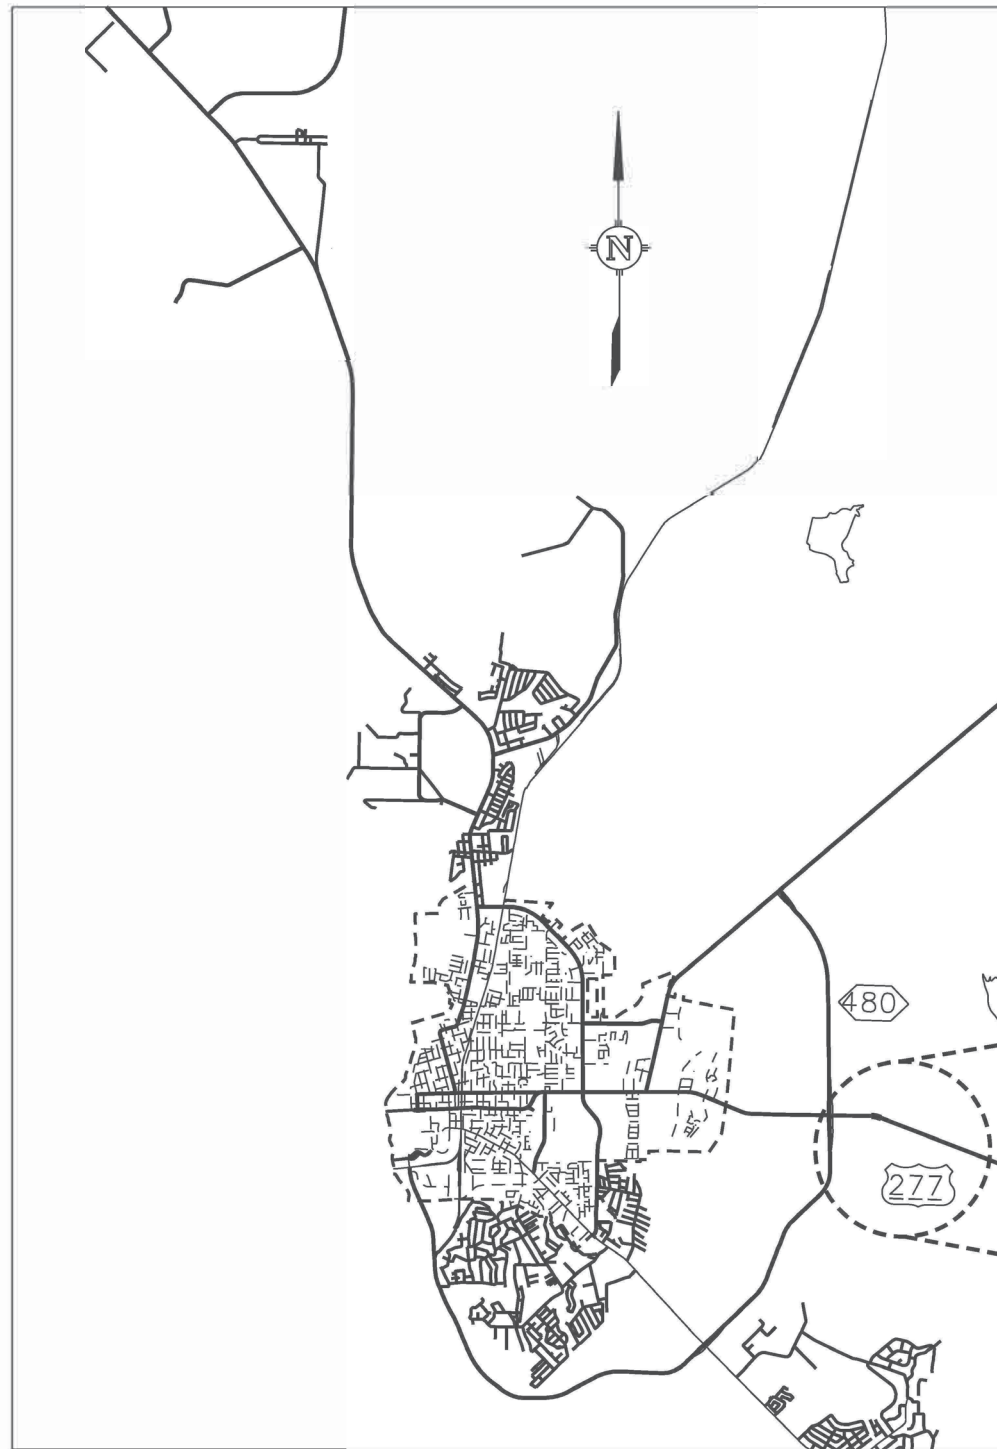

TYPICAL CURVE SECTION
N.T.S.

LEGEND
 □ - REFL PAV MRKR
 ← - DIRECTION OF TRAFFIC

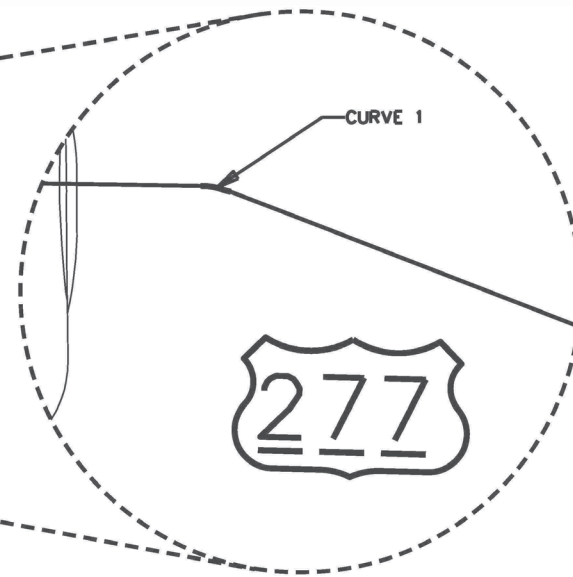

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212, 6/21/2024

DocuSigned by:
 [Signature]
 633630C5730C4A4...

DESC NO.	DESCRIPTION	UNIT	CURVE 1		TOTAL QTY
			RM 612+0.073	RM 611+0.546	
7002	REFL PAV MRKR TY I-C	EA		260.00	260.00
7004	REFL PAV MRKR TY II-A-A	EA		260.00	260.00

NOTES:




- REFER TO STANDARD PM(2)-22 FOR INSTALLATION OF RPM's ON CENTER LINE.
- RPM's LINE SHOULD BE 4" FROM EDGE OF THE PAVEMENT MARKING.
- CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKINGS AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN THE TYPICAL SECTION OF THIS DETAIL SHEET.

6/20/2024 EMUNO22 Moverick.dgn

TEXAS DEPARTMENT OF TRANSPORTATION
 © 2024

**RAISED PAVEMENT MARKERS
 DETAILS US 277**

DR: E.M.	DW: E.M.	STATE	SHEET NUMBER		SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1		
FED. RD. DIST. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB
6	22	MAVERICK	6470	27	001
					US277
					21

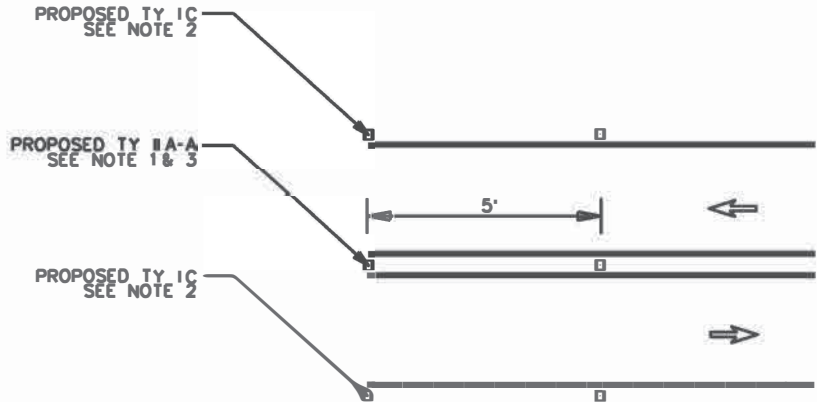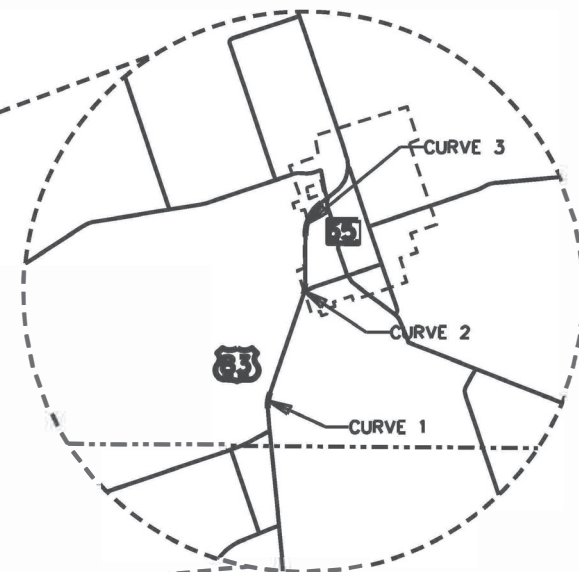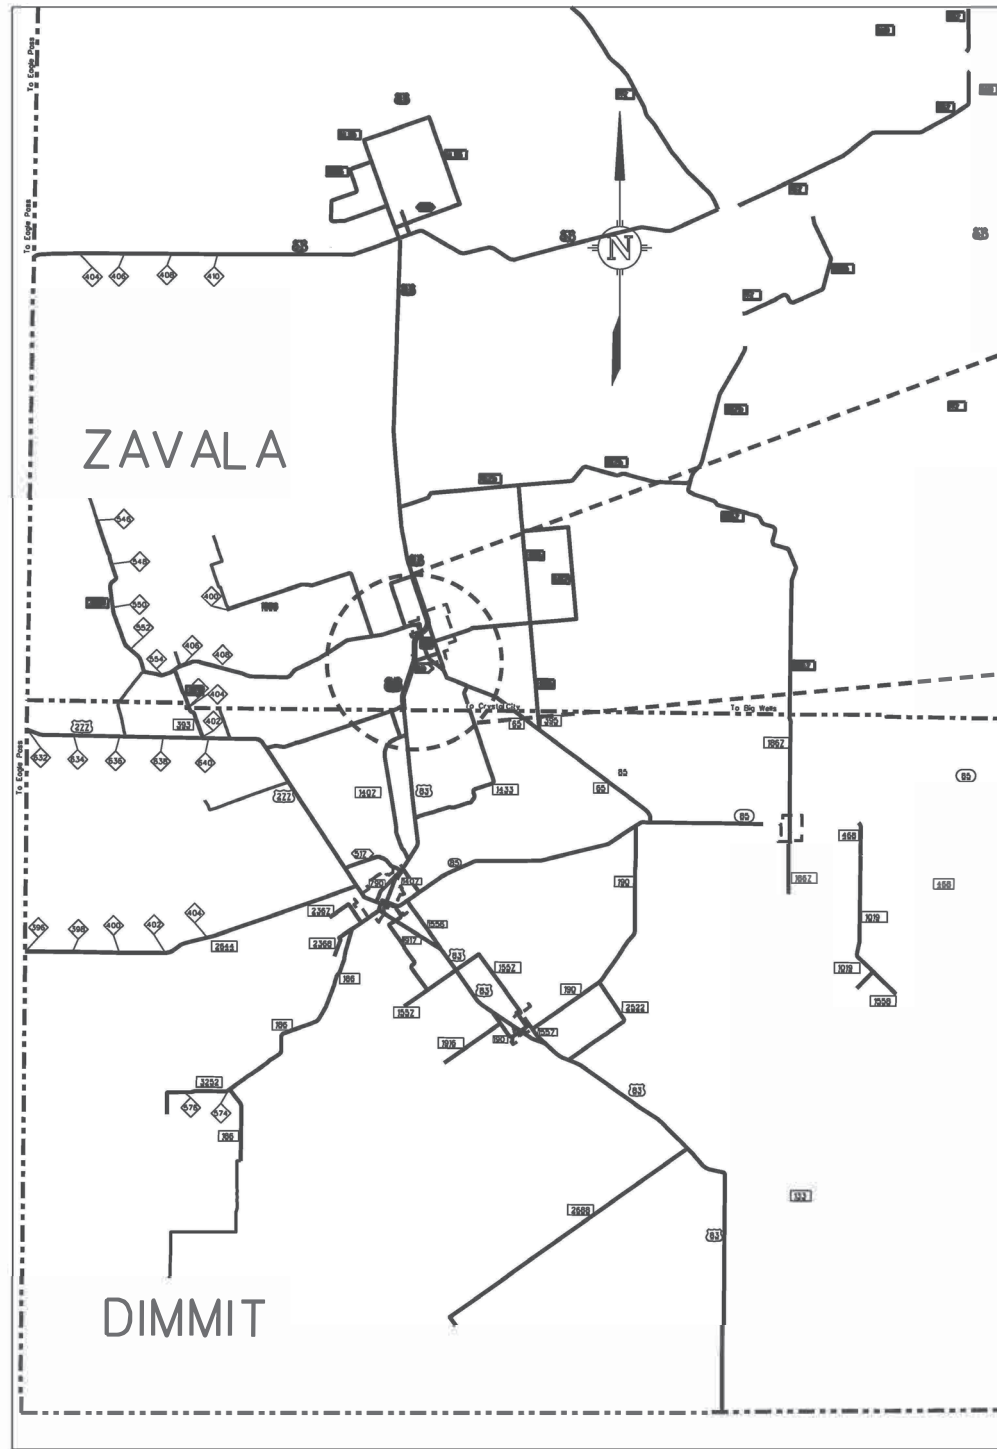

TYPICAL CURVE SECTION
N.T.S.

LEGEND
 □ - REFL PAV MRKR
 ← - DIRECTION OF TRAFFIC



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY DENNICE L. GARZA, P.E. 114212. 6/21/2024

DocuSigned by: *Dennice L. Garza*
 633630C5730C4A4...

ITEM NO.	DESC NO.	DESCRIPTION	UNIT	CURVE 1		CURVE 2		CURVE 3		TOTAL QTY
				RM	RM	RM	RM	RM	RM	
672	7002	REFL PAV MRKR TY I-C	EA	625+0.301	624+0.991	624+0.001	623+0.801	623+0.086	622+0.671	979.00
672	7004	REFL PAV MRKR TY II-A-A	EA		328.00		212.00		439.00	979.00

NOTES:

- REFER TO STANDARD PM(2)-22 FOR INSTALLATION OF RPM's ON CENTER LINE.
- RPM's LINE SHOULD BE 4" FROM EDGE OF THE PAVEMENT MARKING.
- CONTRACTOR AND ENGINEER TO FIELD VERIFY EXISTING PAVEMENT MARKING AT CURVE LOCATIONS. ENGINEER SHALL APPROVE INSTALLATION OF REFL PAV MRKR TY II-A-A AS NEEDED AT CURVES AND ARE TO BE INSTALLED AS NOTED IN TYPICAL SECTIONS OF THIS DETAIL SHEET.

TEXAS DEPARTMENT OF TRANSPORTATION
 2024

**RAISED PAVEMENT MARKERS
 DETAILS US 83**

DR: E.M.	DW: E.M.	STATE	SHEET NUMBER		SHEET NO.
CR: D.G.	CK: D.G.	TEXAS	SHEET 1 OF 1		
FED. RD. DIST. NO.	STATE DIST. NO.	COUNTY	CONTROL	SECTION	JOB
6	22	MAVERICK	6470	27	001
					US277

6/20/2024 EMUNOZZ2 Zovolo.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov</p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:46 PM
 FILE: I:\LRDDST\MT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION
 GENERAL NOTES
 AND REQUIREMENTS**

BC(1)-21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	27	001	US277, etc.				
4-03	7-13	DIST		COUNTY	SHEET NO.				
9-07	8-14	22		MAVERICK, etc.	23				
5-10	5-21								


TYPICAL LOCATION OF CROSSROAD SIGNS

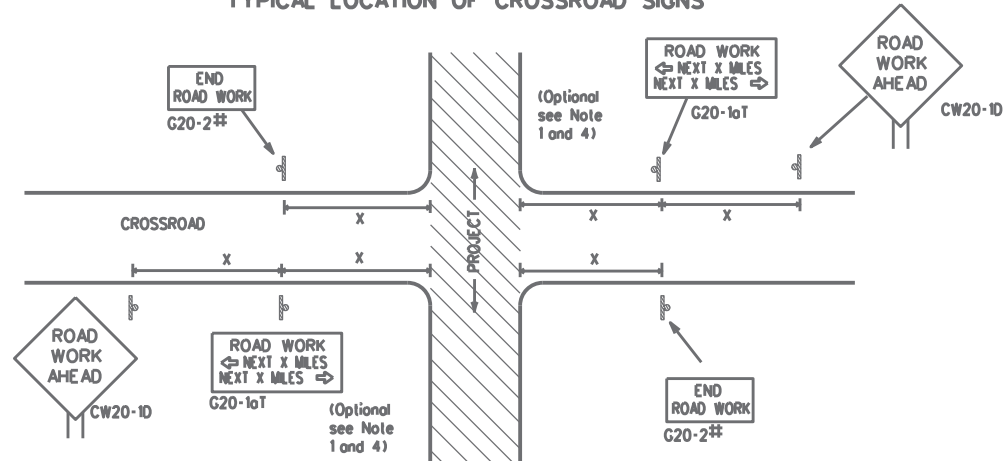

‡ May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
- The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
- When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

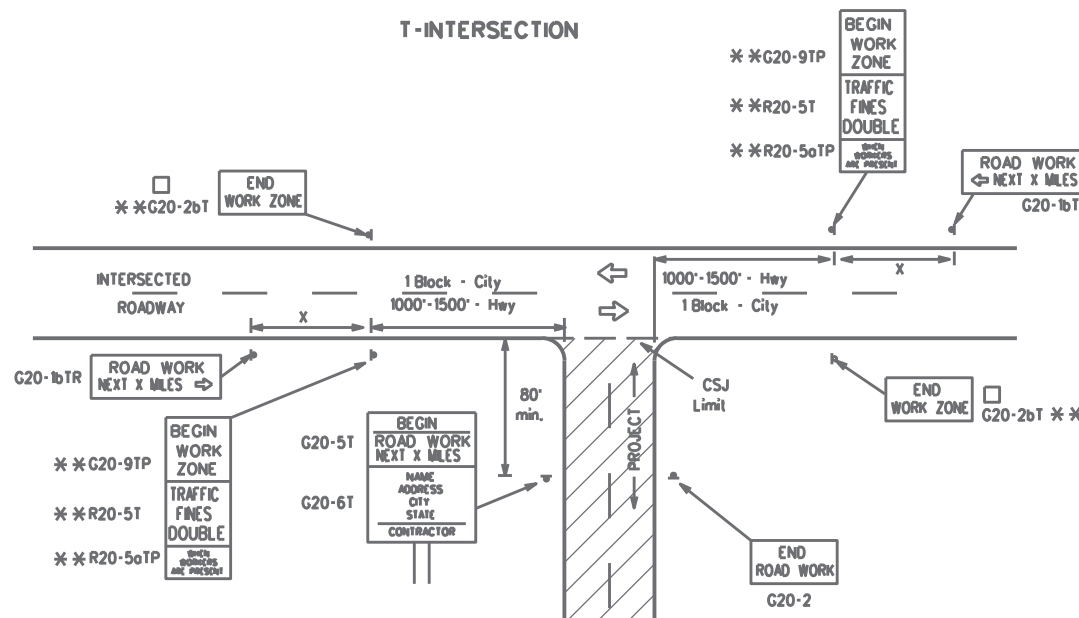

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING 1.5.6


Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign # Spacing "X" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	55	500 ²
			60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
*			*	* ³

- * For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.
- * Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

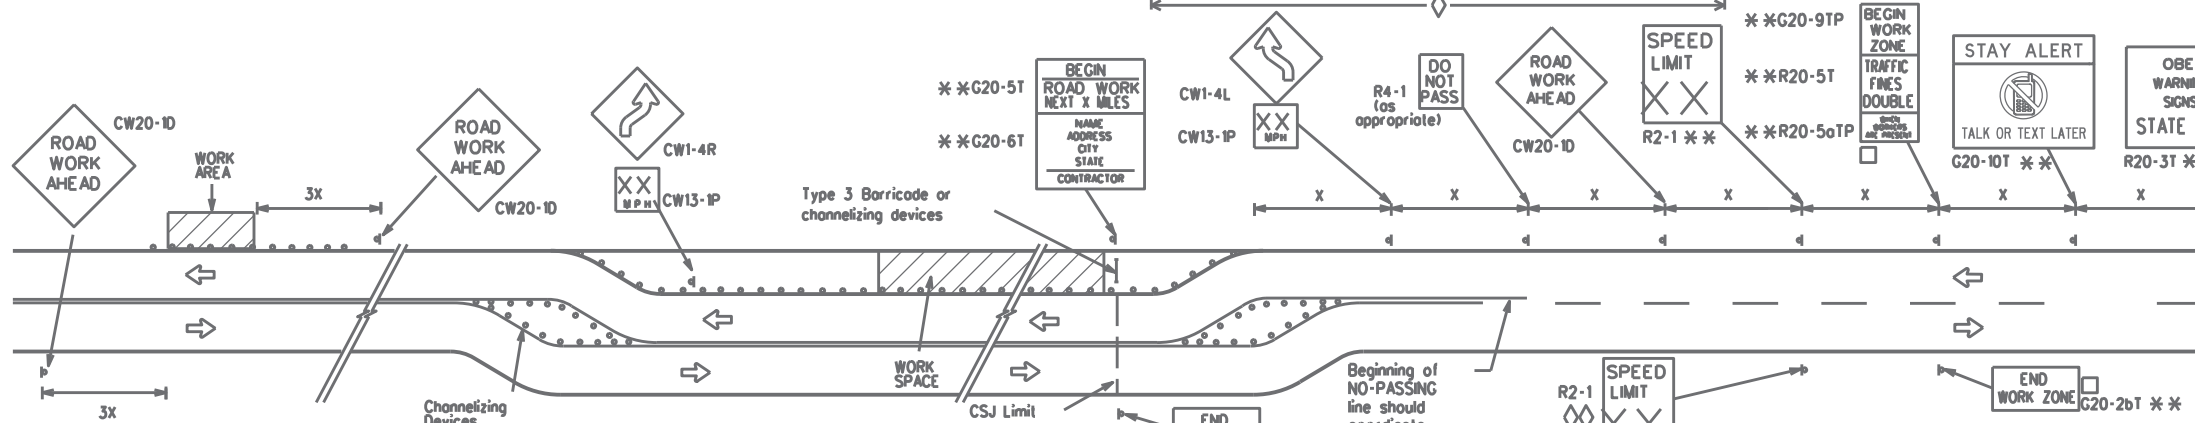


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

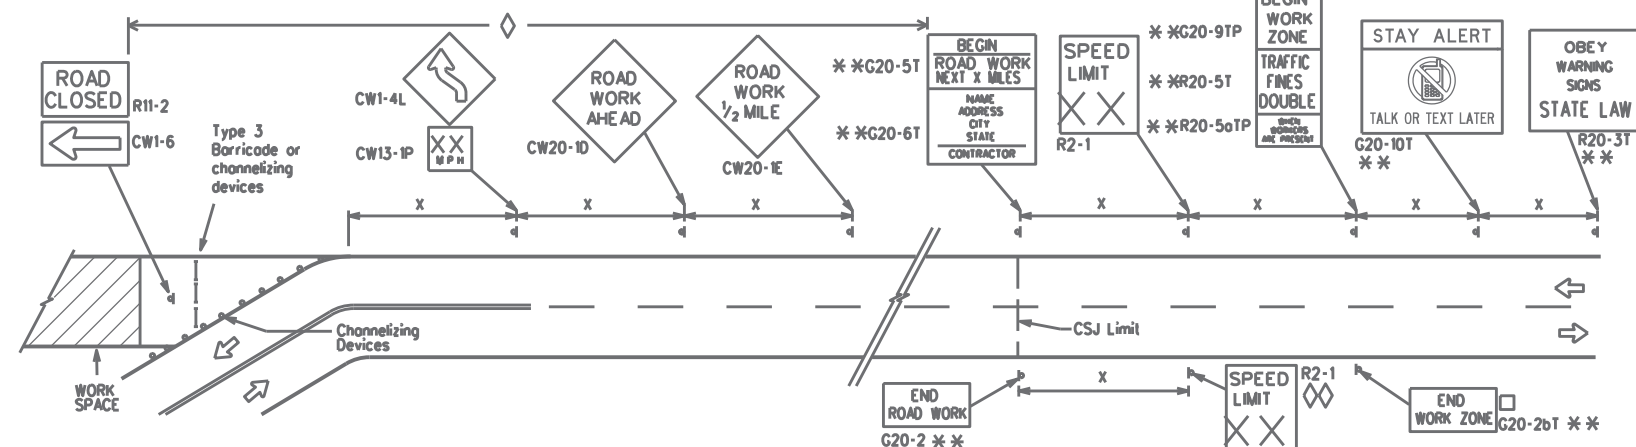

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

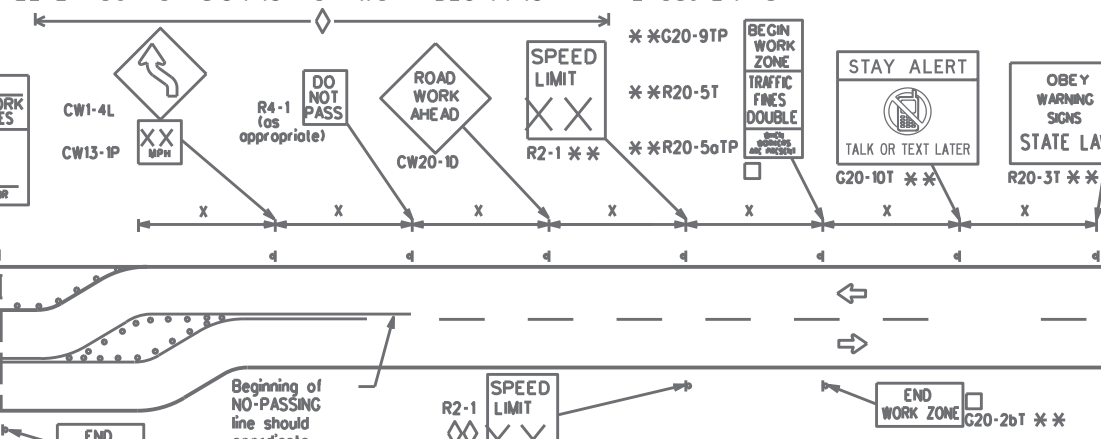

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	22	MAVERICK, etc.	24	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:46 PM
 FILE: T:\LRDD5TMMT\FY_2024\MMT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

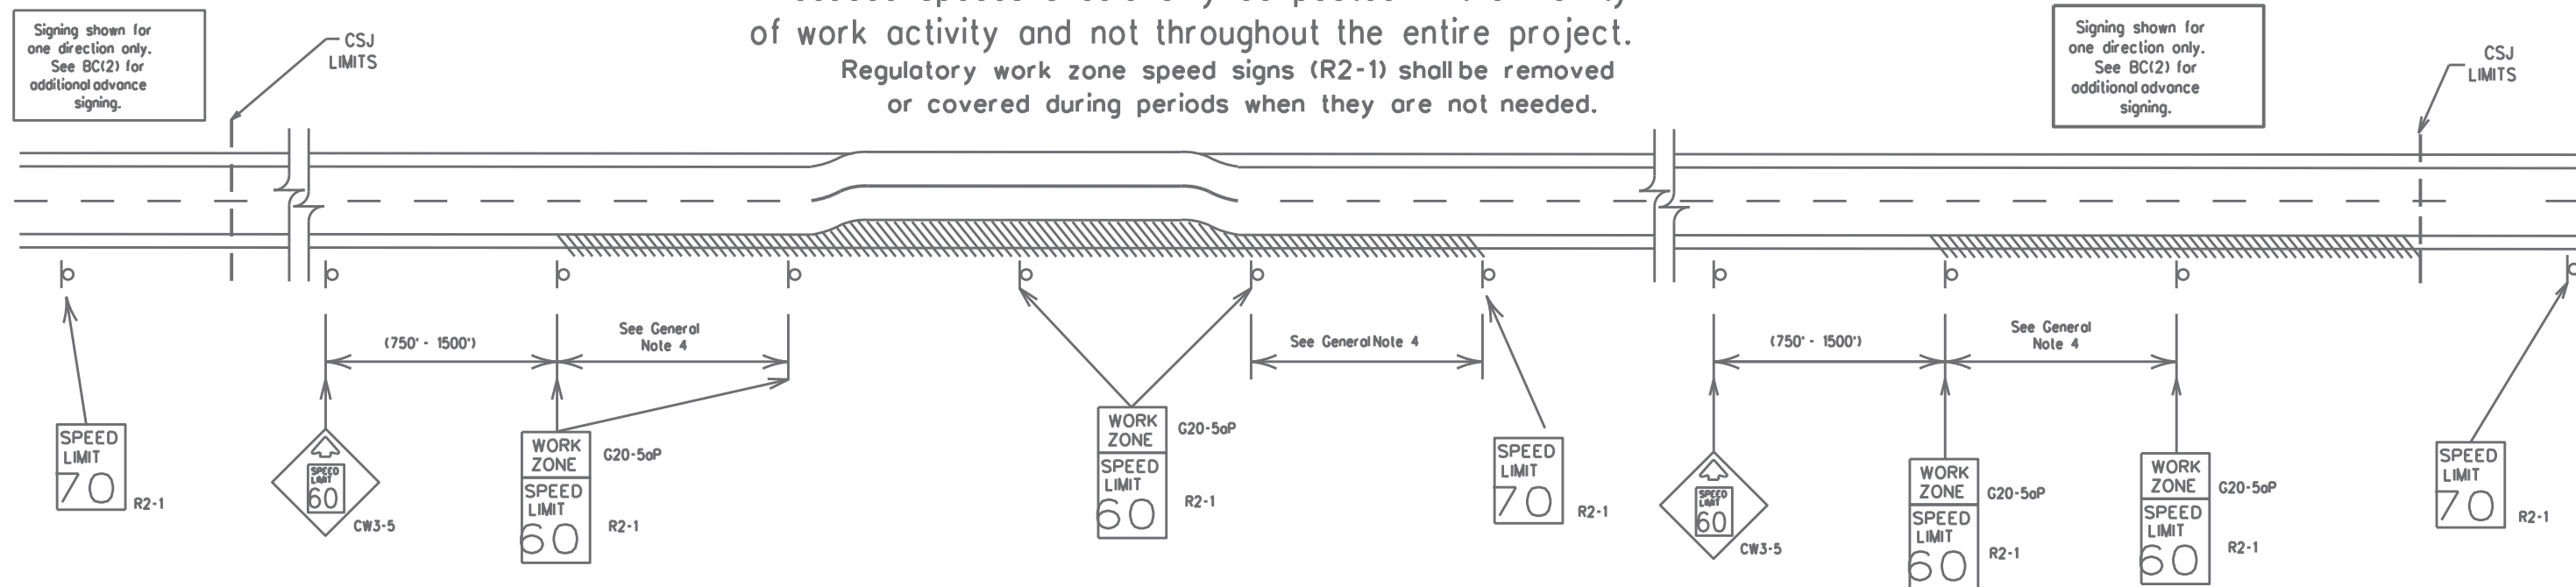

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- a) rough road or damaged pavement surface
- b) substantial alteration of roadway geometrics (diversions)
- c) construction detours
- d) grade
- e) width
- f) other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

1. Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
2. Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
3. Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
4. Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
5. Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
6. Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
7. Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
8. Techniques that may help reduce traffic speeds include but are not limited to:
 - A. Low enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
 - E. Speed monitor trailers or signs.
9. Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:46 PM
FILE: T:\LRDD\STMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

SHEET 3 OF 12




BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC(3)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	27	001	US277, etc.				
9-07	8-14	DIST		COUNTY	SHEET NO.				
7-13	5-21	22	MAVERICK, etc.		25				


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

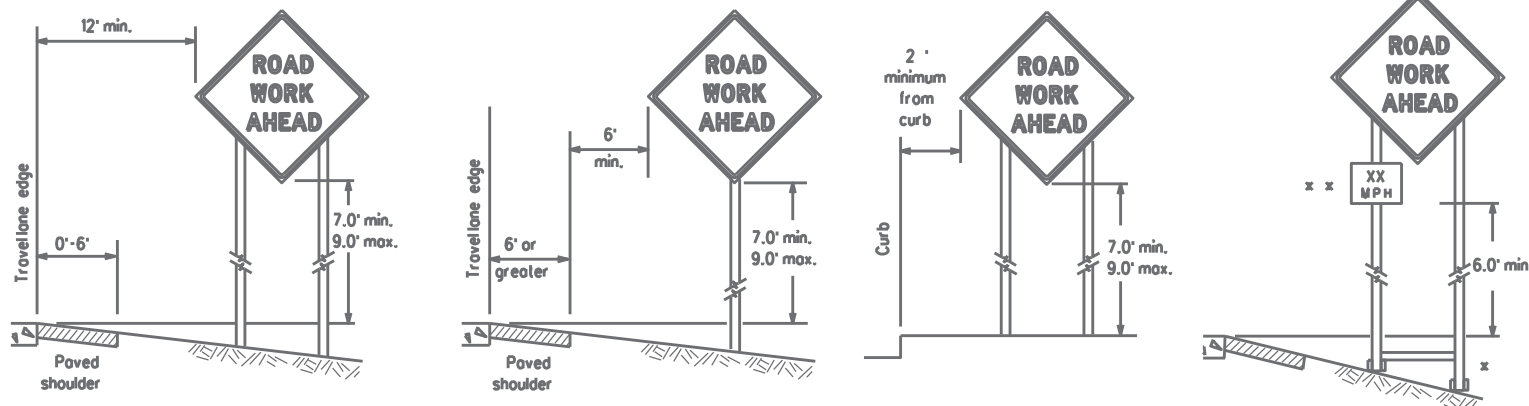

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

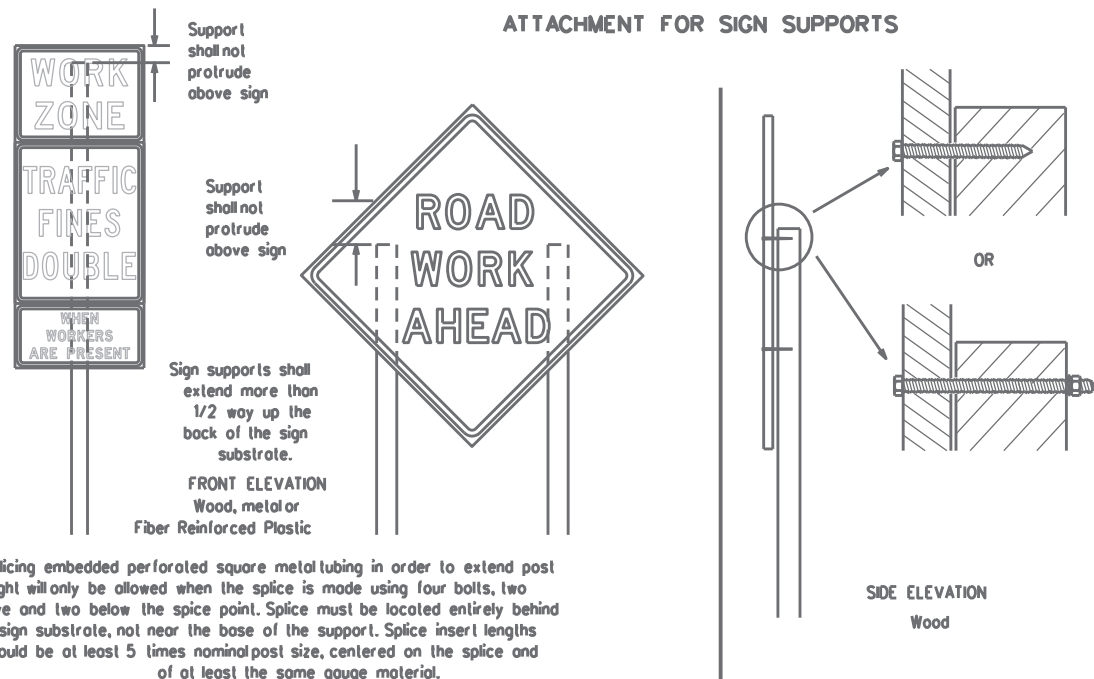


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nois shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectized when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

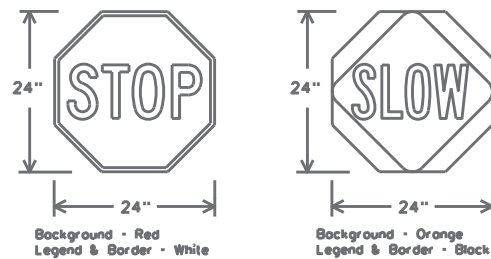

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{TL} OR C _{TL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type C, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES



BC(4)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HSWAY				
REVISIONS		6470	27	001	US277, etc.				
9-07	8-14	DST		COUNTY	SHEET NO.				
7-13	5-21	22	MAVERICK, etc.		26				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:46 PM FILE: T:\LRDD5\TMTAFY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

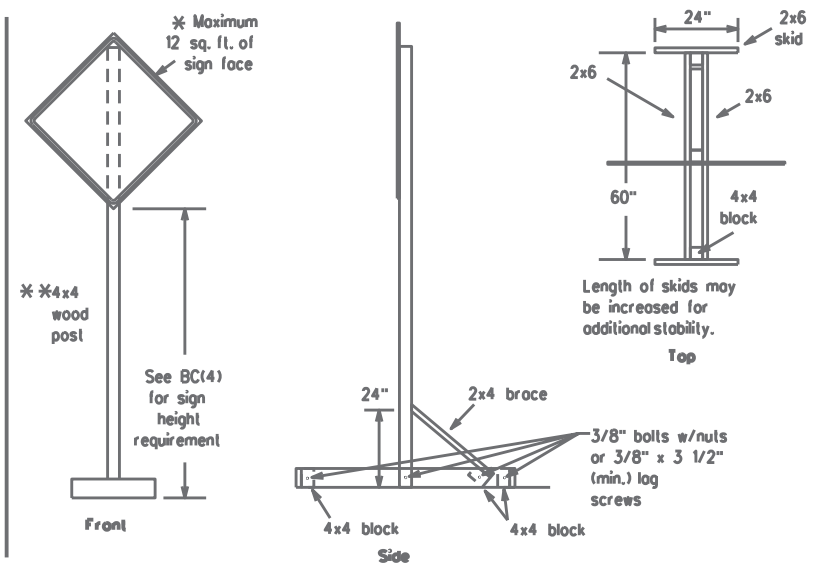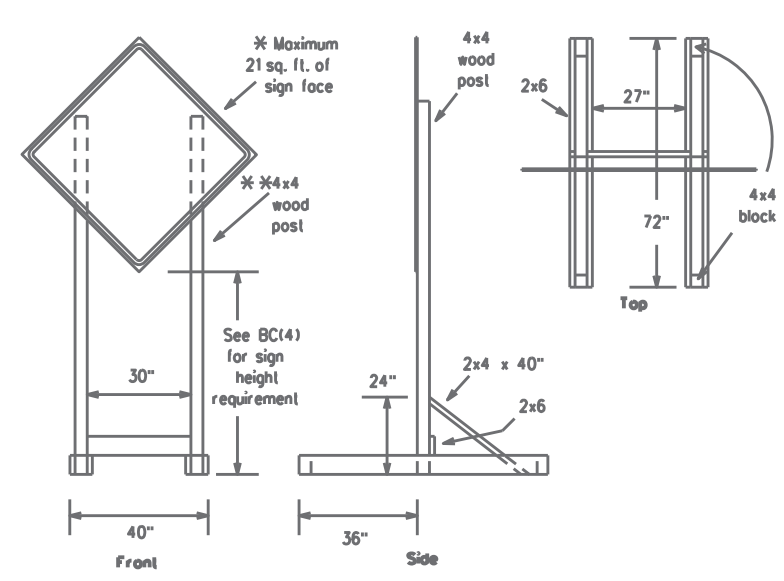



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

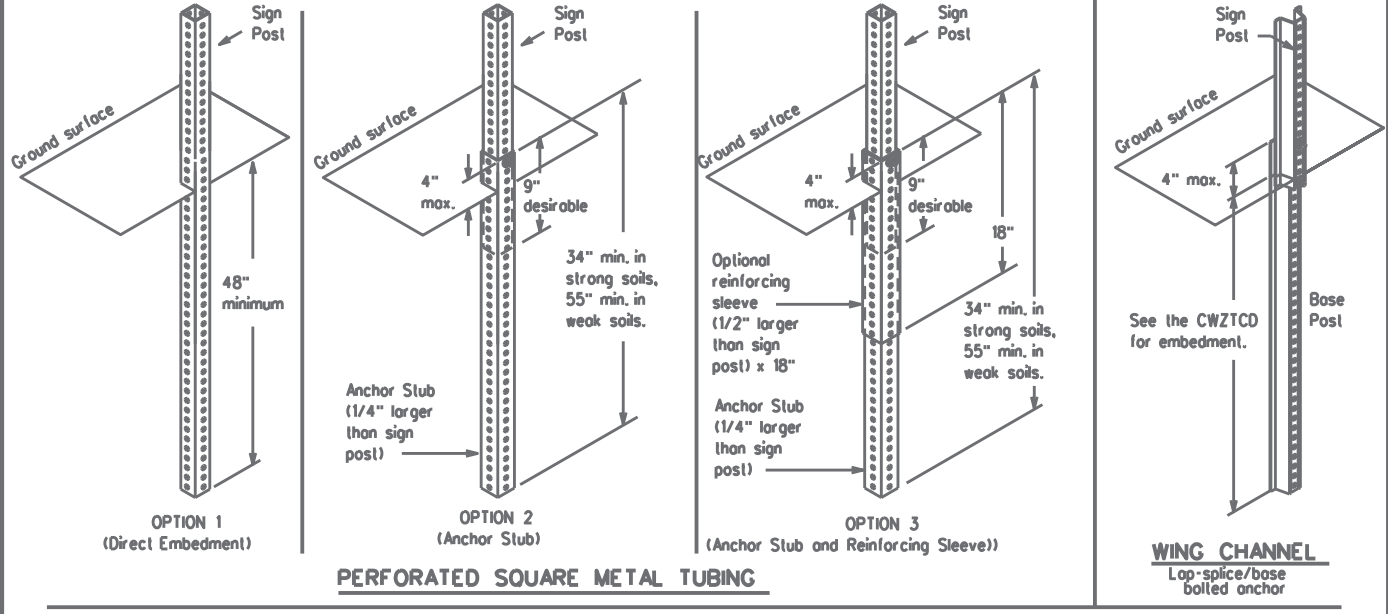

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

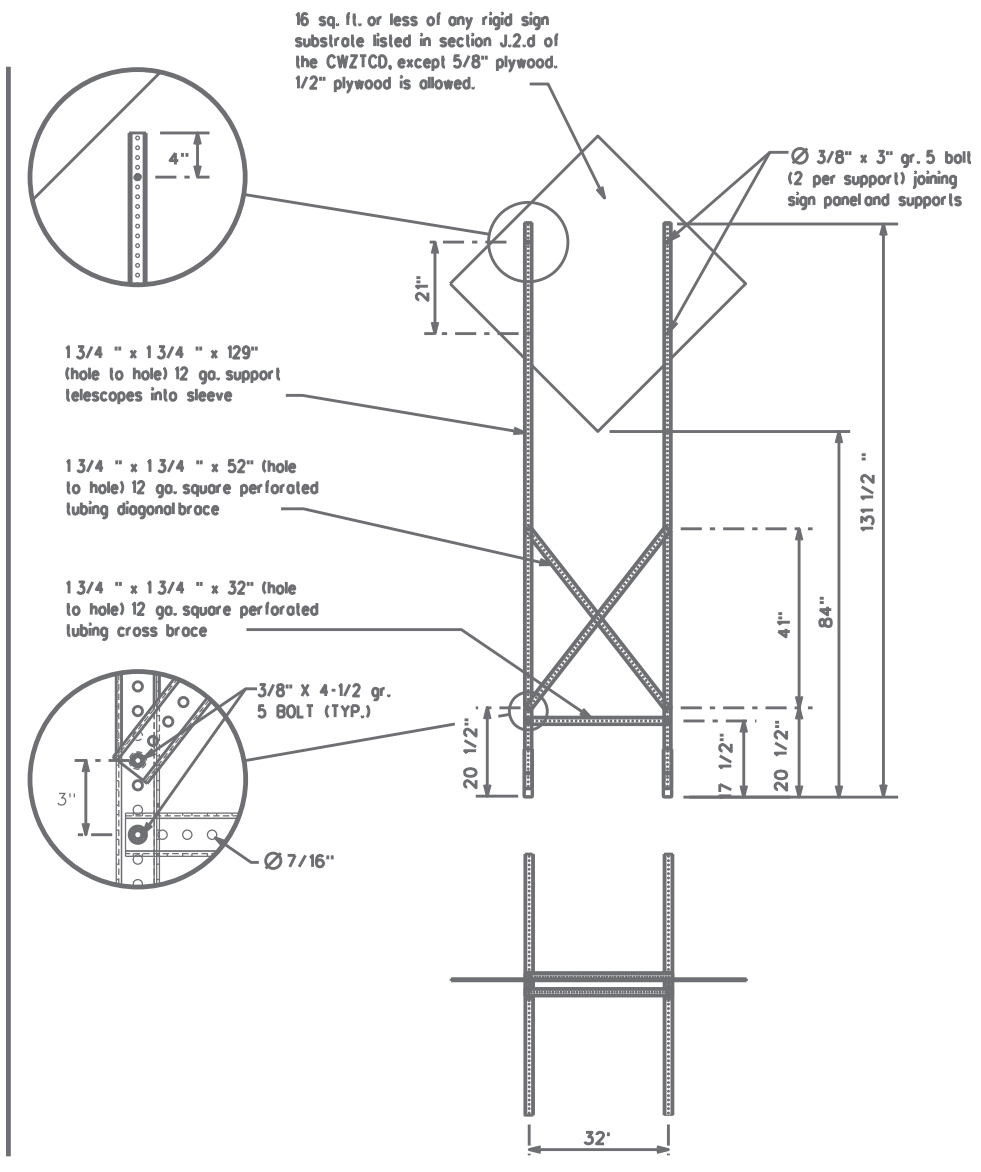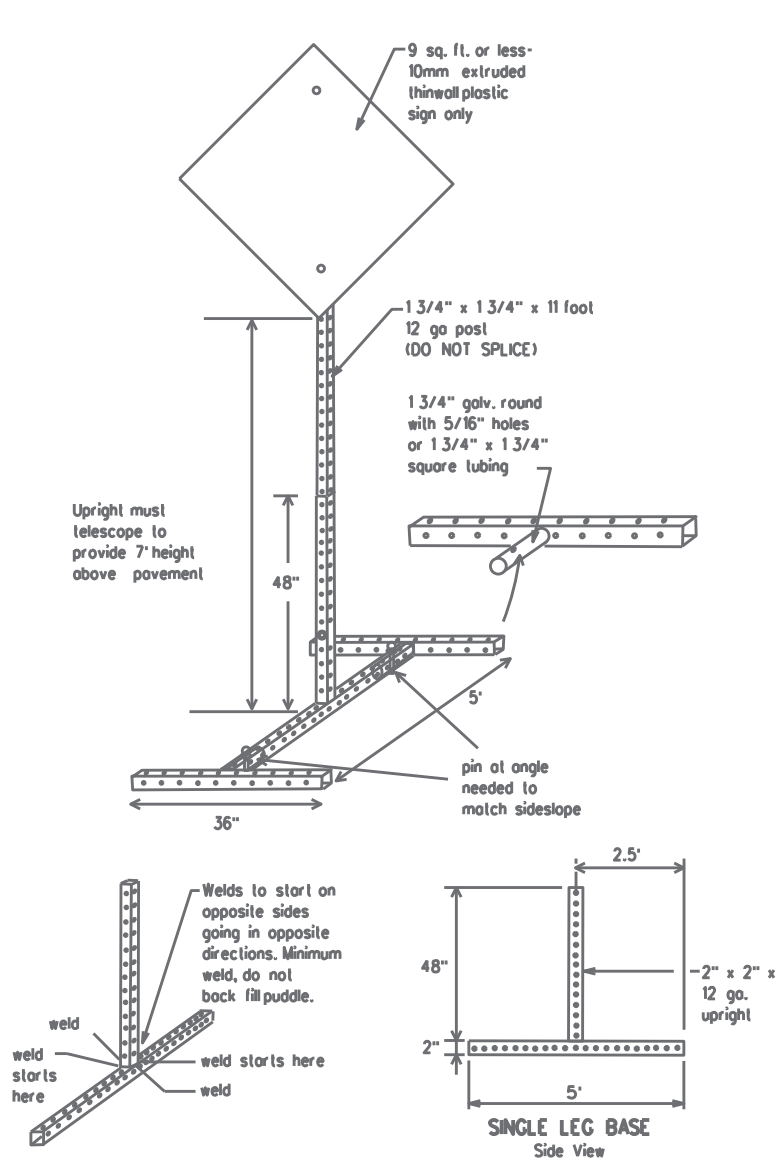

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS
 Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS
 MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

- GENERAL NOTES**
1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
 2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
 3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- * See BC(4) for definition of "Work Duration."
 - ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
 - ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	22	MAVERICK, etc.	27	

DATE: 6/21/2024 5:01:46 PM
 FILE: T:\LRD\STMT\MTFY_2024\MNT Coect\CAD\Standards\bc-21.dgn

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLRs
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHs
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	West Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation = IH-number, US-number, SH-number, FM-number

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
XXXXXXXXX BLVD CLOSED

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE

FORM X LINES RIGHT
USE XXXXX RD EXIT
USE EXIT I-XX NORTH
USE I-XX E TO I-XX N
WATCH FOR TRUCKS
EXPECT DELAYS
PREPARE TO STOP
END SHOULDER USE
WATCH FOR WORKERS

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXXX TO XXXXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

* * Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM-XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

* * See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS should be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flogger Symbol"(CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.




BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	22	MAVERICK, etc.	28	

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

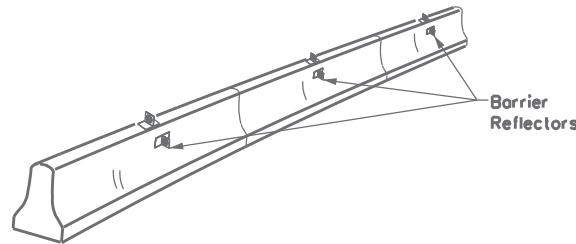

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edge line being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

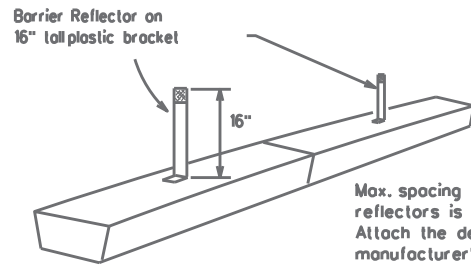


LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

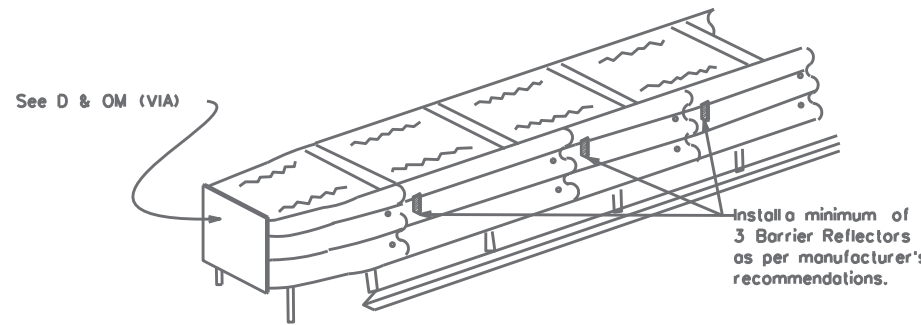

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTC List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C sheeting, meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTC.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

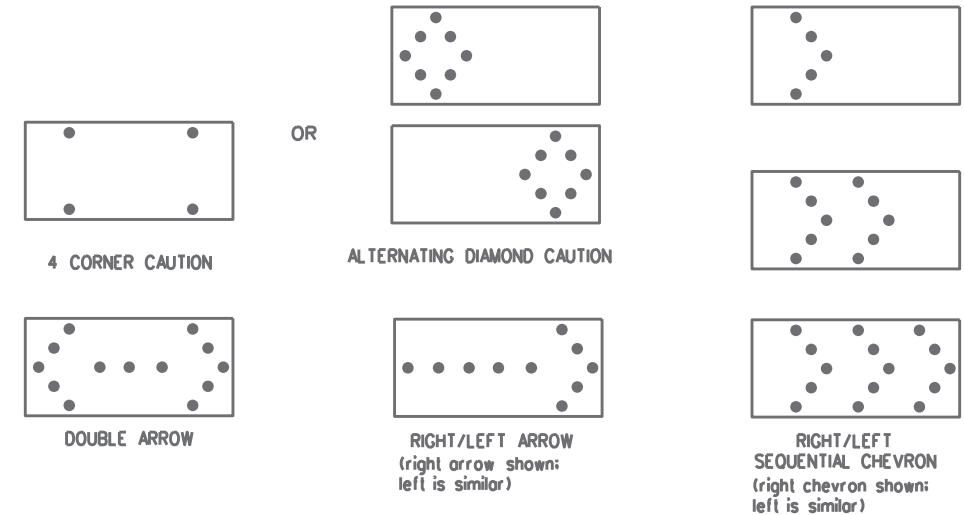

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTC for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTC for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC(7)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	27	001	US277, etc.				
9-07	8-14	DIST		COUNTY	SHEET NO.				
7-13	5-21	22	MAVERICK, etc.		29				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:47 PM
FILE: I:\LRDD5\TMTAFY_2024\MT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

GENERAL NOTES

1. For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
4. Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
5. Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
6. The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:



1. Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
3. Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
5. The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
7. Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
8. Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
9. Drum body shall have a maximum unballasted weight of 11 lbs.
10. Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

1. The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
2. The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
2. Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
3. Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
4. The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
5. When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
6. Ballast shall not be placed on top of drums.
7. Adhesives may be used to secure base of drums to pavement.

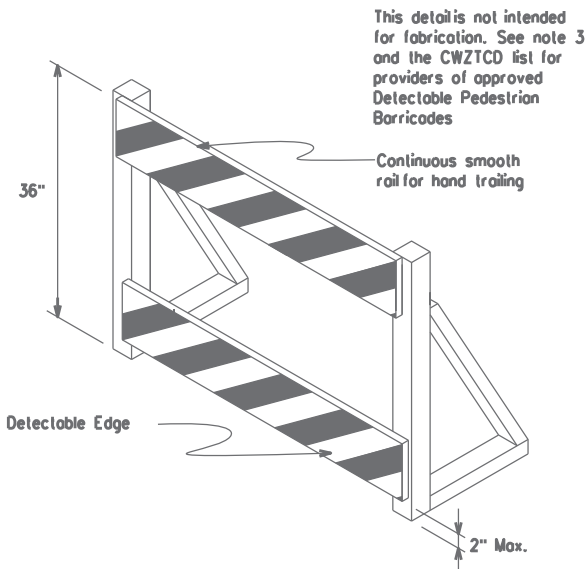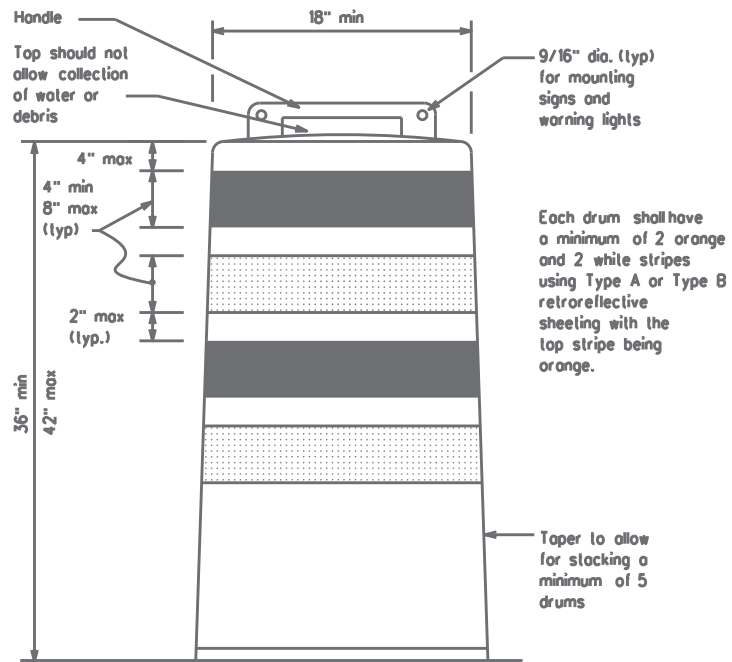

DETECTABLE PEDESTRIAN BARRICADES

1. When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
2. Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
3. Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
4. Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
5. Warning lights shall not be attached to detectable pedestrian barricades.
6. Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane
Divider, Driveway sign D70a, Keep Right
R4 series or other signs as approved
by Engineer



12" x 24"
Vertical Panel
mount with diagonals
sloping down towards
travel way

Plywood, Aluminum or Metal sign
substrates shall NOT be used on
plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

1. Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
2. Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
3. Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
5. Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
6. Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
7. Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
8. R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES



BC(8)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-03 8-14	DIST	COUNTY	SHEET NO.	
9-07 5-21	22	MAVERICK, etc.	30	
7-13				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:47 PM
 FILE: I:\LRDD\STMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

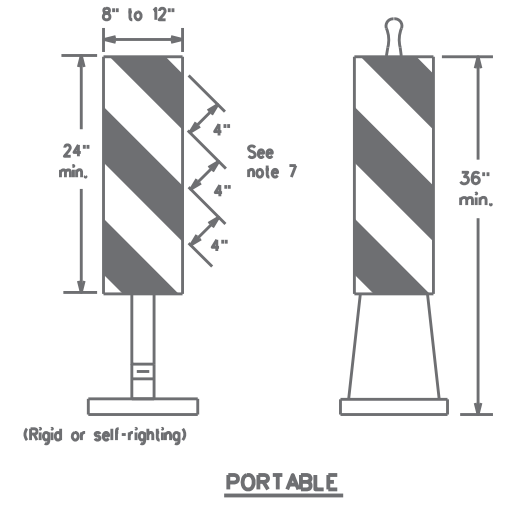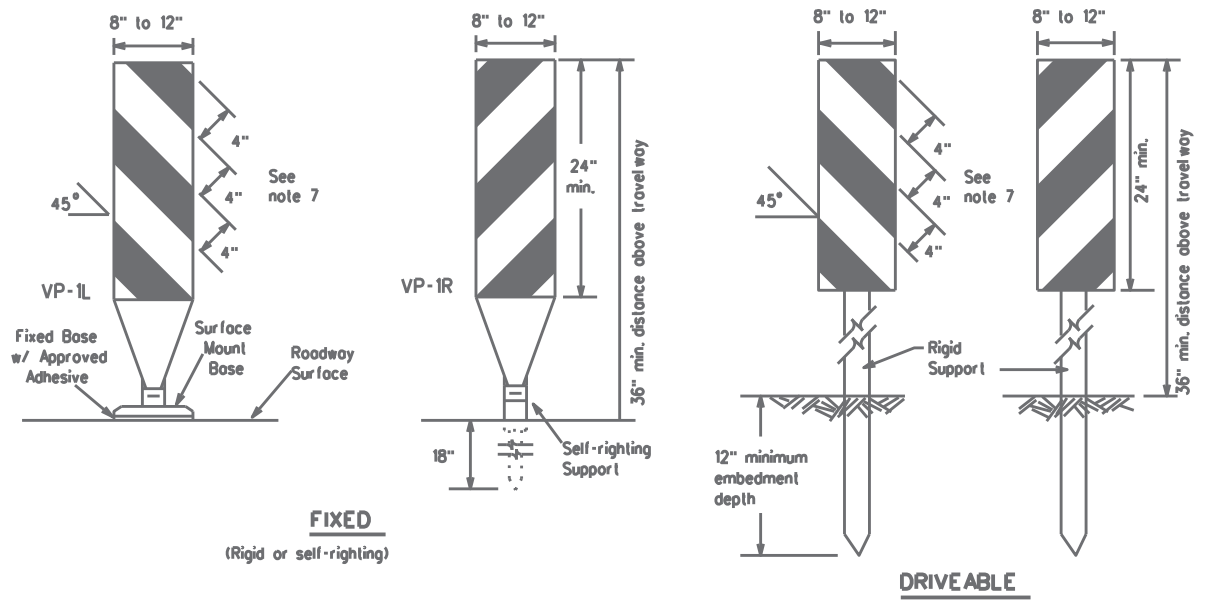


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panels is 36 inches or greater, a panel stripe of 6 inches shall be used.

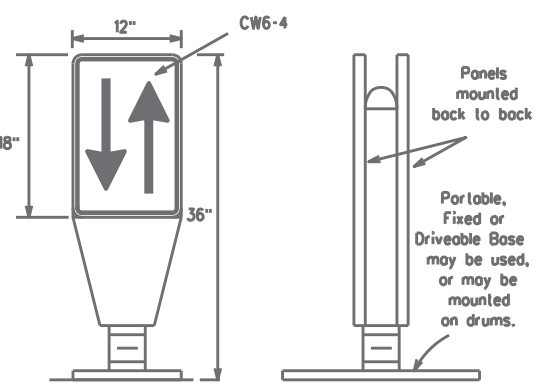


OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VP's.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VP's placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

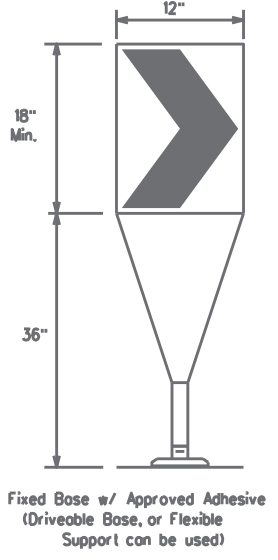

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

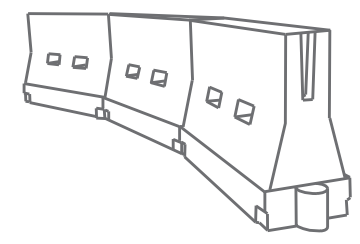

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long cones and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

x x Taper lengths have been rounded off.
 L- Length of Taper (FT.) W- Width of Offset (FT.)
 S- Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES


BC(9)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT:	SECT:	JOB:	HSWAY				
REVISIONS		6470	27	001	US277, etc.				
9-07	8-14	DIST:	COUNTY:	SHEET NO.					
7-13	5-21	22	MAVERICK, etc.	31					


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stocked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

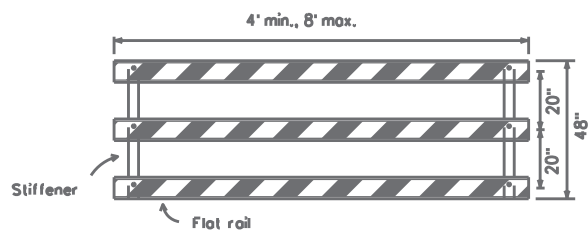


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

Each roadway of a divided highway shall be barricaded in the same manner.

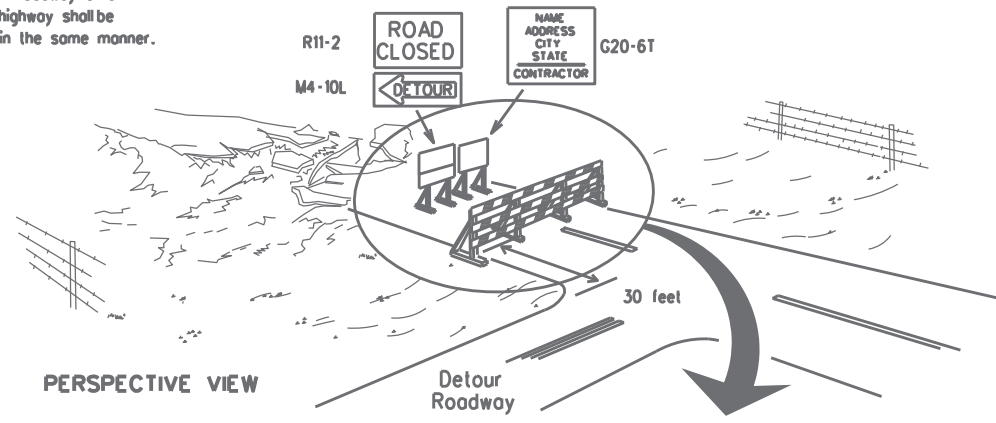

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

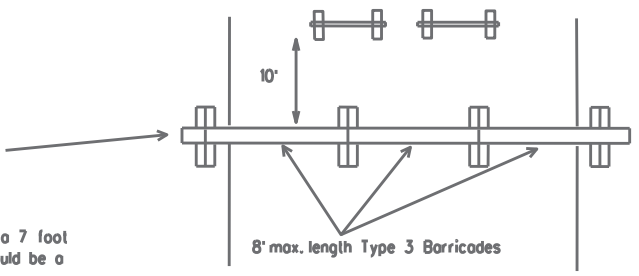


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

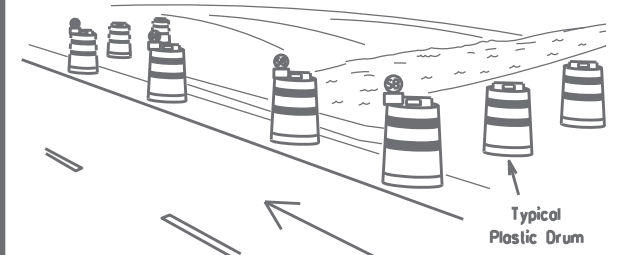

PERSPECTIVE VIEW

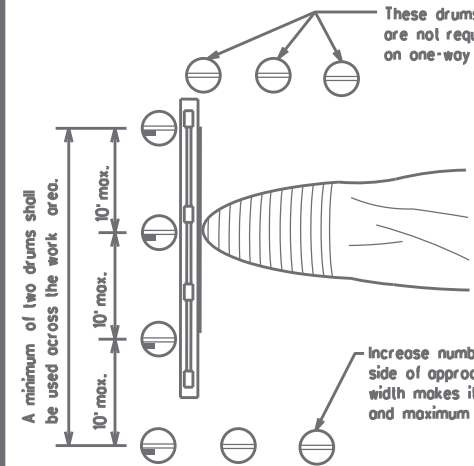


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

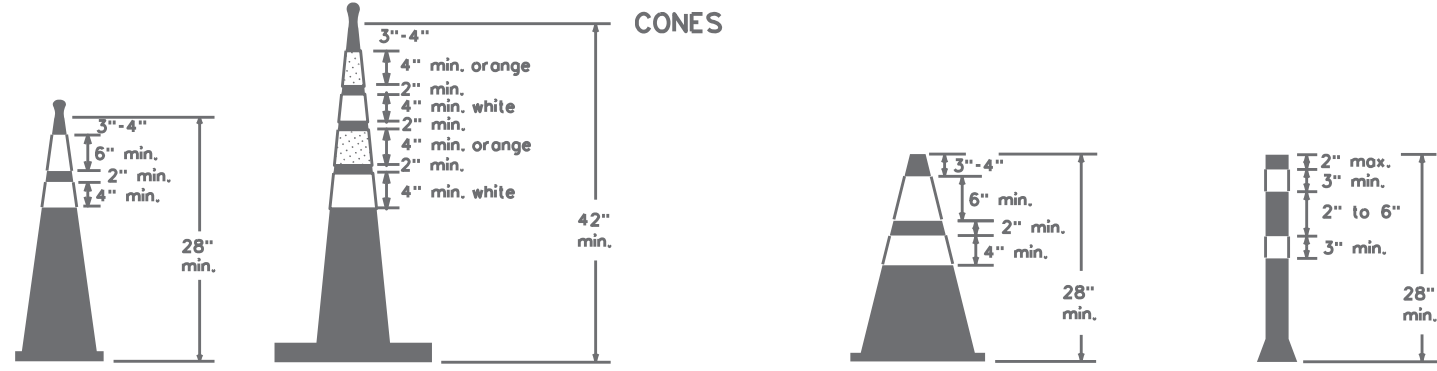


Two-Piece cones

One-Piece cones


Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

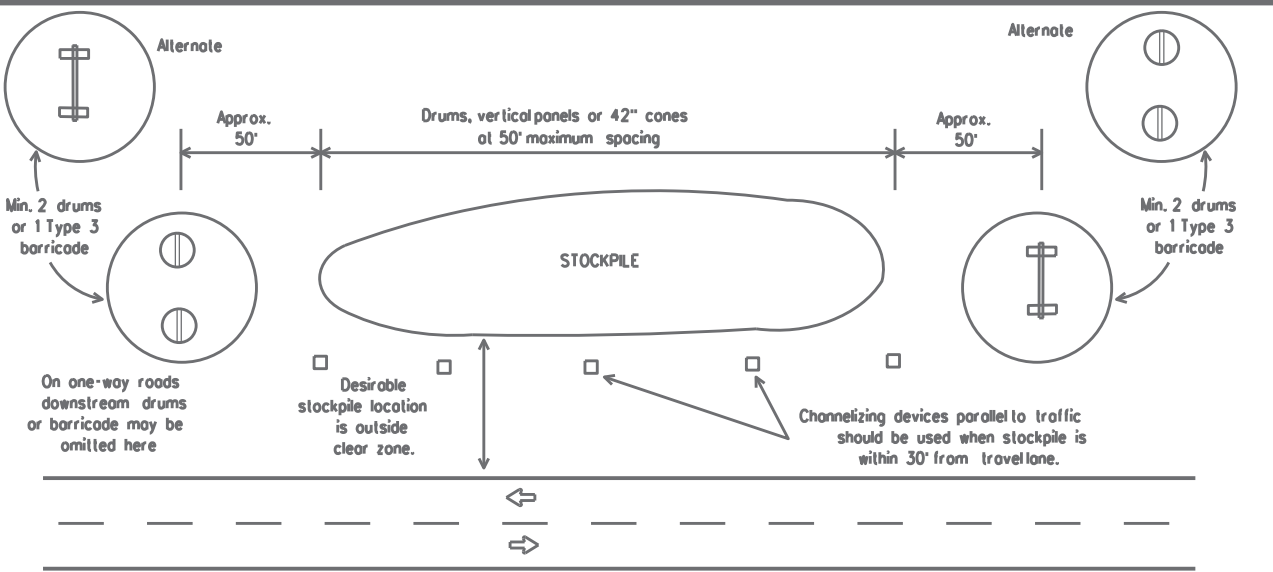

TRAFFIC CONTROL FOR MATERIAL STOCKPILES

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined in BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	22	MAVERICK, etc.	32	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024 5:01:47 PM
 FILE: I:\LRDDSTMT\FY_2024\MNT Contract (FY24)\Seel Coet\CAD\Standards\bc-21.dgn

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Block-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

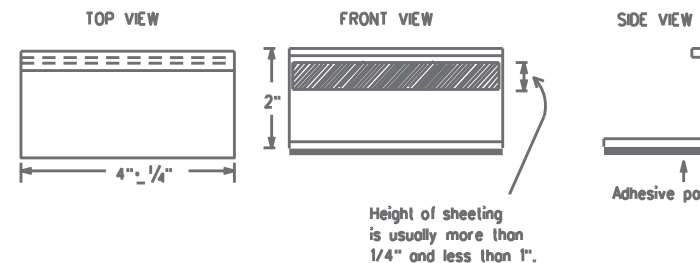

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS





BC(11)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT	
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY	
REVISIONS		6470	27	001	US277, etc.
2-98	9-07	5-21			
1-02	7-13				
11-02	8-14				
	DIST	COUNTY	SHEET NO.		
	22	MAVERICK, etc.	33		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 6/21/2024 5:01:48 PM
 FILE: I:\LRDD\STMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

PAVEMENT MARKING PATTERNS

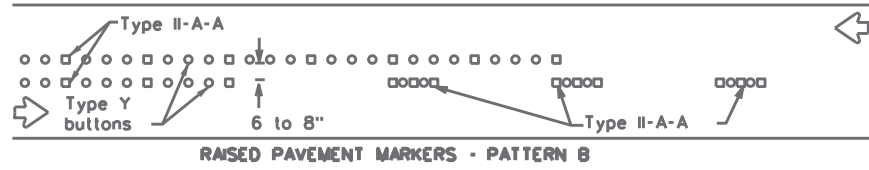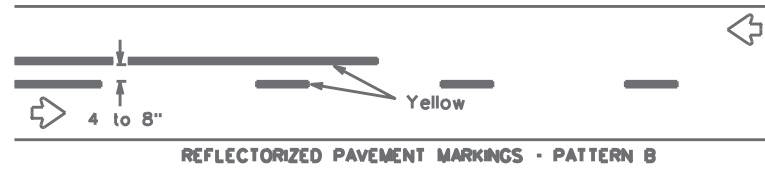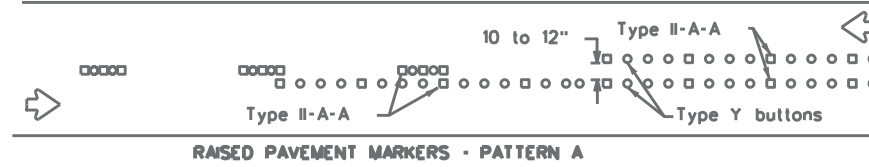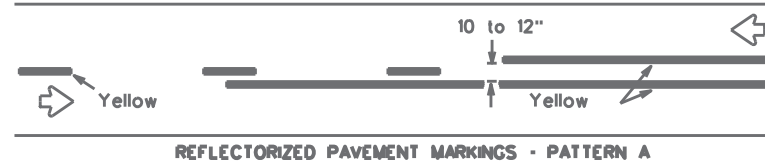



Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

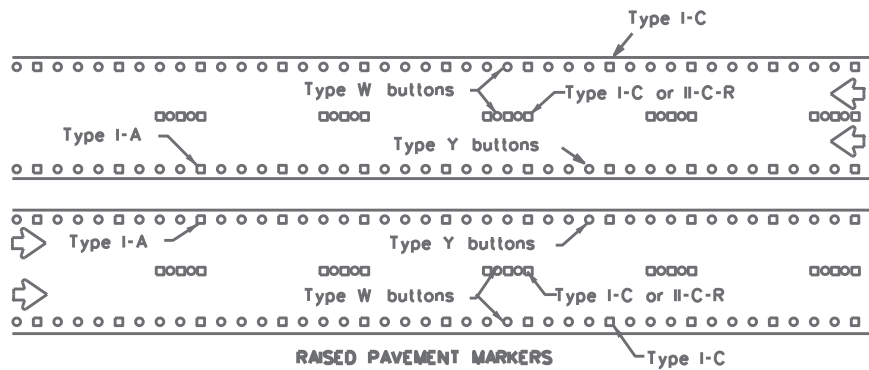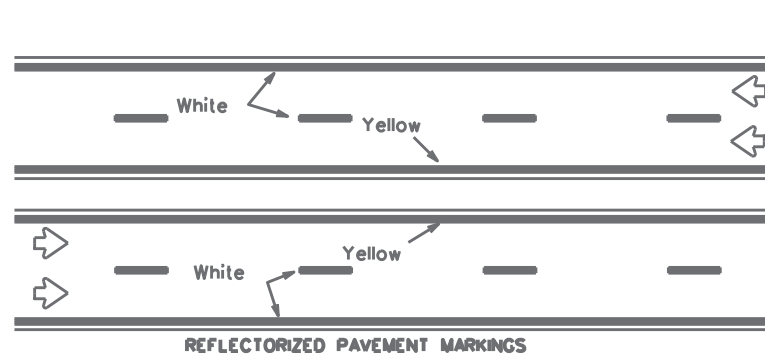



Prefabricated markings may be substituted for reflectORIZED pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

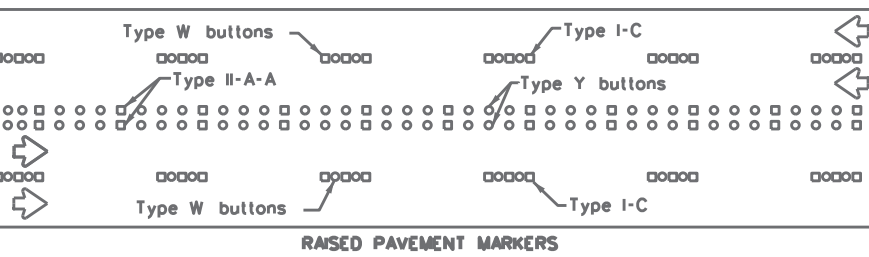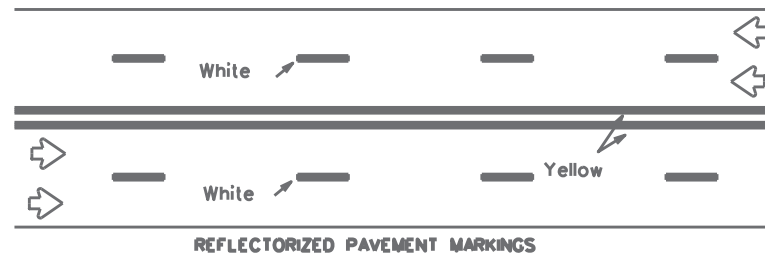

Prefabricated markings may be substituted for reflectORIZED pavement markings.


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

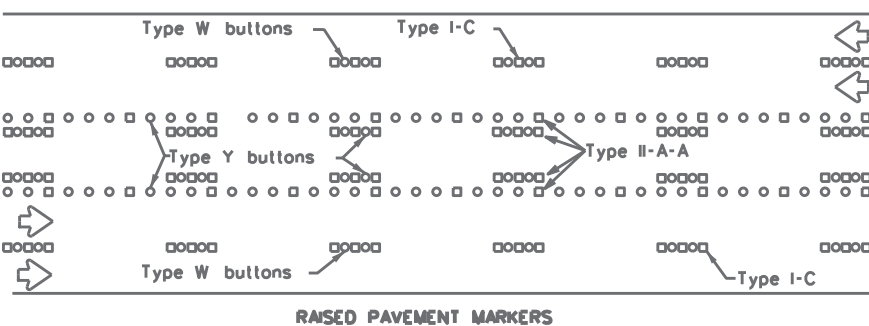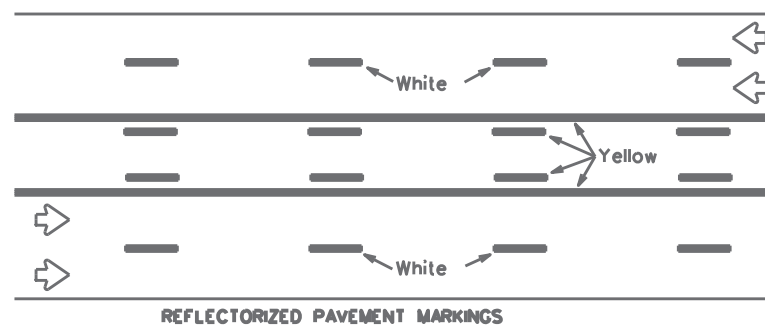



Prefabricated markings may be substituted for reflectORIZED pavement markings.

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

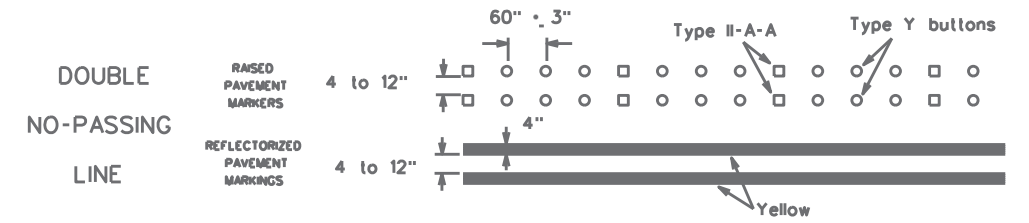


SOLID LINES

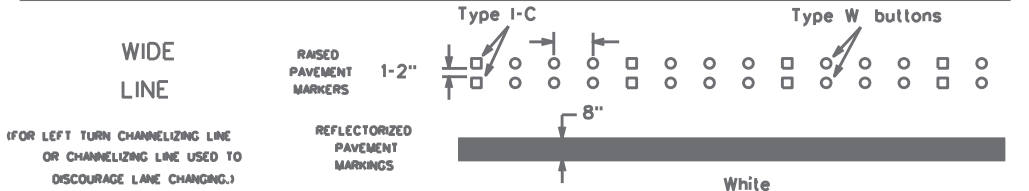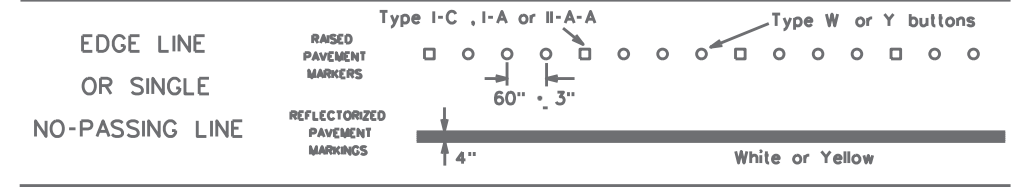

BROKEN LINES

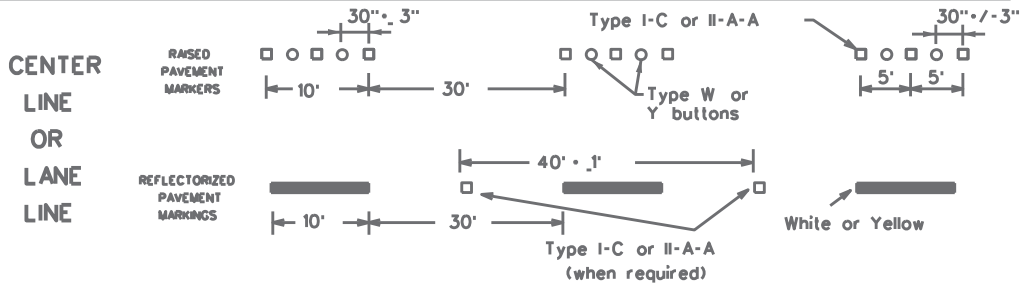


AUXILIARY OR LANEDROP LINE

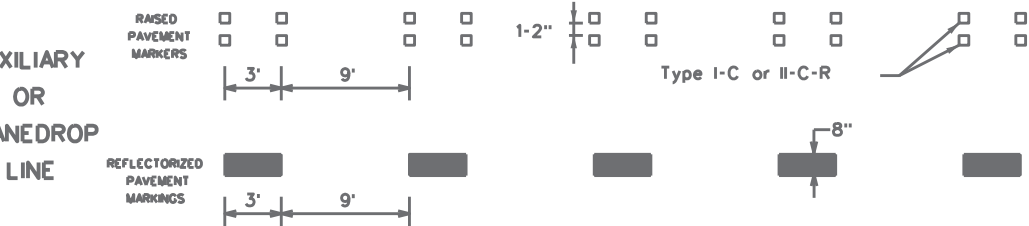

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

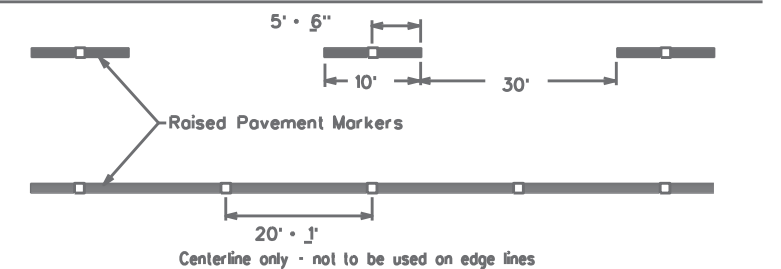

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	22	MAVERICK, etc.	34	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:48 PM
FILE: I:\LRD\STMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:48 PM
FILE: T:\RRD\STMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\pml-22.dwg

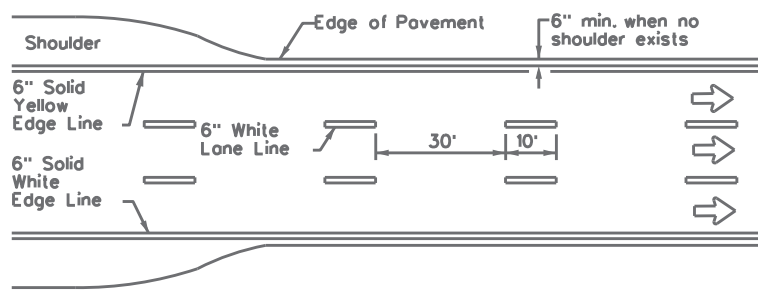

**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

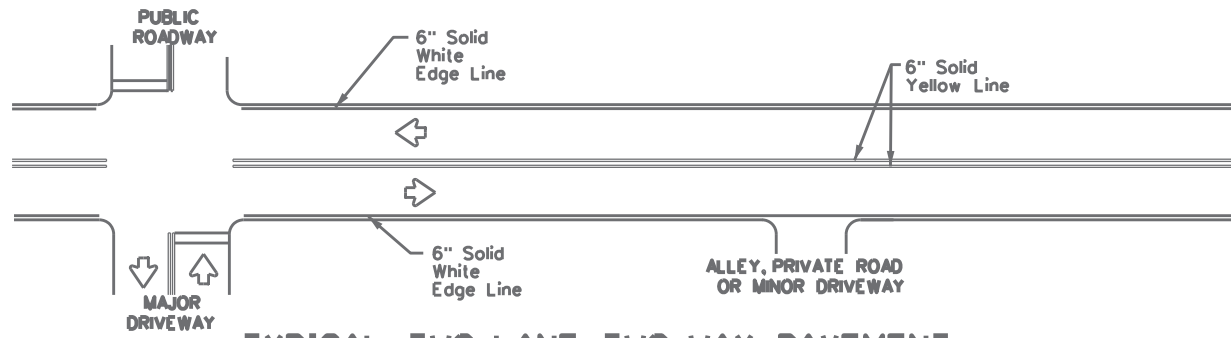


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

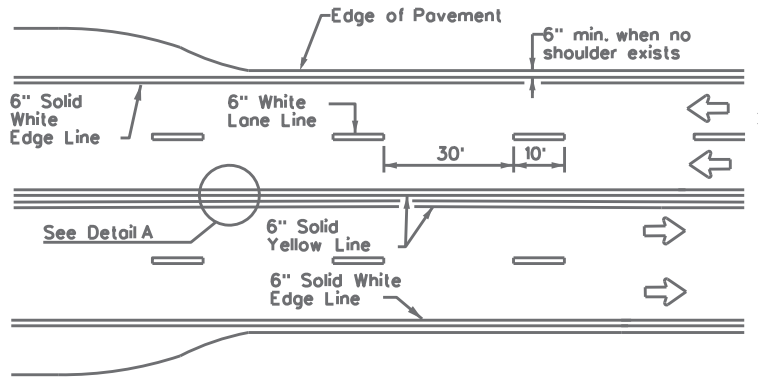


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

• 2" minimum for restripe projects when approved by the Engineer.
•• 8" minimum for restripe projects when approved by the Engineer.




DETAIL "A"


9" min. - 10" typ.
(18" max. for traveled way greater than 48' only)

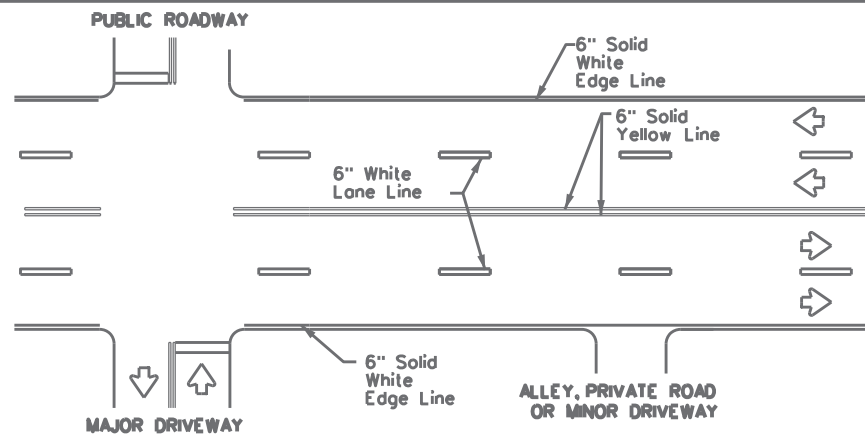

**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

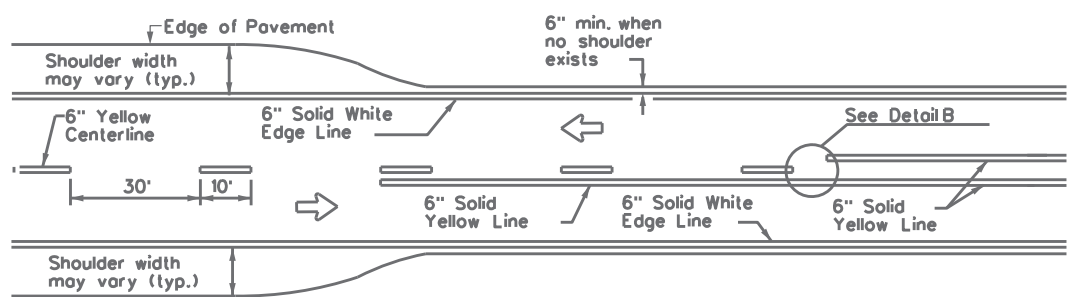


**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

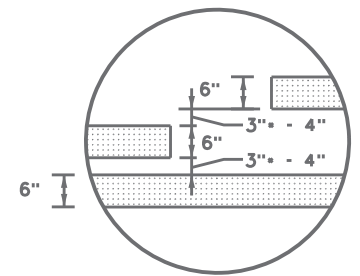

DETAIL "B"

• 2" minimum for restripe projects when approved by the Engineer.



YIELD LINES

For posted speed on road being marked equal to or greater than 45 MPH.




For posted speed on road being marked equal to or less than 40 MPH.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

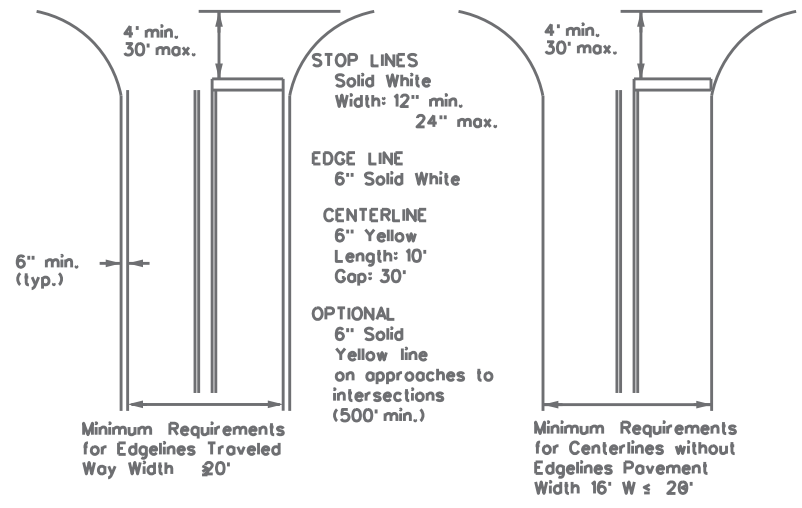


NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**

Based on Traveled Way and Pavement Widths for Undivided Roadways

NOTES

- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

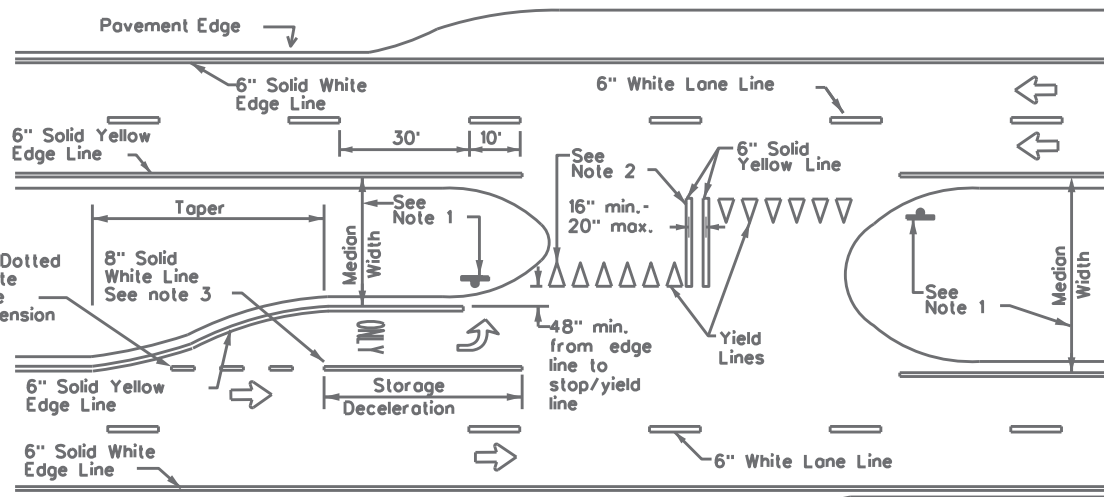

FOUR LANE DIVIDED ROADWAY CROSSOVERS




**TYPICAL STANDARD
PAVEMENT MARKINGS**

PM(1)-22


FILE:	pml-22.dgn	DN:		CK:		DW:		CK:	
© TxDOT	December 2022	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6470	27	001	US277, etc.				
11-78	8-00 6-20	DIST		COUNTY	SHEET NO.				
8-95	3-03 12-22	22		MAVERICK, etc.	35				
5-00	2-12								

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

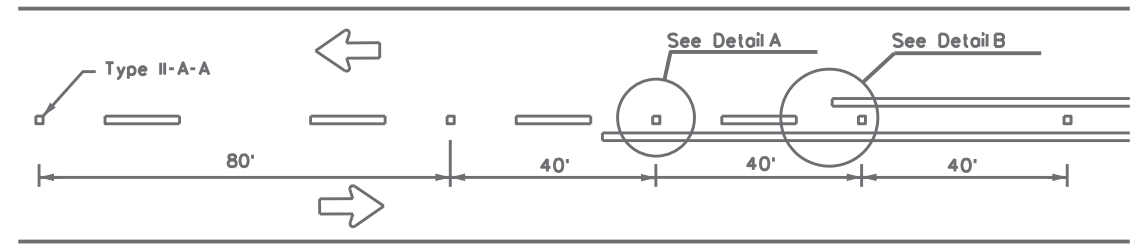


CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

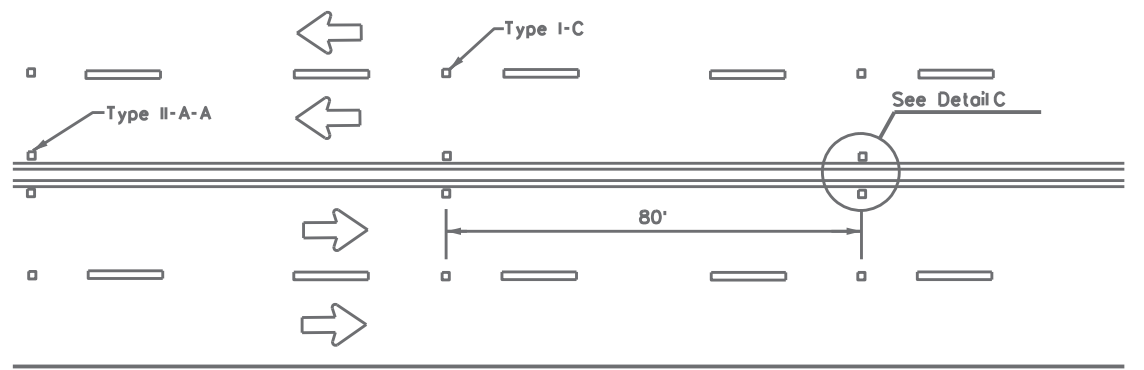

**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY ROADWAYS**

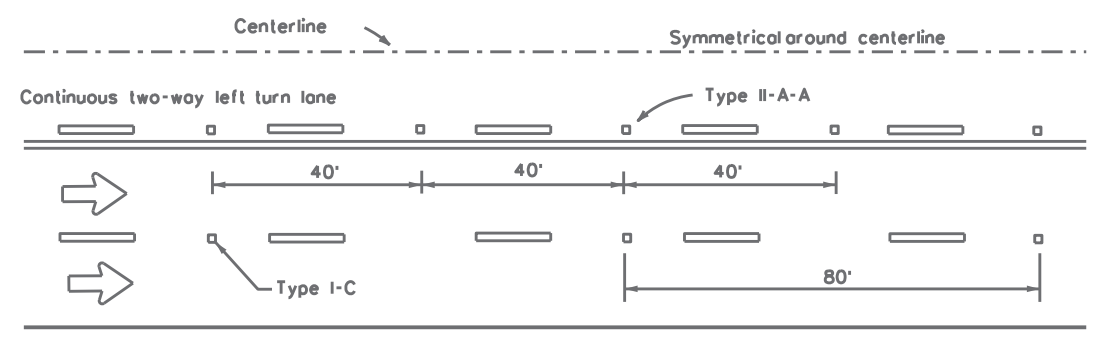
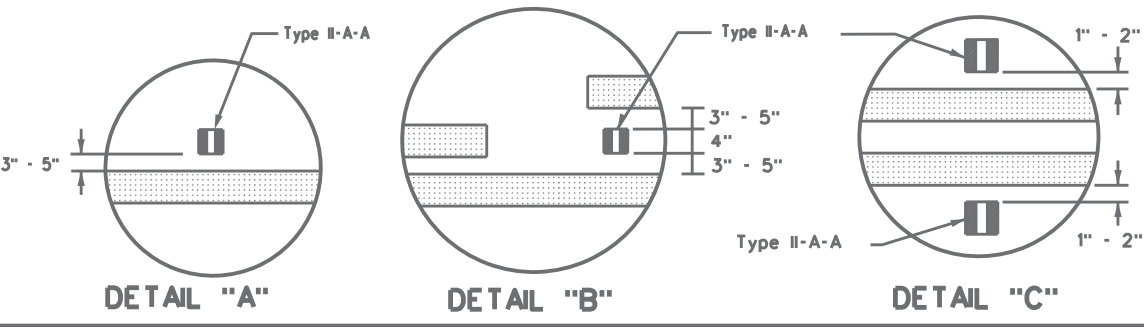


CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

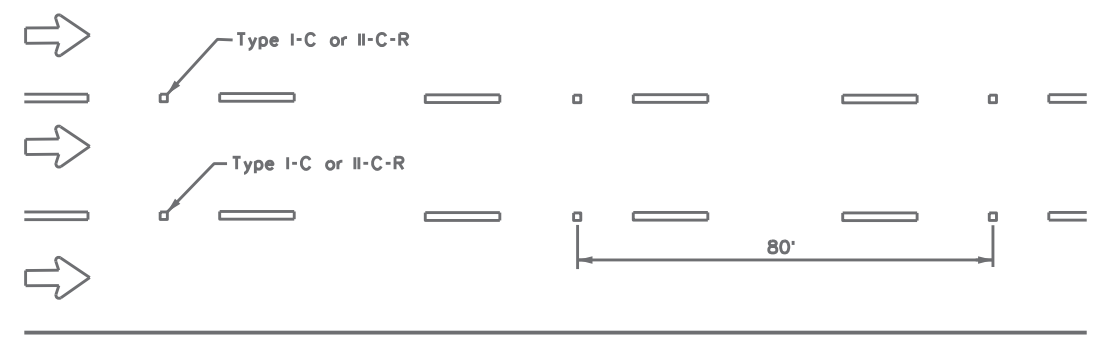


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.
See Note 3.

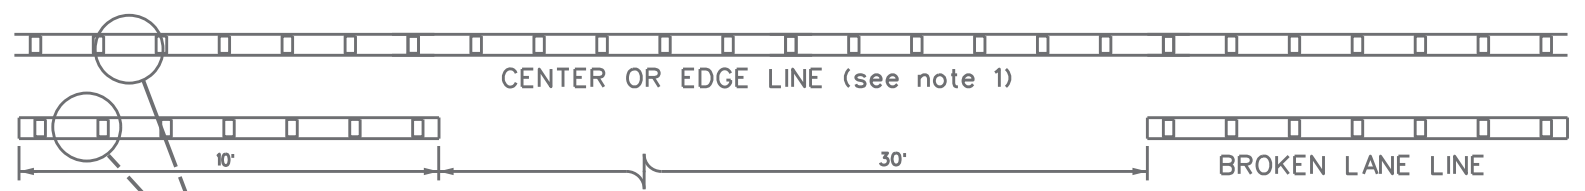

**REFLECTORIZED PROFILE
PATTERN DETAIL
USING REFLECTIVE PROFILE PAVEMENT MARKINGS**

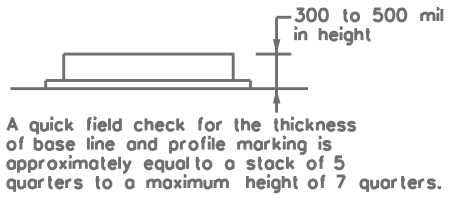

NOTES


- Edge lines should typically be 6" wide and the materials shall be specified in the plans.
- Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

GENERAL NOTES


- All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.
- On concrete pavements, the raised pavement markers should be placed to one side of the longitudinal joints.
- Use raised pavement marker Type I-C with undivided roadways, flush medians, and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

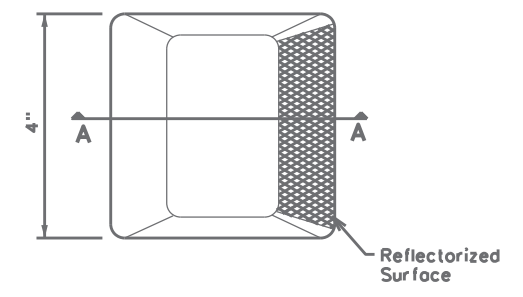

Type I (Top View)

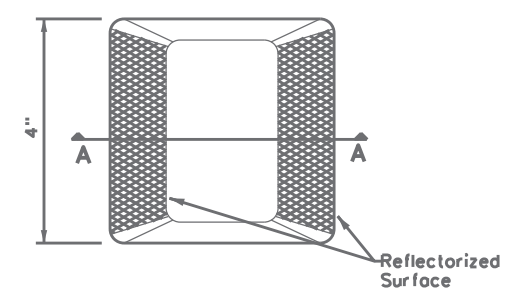

Type II (Top View)

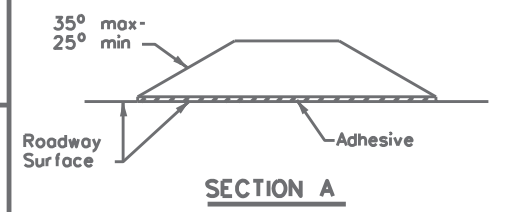

SECTION A

RAISED PAVEMENT MARKERS



**POSITION GUIDANCE USING
RAISED MARKERS
REFLECTORIZED PROFILE
MARKINGS
PM(2)-22**

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	22	MAVERICK, etc.	36	
5-00 2-12				

NOTES

- Lane reduction pavement markings are used where the number of through lanes is reduced because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane. For Texas Super 2 Passing Lanes, see TS2(PL) standard sheets.
- On divided highways, an additional RIGHT LANE ENDS (W9-1R) sign may be installed in the median aligned with the W9-1R sign on the right side of the highway.
- Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
- For lane reductions on Freeways and Expressways, signing shall conform to the TxDOT Freeway Signing Handbook.

Posted Speed	D (ft)	L (ft)
30 MPH	460	L = $\frac{WS^2}{60}$
35 MPH	565	
40 MPH	670	
45 MPH	775	L = WS
50 MPH	885	
55 MPH	990	
60 MPH	1,100	
65 MPH	1,200	
70 MPH	1,250	
75 MPH	1,350	


GENERAL NOTES

- Lane use word and arrow markings shall be used where through lanes approaching an intersection become mandatory turn lanes. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use arrow markings or word and arrow markings may be used in other lanes and turn bays for emphasis. Details for words and arrows are as shown in the Standard Highway Sign Designs for Texas.
- When lane-use words and arrow markings are used, two sets of arrows should be used if the length of the bay is greater than 180 feet. When a single lane use arrow or word and arrow marking is used for a short turn lane, it should be located at or near the upstream end of the full-width turn lane.
- Use raised pavement marker Type I-C with undivided highways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer. See Chapter 3 of the Roadway Design Manual for additional information on turning lanes or storage lengths.


MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

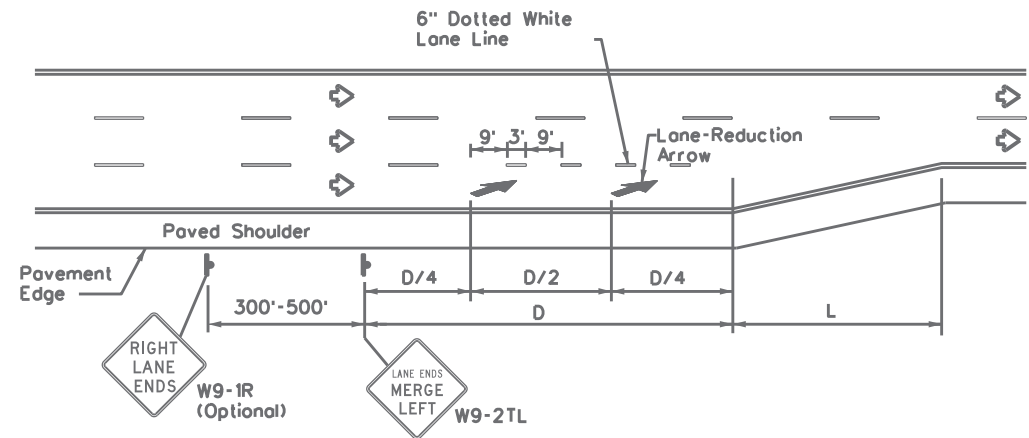


LANE REDUCTION

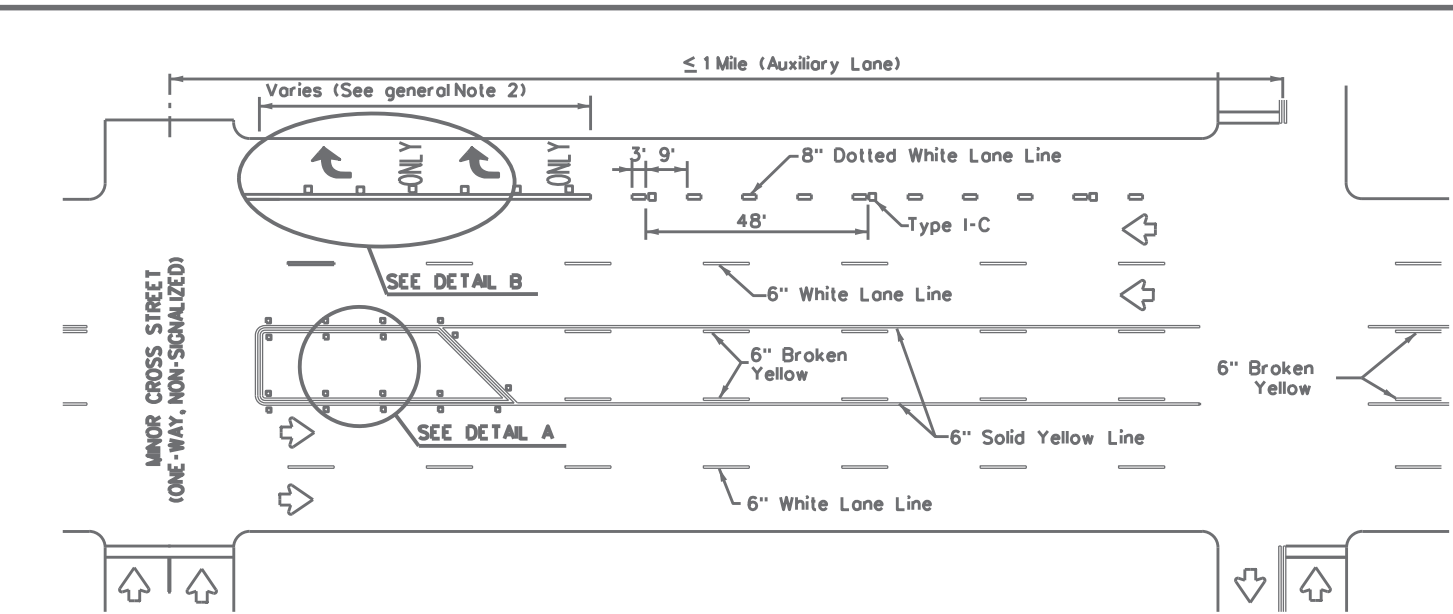

TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

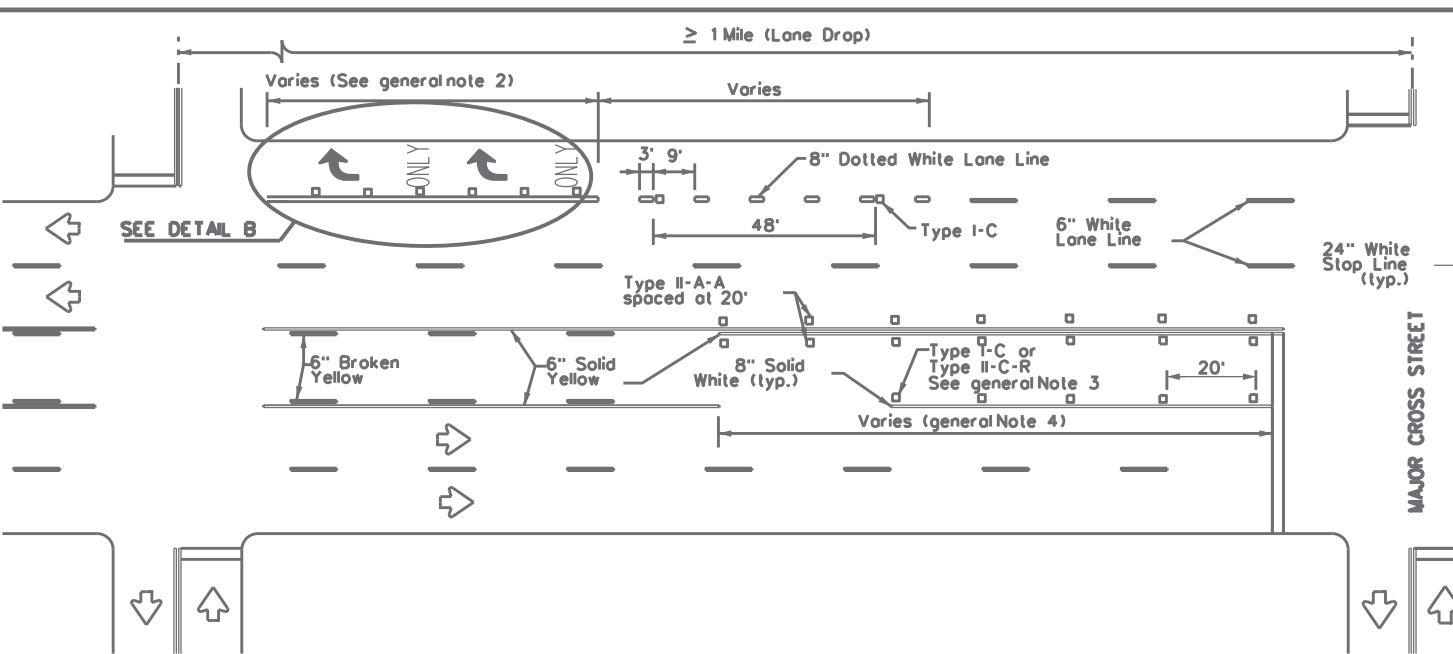


TYPICAL TWLTL AT TWO-WAY CROSS STREET AND RIGHT TURN LANE DROP

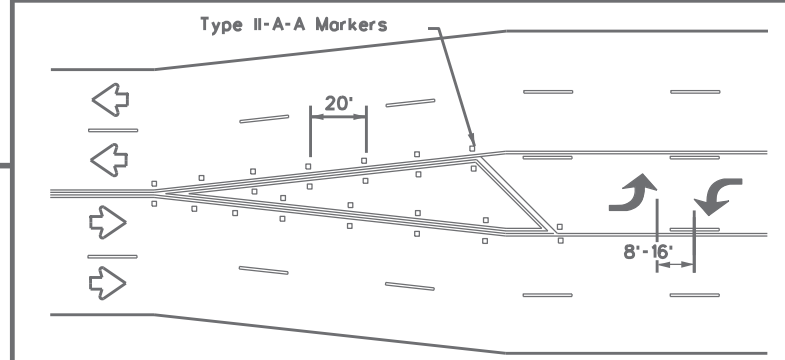


A two-way left-turn (TWLTL) lane-use arrow pavement marking should be used at or just downstream from the beginning of a two-way left-turn lane within a corridor. Repeating the marking after each intersection or dedicated turn bay is not required unless stated elsewhere in the plans.

TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

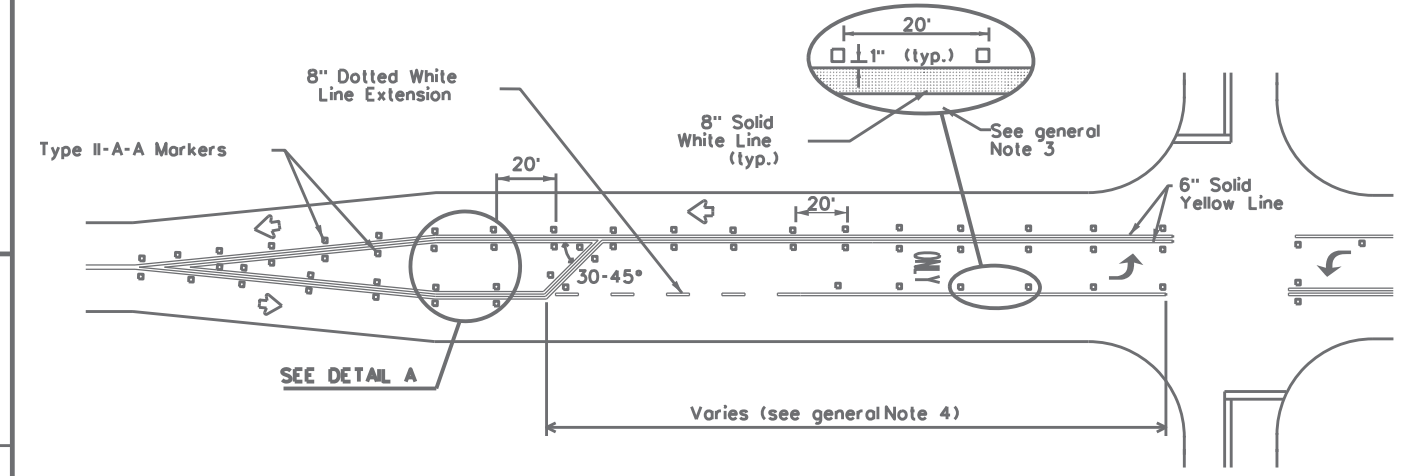

TYPICAL TWO-LANE ROADWAY INTERSECTION WITH LEFT TURN BAYS

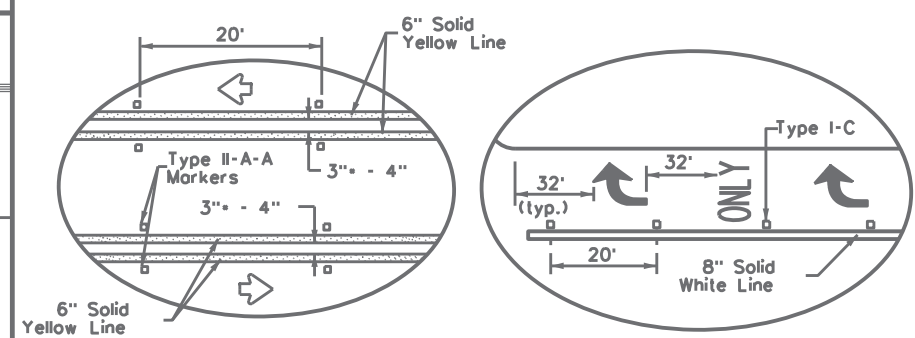

DETAIL A

DETAIL B

• 2" minimum allowed for restripe projects when approved by the Engineer.




TWO-WAY LEFT TURN LANES, RURAL LEFT TURN BAYS, AND LANE REDUCTION PAVEMENT MARKINGS PM(3)-22

FILE: pm3-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-98 3-03 6-20	DIST	COUNTY	SHEET NO.	
5-00 2-10 12-22	22	MAVERICK, etc.	37	
8-00 2-12				

DATE: 6/21/2024 5:01:49 PM
FILE: I:\RRDST\TMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\pm3-22.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:49 PM
 FILE: T:\LRDDST\TNT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\pm4-22a.dgn

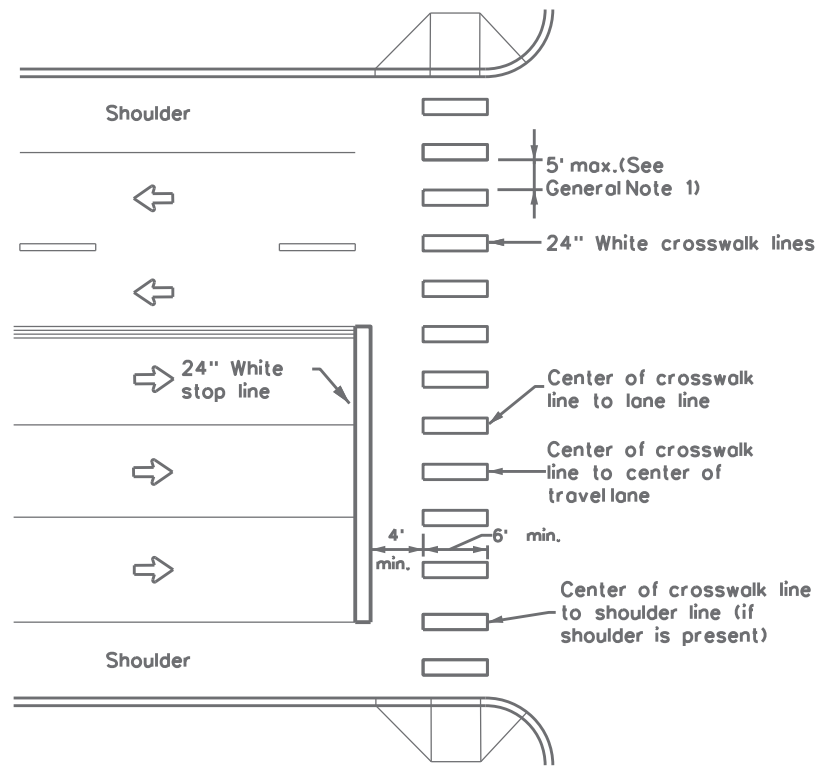


HIGH-VISIBILITY LONGITUDINAL CROSSWALK AT CONTROLLED APPROACH

GENERAL NOTES

1. Longitudinal crosswalk lines should not be placed in the wheel path of vehicles. Center the crosswalk lines on travel lanes, lane lines, and shoulder lines (if present).
2. A minimum 6" clear distance shall be provided to the curb face. If the last crosswalk line falls into this distance it must be omitted.
3. For divided roadways, adjustments in spacing of the crosswalk lines should be made in the median so that the crosswalk lines are maintained in their proper location across the travel portion of the roadway.
4. At skewed crosswalks, the crosswalk lines are to remain parallel to the lane lines.
5. Each crosswalk shall be a minimum of 6' wide.
6. The High-Visibility Longitudinal Crosswalk is the preferred crosswalk pattern on State Highways. Other crosswalk patterns as shown in the "Texas Manual on Uniform Traffic Control Devices" may be used. All crosswalk designs and dimension shall comply with the "Texas Manual on Uniform Traffic Control Devices."
7. Final placement of Stop Bar and Crosswalk shall be approved by the Engineer in the field.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

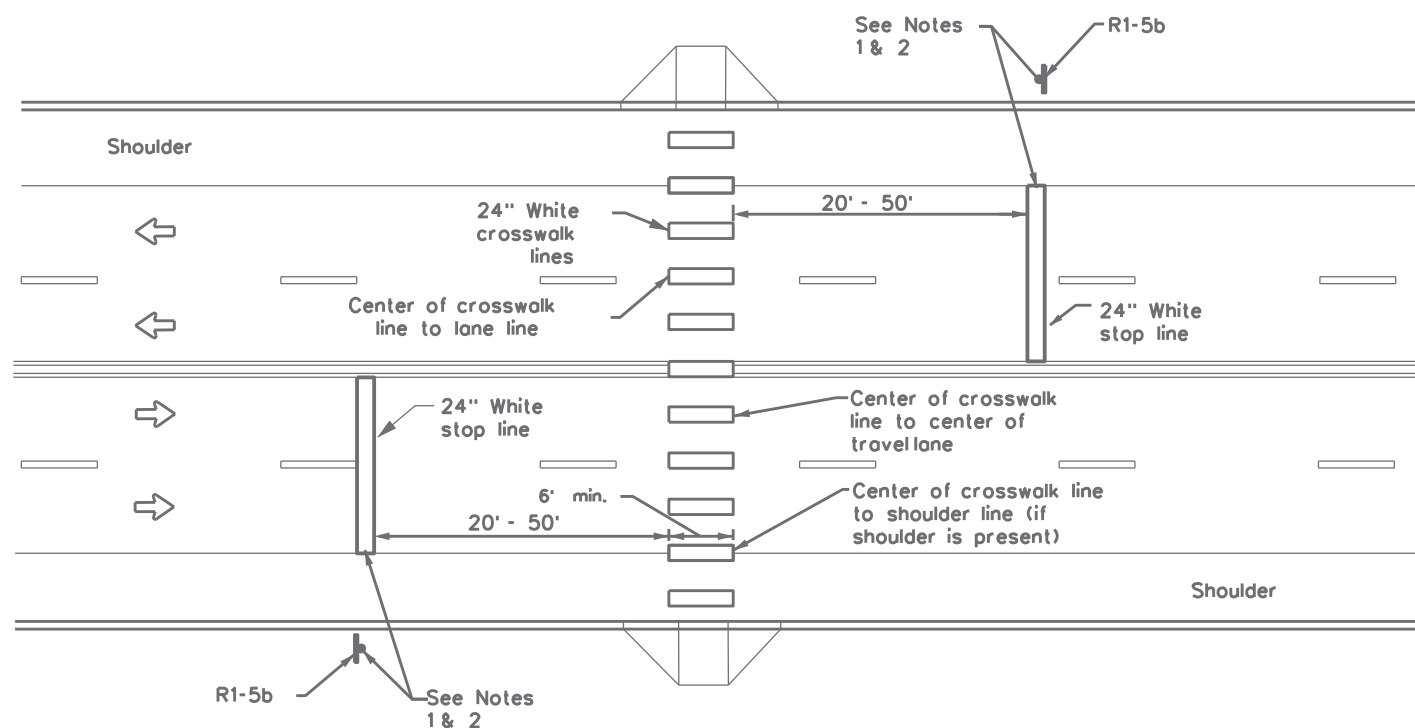

UNSIGNALIZED MIDBLOCK HIGH-VISIBILITY LONGITUDINAL CROSSWALK


NOTES:

1. Use stop bars with Stop Here For Pedestrians (R1-5b) signs at unsignalized midblock crosswalks.
2. Use stop bars with STOP HERE ON RED (R10-6 or R10-6a) signs at mid block crosswalks controlled by traffic signals or pedestrian hybrid beacons.

		Traffic Safety Division Standard	
<h2>CROSSWALK PAVEMENT MARKINGS</h2> <h3>PM(4)-22A</h3>			
FILE: pm4-22a.dgn	DN:	CK:	DW:
© TxDOT December 2022	CONT	SECT	JOB
REVISIONS	6470	27	001
6-20	DIST	COUNTY	SHEET NO.
6-22	22	MAVERICK, etc.	38
12-22			
22D			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:50 PM
 FILE: T:\RRDDST\MNT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\pm5-22.dwg

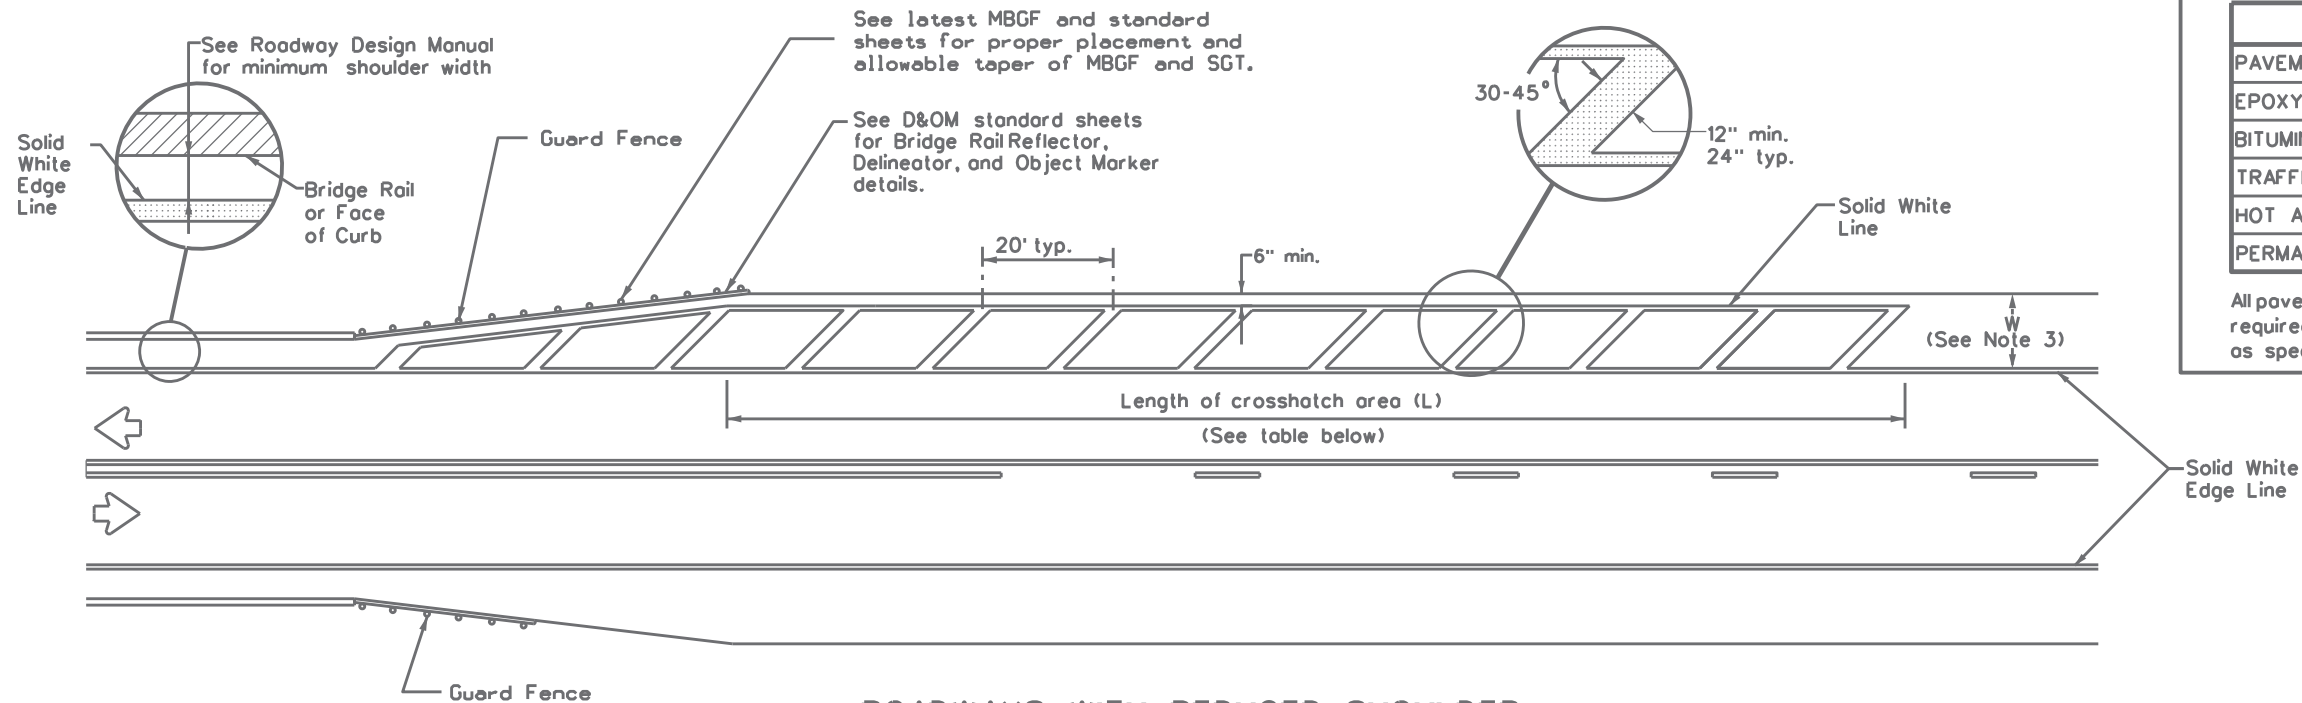

ROADWAYS WITH REDUCED SHOULDER WIDTHS ACROSS BRIDGE OR CULVERT

CROSSHATCH LENGTH (L)	
Posted Speed (MPH)	L (ft)
30	300 ft
35	
40	
45	
50	500 ft
55	
60	
65	
70	
75	

NOTES

1. Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 4 inches from the bridge rail or face of curb or 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions.
2. No-passing zone on bridge approach is optional. If used, the no-passing zone shall be a minimum 500 feet long from the beginning of the bridge.
3. The crosshatching should be required if the shoulder width in advance of the bridge is 4 feet or wider and a reduction of at least 3 feet in shoulder width across the bridge occurs.
4. On divided highways, review both the right and left shoulder widths for the need for narrow bridge pavement markings.

MATERIAL SPECIFICATIONS



PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.


				Traffic Safety Division Standard	
PAVEMENT MARKINGS FOR ROADWAYS WITH REDUCED SHOULDER WIDTHS ACROSS BRIDGE OR CULVERT PM(5)-22					
FILE: pm5-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY	
REVISIONS	6470	27	001	US277, etc.	
	DIST	COUNTY		SHEET NO.	
	22	MAVERICK, etc.		39	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:50 PM
 FILE: T:\RRDOT\TMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\rcd1-22.dwg

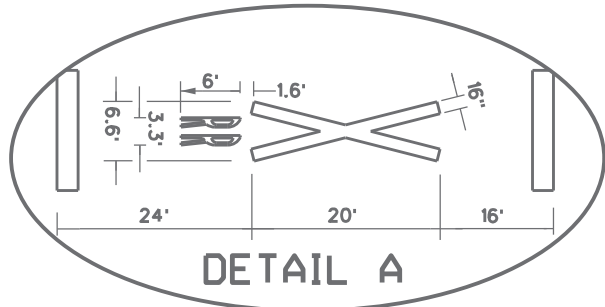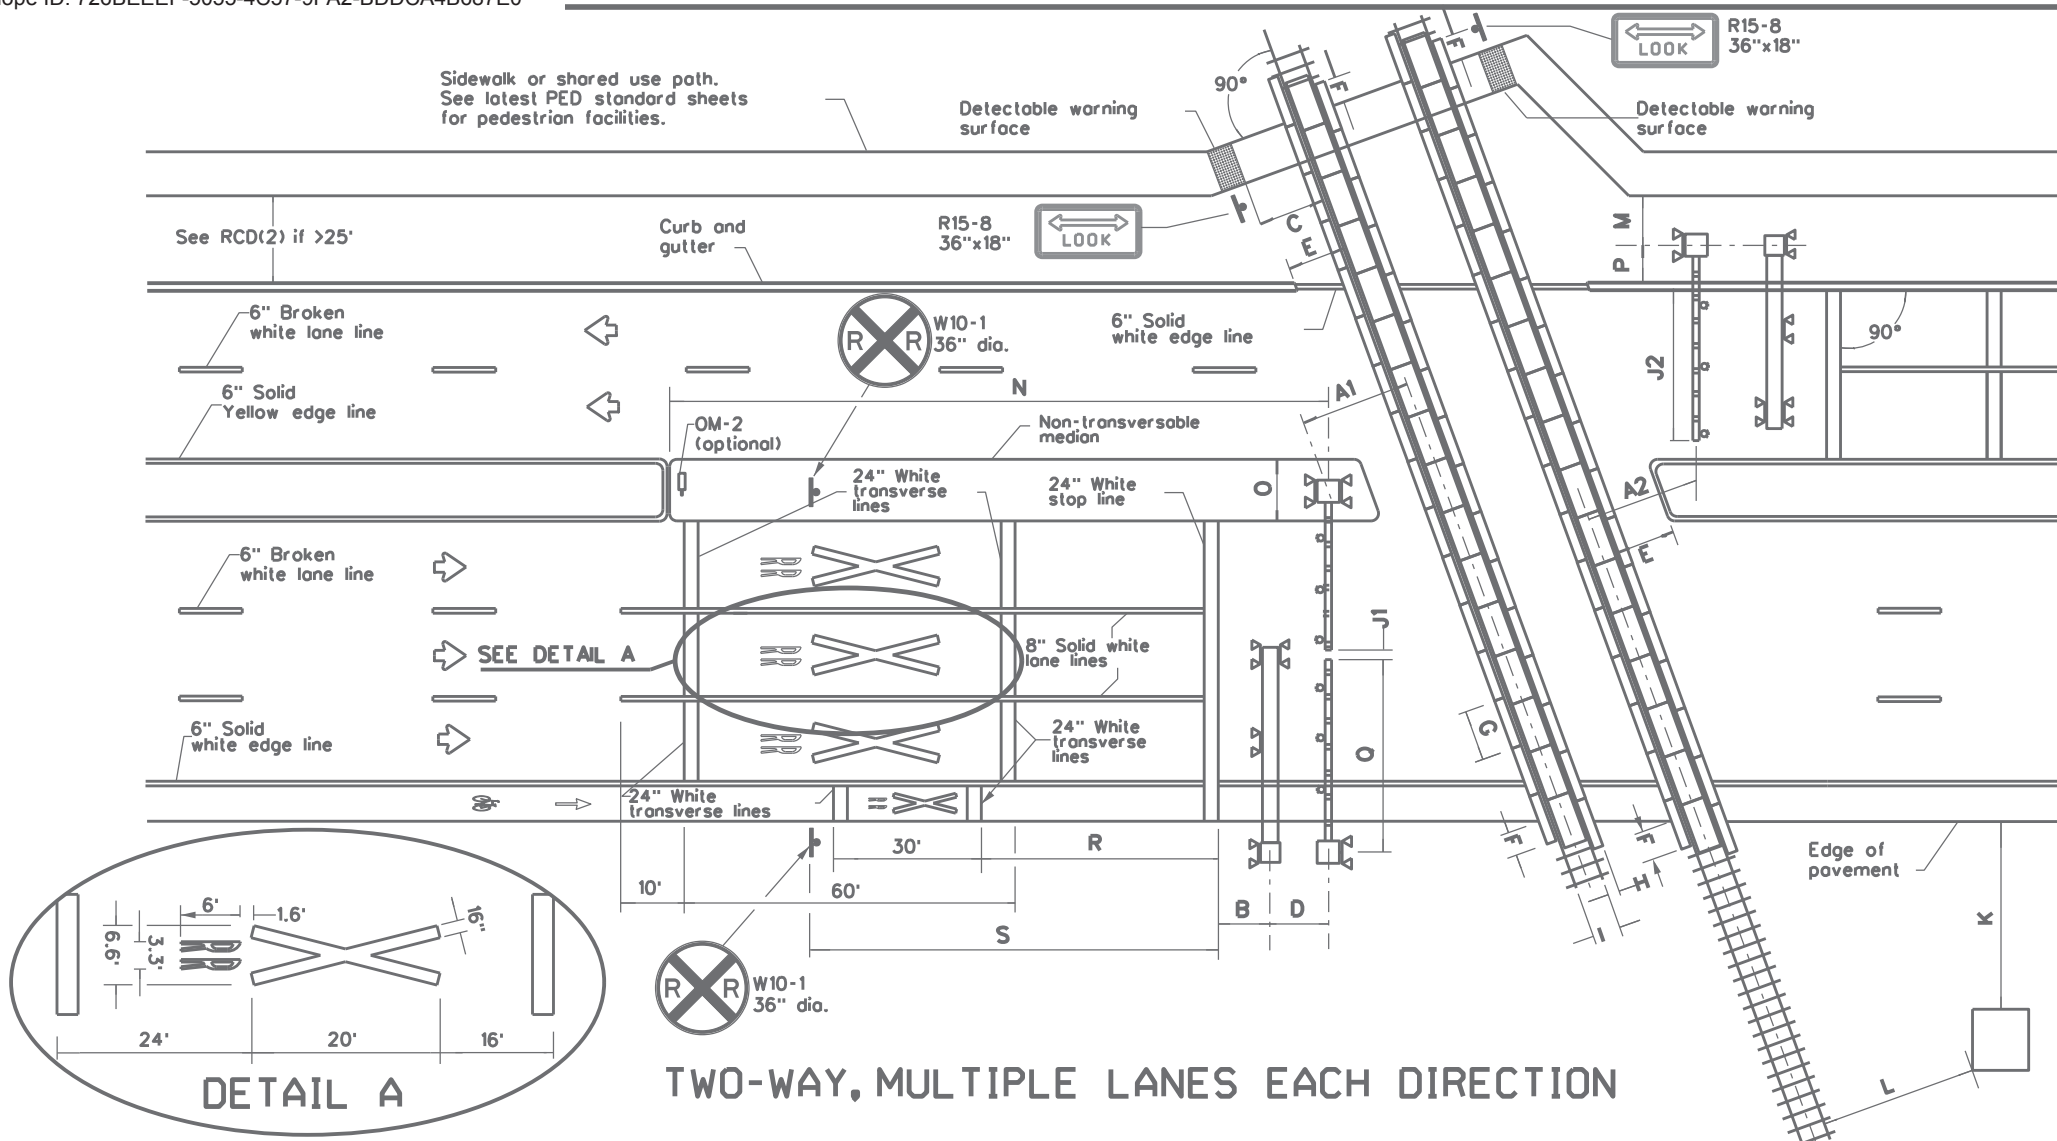

TWO-WAY, MULTIPLE LANES EACH DIRECTION

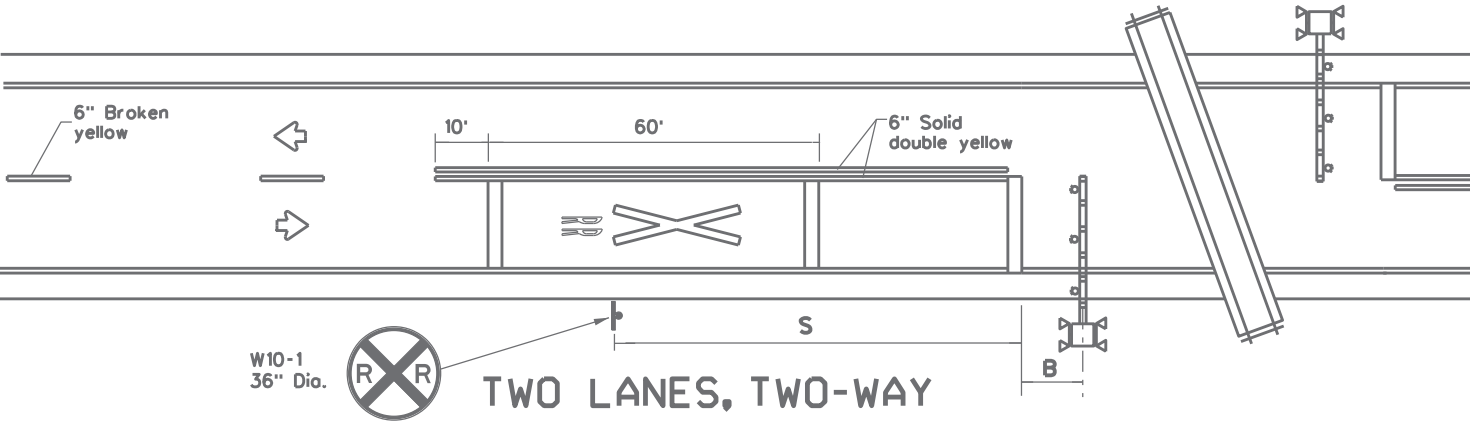

TWO LANES, TWO-WAY

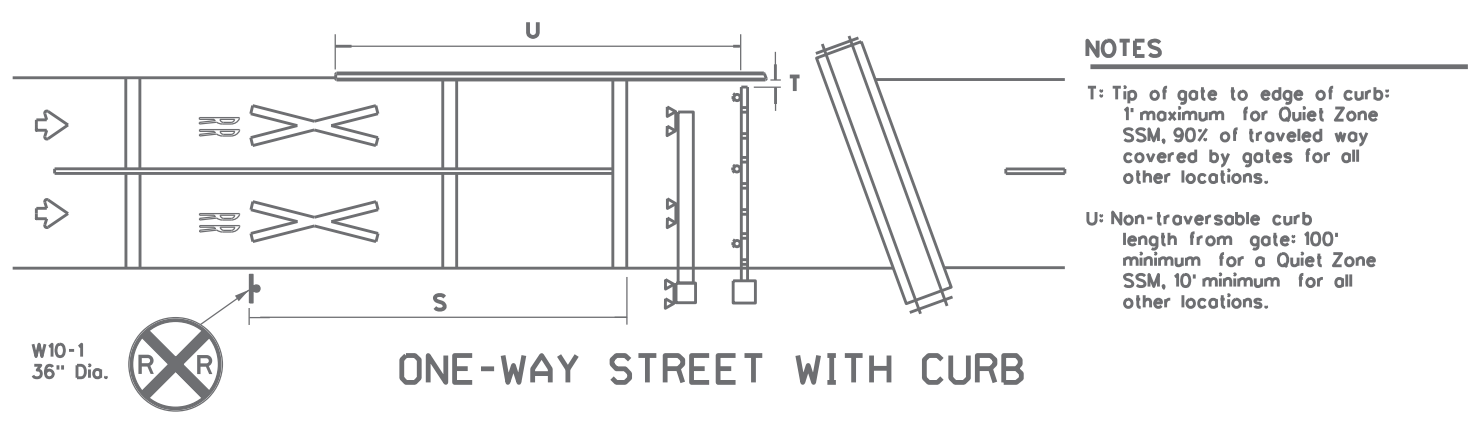

ONE-WAY STREET WITH CURB

NOTES


- T: Tip of gate to edge of curb: 1' maximum for Quiet Zone SSM, 90% of traveled way covered by gates for all other locations.
- U: Non-transversible curb length from gate: 100' minimum for a Quiet Zone SSM, 10' minimum for all other locations.

Approach Speed (mph)	Desirable Placement (feet)
20	100
25	100
30	100
35	100
40	125
45	175
50	250
55	325
60	400
65	475
70	550
75	650

	Sign
	Object Marker
	Traffic Flow
	Cantilever
	Gate Assembly
	Mast Flasher Pair

GENERAL NOTES

1. Medians and curbs must be non-traversable to qualify as a Quiet Zone Supplementary Safety Measure (SSM). Non-traversable curbs in Quiet Zones are 6" tall minimum and used on roadways where speed does not exceed 40 mph.
2. Raised pavement markers may be used to supplement striping. See PM(2) and PM(3) standard sheets.
3. Medians preferred whenever possible to prevent vehicles from driving around gates.
4. Longitudinal edge striping may be continued thru crossing as needed. Illumination may also be considered for nighttime visibility.
5. See SMD standard sheets for sign mounting details.
6. See the Standard Highway Sign Design for Texas (SHSD) manual for sign and pavement marking details.

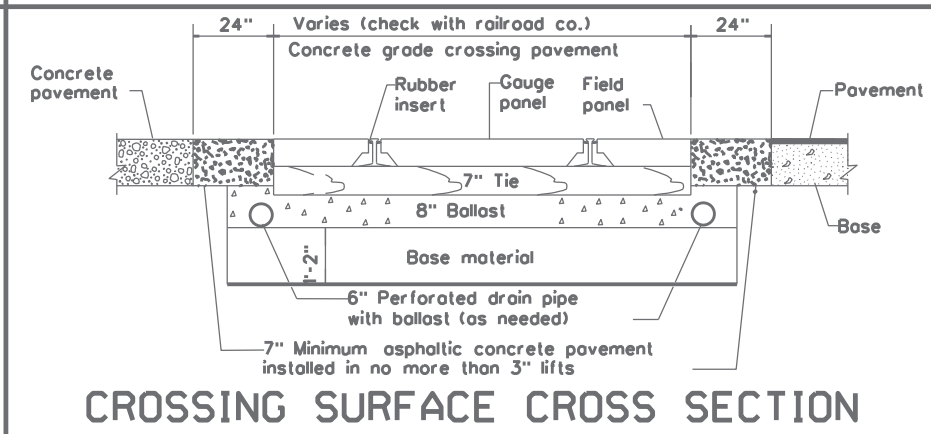

CROSSING SURFACE CROSS SECTION

NOTES


- A1: Center of RR most to center of rail: 12' minimum, 15' typical.
- A2: Tip of gate to center of rail: 12' minimum, 15' typical.
- B: Center of most (cantilever, gate, or most flasher) of nearest active traffic control device to stop line: 8' (NOTE: Stop line may be moved as needed, but should be at least 8' back from gates, if present).
- C: Near edge of detectable warning surface to nearest rail: 12' minimum.
- D: Center of gate most to center of cantilever most: 6' typical. NOTE: Cantilever may be located in front or behind gates.
- E: Edge of median or curb to nearest rail: 10' typical. NOTE: Design median edge to be parallel with rail.
- F: Edge of planking panel from edge of pavement or sidewalk: 3' minimum. NOTE: Field panels need not be in line with gauge panels.
- G: Length of panels along rail: 8' typical.
- H: Width of field panel: 2' typical (check with railroad company).
- I: Distance between rails: 4'- 8' 1/2".
- J1: Tip of gate to tip of gate: 2' maximum.
- J2: 90% of traveled roadway to be covered by gate.
- K: Nearest edge of RR cabinet from edge of pavement: 30' typical. NOTE: Cabinet not required to be parallel to edge of pavement.
- L: Nearest edge of RR cabinet from nearest rail: 25' typical.
- M: Center of RR most to edge of sidewalk: 6' minimum.
- N: Center of gate most to leading edge of non-traversable median: 100' minimum to qualify as a Quiet Zone SSM. NOTE: 60' will suffice if there is a street intersection within the 100' and all street intersections within 60' are closed.
- O: Width of median for RR gate assembly: 8'-6" minimum, 10' typical when using median gates. NOTE: Center of gate most minimum 4'-3" from face of curb.
- P: Center of RR most to face of curb: 5'-3" minimum. Center of RR most to edge of pavement (with shoulder): 7' minimum. Center of RR most to edge of pavement (no shoulder): 9'-3" minimum. NOTE: Final location determined by the railroad company.
- Q: Gate length: 28' or less typical, but railroad company may allow up to 32' under special circumstances.
- R: Stop line to first RR Crossing transverse line (bike lane): 50' typical.
- S: Stop line to GRADE CROSSING ADVANCE WARNING (W10-1) sign and adjacent RR Crossing pavement markings. See Table 1. See RCD(2) for other signs.

Texas Department of Transportation
Traffic Safety Division Standard


RAILROAD CROSSING DETAILS SIGNING, STRIPING, AND DEVICE PLACEMENT RCD(1)-22

FILE: rcd1-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
2-16	DIST	COUNTY	SHEET NO.	
11-22	22	MAVERICK, etc.	40	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024 5:01:50 PM
 FILE: T:\RRDST\TMTAFY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\rcd2-22.dgn

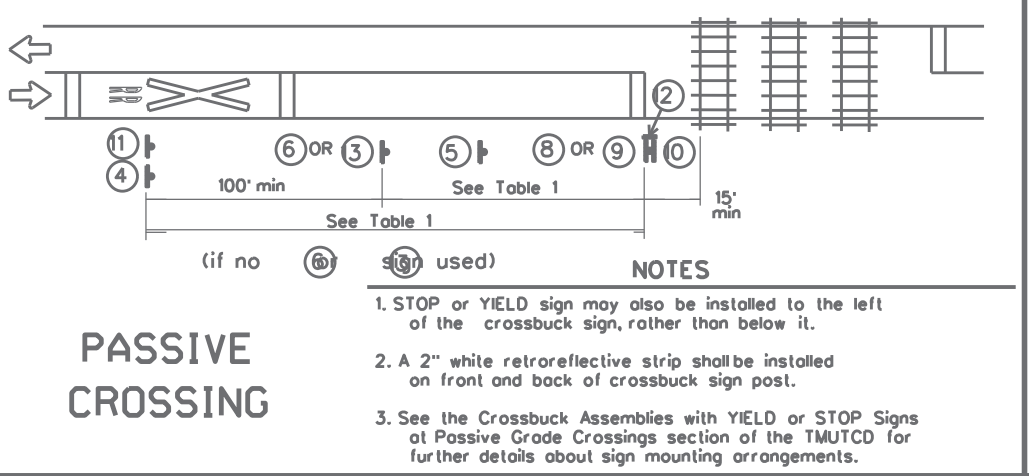

- NOTES**
- STOP or YIELD sign may also be installed to the left of the crossbuck sign, rather than below it.
 - A 2" white retroreflective strip shall be installed on front and back of crossbuck sign post.
 - See the Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings section of the TMUTCD for further details about sign mounting arrangements.

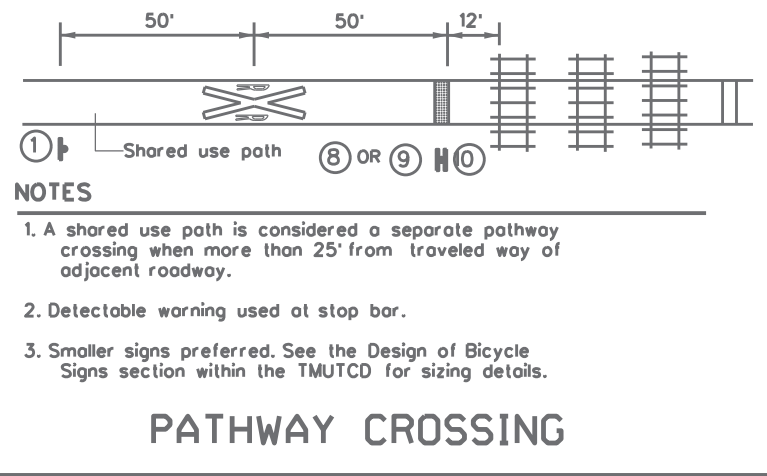


- NOTES**
- A shared use path is considered a separate pathway crossing when more than 25' from traveled way of adjacent roadway.
 - Detectable warning used at stop bar.
 - Smaller signs preferred. See the Design of Bicycle Signs section within the TMUTCD for sizing details.

TABLE 1

Approach Speed (mph)	Desirable Placement (feet)
20	100
25	100
30	100
35	100
40	125
45	175
50	250
55	325
60	400
65	475
70	550
75	650


- GENERAL NOTES**
- Railroad company to provide active traffic control devices, CROSSBUCK (R15-1), NUMBER OF TRACKS (R15-2P) plaque (if more than 1 track), and EMERGENCY NOTIFICATION (I-13) signs.
 - LOW GROUND CLEARANCE (W10-5) signs may be relocated further upstream of crossing to provide advance warning of alternate route.
 - GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-2) signs may be modified as needed to fit roadway geometry.
 - Table 1 placement distances may vary per the Placement of Warning Signs section of the TMUTCD.
 - See Table 1 to determine placement of STOP AHEAD (W3-1) and YIELD AHEAD (W3-2) signs unless shown otherwise.
 - DO NOT STOP ON TRACKS (RB-8) signs installed when potential for vehicles stopping on tracks is significant as determined by sealing engineer. Install so sign does not block view of RR most.
 - See the Standard Highway Sign Design for Texas (SHSD) manual for sign and pavement marking details.

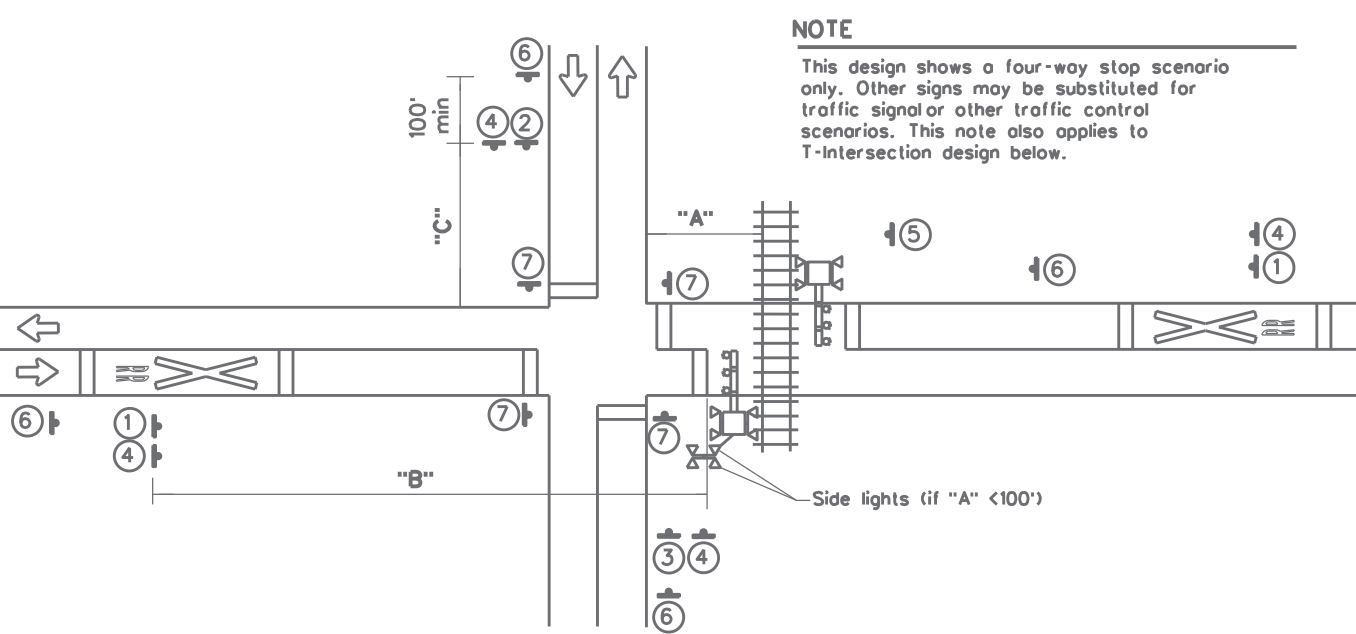

NOTE
This design shows a four-way stop scenario only. Other signs may be substituted for traffic signal or other traffic control scenarios. This note also applies to T-Intersection design below.


	"A" <100'	"A" >100'
"B"	See Table 1. Place pavement markings and signs on opposite side of intersection from rail if spacing from Table 1 would put markings within intersection.	See Table 1. Place pavement markings and signs between rail and intersection if spacing from Table 1 would put markings within intersection.
"C"	See Table 1.	GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-2, W10-3, W10-4) signs should only be installed if W10-1 sign is not between intersection and railroad crossing. If needed, see Table 1.

GRADE CROSSING NEAR A PARALLEL STREET

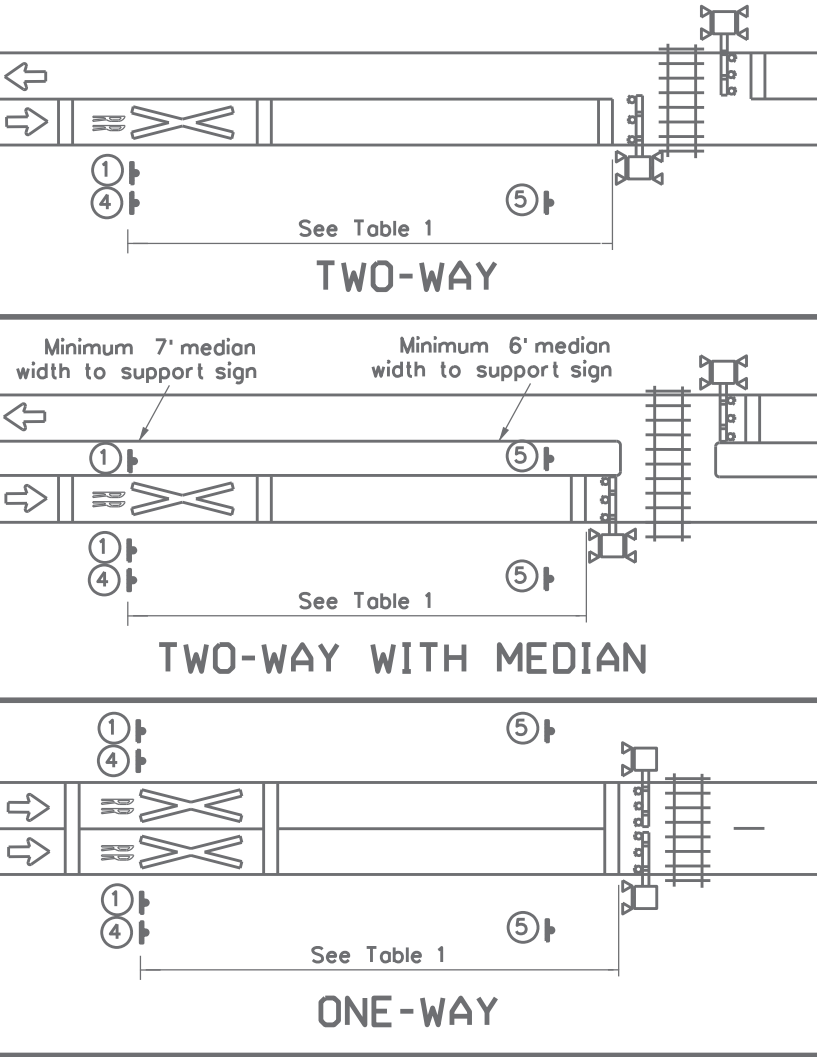

SIGNS


① W10-1 36" Dia.	② W10-2L 36" X 36"	③ W10-2R 36" X 36"	④ IF NEEDED LOW GROUND CLEARANCE W10-5P 30" X 24"
⑤ RB-8 24" X 30"	⑥ W3-1 30" X 30"	⑦ STOP R1-1 36" X 36" ALL WAY R1-3P 18" X 6"	⑧ R15-1 48" X 9" R15-2P 27" X 18" STOP R1-1 36" X 36"
⑨ R1-2 48" X 48" X 48"	⑩ R15-1 48" X 9" R15-2P 27" X 18"	⑪ NO GATES OR LIGHTS W10-13P 30" X 24"	⑫ REPORT EMERGENCY OR PROBLEM 1-800-555-5555 CROSSING 836 597 H Sign may be placed perpend. to travel lanes. ⑬ I-13 15" X 9"
⑬ W3-2 30" X 30"	** Includes a NO TRAIN HORN (W10-9P) plaque if crossing is in a Quiet Zone. If needed, is mounted below W10-2/W10-3/W10-4 signs.		
⑭ NO TRAIN HORN W10-9P 30" X 24"			

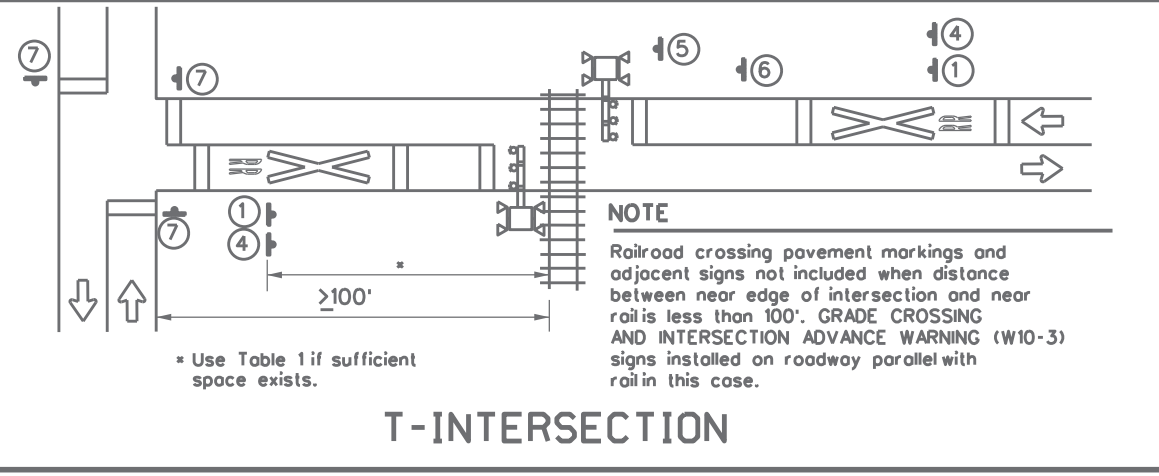

NOTE
Railroad crossing pavement markings and adjacent signs not included when distance between near edge of intersection and near rail is less than 100'. GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-3) signs installed on roadway parallel with rail in this case.

* Use Table 1 if sufficient space exists.

T-INTERSECTION

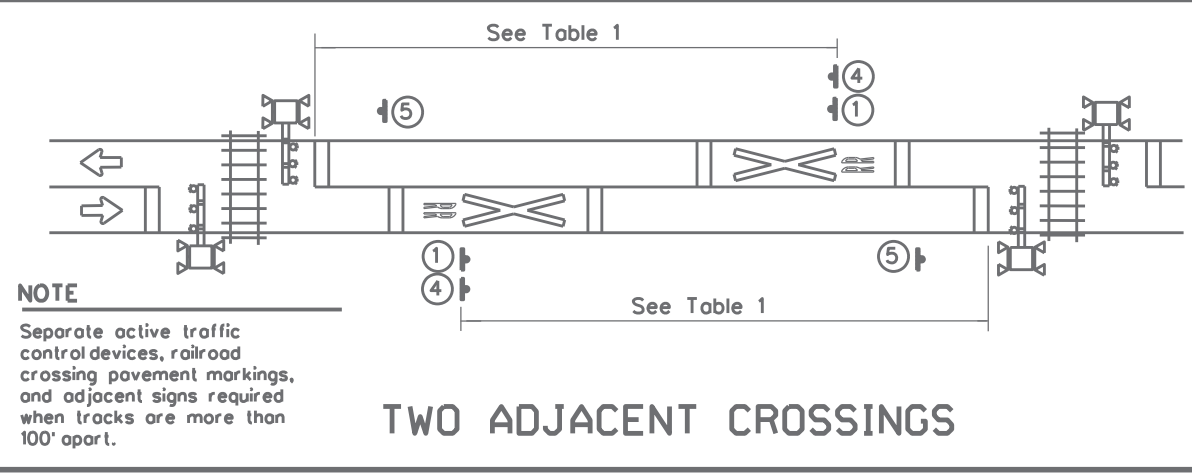

NOTE
Separate active traffic control devices, railroad crossing pavement markings, and adjacent signs required when tracks are more than 100' apart.

TWO ADJACENT CROSSINGS

Texas Department of Transportation
Traffic Safety Division Standard


RAILROAD CROSSING DETAILS SIGNING & STRIPING

RCD(2)-22

FILE: rcd2-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
2-16	DIST	COUNTY	SHEET NO.	
11-22	22	MAVERICK, etc.	41	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:51 PM
 FILE: T:\LRDD5TMMT\FY_2024\MMT_Contract\FY24\Seal_Coat\CAD_Standards\rs(1)-23.dgn

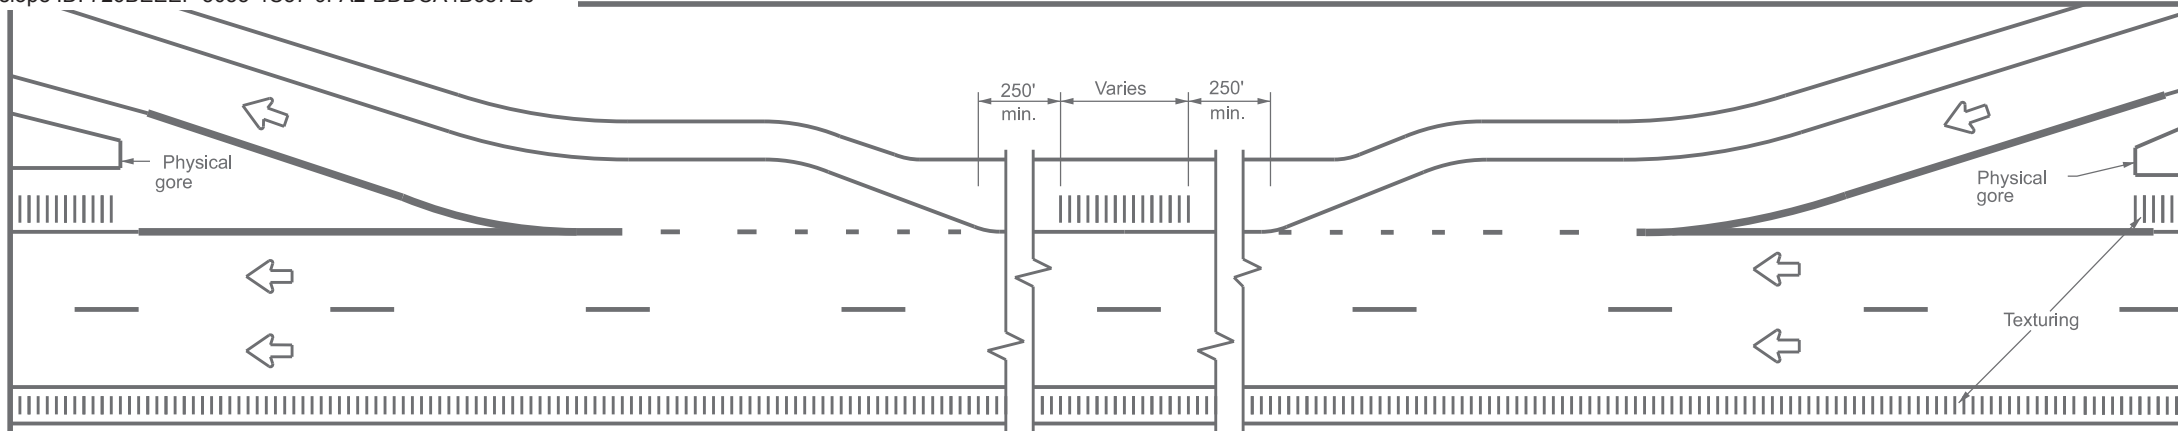

TYPICAL RUMBLE STRIP PLACEMENT AT EXIT AND ENTRANCE RAMPS

GENERAL NOTES







- Rumble strips and profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
- Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
- Use standard sheets PM(2) and FPM(1) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings, and profile markings.
- See the Shoulder Width Table below for determining what options may be used for edge line rumble strips.
- Breaks in edge line rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections, or driveways with high usage of large trucks when installed on conventional highways.
- Rumble strips shall not be placed across exit or entrance ramps, acceleration or deceleration lanes, crossovers, gore areas, or intersections with other roadways.
- Consideration should be given to noise levels when edge line rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
- Consideration shall be given to bicyclists. See RS(6).

WHEN INSTALLING MILLED DEPRESSION EDGE LINE RUMBLE STRIPS:

- See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
- Pavement markings can be applied over milled shoulder rumble strips to create an edge line rumble stripe.

WHEN INSTALLING RAISED OR PROFILE EDGE LINE RUMBLE STRIPS:

- Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per the manufacturer's recommendations.
- Non-reflective traffic buttons shall be placed adjacent to the pavement marking delineating the edge line when used as a rumble strip. The color of the button should match the color of the adjacent edge line marking (white or yellow). The buttons will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
- Non-reflective traffic buttons shall not be placed across exit or entrance ramps, acceleration and deceleration lanes, crossovers, gore areas or intersections with other roadways.
- The minimum distance between the edge line and the buttons should be used if the shoulder is less than 8 feet in width.
- Raised profile thermoplastic markings used as edge lines may substitute for buttons.

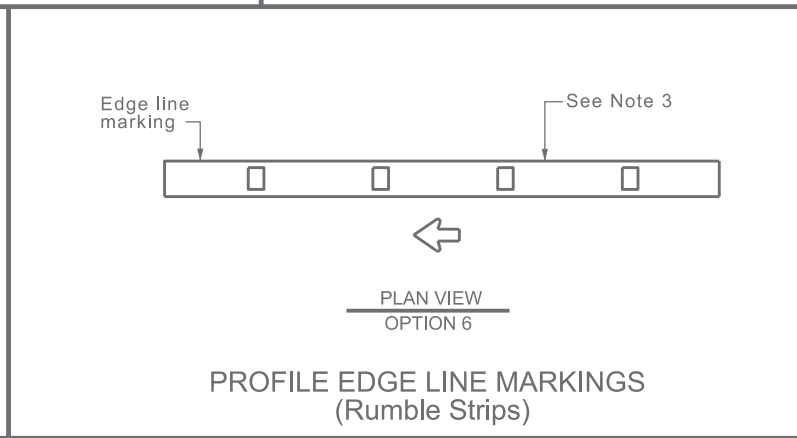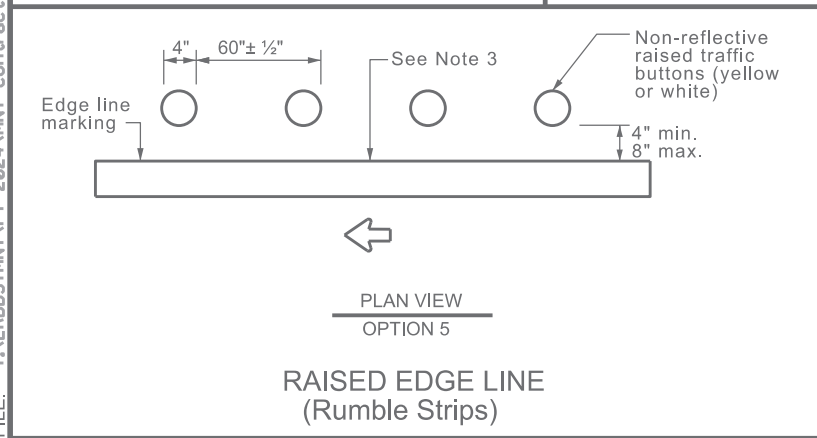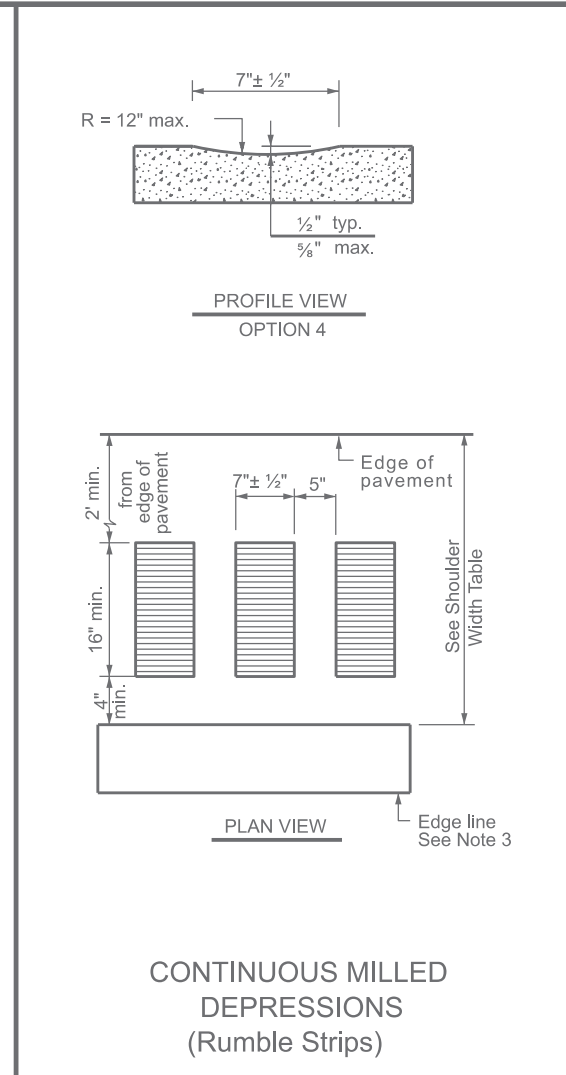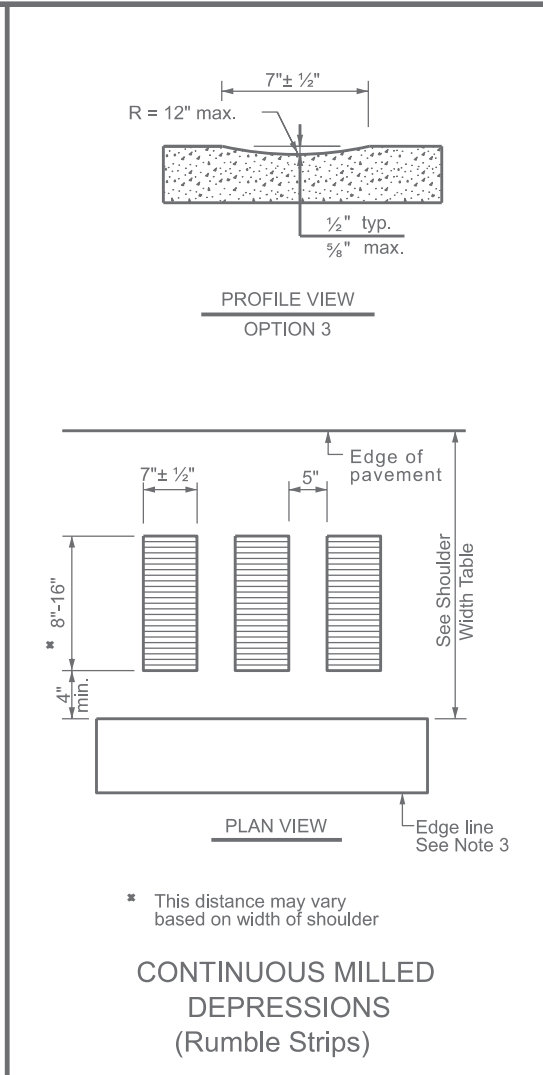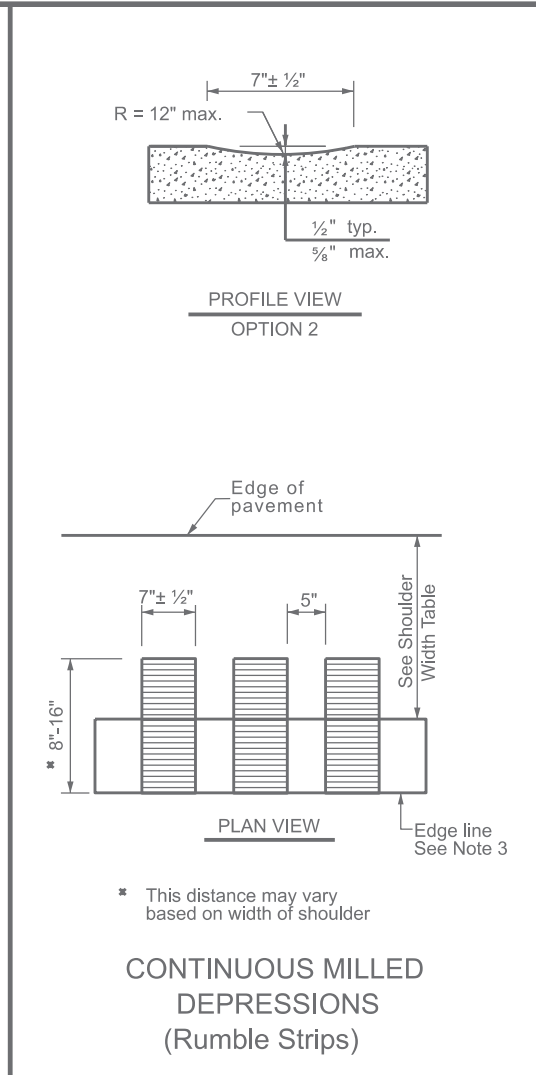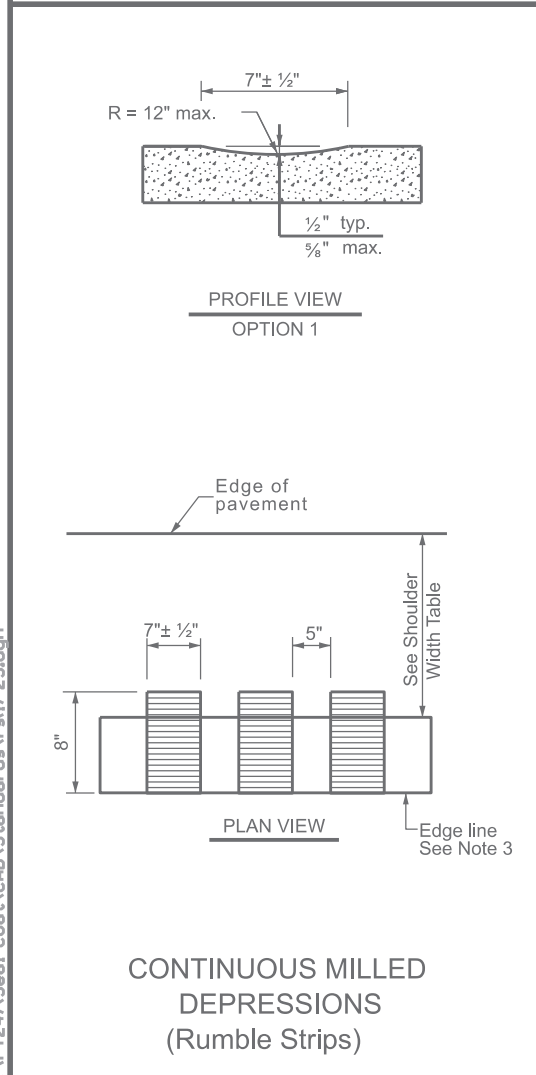

SHOULDER WIDTH TABLE		
EQUAL TO OR LESS THAN 2 FEET	GREATER THAN 2 FEET LESS THAN 4 FEET	EQUAL TO OR GREATER THAN 4 FEET
Option 1, 5, or 6	Option 1, 2, 3, 5, or 6	Option 2, 4, 5, or 6

Texas Department of Transportation

Traffic Safety Division Standard

EDGE LINE RUMBLE STRIPS ON FREEWAYS AND DIVIDED HIGHWAYS









RS(1)-23

FILE: rs(1)-23.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT January 2023	CONT: 6470	SECT: 27	JOB: 001	HIGHWAY: US277, etc.
4-06 1-23 2-10 10-13	REVISIONS	DIST: 22	COUNTY: MAVERICK, etc.	SHEET NO.: 42

90

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:51 PM
 FILE: T:\RRD05TMMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\rs(2)-23.dgn

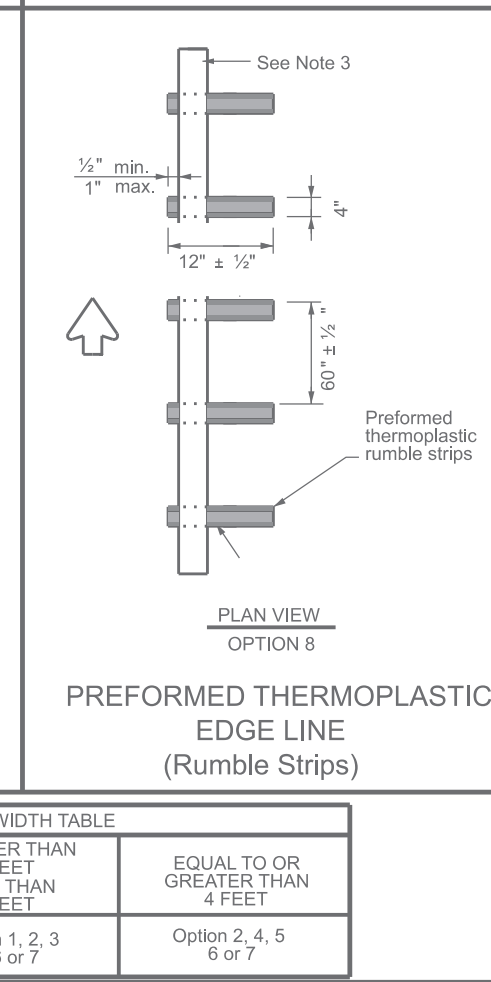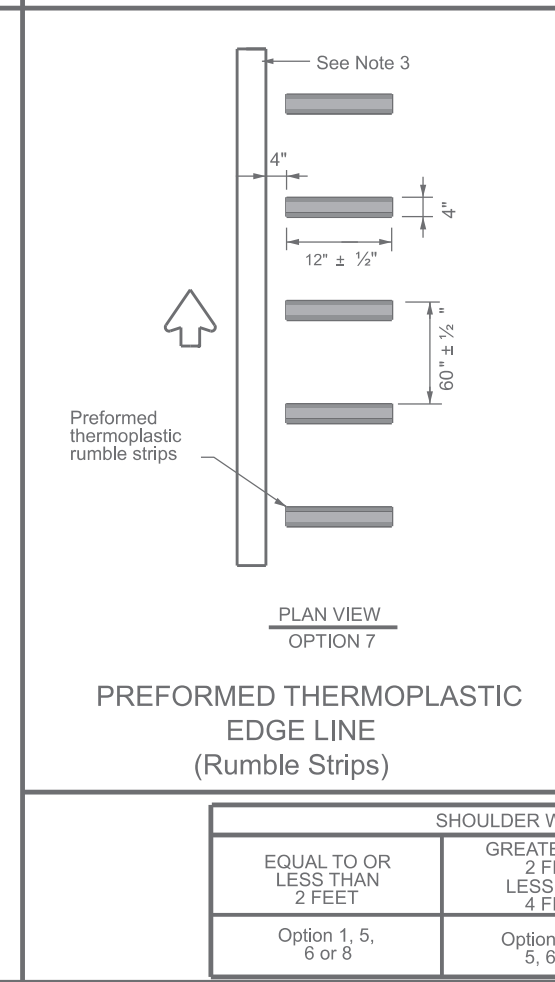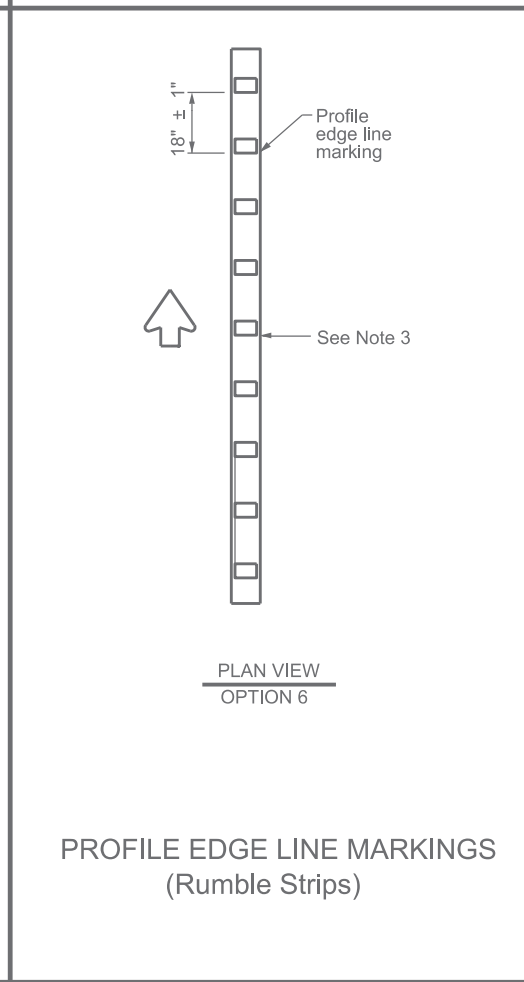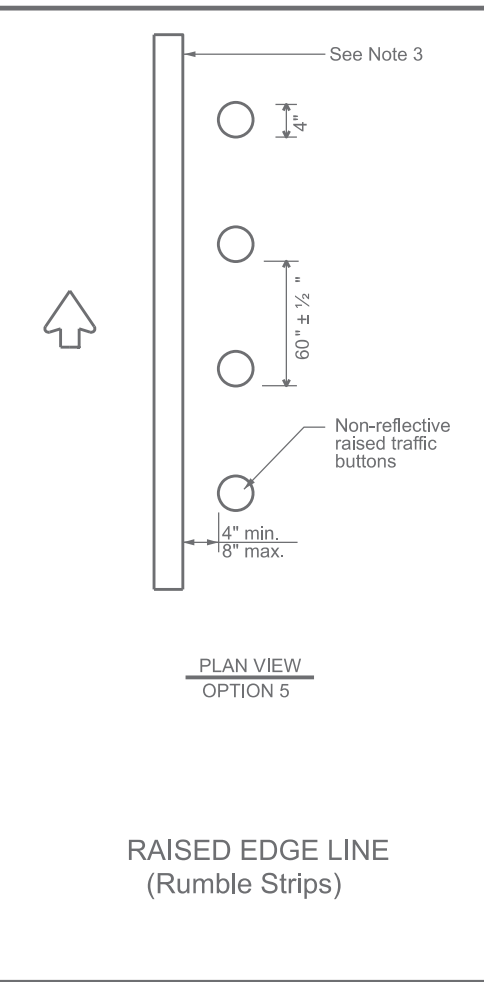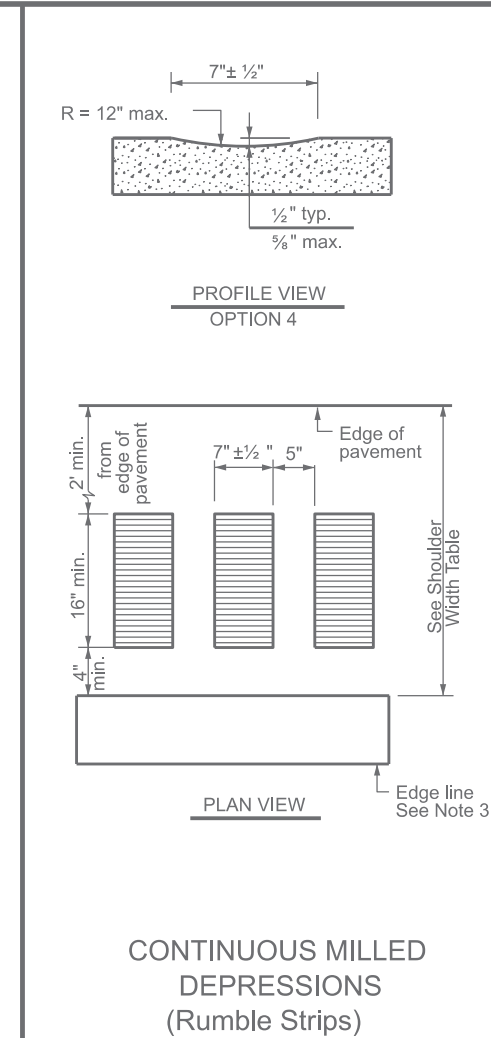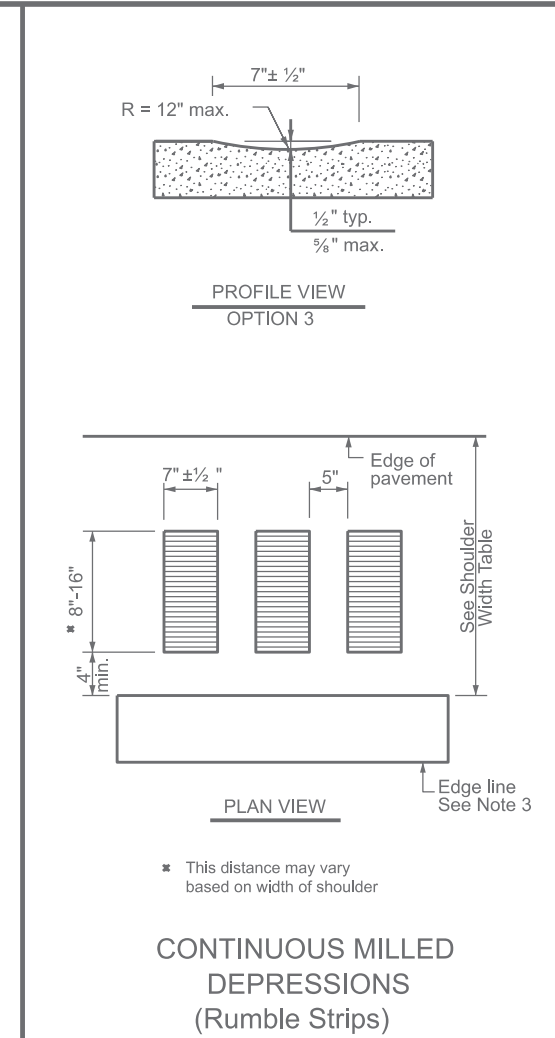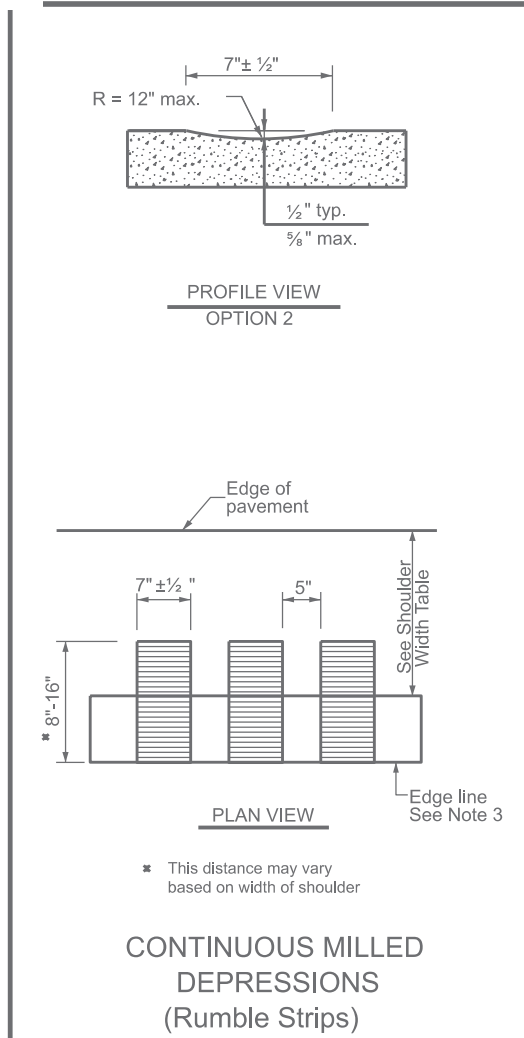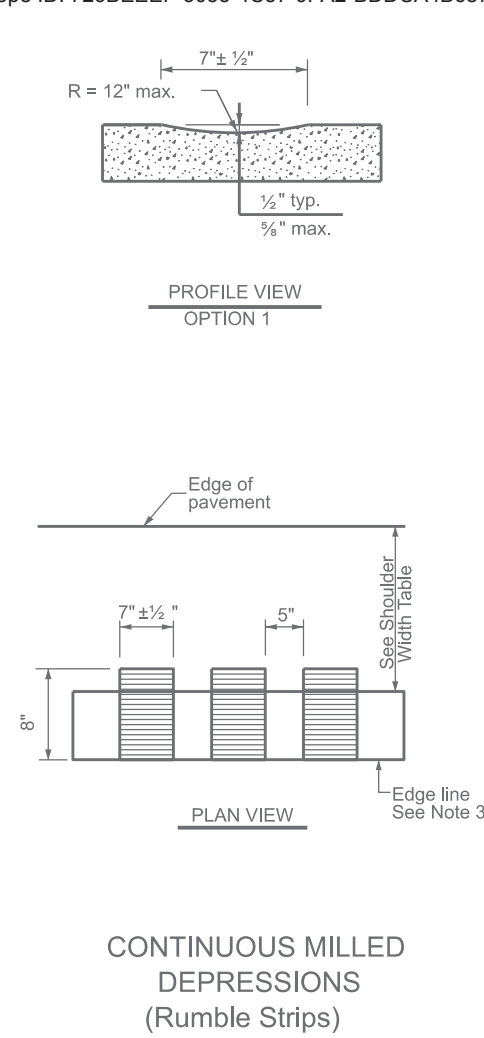

SHOULDER WIDTH TABLE		
EQUAL TO OR LESS THAN 2 FEET	GREATER THAN 2 FEET LESS THAN 4 FEET	EQUAL TO OR GREATER THAN 4 FEET
Option 1, 5, 6 or 8	Option 1, 2, 3, 5, 6 or 7	Option 2, 4, 5, 6 or 7

GENERAL NOTES

- Rumble strips and profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
- Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
- Use Standard Sheet PM(2) and FPM(1) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings, and profile markings.
- See the Shoulder Width Table below for determining what options may be used for edge line rumble strips.
- Breaks in edge line rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections, or driveways with high usage of large trucks when installed on conventional highways.
- Rumble strips shall not be placed across exit or entrance ramps, acceleration or deceleration lanes, crossovers, gore areas, or intersections with other roadways.
- Consideration should be given to noise levels when edgeline rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
- Consideration shall be given to bicyclists. See RS(6).

WHEN INSTALLING MILLED DEPRESSION EDGE LINE RUMBLE STRIPS:

- See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
- Pavement markings can be applied over milled shoulder rumble strips to create an edge line rumble strip.

WHEN INSTALLING RAISED OR PROFILE EDGE LINE RUMBLE STRIPS:


- Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per the manufacturer's recommendations.
- Non-reflective traffic buttons shall be placed adjacent to the pavement marking delineating the edge line when used as a rumble strip. The color of the button should match the color of the adjacent edge line marking (white or yellow). The buttons will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
- Non-reflective traffic buttons shall not be placed across exit or entrance ramps, acceleration and deceleration lanes, crossovers, gore areas or intersections with other roadways.
- The minimum distance between the edge line and the buttons should be used if the shoulder is less than 8 feet in width.
- Raised profile thermoplastic markings used as edge lines may substitute for buttons.

Traffic Safety Division Standard

EDGE LINE RUMBLE STRIPS ON UNDIVIDED OR TWO LANE HIGHWAYS RS(2)-23

FILE: rs(2)-23.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	January 2023	CONT: 6470	SECT: 27	JOB: 001
10-13 1-23	REVISIONS	DIST: COUNTY		SHEET NO. 43
		22 MAVERICK, etc.		

CENTERLINE RUMBLE STRIPS

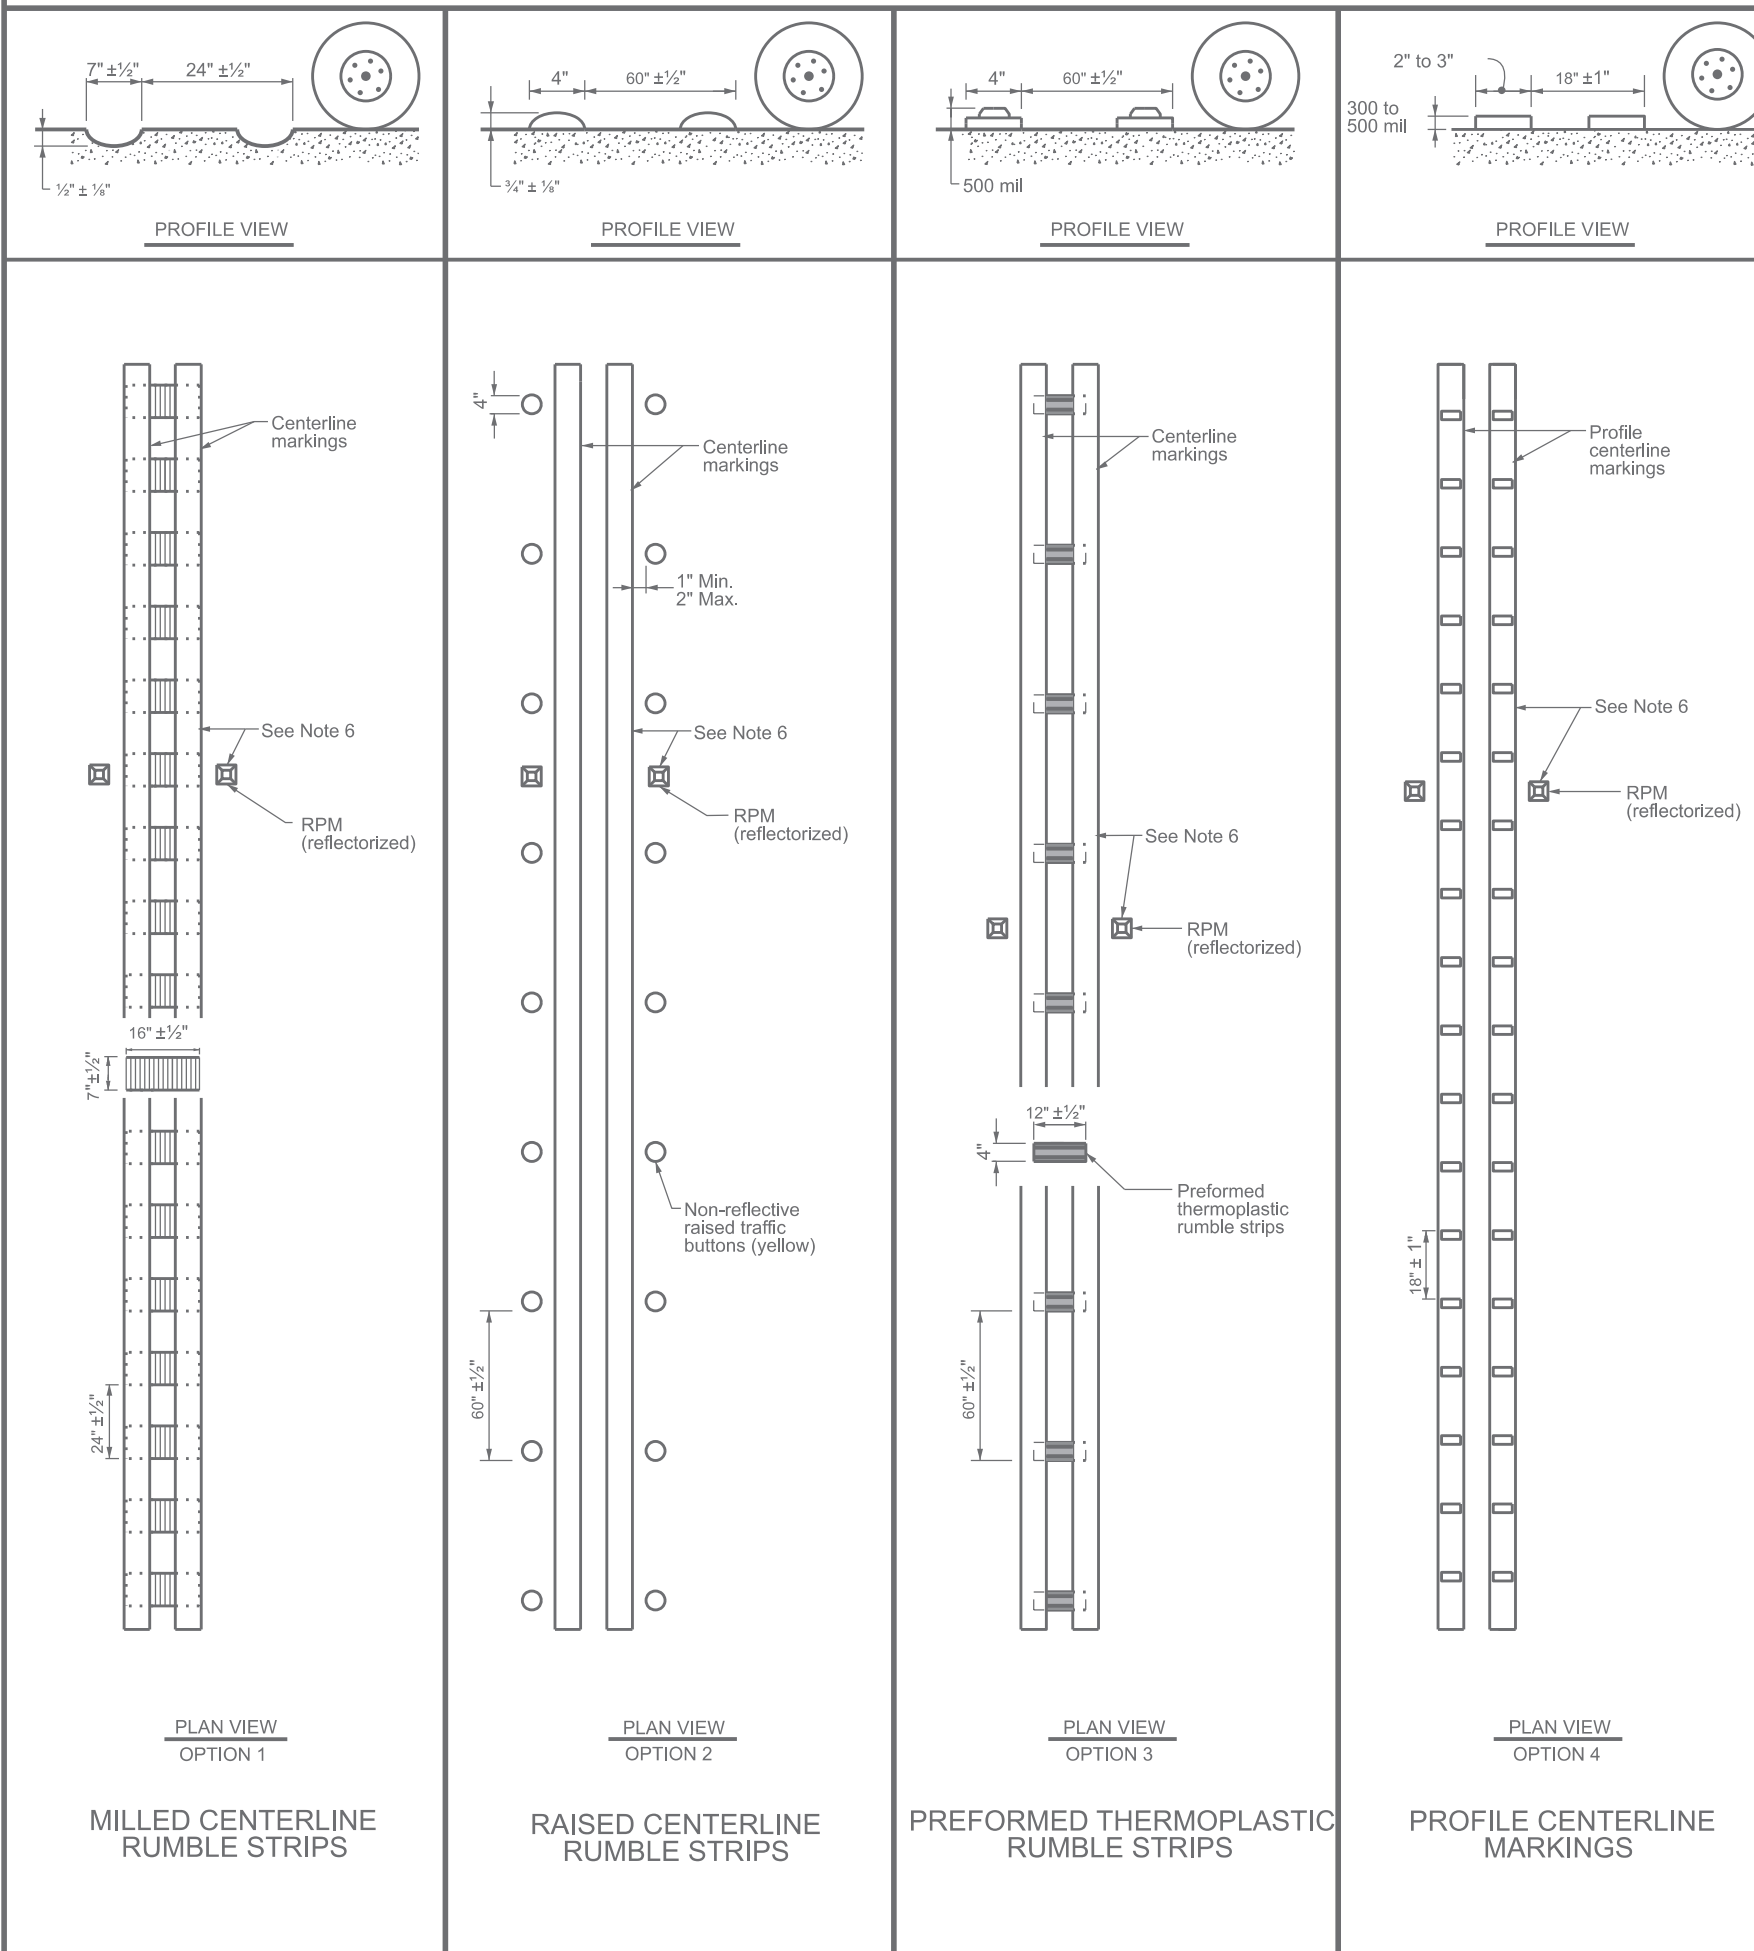

GENERAL NOTES

1. This standard sheet provides guidelines for installing centerline rumble strips on multilane undivided highways.
2. Centerline and edge line rumble strips or profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
3. Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
4. See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
5. Breaks in milled centerline rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections or driveways with high usage of large trucks.
6. Use standard sheet PM(2) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings and profile markings.
7. Consideration should be given to noise levels when centerline rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
8. Pavement markings must be applied over milled centerline rumble strips for normal centerline spacing. For wider medians, specify in the plans the exact placement of the rumble strips. Place the rumble strips under each centerline marking or centered in the middle of the median.

WHEN INSTALLING CENTERLINE RUMBLE STRIPS:


9. Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per manufacturer's recommendations.
10. When using non-reflective raised traffic buttons as a centerline rumble strip, the button shall be placed adjacent to the pavement marking delineating the centerline. The color of the button should be yellow for a continuous no passing roadway. The button will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
11. Consideration shall be given to bicyclists. See RS(6).

WHEN INSTALLING EDGE LINE RUMBLE STRIPS WITH OR WITHOUT CENTERLINE RUMBLE STRIPS ON UNDIVIDED HIGHWAYS:

12. See standard sheet RS(2).

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:52 PM
 FILE: T:\LRD05\TMM\FY_2024\MNT Contract (FY24)\Seel Coet\CAD\Standards\rs(3)-23.dgn

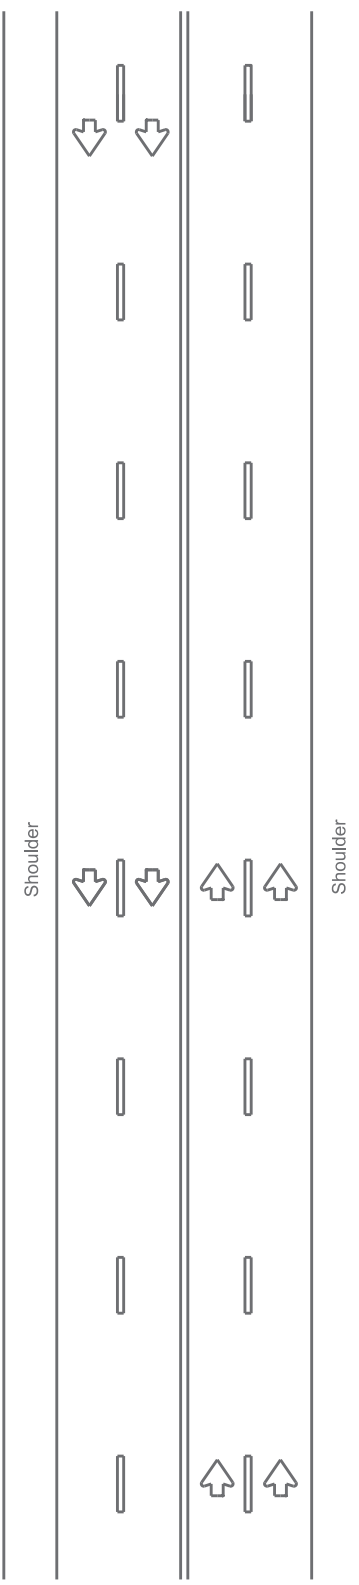

MULTILANE UNDIVIDED
HIGHWAY WITH
SHOULDER

Texas Department of Transportation

Traffic Safety Division Standard

CENTERLINE RUMBLE STRIPS ON MULTILANE UNDIVIDED HIGHWAYS

RS(3)-23

FILE: rs(3)-23.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	January 2023	CONT	SECT	JOB
				HIGHWAY
10-13	REVISIONS	6470	27	001
1-23				US277, etc.
		DIST	COUNTY	SHEET NO.
		22	MAVERICK, etc.	44

CENTERLINE RUMBLE STRIPS

GENERAL NOTES












1. This standard sheet provides guidelines for installing centerline rumble strips on two-lane highways with or without shoulders.
2. Centerline and edge line rumble strips or profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
3. Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
4. See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
5. Breaks in milled centerline rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections or driveways with high usage of large trucks.
6. Use standard sheet PM(2) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings and profile markings.
7. Consideration should be given to noise levels when centerline rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
8. Pavement markings must be applied over milled centerline rumble strips.

WHEN INSTALLING CENTERLINE RUMBLE STRIPS:

9. Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per manufacturer's recommendations.
10. When using non-reflective raised traffic buttons as a centerline rumble strip, the button shall be placed adjacent to the pavement marking delineating the centerline. The buttons will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
11. The color of the button should be yellow for a continuous no passing roadway. Black buttons should be used in areas where passing is allowed.
12. Consideration shall be given to bicyclists. See RS(6).

WHEN INSTALLING EDGE LINE RUMBLE STRIPS WITH OR WITHOUT CENTERLINE RUMBLE STRIPS ON UNDIVIDED HIGHWAYS:

13. See standard sheet RS(2).

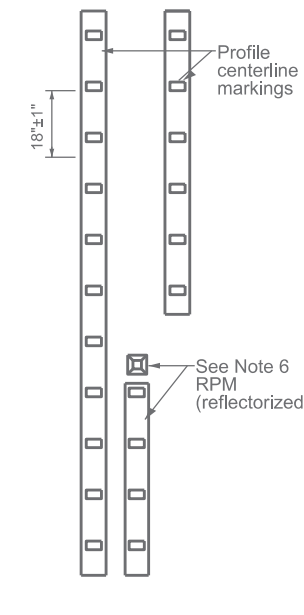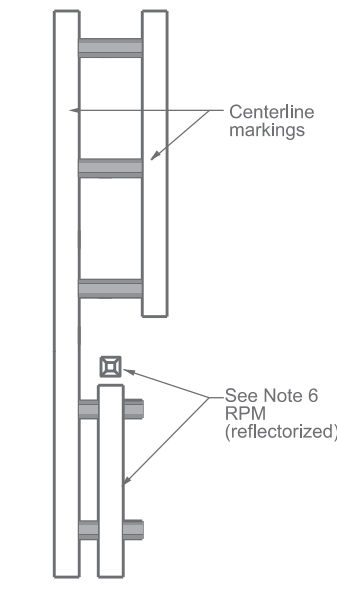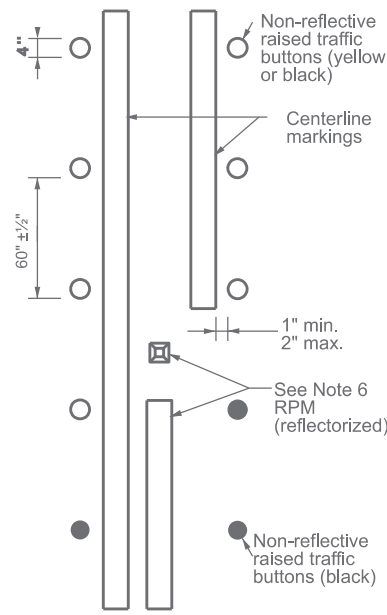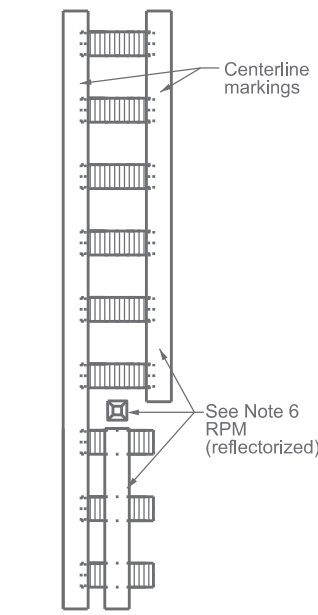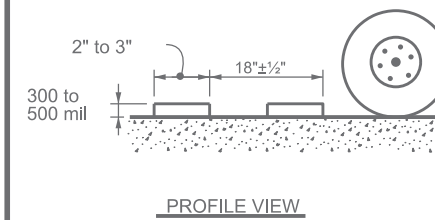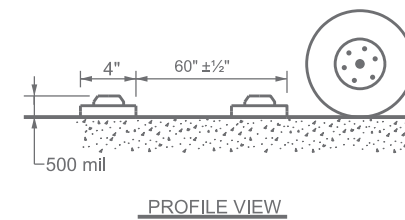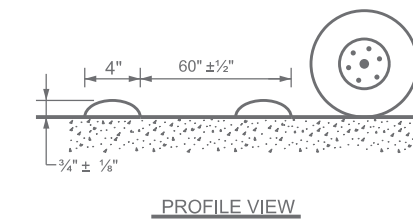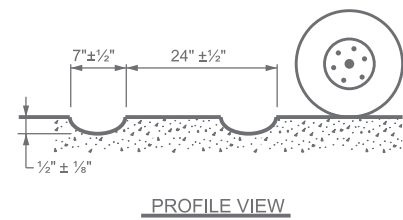

TWO LANE TWO-WAY
HIGHWAYS

MILLED CENTERLINE
RUMBLE STRIPS

RAISED CENTERLINE
RUMBLE STRIPS

PREFORMED THERMOPLASTIC
RUMBLE STRIPS

PROFILE CENTERLINE MARKINGS
AND PREFORMED THERMOPLASTIC
RUMBLE STRIPS


DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:52 PM
 FILE: T:\RRD05\TMT\FY_2024\MNT Contract (FY24)\Seel Coet\CAD\Standards\rs(4)-23.dgn


Texas Department of Transportation		Traffic Safety Division Standard	
<h2 style="margin: 0;">CENTERLINE RUMBLE STRIPS ON TWO LANE TWO-WAY HIGHWAYS</h2> <h3 style="margin: 0;">RS(4)-23</h3>			
FILE: rs(4)-23.dgn	DN: TxDOT	CK: TxDOT	PW: TxDOT
© TxDOT	January 2023	CONT: 6470	SECT: 27
REVISIONS	001	JOB: US277, etc.	HIGHWAY
10-13 1-23	DST: 22	COUNTY: MAVERICK, etc.	SHEET NO. 45

RUMBLE STRIP TYPICAL APPLICATION

See Note 1

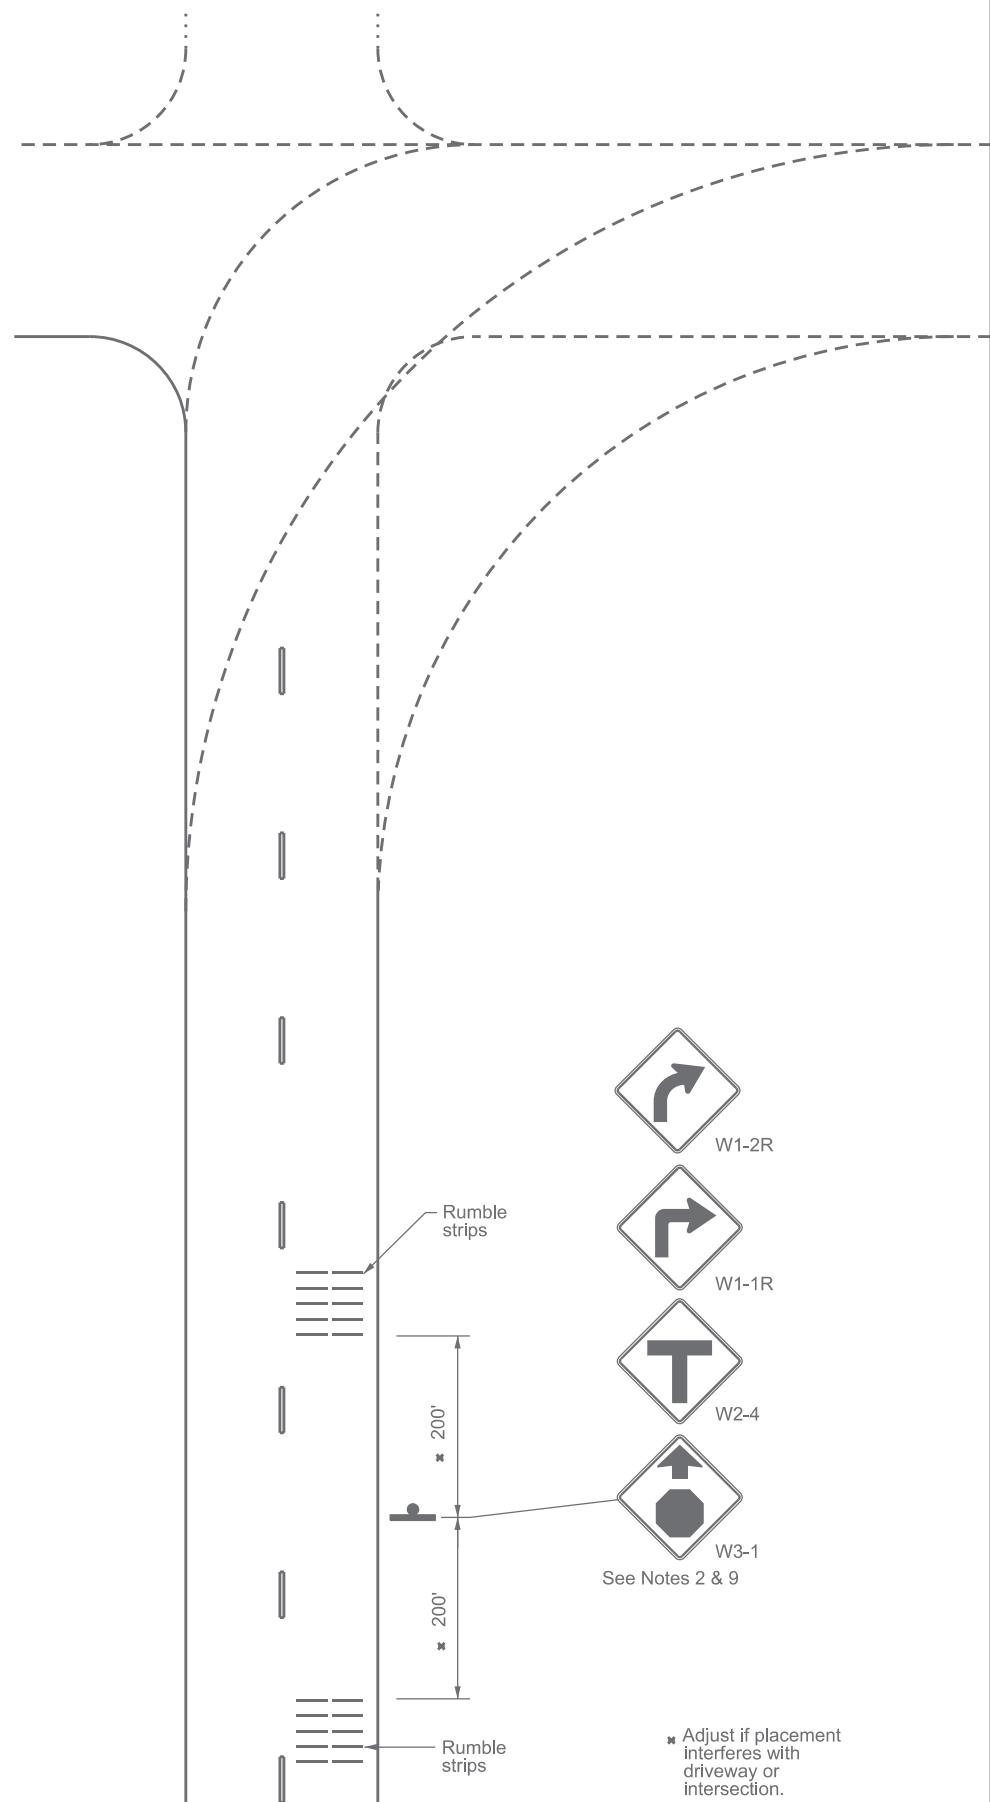


* Adjust if placement interferes with driveway or intersection.

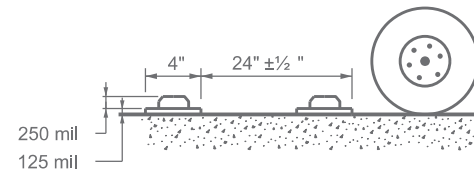


PROFILE VIEW

RUMBLE STRIP STANDARD PATTERN

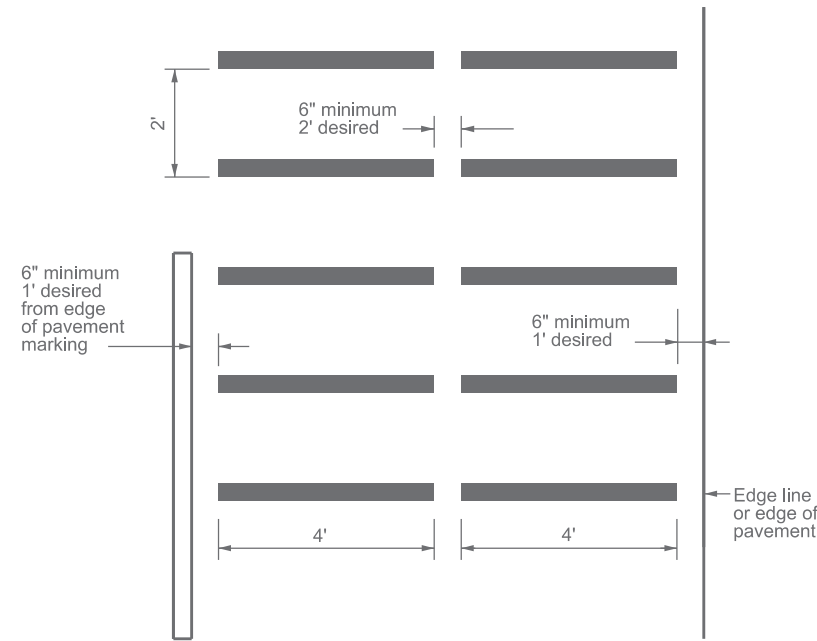

PLAN VIEW

RUMBLE STRIP ALTERNATIVE PATTERN

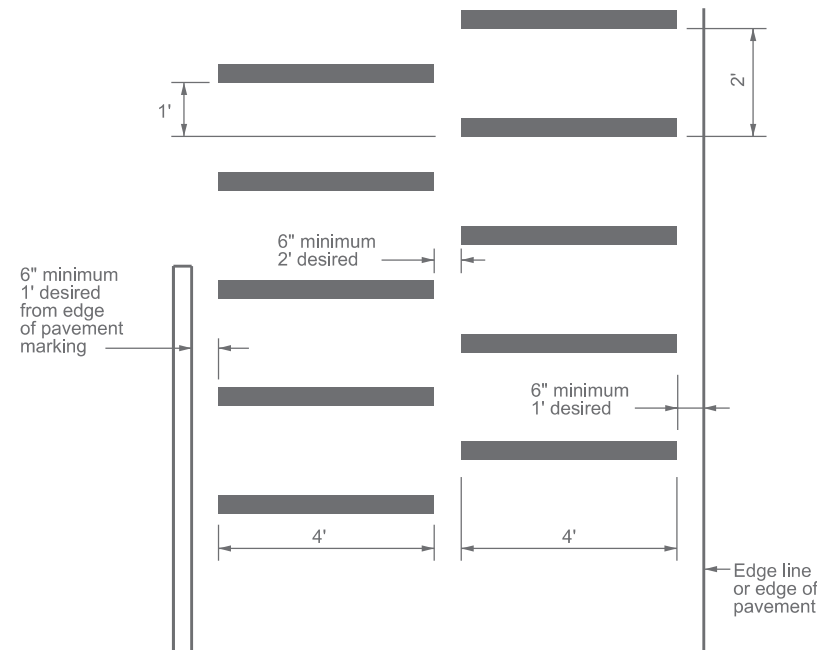

PLAN VIEW

GENERAL NOTES

- Transverse or in-lane rumble strips should only be used at high incident and special geometric locations. These special geometric locations may include: approaches to rural, high speed signalized or stop-controlled intersections with sight restrictions and/or high crash rates, approaches to unexpected urban intersections, approaches to newly installed stop or signalized controlled intersections, approaches to toll plazas, approaches to hazardous horizontal curves, and approaches to railroad grade crossings.
- When used, the rumble strips shall be placed 200 feet upstream and downstream of the warning sign.
- The use of rumble strips should not be widespread or indiscriminate.
- Preformed black raised rumble strips should be used. They should be installed in accordance with the manufacturer's recommendations.
- Please reference the TxDOT Material Producers List for approved rumble strips (transverse): <http://www.txdot.gov/>
- Consideration should be given to noise levels when in-lane or transverse rumble strips are to be installed near residential areas, schools, churches, etc.
- The RUMBLE STRIPS AHEAD (W17-2T) sign may be used in advance of in-lane or transverse rumble strips, based on engineering judgement. This sign is typically necessary for rumble strip installations built to the guidelines on this standard sheet. When used, this sign should be spaced in advance of the rumble strips based on the Guidelines for Advance Placement of Warning Signs table of the Texas Manual on Uniform Traffic Control Devices.
- Consideration shall be given to bicyclists. See RS(6).
- Other signs can be used as conditions warrant.



W17-2T



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:53 PM
 FILE: \\FDD\STANDARD\EX-2024\MINT_Contract\EX24\Seal_Creath\CAD\Standards\rs(5)-23.dgn

				Traffic Safety Division Standard	
<h2>TRANSVERSE OR IN-LANE RUMBLE STRIPS</h2> <h3>RS(5)-23</h3>					
FILE:	rs(5)-23.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	January 2023	CONT	SECT	JOB	HIGHWAY
4-06	1-12	6470	27	001	US277, etc.
2-10		DIST	COUNTY		SHEET NO.
10-13		22	MAVERICK, etc.		46

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:53 PM
 FILE: I:\RRDSTMT\MT\FY 2024\MMT Contract (FY24)\Seal Coat\CAD\Standards\tcp3-1.dgn


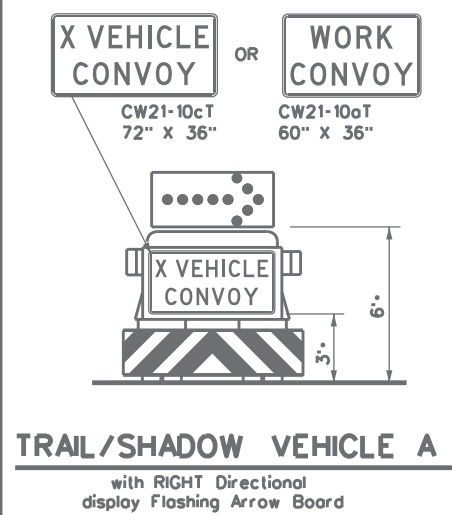
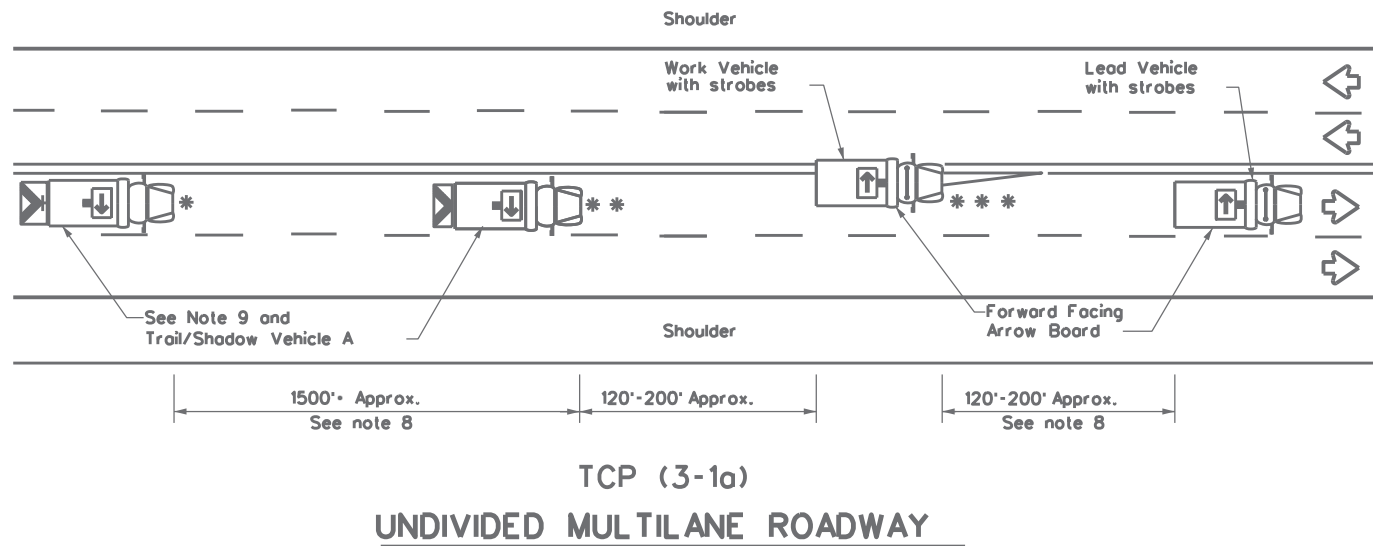


LEGEND		ARROW BOARD DISPLAY	
*	Trail Vehicle		
**	Shadow Vehicle		
***	Work Vehicle		RIGHT Directional
	Heavy Work Vehicle		LEFT Directional
	Truck Mounted Attenuator (TMA)		Double Arrow
	Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GENERAL NOTES

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. "X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY" (CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the rearmost protection vehicle.

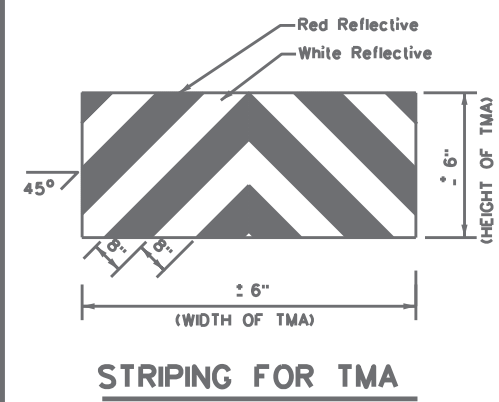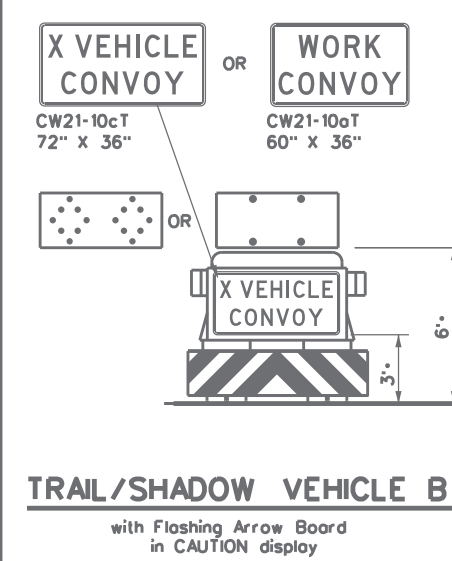
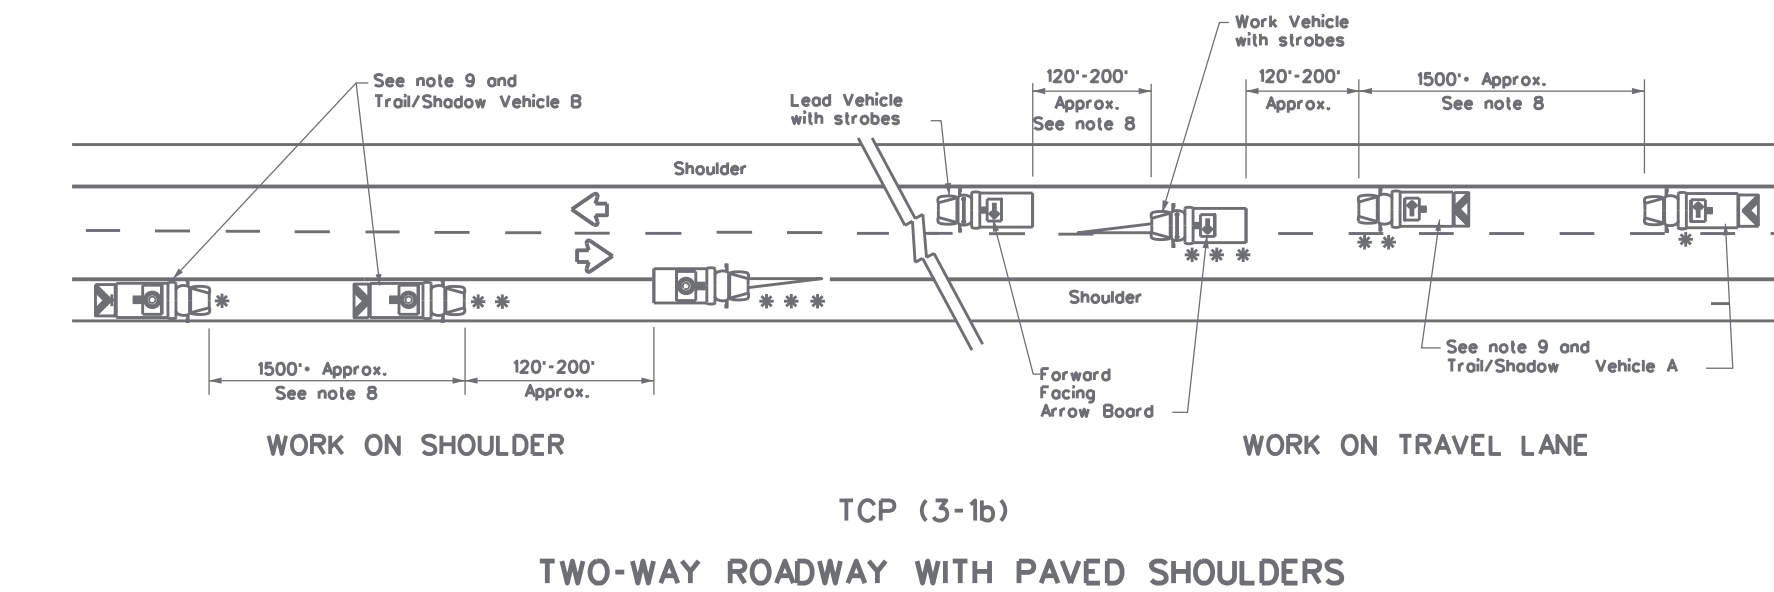


**TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
UNDIVIDED HIGHWAYS**



TCP(3-1)-13

FILE: tcp3-1.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	5470	27	001	US277, etc.
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	22	MAVERICK, etc.	47	
1-97				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024 5:01:54 PM
 FILE: I:\LRDDSTMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcp3-2.dwg

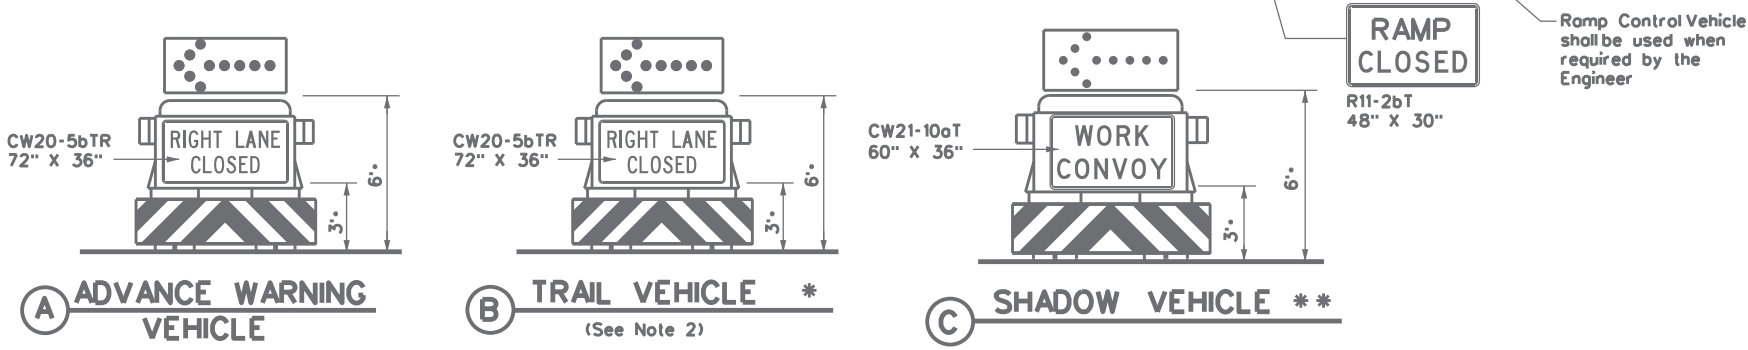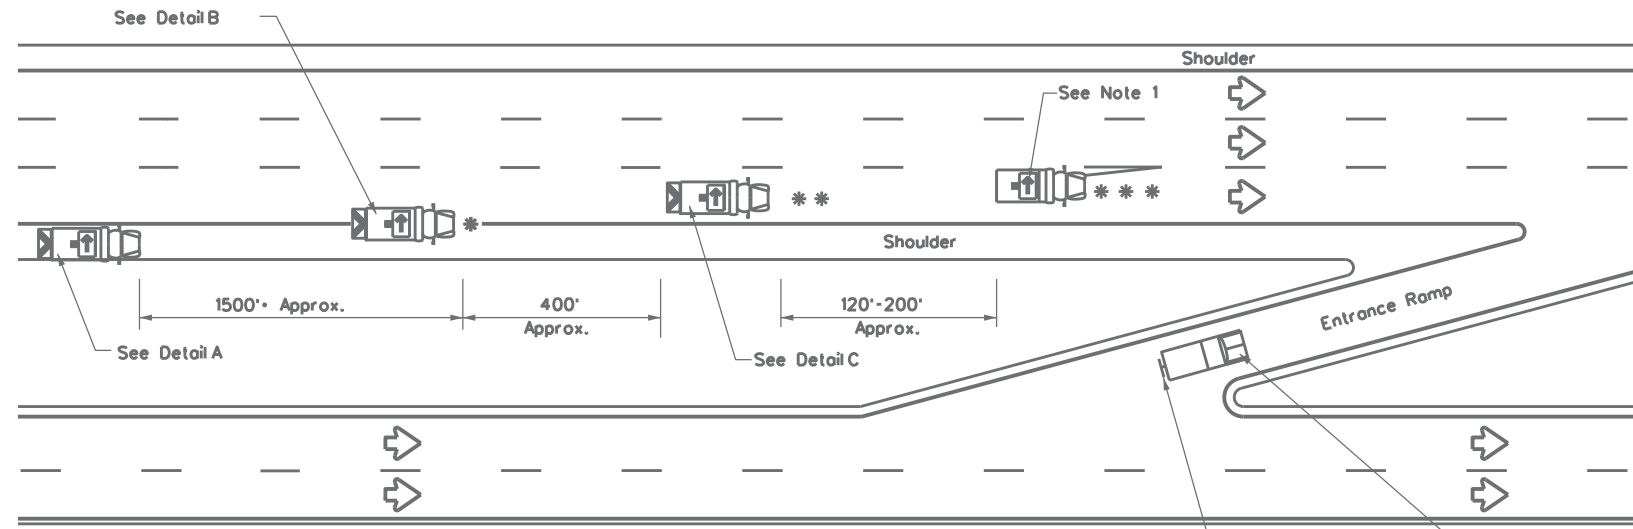

RIGHT LANE CLOSURE ON DIVIDED HIGHWAY - TCP(3-2a)

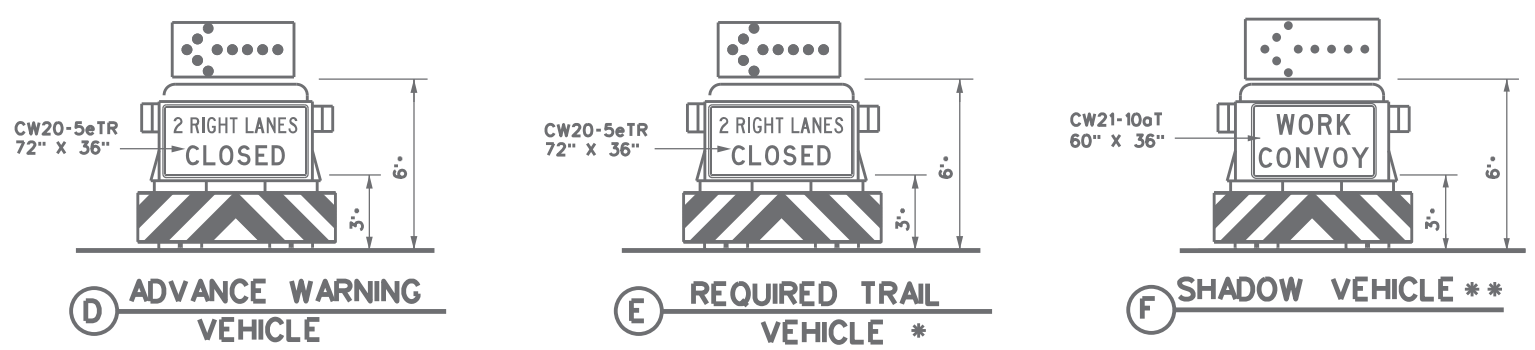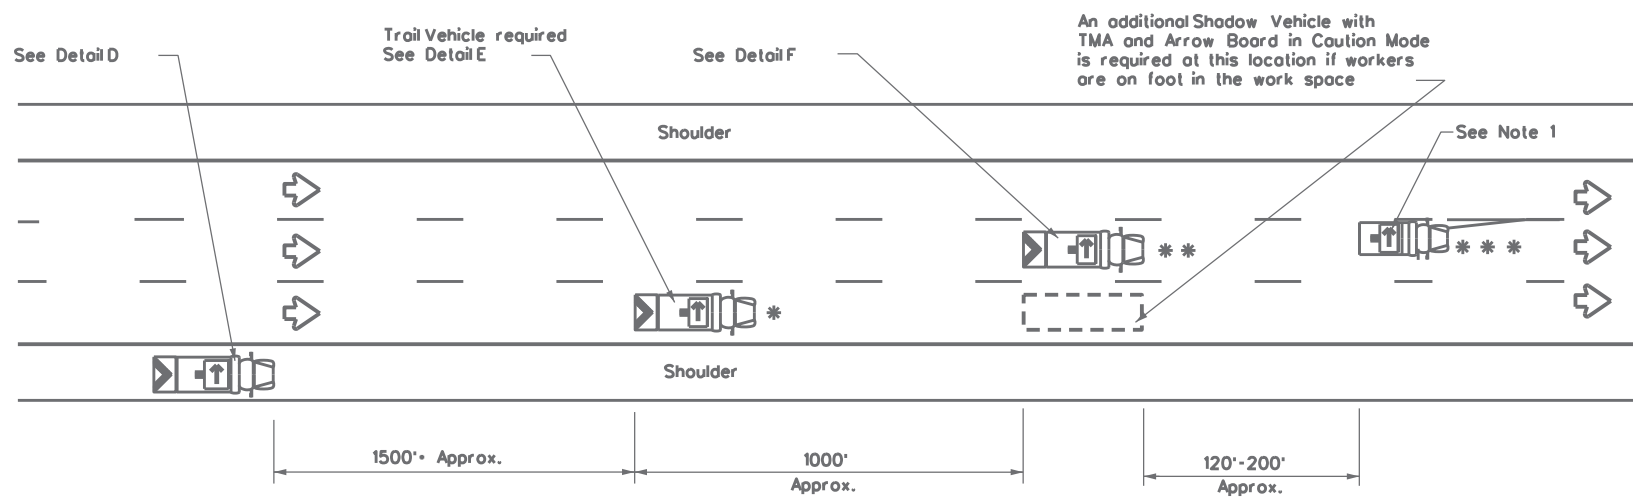


INTERIOR LANE CLOSURE ON MULTI-LANE DIVIDED HIGHWAY - TCP(3-2b)

LEGEND			
*	Trail Vehicle	ARROW BOARD DISPLAY	
**	Shadow Vehicle		
***	Work Vehicle	→	RIGHT Directional
☐	Heavy Work Vehicle	←	LEFT Directional
⊠	Truck Mounted Attenuator (TMA)	↔	Double Arrow
⚠	Traffic Flow	⊠	CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES









- ADVANCE WARNING, TRAIL and SHADOW vehicles shall be equipped with Type B or Type C flashing arrow boards as per the Barricade and Construction (BC) standards. Arrow boards on WORK vehicles will be optional based on the type of work being performed. The arrow boards shall be operated from inside the vehicle.
- For TCP(3-2a) the Engineer will determine if the TRAIL VEHICLE is required based on prevailing roadway conditions, traffic volume, and sight distance restrictions. All other vehicles shown for both TCP(3-2a) and TCP(3-2b) are required.
- The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- The use of truck mounted attenuators (TMA) on the ADVANCE WARNING, SHADOW, and TRAIL vehicles are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DMS 8300, Type A.
- Each vehicle shall have two-way radio communication capability.
- When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE may vary according to terrain, work activity and other factors.
- Standard 48" X 48" diamond shaped warning signs with the same message as those shown may be used where adequate mounting space exists.
- The signs shown should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or a truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board, must be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- The principles on this sheet may be used to close lanes from the left side of the roadway considering the number of lanes, shoulder width, sight distance, and ramp frequency.
- Signs and flashing arrow board modes shall be appropriately altered when implementing left lane closures or interior closures which close the left lanes.
- The Advance Warning Vehicle may straddle the edgeline when shoulder width makes it necessary.

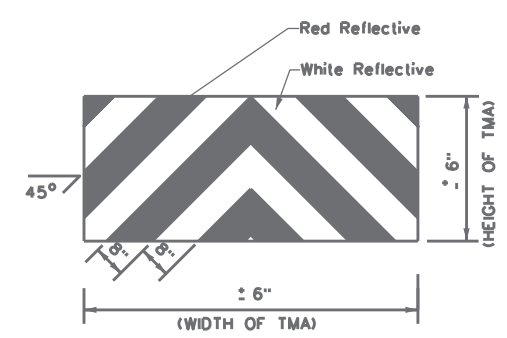

STRIPING FOR TMA

		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN MOBILE OPERATIONS DIVIDED HIGHWAYS			
TCP(3-2)-13			
FILE: tcp3-2.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT December 1985	CONT: 5470	SECT: 27	JOB: 001
REVISIONS:	2-94	4-98	8-95
	1-97	7-13	
DIST: 22	COUNTY: MAVERICK, etc.	SHEET NO. 48	

DATE: 6/21/2024 5:01:54 PM
 FILE: T:\RRD\STMT\FY 2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcp3-3.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

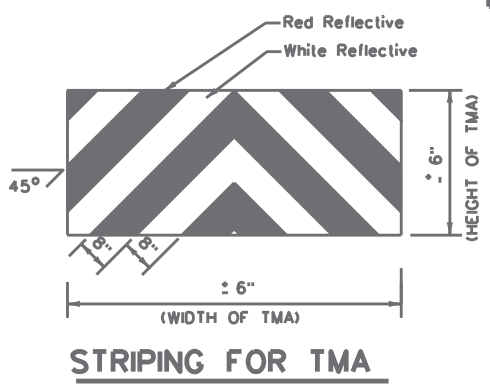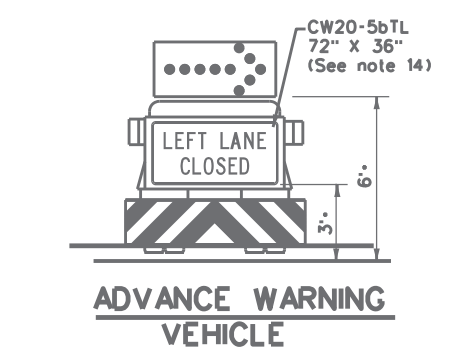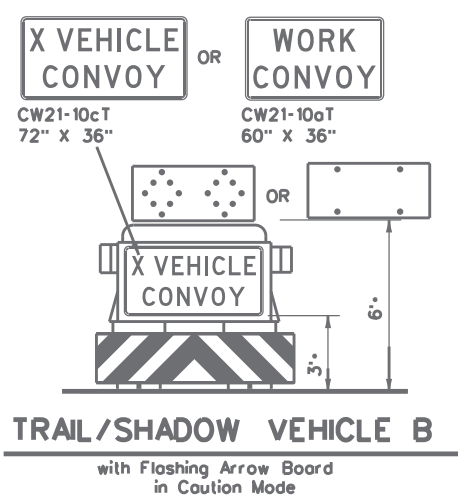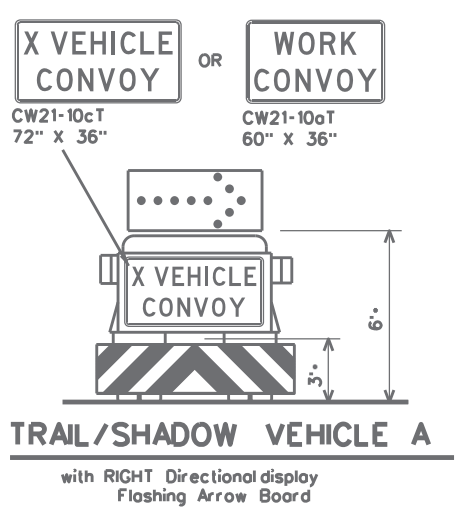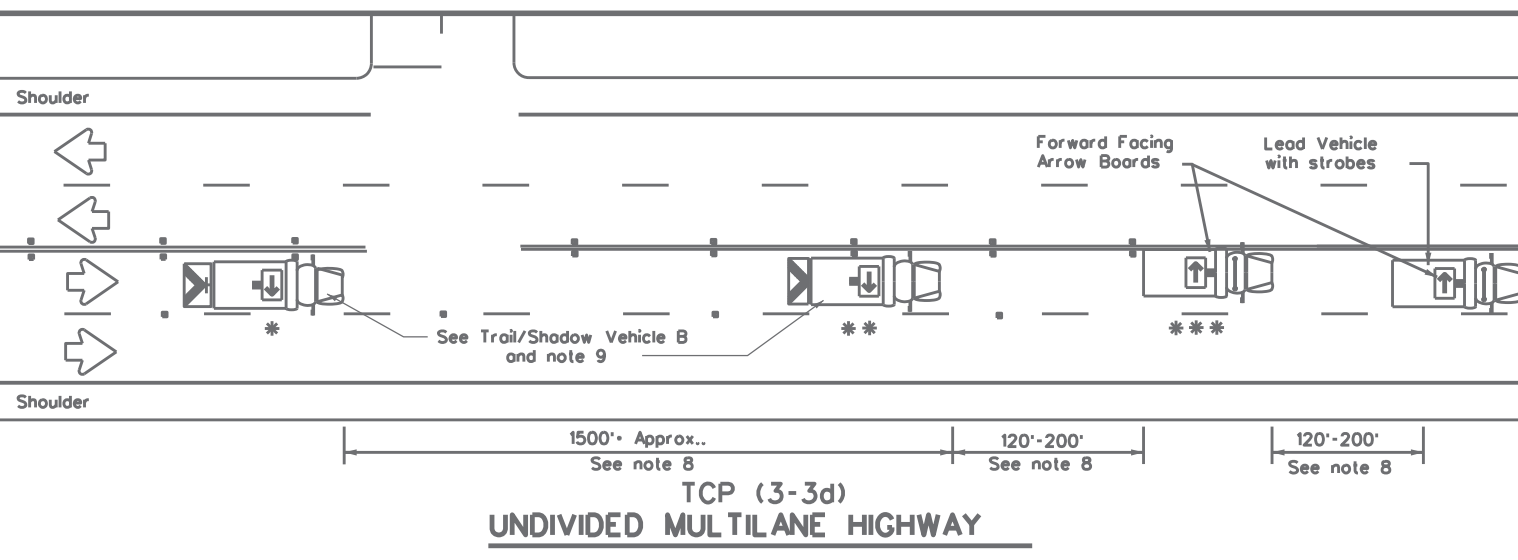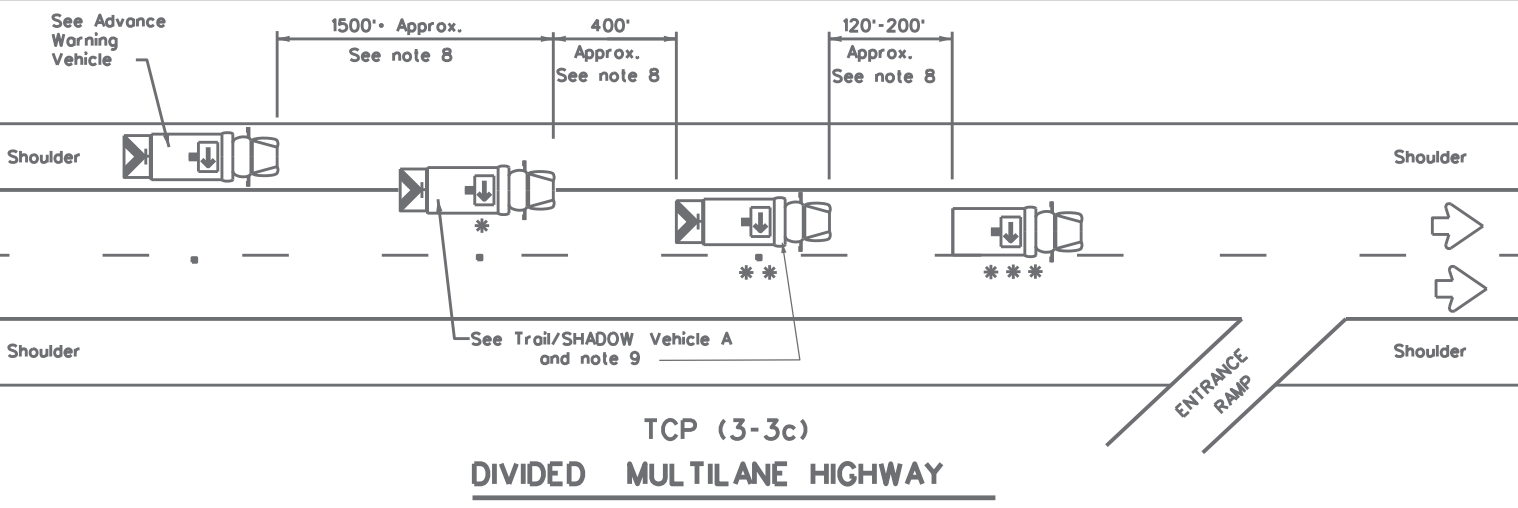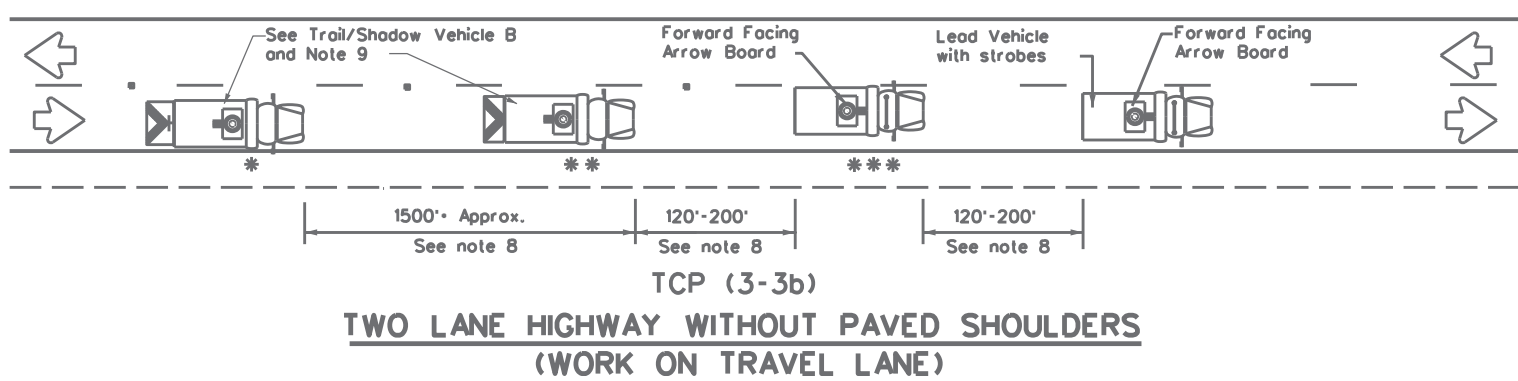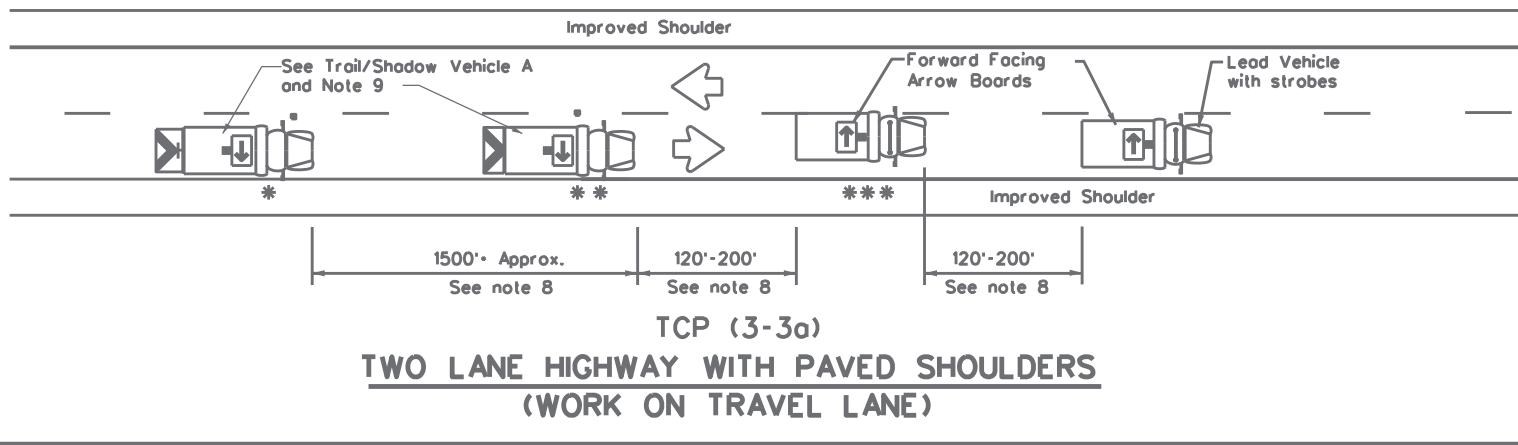

LEGEND		
* Trail Vehicle		ARROW BOARD DISPLAY
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
		LEFT Directional
		Double Arrow
		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES




1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
11. A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
12. For divided highways with three or four lanes in each direction, use TCP(3-2).
13. Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
14. The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
15. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.

Texas Department of Transportation
Traffic Operations Division Standard

TRAFFIC CONTROL PLAN MOBILE OPERATIONS RAISED PAVEMENT MARKER INSTALLATION/ REMOVAL TCP(3-3)-14

FILE: tcp3-3.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
2-94 4-98				
8-95 7-13				
1-97 7-14				
	DIST	COUNTY	SHEET NO.	
	22	MAVERICK, etc.	49	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024 5:01:54 PM
 FILE: T:\LRDDSTMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcp3-4.dwg

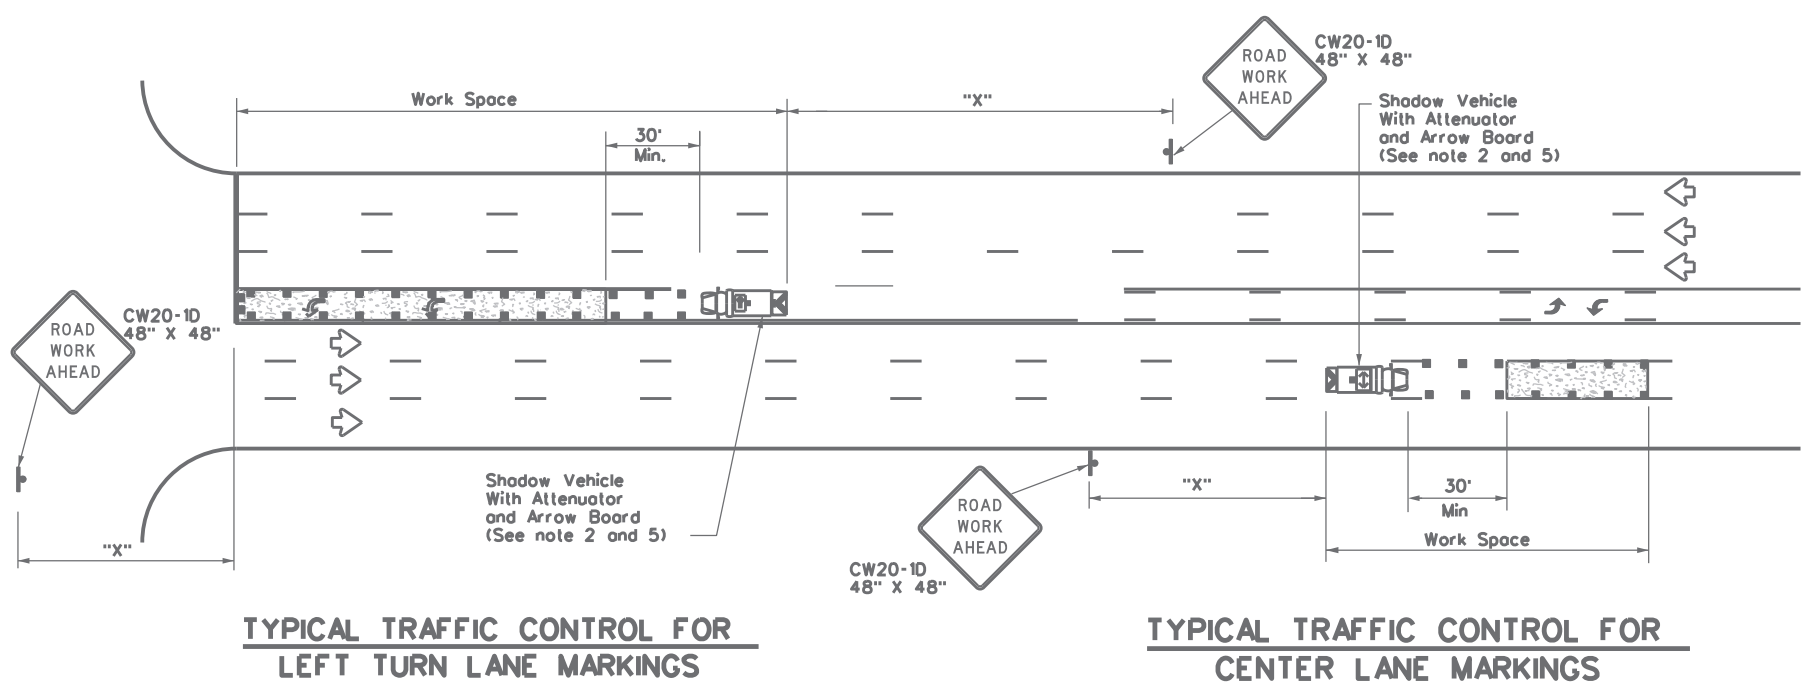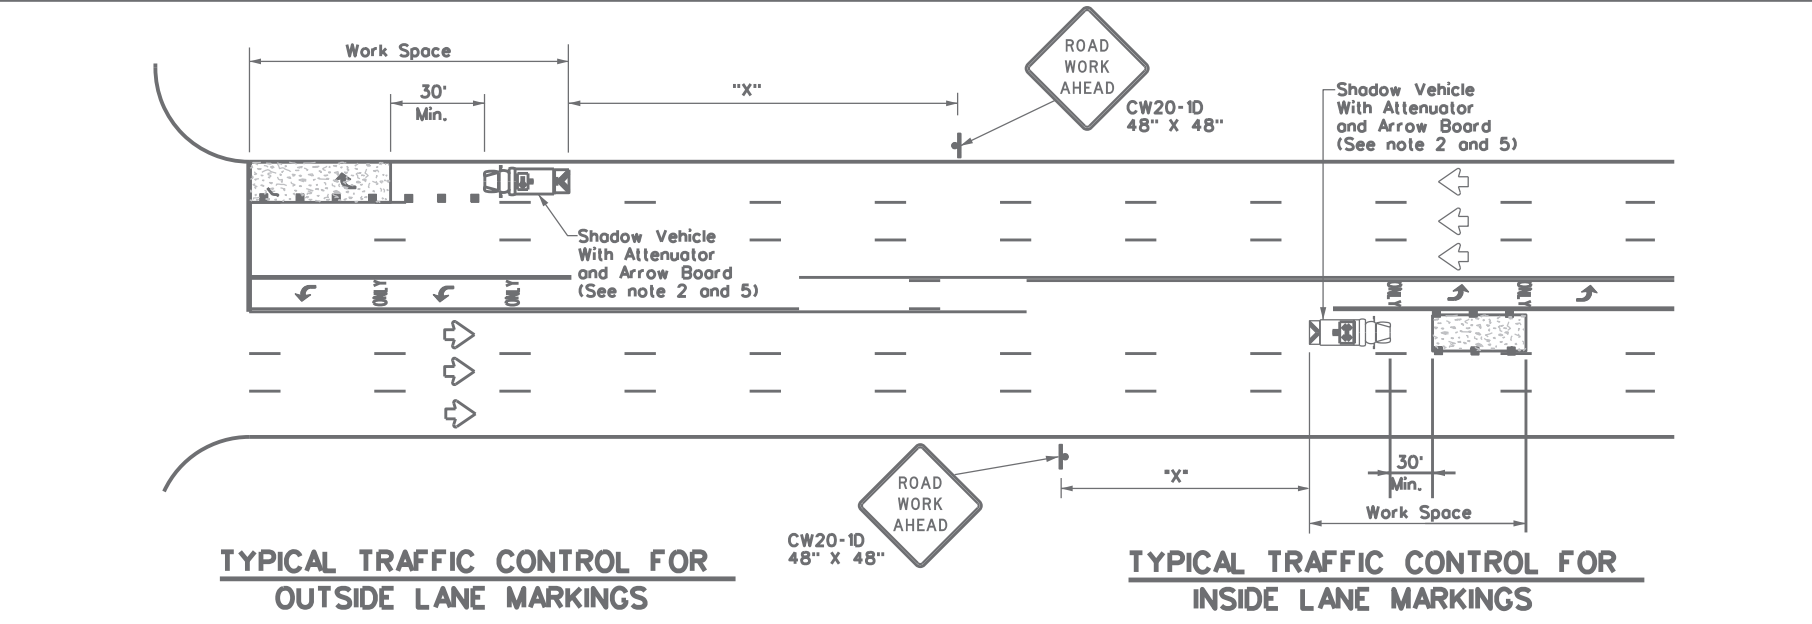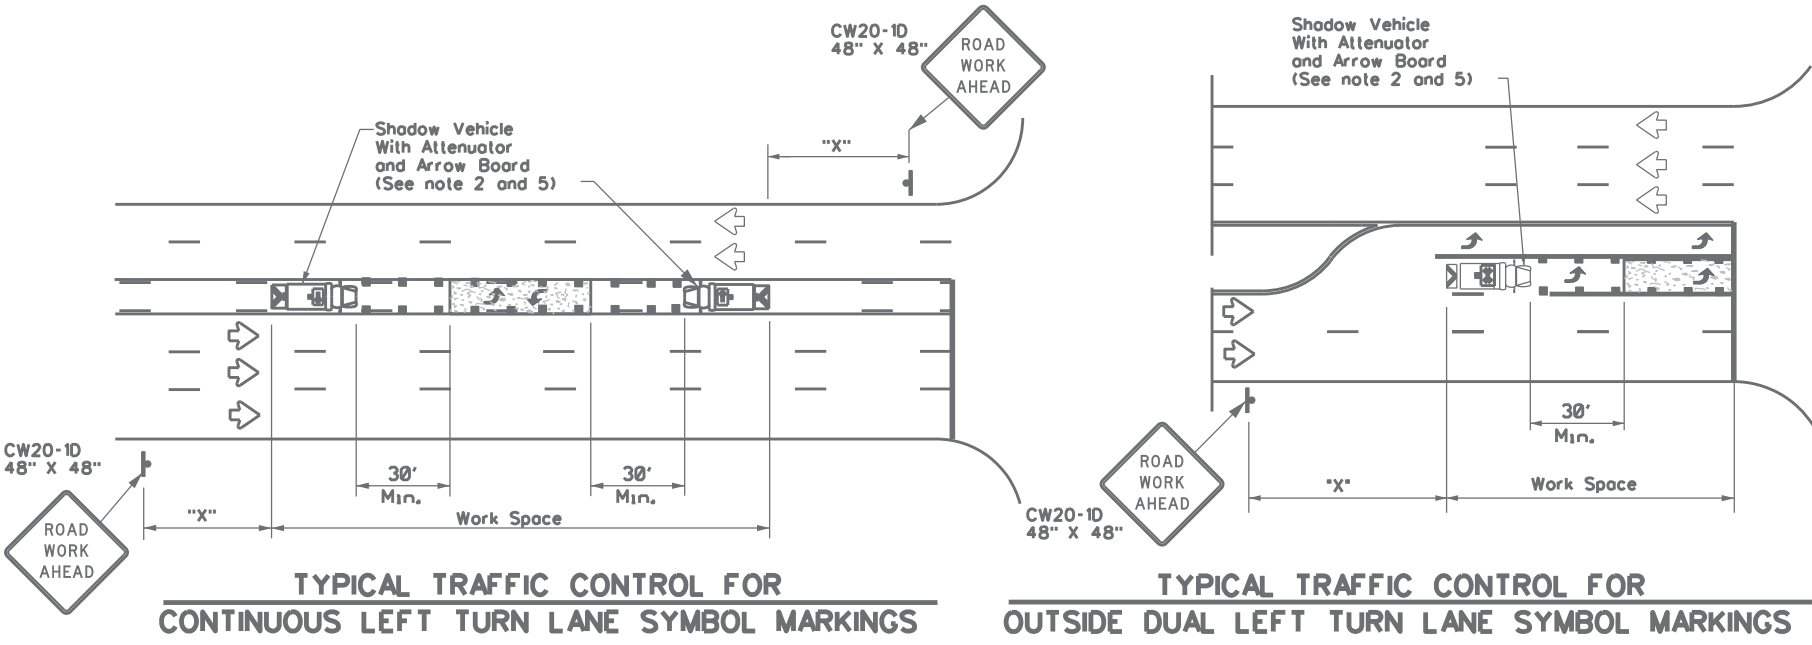

LEGEND		
* * *	Trailer Vehicle	ARROW BOARD DISPLAY
* * *	Shadow Vehicle	
* * *	Work Vehicle	RIGHT Directional
☐	Heavy Work Vehicle	LEFT Directional
☐	Truck Mounted Attenuator (TMA)	Double Arrow
↔	Traffic Flow	Channelizing Devices


Posted Speed *	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES

- This traffic control plan is for use on conventional roads posted at 45 mph or less and is intended for mobile operations that move continuously or intermittently (stopping up to approximately 15 minutes) such as short-line striping and in-lane rumble strips. When activities are anticipated to take longer amounts of time or traffic conditions warrant, a short duration or short-term stationary traffic control plan should be used.
- A Truck Mounted Attenuator shall be used on Shadow Vehicle. Striping on the back panel of all truck mounted attenuators shall be 8" red and white reflective sheeting placed in an inverted "V" design. Reflective sheeting shall meet or exceed the reflectivity and color requirements of departmental material specification DMS-8300, Type A.
- All traffic control devices shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD), latest edition.
- The use of yellow rotating beacons or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the drivers side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- Flashing arrow board shall be used on Shadow Vehicle. Flashing arrow board shall be Type B or Type C as per BC Standards. The arrow board operation shall be controlled from inside the truck.


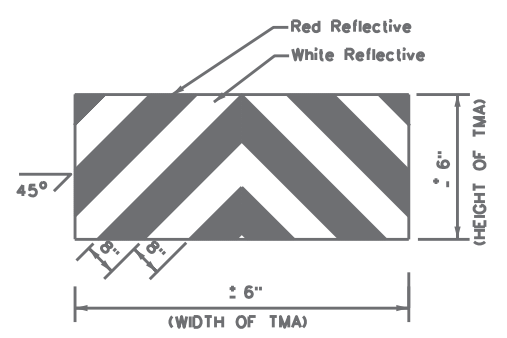


Texas Department of Transportation
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN
 MOBILE OPERATIONS FOR
 ISOLATED WORK AREAS
 UNDIVIDED HIGHWAYS
 TCP(3-4)-13**

FILE: tcp3-4.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT July, 2013	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
DIST	COUNTY		SHEET NO.	
22	MAVERICK, etc.		50	

DATE: 6/21/2024 5:01:55 PM
 FILE: T:\LRDDSTMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-1-22.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

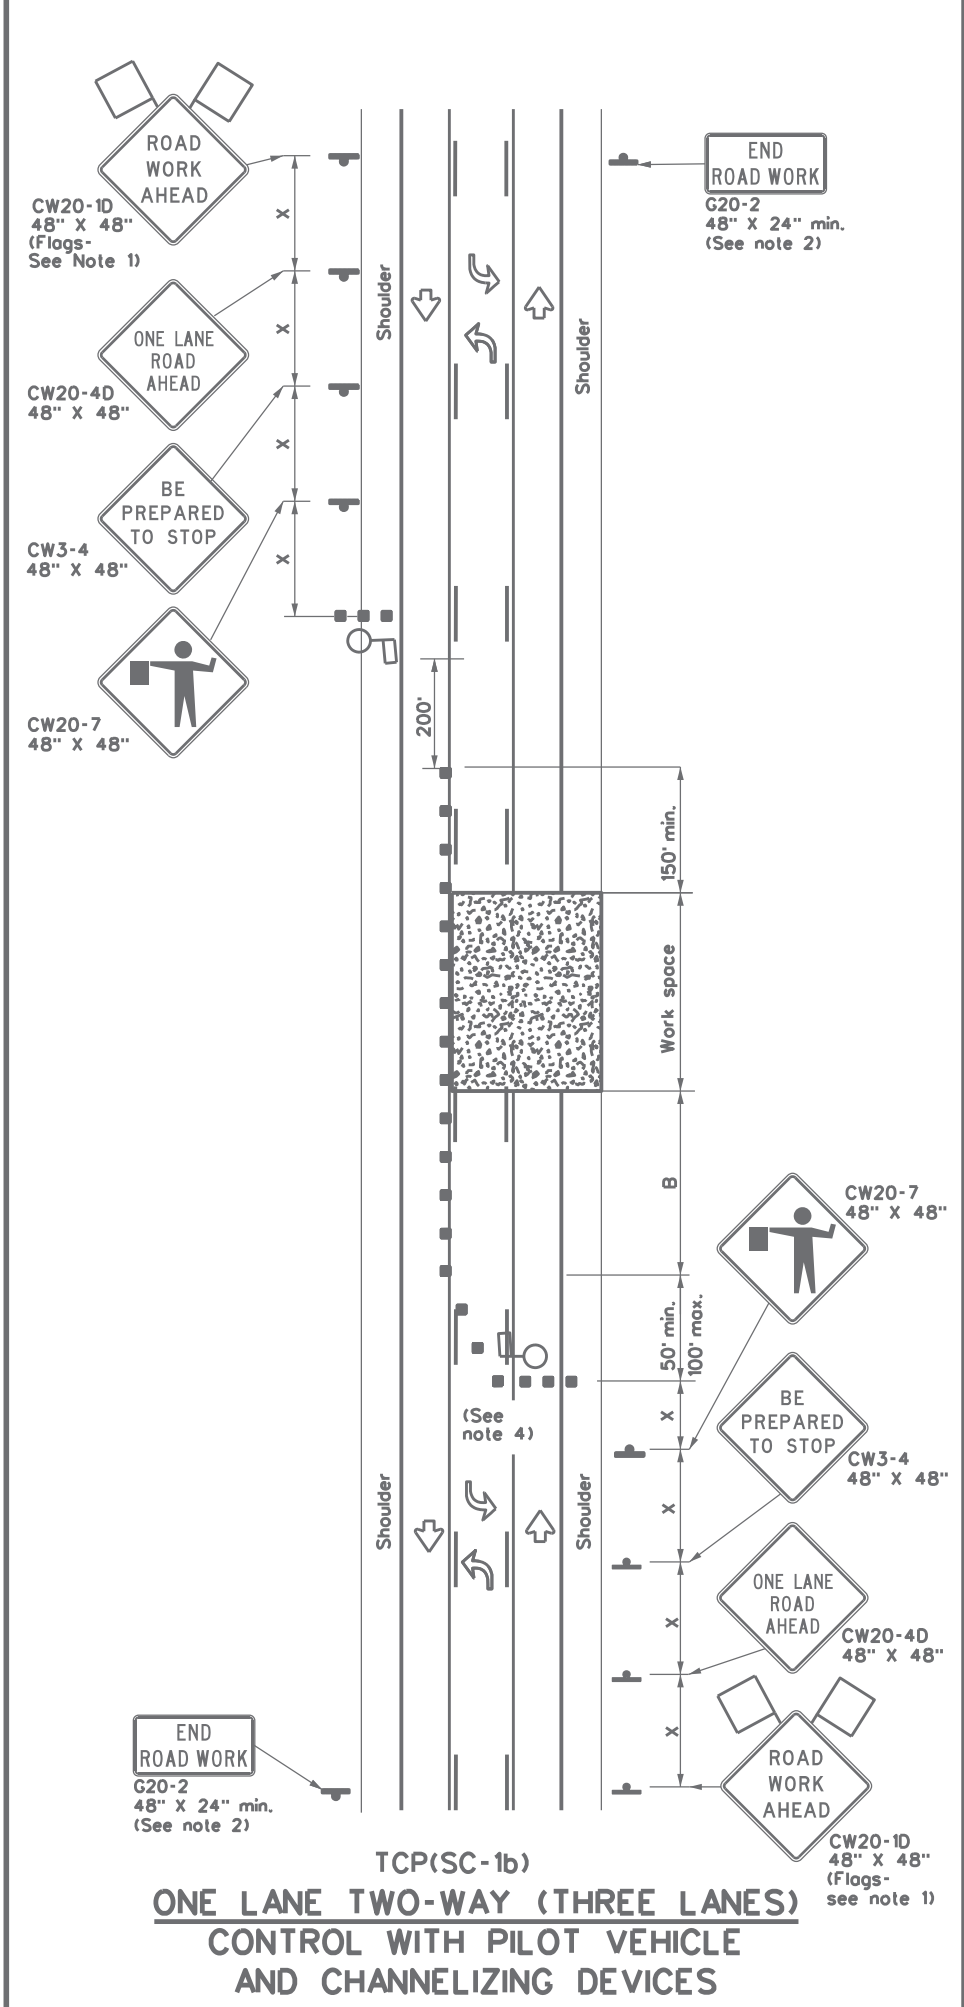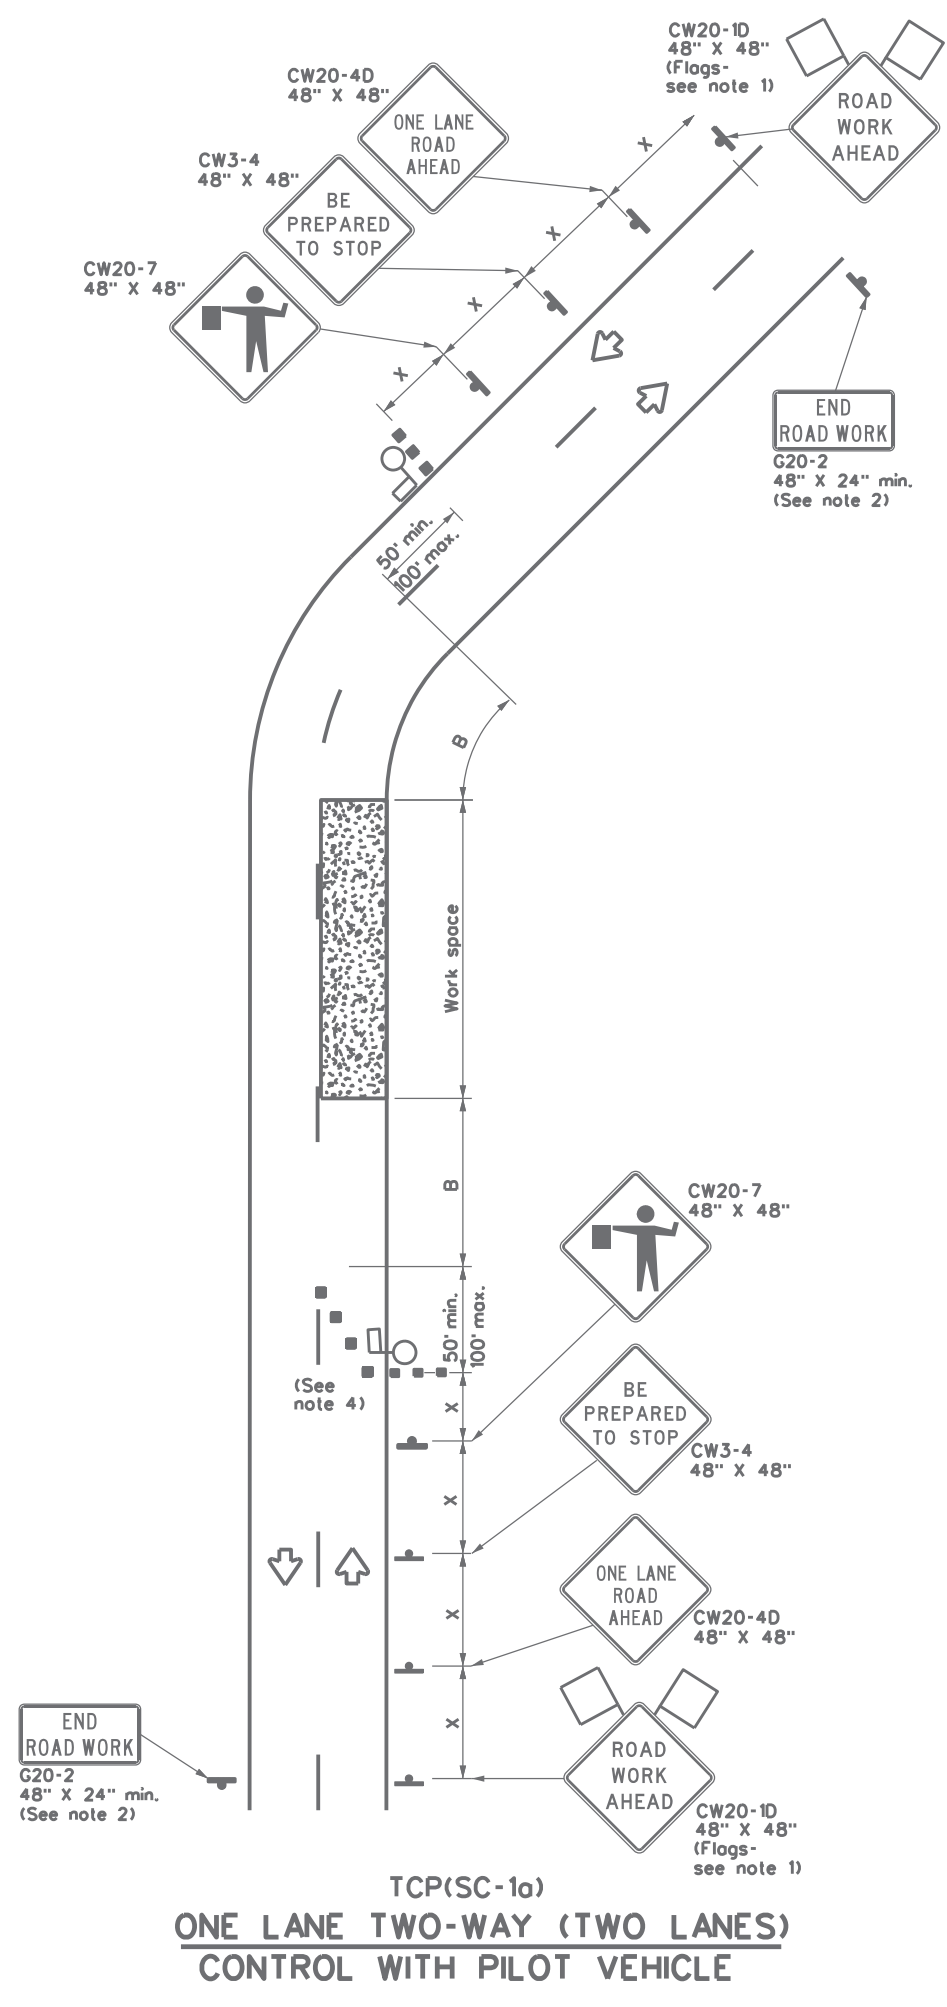

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = $\frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

x Conventional Roads Only
 xx Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT) S = Posted Speed (MPH)


TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
- Sign spacing may be increased or an additional ROAD WORK AHEAD (CW20-1D) sign may be used if advance warning ahead of the flagger sign is less than 1500 feet.
- Flaggers should use two-way radios or other methods of communication at all times for traffic control coordination.
- Flaggers should use 24" STOP (CW20-8) / SLOW (CW20-8aT) paddles to control traffic. Flags should be limited to emergency situations.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personnel (flaggers) at the intersection.
- Temporary rumble strips are not required on seal coat operations.
- The pilot car is used to guide vehicles through traffic control zone. The pilot car shall have an identification name displayed and PILOT CAR, FOLLOW ME (G20-4) sign or message board mounted in a conspicuous position on rear.

TCP (SC-1a)

- Channelizing devices on the centerline are not required when a pilot car is leading traffic, unless directed by the Engineer.




TRAFFIC CONTROL PLAN
SEAL COAT OPERATIONS
ONE-LANE TWO-WAY

TCP(SC-1)-22


FILE: tcpsc-1-22.dgn	DN:	CK:	DW:	CK:
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-21	DIST	COUNTY	SHEET NO.	
10-22	22	MAVERICK, etc.	51	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:55 PM
 FILE: T:\LRODSTMT\FY 2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-2-22.dgn

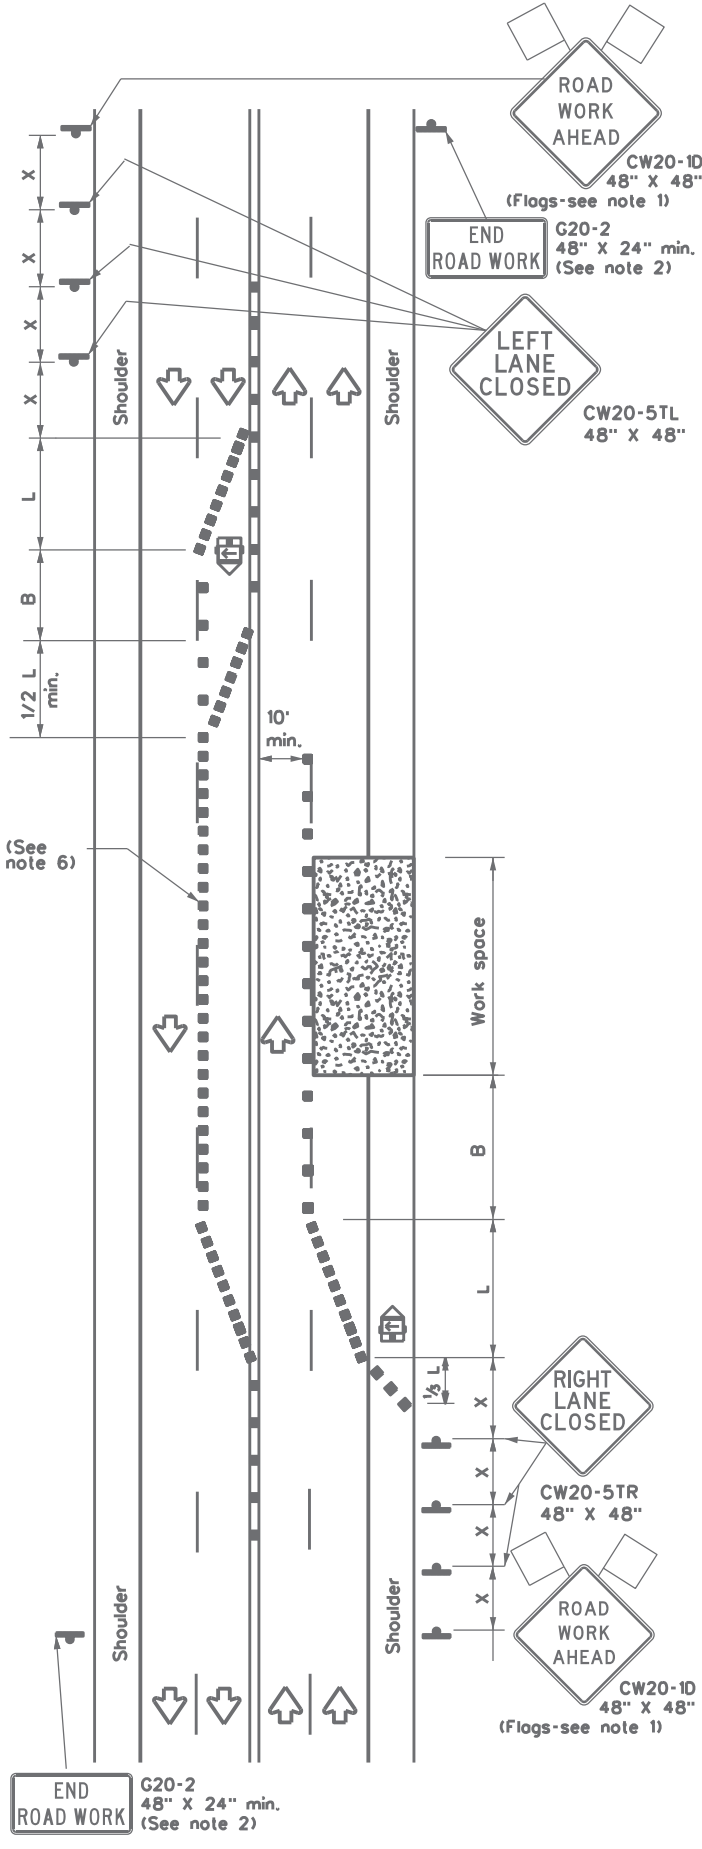

TCP (SC-2a)
ONE LANE CLOSED EACH DIRECTION
CONTROL W/ CHANNELIZING DEVICES

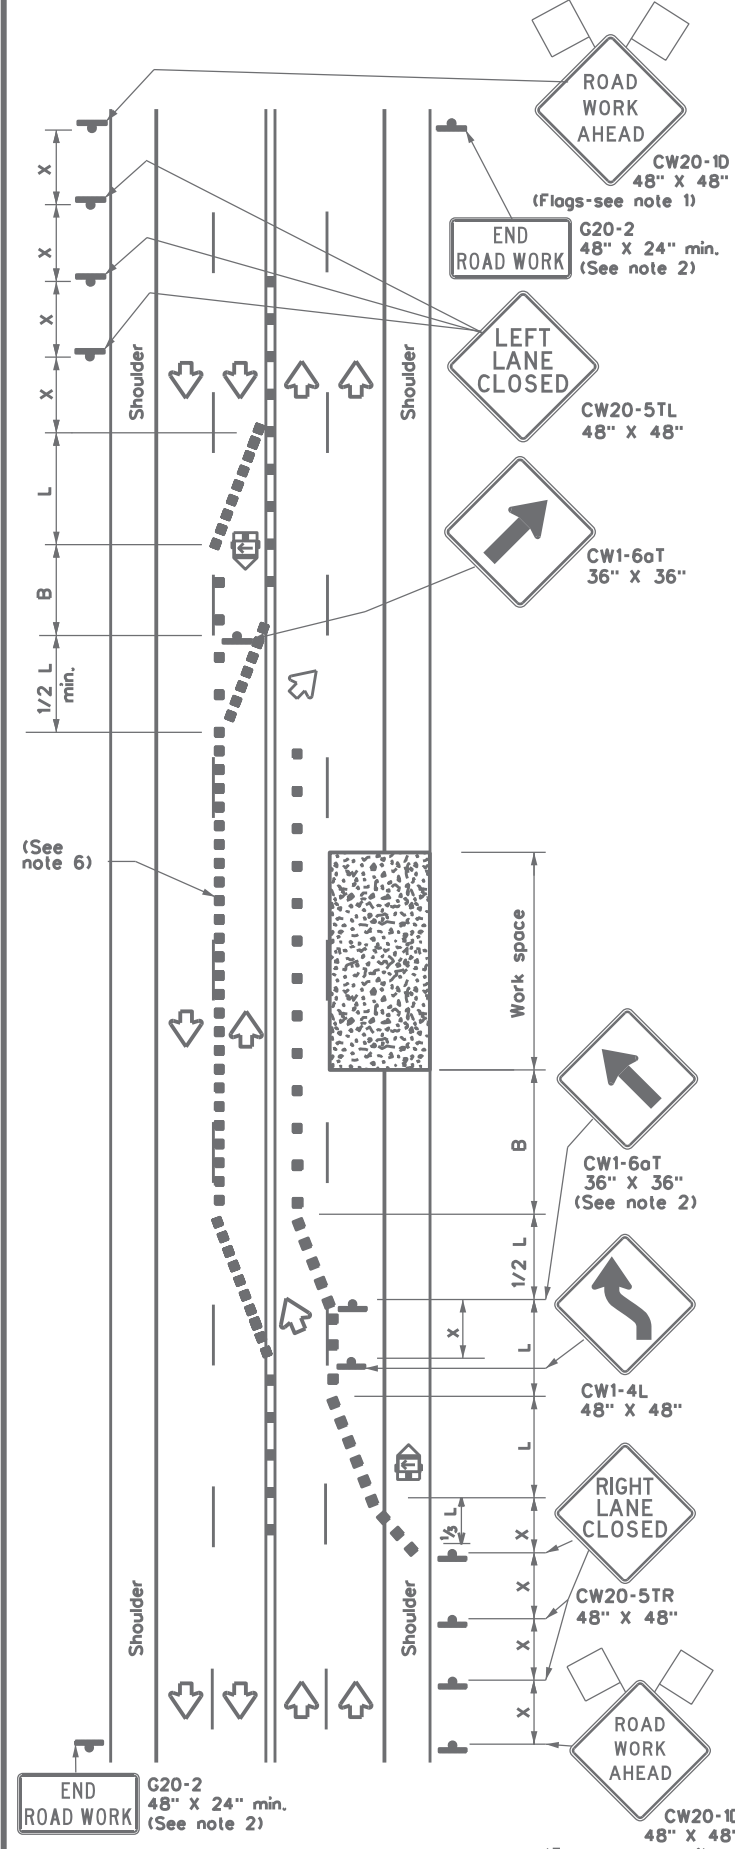

TCP (SC-2b)
ONE LANE CLOSED EACH DIRECTION
CONTROL W/ CHANNELIZING DEVICES

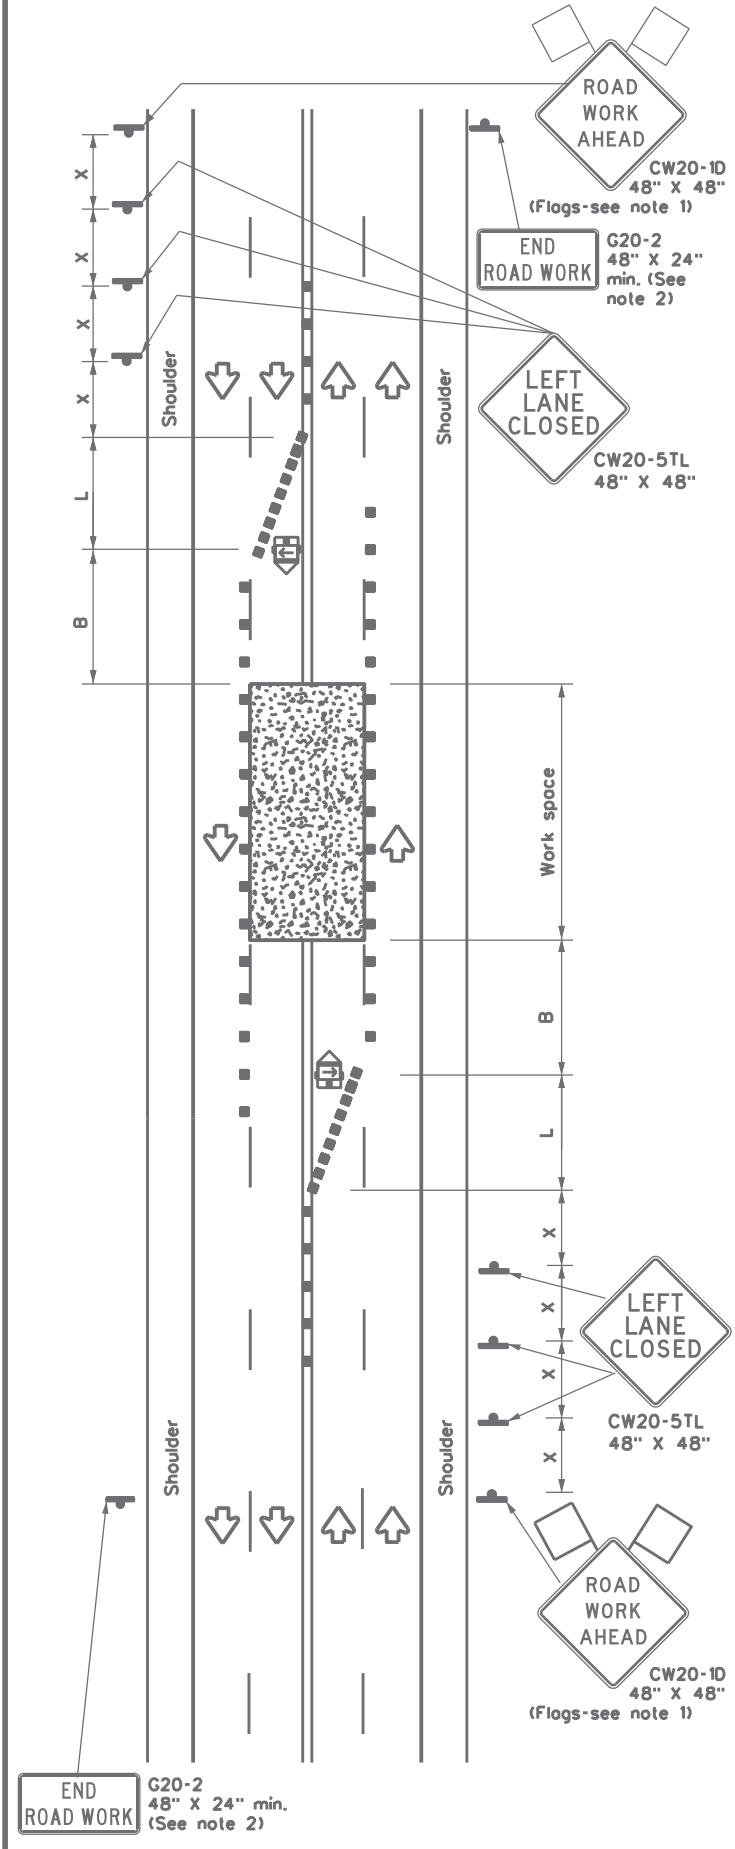

TCP (SC-2c)
CENTER LANES CLOSED
CONTROL W/ CHANNELIZING DEVICES

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = $\frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	700'	770'	840'	70'	140'	800'	475'	
75	750'	825'	900'	75'	150'	900'	540'	

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - The ROAD WORK AHEAD (CW20-1D) sign may be repeated if the visibility of the work zone is less than 1500 feet.
 - If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personnel (flaggers) at the intersection.
 - Temporary rumble strips are not required on seal coat operations.


TCP (SC-2a) and (SC-2b)

6. Channelizing devices which separate two-way traffic shall be spaced on tapers at:
 a.) 20 feet;
 b.) 15 feet when posted speeds are 35 mph or slower; or
 c.) at 1/2(S) for tangent sections.
 This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.


SHEET 2 OF 8

		Traffic Safety Division Standard	
TRAFFIC CONTROL PLAN			
SEALCOAT OPERATIONS			
MULTILANE ROADS			
(UNDIVIDED)			
TCP(SC-2)-22			
FILE: tcpsc-2-22.dgn	DN:	CK:	DW:
© TxDOT October 2022	CONT: 6470	SECT: 27	JOB: 001
REVISIONS	DIST: 22		COUNTY: MAVERICK, etc.
4-21	SHEET NO. 52		
10-22			


DATE: 6/21/2024 5:01:56 PM
 FILE: T:\RRDST\TNT\FY 2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-3 of 3.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

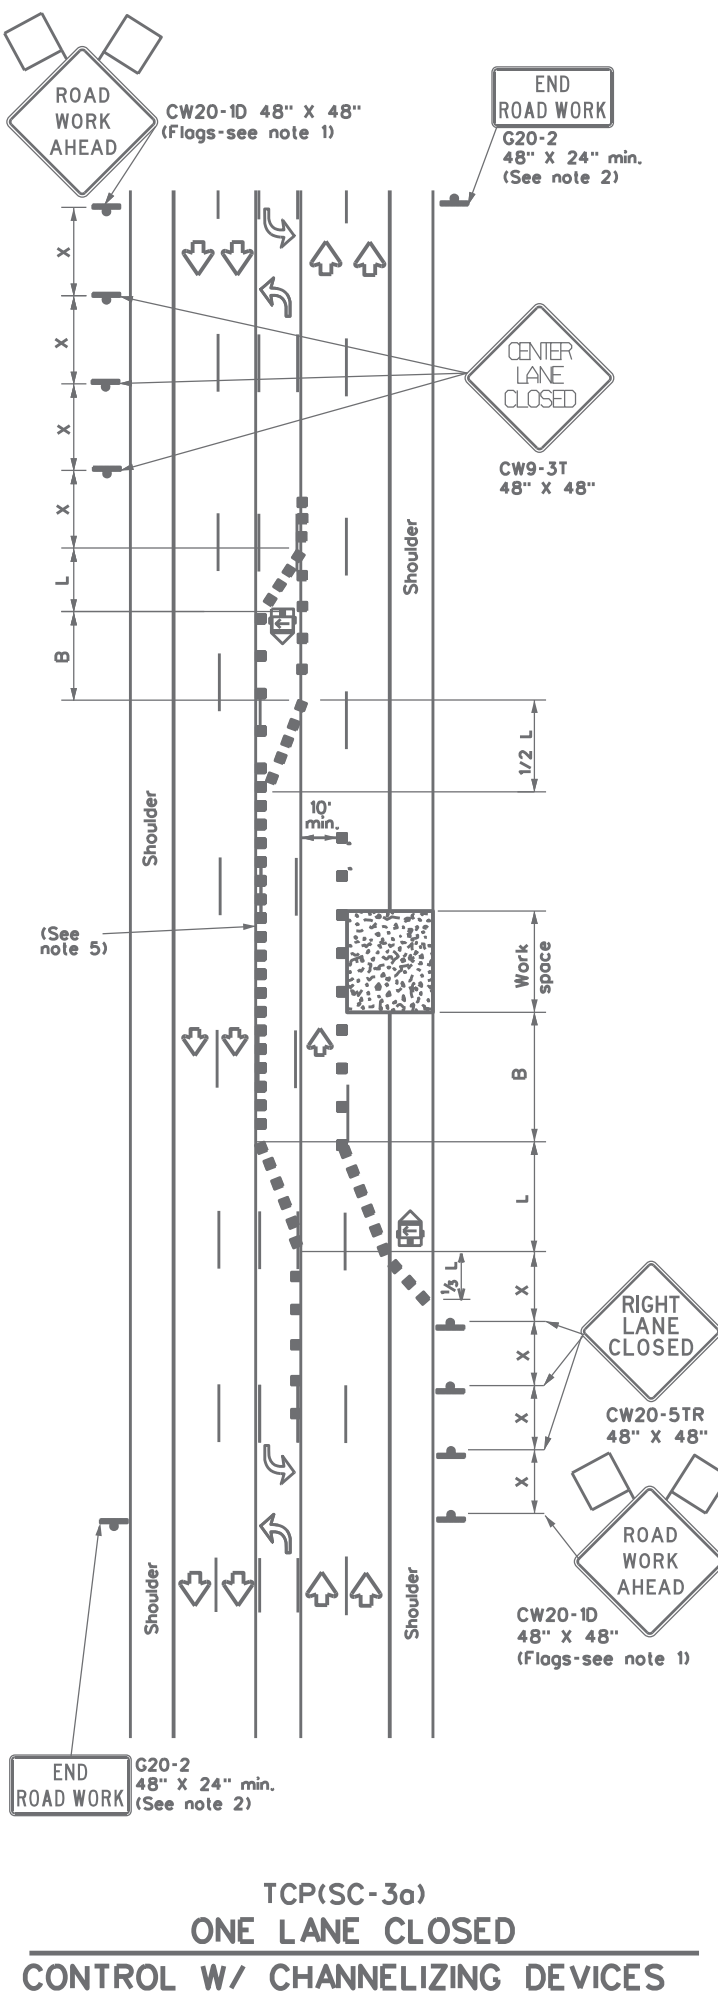

**TCP(SC-3a)
ONE LANE CLOSED
CONTROL W/ CHANNELIZING DEVICES**

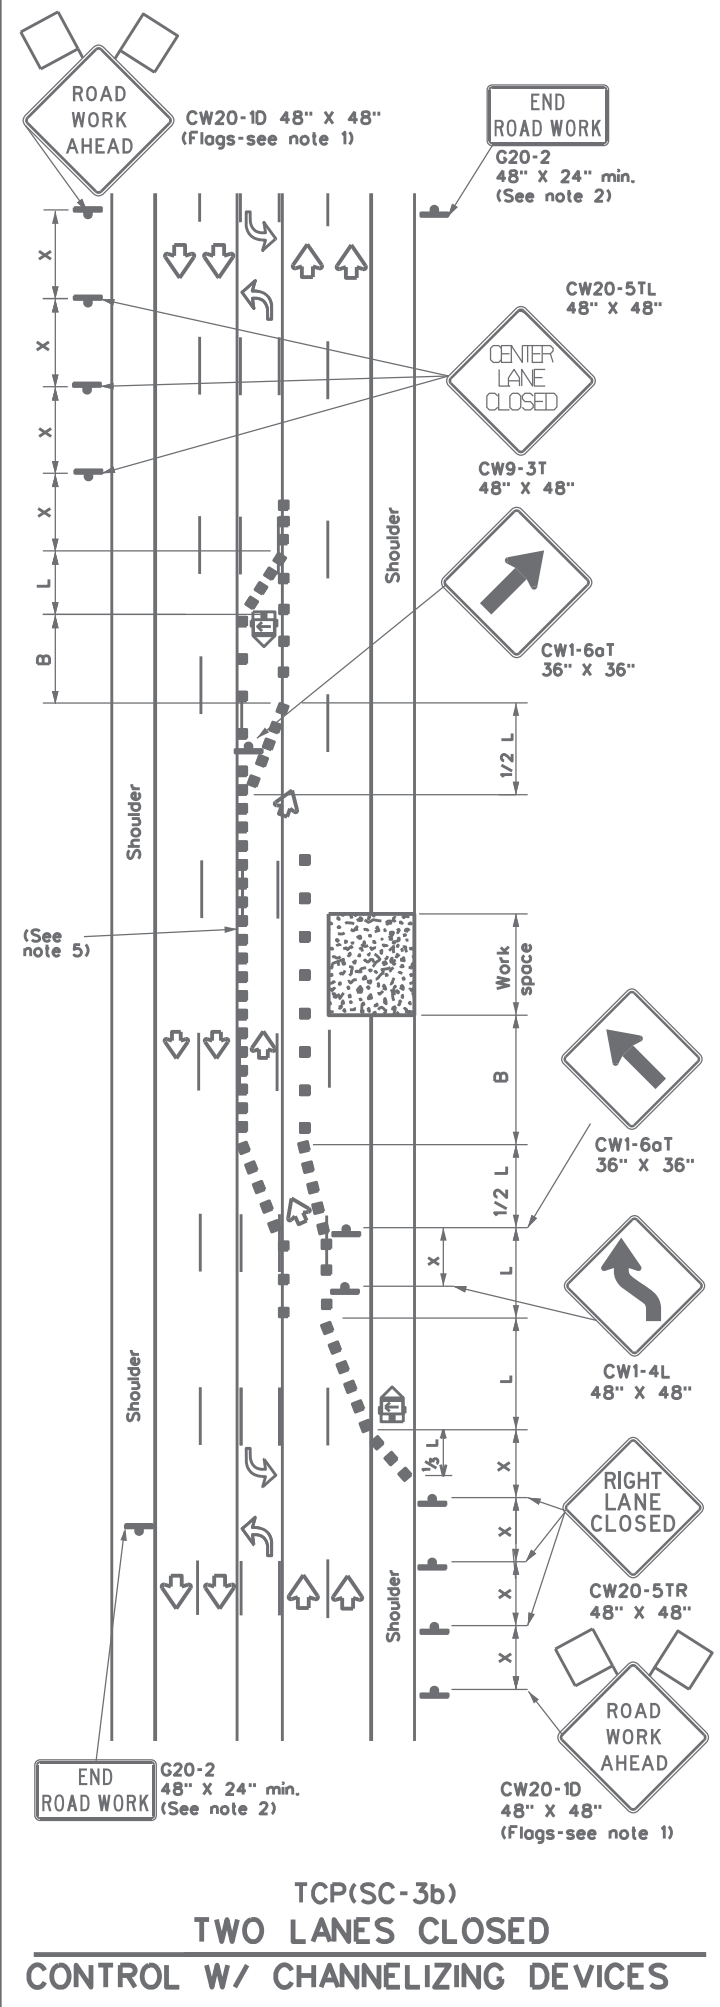

**TCP(SC-3b)
TWO LANES CLOSED
CONTROL W/ CHANNELIZING DEVICES**

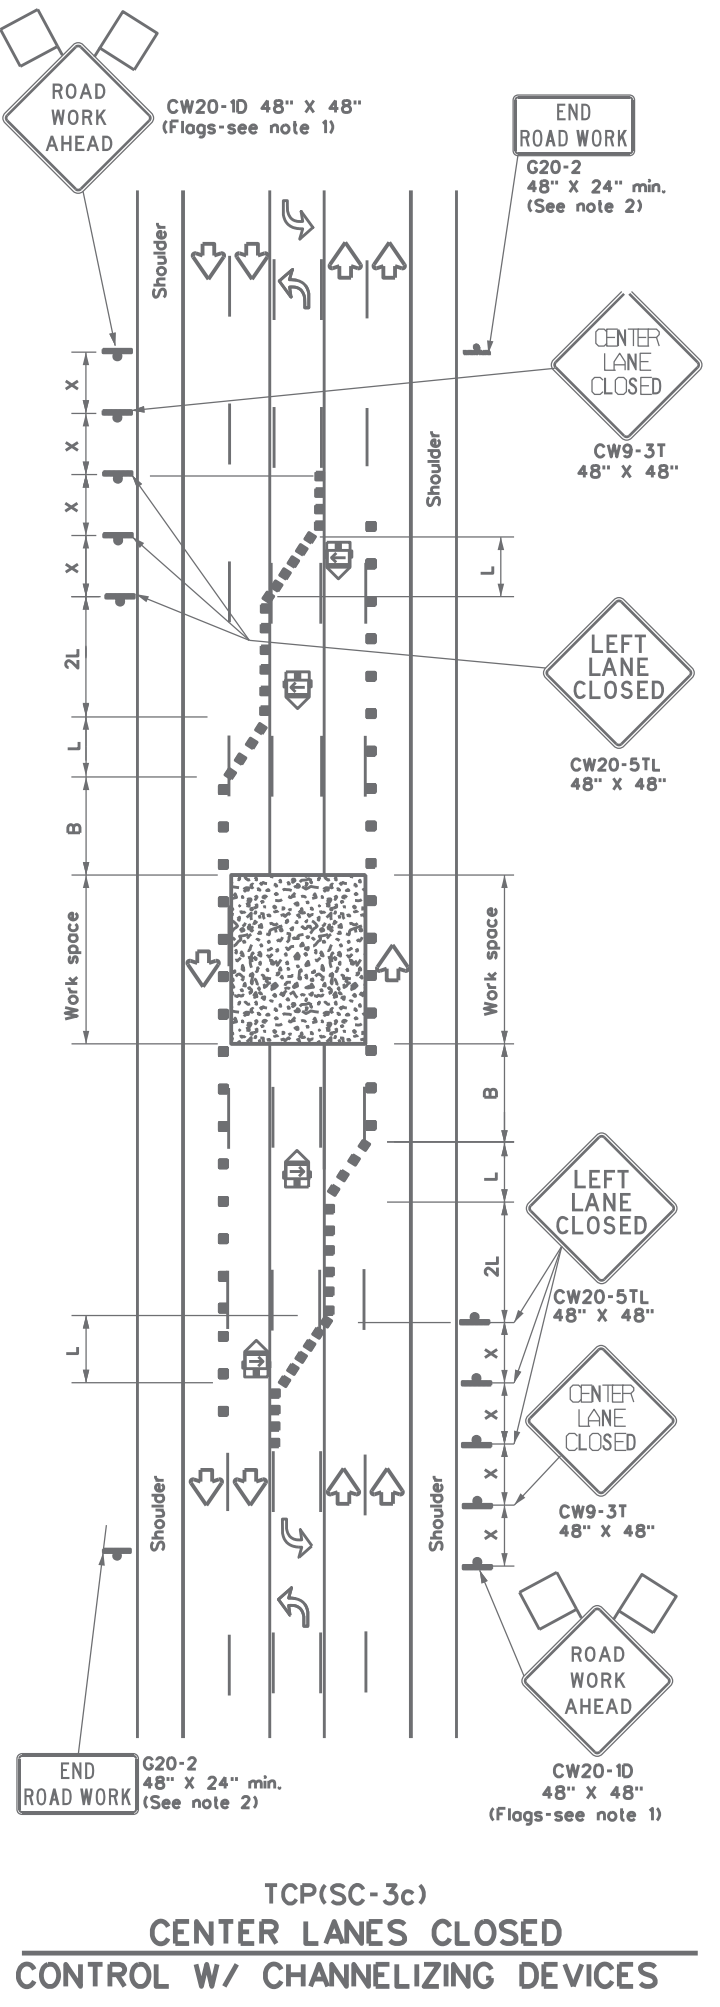

**TCP(SC-3c)
CENTER LANES CLOSED
CONTROL W/ CHANNELIZING DEVICES**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = $\frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

x Conventional Roads Only
 xx Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		


- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - If the sealcoat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personnel (flaggers) at the intersection.
 - Temporary rumble strips are not required on sealcoat operations.
- TCP (SC-3a) and (SC-3b)**
- Channelizing devices which separate two-way traffic shall be spaced on tapers at:
 - 20 feet;
 - 15 feet when posted speeds are 35 mph or slower; or
 - at 1/2(S) for tangent sections.
 This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

SHEET 3 OF 8

		Traffic Safety Division Standard	
TRAFFIC CONTROL PLAN SEAL COAT OPERATIONS MULTILANE ROADS (W/ CENTER LEFT TURN LANE) TCP(SC-3)-22			
FILE: tcpsc-3-22.dgn	DN:	CK:	DW:
© TxDOT October 2022	CON: 6470	SECT: 27	JOB: 001
REVISIONS	DIST: 22		COUNTY: MAVERICK, etc.
4-21	SHEET NO.		53
10-22			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:56 PM
 FILE: I:\RRDDST\TMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-4.dwg

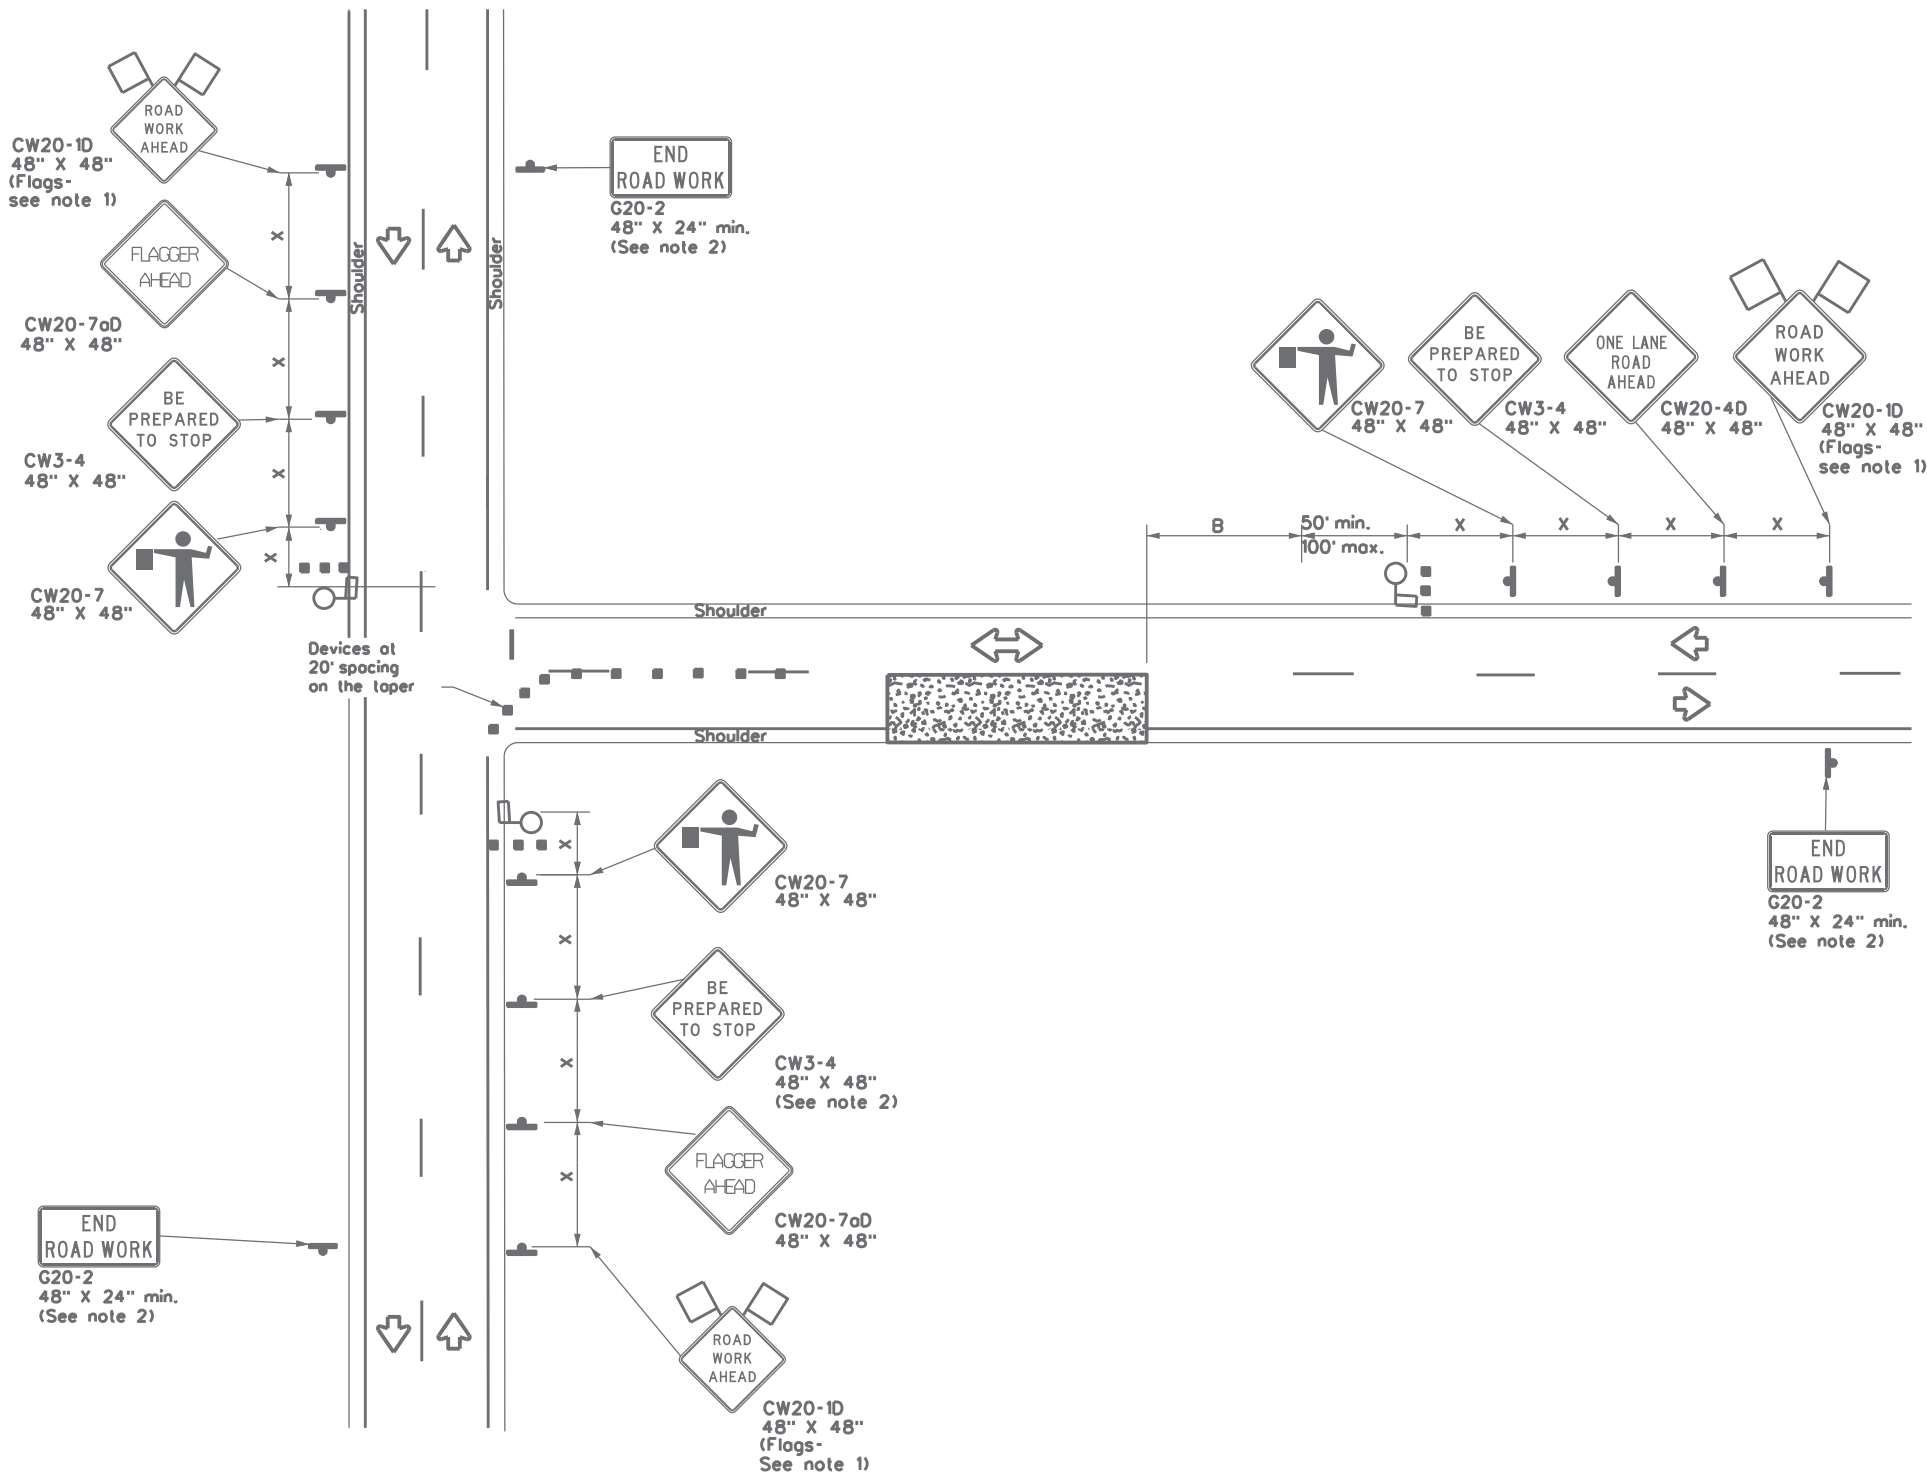

**ONE LANE TWO-WAY (T-INTERSECTION)
 CONTROL WITH PILOT VEHICLE**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

x Conventional Roads Only
 xx Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT) S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
- Flaggers should use two-way radios or other methods of communication at all times for traffic control coordination.
- Flaggers should use 24" STOP (CW20-8) / SLOW (CW20-8aT) paddles to control traffic. Flags should be limited to emergency situations.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- Temporary rumble strips are not required on seal coat operations.
- The pilot car is used to guide vehicles through traffic control zone. The pilot car shall have an identification name displayed and PILOT CAR, FOLLOW ME (G20-4) sign or message board mounted in a conspicuous position on rear.

SHEET 4 OF 8




**TRAFFIC CONTROL PLAN
 SEAL COAT OPERATIONS
 NEAR INTERSECTION**

TCP(SC-4)-22


FILE: tcpsc-4-22.dgn	DN:	CK:	DW:	CK:
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-21	DIST	COUNTY	SHEET NO.	
10-22	22	MAVERICK, etc.	54	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/21/2024 5:01:56 PM
 FILE: T:\LRDD5\TMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-5-22.dwg

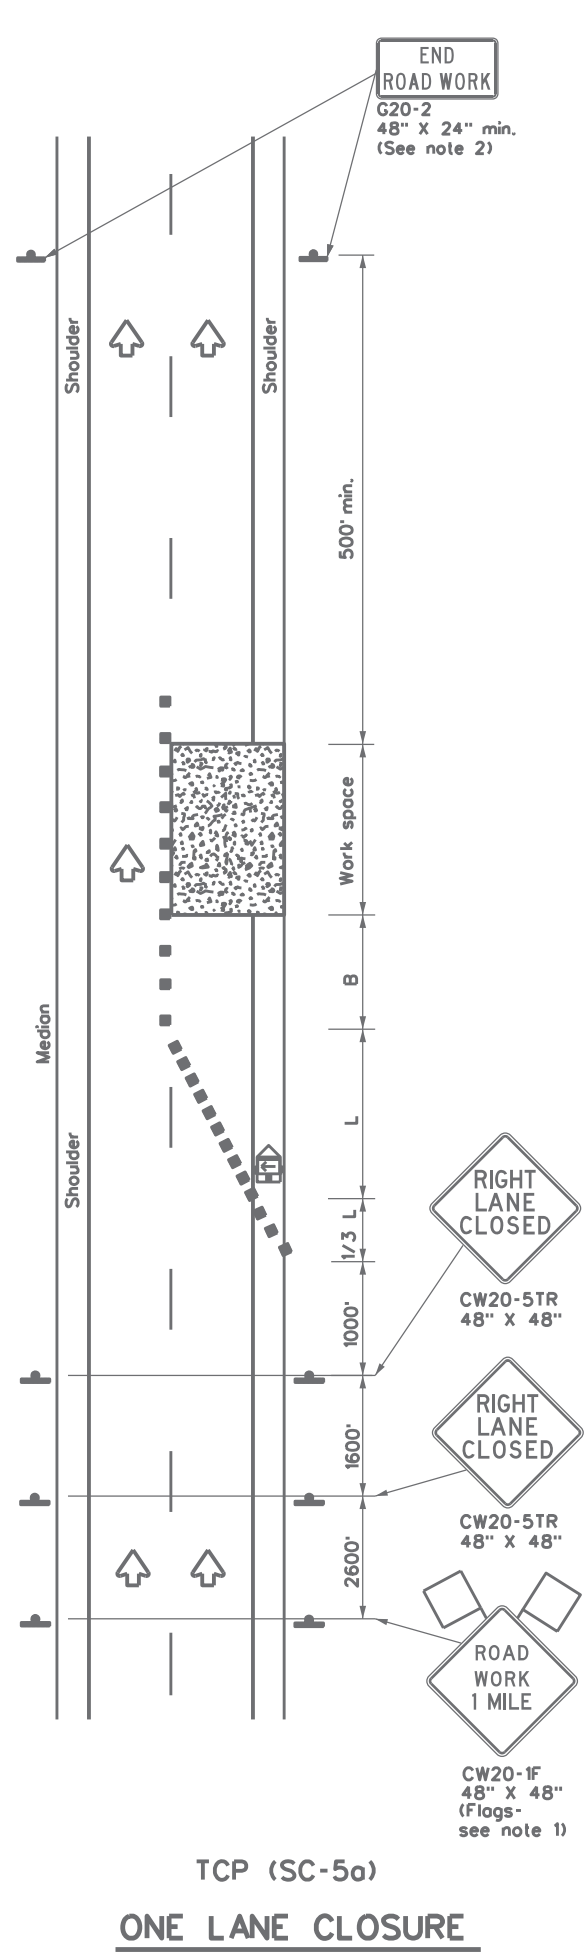

TCP (SC-5a)
ONE LANE CLOSURE

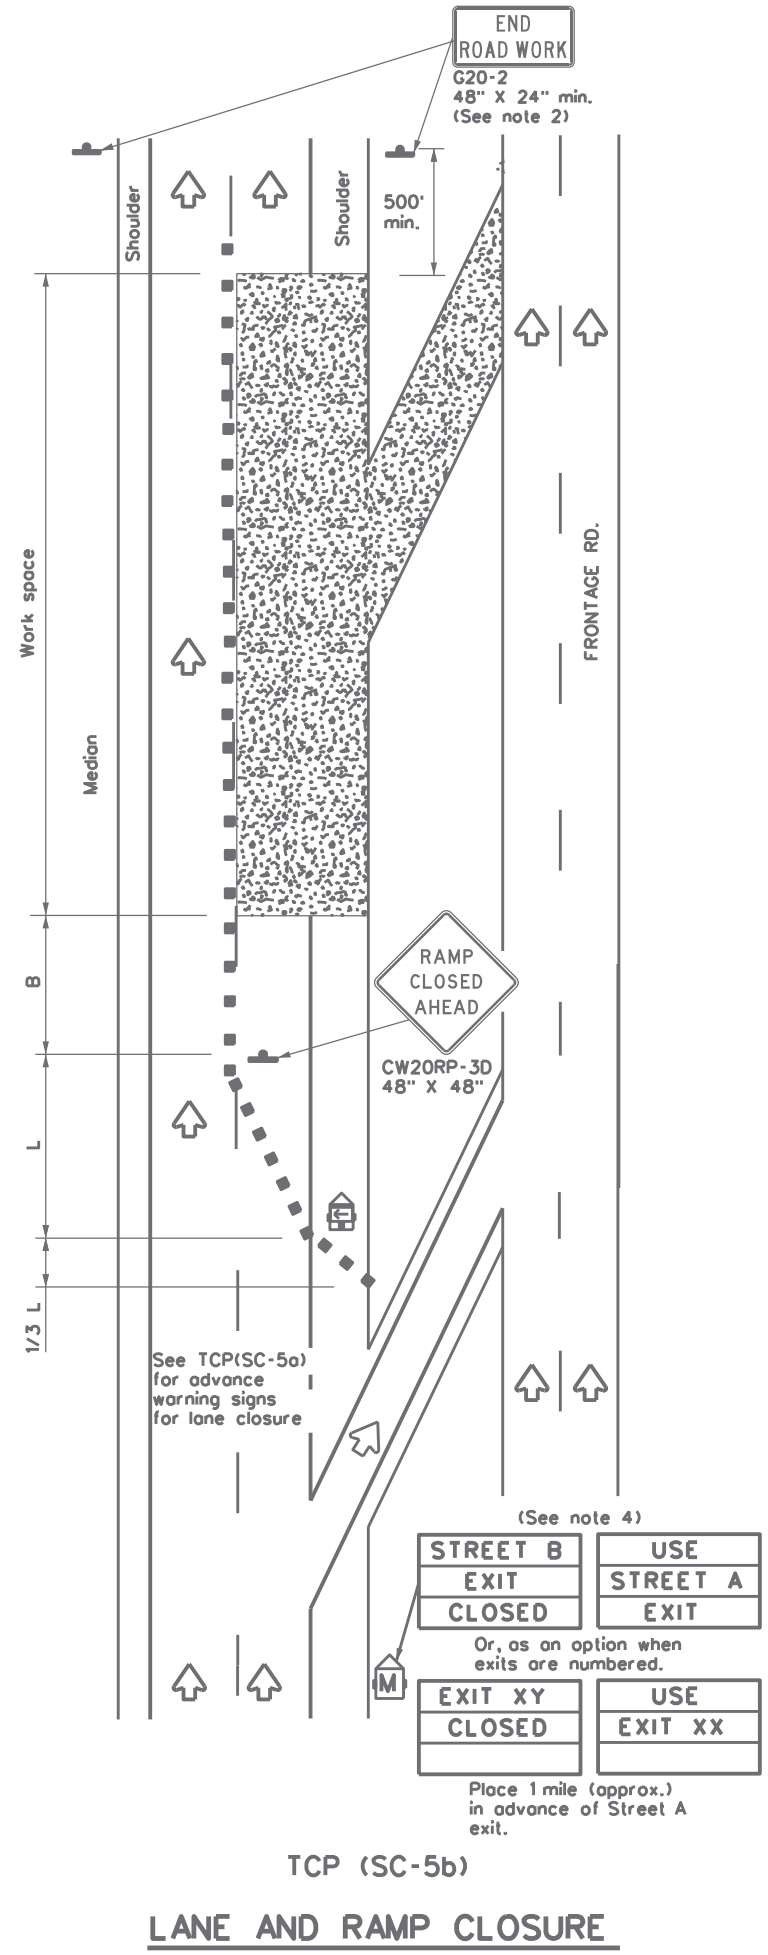

TCP (SC-5b)
LANE AND RAMP CLOSURE AT EXIT RAMP

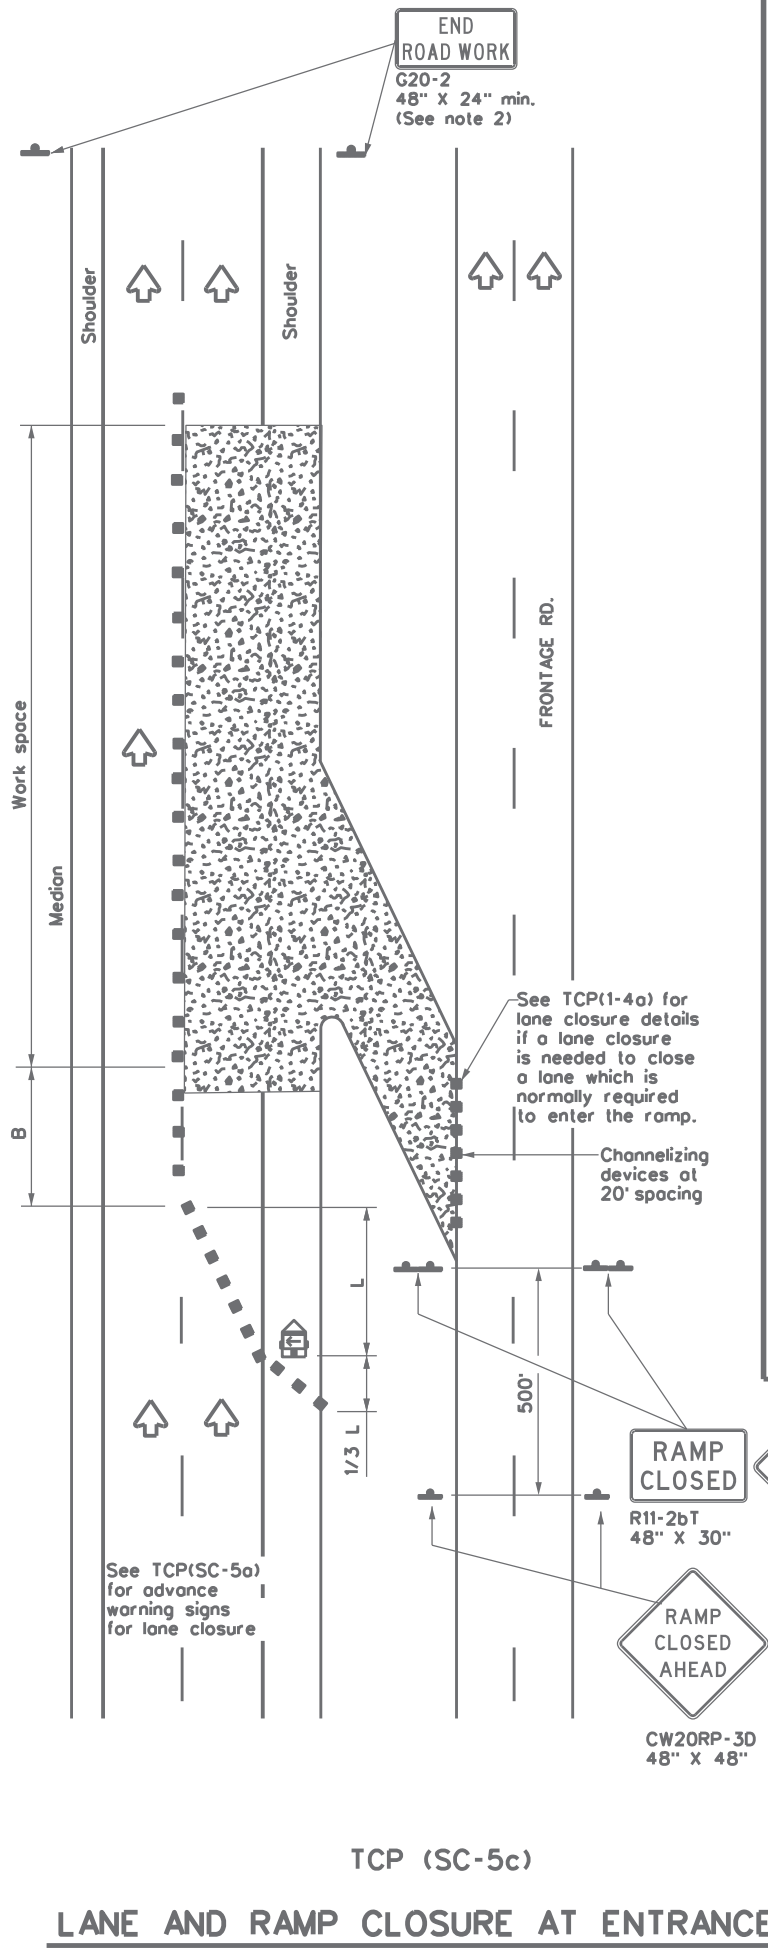

TCP (SC-5c)
LANE AND RAMP CLOSURE AT ENTRANCE RAMP

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Spacing "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L - WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

x Conventional Roads Only
 xx Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓		

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except:
 - If project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - USE NEXT RAMP (CW25-1T) sign is optional with approval by the Engineer.
 - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
 - The PCMS may be omitted if: it is replaced with a RAMP CLOSED AHEAD (CW20RP-3D) sign or when a permanent Dynamic Message Sign (DMS) is available in the appropriate location to display a similar message as called for on the PCMS.
 - Temporary rumble strips are not required on seal coat operations.

SHEET 5 OF 8


Texas Department of Transportation
 Traffic Safety Division Standard

**TRAFFIC CONTROL PLAN
 SEAL COAT OPERATIONS
 DIVIDED HIGHWAYS**


TCP(SC-5)-22

FILE: tcpsc-5-22.dgn	DN:	CK:	DW:	CK:
© TxDOT October 2022	CONT: 6470	SECT: 27	JOB: 001	HIGHWAY: US277, etc.
4-21 10-22	DIST: 22	COUNTY: MAVERICK, etc.	SHEET NO.: 55	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

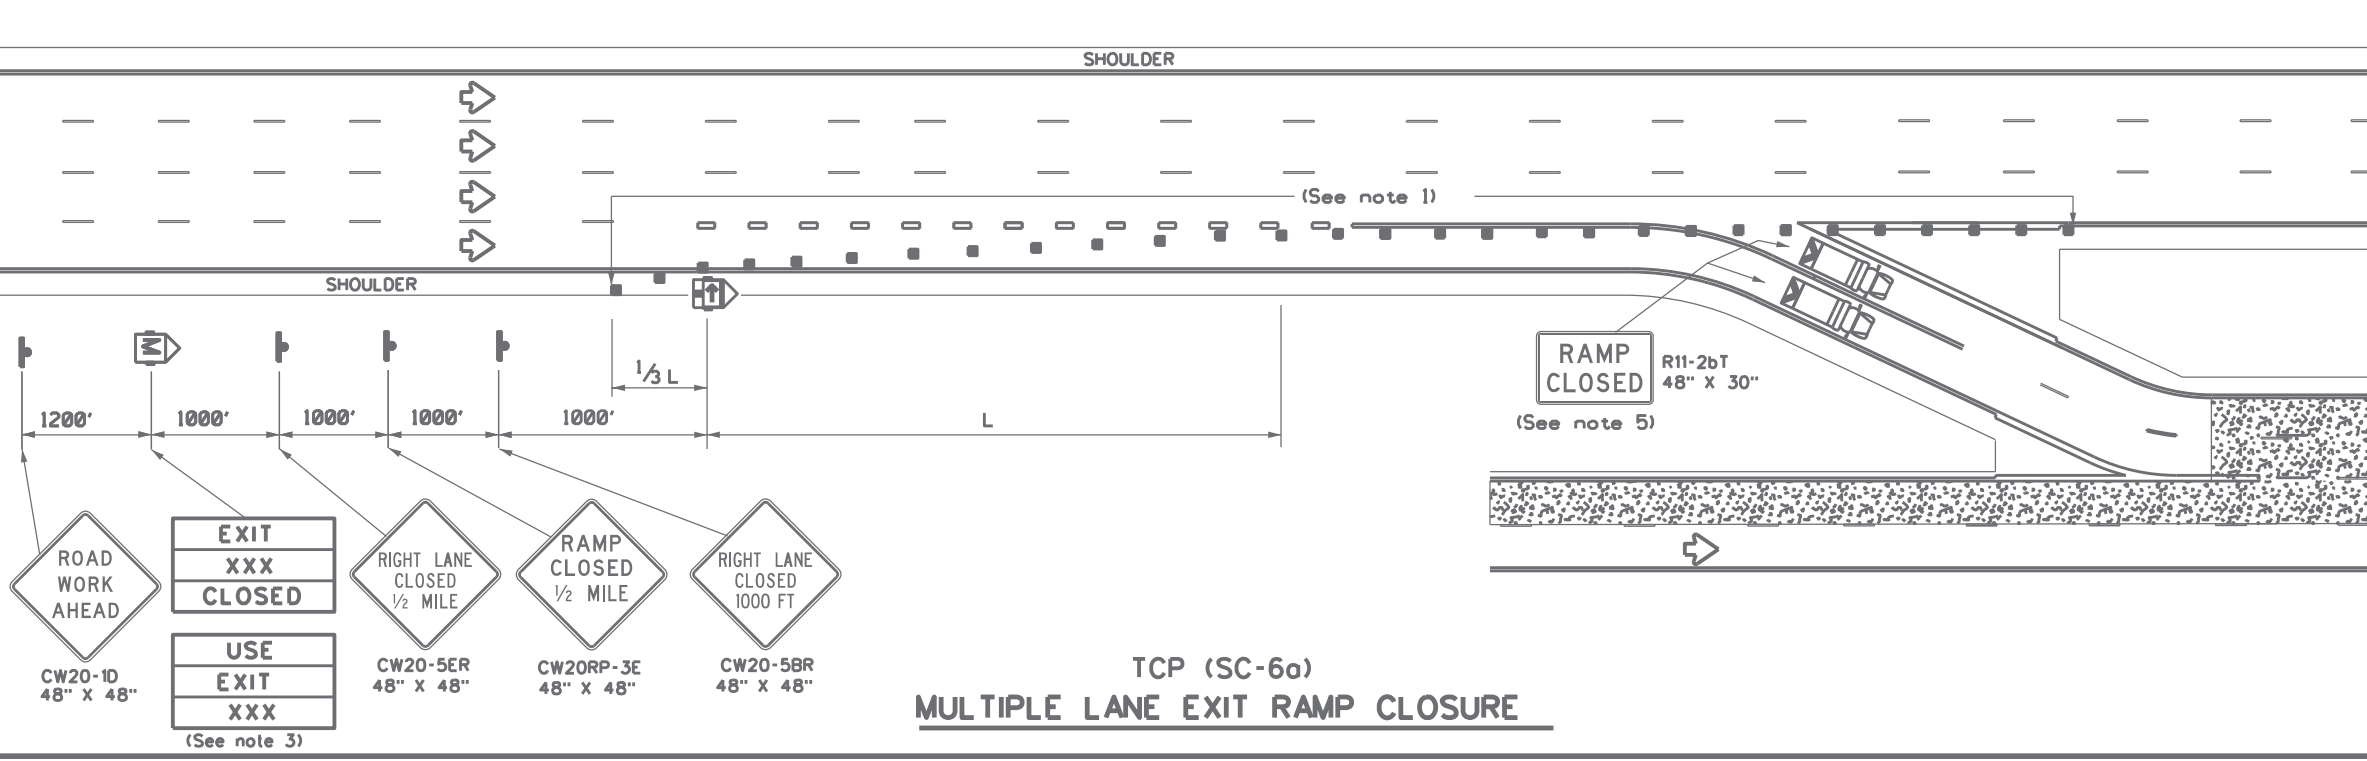

**TCP (SC-6a)
MULTIPLE LANE EXIT RAMP CLOSURE**

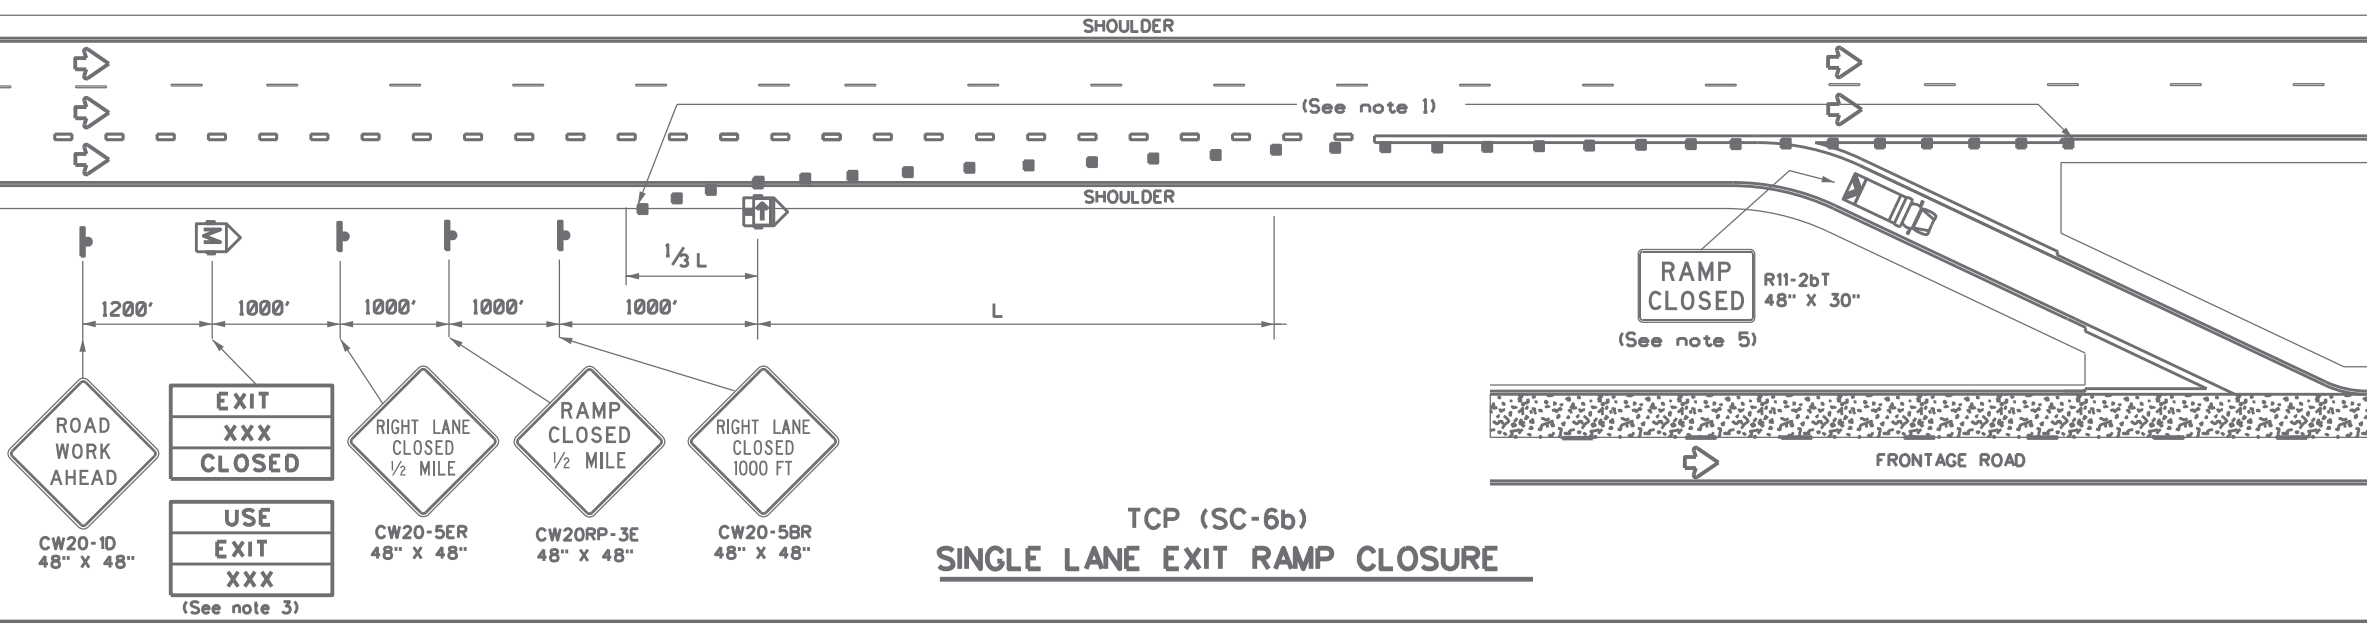

**TCP (SC-6b)
SINGLE LANE EXIT RAMP CLOSURE**

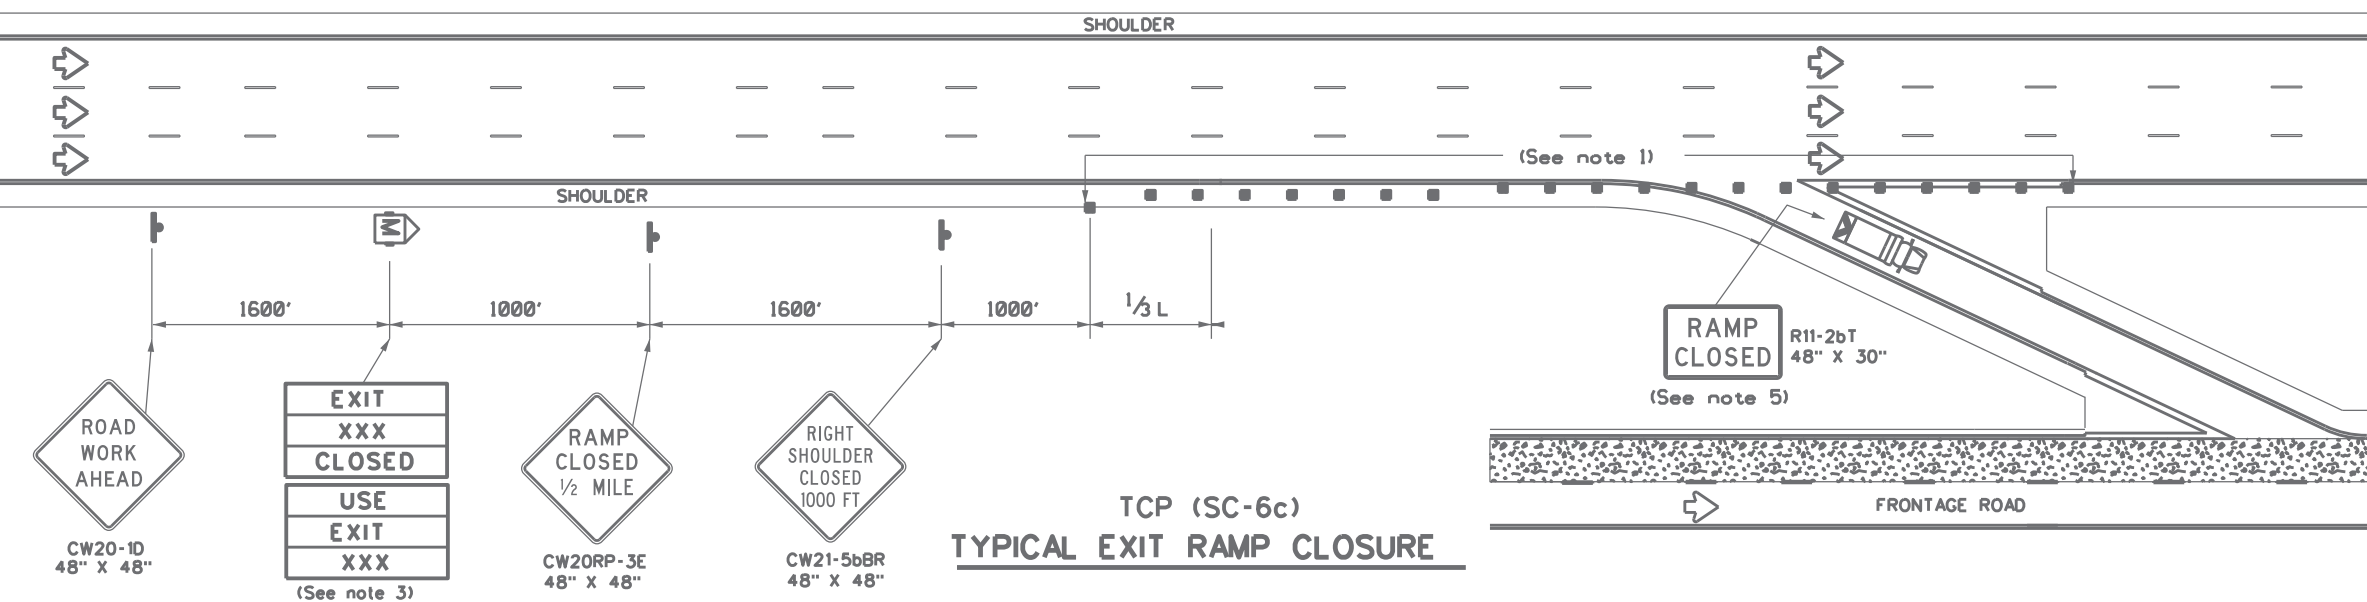

**TCP (SC-6c)
TYPICAL EXIT RAMP CLOSURE**

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'
85		850'	935'	1020'	85'	170'	695'

** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		


- GENERAL NOTES**
- Place channelizing devices at 20' spacings. Tighter spacing allowed as necessary to address field conditions or observed driver behavior.
 - See the Standard Highway Sign Design for Texas (SHSD) for sign details.
 - The PCMS may be omitted if replaced with a RAMP CLOSED AHEAD (CW20RP-3D) sign or when a permanent Dynamic Message Sign (DMS) is available in an appropriate location to display a similar message as called for on the PCMS.
 - When it is determined that a through lane should be closed in addition to the exit ramp, refer to TCP(6-4) for traffic control details.
 - A Truck Mounted Attenuator (TMA), where shown, is REQUIRED and shall have a RAMP CLOSED (R11-2bT) sign mounted on the rear of the truck.

**TRAFFIC CONTROL PLAN
SEAL COAT OPERATIONS
DIVIDED HIGHWAYS**


TCP(SC-6)-22

FILE: tcpsc-6-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
10-22	6470	27	001	US277, etc.
REVISIONS	DIST	COUNTY	SHEET NO.	
	22	MAVERICK, etc.	56	


WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS (TABS)

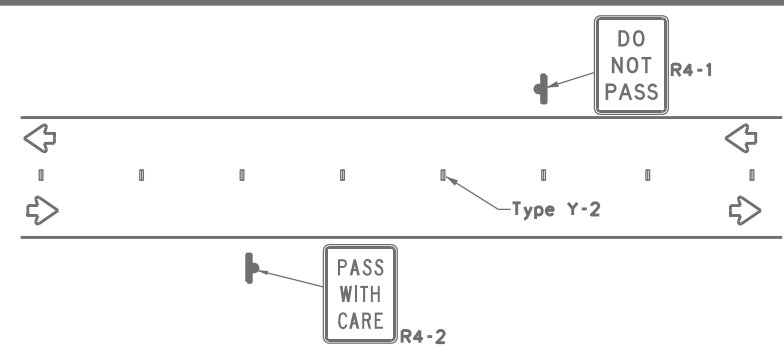


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO LANE TWO-WAY HIGHWAYS

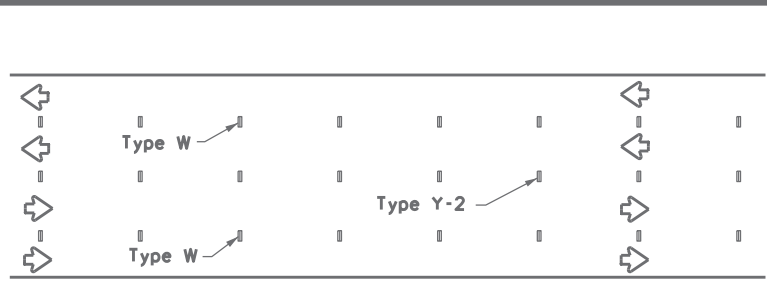

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

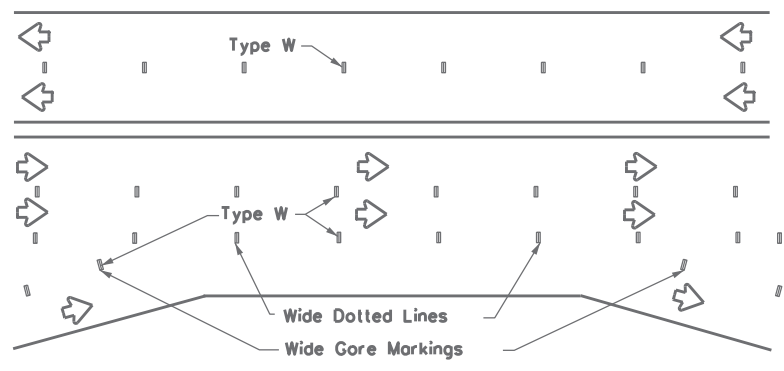


LANE LINES FOR DIVIDED HIGHWAY

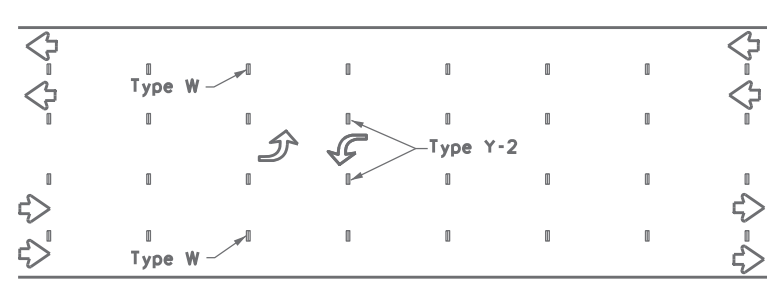

TWO-WAY LEFT TURN LANE

TABS ON CENTERLINES OF TWO-LANE TWO-WAY ROADS

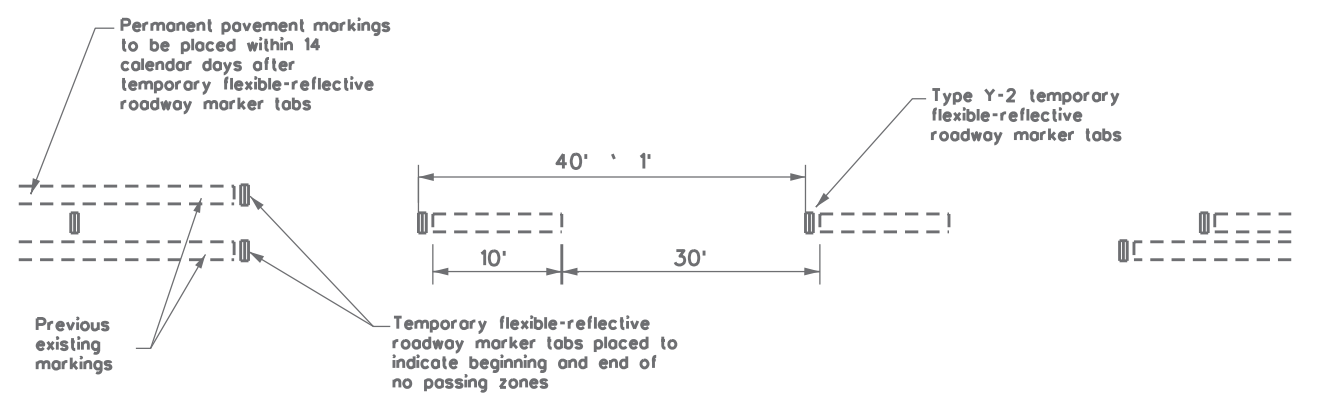

TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS

1. Temporary markings for surfacing projects shall be Temporary Flexible-Reflective Roadway Marker Tabs with protective cover unless otherwise approved by the Engineer. Tabs are to be installed to provide true alignment for striping crews or as directed by the Engineer. Tabs will be placed at the spacing indicated. Tabs should be applied to the pavement no more than two days before the surfacing is applied. After the surfacing is rolled and swept, the protective cover over the reflective strip shall be removed.
2. Temporary Flexible-Reflective Roadway Marker Tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with a yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
3. Temporary Flexible-Reflective Roadway Marker Tabs will require normal maintenance replacement when used on roadways with an Average Daily Traffic (ADT) per lane of up to 7500 vehicles with no more than 10% truck mix. When roadway volumes exceed these values, additional maintenance replacement of these devices should be planned for.
4. When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
5. No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 4.
6. Tabs shall meet requirements of Departmental Material Specification DMS-8242.
7. Tabs shall NOT be used to simulate edge lines.

NOTES:

1. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
2. For exit gores where a lane is being dropped, place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are NOT acceptable.
3. Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)


1. DMSs referenced above may be found along with embedded links to their respective MPLs at the following website: <http://www.txdot.gov>

SHEET 7 OF 8

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS (TABS)

SOLID LINES	DOUBLE NO-PASSING LINE	
	SINGLE NO-PASSING LINE or CHANNELIZATION LINE	
	8" WIDE SOLID LINE	
	BROKEN LINES (FOR CENTER LINE OR LANE LINE)	
	WIDE DOTTED LINES (FOR LANE DROP LINES)	
	WIDE GORE MARKINGS	

TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS

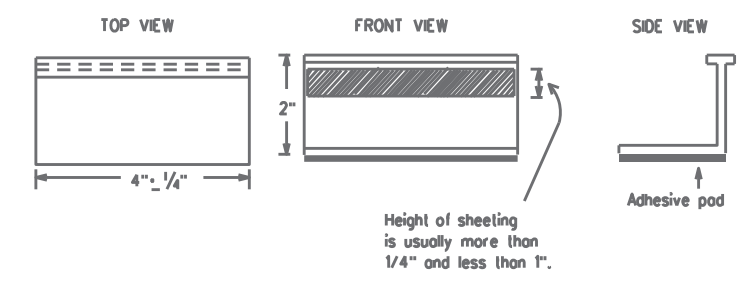


TEMPORARY PAVEMENT MARKINGS FOR SEAL COAT OPERATIONS
TCP(SC-7)-22

FILE: tcpsc-7-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-21	DIST	COUNTY	SHEET NO.	
10-22	22	MAVERICK, etc.	57	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024
 FILE: T:\LRDD\STMT\FY_2024\MNT\Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-7 of 22.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:57 PM
 FILE: I:\LRDD5TMMT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\tcpsc-8-22.dgn

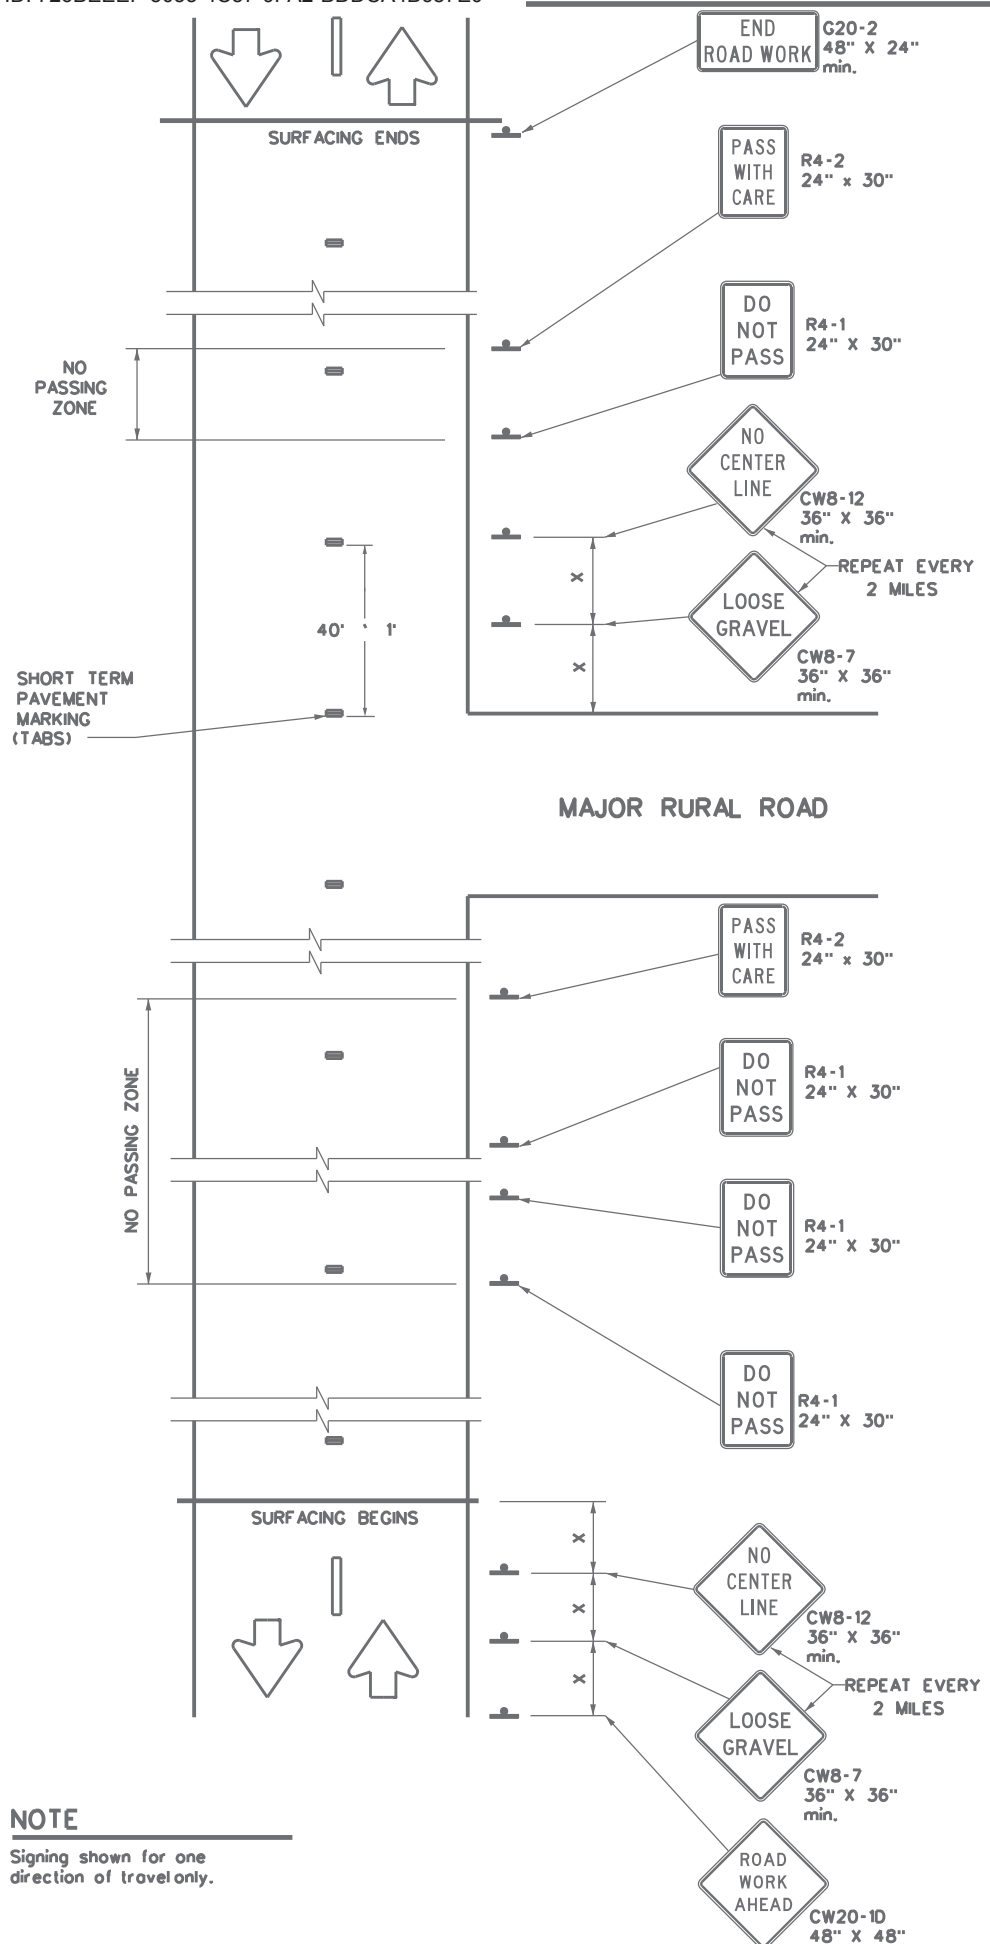

NOTE
 Signing shown for one direction of travel only.

NO PASSING ZONES ON TWO-LANE TWO-WAY ROADS

DO NOT PASS (R4-1) SIGN and NO-PASSING ZONES

- A. Prior to the beginning of construction, all currently striped no-passing zones shall be signed with the DO NOT PASS (R4-1) signs and PASS WITH CARE (R4-2) signs placed at the beginning and end of each zone for each direction of travel, except as otherwise provided herein. Signs marking these individual no-passing zones need not be covered prior to construction if the signs supplement the existing pavement markings.
- B. At the discretion of the Engineer, in areas of numerous no-passing zones, several zones may be combined as a single zone. If passing is to be prohibited over one or more lengthy sections, a DO NOT PASS sign and a NEXT XX MILES (R20-1TP) plaque may be used at the beginning of such zones. The DO NOT PASS sign and the NEXT XX MILES plaque should be repeated every mile to the end of the no-passing zone. In areas where there is a considerable distance between no-passing zones, the end of the no-passing zone may be signed with a PASS WITH CARE sign and a NEXT XX MILES plaque.
- C. Depending on traffic volumes and length of sections, it may be desirable to prohibit passing throughout the project to prevent damage to windshields and lights. The DO NOT PASS sign and NEXT XX MILES plaque should be used and repeated as often as necessary for this purpose. Where several existing zones are to be combined into one individual no-passing zone, the sign at the beginning of the zone should be covered until the surfacing operation has passed this location so as not to have the DO NOT PASS sign conflict with the existing pavement markings. Also, unless one day of operation completes the entire length of such combined zones, appropriate DO NOT PASS and PASS WITH CARE signs should be placed at the beginning and end of the no-passing zones where the surfacing operation has stopped for the day.
- D. DO NOT PASS and PASS WITH CARE signs are to remain in place until permanent pavement markings are installed.

NO CENTER LINE (CW8-12) SIGN

- A. Center line markings are yellow pavement markings that delineate the separation between lanes that have opposite directions of travel on a roadway. Divided highways do not typically have center line markings.
- B. At the time construction activity obliterates the existing center line markings (low volume roads may not have an existing center line), a NO CENTER LINE (CW8-12) sign should be erected at the beginning of the work area, at approximately two mile intervals within the work area, beyond major intersections, and other locations deemed necessary by the Engineer.
- C. The NO CENTER LINE signs are to remain in place until permanent pavement markings are installed.

LOOSE GRAVEL (CW8-7) SIGN

- A. When construction begins, a LOOSE GRAVEL (CW8-7) sign should be erected at each end of the work area and repeated at intervals of approximately two miles in rural areas and closer in urban areas.
- B. The LOOSE GRAVEL signs are to remain in place until the condition no longer exists.

COORDINATION OF SIGN LOCATIONS

- A. The location of warning signs at the beginning and end of a work area are to be coordinated with other signing typically shown on the Barricade and Construction Standards for project limits to ensure adequate sign spacing.
- B. Where possible, the ROAD WORK AHEAD (CW20-1D), LOOSE GRAVEL (CW8-7), and NO CENTER LINE (CW8-12) signs should be placed:
 - a.) In the sequence shown following the OBEY WARNING SIGNS STATE LAW (R20-3T) sign and the TRAFFIC FINES DOUBLE (R20-5T) sign; and
 - b.) One "X" sign spacing prior to the CONTRACTOR (G20-6T) sign typically located at or near the limits of surfacing.
 LOOSE GRAVEL and NO CENTER LINE sign placements will then be repeated as described above.

Posted Speed *	Minimum Sign Spacing Distance "X"
30	120'
35	160'
40	240'
45	320'
50	400'
55	500'
60	600'
65	700'
70	800'
75	900'

* Conventional Roads Only

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

GENERAL NOTES

1. Surfacing operations that cover or obliterate existing pavement markings must first have the passing zones clearly marked with tabs as well as having any of the traffic control devices detailed on this sheet furnished and erected as directed by the Engineer.
2. The devices shown on this sheet are to be used to supplement those required by the BC Standards or others required elsewhere in the plans.
3. Signs shall be erected as detailed on the BC Standards or the Compliant Work Zone Traffic Control Devices List (CWZTCD) on supports approved for Short Duration / Short Term Stationary Work Zone Sign Supports.
4. When surfacing operations take place on divided highways, freeways or expressways, the size of diamond shaped construction warning signs shall be 48" x 48".
5. Signs on divided highways, freeways and expressways should be placed on both right and left sides of the roadway based on roadway conditions as directed by the Engineer.



SHEET 8 OF 8



**TRAFFIC CONTROL DETAILS
 FOR
 SEAL COAT OPERATIONS
 TCP(SC-8)-22**

FILE: tcpsc-8-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-21	DIST	COUNTY	SHEET NO.	
10-22	22	MAVERICK, etc.	58	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/21/2024 5:01:58 PM
 FILE: T:\LRDDST\TMT\FY_2024\MNT\Contract (FY24)\Seal Coat\CAD Standards\ts2-1-23.dgn

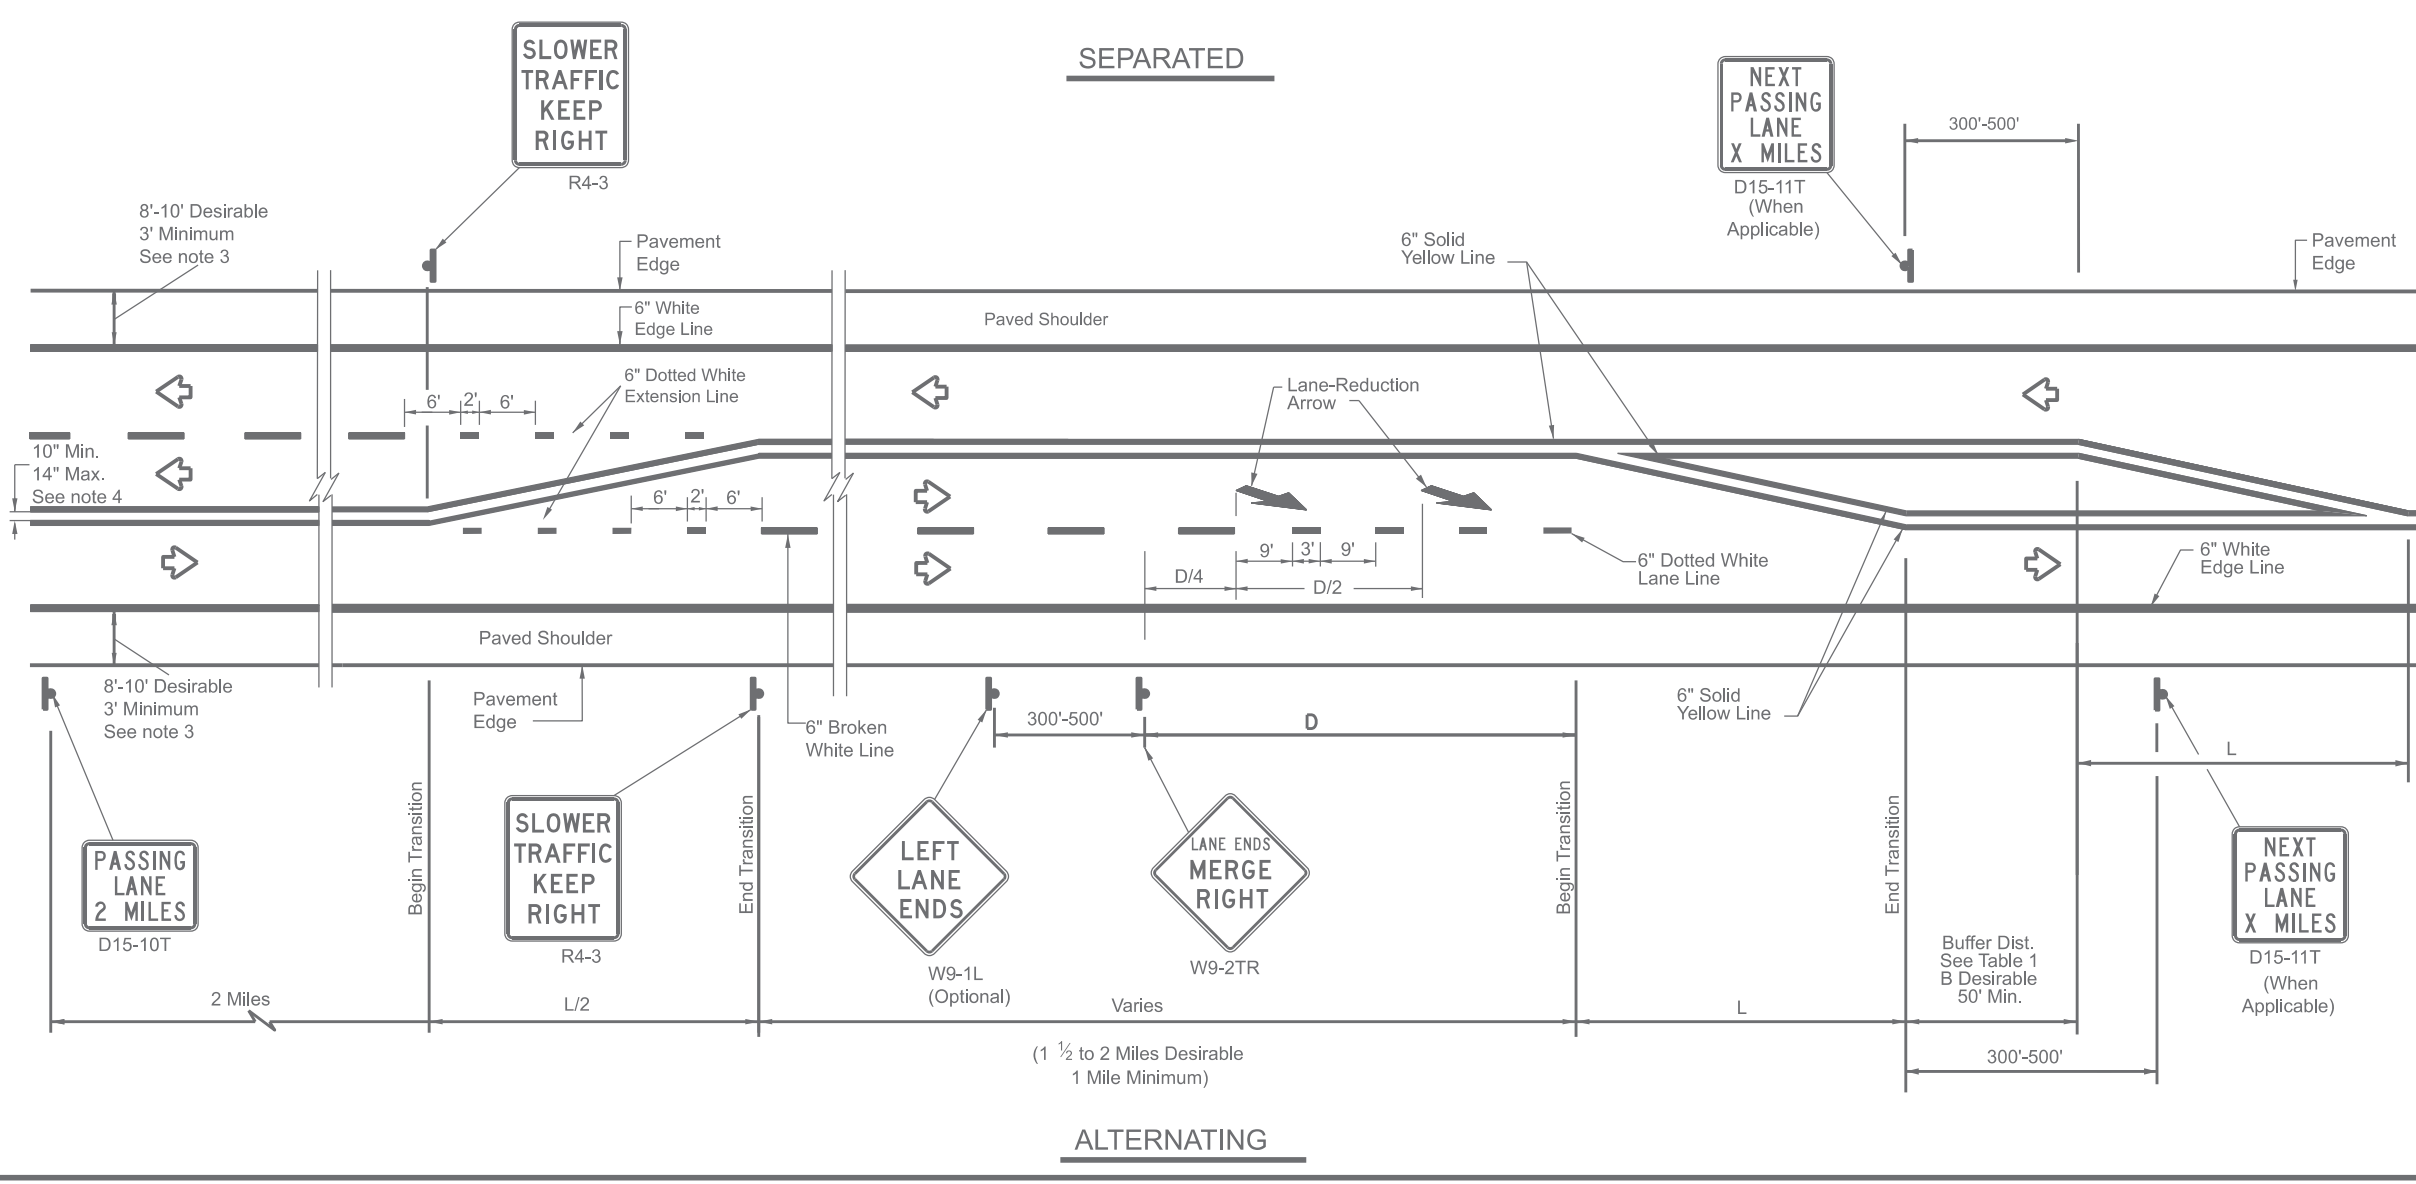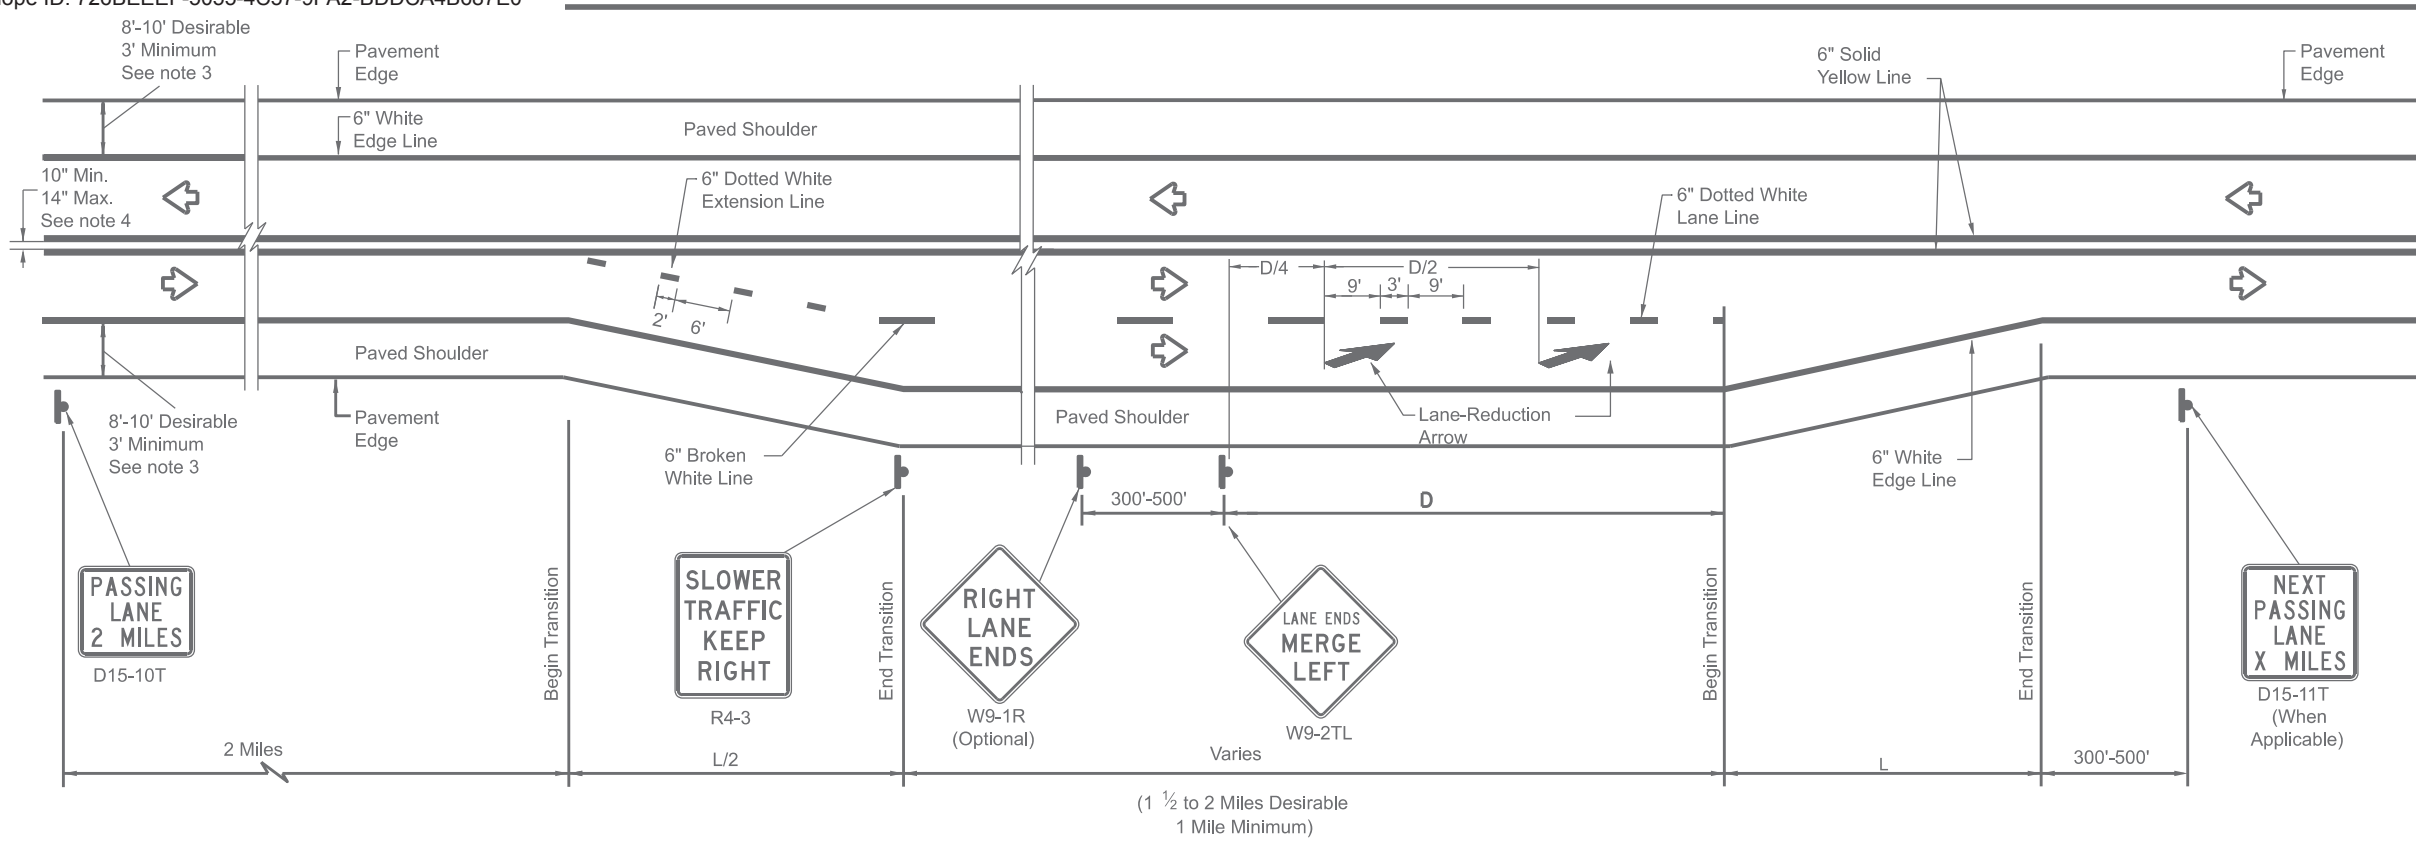

LEGEND	
	Sign
	Traffic Flow

TYPICAL TAPER LENGTH (L)	
Formula	$L = WS$

* Transition length should be rounded up to nearest 5 foot increment.

L=Length of Transition (FT)
 W=Width of Offset (FT)
 S=Posted Speed (MPH)

EXAMPLE
 A 12 foot lane is added on a 70 mph roadway.
 The length of the transition should be:
 $L = 12 \times 70 = 840$ ft

TABLE 1 ADVANCE WARNING SIGN DISTANCE (D) AND BUFFER DISTANCE (B)		
Posted Speed	D (FT)	B (FT)
40	670	305
45	775	360
50	885	425
55	990	495
60	1100	570
65	1200	645
70	1250	730
75	1350	820

GENERAL NOTES

- For minimum and desirable design details, see the Roadway Design Manual, Chapter 4, Section 6, Super 2 Highways.
- For Raised Pavement Markers (RPM) details, see Pavement Markings Standard sheet, PM(2) - Centerline for All Two Lane Two-Way Roadways. Note that RPMs are not recommended on the 6" dotted white extension lines.
- For rumble strip options available for the designed shoulder width, see Rumble Strip Standard sheet RS(2).
- For pavement marking details, see Pavement Marking Standard sheet PM(1).




**TEXAS SUPER 2
PASSING LANES**

TS2(PL-1)-23

FILE: ts2-1-23.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
5-10 3-18	DIST	COUNTY	SHEET NO.	
2-12 2-23	22	MAVERICK, etc.	59	
3-12				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:58 PM
 FILE: T:\LRDDSTMT\NT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\Standards\ts2-2-23.dgn

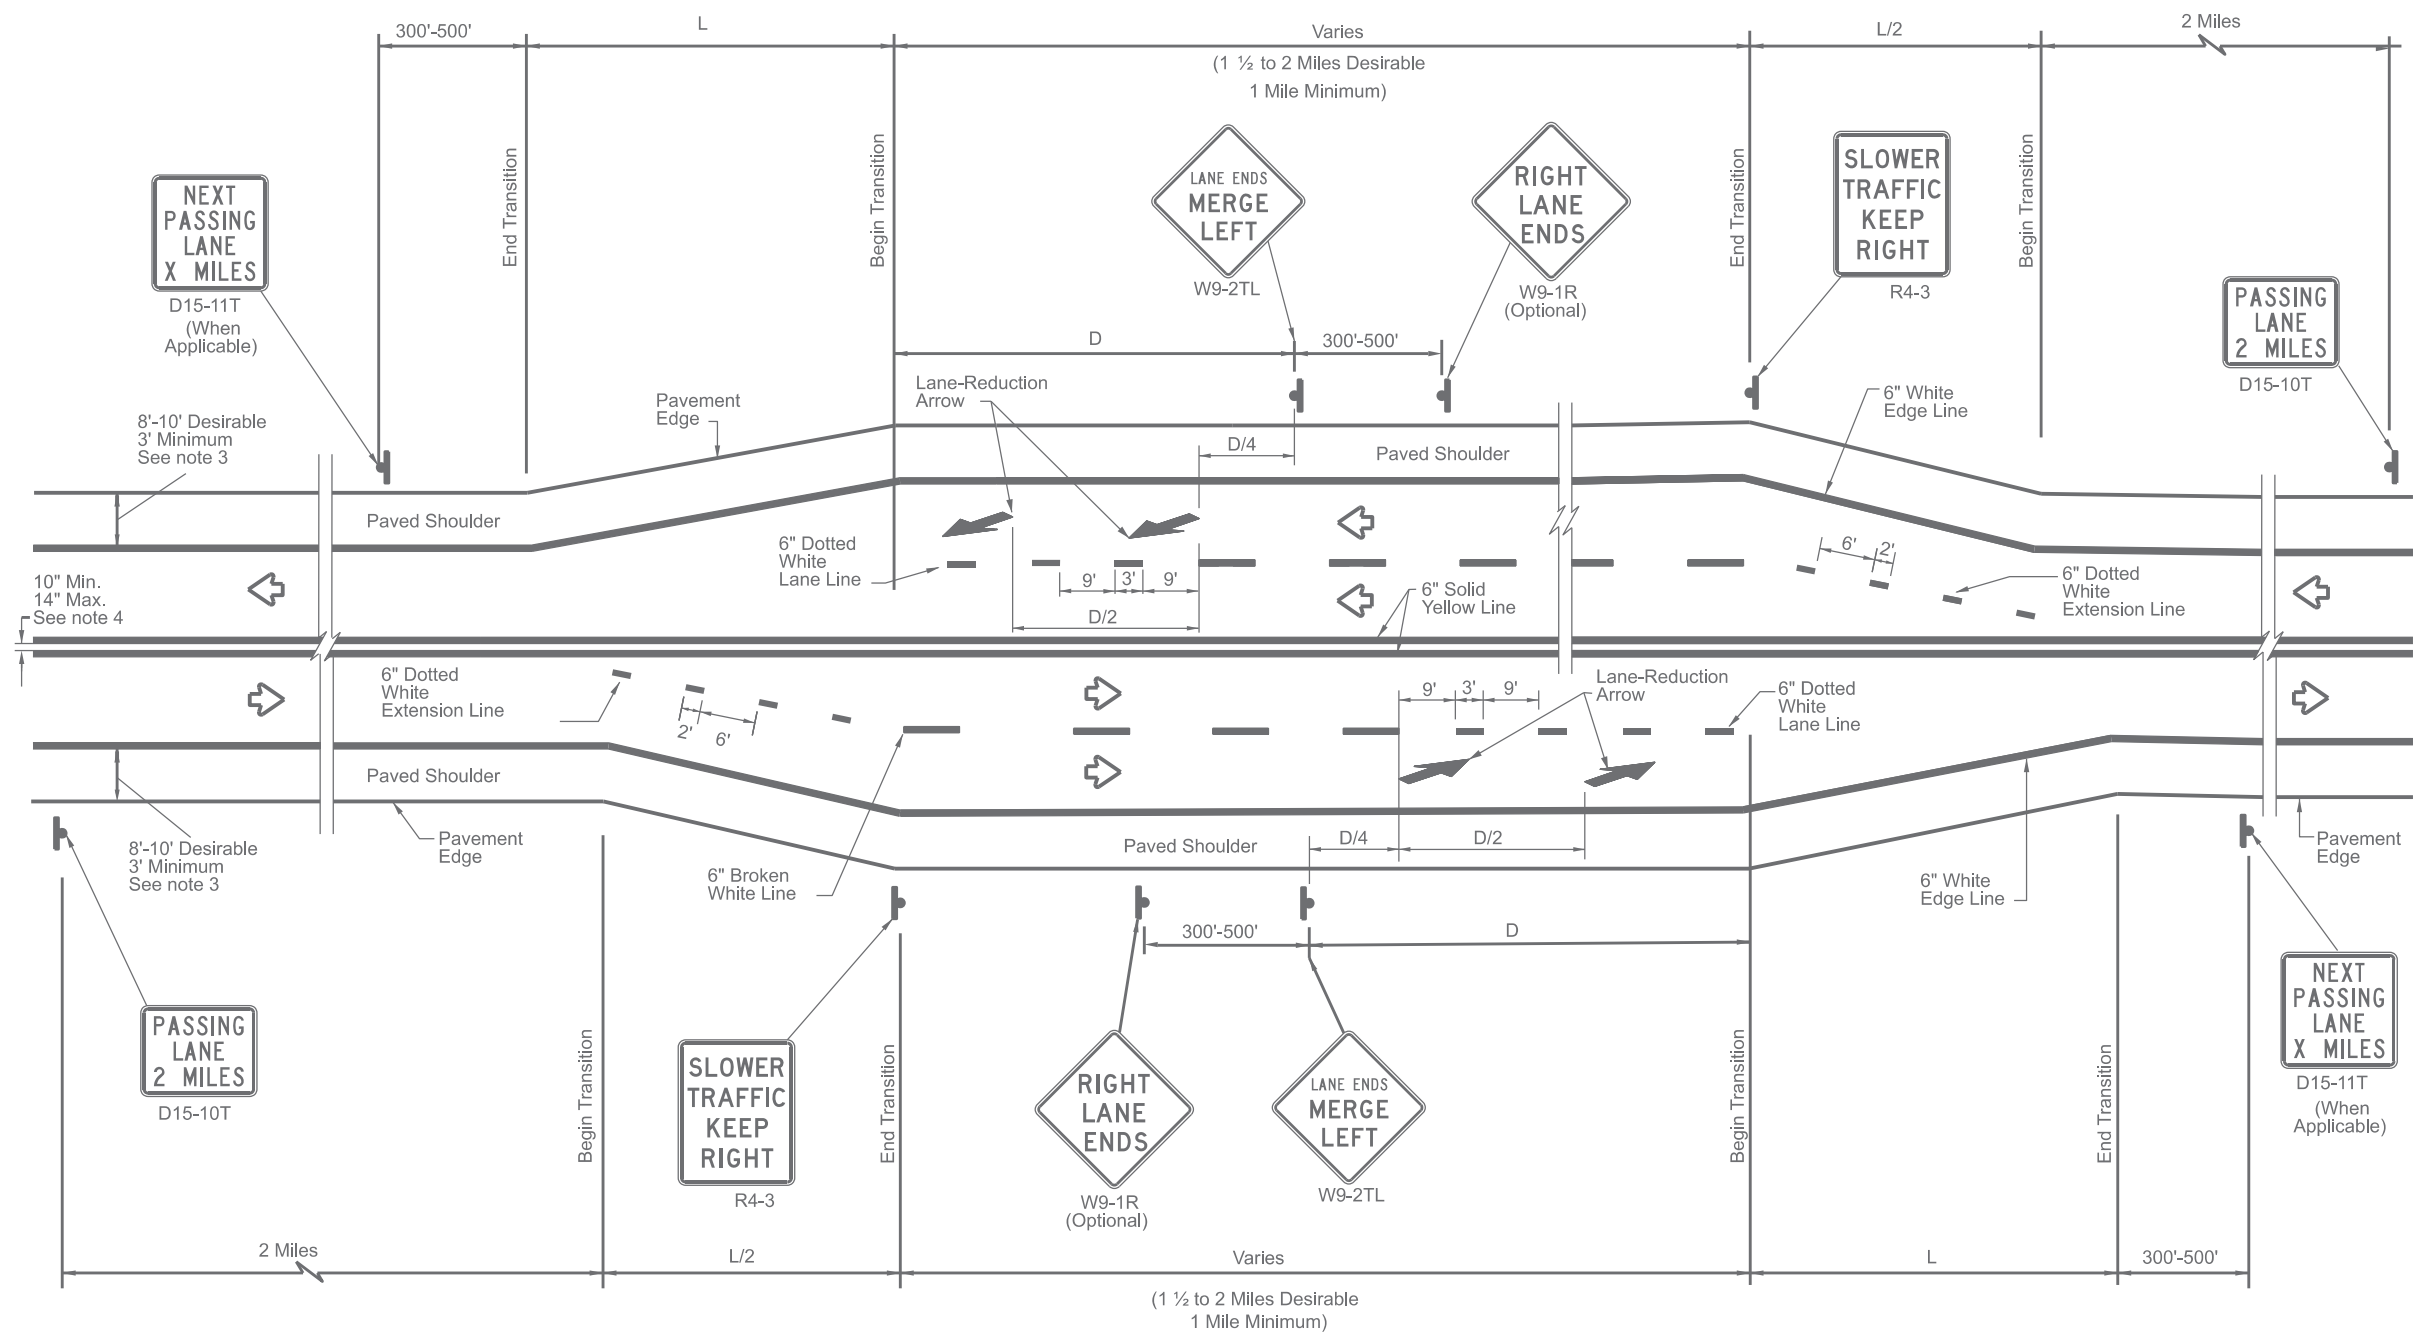

SIDE BY SIDE PASSING LANES

LEGEND	
	Sign
	Traffic Flow

TYPICAL TAPER LENGTH (L)	
Formula *	$L = WS$

* Transition length should be rounded up to nearest 5 foot increment.

L=Length of Transition (FT)
 W=Width of Offset (FT)
 S=Posted Speed (MPH)

EXAMPLE
 A 12 foot lane is added on a 70 mph roadway.
 The length of the transition should be:
 $L=12 \times 70=840$ ft

TABLE 1 ADVANCE WARNING SIGN DISTANCE (D)	
Posted Speed	D (FT)
40	670
45	775
50	885
55	990
60	1100
65	1200
70	1250
75	1350

GENERAL NOTES

- For minimum and desirable design details, see the Roadway Design Manual, Chapter 4, Section 6, Super 2 Highways.
- For Raised Pavement Markers (RPM) details, see Pavement Markings Standard sheet, PM(2) - Centerline for All Two Lane Two-Way Roadways. Note that RPMs are not recommended on the 6" dotted white extension lines.
- For rumble strip options available for the designed shoulder width, see Rumble Strip Standard sheet RS(2).
- For pavement marking details, see Pavement Marking Standard sheet PM(1).




**TEXAS SUPER 2
PASSING LANES**

TS2(PL-2)-23

FILE: ts2-2-23.dgn	DN:	CK:	DW:	CK:
©TxDOT February 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
5-10 3-18	DIST	COUNTY	SHEET NO.	
2-12 2-23	22	MAVERICK, etc.	60	
3-12				

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

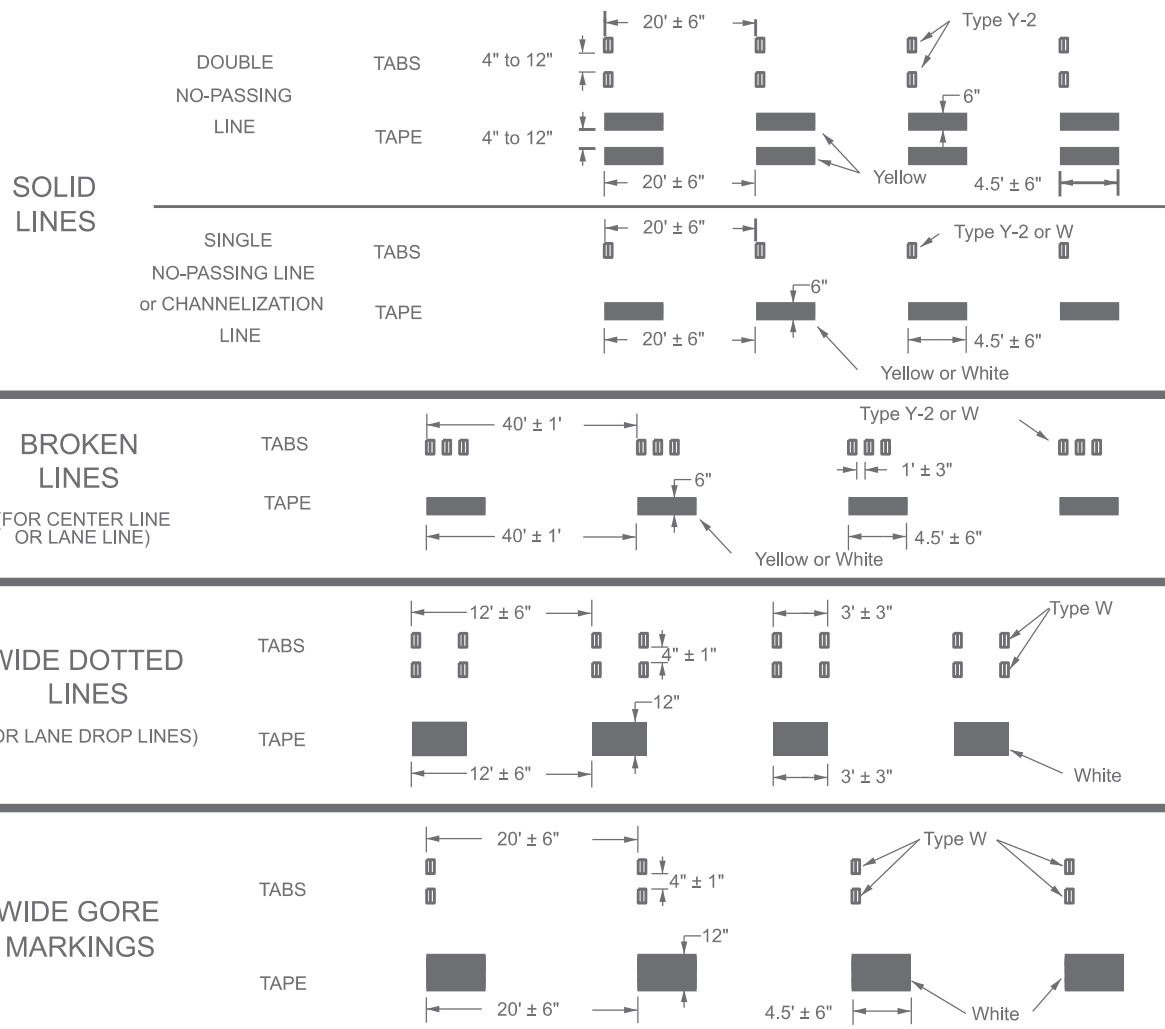


NOTES:

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

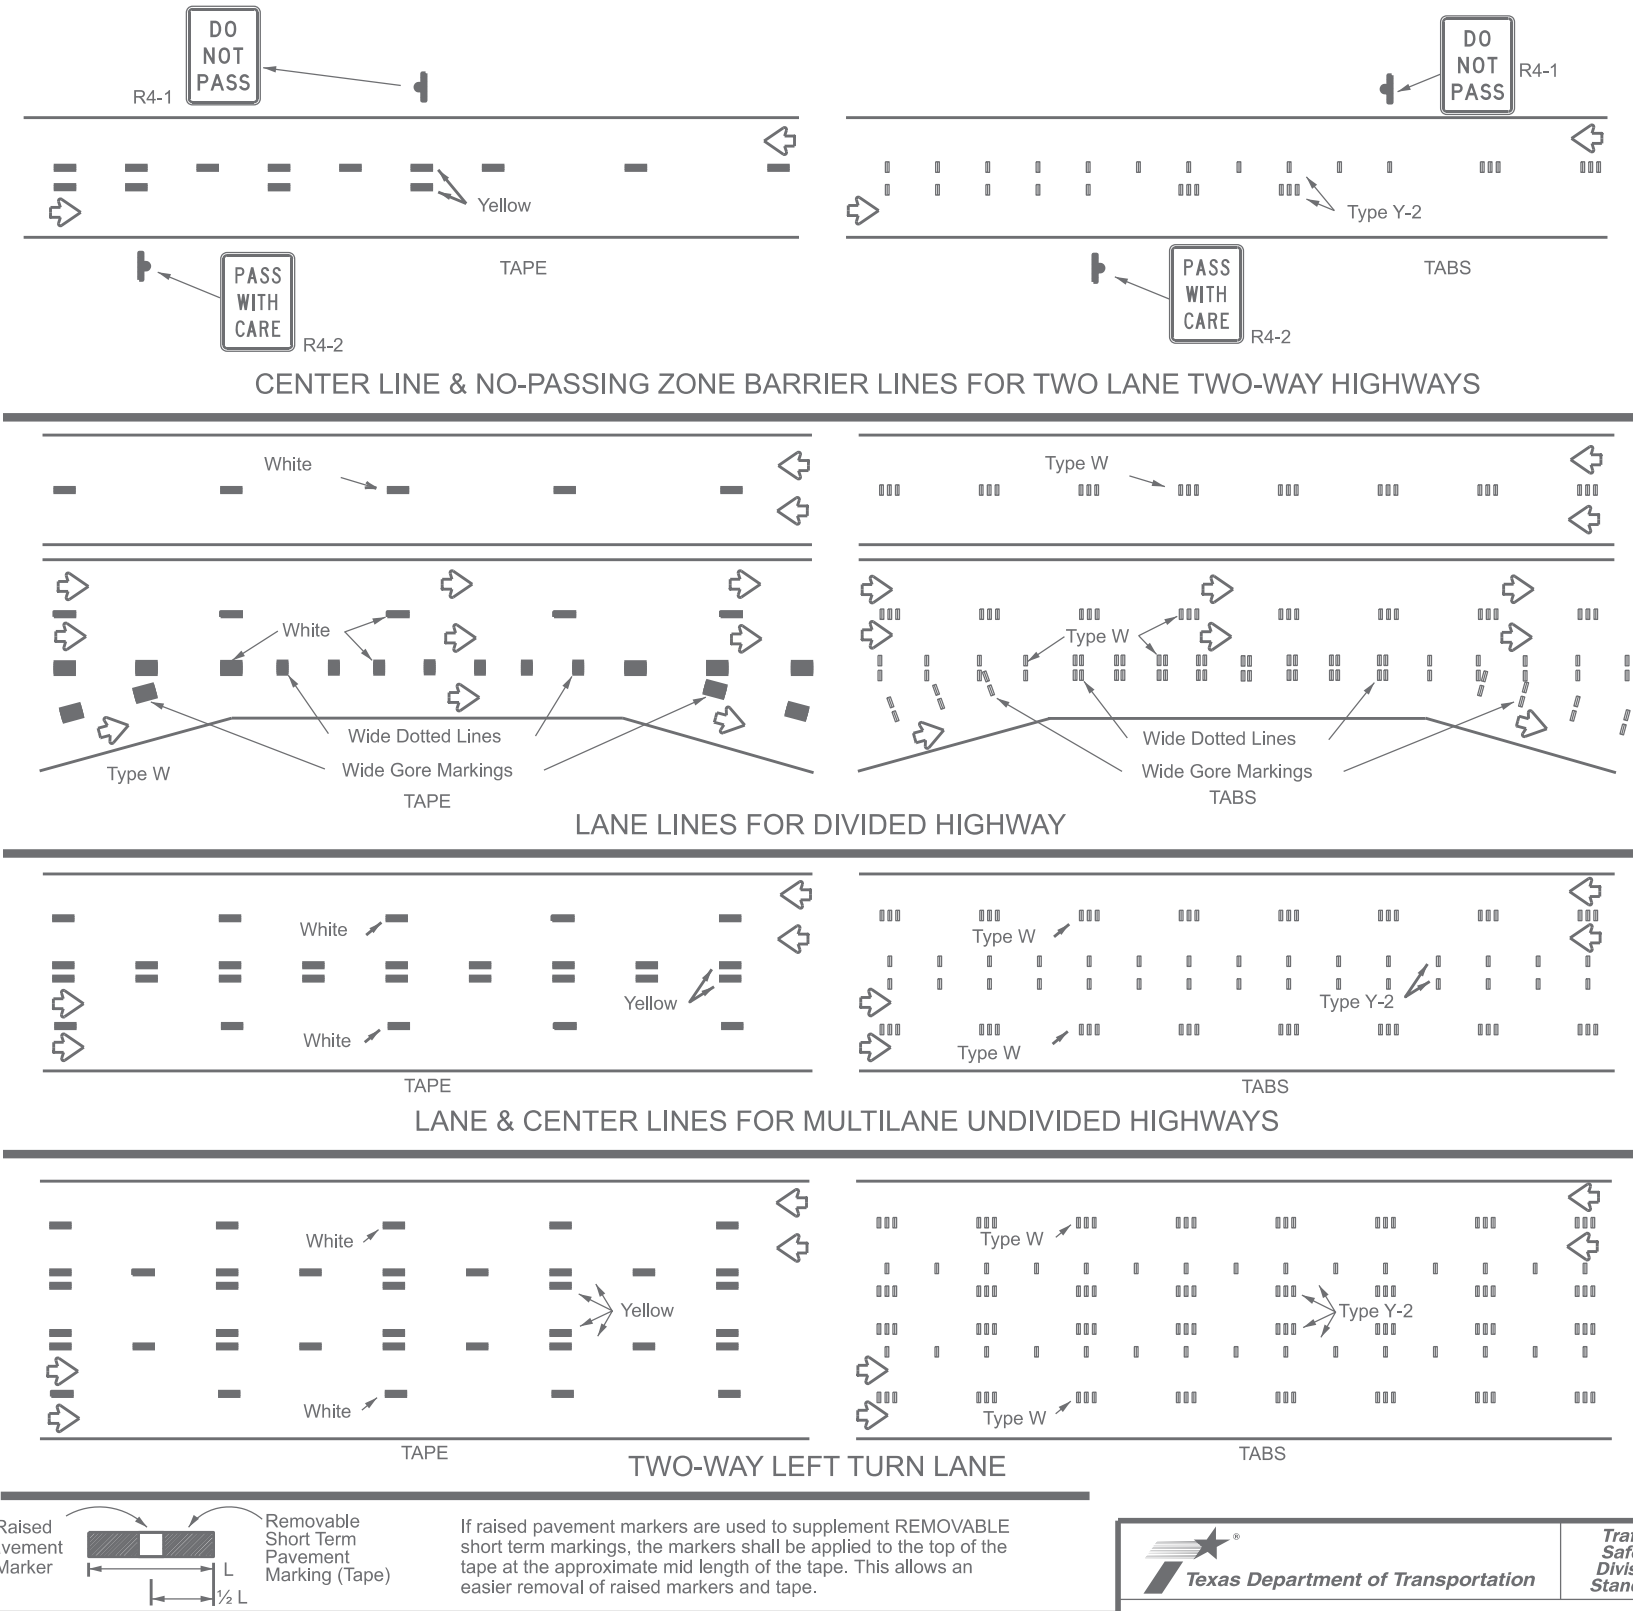

PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.

- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:

http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm



WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ(STPM)-23


FILE: wzsstpm-23.dgn	DW: []	CK: []	DW: []	CK: []
© TXDOT February 2023	CONT 6470	SECT 27	JOB 001	HIGHWAY US277, etc.
REVISIONS	4-92 7-13	1-97 2-23	DIST 22	COUNTY MAVERICK, etc.
3-03				SHEET NO. 61

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:59 PM
FILE: T:\RDS\TMTNT\FY 2024\MINT Contract (FY24)\Seal Coat\CAD\Standards\wz(stpm)-23.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:01:59 PM
 FILE: T:\RRDDST\MT\FY_2024\MNT Contract (FY24)\Seal Coat\CAD\Standards\wzbrk-13.dgn

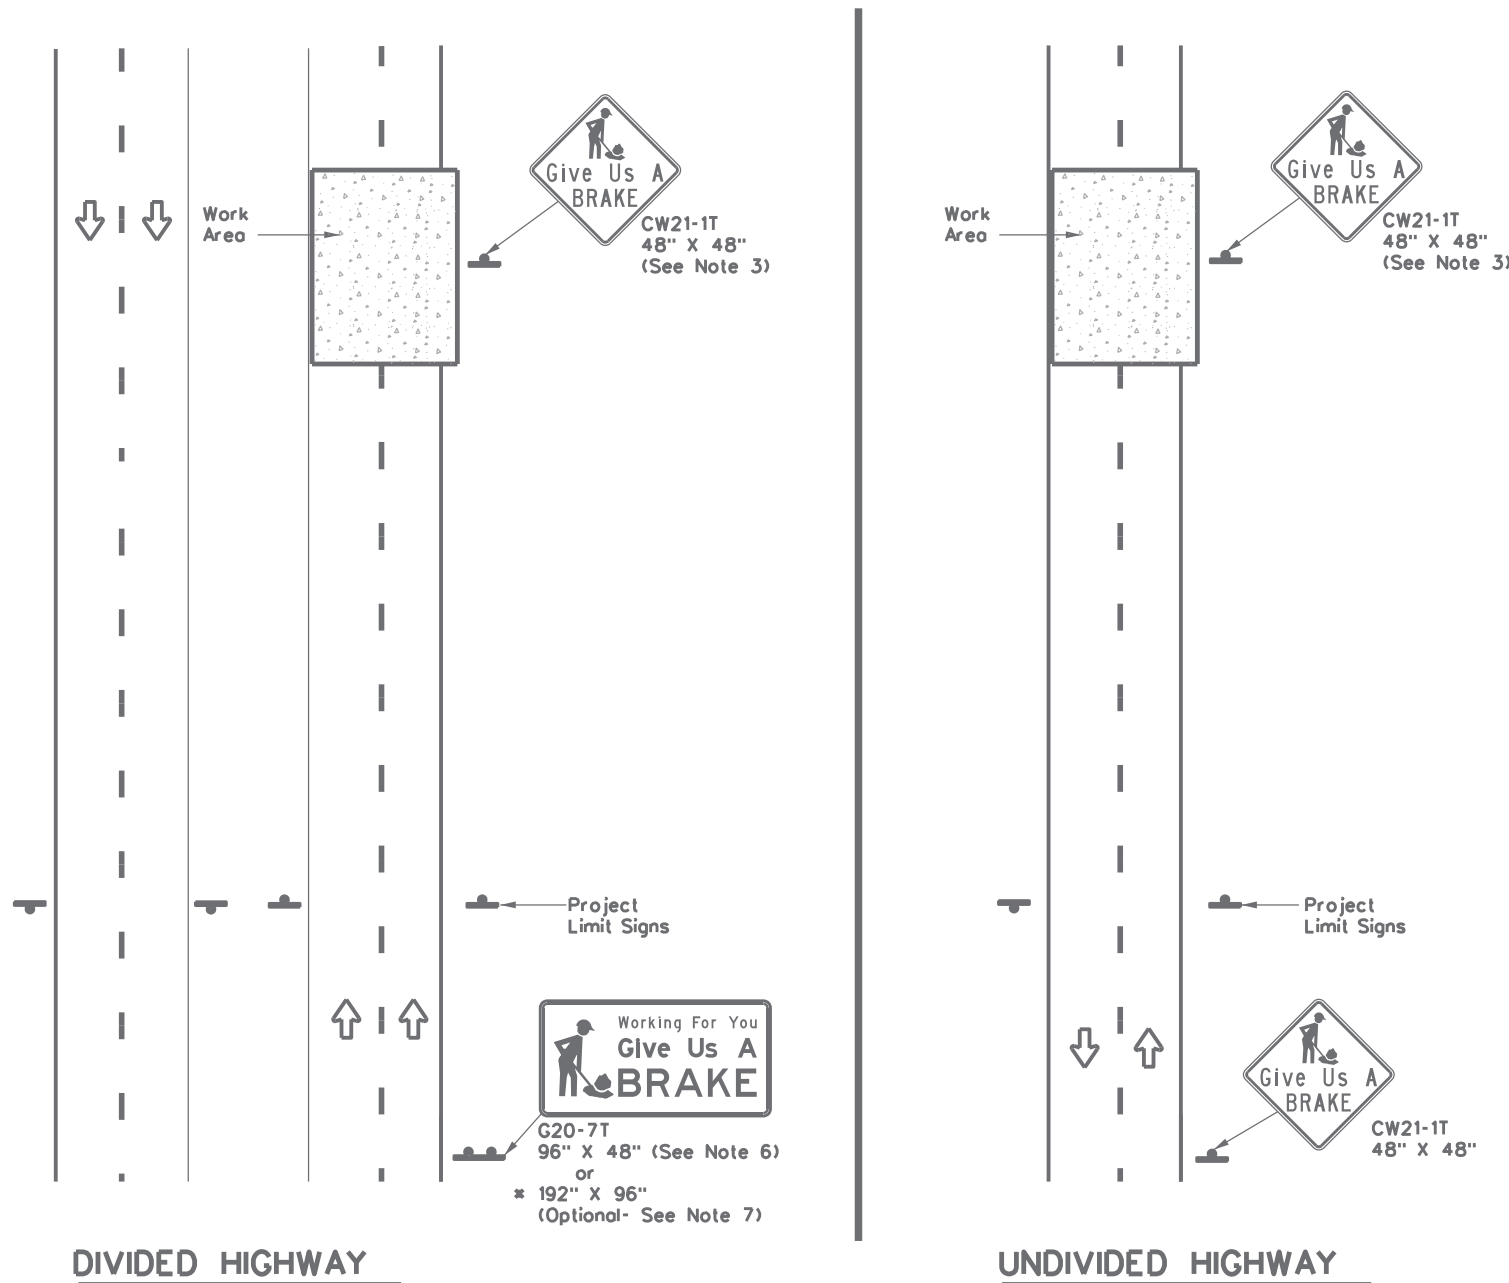

SIGNS ARE SHOWN FOR ONE DIRECTION OF TRAVEL

* When the optional larger WORKING FOR YOU GIVE US A BRAKE (G20-7T) 192" x 96" sign is required, the locations shall be noted elsewhere in the plans.

SUMMARY OF LARGE SIGNS

BACKGROUND COLOR	SIGN DESIGNATION	SIGN	SIGN DIMENSIONS	REFLECTIVE SHEETING	SO FT	GALVANIZED STRUCTURAL STEEL		DRILLED SHAFT
						Size	(LF)	
							① ②	24" DIA. (LF)
Orange	G20-7T		96" X 48"	Type B _{FL} or C _{FL}	32	▲	▲ ▲	▲
Orange	G20-7T		192" X 96"	Type B _{FL} or C _{FL}	128	W8x18	16 17	12

▲ See Note 6 Below

LEGEND	
	Sign
	Large Sign
	Traffic Flow

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PLYWOOD SIGN BLANKS	DMS-7100
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300


COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL}
BLACK	LEGEND & BORDERS	NON-REFLECTIVE ACRYLIC FILM

GENERAL NOTES

1. See BC and SMD sheets for additional sign support details.
2. Sign locations shall be approved by the Engineer.
3. For projects more than two miles in length, Give Us a BRAKE signs should be repeated halfway through the project. The Give Us a Brake (CW21-1T) may be used for this purpose.
4. Work zone speed limits are sometimes used in conjunction with GIVE US A BRAKE signing. See BC(3) for location and spacing of construction speed zone signing when required.
5. Give Us a Brake (CW21-1T) signs and supports shall be considered subsidiary to Item 502, "Barricades, Signs and Traffic Handling."
6. The 96" X 48" Working For You Give Us A BRAKE (G20-7T) may use a 1/2" or 5/8" plywood substrate or 0.125" aluminum sheeting substrate and may be supported by two 4" x 6" wood posts with drilled holes for breakaway as per BC(5) and will be subsidiary to Item 502.
7. The Working For You Give Us A BRAKE (G20-7T) 192" X 96" sign shall be paid for under the following specification items:
 Item 636 - Aluminum Signs
 Item 647 - Large Roadside Sign Supports and Assemblies.
 Item 416 - Drilled Shaft Foundations
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.

Texas Department of Transportation				Traffic Operations Division Standard	
WORK ZONE "GIVE US A BRAKE" SIGNS					
WZ(BRK)-13					
FILE:	wzbrk-13.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	August 1995	CONT	SECT	JOB	HIGHWAY
REVISIONS		6470	27	001	US277, etc.
6-96	5-98	7-13	DIST		COUNTY
8-96	3-03	22	MAVERICK, etc.		SHEET NO. 62

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

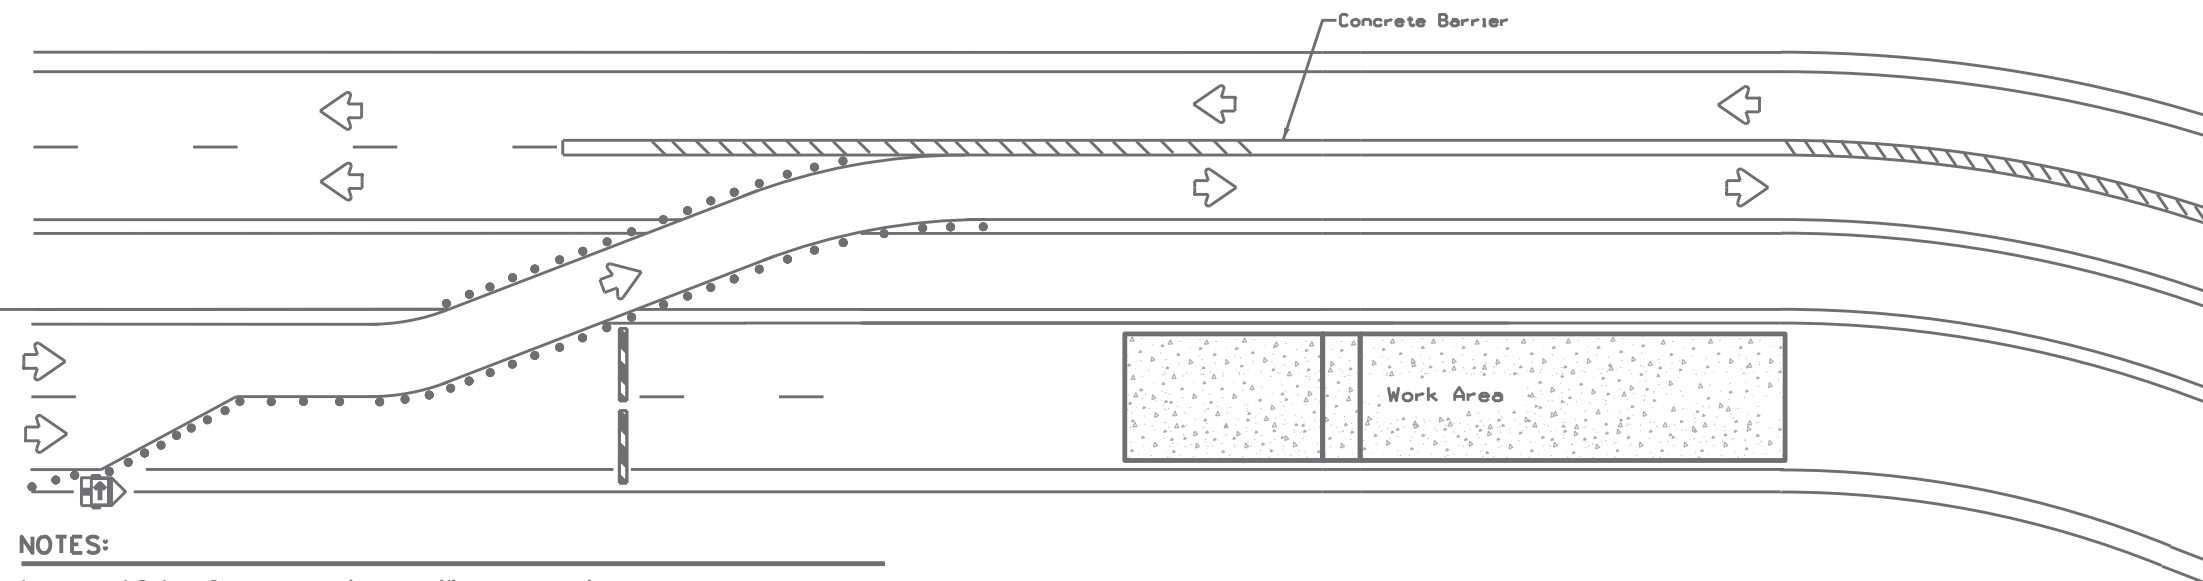

LEGEND	
	Type 3 Barricade
	Channelizing Devices
	Trailer Mounted Flashing Arrow Board
	Sign
	Safety glare screen


DEPARTMENTAL MATERIAL SPECIFICATIONS	
SIGN FACE MATERIALS	DMS-8300
DELINEATORS AND OBJECT MARKERS	DMS-8600
MODULAR GLARE SCREENS FOR HEADLIGHT BARRIER	DMS-8610

Only pre-qualified products shall be used. A copy of the Compliant Work Zone Traffic Control Devices List (CWZTCD) describes pre-qualified products and their sources and may be found at the following web address:

<http://www.txdot.gov/business/resources/producer-list.html>

- NOTES:**
1. Length of Safety Glare screen will be specified elsewhere in the plans.
 2. The cumulative nominal length of the modular safety glare screen units shall equal the length of the individual sections of temporary concrete traffic barrier on which they are installed so the joint between barrier sections will not be spanned by any one safety glare screen unit.
 3. Screen Panel/blades will be designed such that reflective sheeting conforming with Departmental Material Specification DMS-8300, Sign Face Materials, Type B or C Yellow, minimum size of 2 inches by 12 inches can be attached to the edge of the panel/blade. The sheeting shall be attached to one glare screen panel/blade per section of concrete barrier not to exceed a spacing of 30 feet. Barrier reflectors are not necessary when panel/blades are installed with reflective sheeting as described.
 4. Payment for these devices will be under statewide Special Specification "Modular Glare Screens for Headlight Barrier."
 5. This detail is only intended to show types of locations where Glare Screens would be appropriate. Required signing and other devices shall be as shown elsewhere in the plans.

BARRIER DELINEATION WITH MODULAR GLARE SCREENS

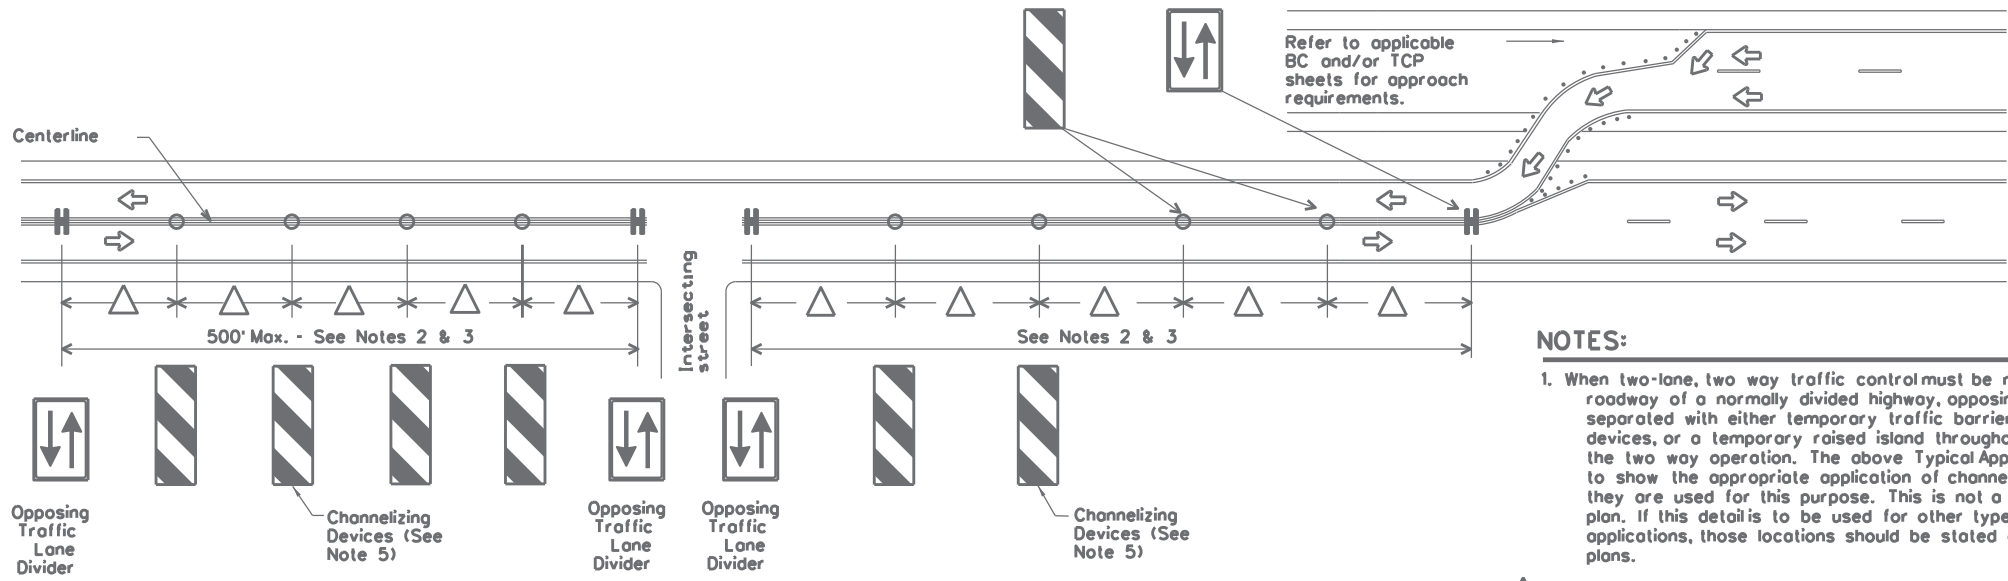

- NOTES:**
1. When two-lane, two way traffic control must be maintained on one roadway of a normally divided highway, opposing traffic shall be separated with either temporary traffic barriers, channelizing devices, or a temporary raised island throughout the length of the two way operation. The above Typical Application is intended to show the appropriate application of channelizing devices when they are used for this purpose. This is not a traffic control plan. If this detail is to be used for other types of roads or applications, those locations should be stated elsewhere in the plans.
 2. Space devices according to the Tangent Spacing shown on the Device Spacing table on BC(9) but not exceeding 100'.
 3. Every fifth device should be an OTLD except when spaced closer to accommodate an intersection. An OTLD should be the first device on each side of intersecting streets or roads.
 4. Locations where surface mount bases with adhesives or self-righting devices will be required in order to maintain them in their proper position should be noted elsewhere in the plans.
 5. Channelizing devices are to be vertical panels, 42" cones or tubular markers that are at least 36" tall. Tubular markers used to separate traffic should have a rubber base weighing at least 30 pounds. Tubular markers that are 42" tall or more shall have four bands of reflective material as detailed for 42" cones on BC(10). Tubular markers less than 42" but at least 36" tall shall have three bands of 3" wide white reflective material spaced 2" apart. Reflective material shall meet DMS-8300, Type A.

VERTICAL PANELS & OPPOSING TRAFFIC LANE DIVIDERS (OTLD) SEPARATING TWO-WAY TRAFFIC ON NORMALLY DIVIDED HIGHWAYS







TRAFFIC CONTROL PLAN TYPICAL DETAILS

WZ(TD)-17

FILE: wzt17.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
4-98	2-17			
3-03				
7-13				
	DIST	COUNTY	SHEET NO.	
	22	MAVERICK, etc.	63	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/21/2024 5:02:00 PM
 FILE: T:\RRDST\MTNFY_2024\MNT Contract (FY24)\Seel Coat\CAD\Standards\wzul-13.dwg

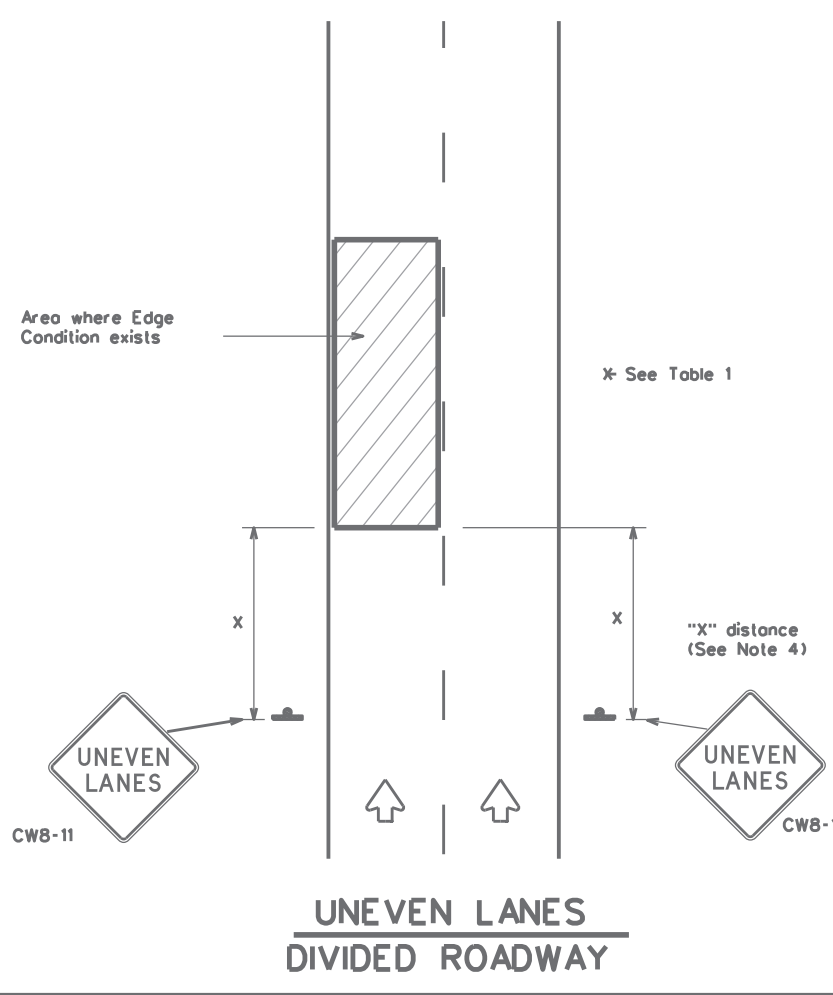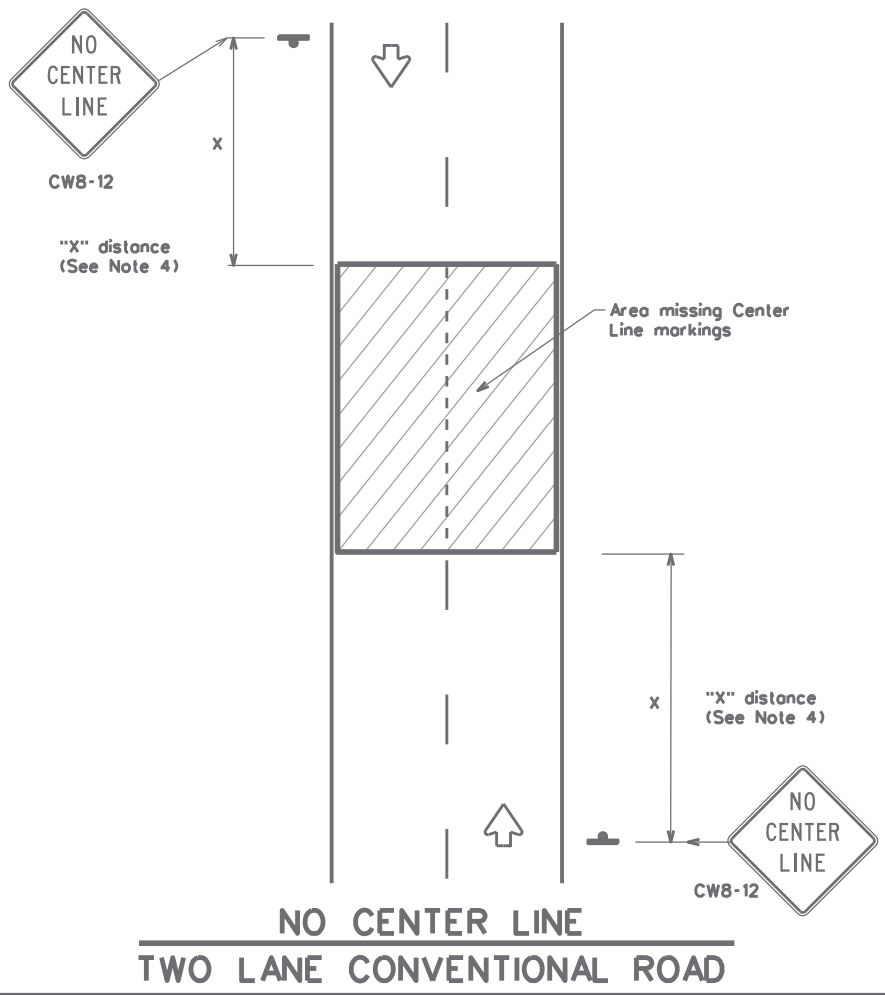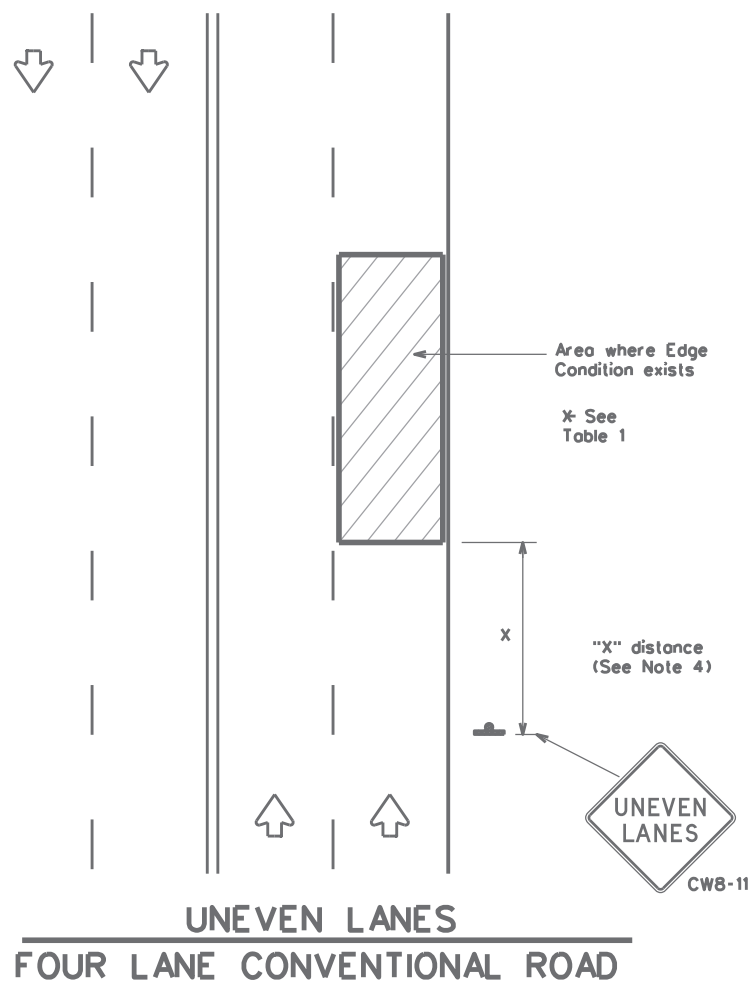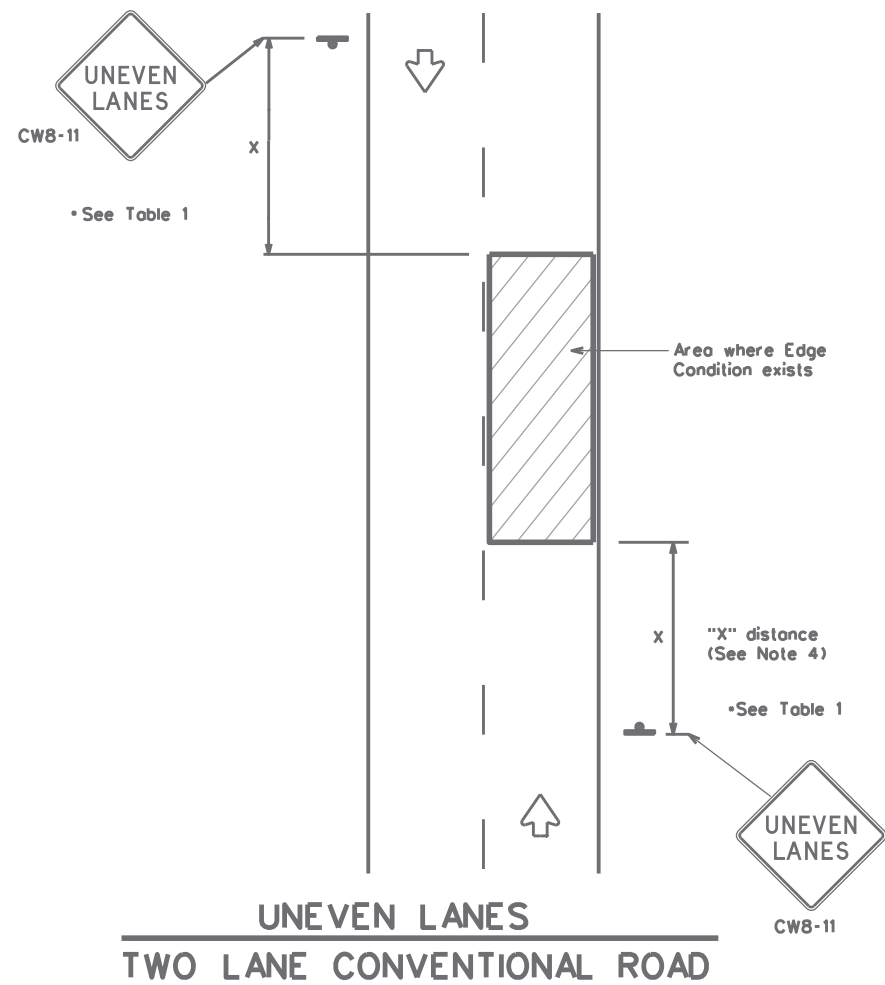

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY (REMOVABLE) PREFABRICATED PAVEMENT MARKINGS	DMS-8241
SIGN FACE MATERIALS	DMS-8300

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL} SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

GENERAL NOTES

- If spalling or holes occur, ROUGH ROAD (CW8-8) signs should be placed in advance of the condition and be repeated every two miles where the condition persists.
- UNEVEN LANES (CW8-11) signs shall be installed in advance of the condition and repeated every mile. Signs installed along the uneven lane condition may be supplemented with the NEXT XX MILES (CW7-3aP) plaque or Advisory Speed (CW13-1P) plaque.
- NO CENTER LINE (CW8-12) signs and temporary pavement markings as per the WZ(STPM) standard shall be installed if yellow centerlines separating two way traffic are obscured or obliterated. Repeat NO CENTER LINE signs every two miles where the center line markings are not in place. The signs and markings shall remain in place until permanent pavement markings are installed.
- Signs shall be spaced at the distances recommended as per BC standards.
- Additional signs may be required as directed by the Engineer. Signs shall remain in place until final surface is applied. Signs shall be considered subsidiary to Item 502 "BARRICADES, SIGNS AND TRAFFIC HANDLING."
- Signs shall be fabricated and mounted on supports as shown on the BC standards and/or listed on the "Compliant Work Zone Traffic Control Devices" list.
- Short term markings shall not be used to simulate edge lines.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition.

Edge Condition	Edge Height (D)	* Warning Devices
①	Less than or equal to: 1/4" (maximum-planing) 1/2" (typical-overlay)	Sign: CW8-11
②	Less than or equal to 3"	Sign: CW8-11
③	Distance "D" may be a maximum of 3" if uneven lanes with edge condition 2 or 3 are open to traffic after work operations cease. Uneven lanes should not be open to traffic when "D" is greater than 3".	

TRAFFIC CONTROL DURING PLANING, OVERLAY AND LEVELING OPERATIONS ARE SHOWN ELSEWHERE IN THE PLANS.

MINIMUM WARNING SIGN SIZE	
Conventional roads	36" x 36"
Freeways/expressways, divided roadways	48" x 48"



SIGNING FOR UNEVEN LANES

WZ(UL)-13

FILE: wzul-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS	6470	27	001	US277, etc.
8-95 2-98 7-13	DIST	COUNTY	SHEET NO.	
1-97 3-03	22	MAVERICK, etc.	64	

CK
DW
CK
DN

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

- No Action Required Required Action

Action No.

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP=

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

-
-
-
-

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input checked="" type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input checked="" type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

-
-

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

-
-
-
-

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

1. Texas Horned Lizard - The Contractor will avoid harvester ant mound in the selection of PSLs where feasible
2. Texas Tortoise -The Contractor should cover utility trenches overnight, and should visually inspect all trenches before filling.
3. Reticulated Colored Lizard - This lizard may potentially occur in the project area. The Contractor shall avoid harming or handling this species.
4. Texas Indigo Snake - This snake may potentially occur in the project area. The Contractor shall avoid harming or handling this species.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labeling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

-
-
-

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required Required Action

Action No.

-
-
-



ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC)

© TxDOT 2024		SHEET 1 OF 1	
CONT	SECT	JOB	HIGHWAY
6470	27	001	US277, etc.
DIST		COUNTY	SHEET NO.
22		MAVERICK, etc.	65