

SUBJECT: PLANS AND PROPOSAL ADDENDUMS

PROJECT: CC 598-1-108

CONTROL: 0598-01-108

COUNTY: HARRIS

LETTING: 05/04/2023

REFERENCE NO: 0424

**PROPOSAL ADDENDUMS**

-----

PROPOSAL COVER

BID INSERTS (SH. NO.: ALL )

GENERAL NOTES (SH. NO.: W )

SPEC LIST (SH. NO.: )

SPECIAL PROVISIONS: )

ADDED:

DELETED:

SPECIAL SPECIFICATIONS:

ADDED:

DELETED:

OTHER: PLAN SHEET AND OTHER CHANGES

DESCRIPTION OF ABOVE CHANGES  
(INCLUDING PLANS SHEET CHANGES)

\*\*\*\*\*BID INSERTS\*\*\*\*\*

DELETED THE FOLLOWING BID ITEM: 512-6049

ADDED THE FOLLOWING BID ITEMS: 260-6012 & 512-6013

\*\*\*\*\*GENERAL NOTES\*\*\*\*\*

SHEET W: REVISED NOTE FOR ITEM 512

\*\*\*\*\*PLAN SHEETS\*\*\*\*\*

SHEET 8J (GENERAL NOTES): REVISED NOTE FOR ITEM 512

SHEET 10 (SUMMARY OF MOBILIZATION, TRAFFIC CONTROL, REMOVAL,  
PEDESTRIAN, ROADWAY): DELETED BID ITEM 512-6049 AND  
ADDED BID ITEMS 260-6012 & 512-6013

SHEET 9 (ESTIMATE & QUANTITIES): ADDED BID ITEM 260-6012

DESCRIPTION OF ABOVE CHANGES  
(INCLUDING PLANS SHEET CHANGES)

(CONTINUED)

SHEET 9A (ESTIMATE & QUANTITIES): ADDED BID ITEM 512-6013 AND  
DELETED BID ITEM 512-6049

SHEET 9B (ESTIMATE & QUANTITIES): BID ITEMS SHIFTED

County: Harris  
Highway: State Highway 288

Sheet  
Control: 0598-01-108

letters for freeways is 10 in., the minimum is 8 in. This work is subsidiary to Item 502.

During the various phases of construction, maintain and relocate Logo signs/Specific Service signs located within the project limits. Maintenance and relocation of these signs are subsidiary to the Item, "Barricades, Signs, and Traffic Handling." These signs are Department-owned and administered by LoneStar Logos, a Department signage contractor.

Relocate a logo sign to avoid interference with construction phases as necessary. Assure that relocated signs meet clearance requirements. If clearance requirements cannot be met using the existing sign, contact the logo sign contractor to manufacture and deliver to the jobsite a smaller logo sign within 3 weeks. If there is absolutely no room to display the relocated logo sign, 2 weeks before relocating, contact the logo sign contractor to remove the sign and place it in storage. The telephone number for LoneStar Logos is (512) 462-1310 and the email address for the regional manager, Tyler Starr, is [tstarr@lonestarlogos.com](mailto:tstarr@lonestarlogos.com).

When relocating a logo sign, provide wooden skid mounted sign supports for the sign that are crashworthy and in accordance with the latest edition of the "Texas Manual on Uniform Traffic Control Devices." Specific information on crash worthy skid mounted signs can be found at: <http://d2dtl5nnlpr0r.cloudfront.net/tti.tamu.edu/documents/0-6782-2.pdf>

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

#### Item 506: Temporary Erosion, Sedimentation and Environmental Controls

A Storm Water Pollution Prevention Plan (SWP3) is required. Since the disturbed area is more than 5 acres, a "Notice of Intent" (NOI) is also required.

Use appropriate measures to prevent, minimize, and control the spill of hazardous materials in the construction staging area. Remove and dispose of materials in compliance with State and Federal laws.

Before starting construction, review with the Engineer the SWP3 used for temporary erosion control as outlined on the plans. Before construction,

General Notes

Sheet U

County: Harris  
Highway: State Highway 288

Sheet  
Control: 0598-01-108

place the temporary erosion and sedimentation control features as shown on the SWP3.

Schedule the seeding or sodding work as soon as possible. The project schedule provides for a vegetation management plan.

After completing earthwork operations, restore and reseed the disturbed areas in accordance with the Department's specifications for permanent or temporary erosion control.

Implement temporary and permanent erosion control measures to comply with the National Pollution Discharge Elimination System (NPDES) general permit under the Clean Water Act.

Before starting grading operations and during the project duration, place the temporary or permanent erosion control measures to prevent sediment from leaving the right of way.

#### Item 512: Portable Traffic Barrier

Transport Low Profile Concrete Barriers (LPCB) used for traffic handling from the Department's stockpile located on the north side of IH 610 at Long Drive.

Where required by the Engineer, provide anchor pins for Type 2 Low Profile Concrete Barriers (LPCB) as shown on the current LPCB standard. Anchor pins are subsidiary to the Low Profile Concrete Barrier.

Transport Standard Height Portable Traffic Barriers (including J-J Hook and Safety Shape) used for traffic handling from the Department's stockpile located on the south side of IH 610 at Cedar Crest Blvd. (located across IH 610 from Long Drive).

Use only the J-J Hook type connection between barriers.

After completing the project, return Low Profile Concrete Barriers (LPCB) used for traffic handling, to the Department's stockpile located on the north side of IH 610 at Long Drive. After completing the project, return the associated LPCB connecting hardware to the area office or as directed.

After completing the project, return Standard Height Portable Traffic Barriers (including J-J Hook and Single Slope) used for traffic handling, to the Department's stockpile located on the south side of at IH 610 at Cedar Crest Blvd. (located across IH 610 from Long Drive). After completing the project, ~~return the associated Single Slope barrier connecting hardware to the area office or as directed.~~ **will become the property of the contractor.**

After completing the project, Standard Height Safety Shape Portable Traffic Barriers used for traffic handling need to be returned back to the designated stockpile. The hardware will become the property of the Contractor.

General Notes

Sheet V

1 04/21/2023 Revised General Note



Traff Data & Associates, Inc.  
Traffic Engineering Consultants  
Firm No.: 4119  
9894 Bissonnet, Suite 640  
Houston, Texas 77036  
Phone: (713) 446-8167  
E-mail: [tdeiengineers@aol.com](mailto:tdeiengineers@aol.com)

© 2021 TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION  
SH 288 NB FRONTAGE ROAD

GENERAL NOTES			
DESIGN	FEEDBACK	PROJECT NO.	HIGHWAY NO.
ISU	6	CC 598-1-108	SH 288
GRAPHIC	STATE	DISTRICT	COUNTY
CAH	TEXAS	HOUSTON	HARRIS
CHECK	CONTROL	SECTION	JOB
ISU	0598	01	108

008J




# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0598-01-108

DISTRICT Houston  
HIGHWAY SH 288

COUNTY Harris

CONTROL SECTION JOB				0598-01-108		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00139206			
COUNTY				Harris			
HIGHWAY				SH 288			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	100-6002	PREPARING ROW	STA	40.000		40.000	
	104-6001	REMOVING CONC (PAV)	SY	6.050		6.050	
	104-6017	REMOVING CONC (DRIVEWAYS)	SY	547.230		547.230	
	104-6067	REMOVING CONC (SAWCUT)	LF	1,075.000		1,075.000	
	105-6008	REMOVING STAB BASE AND ASPH PAV (6")	SY	47.400		47.400	
	110-6002	EXCAVATION (CHANNEL)	CY	22,500.000		22,500.000	
	134-6008	BACKFILL (TY A OR B)	CY	19,018.000		19,018.000	
	162-6002	BLOCK SODDING	SY	33,880.000		33,880.000	
	166-6001	FERTILIZER	AC	6.900		6.900	
	168-6001	VEGETATIVE WATERING	MG	828.000		828.000	
	260-6006	LIME TRT (EXST MATL) (6")	SY	13,042.000		13,042.000	
	260-6012	LIME(HYD,COM OR QK)(SLRY)OR QK(DRY)	TON	176.000		176.000	
	276-6188	CEM TRT(PLNT MX) (CL L)(TY E)(GR 4)(6")	SY	13,042.000		13,042.000	
	292-6017	ASPHALT STAB BASE (GR 4)(PG 64)	TON	711.000		711.000	
	360-6004	CONC PVMT (CONT REINF - CRCP) (10")	SY	12,872.000		12,872.000	
	400-6001	STRUCT EXCAV	CY	10.810		10.810	
	400-6003	STRUCT EXCAV (PIPE)	CY	5,784.950		5,784.950	
	400-6005	CEM STABIL BKFL	CY	623.180		623.180	
	400-6009	CEMENT STAB BACKFILL (INLET OR MH)	CY	8.620		8.620	
	402-6001	TRENCH EXCAVATION PROTECTION	LF	1,047.000		1,047.000	
	416-6026	DRILL SHAFT (HIGH MAST POLE) (60 IN)	LF	34.000		34.000	
	420-6060	CL C CONC (INLET)	CY	24.000		24.000	
	432-6001	RIPRAP (CONC)(4 IN)	CY	3.000		3.000	
	432-6011	RIPRAP (CONC) (CL B) (6")	CY	14.400		14.400	
	464-6005	RC PIPE (CL III)(24 IN)	LF	614.000		614.000	
	464-6007	RC PIPE (CL III)(30 IN)	LF	234.000		234.000	
	464-6008	RC PIPE (CL III)(36 IN)	LF	199.000		199.000	
	465-6544	INLET (STG II)(TY AAD)	EA	1.000		1.000	
	465-6545	INLET (STG II)(TY AD)	EA	7.000		7.000	
	467-6394	SET (TY II) (24 IN) (RCP) (6: 1) (C)	EA	10.000		10.000	
	467-6420	SET (TY II) (30 IN) (RCP) (4: 1) (P)	EA	1.000		1.000	
	467-6422	SET (TY II) (30 IN) (RCP) (6: 1) (C)	EA	1.000		1.000	
	467-6423	SET (TY II) (30 IN) (RCP) (6: 1) (P)	EA	4.000		4.000	
	467-6451	SET (TY II) (36 IN) (RCP) (4: 1) (P)	EA	1.000		1.000	
	467-6453	SET (TY II) (36 IN) (RCP) (6: 1) (C)	EA	1.000		1.000	
	467-6454	SET (TY II) (36 IN) (RCP) (6: 1) (P)	EA	4.000		4.000	
	467-6469	SET (TY II) (48 IN) (CMP) (4: 1) (P)	EA	1.000		1.000	

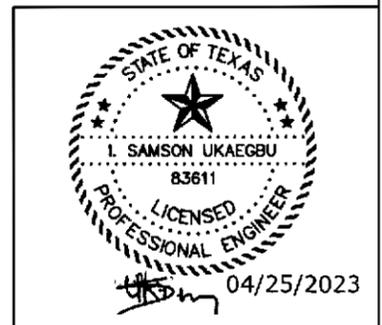

**Traff Data & Associates, Inc.**  
Traffic Engineering Consultants  
Firm No.: 4119  
9894 Bissonnet, Suite 640  
Houston, Texas 77036  
Phone: (713) 446-8167  
E-mail: tdaengineers@aol.com

4/25/2023 Added item 260-6012



Report Generated By: txdotconnect\_internal\_ext

Report Created On: Apr 25, 2023 2:18:23 PM

DISTRICT	COUNTY	CCSJ	SHEET	SCALE: NTS	SHEET 1 OF 3
Houston	Harris	0598-01-108			
DESIGN ISU	REV. NO.	PROJECT NO.	HIGHWAY NO.		
	6	CC 598-1-108	SH 288		
GRAPHICS CAH	STATE	DISTRICT	COUNTY	SHEET NO.	
	TEXAS	HOUSTON	HARRIS		
CHECK ISU	CONTROL	SECTION	JOB		
	0598	01	108		009



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0598-01-108


DISTRICT Houston  
HIGHWAY SH 288

COUNTY Harris

CONTROL SECTION JOB		0598-01-108		TOTAL EST.	TOTAL FINAL
PROJECT ID		A00139206			
COUNTY		Harris			
HIGHWAY		SH 288			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	467-6580	SET (REMOV & REINSTALL)	EA	1.000	
	481-6020	PIPE (PVC) (SCH 40) (20 IN)	LF	6.000	
	496-6004	REMOV STR (SET)	EA	1.000	
	496-6007	REMOV STR (PIPE)	LF	150.200	
	500-6001	MOBILIZATION	LS	1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	12.000	
	506-6002	ROCK FILTER DAMS (INSTALL) (TY 2)	LF	180.000	
	506-6011	ROCK FILTER DAMS (REMOVE)	LF	180.000	
	506-6024	CONSTRUCTION EXITS (REMOVE)	SY	15.750	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	13,580.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	13,580.000	
	506-6041	BIODEG EROSN CONT LOGS (IN STL) (12")	LF	256.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	256.000	
	512-6013	PORT CTB (DES SOURCE)(SGL SLP)(TY 1)	LF	1,260.000	
	512-6025	PORT CTB (MOVE)(SGL SLP)(TY 1)	LF	1,260.000	
	512-6037	PORT CTB (STKPL)(SGL SLP)(TY 1)	LF	1,260.000	
	529-6005	CONC CURB (MONO) (TY II)	LF	2,453.000	
	530-6004	DRIVEWAYS (CONC)	SY	369.000	
	531-6001	CONC SIDEWALKS (4")	SY	1,982.000	
	540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	642.000	
	540-6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	1.000	
	545-6026	CRASH CUSHION ATTN (INSTALL) (QUAD)(N)	EA	1.000	
	618-6023	CONDT (PVC) (SCH 40) (2")	LF	425.000	
	618-6032	CONDT (PVC) (SCH 40) (3") (STL ENCSE)	LF	780.000	
	618-6046	CONDT (PVC) (SCH 80) (2")	LF	270.000	
	618-6047	CONDT (PVC) (SCH 80) (2") (BORE)	LF	115.000	
	618-6056	CONDT (PVC) (SCH 80) (3") (CONC ENCSE)	LF	1,820.000	
	620-6007	ELEC CONDR (NO.8) BARE	LF	1,425.000	
	620-6008	ELEC CONDR (NO.8) INSULATED	LF	2,850.000	
	620-6009	ELEC CONDR (NO.6) BARE	LF	115.000	
	620-6010	ELEC CONDR (NO.6) INSULATED	LF	230.000	
	624-6009	GROUND BOX TY D (162922)	EA	1.000	
	628-6152	ELC SRV TY D 120/240 060(NS)SS(N)SP(O)	EA	1.000	
	644-6004	IN SM RD SN SUP&AM TY10BWG(1)SA(T)	EA	9.000	
	662-6067	WK ZN PAV MRK REMOV (W)6"(SLD)	LF	1,440.000	
	672-6006	REFL PAV MRKR TY I-A	EA	10.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	32.000	



4/25/2023 Added Item 512-6013 and deleted Item 512-6049

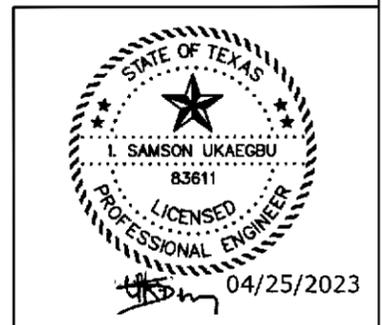

**Traff Data & Associates, Inc.**  
Traffic Engineering Consultants  
Firm No.: 4119  
9894 Bissonnet, Suite 640  
Houston, Texas 77036  
Phone: (713) 446-8167  
E-mail: tdaengineers@aol.com

© 2021 TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION  
SH 288 NB FRONTAGE ROAD  
ESTIMATE AND QUANTITIES



Report Generated By: txdotconnect\_internal\_ext

Report Created On: Apr 25, 2023 2:18:23 PM

DISTRICT	COUNTY	CCSJ	SHEET
Houston	Harris	0598-01-108	

SCALE: NTS	PROJECT NO.	HIGHWAY NO.	SHEET NO.
6	CC 598-1-108	SH 288	009A




CONTROLLING PROJECT ID 0598-01-108

DISTRICT Houston  
HIGHWAY SH 288

COUNTY Harris

# Estimate & Quantity Sheet

CONTROL SECTION JOB		0598-01-108		TOTAL EST.	TOTAL FINAL
PROJECT ID		A00139206			
COUNTY		Harris			
HIGHWAY		SH 288			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	678-6002	PAV SURF PREP FOR MRK (6")	LF	6,112.000	
	678-6004	PAV SURF PREP FOR MRK (8")	LF	196.000	
	678-6006	PAV SURF PREP FOR MRK (12")	LF	390.000	
	678-6008	PAV SURF PREP FOR MRK (24")	LF	36.000	
	678-6009	PAV SURF PREP FOR MRK (ARROW)	EA	2.000	
	678-6010	PAV SURF PREP FOR MRK (DBL ARROW)	EA	2.000	
	678-6016	PAV SURF PREP FOR MRK (WORD)	EA	2.000	
	690-6001	REMOVAL OF CONDUIT	LF	750.000	
	690-6009	REMOVAL OF CABLES	LF	2,970.000	
	3051-6001	GROUTING	CF	80.840	
	6007-6011	FIBER OPTIC CBL (SNGLE-MODE)(12 FIBER)	LF	135.000	
	6007-6013	FIBER OPTIC CBL (SNGLE-MODE)(36 FIBER)	LF	4,870.000	
	6007-6017	FIBER OPTIC CBL (SNGLE-MODE)(144 FIBER)	LF	4,870.000	
	6007-6094	FIBER OPTIC FUSION SPLICE	EA	368.000	
	6016-6007	ITS MULTI-DUCT CND (PVC-40)(BORE)	LF	780.000	
	6016-6010	ITS MULTI-DUCT CND (PVC-80)	LF	1,820.000	
	6027-6003	CONDUIT (PREPARE)	LF	730.000	
	6027-6008	GROUND BOX (PREPARE)	EA	9.000	
	6038-6004	MULTIPOLYMER PAV MRK (W)(6")(SLD)	LF	5,022.000	
	6038-6005	MULTIPOLYMER PAV MRK (W)(6")(BRK)	LF	1,090.000	
	6038-6007	MULTIPOLYMER PAV MRK (W)(8")(SLD)	LF	196.000	
	6038-6011	MULTIPOLYMER PAV MRK (W)(12")(SLD)	LF	390.000	
	6038-6013	MULTIPOLYMER PAV MRK (W)(24")(SLD)	LF	36.000	
	6038-6017	MULTIPOLYMER PAV MRK (Y)(6")(SLD)	LF	888.000	
	6038-6025	MULTIPOLYMER PAV MRK (W) (ARROW)	EA	2.000	
	6038-6026	MULTIPOLYMER PAV MRK (W) (DBL ARROW)	EA	2.000	
	6038-6027	MULTIPOLYMER PAV MRK (W) (WORD)	EA	2.000	
	6185-6002	TMA (STATIONARY)	DAY	150.000	
	6186-6002	ITS GND BOX(PCAST) TY 1 (243636)W/APRN	EA	2.000	
	6476-6002	Relocate High Mast Lighting Assembly	EA	1.000	
	7017-6027	SANITARY SEWER (21 IN) (PVC) (SDR 35)	LF	6.000	
08		CONTRACTOR FORCE ACCOUNT EROSION CONTROL MAINTENANCE (NON-PARTICIPATING)	LS	1.000	
		CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000	
		CONTRACTOR FORCE ACCOUNT LAW ENFORCEMENT (NON-PARTICIPATING)	LS	1.000	

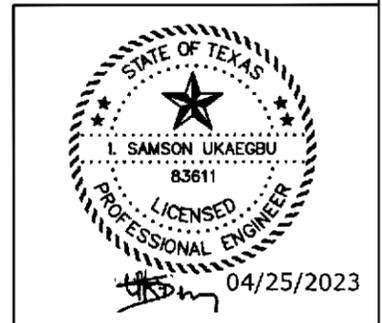

**Traff Data & Associates, Inc.**  
Traffic Engineering Consultants  
Firm No.: 4119  
9894 Bissonnet, Suite 640  
Houston, Texas 77036  
Phone: (713) 446-8167  
E-mail: tdaengineers@aol.com

4/25/2023 Items shifted



Report Generated By: txdotconnect\_internal\_ext

Report Created On: Apr 25, 2023 2:18:23 PM

DISTRICT	COUNTY	CCSJ	SHEET
Houston	Harris	0598-01-108	

SCALE: NTS	SHEET 3 OF 3
DESIGN ISU	PROJECT NO. CC 598-1-108
GRAPHICS CAH	STATE TEXAS DISTRICT HOUSTON COUNTY HARRIS
CHECK ISU	CONTROL SECTION JOB
	0598 01 108

SUMMARY OF MOBILIZATION ITEMS	
SPEC NO.	500
ITEM NO.	6001
ITEM DESCRIPTION	MOBILIZATION
UNIT	LS
	1.00
<b>PROJECT TOTALS</b>	<b>1</b>

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS							
SPEC NO.	502	512	512	512	512	662	6185
ITEM NO.	6001	6013	6025	6037	6049	6067	6002
ITEM DESCRIPTION	BARRICADES, SIGNS AND TRAFFIC HANDLING	PORT CTB (DES SOURCE)(SGL SLP)(TY 1)	PORT CTB (MOVE)(SGL SLP)(TY 1)	PORT CTB (STKPL)(SGL SLP)(TY 1)	PORT CTB (REMOVE)(SGL SLP)(TY 1)	WK ZN PAV MRK REMOV (W)6"(SLD)	TMA (STATIONARY)
UNIT	MO	LF	LF	LF	LF	LF	DAY
PHASE 1	4	1260	1260	1260	1260	1440	150
PHASE 2	8						
<b>PROJECT TOTALS</b>	<b>12</b>	<b>1260</b>	<b>1260</b>	<b>1260</b>	<b>1260</b>	<b>1440</b>	<b>150</b>

NOTE: ⚠ 512-6049 REMOVED AND REPLACED WITH 512-6013  
260-6012 ADDED 4/21/2023

SUMMARY OF REMOVAL ITEMS						
SPEC NO.	104	104	104	105	496	496
ITEM NO.	6001	6017	6067	6008	6004	6007
ITEM DESCRIPTION	REMOVING CONC (PAV)	REMOVING CONC (DRIVEWAYS)	REMOVING CONC (SAWCUT)	REMOVING STAB BASE AND ASPH PAV (6")	REMOV STR (SET)	REMOV STR (PIPE)
UNIT	SY	SY	LF	SY	EA	LF
SHEET 1 OF 8					1	
SHEET 2 OF 8						
SHEET 3 OF 8						
SHEET 4 OF 8						
SHEET 5 OF 8		547.23				75.2
SHEET 6 OF 8	1		170	21.2		75
SHEET 7 OF 8	2.75		500	14.9		
SHEET 8 OF 8	2.3		405	11.3		
<b>PROJECT TOTALS</b>	<b>6.05</b>	<b>547.23</b>	<b>1075</b>	<b>47.4</b>	<b>1</b>	<b>150.2</b>

SUMMARY OF PEDESTRIAN ITEMS	
SPEC NO.	531
ITEM NO.	6001
ITEM DESCRIPTION	CONC SIDEWALKS (4")
UNIT	SY
SHEET 1 OF 8	78
SHEET 2 OF 8	278
SHEET 3 OF 8	249
SHEET 4 OF 8	249
SHEET 5 OF 8	278
SHEET 6 OF 8	282
SHEET 7 OF 8	278
SHEET 8 OF 8	290
<b>PROJECT TOTALS</b>	<b>1982</b>

SUMMARY OF ROADWAY ITEMS													
SPEC NO.	100	134	260	260	276	292	360	432	529	530	540	540	545
ITEM NO.	6002	6008	6006	6012	6188	6017	6004	6011	6005	6004	6001	6016	6026
ITEM DESCRIPTION	PREPARING ROW	BACKFILL (TY A OR B)	LIME TRT (EXST MATL) (6")	LIME(HYD, COM OR QK)(SLRY)OR QK(DRY)	CEM TRT(PLNT MX)(CL L)(TY E)(GR 4)(6")	ASPHALT STAB BASE (GR 4)(PG 64)	CONC PVMT (CONT REINF CRCP) (10")	RIPRAP (CONC) (CL B) (6")	CONC CURB (MONO) (TY II)	DRIVEWAYS (CONC)	MTL W-BEAM GD FEN (TIM POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	CRASH CUSHION ATTEN (INSTALL) (QUAD)(N)
UNIT	STA	CY	SY	TON	SY	TON	SY	CY	LF	SY	LF	EA	EA
SHEET 1 OF 8	5	19018	927	15.1	927	51	912		231	123			
SHEET 2 OF 8	5		2000	26.6	2000	109	1973		500				
SHEET 3 OF 8	5		2001	26.6	2001	109	1973		500	123			
SHEET 4 OF 8	5		2001	26.6	2001	109	1973		500	123			
SHEET 5 OF 8	5		2000	26.6	2000	109	1973		500				
SHEET 6 OF 8	5		2198	29.3	2198	120	2178	14.4	222				
SHEET 7 OF 8	5		1306	17.3	1306	71	1292			162			1
SHEET 8 OF 8	5		609	7.9	609	33	598			480		1	
<b>PROJECT TOTALS</b>	<b>40</b>	<b>19018</b>	<b>13042</b>	<b>176</b>	<b>13042</b>	<b>711</b>	<b>12872</b>	<b>14.4</b>	<b>2453</b>	<b>369</b>	<b>642</b>	<b>1</b>	<b>1</b>

1	4/21/2023	QUANTITIES REVISED	ISU
REV. NO.	DATE	DESCRIPTION	BY

**I. SAMSON UKAEGBU**  
83611  
LICENSED PROFESSIONAL ENGINEER  
04/21/2023

**Traff Data & Associates, Inc.**  
Traffic Engineering Consultants  
Firm No.: 4119  
9894 Bissonnet, Suite 640  
Houston, Texas 77036  
Phone: (713) 446-8167  
E-mail: tdaengineers@aol.com

© 2021 TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION  
SH 288 NB FRONTAGE ROAD  
SUMMARY OF MOBILIZATION,  
TRAFFIC CONTROL, REMOVAL,  
PEDESTRIAN, ROADWAY

DESIGN ISU	PROJECT NO. CC 598-1-108	HIGHWAY NO. SH 288
GRAPHICS CAH	STATE TEXAS	DISTRICT HOUSTON COUNTY HARRIS
CHECK ISU	CONTROL SECTION 01	JOB 108

SHEET 1 OF 4  
010