

CONT	SECT	JOB	HIGHWAY
6468	08	001	FM 535, ETC.
DIST	COUNTY		SHEET NO.
AUS	BASTROP, ETC.		1


STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
MATERIALS MAINTENANCE CONTRACT
MATERIALS ONLY

PROJECT NUMBER
MMC 646808001

BASTROP, ETC
FM 535, ETC

LIMITS: VARIOUS COUNTIES INCLUDING
BASTROP, BLANCO, BURNET, CALDWELL, GILLESPIE, HAYS, LEE, LLANO, MASON, TRAVIS AND WILLIAMSON
FOR THE DELIVERY OF SEAL COAT AGGREGATE
CONSISTING OF TYPE D SAC A AND SAB B AGGREGATE

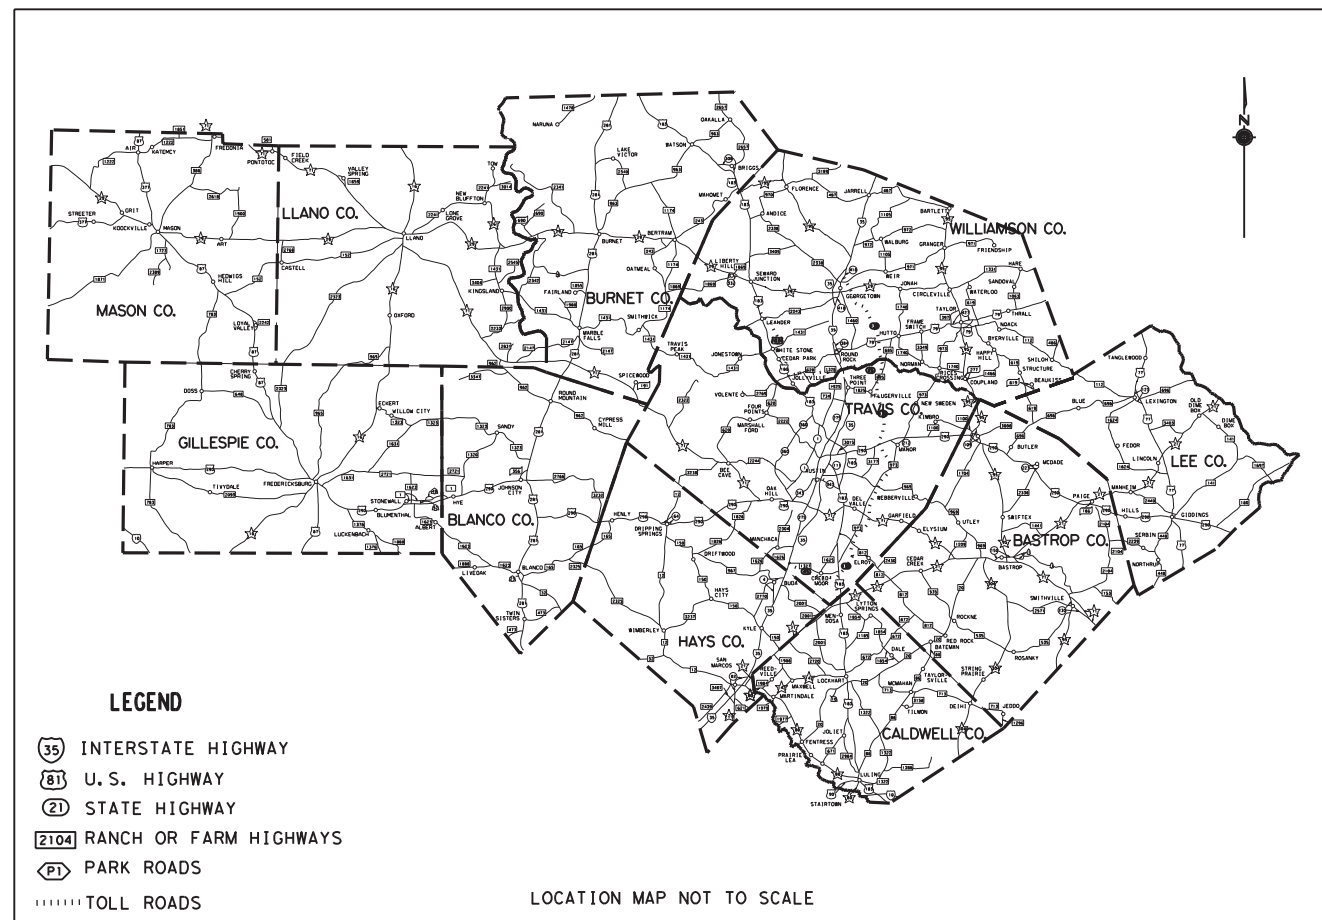

LOCATION MAP NOT TO SCALE

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE



SUBMITTED FOR LETTING: 8/14/2024


DocuSigned by:
Gisel Carrasco, P.E.
097829A06497450...
DISTRICT MAINTENANCE ENGINEER

APPROVED FOR LETTING: 8/14/2024

DocuSigned by:
Omar X. De Leon, P.E.
D18DBE2B94AF4FA...
DIRECTOR OF MAINTENANCE

FILE: \$FILES\$ DATE: \$DATES\$

1	GENERAL
2	TITLE SHEET
3	INDEX OF SHEETS
4	GENERAL NOTES
5	ESTIMATE AND QUANTITY
	LOCATION SUMMARY

Austin District Maintenance Office				
 Texas Department of Transportation				
INDEX OF SHEETS				
© 2019	CONT	SECT	JOB	HIGHWAY
DS: CK:	6468	08	001	FM 535, ETC
DW: CK:	DIST	COUNTY		SHEET NO.
	AUS	BASTROP, ETC.		2

DATE:

FILE:

GENERAL NOTES:

GENERAL

Work under this contract consists of “**TYPE D SAC A and SAC B AGGREGATE Material Delivery**” at various locations in “**Bastrop, Blanco, Burnet, Caldwell, Gillespie, Hays, Lee, Llano, Mason, Travis, and Williamson Counties**”.

Each contract awarded by the Department stands on its own as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Coordinate work through Maintenance Supervisor:

Bastrop	Robert Wilson	512-359-6914	Robert.Wilson@txdot.gov
Blanco	Malcom Oldaker	512-317-8621	MOLDAKE@txdot.gov
Burnet	Christopher Hall	512-756-2316	Christopher.Hall@txdot.gov
Caldwell	Michael Self	512-398-2412	Michael.Lynn.Self@txdot.gov
Gillespie	Brad Phipps	512-288-4761	Brad.Phipps@txdot.gov
Hays	Jesse Serna	512-353-1061	Jesse.Serna@txdot.gov
Lee	Marcus Snowden	512-253-6070	Marcus.Snowden@txdot.gov
Llano	James Low	325-247-5146	James.Low@txdot.gov
Mason	Joey Gunnels	325-347-6447	Joey.Gunnels@txdot.gov
Travis East & Central	Greg Stephens	512-997-2267	Gregory.Stephens@txdot.gov
Travis North	Anthony Reitan	512-331-5361	Anthony.Reitan@txdot.gov
Travis South	Ronald Switzer	512-627-9874	Ronald.Switzer@txdot.gov
Williamson East	Jackie Volek	512-365-5254	Jackie.Volek@txdot.gov
Williamson West	Douglas Havins	512-930-6018	Douglas.Havins@txdot.gov
Special Jobs	Jason Whitworth	512-292-2440	Jason.Whitworth@txdot.gov
Austin District Tolls	Steve Schmidt	512-600-3596	Steve.Schmidt@txdot.gov
IH 35 PBC	Russ Broeckel	512-298-7924	Russ.Broeckel@txdot.gov

Pre-Bid Contact List

District Maintenance gisel.carrasco@txdot.gov

Questions and requests for documents will be accepted via the Letting Pre-Bid Q&A web page. All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<https://www.dot.state.tx.us/business/plansonline/ftpinfo.htm>

SECTION 10.4 – SCOPE OF WORK

Prior to beginning operations, the Department will arrange a coordination call between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the Contract, proposed procedures, and plans for performing the work while providing safe passage for traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

SECTION 10.8 - PROSECUTION AND PROGRESS

There are 365 calendar days on this contract. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

ITEM 520 – WEIGHING AND MEASURING EQUIPMENT

A daily summary spreadsheet will be required for all material delivered.

SS 8000 – AGGREGATES FOR SURFACE TREATMENTS (MATERIALS ONLY)

Previously tested aggregates delivered to the locations, which are found to contain excessive quantities of dust (more than 0.5 percent passing the no. 40 sieve) during pre-coating, stockpiling or hauling operations, will be rejected. Use test method Tex-200-F, Part II, for testing.

Report to the State’s representative at the time of arrival at the locations and obtain a signature documenting the date and time.

Table 3 Los Angeles Abrasion, % Max, is lowered from 35 to 30 and is applicable to all aggregates.

Furnish SAC A as requested.

Furnish SAC B with a RSSM ST of 13 or less.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6468-08-001

DISTRICT Austin
HIGHWAY FM0535

COUNTY Bastrop

CONTROL SECTION JOB				6468-08-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00210072			
COUNTY				Bastrop			
HIGHWAY				FM0535			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8000-7141	AGGR (TY D GR 4)(DEL)(ST1)	TON	2,500.000		2,500.000	
	8000-7142	AGGR (TY D GR 4)(DEL)(ST2)	TON	3,000.000		3,000.000	
	8000-7143	AGGR (TY D GR 4)(DEL)(ST3)	TON	3,500.000		3,500.000	
	8000-7144	AGGR (TY D GR 4)(DEL)(ST4)	TON	1,300.000		1,300.000	
	8000-7145	AGGR (TY D GR 4)(DEL)(ST5)	TON	2,750.000		2,750.000	
	8000-7147	AGGR (TY D GR 4)(DEL)(ST7)	TON	3,000.000		3,000.000	
	8000-7148	AGGR (TY D GR 4)(DEL)(ST8)	TON	2,250.000		2,250.000	
	8000-7149	AGGR (TY D GR 4)(DEL)(ST9)	TON	3,250.000		3,250.000	
	8000-7151	AGGR (TY D GR 4)(DEL)(ST11)	TON	6,800.000		6,800.000	

SUMMARY OF MATERIALS QUANTITIES												
DELIVERY LOCATION	MAINTENANCE SECTION	8000 7141	8000 7142	8000 7143	8000 7144	8000 7145	8000 7146	8000 7147	8000 7148	8000 7149	8000 7150	8000 7151
		AGGR (TY D GR 4) (DEL) (SAC A) (SITE 1)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 2)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 3)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 4)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 5)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 6)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 7)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 8)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 9)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 10)	AGGR (TY D GR 4) (DEL) (SAC A) (SITE 11)
		TON	TON	TON	TON	TON	TON	TON	TON	TON	TON	TON
BASTROP	BASTROP	500										
BLANCO	BLANCO		2500									
BURNET	BURNET			3000								
CALDWELL	CALDWELL				500							
GILLESPIE	GILLESPIE					2500						
HAYS	HAYS											
LEE	LEE							2000				
LLANO	LLANO								2000			
MASON	MASON									3000		
TRAVIS	TRAVIS CENTRAL											
WILLIAMSON	TRAVIS NORTH											500
TRAVIS	TRAVIS EAST											
TRAVIS	TRAVIS SOUTH											
WILLIAMSON	Williamson West											
WILLIAMSON	Williamson East											800
PROJECT TOTALS		500	2500	3000	500	2500	0	2000	2000	3000	0	1300

SUMMARY OF MATERIALS QUANTITIES												
DELIVERY LOCATION	MAINTENANCE SECTION	8000 7141	8000 7142	8000 7143	8000 7144	8000 7145	8000 7146	8000 7147	8000 7148	8000 7149	8000 7150	8000 7151
		AGGR (TY D GR 4) (DEL) (SAC B) (SITE 1)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 2)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 3)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 4)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 5)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 6)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 7)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 8)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 9)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 10)	AGGR (TY D GR 4) (DEL) (SAC B) (SITE 11)
		TON	TON	TON	TON	TON	TON	TON	TON	TON	TON	TON
BASTROP	BASTROP	2000										
BLANCO	BLANCO		500									
BURNET	BURNET			500								
CALDWELL	CALDWELL				800							
GILLESPIE	GILLESPIE					250						
HAYS	HAYS											
LEE	LEE							1000				
LLANO	LLANO								250			
MASON	MASON									250		
TRAVIS	TRAVIS CENTRAL											
WILLIAMSON	TRAVIS NORTH											3500
TRAVIS	TRAVIS EAST											
TRAVIS	TRAVIS SOUTH											
WILLIAMSON	Williamson West											
WILLIAMSON	Williamson East											2000
PROJECT TOTALS		2000	500	500	800	250	0	1000	250	250	0	5500


*FURNISH SAC A OR SAC B WITH A RSSM ST OF 13 OR LESS.

FOR THE PURPOSE OF THIS CONTRACT THE DELIVERY SITES ARE AS FOLLOWS:

- SITE #1: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF BASTROP COUNTY
- SITE #2: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF BLANCO COUNTY
- SITE #3: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF BURNET COUNTY
- SITE #4: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF CALDWELL COUNTY
- SITE #5: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF GILLESPIE COUNTY
- SITE #6: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF HAYS COUNTY
- SITE #7: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF LEE COUNTY
- SITE #8: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF LLANO COUNTY
- SITE #9: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF MASON COUNTY
- SITE #10: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF TRAVIS COUNTY
- SITE #11: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF WILLIAMSON COUNTY

DATE: \$DATE\$
FILE: \$FILE\$

**Austin District
Maintenance Office**



**LOCATIONS
SUMMARY**

© 20	CONT	SECT	JOB	HIGHWAY
DS: CK:	6468	08	001	FM 535, ETC.
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		BASTROP, ETC.	5