

FHWA TEXAS DIVISION		PROJECT NO. MMC 6474-07-001		SHEET NO. 1
STATE	DISTRICT	COUNTY		
TEXAS	LFK	SABINE, ETC.		
CONTROL	SECTION	JOB	HIGHWAY NO.	
6474	07	001	FM 83, ETC.	

**INDEX OF SHEETS**

SHEET NO.	DESCRIPTION
1	GENERAL TITLE SHEET
2-4	SITE MAPS
5, 5A	GENERAL NOTES
6	ESTIMATE & QUANTITY SHEET
7	QUANTITY SUMMARY

STATE OF TEXAS  
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED  
STATE HIGHWAY IMPROVEMENT

TYPE OF WORK:

EMULSION CRS-2P, CSS-1H  
& CUTBACK ASPHALT RC-250: (MATERIALS ONLY)

MMC 6474-07-001

FM 83, ETC.

SABINE, ANGELINA & HOUSTON COUNTY MAINTENANCE SECTIONS  
(PICK UP AT PLANT & DELIVERY)



RECOMMENDED FOR LETTING:

SEE SHEET NO. 2-4 FOR SITE MAPS


DocuSigned by:  
L. Preslie Gerlandy P.E. 10/24/2024  
61B7A0C08C42465...  
DISTRICT MAINTENANCE ENGINEER DATE  
APPROVED FOR LETTING:

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION  
SEPTEMBER 1, 2024 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE  
CONTRACT SHALL GOVERN ON THIS PROJECT.

DocuSigned by:  
Kevin Buranakitipinyo 10/24/2024  
DIRECTOR OF MAINTENANCE DATE



SITE 1:  
SABINE COUNTY  
(ALL LOCATIONS)

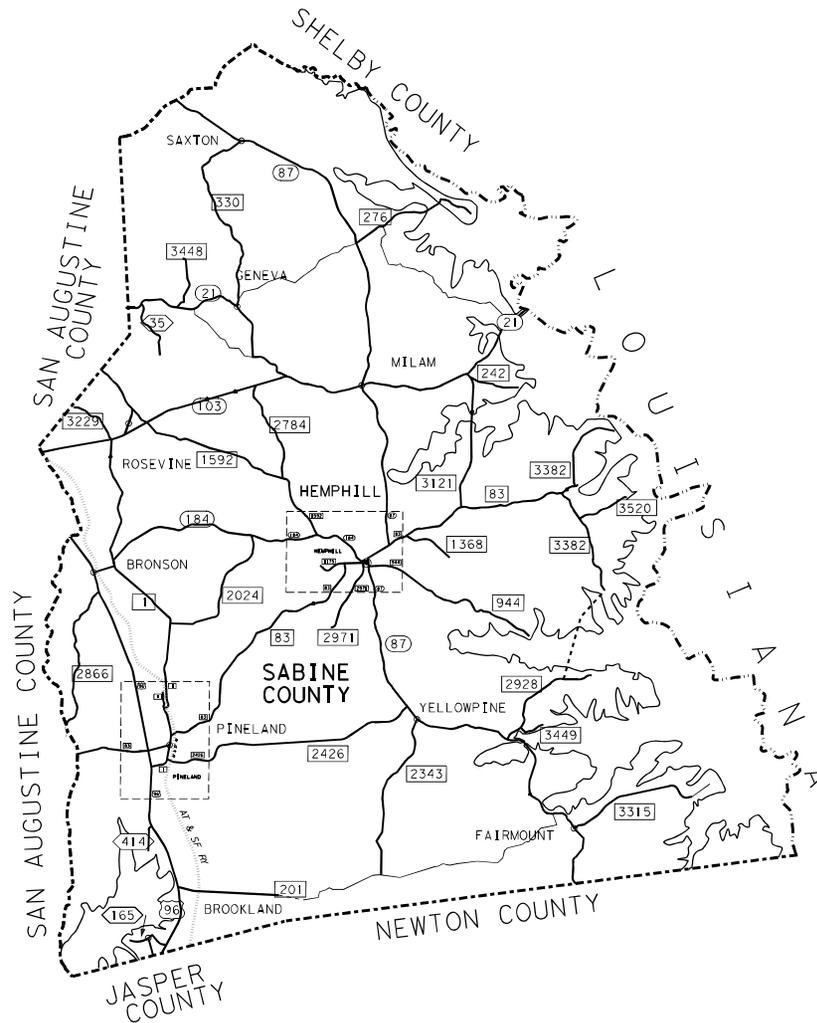


NOT TO SCALE

SITE MAP

© 2024  
Texas Department of Transportation®

CONT	SECT	JOB	HIGHWAY
6474	07	001	FM 83, ETC.
DIST		COUNTY	SHEET NO.
LFK		SABINE, ETC.	2

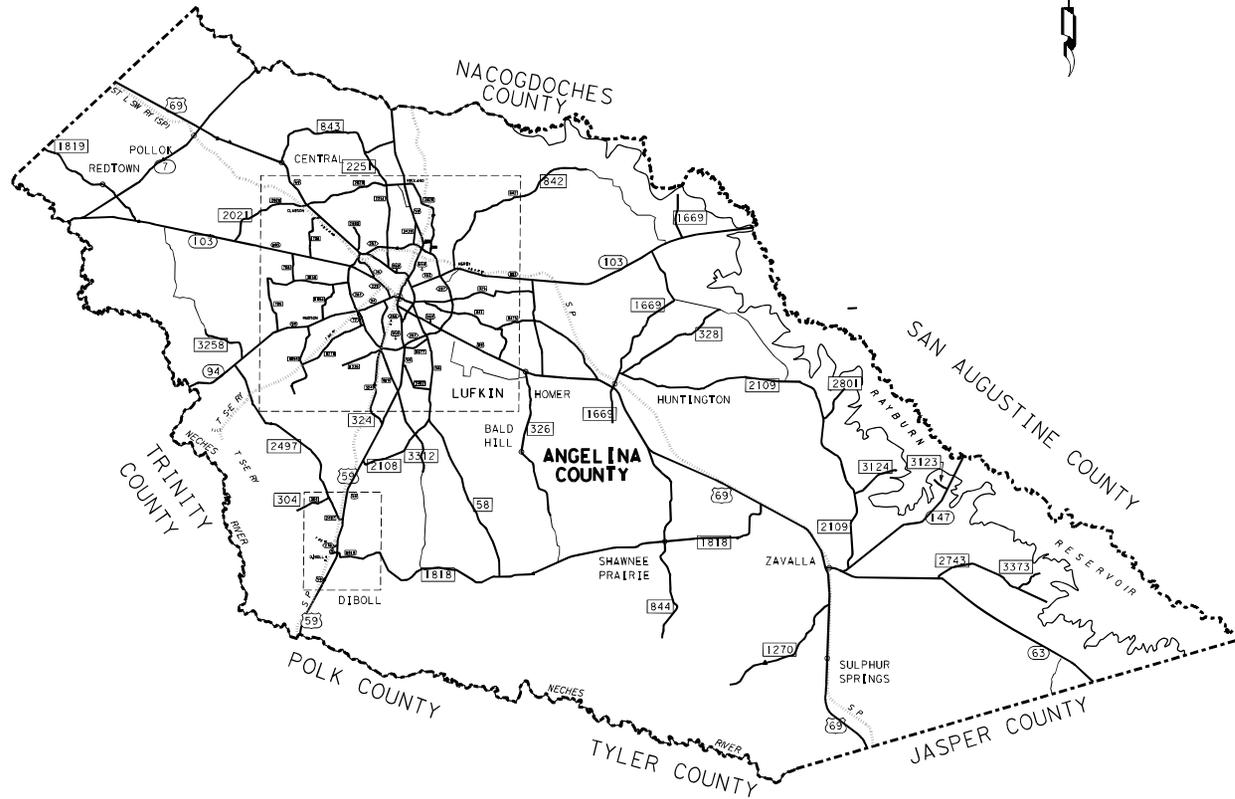

SITE 2:  
ANGELINA COUNTY  
(ALL LOCATIONS)


SITE MAP



CONT	SECT	JOB	HIGHWAY
6474	07	001	FM 83, ETC.
LFK	SABINE, ETC.		3



SITE 3:  
HOUSTON COUNTY  
(ALL LOCATIONS)

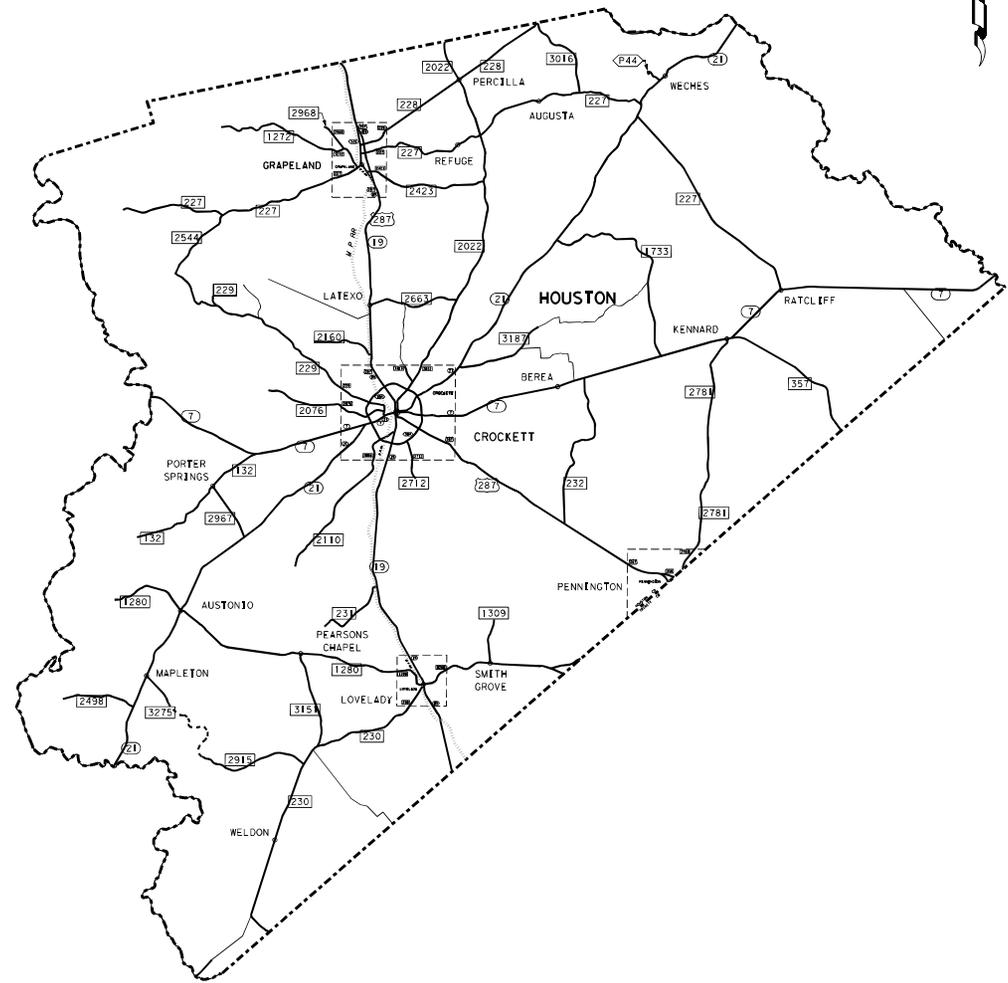

**SITE MAP**

© 2024  
 Texas Department of Transportation®

CONT	SECT	JOB	HIGHWAY
6474	07	001	FM 83, ETC.
DIST	COUNTY	SHEET NO.	
LFK	SABINE, ETC.	4	

**Project Number: 6474-07-001**

**Control: 6474-07-001**

**County: Sabine, ETC.**

**Highway: FM 83, ETC.**

**GENERAL NOTES:**

**PROJECT DESCRIPTION:** Provide Emulsion CRS-2P, CSS-1H and Cutback Asphalt RC-250 (materials only) at the plant for pickup and delivery to sites for use on state-maintained roadways within Sabine, Angelina and Houston County Maintenance Sections.

Preslie Gerland [Lauren.Perry@txdot.gov](mailto:Lauren.Perry@txdot.gov)  
 Jenna Hopper [Jenna.Lenderman@txdot.gov](mailto:Jenna.Lenderman@txdot.gov)

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

**TXDOT PROJECT SUPERVISORS:** All work on this contract will be scheduled and directed by the Maintenance Section Supervisor listed below. Payment will be made monthly for work completed and accepted according to specifications. All payment requests should be directed to the following Maintenance Section Supervisor listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Sabine	Kenneth Courville	300 FM 83 Hemphill, TX 75949	(409) 787-1751
Angelina	Steven Harris	1410 Kurth Drive Angelina, TX 75901	(936) 634-3414
Houston	Danny Luna	1123 East Loop 304 Crockett, Texas 75835	(936) 544-2264

**CONTRACT PROSECUTION:** Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures, and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

**SECTION 10.2 - INSTRUCTIONS TO BIDDERS:**

View plans on-line or download from the web at:

<https://www.txdot.gov/business/letting-bids/plans-online.html>

**Project Number: 6474-07-001**

**Control: 6474-07-001**

**County: Sabine, ETC.**

**Highway: FM 83, ETC.**

Order plans from any of the plan reproduction companies shown on the web at:

[http://www.dot.state.tx.us/business/contractors\\_consultants/repro\\_companies.htm](http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm)

Bid items on this contract are listed to establish a unit price for each item. Certain items listed in the proposal may not be used if it is determined by the Engineer that the work will not be required. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

**SECTION 10.4 - SCOPE OF WORK:**

The contract may be extended twice if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

**SECTION 10.8 - PROSECUTION AND PROGRESS:**

Contract Time - The number of calendar days for this project shall be 180 days or until contract funds are expended. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

For "pick-up" or "delivery" operations, have materials ready within the time frame listed on the work order, unless otherwise approved by the Engineer. Notify the Maintenance Section Supervisor when encountering any unforeseen delays.

Contractors will receive work orders for any needed quantities. These work orders will outline the quantities either being picked up at the plant or delivered to a designated work location. Each time work is requested on this contract, a work order will be completed. All material delivery tickets must include the Work Order number and be signed, dated, and list the arrival/departure times by the Department representative upon arrival at final delivery location. Failure to complete a work order will incur damages in accordance with Article 10.8.6. Actual damages incurred will be deducted from the work order payment and calculations will be provided upon request.

Providing material that does not meet the requirements of the specification does not constitute delivery and the Contractor may be required to remove all failed materials from the site. Applicable damages may continue to accrue until the Contractor delivers materials in full compliance to the designated site.

**Project Number: 6474-07-001**

**Control: 6474-07-001**

**County: Sabine, ETC.**

**Highway: FM 83, ETC.**

**SECTION 10.9 – MEASUREMENT AND PAYMENT:**

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

Trucks may be held for up to 2 hr at the jobsite at no additional expense to the Department. Written documentation of arrival will be used when calculating demurrage charges and included on an invoice submitted to the managing office. The Department will specify the arrival time and delivery frequency on the work order provided to the Contractor. If the Contractor arrives prior to the specified delivery time, the 2 hr hold will not begin until the arrival time specified on the work order.

Contractor will provide demurrage rate per truck, per 15-min increment, at the Coordination call prior to beginning work on the Contract.

Demurrage charges will be invoiced in 15-min increments, rounded down to the nearest whole increment. Contractor will be required to provide documentation for the demurrage per truck.

**ITEM 500: MOBILIZATION**

Mobilization does not apply to this materials contract.

**ITEM 8003: ASPHALTS, OILS AND EMULSIONS (MATERIALS ONLY)**

Provide asphalt cements, cutback and emulsified asphalts, performance-graded asphalt binders, and other miscellaneous asphalt materials as shown on the plans.

Delivery cost for each delivery will be calculated and included in the per gallon cost.

A transport truck shall be equipped with a transfer pump and required hoses to transfer material from the transport to the TxDOT storage tanks at the Maintenance Yard. Hose shall be compatible with a 3-inch cam lock type connection.

Failure to provide the required pump and hoses may result in rejection of the transported load.

This contract is for small quantities only. The contractor shall be able to provide agreed upon amounts as needed.

Contact the Maintenance Section Supervisor at least 1 hour prior to delivery.

The Contractor's driver shall report to the Maintenance Section Supervisor or their representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time of delivery and departure.

**Project Number: 6474-07-001**

**Control: 6474-07-001**

**County: Sabine, ETC.**

**Highway: FM 83, ETC.**

Unless otherwise specified, all delivery quantities ordered will be for the maximum quantity able to be received for storage.

For Delivery Operations

- Delivery times will be scheduled by the Maintenance Section Supervisor.

For Pickup Operations

- Contractor will have material ready for pick-up on the mutually agreed upon day and time.
- Contractor pick-up site will be no further than fifty (50) miles from the Sabine County Maintenance Yard.
- Contractor pick-up site will be no further than fifty (50) miles from the Angelina County Maintenance Yard.
- Contractor pick-up site will be no further than fifty (50) miles from the Houston County Maintenance Yard.



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6474-07-001

DISTRICT Lufkin  
HIGHWAY FM0083

COUNTY Sabine

CONTROL SECTION JOB				6474-07-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00212308			
COUNTY				Sabine			
HIGHWAY				FM0083			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8003-7015	RC-250 (PICKUP)	GAL	5,000.000		5,000.000	
	8003-7016	RC-250 (DEL)(SITE 1)	GAL	10,000.000		10,000.000	
	8003-7017	RC-250 (DEL)(SITE 2)	GAL	10,000.000		10,000.000	
	8003-7018	RC-250 (DEL)(SITE 3)	GAL	10,000.000		10,000.000	
	8003-7086	CSS-1H (PICKUP)	GAL	5,000.000		5,000.000	
	8003-7087	CSS-1H (DEL)(SITE 1)	GAL	10,000.000		10,000.000	
	8003-7088	CSS-1H (DEL)(SITE 2)	GAL	10,000.000		10,000.000	
	8003-7089	CSS-1H (DEL)(SITE 3)	GAL	10,000.000		10,000.000	
	8003-7113	CRS-2P (PICKUP)	GAL	5,000.000		5,000.000	
	8003-7114	CRS-2P (DEL)(SITE 1)	GAL	20,000.000		20,000.000	
	8003-7115	CRS-2P (DEL)(SITE 2)	GAL	20,000.000		20,000.000	
	8003-7116	CRS-2P (DEL)(SITE 3)	GAL	20,000.000		20,000.000	
	8003-7224	CSS-1H 30/70 (PICKUP)	GAL	5,000.000		5,000.000	
	8003-7225	CSS-1H 30/70 (DEL)(SITE 1)	GAL	5,000.000		5,000.000	
	8003-7226	CSS-1H 30/70 (DEL)(SITE 2)	GAL	5,000.000		5,000.000	
	8003-7227	CSS-1H 30/70 (DEL)(SITE 3)	GAL	5,000.000		5,000.000	

SUMMARY OF MATERIAL ITEMS									
ITEM NO.		8003-7015	8003-7016 8003-7017 8003-7018	8003-7086	8003-7087 8003-7088 8003-7089	8003-7224	8003-7225 8003-7226 8003-7227	8003-7113	8003-7114 8003-7115 8003-7116
COUNTY	HIGHWAY NO.	RC-250 (PICKUP)	RC-250 (DEL) (SITE 1) RC-250 (DEL) (SITE 2) RC-250 (DEL) (SITE 3)	CSS-1H (PICKUP)	CSS-1H (DEL) (SITE 1) CSS-1H (DEL) (SITE 2) CSS-1H (DEL) (SITE 3)	CSS-1H 30/70 (PICKUP)	CSS-1H 30/70 (DEL)(SITE 1) CSS-1H 30/70 (DEL)(SITE 2) CSS-1H 30/70 (DEL)(SITE 3)	CRS-2P (PICKUP)	CRS-2P (DEL)(SITE 1) CRS-2P (DEL)(SITE 2) CRS-2P (DEL)(SITE 3)
		GAL							
		5,000		5,000		5,000		5,000	
SABINE	SITE 1: SABINE COUNTY (ALL LOCATIONS)		10,000		10,000		5,000		20,000
ANGELINA	SITE 2: ANGELINA COUNTY (ALL LOCATIONS)		10,000		10,000		5,000		20,000
HOUSTON	SITE 3: HOUSTON COUNTY (ALL LOCATIONS)		10,000		10,000		5,000		20,000
<b>PROJECT TOTALS</b>		<b>5,000</b>	<b>30,000</b>	<b>5,000</b>	<b>30,000</b>	<b>5,000</b>	<b>15,000</b>	<b>5,000</b>	<b>60,000</b>

<b>QUANTITY SUMMARY</b>			
© 2024  Texas Department of Transportation®			
CONT	SECT	JOB	HIGHWAY
6474	07	001	FM 83, ETC.
DIST		COUNTY	SHEET NO.
LFK		SABINE, ETC.	7