

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION
PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT

PROJECT: 6472-29-001
COUNTY: MCLENNAN,ETC.
HIGHWAY: FM 185,ETC
CALLOUT CONTRACT

FOR THE PURCHASE OF MATERIALS ONLY: FLEX BASE, AGGREGATE, RIPRAP

Note: See project Summary Sheets for complete listing of limits, lengths, equations and exceptions

I HEREBY CERTIFY THAT THE CONSTRUCTION WORK ON THIS PROJECT WAS PERFORMED IN SUBSTANTIAL COMPLIANCE WITH THE CONTRACT

Index of Sheets:

- 2. Estimate & Quantity Sheet
- 3A-3E General Notes
- 4. Project Summary
- 5. Site 1 Quantity Summary & Bell County Map
- 6. Site 2 Quantity Summary & Coryell County Map
- 7. Site 3 Quantity Summary & Hamilton County Map
- 8. Site 4 Quantity Summary & Hill County Map
- 9. Site 5 Quantity Summary & Falls County Map
- 10. Site 6 Quantity Summary & Bosque County Map
- 11. Site 7 Quantity Summary & Limestone County Map
- 12. Site 8 Quantity Summary & McLennan County Map

CONTRACTOR NAME:

CONTRACTOR ADDRESS:

DATE WORK BEGAN:

DATE WORK COMPLETED:

DATE WORK ACCEPTED:

RECOMMENDED FOR LETTING:

APPROVED FOR LETTING:

DocuSigned by:
Stephen Michael Yasberg P.E. 10/14/2024
8597DEC5B49C452...
DIRECTOR OF MAINTENANCE

Signed by:
[Signature] 10/14/2024
B69BD796DD564C9...
DISTRICT ENGINEER (WACO)

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, SEPTEMBER 1, 2024 AND SPECIAL SPECIFICATION ITEMS INCLUDED

DISTRICT	COUNTY	HIGHWAY	CONTROL
WACO	MCLENNAN,ETC.	FM 185,ETC	6472-29-001

©2024 by Texas Dept. of Transportation
All Rights Reserved.

ESTIMATE SUMMARY					
ITEM CODE		DESCRIPTION	UNIT	TOTAL	
ITEM NO	DESC CODE			EST .	FINAL
8000	7106	AGGR (TY B GR 4) (DEL) (ST8)	TON	750	
8000	7115	AGGR (TY B GR 5) (DEL) (ST3)	TON	250	
8000	7119	AGGR (TY B GR 5) (DEL) (ST7)	TON	200	
8002	7499	TYPE 5 MOD AGG (DEL)(SITE 4)	CY	1,000	
8002	7501	TYPE 5 MOD AGG (DEL)(SITE 6)	CY	1,000	
8002	7610	SAND (DEL)(SITE 1)	TON	50	
8002	7611	SAND (DEL)(SITE 2)	TON	50	
8002	7613	SAND (DEL)(SITE 4)	TON	300	
8002	7616	SAND (DEL)(SITE 7)	TON	200	
8002	7617	SAND (DEL)(SITE 8)	TON	25	
8004	7028	RIPRAP(STONE PROT)(12 IN)(DEL)(ST6)	CY	1500	
8004	7029	RIPRAP(STONE PROT)(12 IN)(DEL)(ST7)	CY	400	
8004	7034	RIPRAP(STONE PROT)(18 IN)(DEL)(ST1)	CY	800	
8004	7035	RIPRAP(STONE PROT)(18 IN)(DEL)(ST2)	CY	1000	
8004	7036	RIPRAP(STONE PROT)(18 IN)(DEL)(ST3)	CY	1000	
8004	7037	RIPRAP(STONE PROT)(18 IN)(DEL)(ST4)	CY	2000	
8004	7040	RIPRAP(STONE PROT)(18 IN)(DEL)(ST7)	CY	500	
8004	7041	RIPRAP(STONE PROT)(18 IN)(DEL)(ST8)	CY	500	
8004	7048	RIPRAP(STONE PROT)(24 IN)(DEL)(ST4)	CY	4000	
8004	7049	RIPRAP(STONE PROT)(24 IN)(DEL)(ST5)	CY	2000	
8004	7050	RIPRAP(STONE PROT)(24 IN)(DEL)(ST6)	CY	1000	
8004	7051	RIPRAP(STONE PROT)(24 IN)(DEL)(ST7)	CY	500	
8004	7052	RIPRAP(STONE PROT)(24 IN)(DEL)(ST8)	CY	250	
8010	7022	FL BS(TY A GR 1-2)(DEL)(ST2)	TON	500	
8010	7023	FL BS(TY A GR 1-2)(DEL)(ST3)	TON	6125	
8010	7024	FL BS(TY A GR 1-2)(DEL)(ST4)	TON	3000	
8010	7027	FL BS(TY A GR 1-2)(DEL)(ST7)	TON	300	
8010	7028	FL BS(TY A GR 1-2)(DEL)(ST8)	TON	500	
ESTIMATE & QUANTITY SHEET					
DISTRICT		COUNTY		PROJECT NO.	SHEET NO.
WACO		MCLENNAN,ETC.		6472-29-001	2

COUNTY: McLENNAN, ETC.

HIGHWAY: FM 185, ETC.

MMC: 6472-29-001

GENERAL

This is a non-site-specific contract for supply of Flex Base, Aggregate for Surface Treatments, Cement Treated Base and Riprap Rock materials at various sites throughout the Waco District, as specified in the plans.

PRE-BID QUESTIONS

Contractor questions on this project are to be emailed to the Waco District at the following address:

Stephen Kasberg - Wacoprebid@txdot.gov, 254-867-2780, 100 S. Loop Dr., Waco, TX
Carmen Chau - Wacoprebid@txdot.gov, 254-867-2794, 100 S. Loop Dr., Waco, TX

Contractor questions will be accepted through email, phone, and in person by the above individuals. Questions may also be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

GENERAL NOTES

ITEM 10.4: SCOPE OF WORK

In accordance with Article 10.4.3.1, this contract may be extended up to 365 days, if mutually agreed upon.

ITEM 10.5: CONTROL OF THE WORK

Prior to beginning operations, the department will arrange a coordination call between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep travelled surfaces used in hauling operations free of dirt or other materials

COUNTY: McLENNAN, ETC.

HIGHWAY: FM 185, ETC.

MMC: 6472-29-001

For this contract, the office of record is the Maintenance Office listed below. All work will be coordinated through this office and with the Maintenance Supervisor or his designated representative.

Maint. Supervisor	Telephone Number	Maint. Office Location
Thomas Willis	254-772-2890	7479 Bagby Ave. Waco, TX 76712

Contact information for the Maintenance Section Supervisors in each county is listed below:

COUNTY	ADDRESS	MAINTENANCE SUPERVISOR	TELEPHONE NUMBER
Bell	410 West Loop 121, BELTON, TX 76513	Jerrold Swift	254-939-3691
Bosque	9167 SH 6 South, MERIDIAN, TX 76663	Christopher Niedorf	254-435-2258
Coryell	3502 East Main, GATESVILLE, TX 76528	Waylon Holden	254-865-5716
Falls	5092 Highway 7 East, MARLIN, TX 76661	Dennis Cheyne	254-833-3462
Hamilton	1301 East Main (SH 36) HAMILTON, TX 76531	Timothy Parum	254-386-5512
Hill	1400 S Abbott Ave (US 77) HILLSBORO, TX 76645	Eric Olivas	254-582-5411
Limestone	3229 HWYY 14 MEXIA, TX 76667	Roger Brooks	254-562-2900
McLennan	7479 Bagby Ave, WACO, TX 76712	Thomas Willis	254-772-1200

COUNTY: MCLENNAN, ETC.

HIGHWAY: FM 185, ETC.

MMC: 6472-29-001

Sites as described in this contract include any location in each entire county, delivery locations will be specified on material orders.

SITE NO.	LOCATION/COUNTY
1	BELL
2	CORYELL
3	HAMILTON
4	HILL
5	FALLS
6	BOSQUE
7	LIMESTONE
8	MCLENNAN

ITEM 10.6: CONTROL OF MATERIALS

This proposed Contract will not include federal funds. Buy Texas stipulations apply in accordance with 10.6.1.2 “Buy Texas”.

This contract will not pay for Material on Hand.

ITEM 10.8: PROSECUTION AND PROGRESS

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process and/or execute all contracts at the same time.

There are 365 calendar days on this contract. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

Material requests shall be issued by work order. Each work order shall specify items, quantity and location for material to be delivered along with the starting delivery date of the material.

Time requirements for each Material Order will be indicated on each individual order. Contractor will be given a minimum of 48 hours for Delivery to successfully complete each Material Order.

In Accordance with Article 10.8.6 “Late Delivery Damages,” the department will seek demurrage and actual damages will be charged.

Notify the Maintenance Supervisor or Assistant when encountering any unforeseen delays.

COUNTY: McLENNAN, ETC.

HIGHWAY: FM 185, ETC.

MMC: 6472-29-001

ITEM 10.9: MEASUREMENT AND PAYMENT

Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in the plans will be requested for delivery.

ITEM 500: MOBILIZATION

Mobilization does not apply to this materials contract.

ITEM 8000: AGGREGATES FOR SURFACE TREATMENTS

Provide (Material) and Deliver Aggregate for Surface Treatment material Monday through Friday during daylight hours only.

Material provided shall be SAC B or better.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each delivery must be accompanied by a material ticket.

Contractor's driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

ITEM 8004: RIPRAP

Provide (Material) and Deliver Riprap Rock material Monday through Friday during daylight hours only.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each delivery must be accompanied by a material ticket.

Contractor's driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

ITEM 8010: FLEXIBLE BASE

Minimum PI is equal to three (3) for all grades, or a minimum Bar Linear Shrinkage of 2%.

RAP may not be incorporated into Flexbase Material

Provide (Material) and Deliver Flexbase Material Monday through Friday during daylight hours only.

COUNTY: MCLENNAN, ETC.

HIGHWAY: FM 185, ETC.


MMC: 6472-29-001

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each delivery must be accompanied by a material ticket.


Contractor's driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

SITE NO.	LOCATION/COUNTY
1	BELL
2	CORYELL
3	HAMILTON
4	HILL
5	FALLS
6	BOSQUE
7	LIMESTONE
8	MCLENNAN

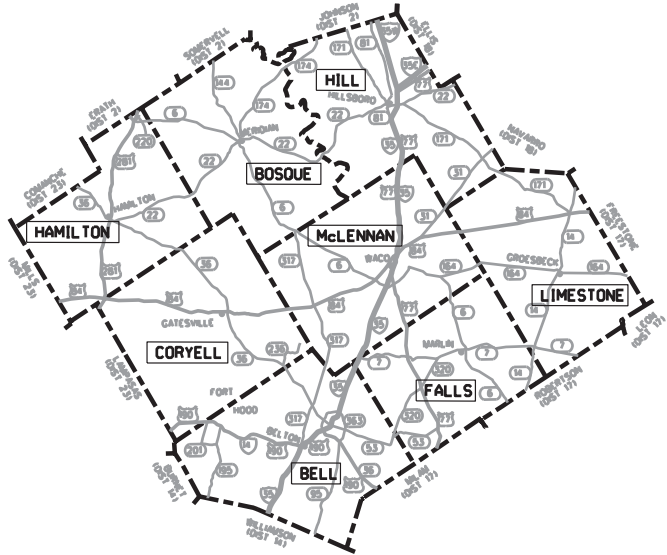

ITEM CODE		DESCRIPTION	UNIT	TOTAL	
ITEM NO	DESC CODE			EST.	FINAL
8000	7106	AGGR (TY B GR 4) (DEL) (ST8)	TON	750	
8000	7115	AGGR (TY B GR 5) (DEL) (ST3)	TON	250	
8000	7119	AGGR (TY B GR 5) (DEL) (ST7)	TON	200	
8002	7499	TYPE 5 MOD AGG (DEL)(SITE 4)	CY	1,000	
8002	7501	TYPE 5 MOD AGG (DEL)(SITE 6)	CY	1,000	
8002	7610	SAND (DEL)(SITE 1)	TON	50	
8002	7611	SAND (DEL)(SITE 2)	TON	50	
8002	7613	SAND (DEL)(SITE 4)	TON	300	
8002	7616	SAND (DEL)(SITE 7)	TON	200	
8002	7617	SAND (DEL)(SITE 8)	TON	25	
8004	7028	RIPRAP(STONE PROT)(12 IN)(DEL)(ST6)	CY	1500	
8004	7029	RIPRAP(STONE PROT)(12 IN)(DEL)(ST7)	CY	400	
8004	7034	RIPRAP(STONE PROT)(18 IN)(DEL)(ST1)	CY	800	
8004	7035	RIPRAP(STONE PROT)(18 IN)(DEL)(ST2)	CY	1000	
8004	7036	RIPRAP(STONE PROT)(18 IN)(DEL)(ST3)	CY	1000	
8004	7037	RIPRAP(STONE PROT)(18 IN)(DEL)(ST4)	CY	2000	
8004	7040	RIPRAP(STONE PROT)(18 IN)(DEL)(ST7)	CY	500	
8004	7041	RIPRAP(STONE PROT)(18 IN)(DEL)(ST8)	CY	500	
8004	7048	RIPRAP(STONE PROT)(24 IN)(DEL)(ST4)	CY	4000	
8004	7049	RIPRAP(STONE PROT)(24 IN)(DEL)(ST5)	CY	2000	
8004	7050	RIPRAP(STONE PROT)(24 IN)(DEL)(ST6)	CY	1000	
8004	7051	RIPRAP(STONE PROT)(24 IN)(DEL)(ST7)	CY	500	
8004	7052	RIPRAP(STONE PROT)(24 IN)(DEL)(ST8)	CY	250	
8010	7022	FL BS(TY A GR 1-2)(DEL)(ST2)	TON	500	
8010	7023	FL BS(TY A GR 1-2)(DEL)(ST3)	TON	6125	
8010	7024	FL BS(TY A GR 1-2)(DEL)(ST4)	TON	3000	
8010	7027	FL BS(TY A GR 1-2)(DEL)(ST7)	TON	300	
8010	7028	FL BS(TY A GR 1-2)(DEL)(ST8)	TON	500	

10/10/2024 T:\WACMAINT\MMC_Contracts\FlexBase_Aggregate_RipReprock\FY2025\CAD\8.5x11\Flex_Base.dgn




Texas Department of Transportation

PROJECT SUMMARY & WACO DIST MAP


SHEET 1 OF 1

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST		COUNTY	SHEET NO.
WAC		MCLENNAN, ETC.	4	

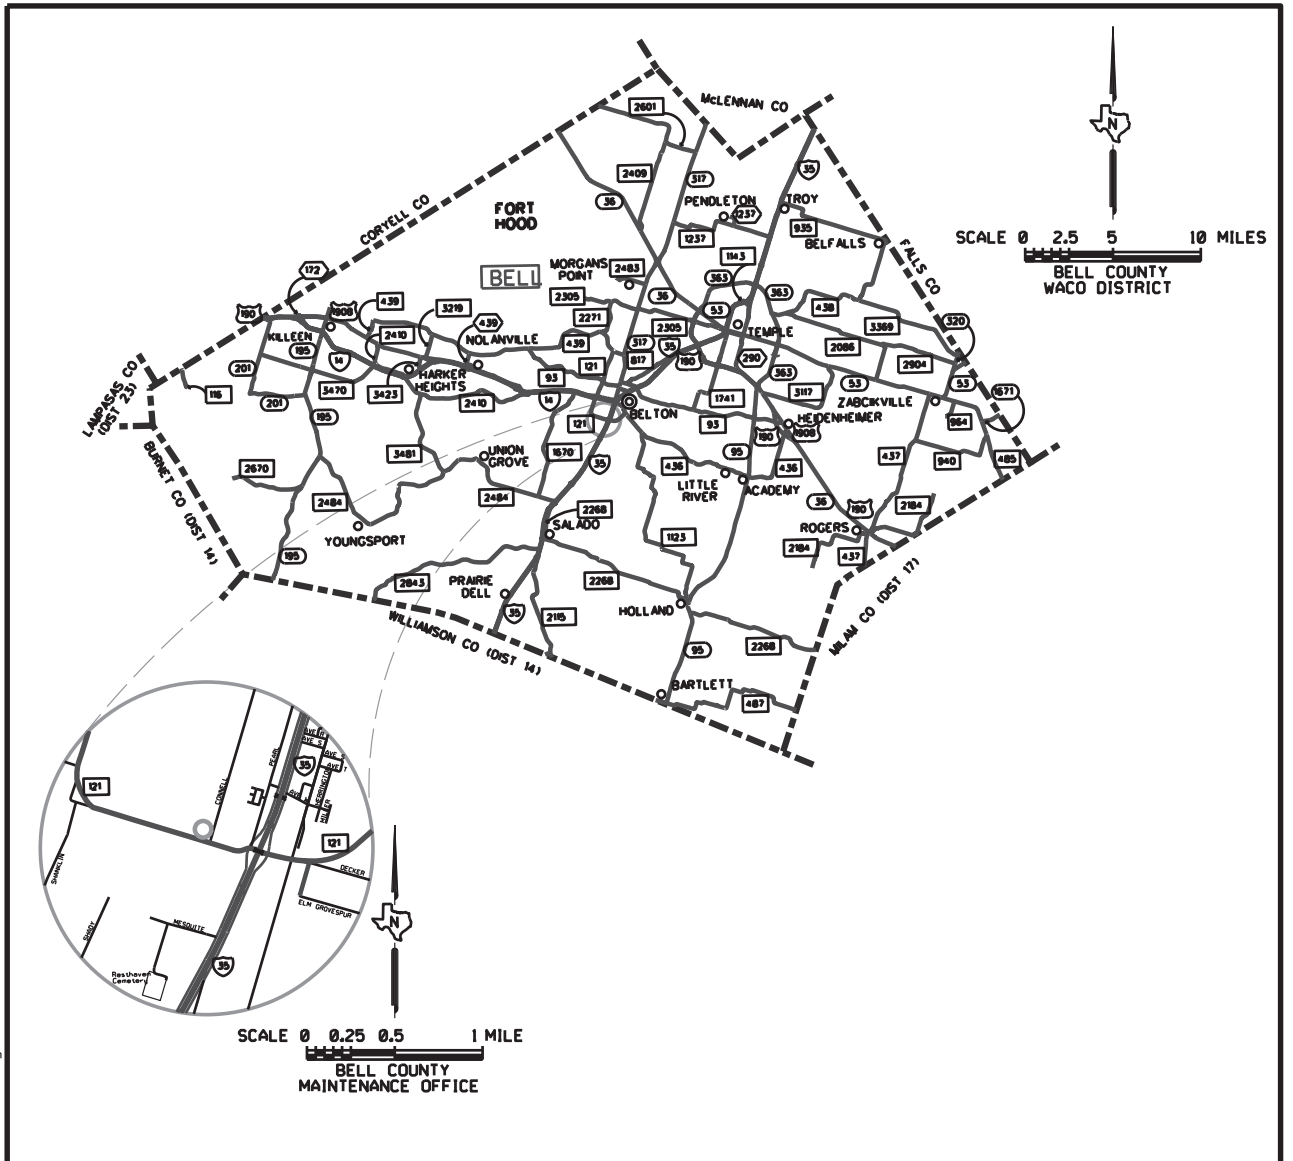

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8002	7610	SAND (DEL)(SITE 1)	TON	50
8004	7034	RIPRAP(STONE PROT)(18 IN)(DEL)(ST1)	CY	800


10/10/2024 T:\WACMAINT\MMC_Contracts\FlexBase_Aggregate_RipReprock\FY2025\CAD\8.5x11\Flex_Base.dgn

 Texas Department of Transportation

**SITE 1
QUANTITY SUMMARY
&
BELL COUNTY MAP**


SHEET 1 OF 8

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST		COUNTY	SHEET NO.
	WAC		MCLENNAN, ETC.	5

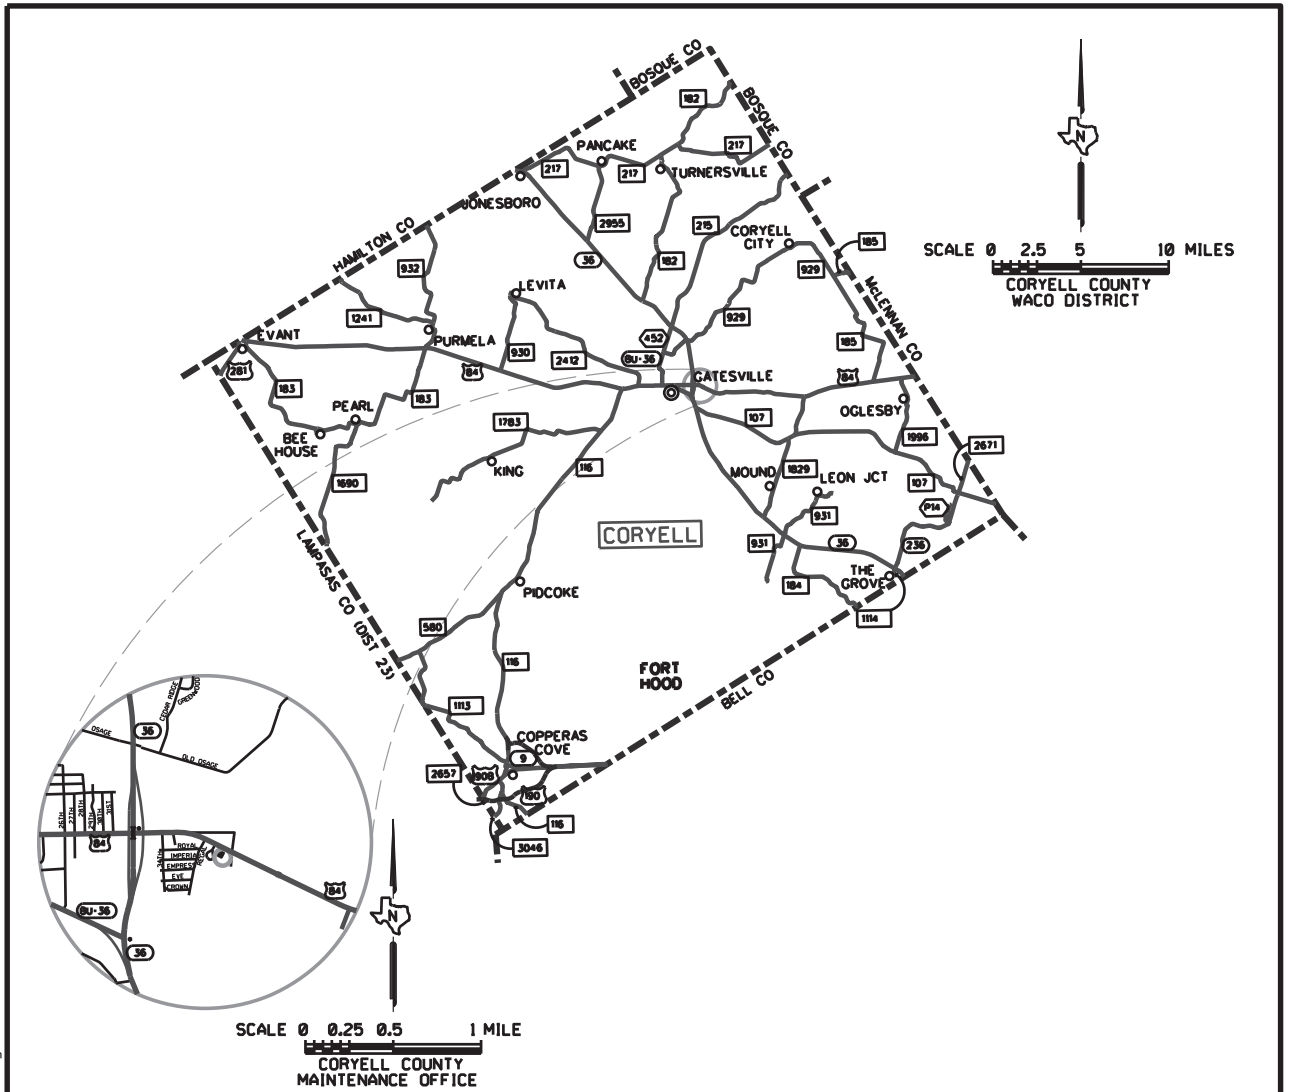

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8002	7611	SAND (DEL)(SITE 2)	TON	50
8004	7035	RIPRAP(STONE PROT)(18 IN)(DEL)(ST2)	CY	1000
8010	7022	FL BS(TY A GR 1-2)(DEL)(ST2)	TON	500


10/10/2024 T:\WACMAINT\MMC_Contracts\FlexBase_Aggregate_RipRprock\FY2025\CAD\8.5x11 Flex Base.dgn

 Texas Department of Transportation

**SITE 2
QUANTITY SUMMARY
&
CORYELL COUNTY MAP**


SHEET 2 OF 8

© TxDOT 2024		CONT	SECT	JOB	HIGHWAY
		6472	29	001	FM 185, ETC
		DIST	COUNTY	SHEET NO.	
		WAC	MCLENNAN, ETC.	6	

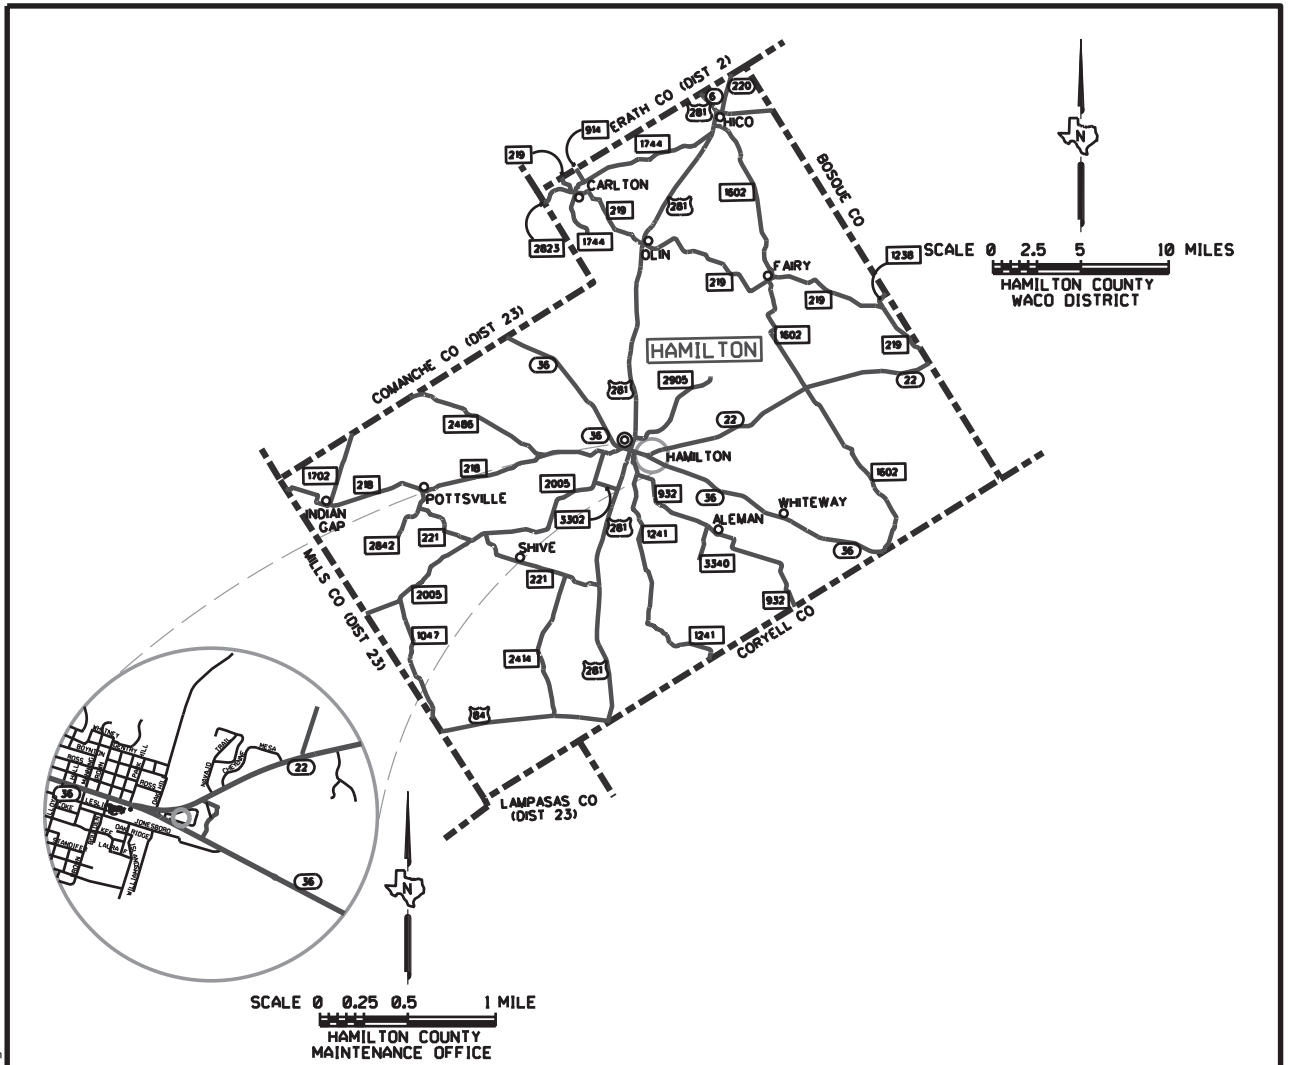

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8000	7115	AGGR (TY B GR 5) (DEL) (ST3)	TON	250
8004	7036	RIPRAP(STONE PROT)(18 IN)(DEL)(ST3)	CY	1000
8010	7023	FL BS(TY A GR 1-2)(DEL)(ST3)	TON	6125

10/10/2024 T:\WACMAINT\MMC_Contracts\FlexBase_Aggregate-RipReprock\FY2025\CAD\8.5x11\Flex_Base.dgn




Texas Department of Transportation


SITE 3 QUANTITY SUMMARY & HAMILTON COUNTY MAP

SHEET 3 OF 8

© TxDOT 2024		CONT	SECT	JOB	HIGHWAY
6472	29	001	FM	185, ETC	
DIST		COUNTY		SHEET NO.	
WAC		MCLENNAN, ETC.		7	

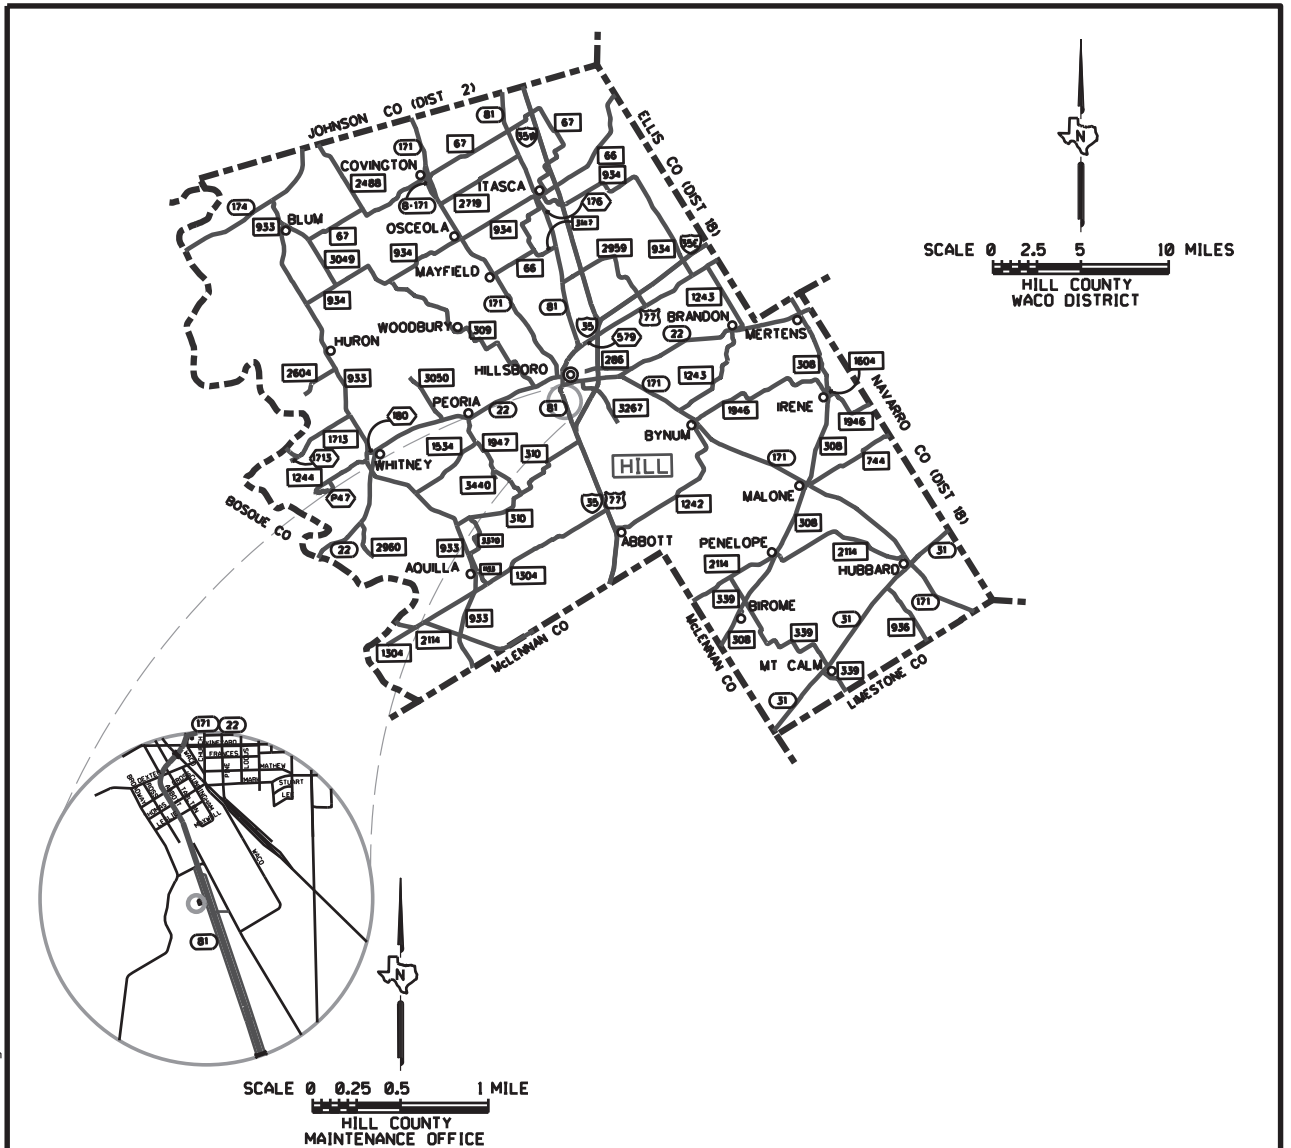

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8002	7499	TYPE 5 MOD AGG (DEL)(SITE 4)	CY	1000
8002	7613	SAND (DEL)(SITE 4)	TON	300
8004	7037	RIPRAP(STONE PROT)(18 IN)(DEL)(ST4)	CY	2000
8004	7048	RIPRAP(STONE PROT)(24 IN)(DEL)(ST4)	CY	4000
8010	7024	FL BS(TY A GR 1-2)(DEL)(ST4)	TON	3000




**SITE 4
QUANTITY SUMMARY
&
HILL COUNTY MAP**

SHEET 4 OF 8


© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST		COUNTY	SHEET NO.
	WAC		MCLENNAN, ETC.	8

10/10/2024
 T:\WACMAINT\MCC_Contracts\FlexBase_Aggregate_RipRprock\FY2025\CAD\8.5x11 Flex Base.dgn

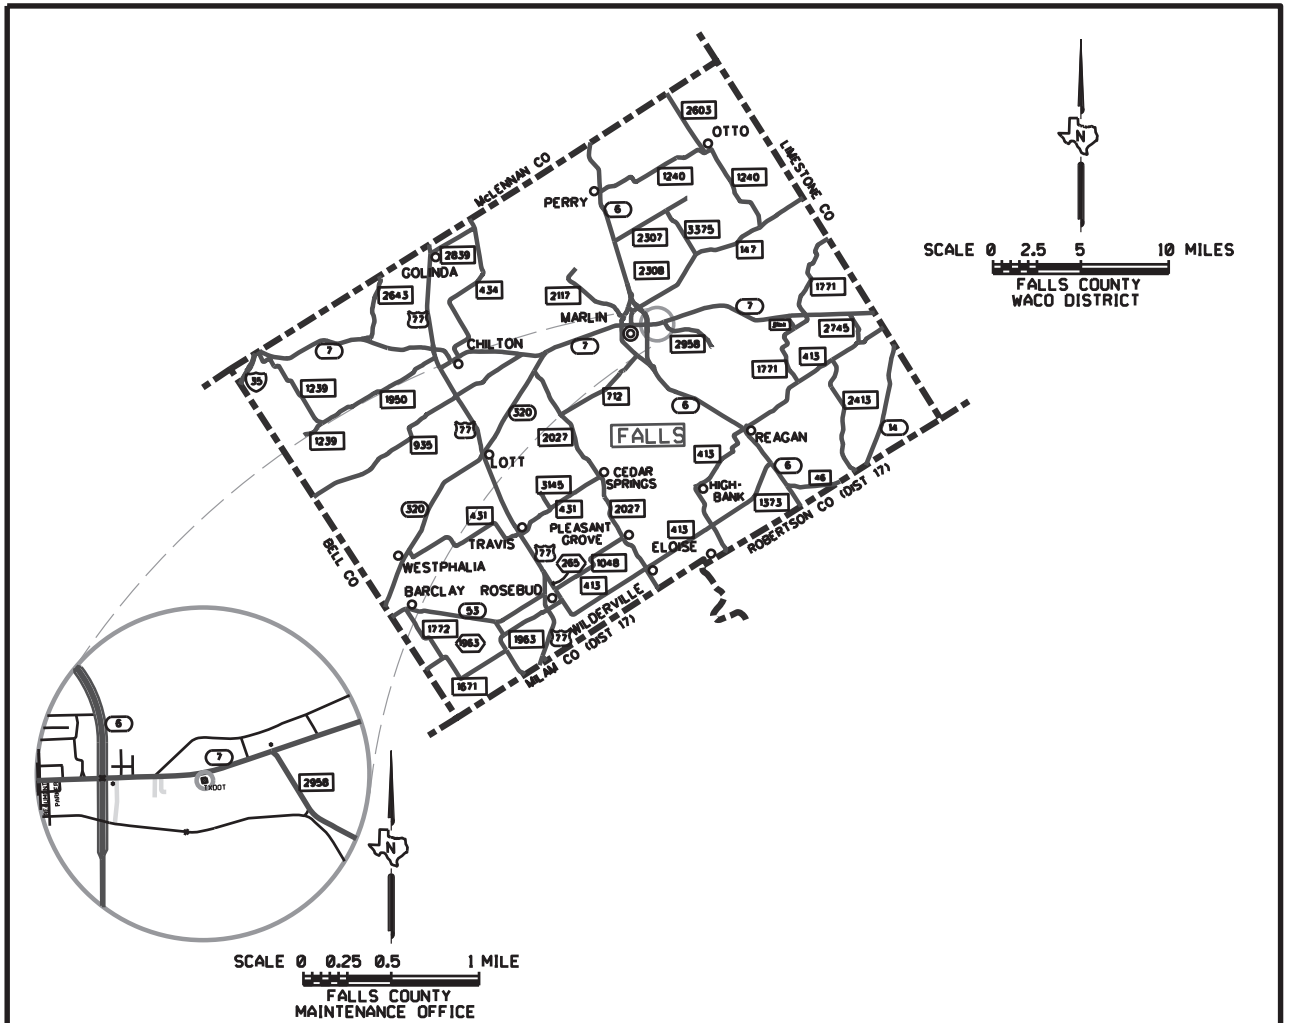

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8004	7049	RIPRAP(STONE PROT)(24 IN)(DEL)(ST5)	CY	2000


10/10/2024 T:\WACMAINT\MCC_Contracts\FlexBase_Aggregate_RipReprock\FY2025\CAD\8.5x11.Flex_Base.dgn



**SITE 5
QUANTITY SUMMARY
&
FALLS COUNTY MAP**


SHEET 5 OF 8

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST	COUNTY	SHEET NO.	
	WAC	MCLENNAN, ETC.	9	

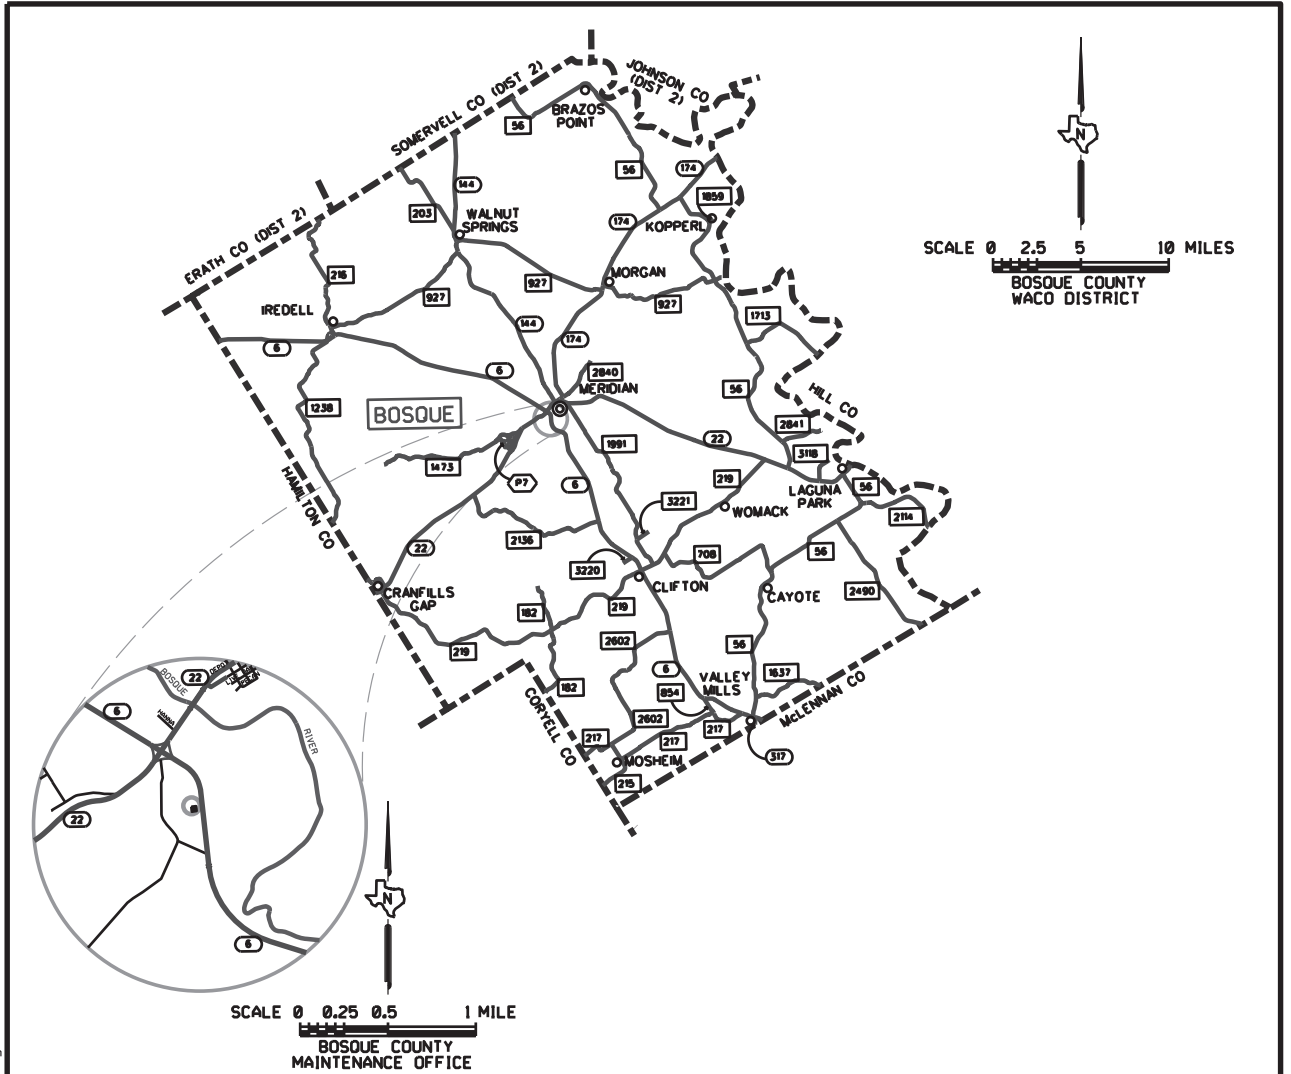

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8002	7501	TYPE 5 MOD AGG (DEL)(SITE 6)	CY	1000
8004	7028	RIPRAP(STONE PROT)(12 IN)(DEL)(ST6)	CY	1500
8004	7050	RIPRAP(STONE PROT)(24 IN)(DEL)(ST6)	CY	1000


10/10/2024 T:\WACMAINT\MCC_Contracts\FlexBase_Aggregate-RipReprock\FY2025\CAD\8.5x11\Flex_Base.dgn


Texas Department of Transportation


SITE 6
 QUANTITY SUMMARY
 &
 BOSQUE COUNTY MAP

SHEET 6 OF 8

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST		COUNTY	SHEET NO.
	WAC		MCLENNAN, ETC.	10

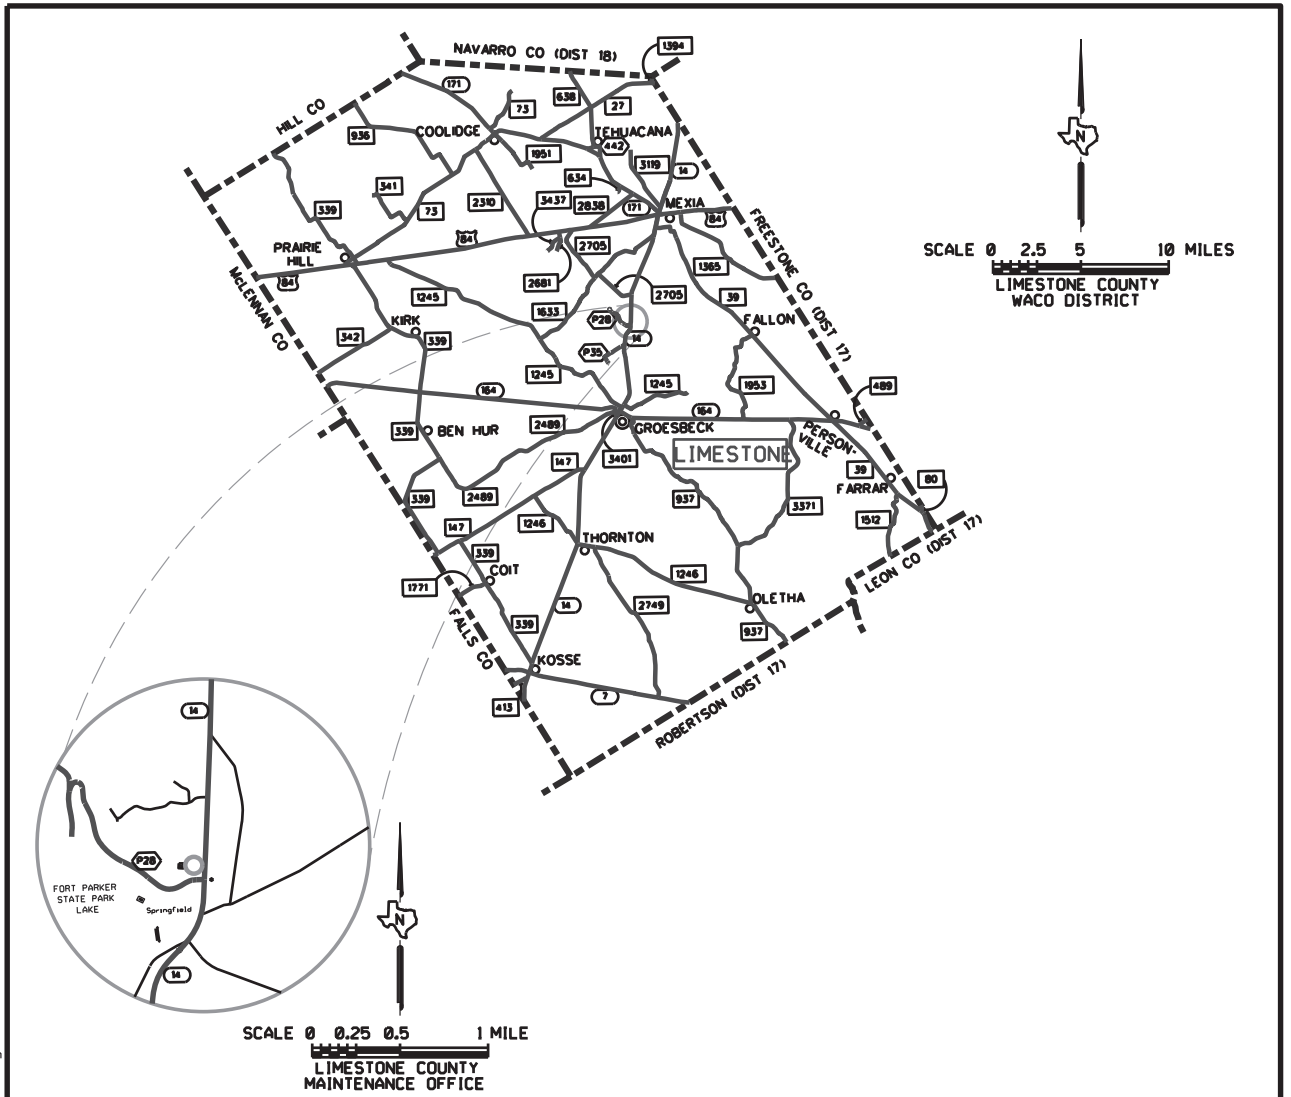

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8000	7119	AGGR (TY B GR 5) (DEL) (ST7)	TON	200
8002	7616	SAND (DEL)(SITE 7)	TON	200
8004	7029	RIPRAP(STONE PROT)(12 IN)(DEL)(ST7)	CY	400
8004	7040	RIPRAP(STONE PROT)(18 IN)(DEL)(ST7)	CY	500
8004	7051	RIPRAP(STONE PROT)(24 IN)(DEL)(ST7)	CY	500
8010	7027	FL BS(TY A GR 1-2)(DEL)(ST7)	TON	300




Texas Department of Transportation

SITE 7
QUANTITY SUMMARY
&
LIMESTONE COUNTY MAP


SHEET 7 OF 8

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST	COUNTY		SHEET NO.
	WAC	MCLENNAN, ETC.		11

10/10/2024 T:\WACMAINT\MCC_Contracts\FlexBase_Aggregate_RipReprock\FY2025\CAD\8.5x11.Flex_Base.dgn

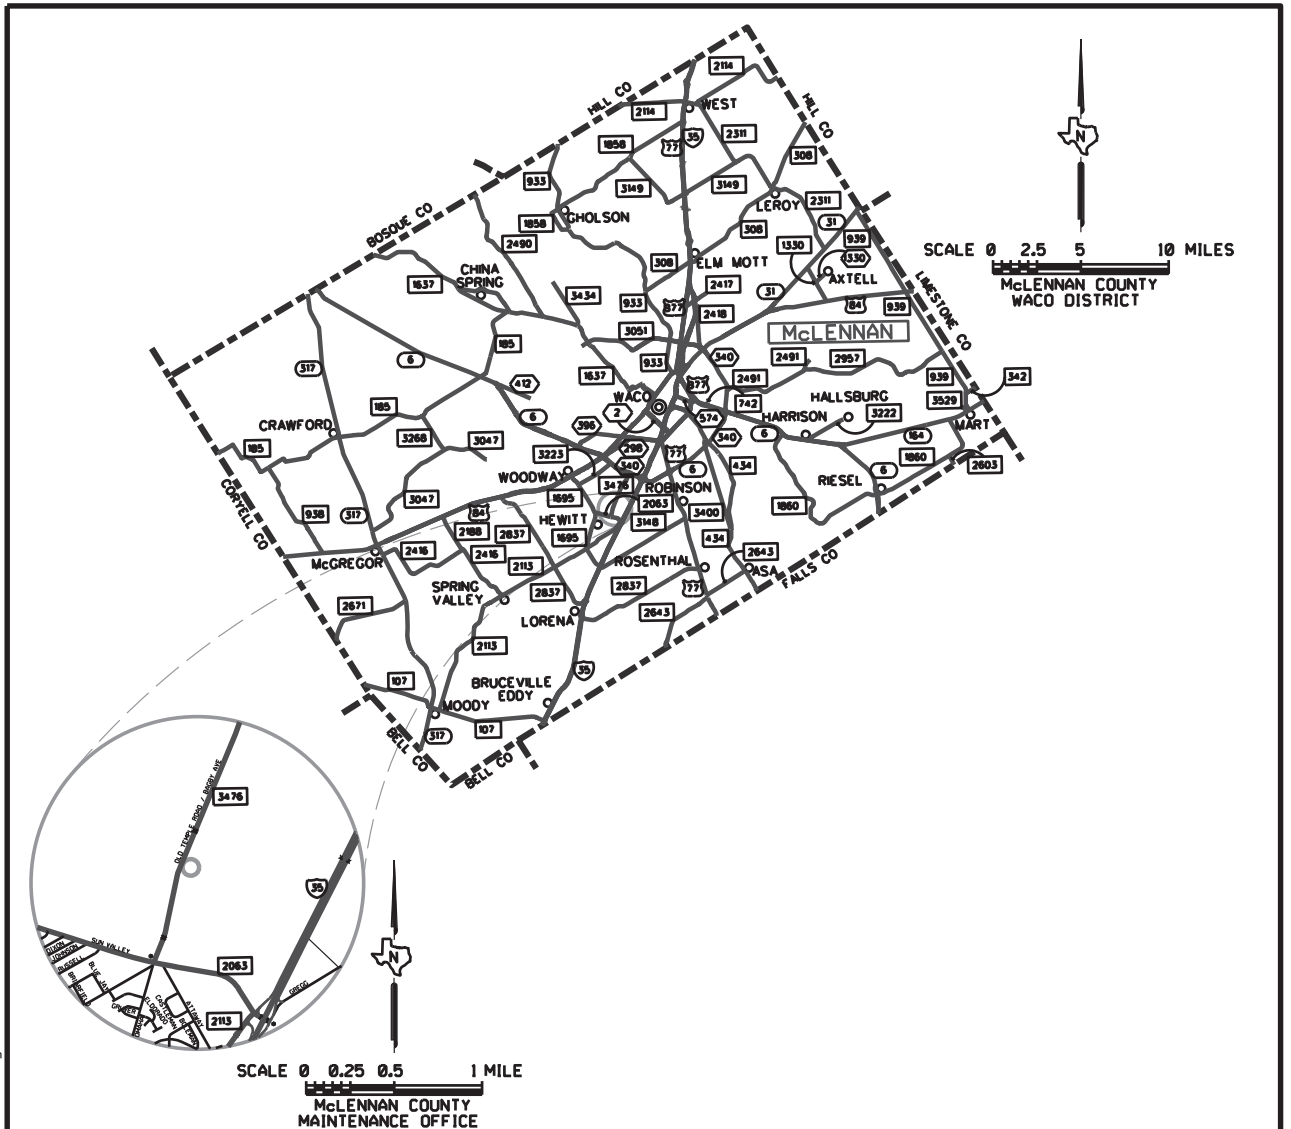

ITEM NO.	DESC. CODE	ITEM DESCRIPTION	UNIT	QTY
8000	7106	AGGR (TY B GR 4) (DEL) (ST8)	TON	750
8002	7617	SAND (DEL)(SITE 8)	TON	25
8004	7041	RIPRAP(STONE PROT)(18 IN)(DEL)(ST8)	CY	500
8004	7052	RIPRAP(STONE PROT)(24 IN)(DEL)(ST8)	CY	250
8010	7028	FL BS(TY A GR 1-2)(DEL)(ST8)	TON	500



**SITE 8
QUANTITY SUMMARY
&
MCLENNAN COUNTY MAP**

SHEET 8 OF 8

© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6472	29	001	FM 185, ETC
	DIST		COUNTY	SHEET NO.
	WAC		MCLENNAN, ETC.	12

10/10/2024
 T:\WACMAINT\MCC_Contracts\FlexBase_Aggregate_RipReprock\FY2025\CAD\8.5x11.Flex_Base.dgn