

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: SPECIAL LABOR PROVISIONS FOR STATE PROJECTS (000---008).

SFILES SDATES

FILE:





©2023 by Texas Department of Transportation; all rights reserved.

AREA ENGIN

			CONT SECT	JOB	HIGHWAY
			1200 03		FM 973
			DIST	COUNTY	SHEET NO.
			AUS	TRAVIS	1
			DESIG	N_SPEE	ן ח
			MAIN LAN	ES: N/	A
			<u>A.D.T</u>	•	
			2021: 1	1,002 VPD	
				5,403 VPD	
				,	
		EINAL	PLAN	c	
		1 INAL	ILAN	5	
	DATE OF	LETTING:			
	DATE WO	ORK BEGAN:			-
	DATE WO	ORK COMPLETED AND	ACCEPTED:		
	FINAL (	CONTRACT COST: \$_			
	CONTRAC	TOR:			
					- 13
	LIST OF	APPROVED CHANGE	ORDERS:		
1942					
14. 14.2					
10 A.					
3.					
1		IFY THAT THIS PROJ			
		NSTRUCTED IN SUBSTANCE WITH THE FINA		т	
Į.		ND SPECIFICATIONS			
45 <sup>75</sup>					
				P.E	
				DA	ATE
133					
				1/20/202	2 1
				1/30/202	23
		FOR LETTING:			
		DocuSigned by:			
		MARMA	Celos	llos P.E	
		E1816167B5C741			-
		DISTRIC	T DESIGN	ENGINEER	
1/29/2023				1/30/202	23
1, 73/ 5053		APPROVED		1, 30/20	
		FOR LETTING:		1 <del>2</del>	
		DocuSigned by:			
	0-		XI		
mess 1	3	- Harthu Ashly-	Ng		
- V	<u> </u>	8912AF18F45A416	9		
IEER			OF TRANS	PORTATION	
		FLANNI	NO & DEVE		

SHEE TS		
Ψ		<u>GENERAL</u>
S	1	TITLE SHEET
벙	2	INDEX OF SHEETS
	3-4	PROJECT LAYOUT - FM 973 AND MURCHISON SIGNAL INSTALLATION
<b>I NDEX</b>	-	
		GENERAL NOTES
8	6, 6A	ESTIMATE & QUANTITY
S	7	SUMMARY OF QUANTITIES
Masters/02	7A-7B	ASSET MAINTENANCE
ŝ	12 10	
ž		ROADWAY_DEIAILS
e S	8	INTERSECTION REMOVAL DETAILS
ē	9	INTERSECTION LAYOUT - FM 973 AND MURCHISON ST
ē		TRAFFIC_SIGNAL_DETAILS
e.	10	EXISTING CONDITION LAYOUT
£		
ē	11	PROPOSED CONDITION LAYOUT
ě	12	BORING AND TRENCHING DETAILS
Š	13	TRAFFIC SIGNAL DETAILS
Arrangement \Reference	14	SIGNAL ELEVATIONS FOR MAST ARM POLES
ě	15	TRAFFIC SIGNAL NOTES
ŝ	16	PROPOSED FLASHING BEACON ASSEMBLY
$\leq$		PAVEMENT MARKING DETAILS
2	17	SIGNING AND PAVEMENT MARKING LAYOUT
General NSheet		
ŏ		ENVIRONMENTAL ISSUES
-	18	ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS
Set \1.		STANDARDS
	19-30	BC(1)-21 THROUGH BC(12)-21
9	31	TCP (2-1) -18
Design∖Plan	32	TCP (3-1) - 13
5		
°,	33	TCP (3-3) - 1 4
	34	CCCG-22
2	35	ED(1)-14
Projects/120003064\4	36	ED(2)-14
ģ	37	ED (3) -14
õ	38	ED(4)-14
8		
7	39	ED (5) -14
0 +	40	ED(6)-14
e	41	ED(7)-14
5	42	ED (8) - 14
	43	ED (9) - 14
9	44	ED(10)-14
ŝ		
2	45	ED(11)-14
AUS\Design	46	ED(12)-14
3	47	LUM-A-12
	48	MA-C-12
2	49	MA-D-12
ť	50	MA-DPD-20
eur		
SCL		PED-18
2	55	PM(1)-22
E	56	PM(2)-22
ĕ	57	PM(3)-22
E	58	PM(4)-22A
ō	59	RFBA-13
Ē,	60-61	SMA-80(1)-12 & SMA-80(2)-12
Γ	62-66	LMA(1)-12 THROUGHT LMA(5)-12
sec	67	SMD (GEN) -08
-	68	SPRF BA (1) - 13
ς τ	69	TS-BP-20
0.0		
Ъ	70	TS-CF-21
, fl	71	TS-FD-12
ΪĂ	72	WZ (BRK) - 13
비	73-74	WZ(BTS-1)-13 & WZ(BTS-2)-13
pw://txdot.projectwiseonline.com: TXD0T4\Documents\14	75	WZ (STPM) - 1 3
	76	MCPSWMD-19 (AUS)
ILE	10	
-		

#### THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY SUPERVISION AND ARE APPLICABLE TO THIS PROJECT.







1/20/2023


DATE

N	Austin District North Travis Area Office							
<b>Texas</b> Department of Transportation								
	INDEX OF SHEETS							
© 2022	2022 CONT SECT JOB HIGHWAY							
22	1200	03	064	FM 973				
	DIST		COUNTY	SHEET NO.				
	AUS		TRAVIS	2				

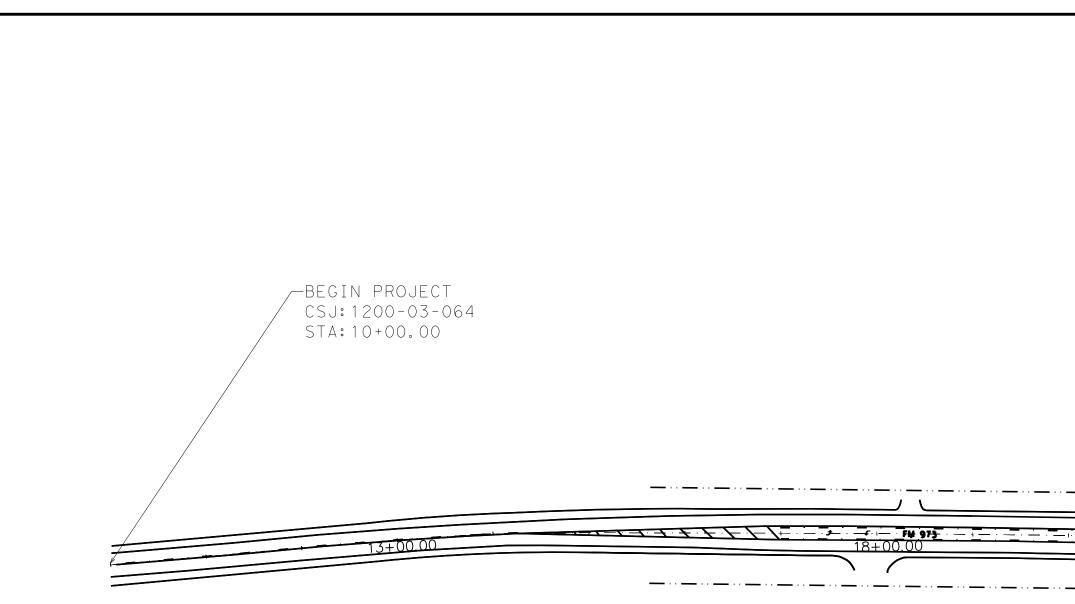

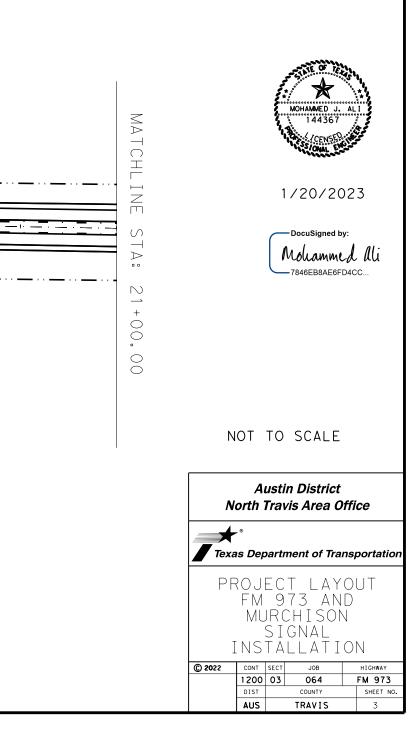

-z~

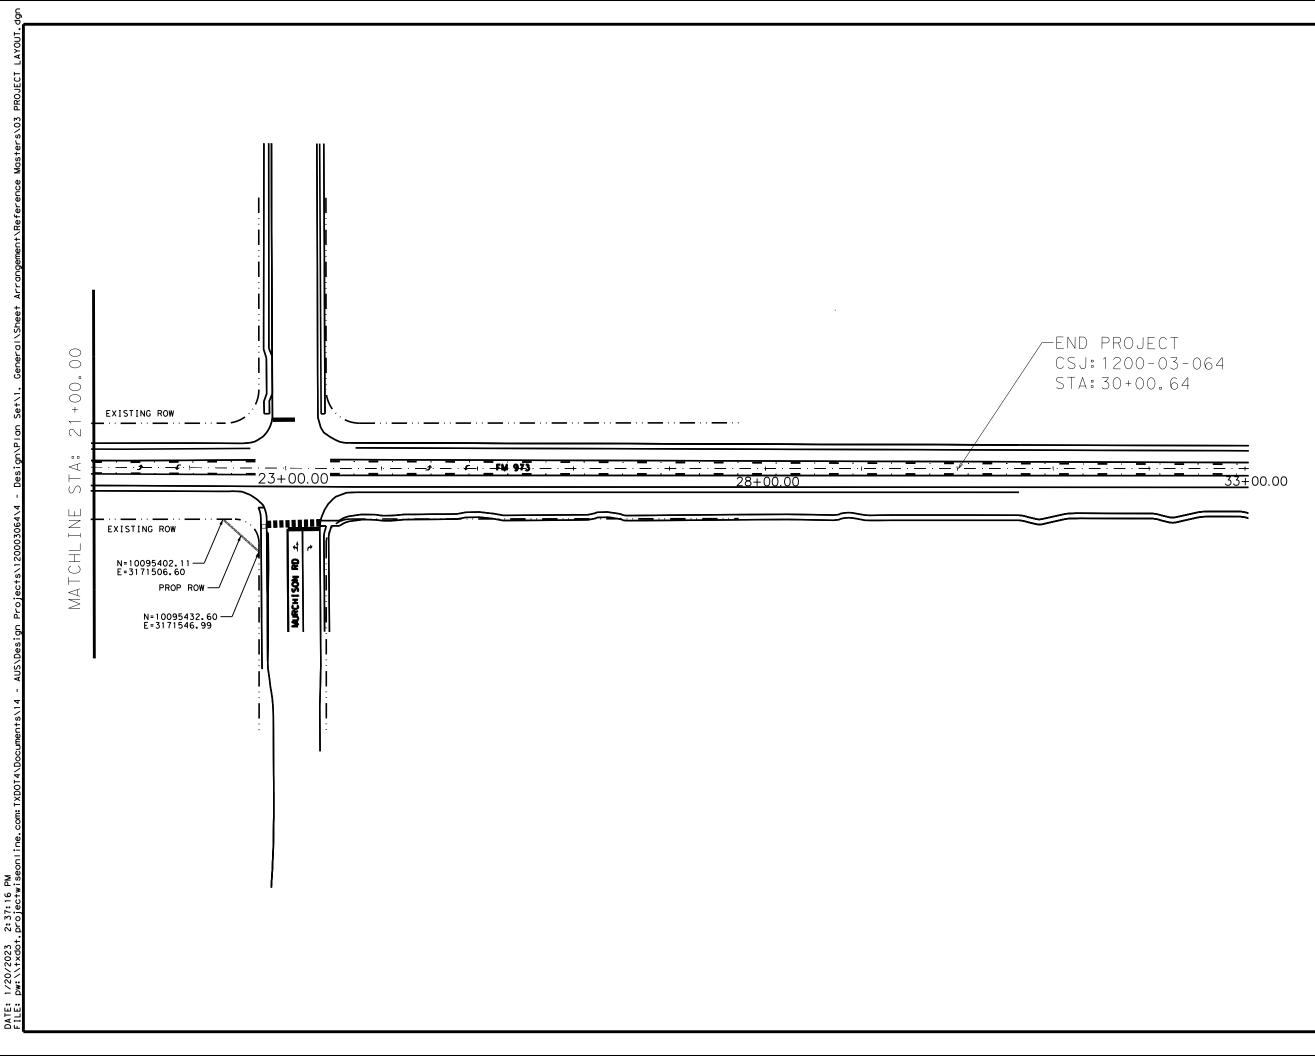



-@-z---

1/20/2023

DocuSigned by: Moliammed Ali 7846EB8AE6FD4CC...

## NOT TO SCALE

N	Austin District North Travis Area Office						
Texa	Texas Department of Transportation						
	PROJECT LAYOUT FM 973 AND MURCHISON SIGNAL INSTALLATION						
© 2022	CONT	SECT	JOB		HIGHWAY		
	1200	03	064		FM 973		
	DIST		COUNTY		SHEET NO.		
	AUS		TRAVIS		4		

#### **GENERAL NOTES:** Version: October 26, 2022

#### **GENERAL**

Contractor questions on this project are to be addressed to the following individual(s): Matthew.Kelly@txdot.gov North Austin North Austin Jason.Cavness@txdot.gov

Questions and requests for documents will be accepted via the Letting Pre Bid Q&A web page. All questions and any corresponding responses that are generated will be posted through the same Letting Pre Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address: https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors

The Letting Pre Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

References to manufacturer's trade name or catalog numbers are for the purpose of identification only. Similar materials from other manufacturers are permitted if they are of equal quality, comply with the specifications for this project, and are approved.

If work is performed at Contractor's option, when inclement weather is impending, and the work is damaged by subsequent precipitation, the Contractor is responsible for all costs associated with replacing the work, if required.

The roadbed will be free of organic material prior to placing any section of the pavement structure. Contact the supervisor for the passenger facility at Capital Metro and request the relocation of Capital Metro signs. Contact the supervisor at (512) 385-0190.

Equip all construction equipment used in roadway work with highly visible omnidirectional flashing warning lights.

Intelligent Transportation Systems (ITS) Infrastructure may exist within the limits of this project and that the system must remain operational throughout construction. The exact location of ITS Infrastructure is not known. Contact the TxDOT Area Engineer's or Inspection Team's Office for the location(s) at least 48 hours before commencing any work that might affect present ITS Infrastructure. Use caution if working in these areas to avoid damaging or interfering with existing facilities. Repair any damage to this system within 8 hours of occurrence at no cost to the Department. In the event of system damage, notify TxDOT/CTECC at (512) 974 0883 within one hour of occurrence. Failure of the Contractor to repair damage to any infrastructure that conveys any corridor information to TxDOT/CTECC will result in the Contractor being billed for the full cost of emergency repairs.

**County:** TRAVIS Highway: FM 973

Provide a smooth, clean sawcut along the existing asphalt or concrete pavement structure, as directed. Consider subsidiary to the pertinent Items.

Construct all manholes/valves to final pavement elevations prior to the placement of final surface. If the manholes/valves are going to be exposed to traffic, place temporary asphalt around the manhole/valve to provide a 50:1 taper. The asphalt taper is subsidiary to the ACP work.

Use a self-contained vacuum broom to sweep the roadway and keep it free of sediment as directed. The contractor will be responsible for any sweeping above and beyond the normal maintenance required to keep fugitive sediment off the roadway as directed by the Engineer.

Damage to existing pipes and SET's due to Contractor operations will be repaired at Contractor's expense.

All locations used for storing construction equipment, materials, and stockpiles of any type, within the right of way, will be as directed. Use of right of way for these purposes will be restricted to those locations where driver sight distance to businesses and side street intersections is not obstructed and at other locations where an unsightly appearance will not exist. The Contractor will not have exclusive use of right of way but will cooperate in the use of the right of way with the city/county and various public utility companies as required.

Coordinate and obtain approval for all bridgework over existing roadways.

Bridge Vertical Clearance and Traffic Handling. Notify TxDOT project staff and the local bridge engineer 10 business days prior to the following: change in vertical clearance, placing beams/girders over traffic, opening or removing traffic from a bridge or portion of a bridge, and completion of bridge work. This requirement includes bridge class culverts. Provide vertical clearance for all structures (including signal mast arms, span wires, and overhead sign bridge structures) within the project limit. Submit information and notices to local bridge engineer at AUS BRG Notify@txdot.gov.

During evacuation periods for Hurricane events the Contractor will cooperate with Department for the restricting of Lane Closures and arranging for Traffic Control to facilitate Coastal Evacuation Efforts.

#### **ITEM 5 – CONTROL OF THE WORK**

Provide a 72 hour advance email notice to AUS Locate@TxDOT.gov to request illumination, traffic signal, ITS, or toll equipment utility locates. Provide AUS Locate@TxDOT.gov an electronic pdf of as-builts within 21 calendar days of illumination, traffic signal, ITS, or toll equipment being placed into operation. As-built shall include GPS coordinates of manholes and junction boxes. Include final version of RFI's and revised plan sheets.

#### **Precast Alternate Proposals.**

Sheet: 5 Control: 1200 03 064

When a precast or cast in place concrete element is included in the plans, a precast concrete alternate may be submitted in accordance with "Standard Operating Procedure for Alternate Precast Proposal Submission" found online at https://www.txdot.gov/inside txdot/forms publications/consultants-contractors/publications/bridge.html#design. Acceptance or denial of an alternate is at the sole discretion of the Engineer. Impacts to the project schedule and any additional costs resulting from the use of alternates are the sole responsibility of the Contractor.

#### **Electronic Shop Drawing Submittals.**

Submit electronic shop drawing submittals according to the current Guide to Electronic Shop Drawing Submittal https://www.txdot.gov/business/resources/specifications/shop-drawings.html (TxDOT.gov Business > Resources General > Shop Drawings). Pre-approved producers can be found online at TxDOT.gov > Business > Resources - Material Producer List. Use the following contact list for all submittals that are not required to be sent to Bridge Division and to copy the Engineer for all submittals to the Bridge Division.

#### Submittal Contact List

Burnet Area	Joe.Muck@txdot.gov	AUS_BU-ShopReview@txdot.gov
Bastrop Area	Diana.Schulze@txdot.gov	AUS_BA-ShopReview@txdot.gov
Georgetown	Jason.Hudson@txdot.gov	AUS_GE-ShopReview@txdot.gov
North Austin	Matthew.Kelly@txdot.gov	AUS_NA-ShopReview@txdot.gov
South Austin	Mark.Baumann@txdot.gov	AUS_SA-ShopReview@txdot.gov

#### Alignment and Profile.

Unless shown in the plans, profile and alignment data for roadways being overlaid or widened are for design verification only. Provide survey and construct the roadway in accordance with the typical section. Bid items and data may be provided to adjust cross slope and super elevations.

### **ITEM 6 - CONTROL OF MATERIALS**

Give a minimum of 1 business day notice for materials, which require inspection at the Plant.

For structures with paint containing hazardous materials, provide locations of material removal 60 days prior to begin removal. For metal elements to be removed, mechanical shear or unbolting for removal and disposal does not require paint abatement but requires 60 day advance notice.

The area designated as the potential habitat for the Houston Toad will not be allowed as a source for embankment unless approved by the Engineer. The general area is Bastrop County north of the Colorado River and east of SH 95 unless provided in the plans.

For removal, tie, or tap of asbestos concrete (AC) pipe, contact TxDOT and the local utility company 60 days prior to performing the work. Expose the AC pipe to provide a minimum of 1 ft. of clearance around the top and sides. A minimal amount of soil may remain around the AC pipe to avoid disturbance. The local utility company will be responsible for the demo notice to DSHS and removal of the AC pipe. Tie or tap into existing AC pipe may require removing an entire section of pipe from collar to collar and replacement of pipe with new pipe using existing bid items.

**County:** TRAVIS Highway: FM 973

### **ITEM 7 – LEGAL RELATIONS AND RESPONSIBILITIES**

TxDOT will coordinate with TDLR regarding pedestrian elements and sidewalks. The contractor will procure and provide all permits, licenses, and inspections; pay all charges, fees, and taxes regarding TDLR rules governing industrialized housing and buildings.

No significant traffic generator events identified.

Refer to the Environmental Permits, Issues and Commitments (EPIC) plan sheets for additional requirements and permits.

When any abandoned well is encountered, cease construction operations in this area and notify the Engineer who will coordinate the proper plugging procedures. A water well driller licensed in the State of Texas must be used to plug a well.

Perform maintenance of vehicles or equipment at designated maintenance sites. Keep a spill kit on-site during fueling and maintenance. This work is subsidiary.

Maintain positive drainage for permanent and temporary work for the duration of the project. Be responsible for any items associated with the temporary or interim drainage and all related maintenance. This work is subsidiary.

Suspend all activities near any significant recharge features, such as sinkholes, caves, or any other subterranean openings that are discovered during construction or core sampling. Do not proceed until the designated Geologist or TCEQ representative is present to evaluate and approve remedial action.

Locate aboveground storage tanks kept on site for construction purposes in a contained area as to not allow any exposure to soils. The containment will be sized to capture 150% of the total capacity of the storage tanks.

### PSL in Edwards Aquifer Recharge and Contributing Zone.

Obtain written approval from the Engineer for all on or off right of way PSLs not specifically addressed in the plans. Provide a signed sketch of the location 30 business days prior to use of the PSL. Include a list of materials, equipment and portable facilities that will be stored at the PSL. TxDOT will coordinate with the necessary agencies. Approval of the PSL is not guaranteed. Un approved PSL is not a compensable impact.

### Work within a USACE Jurisdictional Area.

Do not initiate activities within a U.S. Army Corps of Engineers (USACE) jurisdictional area that have not been previously evaluated by the USACE as part of the permit review of this project. Such activities include, but are not limited to, haul roads, equipment staging areas, borrow and disposal sites. Obtain written approval from the Engineer for activities not specifically addressed in the plans. Provide a signed sketch and description of the location 60 business days prior to begin work at the location. Complete and return any forms provided by TxDOT. Approval of the work is not guaranteed. Un approved work is not a compensable impact.

### Sheet: 5A Control: 1200 03 064

Sheet: 5 Control: 1200 03 064

#### Work over or near Bodies of Water (lakes, rivers, ponds, creeks, dry waterways, etc.).

Keep on site a universal spill kit adequate for the body of water and the work being performed. Debris is not allowed to fall into the ordinary high-water level (OHWL). Debris that falls into the OHWL must be removed at the end of each work day. Debris that falls into the floodway must be removed at the end of each work week or prior to a rain event. Install and maintain traffic control devices to maintain a navigable corridor for water traffic, except during bridge demo and beam placement. This work is subsidiary.

Obtain written approval from the Engineer for temporary fill or crossings not specifically addressed in the plans. Provide a signed sketch of the location 60 business days prior to begin work at the location. Complete and return any forms provided by TxDOT. Approval of the work is not guaranteed. Unapproved work is not a compensable impact.

#### **DSHS** Asbestos and Demolition Notification.

Complete and provide the Texas Department of State Health Services (DSHS) notification form to the Engineer and email to AUS BRG Notify@txdot.gov at least 30 calendar days prior to bridge removal or renovation for each phase or step of work. Notify the Engineer via email of any changes to the work start and end dates.

#### **Migratory Birds and Bats.**

Migratory birds and bats may be nesting within the project limits and concentrated on roadway structures such as bridges and culverts. Remove all old and unoccupied migratory bird nests from any structures, trees, etc. between September 16 and February 28. Prevent migratory birds from re nesting between March 1 and September 15. Prevention shall include all areas within 25 ft. of proposed work. All methods used for the removal of old nesting areas and the prevention of renesting must be submitted to TxDOT 30 business days prior to begin work. This work is subsidiary.

If active nests are encountered on-site during construction, all construction activity within 25 ft. of the nest must stop. Contact the Engineer to determine how to proceed.

#### Tree and Brush Trimming and Removal.

Work will be conducted September 16 thru February 28. Work conducted outside this timeframe will require a bird survey. Submit a survey request to TxDOT 30 business days prior to begin work.

No extension of time or compensation will be granted for a delay or suspension due to the above bird, bat and tree/brush requirements.

#### Law Enforcement Personnel.

Submit charge summary and invoices using the Department forms.

Patrol vehicles must be clearly marked to correspond with the officer's agency and equipped with appropriate lights to identify them as law enforcement. For patrol vehicles not owned by a law enforcement agency, markings will be retroreflective and legible from 100 ft. from both sides and the rear of the vehicle. Lights will be high intensity and visible from all angles.

**County:** TRAVIS Highway: FM 973

No payment will be made for law enforcement personnel needed for moving equipment or payment for drive time to/from the event site. A minimum number of hours is not guaranteed. Payment is for work performed. If the Contractor has a field office, provide an office location for a supervisory officer when event requires a supervising officer. This work is subsidiary.

A maximum combined rate of \$70 per hour for the law enforcement personnel and the patrol vehicle will be allowed. Any scheduling fee is subsidiary per Standard Specification 502.4.2.

Cancel law enforcement personnel when the event is canceled. Cancellation, minimums or "show up" fees will not be paid when cancellation is made 12 hours prior to beginning of the event. Failure to cancel within 12 hours will not be cause for payment for cancellation, minimums, or "show up" time. Payment of actual "show up" time to the event site due to cancellation will be on a case by case basis at a maximum of 2 hours per officer.

Alterations to the cancellation and maximum rate must be approved by the Engineer or pre determined by official policy of the officers governing authority.

#### Back Up Alarm.

For hours 9 P to 5 A, utilize a non-intrusive, self-adjusting noise level reverse signal alarm. This is not applicable to hotmix or seal coat operations. This is subsidiary.

#### **ITEM 8 – PROSECUTION AND PROGRESS**

Special Provision 008 100 has been included to amend Standard Article 8.1 to extend the begin work date due to procurement of signal poles.

### **ITEM 100 - PREPARING RIGHT OF WAY**

Prep ROW must not begin until accessible trees designated for preservation have been protected, items listed in the EPIC have been addressed, and SW3P controls installed in accessible areas.

Backfill material will be Type B Embankment using ordinary compaction.

Follow Item 752.4 Work Methods and Item 752 general notes when removing or working on or near trees and brush.

Unless shown otherwise in the plans or a designated non-mow area, perform trimming or removal for areas within 30 ft. of edge of payement under construction. Trim or remove to provide minimum of 5 ft. of horizontal clearance and 7 ft. of vertical clearance for the following: sidewalks, paths, guard fence, rails, signs, object markers, and structures. Trim to provide a minimum of 14 ft. vertical clearance under all trees. This work is subsidiary.

### **ITEM 110 – EXCAVATION**

The Engineer will define unsuitable material.

### Sheet: 5B Control: 1200 03 064

#### **ITEM 416 - DRILLED SHAFT FOUNDATIONS**

Stake all Foundations, for approval, before beginning drilling operations.

Calculate the vertical signal head clearance before placing any signal pole foundation.

For mast-arm signal and strain pole anchor bolts, set two in tension and two in compression.

Obtain approval of placement prior to placing concrete.

Remove spoils from a flood plain at the end of each workday.

#### ITEMS 420, 425, 441, & 462 - STRUCTURES

### Bridge Vertical Clearance and Traffic Handling.

Notify TxDOT project staff and the local bridge engineer 10 business days prior to the following: change in vertical clearance, placing beams/girders over traffic, opening or removing traffic from a bridge or portion of a bridge, and completion of bridge work. This requirement includes bridge class culverts. Provide vertical clearance for all structures (including signal mast arms, span wires, and overhead sign bridge structures) within the project limit. Submit information and notices to local bridge engineer at AUS BRG Notify@txdot.gov.

#### **ITEM 420 – CONCRETE SUBSTRUCTURES**

Do not use PMDF in areas where a "Free Joint" is indicated in the plans.

Check the sign plans for locations of clearance signs and brackets on structures, which will require inserts in the pre-stressed beams.

Where Retaining Walls are integral parts of the abutment header, do not place the abutment cap prior to backfilling the wall and the abutment area up to the elevation of the bottom of the abutment cap.

Mass placements are defined as placements with a least dimension greater than or equal to 5 ft., or designated elsewhere on the plans.

The "H" values shown on Bridge Layouts are estimated column heights. Calculate the actual column heights based on field conditions.

Perform work during good weather unless otherwise directed. If work is performed at Contractor's option, when inclement weather is impending, and the work is damaged by the weather, the Contractor is responsible for all costs associated with repairs/replacement.

Upon completion of the structure, stencil the National Bridge Inventory (NBI) number (structure number) using black paint and 4 in. tall numbers at 4 locations designated by TxDOT. This work is subsidiary.

Bonding agents are required at construction joints. Do not use membrane curing for structural concrete as defined in Item 421, Table 8.

Remove all loose Formwork and other Materials from the floodplain or drainage areas daily.

**County:** TRAVIS Highway: FM 973

# **ITEM 427 - SURFACE FINISHES FOR CONCRETE**

Provide a rub finish to Surface Area I.

Color coatings may be applied using concrete paint or opaque sealer.

#### **ITEM 432 - RIPRAP**

Mow strip riprap will be 4 in. and all other riprap will be 5 in. unless otherwise shown on the plans. Mow strip for cable barrier may be placed monolithically with the barrier foundations if using concrete in accordance with Item 543. Fiber reinforcement is not allowed except in mow strip for cable barrier if foundation and mow strip are placed monolithically. GFRP is allowed reinforcement for all applications.

Saw cut existing riprap then epoxy 12 in. long No. 3 or No. 4 bars 6 in. deep at a maximum spacing of 18 in. in each direction to tie new riprap to existing riprap. This work is subsidiary. Provide Type A Grade 3 or 5 flexible base for cement stabilized riprap. Compressive strengths for flexible base are waived.

SGT approach taper, paid for using mow strip item, will be installed using concrete, flexible base coated with SS-1 at a rate of 0.12 GAL/SY, or HMA Type B/C/D. Placement will be ordinary compaction and does not require placement using an asphalt paver.

#### .ITEM 502 - BARRICADES, SIGNS, AND TRAFFIC HANDLING

	Ta
Roadway	Limits
IH 35	All (1 lane closed)
IH 35	All (2 lanes closed, see allowable
IH 35	All (2 lanes closed, all work)
SH 45	US 183 to SH130
LP 1	William Cannon to Parmer Lane
US 183	SH 29 to FM 1327
SH 71	SH 130 to IH 35
SH 71	SH 304 to Tahitian Drive
SH 71	US 290 W to RM 3238
US 290 W	IH 35 to Nutty Brown Rd
US 290 E	IH 35 to SH 95
FM 734	FM 1431 to US 290 E
US 79	IH 35 to Bus 79 in Taylor
RM 1431	Lohmans Ford Rd to IH 35
SH 29	LP 332 western terminus to SH
SH 80	Charles Austin to River Road
RM 2222	All
RM 620	All
RM 2244	All
SPUR 69	All
LP 360	All
LP 343	All

### Sheet: 5C Control: 1200 03 064

#### Allowable Closure Time 9 P to 5 A le work below) 9 P to 5 A 11 P to 5 A 8 P to 5 A 8 P to 5 A е 8 P to 5 A 130 8 P to 5 A 8 P to 5 A

# Table 1

LP 275	All	8 P to 5 A
FM 1325	All	8 P to 5 A
All	Within 200' of a signalized intersection	9 P to 5 A
All	All (Full Closure, see allowable work below)	11 P to 4 A

	Table 3 (Mobile Operations)	
Roadway	Allowable Sun Night thru Fri Noon	Allowable Sat thru Sun Morn
Within Austin City Limits	10 A to 2 P and 7 P to 6 A	7 P to 10 A
Outside Austin City Limits	9 A to 3 P and 7 P to 7 A	6 P to 11 A
IH 35 main lanes	10 P to 5 A	9 P to 9 A
AADT over 50,000	8 P to 6 A	8 P to 10 A

For roadways without defined allowable closure times, nighttime lane closures will be allowed from 8 P to 6 A. Unless stated, daytime or Friday night lane closures will not be allowed and one lane in each direction will remain open at all times for all roadways.

Two lanes closed on IH 35 allowed to begin at 9 P for main lane (shoulder work not included) hotmix overlay or pavement repair operations (does not include bridge joint work).

Full closures only allowed Friday night thru Monday morning for bridge beam installation, bridge demolition, or OSB truss removal/installation. Full closures only allowed for roadways with frontage roads or if a designated detour route is provided in the plans. No closures will be allowed on the weekends, working day prior, and working day after the National Holidays defined in the Standard Specifications, Good Friday, and Easter weekend. Closures the Sunday of the Super Bowl will not be allowed from 1 P to 11 P. No closures will be allowed on Friday and the weekends for projects within 20 miles of Formula 1 at COTA, ACL Fest, SXSW, ROT Rally, UT home football games (includes games not on a Friday or weekend), sales tax holiday, Dell Match Play (includes Thursday), Rodeo Austin, or other special events that could be impacted by the construction. All lanes will be open by noon of the day before these special events.

To account for directional traffic volumes, begin and end times of closures may be shifted equally by the Engineer. The closure duration will remain. Added compensation is not allowed.

Submit an emailed request for a lane closure (LCN) to TxDOT. The email will be submitted in the format provided. Receive concurrence prior to implementation. Submit a cancellation of lane closures a minimum of 18 hours prior to implementation. Blanket requests for extended periods are not allowed. Max duration of a request is 2 weeks prior to requiring resubmittal.

Provide 2 hour notice prior to implementation and immediately upon removal of the closure.

For roadways listed in Table 1: Submit the request 96 hours prior to implementation.

County: TRAVIS Highway: FM 973

For roadways not listed in Table 1: Submit the request a minimum of 48 hours prior to the closure and by the following deadline immediately prior to the closure: 11A on Tuesday or 11A on Friday. For all roadways: Submit request for traffic detours and full roadway closures 168 hours prior to implementation. Submit request for nighttime work 96 hours to implementation date.

Cancellations of accepted closures (not applicable to full closures or detours) due to weather will not require resubmission in accordance with the above restrictions if the work is completed during the next allowable closure time.

Closures that conflict with adjacent contractor will be prioritized according to critical path work per latest schedule. Conflicting critical path or non critical work will be approved for first LCN submitted. Denial of a closure due to prioritization or other reasons will not be reason for time suspension, delay, overhead, etc.

Meet with the Engineer prior to lane closures to ensure that sufficient equipment, materials, devices, and workers will be used. Take immediate action to modify current and future traffic control, if at any time the queue becomes greater than 20 minutes.

Consider inclement weather prior to implementing the lane closures. Do not set up traffic control when the pavement is wet.

Cover, relocate, or remove existing small, large, and overhead signs that conflict with traffic control. Cover large and overhead signs to remain using latest standard TS-CD. This work is subsidiary.

Install all permanent signs, delineation, and object markers required for the operation of the roadway before opening to traffic. Use of temporary mounts is allowed or may be required until the permanent mounts are installed or not impacted by construction. Maintain the temporary mounts. This work is subsidiary.

Place a 28 inch cone, meeting requirements of BC (10), on top of foundations that have protruding studs. This work is subsidiary.

Edge condition treatment types must be in accordance with the TxDOT standard. Installation and removal of a safety slope is subsidiary.

To determine a speed limit or an advisory speed limit, submit a request to TxDOT 60 business days prior to manufacture of the sign.

For non site specific signal projects, 2 months of barricades will be paid per work order location.

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible

Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

# **ITEM 506 - TEMPORARY EROSION, SEDIMENTATION, AND ENV CONTROLS**

If SW3P plan sheets are not provided, place the control measures as directed.

Install, maintain, remove control measures in areas of the right of way utilized by the Contractor that are outside the limits of disturbance required for construction. Permanently stabilize the area. This work is subsidiary.

Erosion control measures must be initiated immediately in areas where construction activities have ceased and will not resume for a period exceeding 14 calendar days. Vertical track all exposed soil, stockpiles, and slopes. Re-track after each rain event or every 14 days, whichever occurs first. Sheep foot roller is allowed for vertical tracking. This work is subsidiary.

Unless a specific pay item is provided in the plans, the installation of the 6:1 or flatter for RFD side slopes in the safety zone will be subsidiary to pertinent bid items.

The Storm Water Pollution Prevention Plan (SWP3) consists of temporary erosion control measures needed and provided for under this Item. The disturbed area is less than one acre and use of erosion control measures is not anticipated. If physical conditions encountered at the job site require necessary controls, BMP installation, maintenance, and removal will be paid as extra work on a force account basis per Articles 4.4 and 9.7.

### ITEMS 528, 529, 530, 531, & 536 - MISCELLANEOUS CONSTRUCTION

Reinforcement will be in accordance with Section 432.3.1 unless shown on the plans. Fiber reinforcement is not allowed. GFRP is allowed reinforcement for all applications. Class A and B Concrete are allowed to use Coarse Aggregate Grades 1-8.

Unless shown on the plans, all concrete will be 5 in. thick and have 2 in. sand, base, or RAP bedding. Furnish base meeting the requirement for any type or grade in accordance with Item 247. Compressive strengths for flexible base are waived. RAP must be 100% passing a 1 in. sieve. Bedding and flexible base must be placed using ordinary compaction.

Expansion joints will be placed every 40 ft. Expansion joints must be 1 in. wide asphalt board and flush with the surface. The bottom of the asphalt board will be at half the depth of the concrete. The reinforcement will be continuous thru the expansion joint.

Sidewalk cross slope must not exceed 1.5%.

If roots are encountered verify with the Engineer before accommodating or removing 2 in. diameter or larger roots. Root removal must be in accordance with Section 752.4.2. Roots may remain in the bedding or base. For improvements within 6 in. of a root, the concrete thickness may be reduced by 1 in. and the bedding increased by 1 in. to minimize impacts to the roots. Adjust

**County:** TRAVIS Highway: FM 973

bedding and surface profile to provide a 1 in. bedding cushion around the roots. The surface profile may be adjusted to the extent allowed by ADA. This work is subsidiary.

### **ITEM 528 - COLORED TEXTURED CONCRETE AND LANDSCAPE PAVERS**

Concrete and pavers will use a 90° herringbone pattern with 8 in. x 4 in. Pavestone Holland series or equivalent with adjacent sidewalks banded with a soldier course unless otherwise shown on the plans. Concrete or pavers will be terra cotta finish. Concrete will have an antique finish attained by application of Scofield Lithochrome color hardener A 29 and A 57 as the release agent or equivalent. Seal concrete with a clear sealer provided by the color manufacturer. Paver joint filling sand will be tan colored polymeric sand. Do not use expansion joint material between pavers and adjacent concrete.

### **ITEM 530 – INTERSECTIONS, DRIVEWAYS, AND TURNOUTS**

Notify property owners at least 48 hr. before beginning work on their driveway. Provide a list of each notification and contact before each closure. Only close driveways for reconstruction if duration and alternate access are approved. Install and maintain material across a work zone as temporary access. This work is subsidiary.

For ACP or SURF TREAT, the pavement structure will match the adjacent roadway unless detailed on the plans. HMA, including surface, may use a maximum allowable quantity of 40% RAP and 5% RAS for private driveways, public driveways for 2-lane roadways or smaller, and turnouts. Blending of 2 or more sources is allowed.

For CONC, the pavement structure will be 6 in. thick and have 3 in. flexible base bedding unless detailed on the plans.

ITEMS 600s & 6000s - ITS, LIGHTING, SIGNING, MARKINGS, AND SIGNALS Meet the requirements of the NEC, Texas MUTCD, TxDOT standards, and TxDOT Standard Specifications. Notify the Engineer if existing elements to remain do not meet code or specification.

Contractor shall provide all service, equipment and material required to provide a functional item and interface with existing equipment and software.

For signal shop contact Charles Vaughn Jr (Charles.Vaughn@txdot.gov) and Douglas Turner (Douglas.L.Turner@txdot.gov).

Use the TxDOT provided form to submit an electrical, illumination, and signal checklist prior to request for signal activation or a punch list.

Provide a 7 day advance email notice to the Engineer to request illumination or traffic signal punch list inspection.

Provide a 14 day advance email notice to the Engineer with signal technician contact information and signal locations prior to working or assuming operations of illumination or traffic signal. Provide a 60 day advance email notice to the Engineer to request signal timing if timing is not provided in the plans.

General Notes

Sheet K

### Sheet: 5E Control: 1200 03 064

Sheet: 5 Control: 1200 03 064

Provide a 180 day advance email notice to the Engineer for equipment to be provided by TxDOT. Provide equipment that requires TxDOT programming, etc. to TxDOT 180 day in advance.

Prior to relief of maintenance, a Test Period is required for signals and ITS equipment in accordance with Item 680.3.1.8. Response time to reported trouble calls shall be less than 2 hours. Complete repairs within 24 hours. Notify the Engineer and maintain a logbook in the controller cabinet of each trouble call. Do not clear the error log in the conflict monitor without approval. Maintain the existing ITS equipment and HUB buildings operational during construction. ITS downtime is allowed from 12A to 4A. Downtime is restricted to one time per HUB or equipment.

Definitions of abbreviations used to designate ITS equipment, material, etc. can be provided by the Engineer.

Stakes or other physical method shall be installed to hold down conduit prior to placement of concrete/flow fill encasement.

Minimum distance between HDPE joints will be 200 ft.

For conduit mounted to bridges in hangers, fiberglass can be substituted for RMC. Furnish and install per Special Specification 6390.

### **ITEM 610 - ROADWAY ILLUMINATION ASSEMBLIES**

Upon removal, contact signal shop to stockpile a maximum of 10 assemblies that meet the current TxDOT standards at the Austin District Headquarters located at 7901 North IH 35, 78753. If signal shop declines receipt of these assemblies, Contractor will be responsible for disposal.

For each assembly, paint the service, circuit, run and assembly number/letter using 3 in. tall characters and black paint. The marking shall be stacked vertically with the service on top and the assembly number/letter on the bottom. Paint 6 ft. above the roadway surface on the hand access door side of the pole or adjacent to the assembly if mounted to a structure. This work is subsidiary.

For both transformer and shoe-base type illumination poles, provide double-pole breakaway fuse holder.

Provide 10-amp time delay fuses.

Maintain all new and existing illumination for the duration of the contract. All existing illumination will remain operational until replaced by new illumination or required to be removed due to construction.

#### **ITEM 618 - CONDUIT**

Shift the locations of conduit and ground boxes to accommodate field conditions. Install conduit not exceeding 2 feet in any direction from a straight line. Install conduit at a minimum depth of 2 ft. below finished grade. Installation of the conduit by jacking or boring method will be at a depth of at least 1 ft. below subgrade.

#### **County:** TRAVIS Highway: FM 973

Install a high tension, non-metallic pull rope in all empty conduit runs. This work is subsidiary. Use a coring device, not a hammer drill, when drilling holes through concrete structures.

Structurally mounted junction boxes will be as shown on the plans. When used for traffic signal installations, these boxes will be 12" x 12" x 8". This work is subsidiary.

For underground conduit, smooth wall schedule 40 HDPE can be substituted for schedule 40 PVC. Schedule 80 bore can be replaced with a schedule 40 HDPE carrier pipe of adequate size to carry the proposed conduits. HDPE must transition to RMC/PVC per ED (11)-14.

When using existing conduit, ensure that all conduits have bushings and cleaned of dirt, mud, grease, and other debris. Re-strap existing or relocated conduit per the specification. This work is subsidiary.

Abandoned underground conduit must have all conductors removed.

**ITEM 620 - ELECTRICAL CONDUCTORS** Provide 10 amp time delay fuses.

For Flashing Beacons (Item 685) and Pedestal Poles (Item 687), provide single-pole breakaway disconnects.

Install a minimum size 8 AWG equipment grounding conductor (EGC) in all conduits including loop detectors and traffic signal cables. Payment and the size of the EGC will be in accordance with standard ED (3)-14 note 12.

Permanently mark "illumination" on the luminaire conductors installed inside a traffic signal pole. Make the marks easily visible from the hand hole.

### **ITEM 624 – GROUND BOXES**

Aggregate for fill under the box will be crushed, have a maximum size of 2 in., minimum size of  $\frac{1}{2}$  in., and requirements per Item 302 are waived.

### **ITEM 628 – ELECTRICAL SERVICES**

Contact the utility company upon execution of contract and prior to the pre construction meeting to make arrangements for all work and materials provided by the utility company. Contact AUS Business Services@txdot.gov for account approval and information. Accounts shall be placed in the name of TxDOT.

### **ITEM 644 – SMALL ROADSIDE SIGN ASSEMBLIES**

Triangular slip base that use set screws to secure the post will require 1 of the set screws to penetrate the post by drilling a hole in the post at the location of the screw. All set screws shall be treated with anti-seize compound.

**ITEM 650 - OVERHEAD SIGN SUPPORTS** Use lengths of trusses, tower heights, and posts shown in the summaries for bidding purposes only. Verify these dimensions and vertical clearances prior to shop drawing production.

#### **ITEM 662 - WORK ZONE PAVEMENT MARKINGS**

Notify the Engineer at least 24 hours in advance of work for this item.

Maintain removable and short term markings daily. Remove within 48 hours after permanent striping has been completed.

Item 668 is not allowed for use as Item 662.

Roadways with existing profile pavement markings or rumble strips must supplement work zone solid lines with traffic buttons spaced at 12 in. Traffic buttons used to supplement the work zone markings will be paid by the each in addition to the work zone item.

#### **ITEM 666 - RETROREFLECTORIZED PAVEMENT MARKINGS**

Notify the Engineer at least 24 hr. before beginning work.

Place longitudinal markings nightly for IH 35 main lanes or roadways with AADT greater than 100,000. Use of temporary flexible reflective roadway marker tabs is subsidiary and at the Contractor's option. Replace missing or damaged tabs nightly. If using tabs, place longitudinal markings weekly by 5 AM Friday for all weekday work and by 5 AM Monday for all weekend work. Failure to maintain tabs or place longitudinal markings by deadline will require nightly placement of longitudinal markings.

Place longitudinal markings no later than 7 calendar days after placement of the surface for roadways with AADT greater than 20,000.

When the raised portion of a profile marking is placed as a separate operation from the pavement marking, the raised portion must be placed first then covered with TY I.

When using black shadow to cover existing stripe apply a non retroreflective angular abrasive bead drop. The marking color shall be adjusted to resemble the pavement color. If Item 677 is not used prior to placement of black shadow, scrape the top of the marking with a blade or large piece of equipment unless surface is a seal coat. The scraping of the marking is subsidiary.

#### **ITEM 677 - ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS**

Dispose of removed materials and debris at locations off the right of way. Elimination using a pavement marking will not be allowed in lieu of methods listed in specification.

Remove pavement markings on concrete surfaces by a blasting method. Flail milling will be allowed when total quantity of removal on concrete surfaces is less than 1000 ft.

Strip seal is only method allowed on seal coat surface unless project includes placement of a new surface. If total quantity of removal on a seal coat surface is less than 2000 ft., elimination using a pavement marking is allowed if a test section is approved by the Engineer. Test section shall demonstrate the thermo marking color matches the existing pavement color.

**County:** TRAVIS Highway: FM 973

Remove pavement markings outside the limits of the new surface by a blasting method. Use a TRAIL or a non-retroreflective paint to cover stripe remnants that remain after elimination. The test requirements for these materials are waived. The paint color shall be adjusted to resemble the existing pavement color. Installation and maintenance is subsidiary.

#### **ITEM 680 - HIGHWAY TRAFFIC SIGNALS**

Luminaire arms shall be aligned with the signal head support. If multiple signal head supports, the luminaire arm shall be aligned with the support over the higher volume roadway.

Install 250W EQ LED illumination fixtures as shown in the plans. Test in accordance with Item 616. This work is subsidiary.

Furnish all materials and install signs mounted on the traffic signal wire, traffic signal poles, mast arms, and pedestal pole assemblies. Remove all conflicting signs and sign foundations when signal is placed into operation. This work is subsidiary. Use a Vulcan swinger sign mounting bracket or equivalent for all signs mounted on span wires.

Place the traffic signal into operation after the traffic signal and stripe have been completed. The signal shop will be present to program the controller and assist with detection setup. Have a qualified technician and a representative from the controller supplier on the project site to place the traffic signals in operation.

If shown on the plans, install the Emergency Response Detection equipment supplied by the City.

Upon removal, contact signal shop to stockpile a maximum of 4 signal poles and mast arms that meet the current TxDOT standards at the Austin District Headquarters located at 7901 North IH 35, 78753. If signal shop declines receipt of material, Contractor will be responsible for disposal.

For city operated signals, the city may assist in determining how the detector loop lead in cables are to be connected, and will also program the controller for operation, the video detection, hook up the conflict monitor, detector units and other equipment, and turn on the controller.

### **ITEM 682 – VEHICLE AND PEDESTRIAN SIGNAL HEADS**

Install signal head attachments so the wiring to each passes from the signal pole through the attachment hardware to the signal head. Use UV rated tie wraps.

Traffic signal heads will be aluminum unless otherwise shown on the plans. Back plates will be black aluminum.

Provide louvers, which have five vanes with a black finish on inside surfaces when required. Fasten a hardware cloth screen, securely, with <sup>5</sup>/<sub>8</sub>" or smaller mesh size to the front face of each louver to prevent bird nesting.

Use the four point mounting system (TY A) for signal heads, except in cases of skewed or vertical heads when (TY B) will be used.

#### ITEM 684 – TRAFFIC SIGNAL CABLES

For Type A cables, cables meeting the requirements of IMSA 19 1 can be substituted for IMSA 20-1. For all types of cables, an increase of one size larger wire diameter and thickness can be substituted for plan size. For example, 12 AWG can be substituted for 14 AWG.

For each cable run, coil an extra 2 ft. of cable in each steel pole and 5 ft. in the controller cabinet. Provide a separate multi conductor signal cable (14 AWG) inside pedestal poles and mast arm signal poles from the terminal strip to each signal head as shown on the plans.

#### ITEM 685 – ROADSIDE FLASHING BEACON ASSEMBLIES

Installation includes all components in the assembly, signs, signal heads, and conductors in the foundation and within 6 in. of the foundation to provide a fully operational assembly.

Test period for the assembly shall be in accordance with item 680.3.1.8.

### ITEM 686 - TRAFFIC SIGNAL POLE ASSEMBLIES (STEEL)

Provide and install damping plates on all mast arms 40 ft. or greater. For mast arms less than 40 ft., refer to SMA and DMA vibration notes for guidance. This work is subsidiary. When luminaires are installed on mast arm poles, install a separate terminal strip in the signal pole access compartment. Provide a 10-amp time-delay fuse for traffic signal poles with luminaires.

### **ITEM 687 – PEDESTAL POLE ASSEMBLIES**

Verify the required pole height prior to ordering material.

### **ITEM 6054 - SPREAD SPECTRUM RADIOS FOR TRAFFIC SIGNALS**

Connect antenna to Pole as directed by the Engineer. Install the coaxial cable in a continuous run from the antenna to the radio in the controller cabinet with no cable exposed. Provide the latest version of the applicable SSR diagnostic software to the Department.

Provide training per the special specification.

Sheet: 5H



#### CONTROLLING PROJECT ID 1200-03-064

DISTRICT Austin HIGHWAY FM 973 **COUNTY** Travis

**Estimate & Quantity Sheet** 

		CONTROL SECTIO	ON JOB	1200-03	-064		
		PROJ	ECT ID	A00179	260		TOTAL FINAL
		C	DUNTY	Travi	s	TOTAL EST.	
		ніс	HWAY	FM 97		-	
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	100-6002	PREPARING ROW	STA	1.000		1.000	
	104-6001	REMOVING CONC (PAV)	SY	25.000		25.000	
	416-6003	DRILL SHAFT (30 IN)	LF	11.300		11.300	
	416-6004	DRILL SHAFT (36 IN)	LF	13.200		13.200	
	416-6006	DRILL SHAFT (48 IN)	LF	22.000		22.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	МО	3.000		3.000	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	500.000		500.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	500.000		500.000	
	529-6008	CONC CURB & GUTTER (TY II)	LF	140.000		140.000	
	531-6002	CONC SIDEWALKS (5")	SY	44.000		44.000	
	531-6010	CURB RAMPS (TY 7)	EA	5.000		5.000	
	531-6013	CURB RAMPS (TY 10)	EA	1.000		1.000	
	618-6023	CONDT (PVC) (SCH 40) (2")	LF	340.000		340.000	
	618-6029	CONDT (PVC) (SCH 40) (3")	LF	258.000		258.000	
	618-6030	CONDT (PVC) (SCH 40) (3") (BORE)	LF	656.000		656.000	
	620-6007	ELEC CONDR (NO.8) BARE	LF	1,260.000		1,260.000	
	620-6008	ELEC CONDR (NO.8) INSULATED	LF	1,594.000		1,594.000	
	620-6009	ELEC CONDR (NO.6) BARE	LF	200.000		200.000	
	620-6010	ELEC CONDR (NO.6) INSULATED	LF	400.000		400.000	
	624-6010	GROUND BOX TY D (162922)W/APRON	EA	7.000		7.000	
	628-6165	ELC SRV TY D 120/240 070(NS)AL(E)SP(O)	EA	1.000		1.000	
	644-6076	REMOVE SM RD SN SUP&AM	EA	2.000		2.000	
	666-6030	REFL PAV MRK TY I (W)8"(DOT)(100MIL)	LF	78.000		78.000	
	666-6036	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	LF	622.000		622.000	
	666-6048	REFL PAV MRK TY I (W)24"(SLD)(100MIL)	LF	245.000		245.000	
	666-6054	REFL PAV MRK TY I (W)(ARROW)(100MIL)	EA	6.000		6.000	
	666-6078	REFL PAV MRK TY I (W)(WORD)(100MIL)	EA	6.000		6.000	
	666-6176	REFL PAV MRK TY II (W) 8" (DOT)	LF	78.000		78.000	
	666-6178	REFL PAV MRK TY II (W) 8" (SLD)	LF	622.000		622.000	
	666-6182	REFL PAV MRK TY II (W) 24" (SLD)	LF	245.000		245.000	
	666-6184	REFL PAV MRK TY II (W) (ARROW)	EA	6.000		6.000	
	666-6192	REFL PAV MRK TY II (W) (WORD)	EA	6.000		6.000	
	666-6210	REFL PAV MRK TY II (Y) 6" (SLD)	LF	2,280.000		2,280.000	
	666-6321	RE PM W/RET REQ TY I (Y)6"(SLD)(100MIL)	LF	2,280.000		2,280.000	
	672-6007	REFL PAV MRKR TY I-C	EA	48.000		48.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	120.000		120.000	



DISTRICT	COUNTY	CCSJ	SHEET
Austin	Travis	1200-03-064	6



#### CONTROLLING PROJECT ID 1200-03-064

DISTRICT Austin HIGHWAY FM 973 **COUNTY** Travis

**Estimate & Quantity Sheet** 

		CONTROL SECTIO	N JOB	1200-03	-064		
		PROJE	CT ID	A00179	260		
		co	UNTY	Travi	s	TOTAL EST.	TOTAL FINAL
		HIGI	IWAY	FM 97	'3		FINAL
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	1,355.000		1,355.000	
	677-6007	ELIM EXT PAV MRK & MRKS (24")	LF	25.000		25.000	
	677-6008	ELIM EXT PAV MRK & MRKS (ARROW)	EA	6.000		6.000	
	680-6002	INSTALL HWY TRF SIG (ISOLATED)	EA	1.000		1.000	
	682-6001	VEH SIG SEC (12")LED(GRN)	EA	8.000		8.000	
	682-6002	VEH SIG SEC (12")LED(GRN ARW)	EA	3.000		3.000	
	682-6003	VEH SIG SEC (12")LED(YEL)	EA	8.000		8.000	
	682-6004	VEH SIG SEC (12")LED(YEL ARW)	EA	4.000		4.000	
	682-6005	VEH SIG SEC (12")LED(RED)	EA	8.000		8.000	
	682-6006	VEH SIG SEC (12")LED(RED ARW)	EA	2.000		2.000	
	682-6018	PED SIG SEC (LED)(COUNTDOWN)	EA	8.000		8.000	
	682-6049	BACKPLATE W/REFL BRDR(4 SEC)	EA	2.000		2.000	
	682-6060	BACKPLATE W/REFL BRDR(3 SEC)	EA	8.000		8.000	
	684-6031	TRF SIG CBL (TY A)(14 AWG)(5 CONDR)	LF	1,719.000		1,719.000	
	684-6033	TRF SIG CBL (TY A)(14 AWG)(7 CONDR)	LF	476.000		476.000	
	684-6079	TRF SIG CBL (TY C)(12 AWG)(2 CONDR)	LF	1,031.000		1,031.000	
	685-6004	INSTL RDSD FLSH BCN ASSM (SOLAR PWRD)	EA	1.000		1.000	
	686-6035	INS TRF SIG PL AM(S)1 ARM(32')LUM	EA	1.000		1.000	
	686-6051	INS TRF SIG PL AM(S)1 ARM(48')LUM	EA	1.000		1.000	
	686-6251	INS TRF SIG PL AM(S)2 ARM(60-44')LUM	EA	1.000		1.000	
	687-6001	PED POLE ASSEMBLY	EA	3.000		3.000	
	688-6001	PED DETECT PUSH BUTTON (APS)	EA	8.000		8.000	
	688-6003	PED DETECTOR CONTROLLER UNIT	EA	1.000		1.000	
	6004-6031	ITS COM CBL (ETHERNET)	LF	65.000		65.000	
	6292-6002	RVDS(ADVANCE DETECTION ONLY)	EA	2.000		2.000	
	6292-6003	RVDS(PRESENCE AND ADVANCE DET)	EA	4.000		4.000	
	7251-6001	Subsurface Util Locate (Outside Rdbed)	EA	5.000		5.000	
	7251-6002	Subsurface Util Locate (Within Rdbed)	EA	5.000		5.000	
	06	TRAFFIC SIGNAL CONTROLLER (PARTICIPATING)	LS	1.000		1.000	
	08	CONTRACTOR FORCE ACCOUNT LAW ENFORCEMENT (NON-PARTICIPATING)	LS	1.000		1.000	
		CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000		1.000	



DISTRICT	COUNTY	CCSJ	SHEET
Austin	Travis	1200-03-064	6A


		SUMMARY OF QUANTITIES		
ITEM NO.	DESC CODE	DESCRIPTION	UNIT	ESTIMATE
100	6002	PRERARING ROW	STA	1
104	6015	REMOVING CONC (SIDWALKS)	SY	25
416	6003	DRILL SHAFT (30 IN)	LF	11.3
416	6004	DRILL SHAFT (36 IN)	LF	13.2
416	6006	DRILL SHAFT (48 IN)	LF	22
502	6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	3
500	6001	MOBILIZATION	LS	1
529	6008	CONC CURB & GUTTER (TY II)	LF	140
531	6002	CONC SIDEWALKS (5")	SY	44
531	6010	CURB RAMPS (TY 7)	EA	5
531	6013	CURB RAMPS (TY 10)	EA	1
644	6076	REMOVE SM RD SN SUP&AM	EA	2
506	6038	TEMP SEDMT CONT FENCE(INSTALL)	LF	500
506	6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	500
666	6030	REFL PAV MRK TY I (W)8" (DOT) (100MIL)	LF	78
666	6210	REFL PAV MRK TY II (Y) 6" (SLD)	LF	2280
666	6321	REF PM W/RET REQ TY I(Y)6"(SLD)	LF	2280
666	6176	REFL PAV MRK TY II (W) 8" (DOT)	LF	78
666	6036	REF PAV MRK TYI (W)8"(SLD)(100MIL)	LF	622
666	6178	REFL PAV MRK TY II (W) 8" (SLD)	LF	622
666	6184	REFL PAV MRK TY II (W) (ARROW)	EA	6
666	6054	REFL PAV MRK TY I (W) (ARROW) (100MIL)	EA	6
666	6078	REFL PAV MRK TY I (W) (WORD) (100MIL)	EA	6
666	6192	REFL PAV MRK TY II (W) (WORD)	EA	6
666	6048	REFL PAV MRK TY I (W)24"(SLD)(100MIL)	LF	245
666	6182	REFL PAV MRK TY II (W) 24" (SLD)	LF	245
672	6009	REFL PAV MRKR TY II-A-A	EA	120
672	6007	REFL PAV MRKR TY I-C	EA	48
677	6001	ELIM EXT PAV MRK & MRKS (4")	LF	1355
677	6007	ELIM EXT PAV MRK & MRKS (24")	LF	25
677	6008	ELIM EXT PAV MRK&MRKS(ARROW)	LF	6
680	6002	INSTALL HWY TRF SIG (ISOLATED)	EA	1
	**	CABINET FOUNDATION	EA	1
	* *	TRAFFIC SIGNAL CONTROLLER (INSTALL ONLY	EA	1
	* *	TRAFFIC SIGNAL CABINET (INSTALL ONLY)	EA	1
	* *	CCTV CAMERA (INSTALL ONLY)	EA	1
	* *	ROD, 5/8" * 10' COPPER GROUND (CONTROLLE	EA	1
	* *	LED RDWY LUMINAIRE (25KW EQ)	EA	4
	* *	SIGN, "FM973"	EA	2
	* *	SIGN, " MURCHISON ST"	EA	2
	**	SIGN, R10-17T	EA	2
610	**	ANTENNA (OMNI-DIRECTIONAL)	EA	1
618	6023	CONDT (PVC) (SCH 40) (2") CONDT (PVC) (SCH 40) (3")		340
618	6029	CONDT (PVC) (SCH 40) (3") (BORE)		258
618	6030		LF	656
620 620	6007	ELEC CONDR (NO.8) BARE ELEC CONDR (NO.8) INSULATED		1260
620	6008 6009	ELEC CONDR (NO. 8) INSULATED	LF 	1594 200
620	6010	ELEC CONDR (NO.6) INSULATED	LF	400
620	6010	GROUND BOX TY D (162922) W/APRON	EA	400
684	6031	TRF SIG CBL (TY A) (14 AWG) (5 CONDR)		1719
684	6033	TRF SIG CBL (TY A) (14 AWG) (5 CONDR)		476
684	6079	TRF SIG CBL (TY C) (12 AWG) (2 CONDR)	LF	1031
682	6001	VEH SIG SEC (12")LED(GRN)	EA	8
682	6002	VEH SIG SEC (12")LED(GRN ARW)	EA	3
002		VEH SIG SEC (12")LED(GRN ARW)	EA	8
682				
682	6003			4
682 682 682	6003 6004 6005	VEH SIG SEC (12")LED(YEL ARW) VEH SIG SEC (12")LED(RED)	EA	4

SUMMARY OF QUANTITIES (CONTINUED)					
ITEM NO.	DESC CODE	DESCRIPTION	UNIT	ESTIMATE	
628	6165	ELC SRV TY D 120/240 070(NS)AL(E)SP(o)	EA	1	
682	6049	BACKPLATE W/REFL BRDR(4 SEC)	EA	2	
682	6060	BACKPLATE W/REFL BRDR(3 SEC)	EA	8	
685	6004	INSTL RDSD FLSH BCN ASSM(SOLAR PWRD)	EA	1	
686	6035	INS TRF SIG PL AM(S)1 ARM(32')	EA	1	
686	6051	INS TRF SIG PL AM(S)1 ARM(48')	EA	1	
686	6251	INS TRF SIG PL AM(S)2 ARM(60'-44)	EA	1	
687	6001	PED POLE ASSEMBLY	EA	3	
	**	DRILL SHAFT (TRF SIG POLE)(24")	LF	18	
688	6001	PED DETECT PUSH BUTTON (APS)	EA	8	
	**	SIGN, PEDESTRIAN PUSH BUTTON (9"*15")(F	10- <b>1</b>	4	
	**	SIGN, PEDESTRIAN PUSH BUTTON (9"*15") (F	10- <b>E</b> A	4	
688	6003	PED DETECTOR CONTROLLER UNIT	EA	1	
682	6018	PED SIG SEC (LED) (COUNTDOWN)	ΕA	8	
6004	6031	ITS COM CBL (ETHERNET)	LF	65	
6292	6003	RVDS(PRESENCE AND ADVANCE DET)	EA	4	
6292	6002	RVDS ( ADVANCE DETECTION ONLY)	ΕA	2	
	**	RADAR COMMUNICATION CABLE	LF	949	
7251	6001	SUBSURFACE UTIL (OUTSIDE RDBED)	EA	5	
7251	6002	SUBSURFACE UTIL (WITHIN RDBED)	EA	5	

\* \* MATERIALS SUBSIDIARY TO PERTINENT ITEMS

#### TRAFFIC SIGNAL EQUIPMENT SUPPLIED BY CONTRACTOR PER TXDOT APPROVAL AND PAID BY FOR ACCOUNT

	DESCRIPTION	UNIT	ESTIMATE
1	TRAFFIC SIGNAL CONTROLLER	EA	1
2	TRAFFIC SIGNAL CABINET	EA	1
3	MANAGED HARDENED ETHERNET SWITCH	EA	1
4	POWER SUPPLY (FOR SWITCH)	EA	1
5	CCTV CAERA	EA	1



TRAVIS

7

ROADWAY FM973 MURCHISON ST. FM973	<b>FROM</b> 30.3348827, -97.5592128 30.3348827, -97.5592128	<b>TO</b> 30.3295160, -9 30.3295160, -9
MURCHISON ST.	30.3348827, -97.5592128 30.3348827, -97.5592128	30.3295160, -9
	30.3348827, -97.5592128	
EN/072		
EN/072		
FIVIJ/J	30.3348827, -97.5592128	30.3295160, -9
MURCHISON ST.	30.3348827, -97.5592128	30.3295160, -9
FM973	30.3348827, -97.5592128	30.3295160, -9
MURCHISON ST.	30.3348827, -97.5592128	30.3295160, -9
	FM973 MURCHISON ST.	


Note: The asset locations specified in the tables are provided in GPS grid coordinates.

The City of \_\_\_\_MANOR\_\_\_\_\_ accepts the fixed responsibility to maintain, control, supervise, and regulate the above on State highway ROW through its corporate limits Code.

This document is per Chapter 311 of the Texas Transportation Code supplemental to the existing Municipal Maintenance Agreement (MMA) with the City of \_\_\_\_\_MANOR\_\_\_\_\_.

This document does not relieve the City of <u>MANOR</u> from their responsibility to maintain all roads within their city limits as stated in the MMA.

Executed on behalf of the City by: \_\_\_\_\_\_ Date: \_\_\_\_\_ Date: \_\_\_\_\_

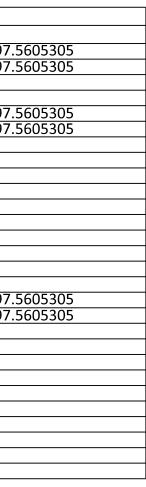

Austin District Maintenance Office					
Texa	Texas Department of Transportation				
		FI	M973		
ACC	ст				NCE
ASS	ASSET MAINTENANCE				
			SHEE	Т	1 OF 2
© 2022	CONT	SECT	JOB		HIGHWAY
DS: CK:	1200	03	064		FM 973
DW: CK:	DIST		COUNTY		SHEET NO.
	AUS		TRAVIS		7A

		LIM	ITS
ASSET DESCRIPTION	ROADWAY	FROM	
Traffic Signals			
[!!umination	FM973 MURCHISON ST.	30.3348827, -97.5592128 30.3348827, -97.5592128	30.3295160 30.3295160
Landscoping Features			
Aesthetic/Noise Walls/ Special Features			
Other			
Note: The asset locations specified in the tab	les are provided in GPS grid coordinates		

The City of \_\_\_\_\_MANOR\_\_\_\_\_ accepts the fixed responsibility to maintain, control, supervise, and regulate the above on State highway ROW through its corporate limits Code.


This document is per Chapter 311 of the Texas Transportation Code supplemental to the existing Municipal Maintenance Agreement (MMA) with the City of \_\_\_\_\_MANOR\_\_\_\_\_.

This document does not relieve the City of \_\_\_\_<u>MANOR\_\_\_\_</u> from their responsibility to maintain all roads within their city limits as stated in the MMA.

Executed on behalf of the City by: \_\_\_\_\_\_ Date: \_\_\_\_\_ Date: \_\_\_\_\_

10
0
-97.5605305 -97.5605305
-97.5605305

	Austin District Maintenance Office				
Texa	Texas Department of Transportation				
		C	M973		
		FI			
ASS	ASSET MAINTENANCE				
	SHEET 2 OF 2				
© 2022	CONT	SECT	JOB		HIGHWAY
DS: CK:	1200	03	064		FM 973
DW: CK:	DIST		COUNTY		SHEET NO.
D#* CK*	AUS		TRAVIS		7B

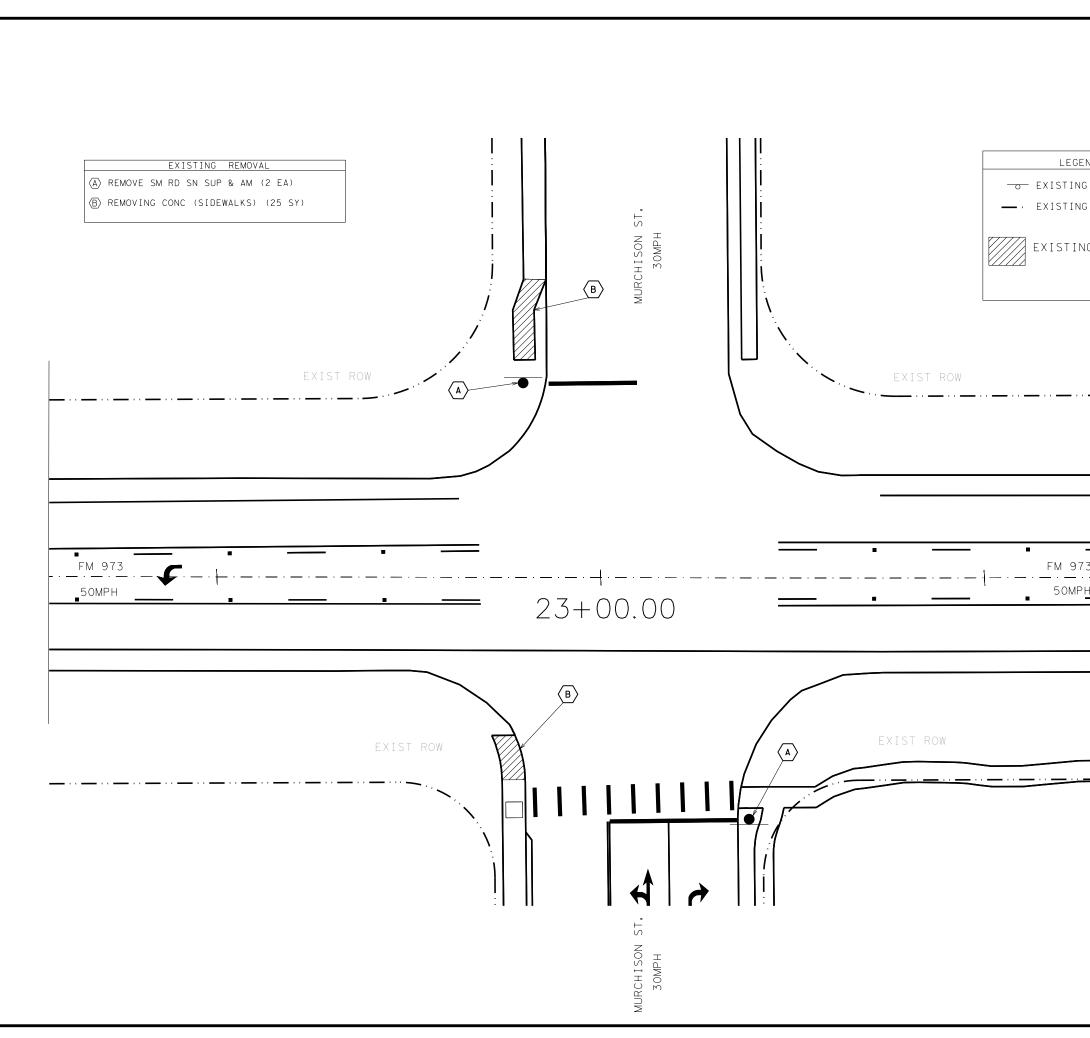


11:50:27 AN

1/26/2023

DATE: FILE:

	® 2
GEND	
NG SIGN ON POST	
NG R.O.W. LINE	
NG SIDEWALK	
	*
	MOHAMMED J. ALI 144367 CENS
	1/26/2023
	DocuSigned by:
73 <b>5</b>	Moliammed alli 7846EBBAE6FD4CC
	APPROX. SCALE(IN FEET): 0 25
	Austin District North Travis Area Office
	Texas Department of Transportation
	INTERSECTION REMOVAL DETAILS
	© 2022         CONT         SECT         JOB         HIGHWAY           1200         03         064         FM 973           DIST         COUNTY         SHEET NO.           AUS         TRAVIS         8

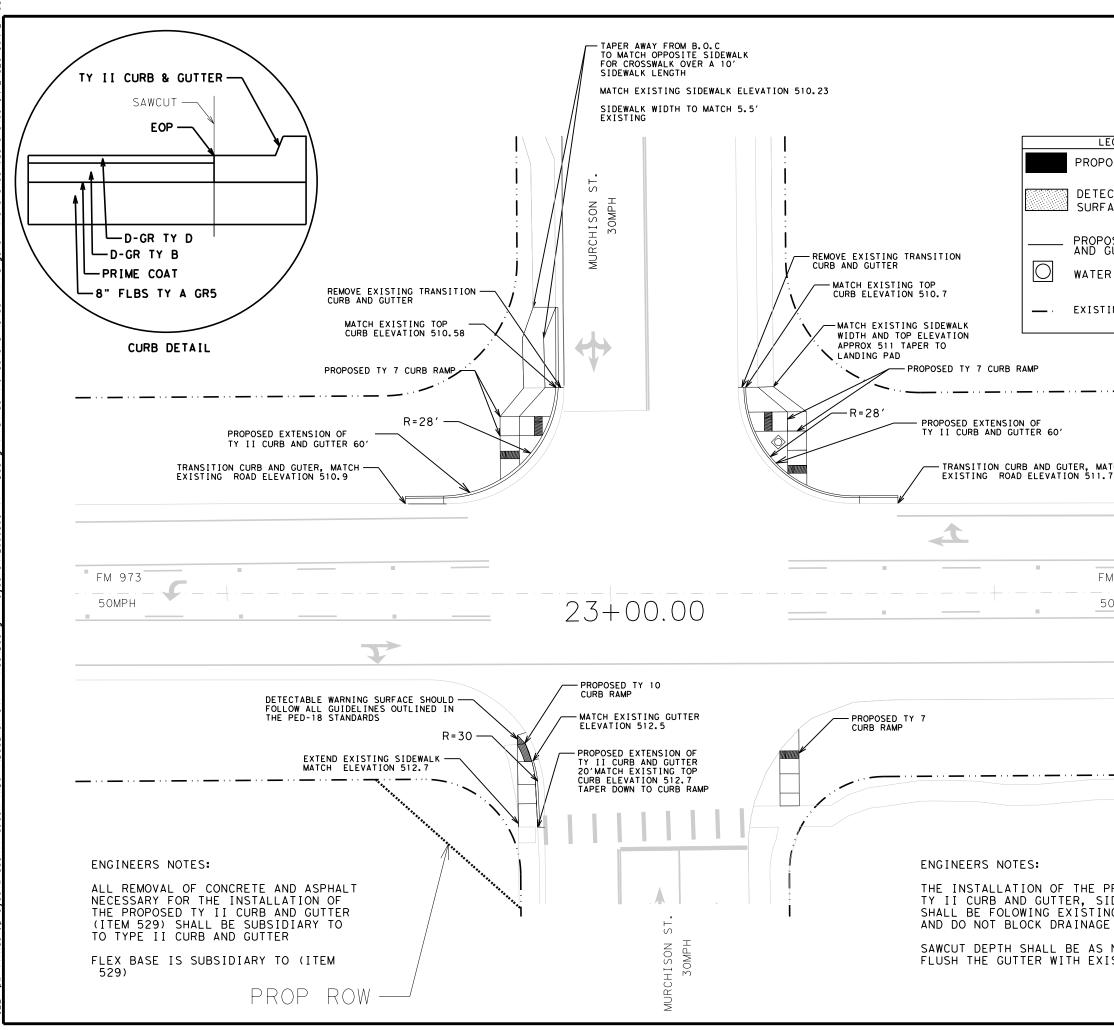


AN

10:06:09 Drojectwi

1/27/2023

DATE:

			) Z
			₽ŗ <i>₽</i>
LEGEND POSED SIDEWALK			
ECTABLE WARNING FACE			
POSED TY II CURB GUTTER			
ER VALVE			
TING R.O.W. LINE			
··· <u> </u>		A A	
		MOHAMMED J. AI	
MATCH . 7		NESS/ONAL ENGINE	2
		1/27/202	23
	(	—DocuSigned by: Moliammed	nı:
FM 973	l	7846EB8AE6FD4	
50MPH			
	APPROX.	SCALE(IN FEET)	:
	0	25	
		stin District avis Area Offi	ice
	Texas Depai	rtment of Trans	portation
PROPOSED SIDE WALK			
ING ELEVATION GE PATTERNS		RSECTIO	NC
S NECESSARY TO (ISTING PAVEMENT		AYOUT	
	© 2022 CONT SEC 1200 0	3 064	HIGHWAY
	AUS	COUNTY TRAVIS	SHEET NO. 9

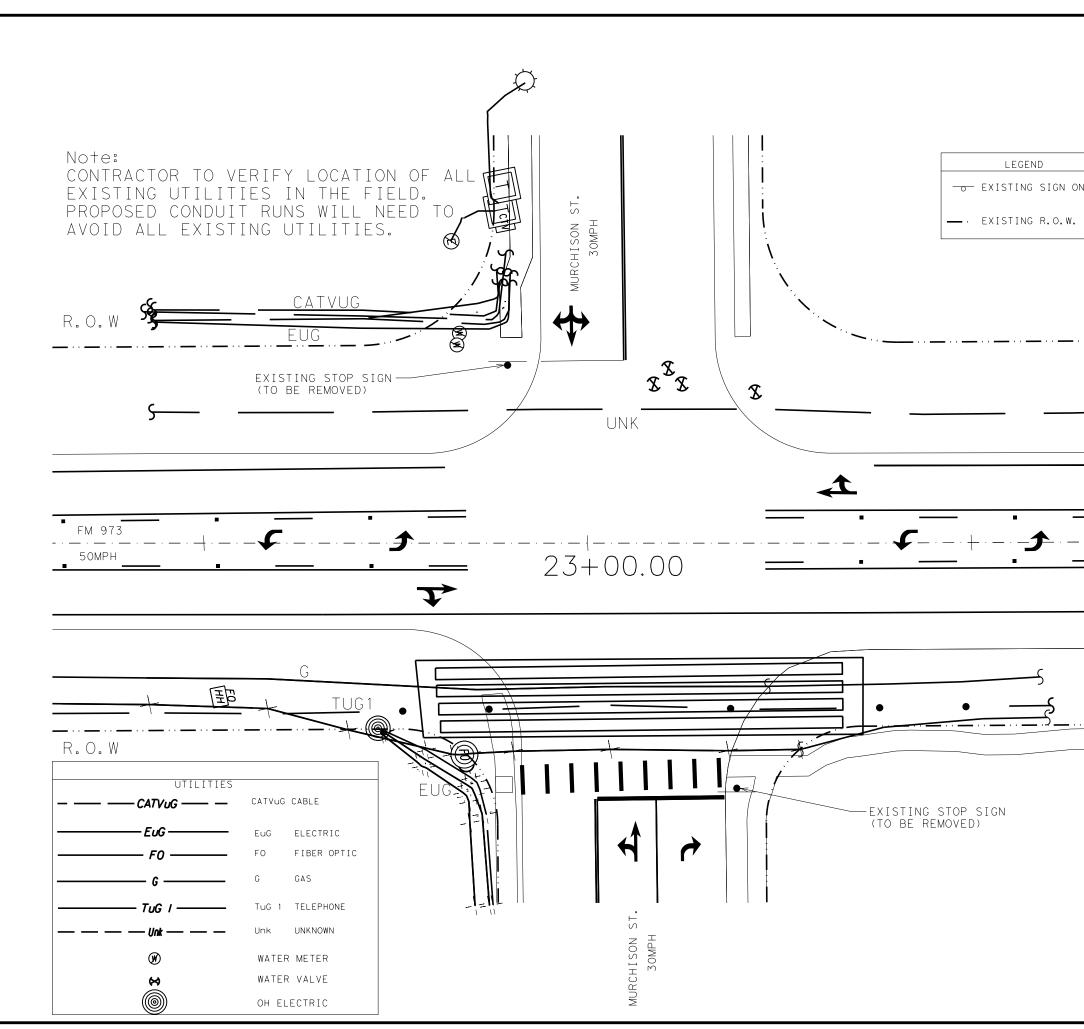


AN

11:50:36 projectwis


1/26/2023

DATE:

DN POST	2
R.O.W	
S	MOHAMMED J. ALI 144367
• • • • • • • • • • • • • • • • • • •	1/26/2023 DocuSigned by: Molrammed alli 7846EB8AE6FD4CC
	APPROX. SCALE (IN FEET): 025
R.O.W	
	Austin District North Travis Area Office
	Texas Department of Transportation EXISTING CONDITION LAYOUT
	© 2022         CONT         SECT         JOB         HIGHWAY           1200         03         064         FM 973           DIST         COUNTY         SHEET NO.           AUS         TRAVIS         10

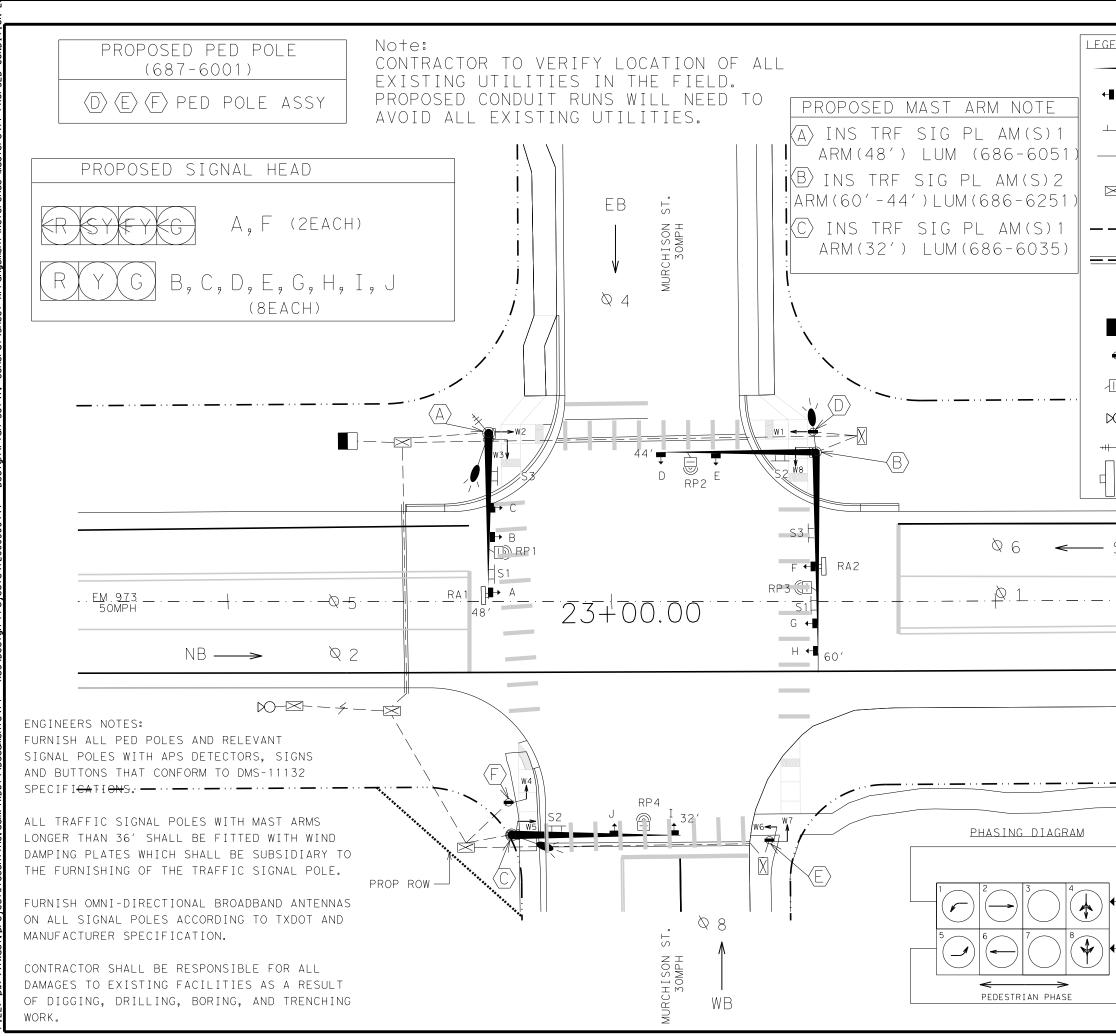


GEND (	PROPOSED)	
	SIGNAL POLE AND MAST ARM 4	@ Z
1	TRAFFIC SIGNAL HEAD 10	
	OVERHEAD STREET SIGN NAME	
	LUMINAIRE, 8′ (LED) 3	
$\times$	GROUND BOX TY D 6	
	CONDUIT (TRENCH)	
	CONDUIT (BORE)	
	EXISTING R.O.W. LINE	
	GROUND MOUNTED CONTROLLER CABINE W/ APRON 1	т
÷	PED POLE WITH (APS) FLASHING SIGN AND BUTTON 3	
	RVDS (PRESENCE) 4 (RP#)	THE OF MELTING
$\bowtie$	SERVICE METER POLE	
+	ANTENNA (POLE 1)	MOHAMMED J. ALI 144367
	RVDS (ADVANCE) 2 (RA#)	ANT CENSE ANT
		1/26/2023
SB		DocuSigned by:
50		Moliammed Ali
	– . <u>FM . 973</u> 50МРН	7846EB8AE6FD4CC
		APPROX. SCALE (IN FEET);
		0 25
· · · _	<u> </u>	
		Austin District North Travis Area Office
		•
ן ר	RING 1	xas Department of Transportation
		PROPOSED
		CONDITION
l	RING 2	LAYOUT
	© 2022	CONT         SECT         JOB         HIGHWAY           1200         03         064         FM 973
		DIST COUNTY SHEET NO. AUS TRAVIS 11

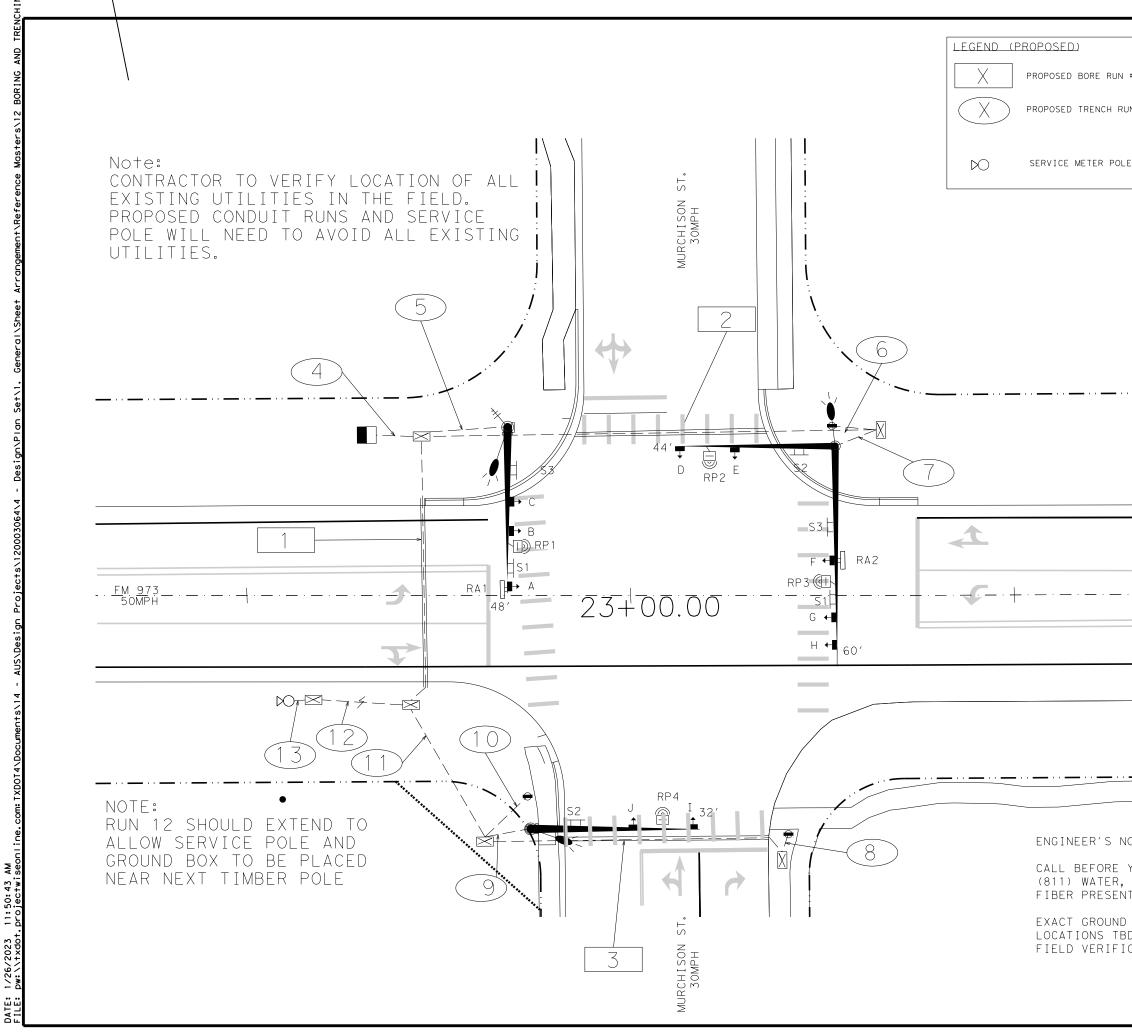

N # RUN # DLE	©.Z
	MOHAMMED J. ALI 144367 1/26/2023 DocuSigned by: Moliammed Ali
	APPROX. SCALE (IN FEET): 0 25
NOTES: YOU DIG , GAS, AND NT D BOX BD BY ICATION	Austin District North Travis Area Office

POLE NO. A B C PED D PED E PED F	22*68.00 23*54.00 22*73.75 23*47.66 23*41.00 22*73.00 22*11.00 22*31.00	43.85'LT 39'LT 60.77'RT 41.7'LT 62'RT 52.32'RT 30.42'RT 41.80'LT		PROP PRO	P 48' SMA POLE 60'-44' DMA POL P 32' SMA POLE PROP PED PROP PED PROP PED PROP SERVIC P TRAFFIC SIGN	LE W/ LUMINAII W/ LUMINAIRE POLE POLE POLE E METER					Ý	ft tur IELD flashin	0.	<u>♥</u>	FM S	
							· ·	INSIDE ARM CAB	FS #		}	ELLOW	0.	3'		
		INSIDE POL	E CABLES				POLE NO. HEAD	#1	4 AWG 7/C TY A	RADAR 6/C	,	ARROW	L	<u>' (</u>		
INSIDE	#14	AWG	#12 AWG	CATS	# 8 AWG	RADAR	POLE A A POLE A B	12	45					1.1'	0.8'	1.1' 1.2'
POLES POLE A	5/C TY A 40	7/C TY A 20	2/C TY C E	TH/RADIO 35	HHW (INS) 60	6/C 40	POLE A C	24			□ 1	$\cap$ 17	Т		0.4'	
POLE A	50	20	5	35	60	60	POLE A RPDD POLE B D		41	86		0 - 1 7		1.	5" RAD, O.	5" BORDER,
POLE C	30		5		60	20	POLE B E POLE B RPDD	31		36	36	x42		WH	ITE ON GRE	EN;"FM 973",
PED POLE D	10		5				POLE B F	47	36			$\leq 1$		CL	EARVIEWHWY	- S - W
PED POLE E PED POLE F	10		5				POLE B G POLE B H	11				$\supset$ $\square$				
TOTAL	150	40	35	35	180	120	POLE B RPDD POLE C I	12		63	(7	2 EACH)				
			<b>.</b>		<b>I</b>		POLE C J POLE C RPDD	17		23	· C					
							TOTAL	154	122	208						STATE OF IC
	1	T		1		1	CABLE TERMIN	ATION CHART		1	1					
COLOR	CABLE1 POLE	A CABLE2	CABLE3 POLE B	CABLE4 POLE B	CABLE5 POLE B	CABLE6 POLE B	CABLE7 POLE C	CABLE8 POLE D	CABLE8 POLE D	CABLE9 POLE F	CABLE9 POLE F	CABLE10 POLE F	CABLE10 POLE F	CABLE11 POLE E	CABLE810 POLE E	MOHAMMED J.
COLON	7cndr	POLEA 5cm	fr 7cndr	5cndr	7cndr	5cndr	5cndr	5cndr	5cndr	5cndr	5cndr	5cndr	5cndr	5cndr	5cndr	144367
																SS/ONAL EN
BLACK	SH A YA PH1	SH B,C Y PH6	SH D Y PH8	SH E Y PH8	SH F YA PH5	SH G,H ` PH2	Y SH I,JY PH4	PED W1DW PED PH6	PED W2DW PED PH6	SPARE	SPARE	PED W5DW PED PH2	PED W6DW PED PH2	SPARE	SPARE	CALCONAL CO
				_	_	_										
WHITE	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	COMMON	1/26/20
																DocuSigned by
RED	SH A RA PH1	SH B,C R PH6	SH D R PH8	SH E R PH8	SH F RA PH5	SH G,HF PH2	R SH I,JR PH4	SPARE	SPARE	PED W3DW PED PH4	PED W4DW PED PH4	SPARE	SPARE	PED W7DW PED PH8	PED W8DW PED PH8	Moliamme
GREEN	SH A GA	SH B,C G	SH D G	SH E G				PED W1W	PED W2W	PED W3W	PED W4W	PED W5W	PED W6W	PED W7W	PED W8W	
UNEEN	PH1	PH6	PH8	PH8	PH5	PH2	PH4	PED PH6	PED PH6	PED PH4	PED PH4	PED PH2	PED PH2	PED PH8	PED PH8	
ORANGE	SH A FYA	SPARE	SPARE	SPARE	SH F FYA PH6	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	
	PH2															_
BLUE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	
			ELEC	CTRICAL TA	BLE											
				CONI	DUIT							S3	(2 EAC	H)		
RUN #	TRENCH	BORE	#CAWC #6	6AWG AWG	#14 AWG #14	AWG TY #8AWG	#0.A.W.C				-	5.1'				
	INLINCH	LEN	NGTH H6AWG (E	BARE 7/C T	Y 5/C TY 2/C	C TY (INS)	#8AWG 6/C (BARE) RADAR	ETHERNET							[	
1	2"	3" 3"		· A	A	-	7 1			0.2' -	(					Austin District
2			70 <u>2</u> 17	1 2		4 4 2 2					┨╻╻╻╸			ST		Central Design
3		3	77		2	2	3			.80 م	MUF	<b>≀(`HI</b> '	S()N			
4			102 20	1 3		8 2 2	$\frac{3}{3}$ 6	1							Teyas	Department of Tran
6			18			<u> </u>	1			0.3'	L				lexas	
7		2 1	15	2	3	1 2	3 3					3.9'				TRAFFIC
8			10		2	2 2	3 1			C	.3'		0.3'	0.3'		
10			20		1	1							0000555	U.S.''		SIGNAL
11		2 4	40	1	5	3 2	3 1				1.5" Wuite	RAD, 0.5" ON GREEN;	BORDER, -	0.4'		DETAILS
12	2		00 <u>2</u> 20 2	1		6						VIEWHWY-3-				
1.5	<u>د</u>		-~		+ +		· · · · · · · · · · · · · · · · · · ·					·			-	ONT SECT JOB
	340 2	58 656	400 2	200 314	1415 9	96 1414	1260 621									


DETA

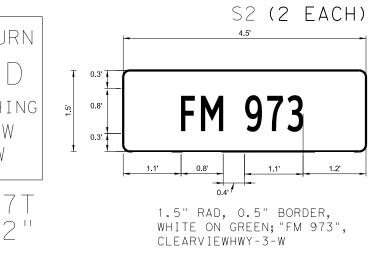







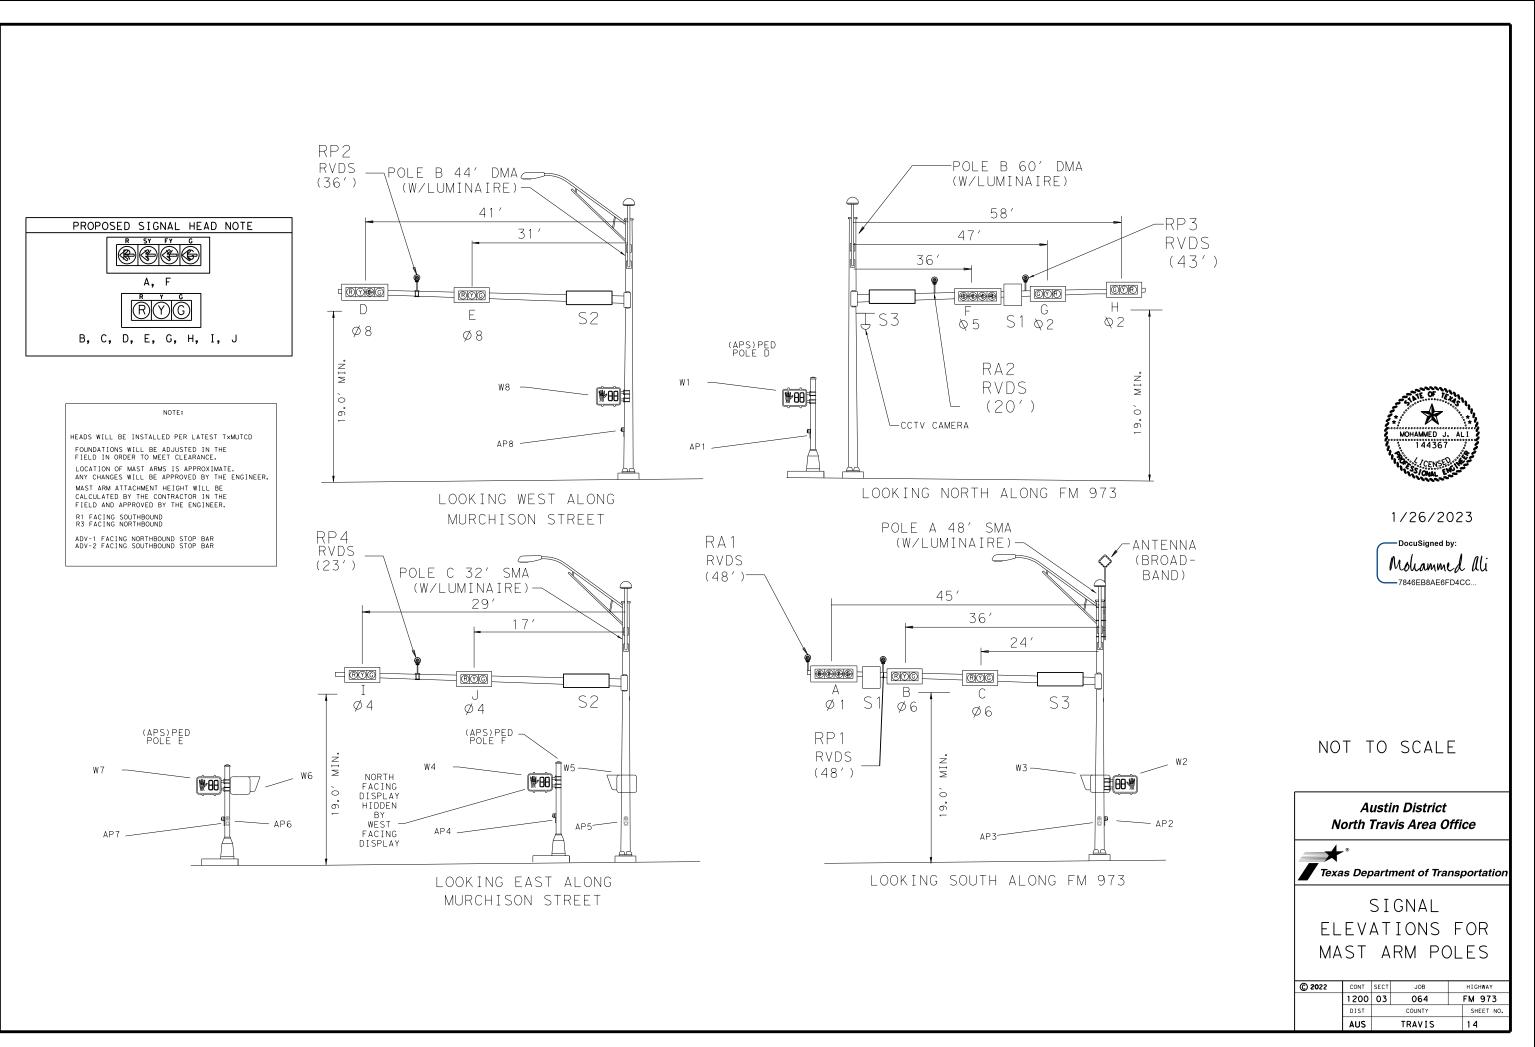



1. INSTALL SIGNALS HORIZONTALLY ON MAST ARM 17'6" ABOVE THE ROADWAY

2.FURNISH YELLOW HOUSING FOR VEHICLE AND PEDESTRIAN SIGNALS

3. FURNISH VEHICLE AND PEDESTRIAN SIGNALS WITH LIGHT EMITTING DIODE (LED) SIGNAL LAMP UNITS.

4. USE TYPE C HIGH SPECIFIC INTENSITY GRADE SHEETING FOR SIGNS MOUNTED UNDER OR ADJACENT TO THE SIGNAL HEADS.

5. THE TXDOT AUSTIN DISTRICT WILL PROGRAM PHASING AND TIMING FOR SIGNALS. CONTRACTOR TO PROVIDE CONTROLLERS AND CONTACT TXDOT TWO TO THREE WEEKS PRIOR TO INSTALLATION.

6.LOCATE CONTROLLER(SI, MAST ARM POLES, RADAR DETECTION SYSTEM, ETC., AS APPROVED.

7. REPAIR OR REPLACE PAVEMENT AND SIDEWALKS DAMAGED BY THE CONTRACTORS FORCES DURING CONSTRUCTION AT NO COST TO THE DEPARTMENT.

8. FURNISH AND INSTALL URETHANE FOAM TO ENCLOSE THE ENDS OF EACH CONDUIT CONTAINING SIGNAL CABLE AND ELECTRICAL CONDUCTORS.

9. CAP SPARE CONDUITS INSTALLED IN POLE FOUNDATIONS AND GROUND BOXES USING APPROVED CAPPING DEVICES.

10.DO NOT PLACE SIGNAL HEADS OVER THE ROADWAY UNTIL ALL NECESSARY MATERIALS ARE ON HAND AS APPROVED.

11. INSTALL TWO SET SCREWS ON ALL VEHICLE SIGNAL HEAD MOUNTING HARDWARE FITTINGS.

12. WRAP SIGNAL HEADS WITH DARK PLASTIC OR SUITABLE MATERIAL TO CONCEAL THE SIGNAL FACES FROM THE TIME OF INSTALLATION UNTIL PLACING INTO OPERATION.

13. VERIFY THE CORRECT MAST ARM POLE LENGTHS FOR EACH SIGNALIZED INTERSECTION PRIOR TO ORDERING THE EQUIPMENT.

- 14. GROUND POLE ASSEMBLIES IN ACCORDANCE WITH THE REQUIREMENTS SHOWN ON THE LATEST TRAFFIC SIGNAL POLE FOUNDATION STANDARD. USE THE GROUNDING LUG ON THE POLE TO GROUND THE POLE TO THE GROUND CONDUCTORS FROM THE CONDUITS.
- 15. REFER TO TXDOT WEBSITE FOR PREQUALIFIED PRODUCTS LIST REGARDING VEHICLE LED TRAFFIC SIGNAL LAMP UNIT, CONDUIT, CONDUCTORS. CHECK WEBSITE PERIODICALLY FOR CURRENT UPDATES.
- 16. THE LOCATION OF THE RADAR DETECTION IS APPROXIMATE. CONSULT WITH THE RADAR DETECTOR MANUFACTURER AND MAKE ARRANGEMENTS FOR MANUFACTURED-PROVIDED TRAINING BEFORE DETERMINING THE LOCATION OF THE DETECTION ZONES, IN ACCORDANCE WITH ITEM 6292 6003, "RADAR PRESENCE DETECTION DEVICE", THE PROPOSED LOCATIONS OF THE DETECTION ZONES WILL BE SUBMITTED TO THE ENGINEER AND/OR DEPARTMENT'S TRAFFIC OPERATIONS SECTION FOR REVIEW/APPROVAL PRIOR TO MOUNTING AND ALIGNING THE RPDDS.
- 17. FURNISH AND INSTALL WIRE NUTS WITH FACTORY APPLIED WATERPROOF SEALANT IN ACCORDANCE WITH TXDOT STANDARD ED(3)-14, WHEN SPLICING IN THE ACCESS COMPARTMENT OF THE EXISTING TRAFFIC SIGNAL POLES THAT DO NOT HAVE TERMINAL BLOCKS. VERIFY WHICH OF THE EXISTING TRAFFIC SIGNAL POLES DO NOT HAVE TERMINAL BLOCKS PRIOR TO ODERING SPLICING MATERIALS.

18. PROVIDE 250 WATT LIGHT EMITTING DIODE (LED) LAMP LUMINAIRES OPERATING AT 240 VOLTS.


19. ROUTE CABLE LUMINAIRES TO THE SERVICE ENCLOSURE. SEE SIGNAL DETAIL SHEET.


20. FURNISH OMNI-DIRECTIONAL BROADBAND ANTENNAS ON ALL SIGNAL POLES ACCORDING TO TXDOT AND MANUFACTURER SPECIFICATION.




1/20/2023

 DocuSigned by Molianne.



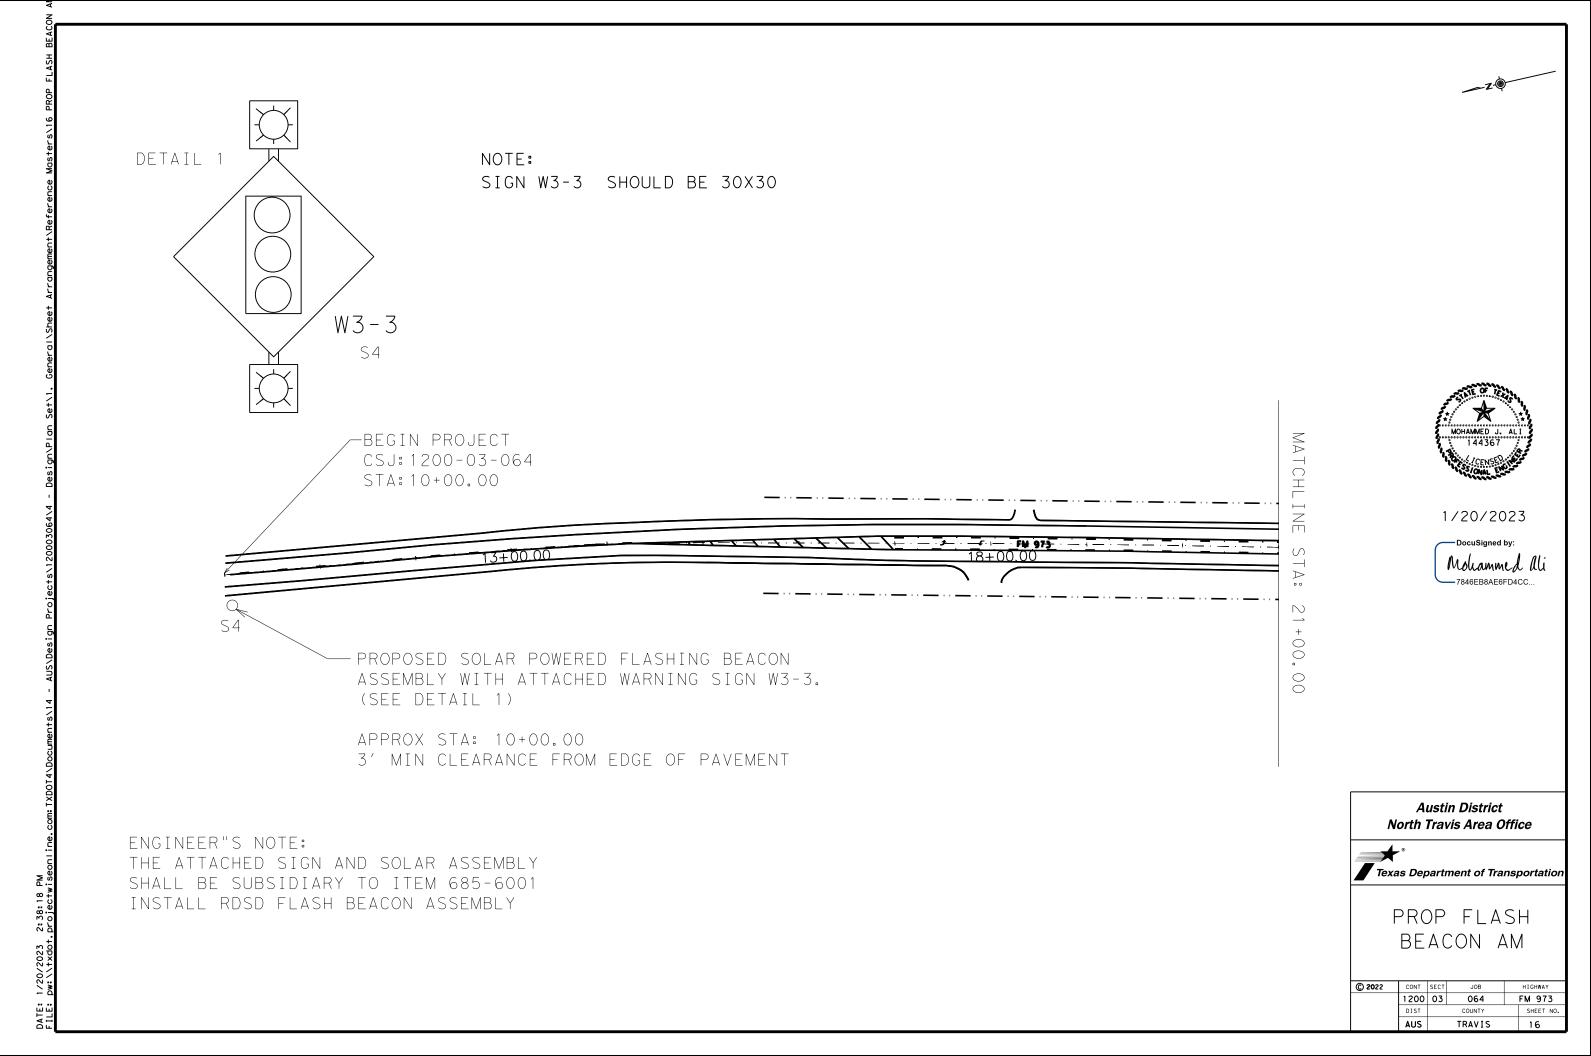

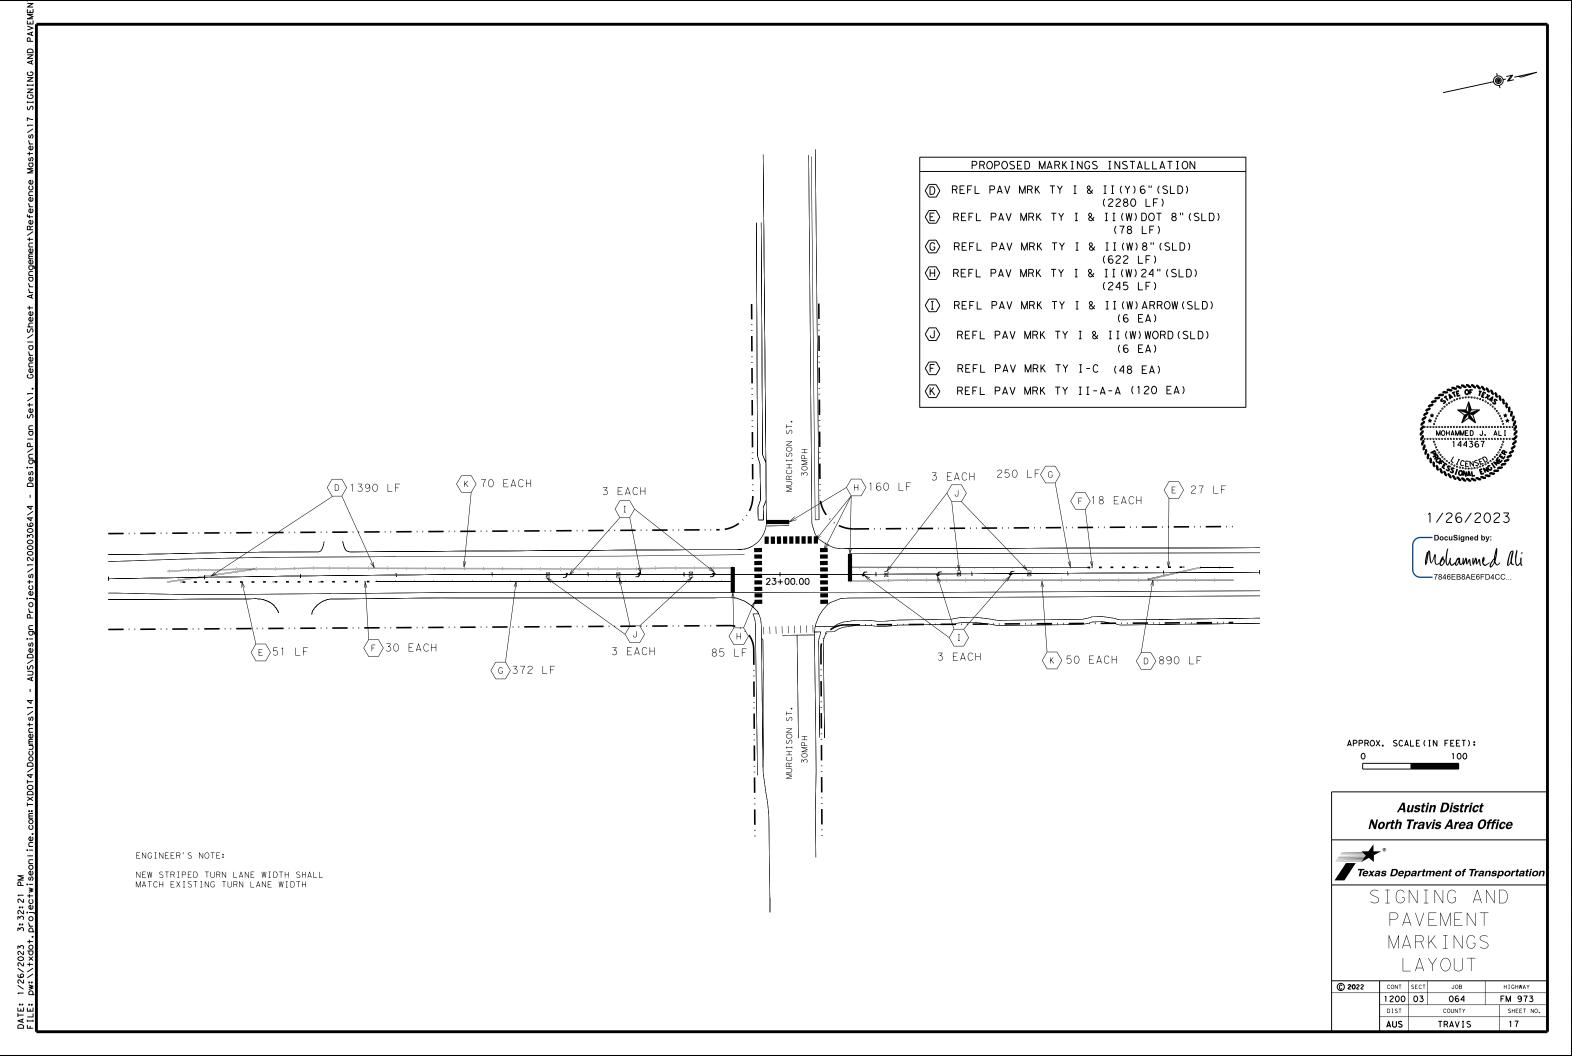

Ι.	STORMWATER POLLUTION P			111.	CULTURAL RESOURCES			VI. HAZAR
	TPDES TXR 150000: Stormwater required for projects with disturbed soil must protect Item 506.	1 or more acres disturbed so	oil. Projects with any		archeological artifacts are f	ound duri	s in the event historical issues or ng construction. Upon discovery of rock, flint, pottery, etc.) cease	Genera Comply with hazardous ma making worke
	List MS4 Operator(s) that m	ay receive discharges from	this project.		work in the immediate area an	d contact	the Engineer immediately.	provided wit
		d prior to construction act	ivities.		🛛 No Action Required		Required Action	Obtain and H used on the
	1.				Action No.			Paints, acio compounds or
	2.							products whi
	No Action Required	Required Action			1.			Maintain an In the even
	Action No.				2.			in accordance
	<ol> <li>Prevent stormwater pollu accordance with TPDES Pe</li> </ol>		and sedimentation in		3.			immediately. of all produ
	2. Comply with the SW3P and required by the Engineer	revise when necessary to co	ontrol pollution or		4.			Contact the * Dead * Trash
				IV.	VEGETATION RESOURCES			* Undes * Evider
	<ol> <li>Post Construction Site N the site, accessible to</li> </ol>	ofice (CSN) with SW3P inform the public and TCEQ, EPA or			Preserve native vegetation to			Does the
	· · ·	specific locations (PSL's) submit NOI to TCEQ and the			164, 192, 193, 506, 730, 751,	752 in c	n Specification Requirements Specs 162, order to comply with requirements for ing, and tree/brush removal commitments.	replacen
I	I. WORK IN OR NEAR STREA ACT SECTIONS 401 AND		TLANDS CLEAN WATER		🛛 No Action Required		Required Action	If "No", If "Yes" Are the
	USACE Permit required for	filling, dredging, excavati			Action No.			
		eks, streams, wetlands or we			1.			If "Yes
	the following permit(s):	e to all of the terms and co	nditions associated with		2.			the not activit
								15 work
	🛛 No Permit Required				3.			If "No"
	Nationwide Permit 14 - wetlands affected)	PCN not Required (less than	1/10th acre waters or		4.			schedule In eithe activit
	🗌 Nationwide Permit 14 -	PCN Required (1/10 to <1/2 (	ocre, 1/3 in tidal waters)					asbesto
	🗌 Individual 404 Permit R	equired		v.	FEDERAL LISTED, PROPOSE	D THREA	TENED, ENDANGERED SPECIES,	Any othe
	Other Nationwide Permit	Required: NWP#			CRITICAL HABITAT, STATE AND MIGRATORY BIRDS,	LISTED	SPECIES, CANDIDATE SPECIES	on site.
	-	ers of the US permit applies Practices planned to control			No Action Required		Required Action	Actio
	1.				Action No.			2.
	2.				1.			3.
	3.				2.			VII. <u>ОТН</u> Е
					3			(inc
	4.				3.			
		ary high water marks of any ers of the US requiring the Bridge Layouts.	-		4.			Acti
	Best Management Practic	ces:			-		, cease work in the immediate area, tact the Engineer immediately. The	1. 2.
	Erosion	Sedimentation	Post-Construction TSS	wor	rk may not remove active nests	from bri	dges and other structures during	
	Temporary Vegetation	Silt Fence	Vegetative Filter Strips		sting season of the birds asso e discovered, cease work in th		th the nests. If caves or sinkholes ite area, and contact the	3.
	Blankets/Matting	Rock Berm	Retention/Irrigation Systems	Eng	gineer immediately.			
	Mulch	— Triangular Filter Dike	Extended Detention Basin					
	Sodding	Sand Bag Berm	Constructed Wetlands		LIST OF	ABBREVIA	TIONS	
	☐ Interceptor Swale	🗌 Straw Bale Dike	🗌 Wet Basin	BMP:	Best Management Practice	SPC		
	Diversion Dike	Brush Berms	Erosion Control Compost	CGP: 0	Construction General Permit Texas Department of State Health Serv	SW3F	Storm Water Pollution Prevention Plan	
	Erosion Control Compost	Erosion Control Compost	Mulch Filter Berm and Socks	FHWA:	Federal Highway Administration Memorandum of Agreement	PSL: TCE	Project Specific Location	
	Mulch Filter Berm and Socks	Mulch Filter Berm and Socks	Compost Filter Berm and Socks	MOU: I	Memorandum of Understanding Municipal Separate Stormwater Sewer S	TPDE	S: Texas Pollutant Discharge Elimination System	
		Compost Filter Berm and Socks	Sand Filter Systems	MBTA: I	Migratory Bird Treaty Act Notice of Termination		DT: Texas Department of Transportation	
					Notice of Termination Nationwide Permit		CE: U.S. Army Corps of Engineers	

#### MATERIALS OR CONTAMINATION ISSUES

oplies to all projects):

Hazard Communication Act (the Act) for personnel who will be working with als by conducting safety meetings prior to beginning construction and aware of potential hazards in the workplace. Ensure that all workers are ersonal protective equipment appropriate for any hazardous materials used. on-site Material Safety Data Sheets (MSDS) for all hazardous products ject, which may include, but are not limited to the following categories: solvents, asphalt products, chemical additives, fuels and concrete curing ditives. Provide protected storage, off bare ground and covered, for may be hazardous. Maintain product labelling as required by the Act.

quate supply of on-site spill response materials, as indicated in the MSDS. a spill, take actions to mitigate the spill as indicated in the MSDS, ith safe work practices, and contact the District Spill Coordinator e Contractor shall be responsible for the proper containment and cleanup spills.

ineer if any of the following are detected: istressed vegetation (not identified as normal) 25, drums, canister, barrels, etc. 16 smells or odors of leaching or seepage of substances

ect involve any bridge class structure rehabilitation or

(bridge class structures not including box culverts)?

🛛 No

en no further action is required. en TxDOT is responsible for completing asbestos assessment/inspection.

Its of the asbestos inspection positive (is asbestos present)?

nen TxDOT must retain a DSHS licensed asbestos consultant to assist with tion, develop abatement/mitigation procedures, and perform management s necessary. The notification form to DSHS must be postmarked at least ays prior to scheduled demolition.

en TxDOT is still required to notify DSHS 15 working days prior to any nolition.

se, the Contractor is responsible for providing the date(s) for abatement nd/or demolition with careful coordination between the Engineer and sultant in order to minimize construction delays and subsequent claims.

dence indicating possible hazardous materials or contamination discovered ardous Materials or Contamination Issues Specific to this Project:

ion Required 🛛 🗌 Required Action

#### IVIRONMENTAL ISSUES

regional issues such as Edwards Aquifer District, etc.)

ion Required

Required Action

Texas Department of Transportation

Design Division Standard

ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS

# EPIC

FILE: epic.dgn	dn: Tx[	00T	ск:RG	DW:	٧P	ск: AR
© TxDOT: February 2015	CONT	SECT	JOB		HIC	GHWAY
REVISIONS 12-12-2011 (DS)	1200	03	064		FM	973
05-07-14 ADDED NOTE SECTION IV.	DIST		COUNTY			SHEET NO.
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES,	AUS		TRAVI	S	1	8

#### BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended 1. to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the 2. responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop. sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the 9. BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown ON BC(2). THE OBEY WARNING SIGNS STATE LAW sign. STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES. CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, ČSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

#### WORKER SAFETY NOTES:

- 1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility" Apparel." or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.


#### COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- 1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- 2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEE	. 1	0F	12			
Texas Department	of Tra	nsp	ortation		Sa Div	affic afety vision ndard
BARRICADE A GENEF AND RE BC	RAL	N [ R	IOTE: E <b>me</b> n	S		ION
FILE: bc-21.dgn	DN: T)	<dot< th=""><th>ск: TxDOT</th><th>DW:</th><th>TxDOT</th><th>ск: TxDOT</th></dot<>	ск: TxDOT	DW:	TxDOT	ск: TxDOT
© TxDOT November 2002	CONT	SECT	JOB		ні	GHWAY
4-03 7-13	1200	03	064		FM	973
9-07 8-14	DIST		COUNTY			SHEET NO.
	AUS		TRAVI	-		

SHEET 1 OF 12

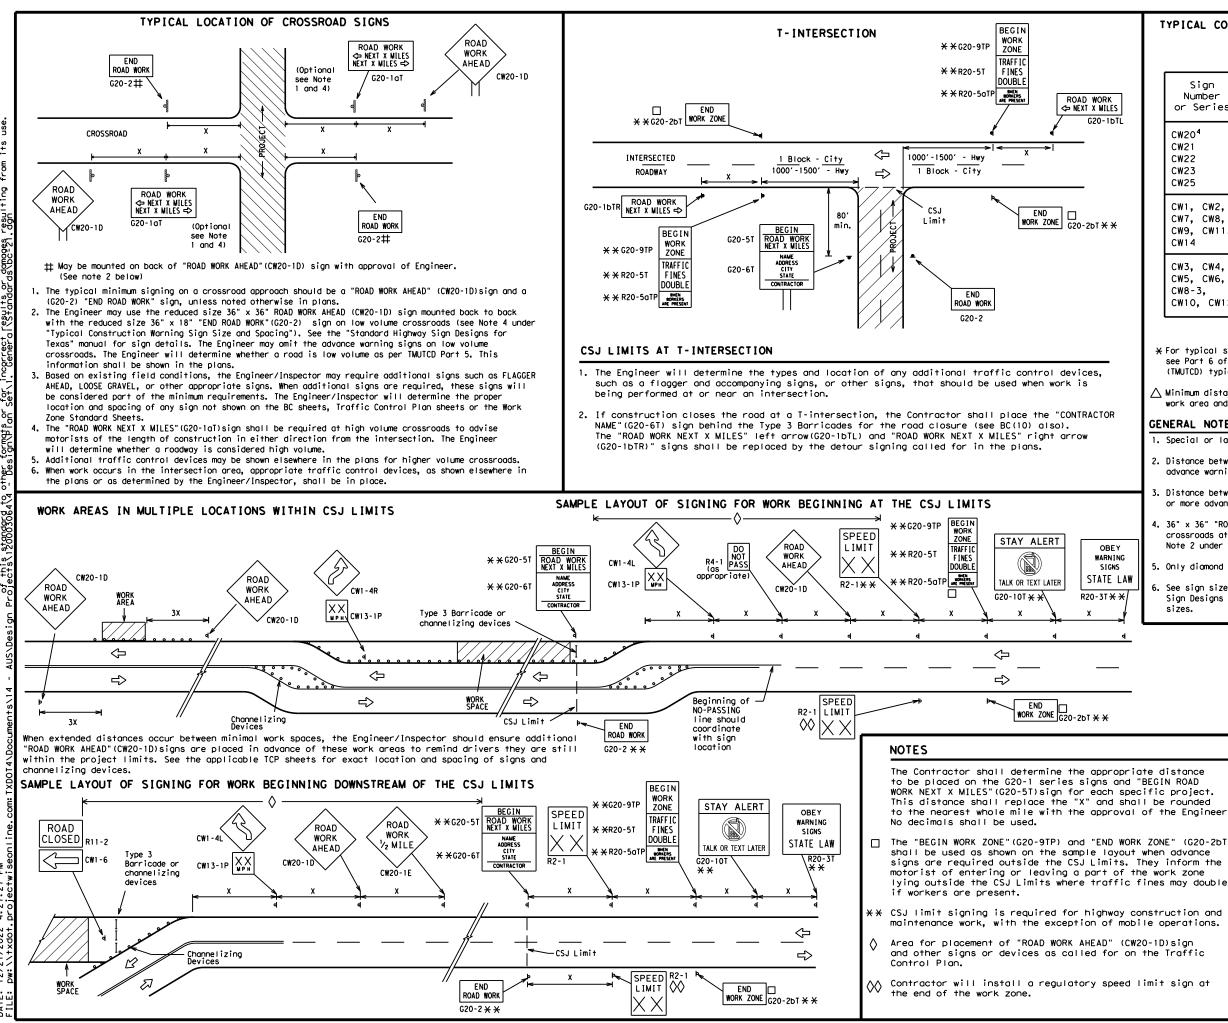

Ξ. 4:27:27 /2022 21 12/ ш

TYPICAL	CONSTRUCTION	WARNING	SIGN	SIZE	AND	SPACING <sup>1,5,6</sup>

SIZE

Sign Number or Series	Conventional Road	Expressway/ Freeway
CW20 <sup>4</sup> CW21 CW22 CW23 CW25	48" × 48"	48" × 48"
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" × 36"	48" × 48"
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" × 48"	48" × 48"

SF	PACING
Posted Speed	Sign∆ Spacing "X"
MPH	Feet (Apprx.)
30	120
35	160
40	240
45	320
50	400
55	500 <sup>2</sup>
60	600 <sup>2</sup>
65	700 <sup>2</sup>
70	800 <sup>2</sup>
75	900 <sup>2</sup>
80	1000 <sup>2</sup>
*	* 3

X For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.


ightarrow Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

#### GENERAL NOTES

- 1. Special or larger size signs may be used as necessary.
- 2. Distance between signs should be increased as required to have 1500 feet advance warning.
- 3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D)signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- 5. Only diamond shaped warning sign sizes are indicated.
- 6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

					_				۱ I
			L	EGEN	D				
			Туре	3 Barı	ricac	e			
		000	Chanr	nelizir	ng De	vice	es		
		-	Sign						
-		x	Warn Spac TMUT(	Typica ing Sid ing cha CD for ing rea	gn Si art c sigr	ze ( or tl	and he		
			SHEE	T 2 C	)F 1	2			•
 [)	Те	🗣 ° xas Depa	rtment	of Trans	sporta	ition		Sa Div	affic fety ision ndard
	BARF	RICAD Pi	E AI Roje			-		JCT	ION
	FILE: 1	oc-21, dan	BC	(2) DN: TxDO			DW:	TxDOT	ск: TxDOT

		• •	•	_			
FILE:	bc-21.dgn	DN: T)	<dot< td=""><td>ск: TxDOT</td><td>DW:</td><td>TxDOT</td><td>ск: ТхDOT</td></dot<>	ск: TxDOT	DW:	TxDOT	ск: ТхDOT
(C) TxDOT	November 2002	CONT	SECT	JOB		ні	SHWAY
	REVISIONS	1200	03	064		FM	973
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	AUS		TRAVI	S		20
96							

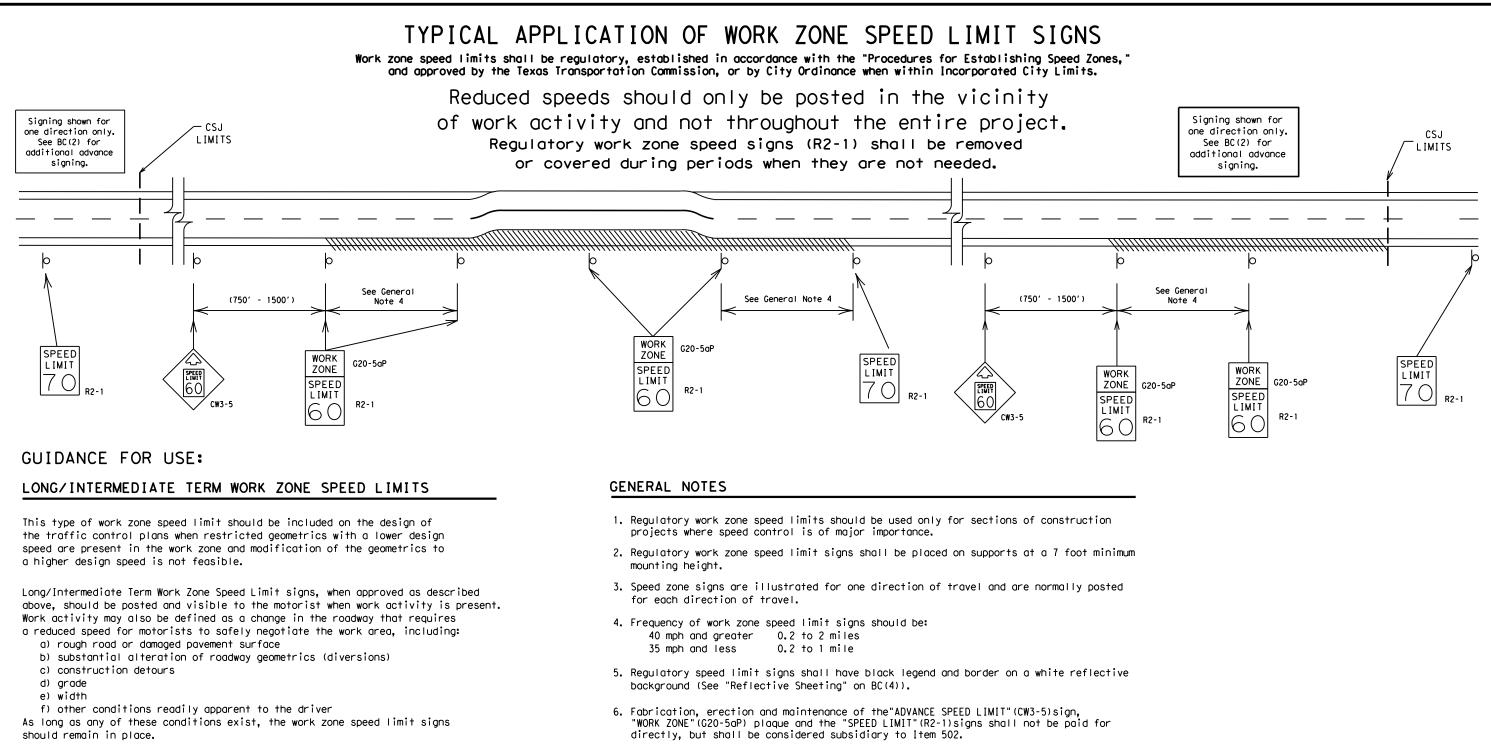

#### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

- 7. Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- 8. Techniques that may help reduce traffic speeds include but are not limited to: A. Law enforcement.
  - B. Flagger stationed next to sign.
  - C. Portable changeable message sign (PCMS).
  - D. Low-power (drone) radar transmitter.
  - E. Speed monitor trailers or signs.
- 9. Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- 10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.


PN.

4:27:27 Droiectw

/21/2022

DATE:

Texas Departme	ent of Transp	ortation	Sa Div	affic afety /ision ndard
BARRICADE	AND CO	ONSTR	UCT	ION
WORK ZO			MI.	
WORK ZO	NE SPE		MI.	
WORK ZO	NE SPE <u>BC (3) -</u>	21	TxDOT	<b>r</b>
WORK ZO	NE SPE BC (3) -	• <b>21</b>	ТхDOT	ск: Тхро
WORK ZO	NE SPE BC (3) - DN: TXDOT CONT SECT	• <b>21</b> 	ТхDOT	CK: TXDO Ghway

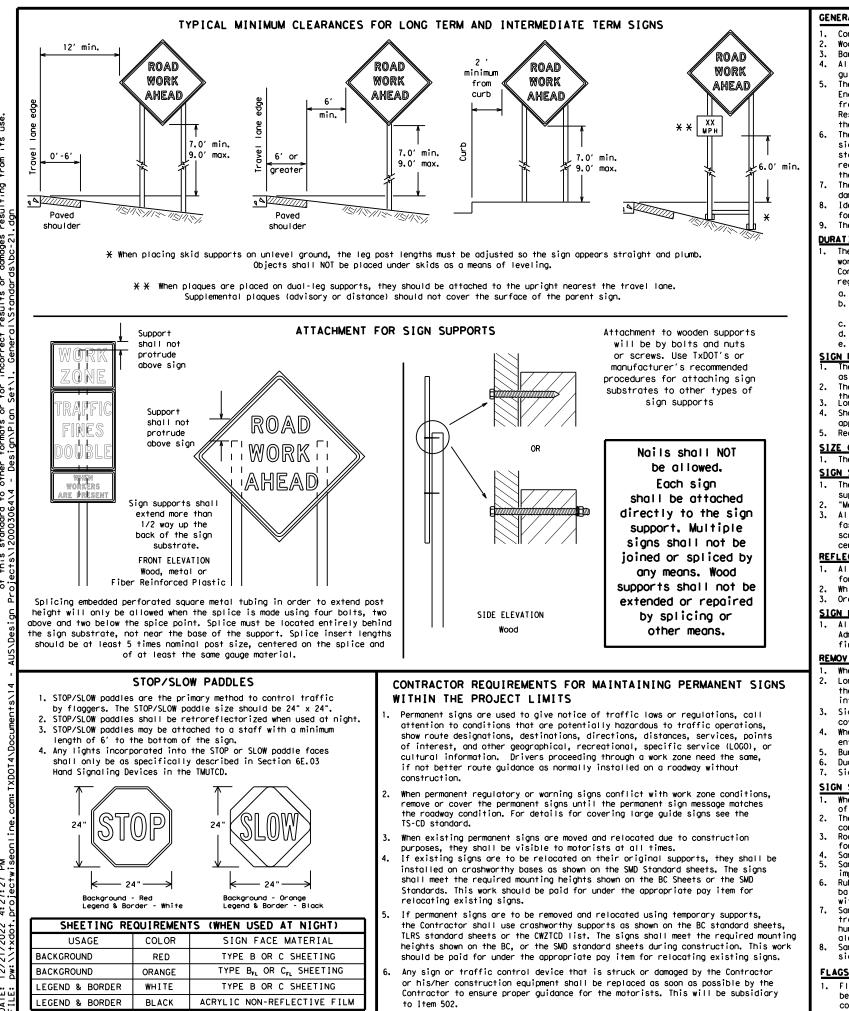

#### GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer. Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports
- guide the traveling public safely through the work zone.
- the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- the Engineer can verify the correct procedures are being followed.
- damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

#### <u>DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)</u>

- regard to crashworthiness and duration of work requirements.
- a. Long-term stationary work that occupies a location more than 3 days.
- more than one hour.
- Short, duration work that occupies a location up to 1 hour.
- Mobile work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

#### SIGN MOUNTING HEIGHT

- as shown for supplemental plaques mounted below other signs.
- the ground. Long-term/Intermediate-term Signs may be used in Lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to
- appropriate Long-term/Intermediate sign height.

#### SIZE OF SIGNS

The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

#### SIGN SUBSTRATES

- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave. centers. The Engineer may approve other methods of splicing the sign face.

#### REFLECTIVE SHEETING

- 1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300

#### SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway first class workmanship in accordance with Department Standards and Specifications.

#### REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- intersections where the sign may be seen from approaching traffic. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely
- covered when not required.
- entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting. Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

#### SIGN SUPPORT WEIGHTS

- 1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used. The sandbags will be tied shut to keep the sand from spilling and to maintain a
- constant weight. Rock, concrete, iron, steel or other solid objects shall not be permitted
- for use as sign support weights. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

#### FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

No warranty of any for the conversion m its use. Practice Act". P responsibility es resulting from exas Engineering P 1×DOT assumes no results or damage this stando TxDOT for d to other ISCLAIM The ind is f this

All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and

The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in

The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZICD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a guestion regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so

The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or

Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used

The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in

Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting

Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.

The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except

The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above

Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZICD lists each substrate that can be used on the different types and models of sign supports. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6"

for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1). White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background. 3. Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of

Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any


When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the

SHEET 4 OF 12

**st** Texas Department of Transportation Traffic Safety Division Standard

# BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) -21									
LE:	bc-21.dgn		DN: TXDOT CK: TXDOT DW: TXDOT CK:				ск: ТхDOT		
) TxDOT	November 2002		CONT	SECT JOB			HIGHWAY		
	REVISIONS		1200	03	064	FM 97		973	
9-07	8-14			DIST COUNTY			SHEET NO.		HEET NO.
7-13	5-21		AUS	AUS TRAVIS					22

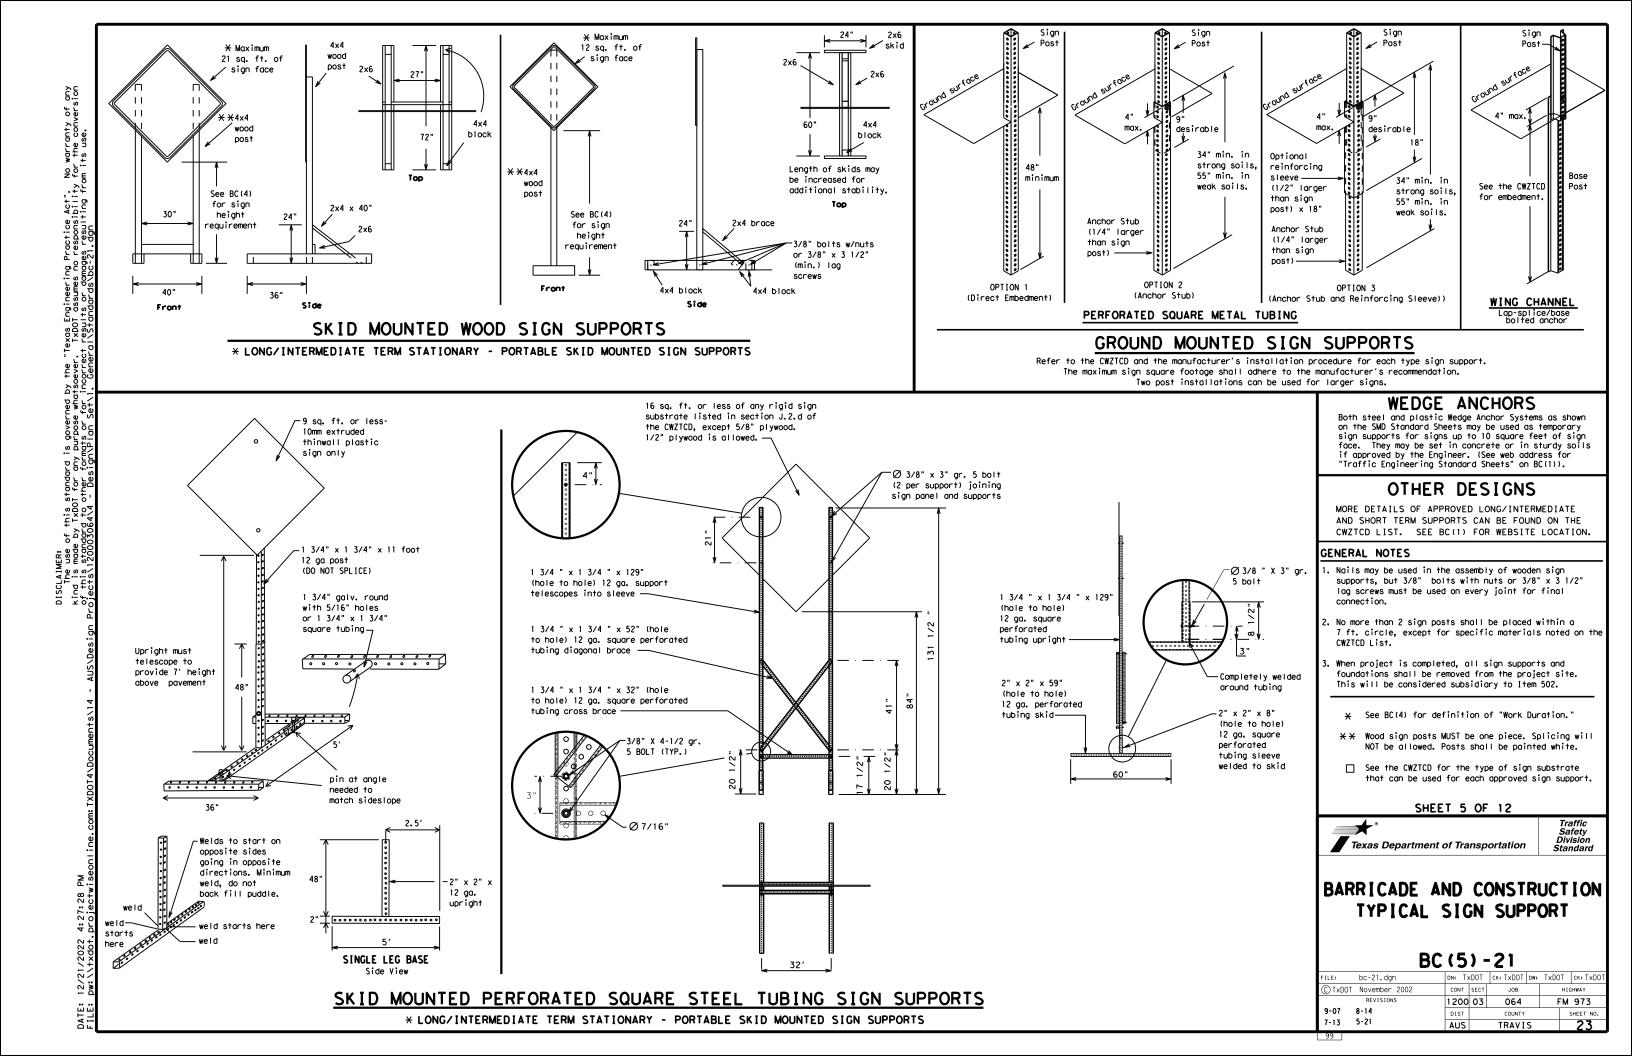

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

#### PORTABLE CHANGEABLE MESSAGE SIGNS

- 1. The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to 2. eight characters per word), not including simple words such as "TO, "FOR, " "AT, " etc.
- 3. Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- 4. Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) 5. along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to 7. start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are avail-8. able for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message 9. should be steady burn or continuous while displayed.
- 10. Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
   Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- 13. Do not display messages that scroll horizontally or vertically across the face of the sign.
- 14. The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- 15. PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- 16. Each line of text should be centered on the message board rather than left or right justified.
- 17. If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Nor thbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	F	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
		Slippery	SLIP
Emergency Emergency Vehicle	EMER EMER VEH	South	S
		Southbound	(route) S
Entrance, Enter	ENT	Speed	SPD
Express Lane	EXP LN	Street	ST
Expressway	EXPWY XXXX FT	Sunday	SUN
XXXX Feet		Telephone	PHONE
Fog Ahead	FOG AHD	Temporary	TEMP
Freeway	FRWY, FWY	Thursday	THURS
Freeway Blocked	FWY BLKD	To Downtown	TO DWNTN
Friday	FRI	Traffic	TRAF
Hazardous Driving		Travelers	TRVLRS
Hazardous Material		Tuesday	TUES
High-Occupancy	HOV	Time Minutes	TIME MIN
Vehicle	HWY	Upper Level	UPR LEVEL
Highway		Vehicles (s)	VEH, VEHS
Hour (s)	HR, HRS	Warning	WARN
Information	INFO	Wednesday	WED
It Is	ITS	Weight Limit	WTLIMIT
Junction	JCT	West	W
Left	LFT	Westbound	(route) W
Left Lane	LFT LN	Wet Pavement	WET PVMT
Lane Closed	LN CLOSED	Will Not	WONT
Lower Level	LWR LEVEL		
Maintenance	MAINT		

designation # IH-number, US-number, SH-number, FM-number

RECOMMENDED	PHASES	AND	FORMATS	FOR	PCMS	MESSAGES	DUR

(The Engineer may approve other messages not specifically covered here.

# Phase 1: Condition Lists

#### Road/Lane/Ramp Closure List

		offier cond	
FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER LANE CLOSED	DAYTIME LANE CLOSURES	LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE	ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI	TRAFFIC SIGNAL XXXX FT	LANES SHIFT ¥
XXXXXXXX BLVD CLOSED	₭ LANES SHIFT in Phase	1 must be used wit	h STAY IN LANE in Phos

Other Con	dition List
ROADWORK XXX FT	ROAD REPAIRS XXXX FT
FLAGGER XXXX FT	LANE NARROWS XXXX FT
RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
DETOUR X MILE	ROUGH ROAD XXXX FT
ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
BUMP XXXX FT	US XXX EXIT X MILES
TRAFFIC SIGNAL XXXX FT	L ANE S SHIFT

#### Action to Take/Effect on Travel List MERGE FORM RIGHT X LINES RIGHT DETOUR USE XXXXX NEXT RD EXIT X EXITS USE USE EXIT EXIT XXX I-XX NORTH STAY ON USE US XXX I-XX F SOUTH TO I-XX N TRUCKS WATCH USE FOR US XXX N TRUCKS WATCH EXPECT FOR DELAYS TRUCKS PREPARE EXPECT DELAYS ТΟ STOP REDUCE END SPEED SHOULDER XXX FT USE WATCH USE OTHER FOR ROUTES WORKERS STAY ĪΝ LANE

#### APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS. 2. The 1st phase (or both) should be selected from the
- "Road/Lane/Ramp Closure List" and the "Other Condition List".
- 3. A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- 4. A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- 5. If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- 6. For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

#### WORDING ALTERNATIVES

- 1. The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- appropriate.
- be interchanged as appropriate.
- 4. Highway names and numbers replaced as appropriate.
- 5. ROAD, HIGHWAY and FREEWAY can be interchanged as needed. 6. AHEAD may be used instead of distances if necessary.
- 7. FT and MI. MILE and MILES interchanged as appropriate.
- 8. AT. BEFORE and PAST interchanged as needed.
- 9. Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC. THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

#### FULL MATRIX PCMS SIGNS


- 1. When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 un CHANGEABLE MESSAGE SIGNS" above.
- 2. When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of t shall maintain the legibility/visibility requirement listed above
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and for, or replace that sign.
- 4. A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC some size arrow.

4:27:28 Droiectw 1/2022 12/21 DATE:

Roadway

# ING ROADWORK ACTIVITIES

# Phase 2: Possible Component Lists

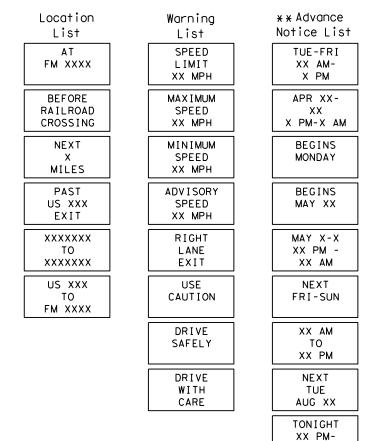


\* \* See Application Guidelines Note 6.

XX AM

2. Roadway designations IH, US, SH, FM and LP can be interchanged as EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can

		SHE	ET 6	OF	12		
		╋ <sup>®</sup> Texas Department	of Tra	nsp	ortation	Sa Div	affic afety /ision ndard
	BAR	RICADE A PORTABLE MESSAGE	E CI	HA	NGEAB	LE	ION
nder "PORTABLE			_		-		
the Engineer, it		BC	:(6	) -	·21		
	FILE:	bc-21.dgn	DN: T>	DOT	CK: TxDOT DW:	TxDOT	ск: TxDOT
	$\sim$	November 2002	CONT	SECT	JOB		
d shall not substitute	C TxDOT	November 2002	CONT	5201		HI	GHWAY
	(C) TxDOT	REVISIONS	1200		064	-	GHWAY 973
d shall not substitute C(7), for the	© T×DOT 9-07 7-13				064 COUNTY	-	-

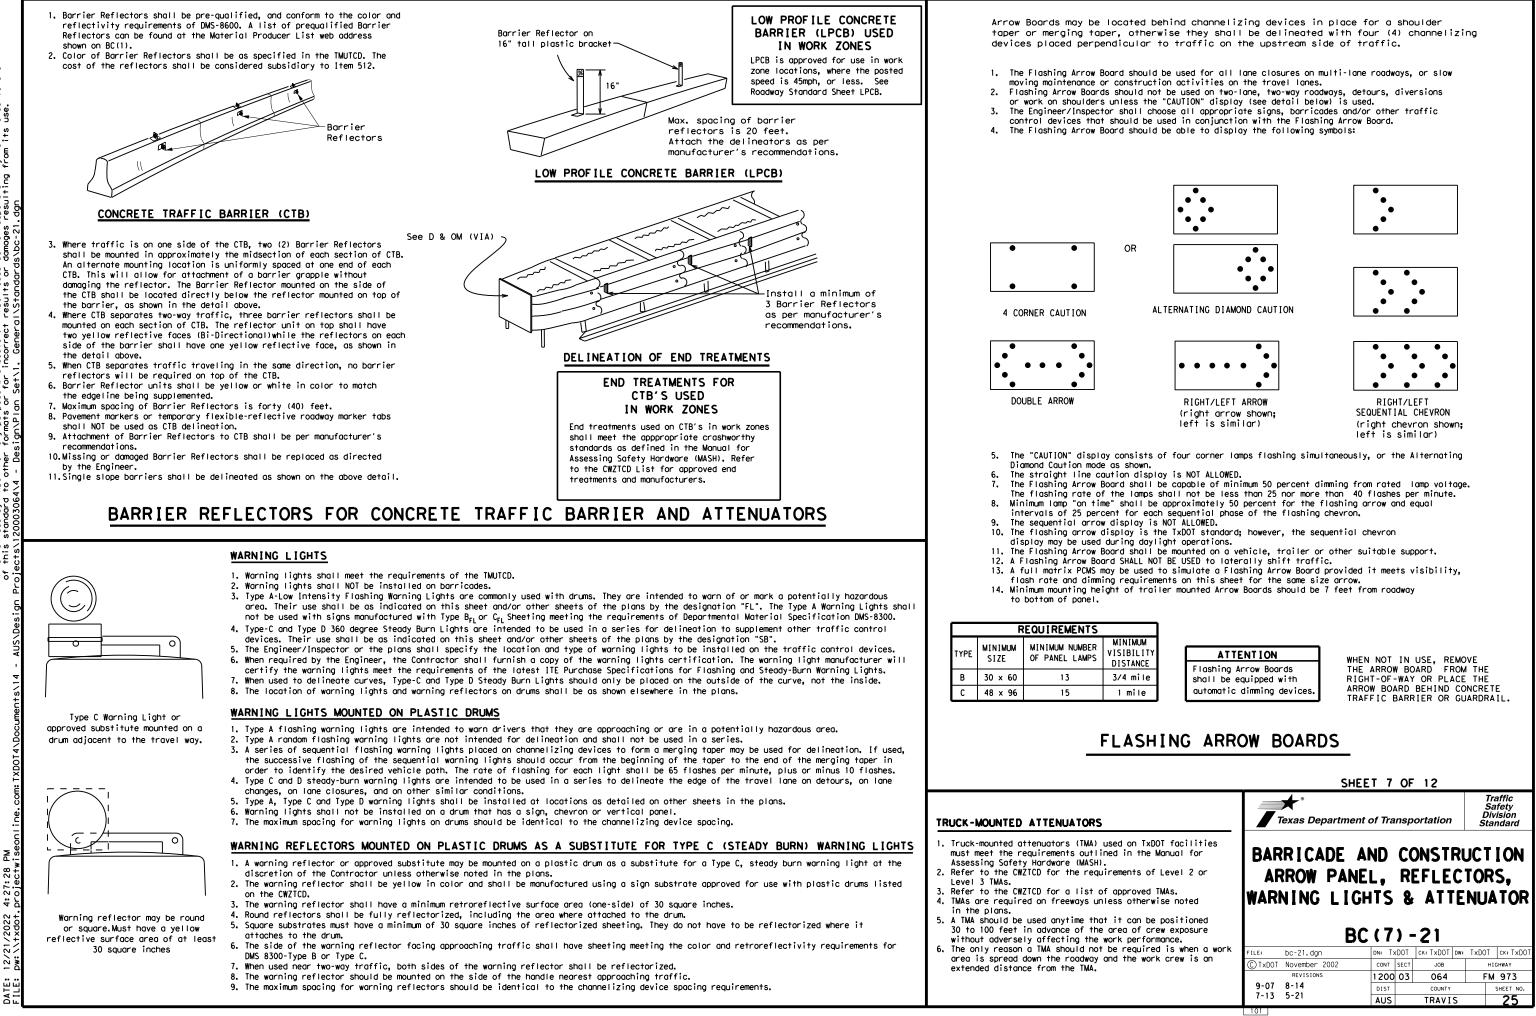











#### GENERAL NOTES

- 1. For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- 2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- 3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- 4. Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 5. Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- 6. The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

#### GENERAL DESIGN REQUIREMENTS


- Pre-gualified plastic drums shall meet the following requirements:
- 1. Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- 2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- 3. Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- 4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- 6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- 7. Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- 8. Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- 9. Drum body shall have a maximum unballasted weight of 11 lbs.
- 10. Drum and base shall be marked with manufacturer's name and model number.


#### RETROREFLECTIVE SHEETING

- 1. The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- 2. The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

#### BALLAST

- 1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- 2. Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- 4. The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- 5. When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- 6. Ballast shall not be placed on top of drums.
- 7. Adhesives may be used to secure base of drums to pavement.

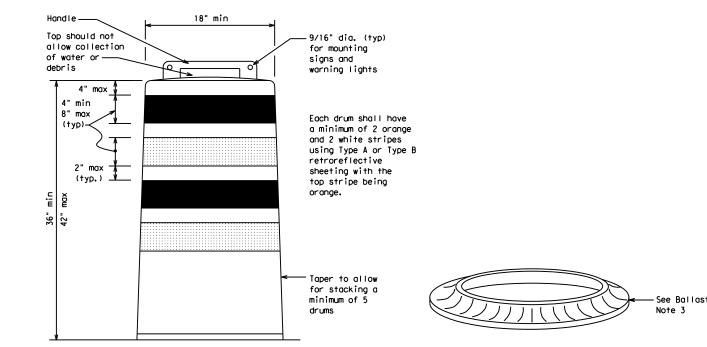



#### DETECTABLE PEDESTRIAN BARRICADES

- 1. When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures. 2. Where pedestrians with visual disabilities normally use the
- closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- 3. Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian
- 4. Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- 5, Warning lights shall not be attached to detectable pedestrian barricades.
- 6. Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

ŝē

2 29 4:27: /2022 21 12/ DATE:



(Maximum Sign Dimension)

Chevron CW1-8, Opposing Traffic Lane

Divider, Driveway sign D70a, Keep Right

R4 series or other signs as approved

by Engineer




12" x 24" Vertical Panel mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

#### SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS


- 1. Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- 2. Chevrons and other work zone signs with an orange background shall be manufactured with Type  $B_{FL}$  or Type  $C_{FL}$  Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- 3. Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- 4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- 5. Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- 6. Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- 7. Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- 8. R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SH	EET 8	OF	12		
Texas Departmen	nt of Tra	nsp	ortation		Traffic Safety Division Candard
BARRICADE CHANNEL	IZIN	IG	DEVI		
	<u>C (8</u>	-			- 1
FILE: bc-21.dgn		DOT	CK: TXDOT D	V: TxDO	Г ск: TxDOT
© TxDOT November 2002	CONT	SECT	JOB		HIGHWAY
REVISIONS 4-03 8-14	1200	03	064	F	M 973
9-07 5-21	DIST		COUNTY		SHEET NO.
7-13	AUS		TRAVIS		26
102					

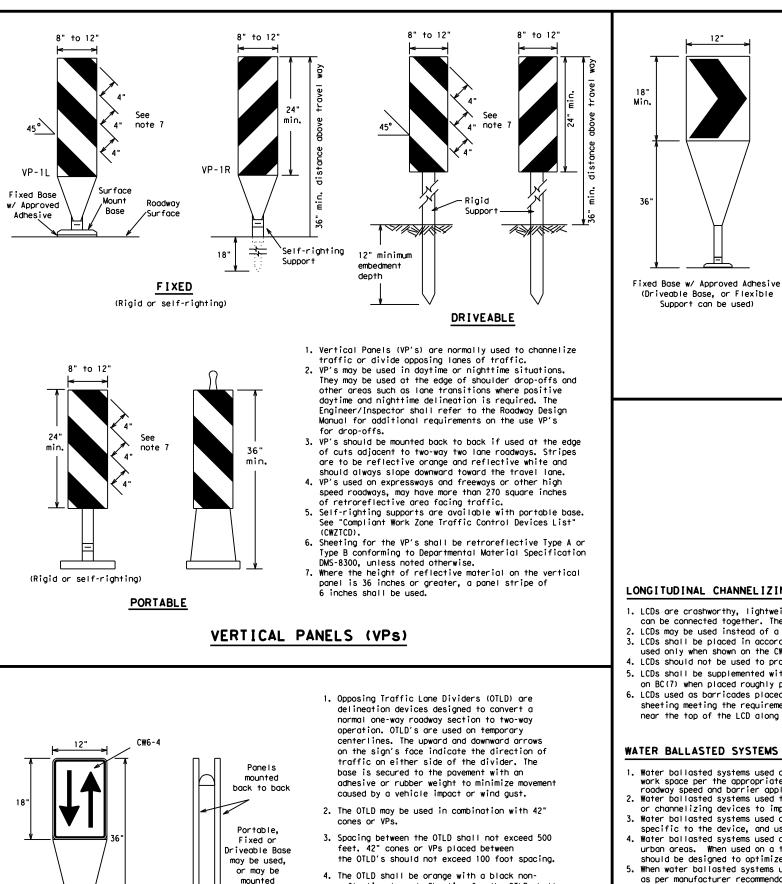

- 1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- 2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- 3. Chevrons, when used, shall be erected on the out side of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- 4. To be effective, the chevron should be visible for at least 500 feet.
- 5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- 6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



#### LONGITUDINAL CHANNELIZING DEVICES (LCD)


- 1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact. 2. LCDs may be used instead of a line of cones or drums.
- 3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- 5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- 6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

#### WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- 2. Water ballosted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- 3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

## HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS



4. The OTLD shall be orange with a black nonreflective legend. Sheeting for the OTLD shall be retroreflective Type  $B_{FL}$  or Type  $C_{FL}$  conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

### OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

on drums

4:27:29 Droiectw

/21/2022

#### GENERAL NOTES

- 1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- 3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- 5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- 7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	D	Minimur esirab er Lena X X	le gths	Spacin Channe	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	2	150'	1651	180′	30′	60′
35	$L = \frac{WS^2}{60}$	205′	225′	245'	35′	70′
40	60	265′	295′	320'	40′	80′
45		450′	495′	540'	45′	90′
50		500'	550'	600'	50 <i>'</i>	100′
55	L=WS	550'	605′	660 <i>′</i>	55 <i>'</i>	110′
60	L - 11 S	600'	660'	720'	60 <i>'</i>	120′
65		650′	715′	780′	65 <i>'</i>	130'
70		700′	770′	840'	70′	140'
75		750′	825′	900'	75′	150'
80		800′	880'	960'	80 <i>'</i>	160'


XX Taper lengths have been rounded off. L=Length of Taper (FT.) W=Width of Offset (FT.) S=Posted Speed (MPH)

## SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12 Traffic Safety Division Standard **st** Texas Department of Transportation

## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

	BC (9) - 21							
(LE:	bc-21.dgn		DN: T>	<dot< td=""><td>ск: TxDOT</td><td>DW:</td><td>TxDOT</td><td>Г ск: TxDOT</td></dot<>	ск: TxDOT	DW:	TxDOT	Г ск: TxDOT
) TxDOT	November 2002		CONT	SECT	JOB		1	HIGHWAY
	REVISIONS		1200	03	064		F	M 973
9-07	8-14		DIST		COUNTY			SHEET NO.
7-13	5-21		AUS		TRAVI	S		27
03								

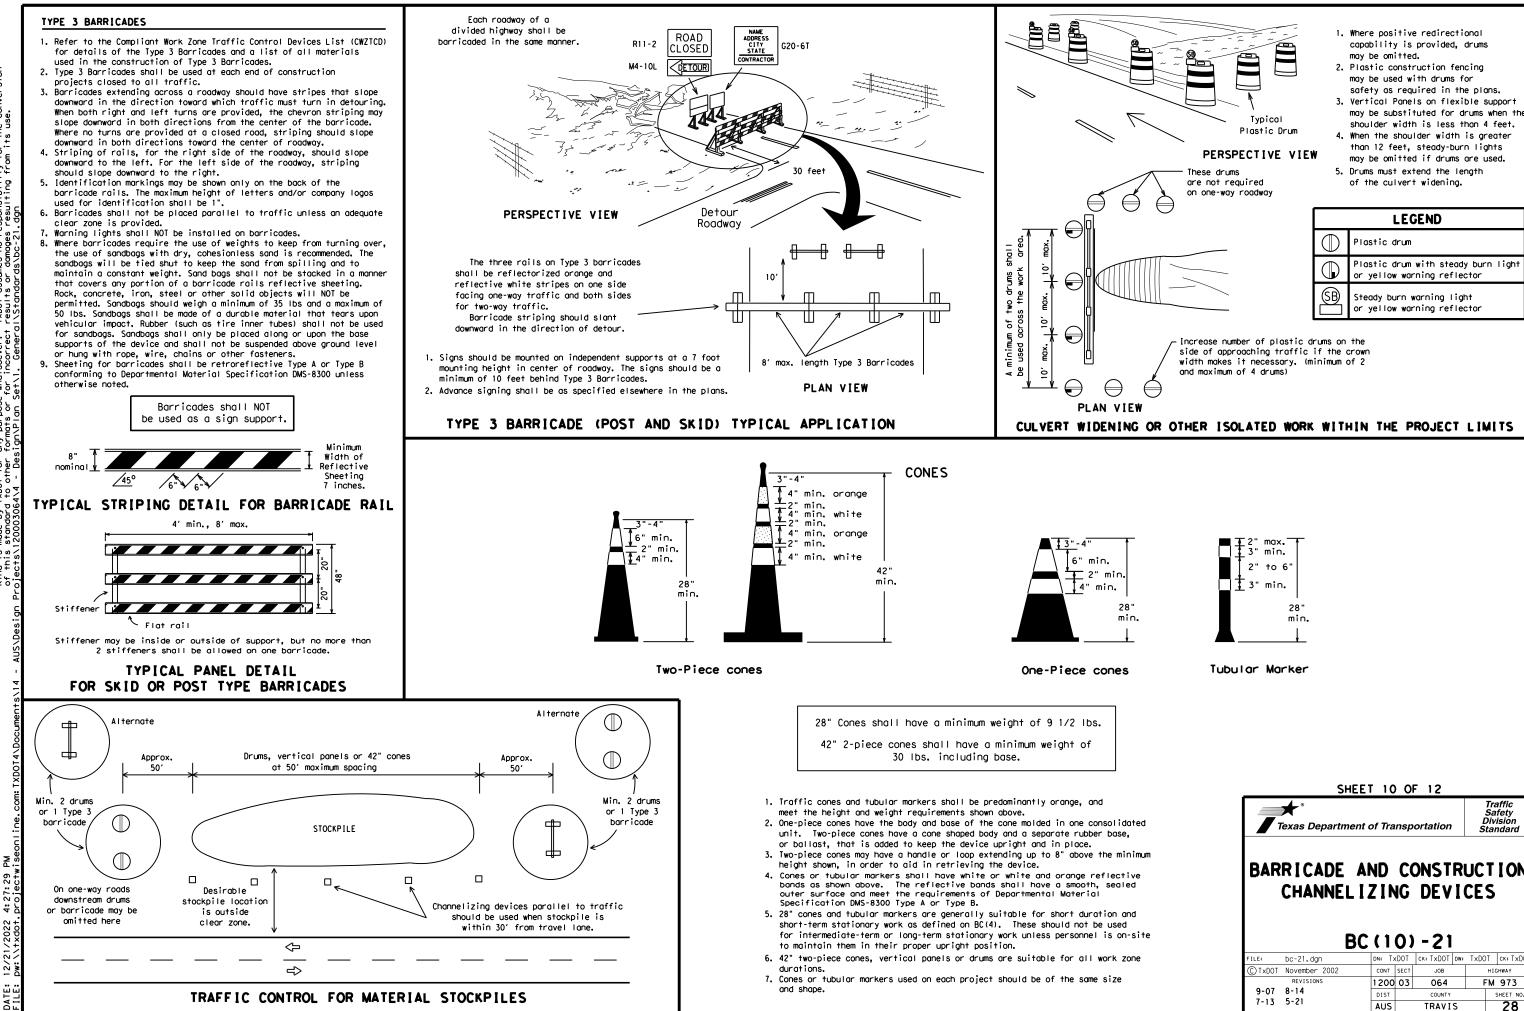

warranty of any the conversion its use. δç. ractice Act". r responsibility <sup>.</sup> ^ resulting fro this st TxDOT ISCLAIMER: The use ind is mode

SHEI	ET 10	0	F 12		
Texas Departmen	t of Tra	nsp	oortation		Traffic Safety Division tandard
BARRICADE A CHANNEL					
	-	-	-21		1
FILE: bc-21.dgn	DN: T)	<dot< th=""><th>CK: TXDOT DW:</th><th>TxDC</th><th>T CK: TXDOT</th></dot<>	CK: TXDOT DW:	TxDC	T CK: TXDOT
© TxDOT November 2002	CONT	SECT	JOB		HIGHWAY
REVISIONS	1200	03	064	F	M 973
9-07 8-14	DIST		COUNTY		SHEET NO.
7-13 5-21	AUS		TRAVIS		28

#### WORK ZONE PAVEMENT MARKINGS

#### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 3. Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- 5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- 6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

#### RAISED PAVEMENT MARKERS

- 1. Raised pavement markers are to be placed according to the patterns on  $\mathsf{BC}(\mathsf{12})$  .
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

#### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.

#### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- 3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

#### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- 4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- 6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
- 7. Over-painting of the markings SHALL NOT BE permitted.
- 8. Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- 10. Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

#### Temporary Flexible-Reflective Roadway Marker Tabs



#### STAPLES OR NAILS SHALL NOT BE USED TO SECU TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARK TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guiden shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by Engineer or designated representative. Sampling and testing is m normally required, however at the option of the Engineer, either or "B" below may be imposed to assure quality before placement or roadway.
  - A. Select five (5) or more tabs at random from each lot or sh and submit to the Construction Division, Materials and Pav Section to determine specification compliance.
  - B. Select five (5) tabs and perform the following test. Affix (5) tabs at 24 inch intervals on an asphaltic pavement in straight line. Using a medium size passenger vehicle or pir run over the markers with the front and rear tires at a sp of 35 to 40 miles per hour, four (4) times in each direction more than one (1) out of the five (5) reflective surfaces be lost or displaced as a result of this test.
- 3. Small design variances may be noted between tab manufacturers.
- 4. See Standard Sheet WZ(STPM) for tab placement on new pavements. Standard Sheet TCP(7-1) for tab placement on seal coat work.


#### RAISED PAVEMENT MARKERS USED AS GUIDEMARK


- Raised pavement markers used as guidemarks shall be from the ap product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applie butyl rubber pad for all surfaces, or thermoplastic for concretsurfaces.

#### Guidemarks shall be designated as:

YELLOW - (two amber reflective surfaces with yellow body). WHITE - (one silver reflective surface with white body).

I	DEPARTMENTAL MATERIAL SPECIFICATI	ONS
	PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
	TRAFFIC BUTTONS	DMS-4300
/IEW	EPOXY AND ADHESIVES	DMS-6100
	BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
	PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
	TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
	TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242
ve pod	A list of prequalified reflective raised pavement non-reflective traffic buttons, roadway marker tat pavement markings can be found at the Material Pro web address shown on BC(1).	os and other
E R		
rks		
he t "A" the		
pment ment		
five kup, ed n. No hall		
ee		
oved		
0,000		
or		
<u>,</u>		
	SHEET 11 OF 12	
	<b>→</b> t°	Traffic
	Texas Department of Transportation	Safety Division Standard
		Stanuaru
	BARRICADE AND CONSTR PAVEMENT MARKING	
	PC (11) - 21	
	BC(11)-21	
	FILE: DC-21.dgn DN: TxDOT CK: TxDOT DW	
	FILE:         bc-21.dgn         DN:         TXDOT         CK:         TXDOT         DW:           C         TxDOT         February         1998         CONT         SECT         JOB           REVISIONS         1200         03         064	HIGHWAY
	FILE:         bc-21.dgn         DN:         TXDOT         ck:         TXDOT         dw:           ① TXDOT         February 1998         CONT         SECT         JOB	

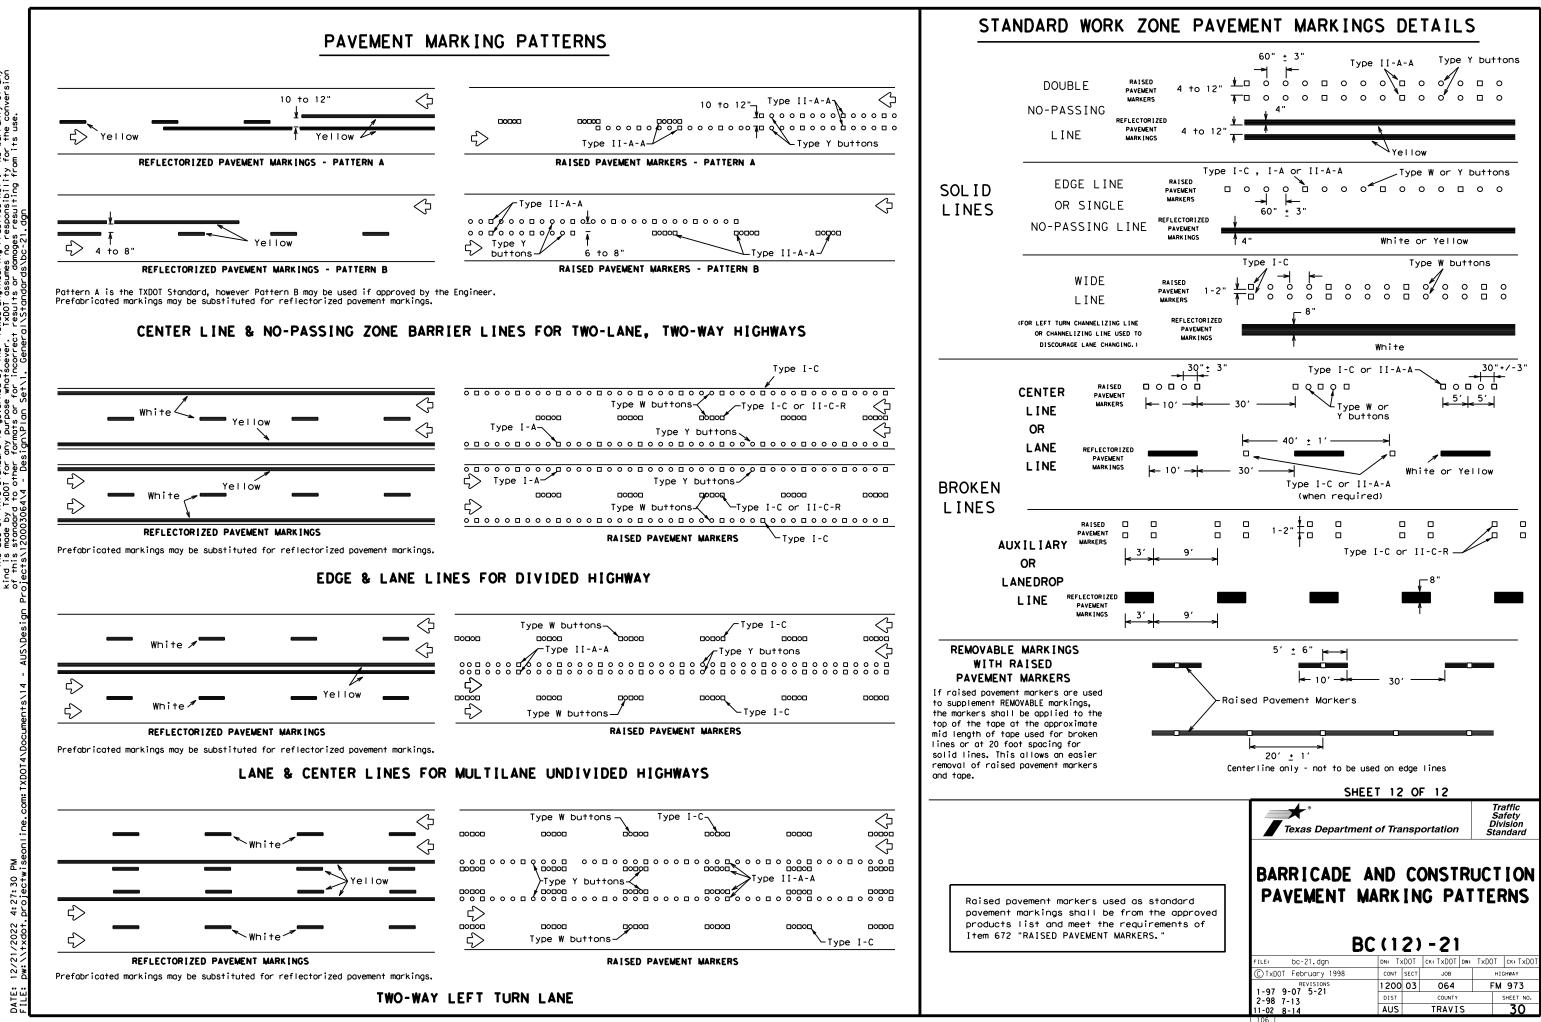

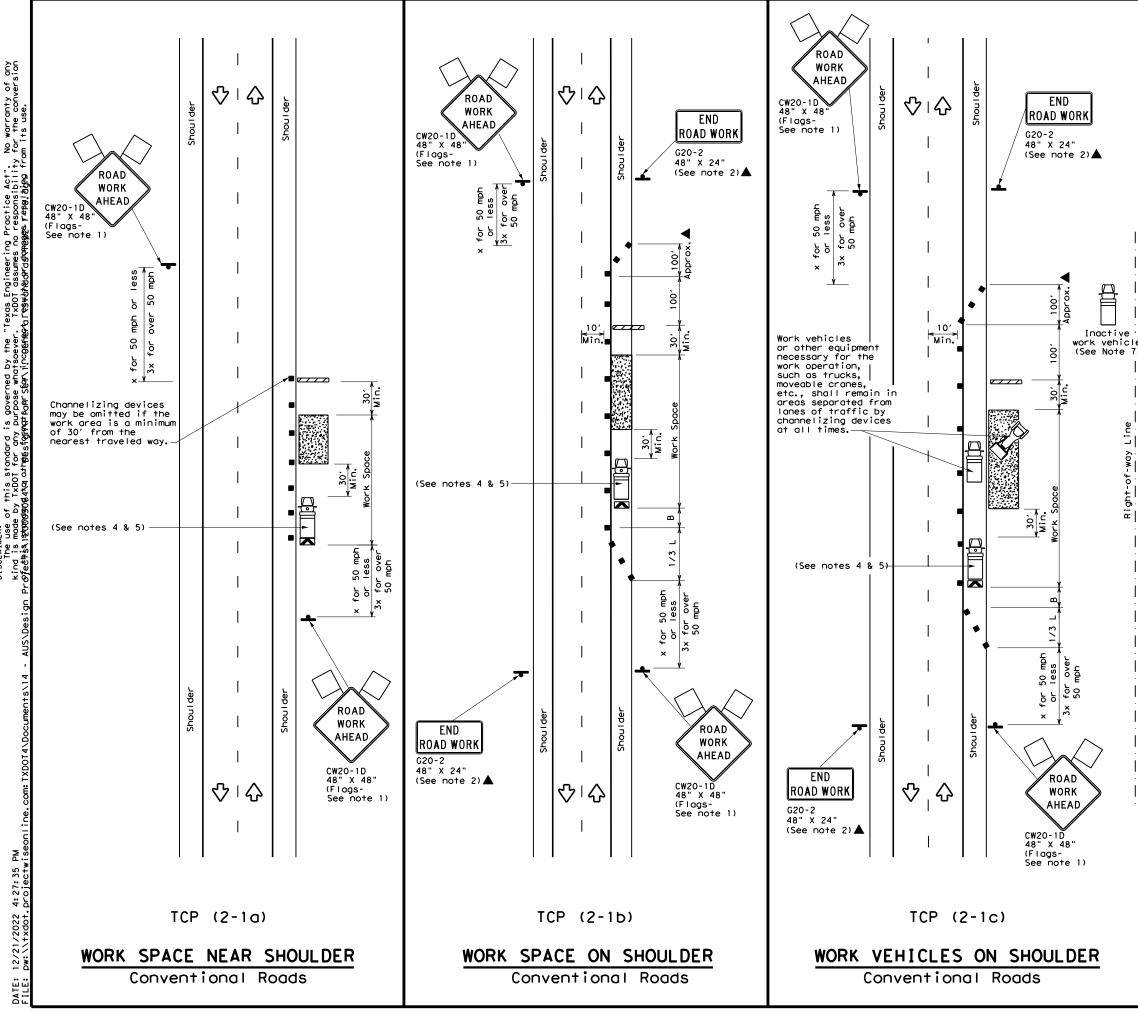

Texas Engineering Practice Act". No warranty of any TXDOT assumes no responsibility for the conversion th reswithstartatomages respiring from its use. this standard is governed TxDDT for any purpose wha 1644a othgesfigingthan Sem ° of by ISCLAIMER: The use ind is mode

LEGEND							
<u>~ ~ ~ ~ ~</u>	Type 3 Barricade		Channelizing Devices				
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)				
Ē	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)				
-	Sign	$\Diamond$	Traffic Flow				
$\langle \rangle$	Flag	۵	Flagger				

Posted Speed <del>X</del>	Formula	* *		Spacin Channe Dev	līzing ices	Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space	
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	<u>ws</u> <sup>2</sup>	150'	1651	180'	30′	60'	1201	90′
35	$L = \frac{WS}{60}$	205'	225'	245'	35′	70'	160'	120'
40	60	265′	295′	320′	40′	80′	240′	155'
45		450'	495′	540′	45′	90′	320′	195'
50		500'	550'	600 <i>'</i>	50 <i>'</i>	100'	400′	240′
55	L=WS	550'	605′	660 <i>'</i>	55 <i>'</i>	110'	500 <i>'</i>	295′
60	L-#5	600 <i>'</i>	660 <i>'</i>	720′	60 <i>'</i>	120′	600 <i>'</i>	350′
65		650'	715′	780 <i>'</i>	65′	130'	700'	410′
70		700'	770′	840′	70'	140′	800′	475′
75		750′	825′	900′	75′	150′	900′	540'

X Conventional Roads Only


XX Taper lengths have been rounded off.


L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE						
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY		
	1	1	1	4		

#### GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer 3. Stockpiled material should be placed a minimum of 30 feet from
- nearest traveled way.
  Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 5. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space. 6. See TCP(5-1) for shoulder work on divided highways, expressways and
- freeways. 7. Inactive work vehicles or other equipment should be parked near the
- right-of-way line and not parked on the paved shoulder. 8. CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D
- "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.



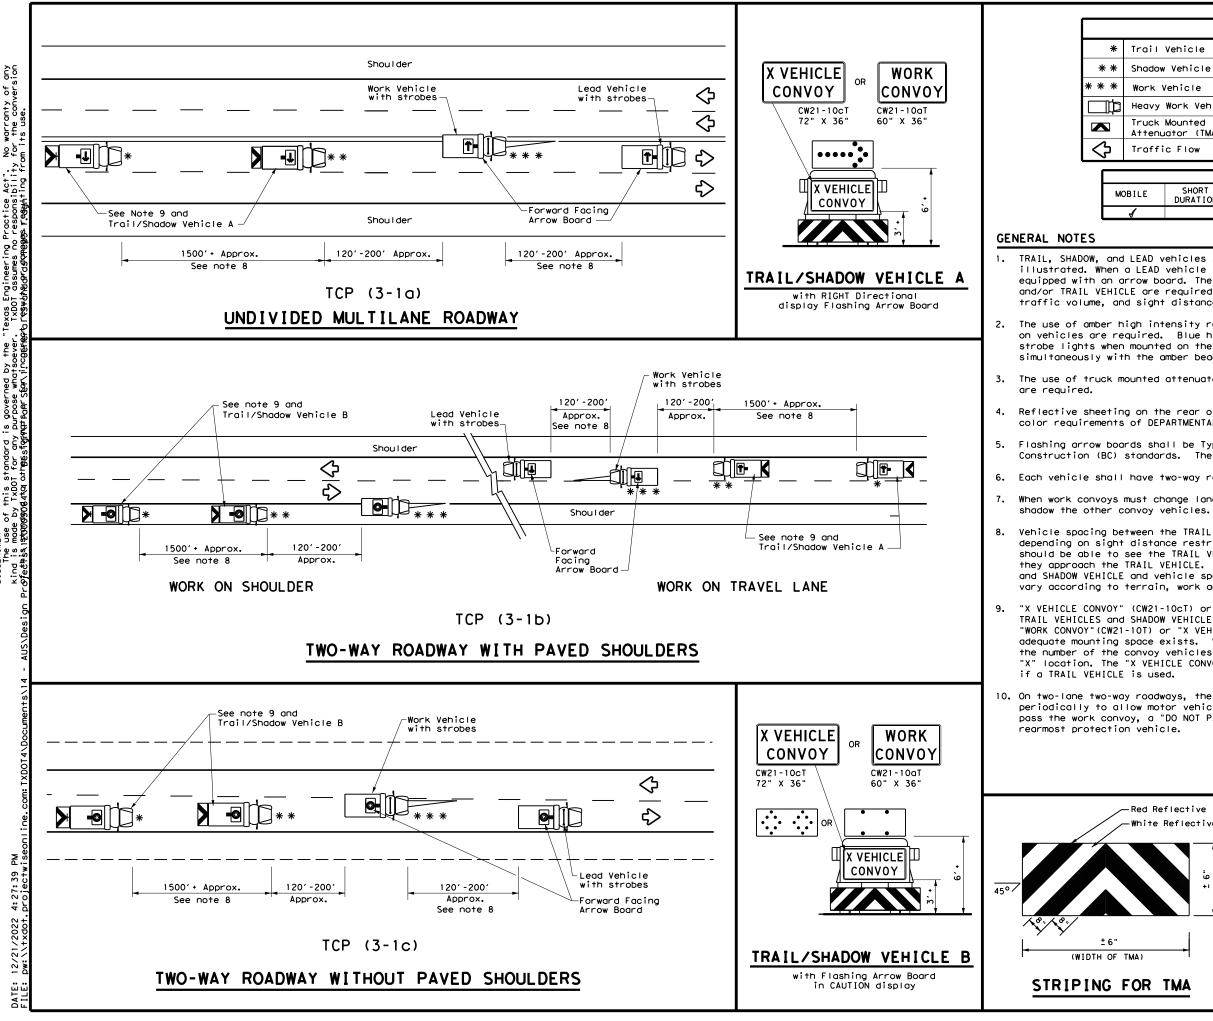

δp s of this standard i de by TxDOT for any रूजकार्यक्रहिंडीवृत्ति

	LE	GEND					
Vehicle							
Vehicle		ARROW BOARD DISPLAY					
/ehicle		<b>₽</b>	RIGHT Directio	onal			
Work Vehic	le	<b>F</b>	LEFT Directional				
Mounted lator (TMA)		÷	Double Arrow				
			CAUTION (Alter Diamond or 4 (	•			
	116	ICAL U	JAVE				
SHORT DURATION				LONG TERM STATIONARY			
	Vehicle Vehicle Work Vehic Mounted Mounted Dator (TMA) c Flow	Vehicle Vehicle Work Vehicle Mounted Mounted ofor (TMA) c Flow TYP SHORT SHOR	vehicle /ehicle Work Vehicle Mounted Mounted Mounted Ator (TMA) c Flow TYPICAL U SHORT SHORT TERM	Vehicle ARROW BOARD D Vehicle Vehicle Vehicle Work Vehicle Mounted Motor (TMA) c Flow TYPICAL USAGE SHORT SHORT TERM INTERMEDIATE			

TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.

2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.

3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE

Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.

Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.

Each vehicle shall have two-way radio communication capability.


When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to

Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.

"X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY"(CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE

10. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the

Red Reflective White Reflective	Texas Departme	nt of Transportati	on	Traffic Operations Division Standard
± 6"		CONTROL OPERAT	-	
		DED HIGH		-
		DED HIGH CP(3-1)		-
			- 1	-
	Т	<u>CP(3-1)</u>	- <b>1</b>	3
	FILE: tcp3-1.dgn © TxDOT December 1985 REVISIONS	CP (3-1)	<b>- 1</b> w:: DW:	<b>3</b> Тхрот ск: Тхрот
	FILE: tcp3-1.dgn ©TxDOT December 1985	СР ( 3 – 1 ) DN: ТхЮОТ Ск: ТхГ СОNТ SECT JC 1200 03 06	<b>- 1</b> w:: DW:	<b>3</b> ТхDOT ск: ТхDO нісниач

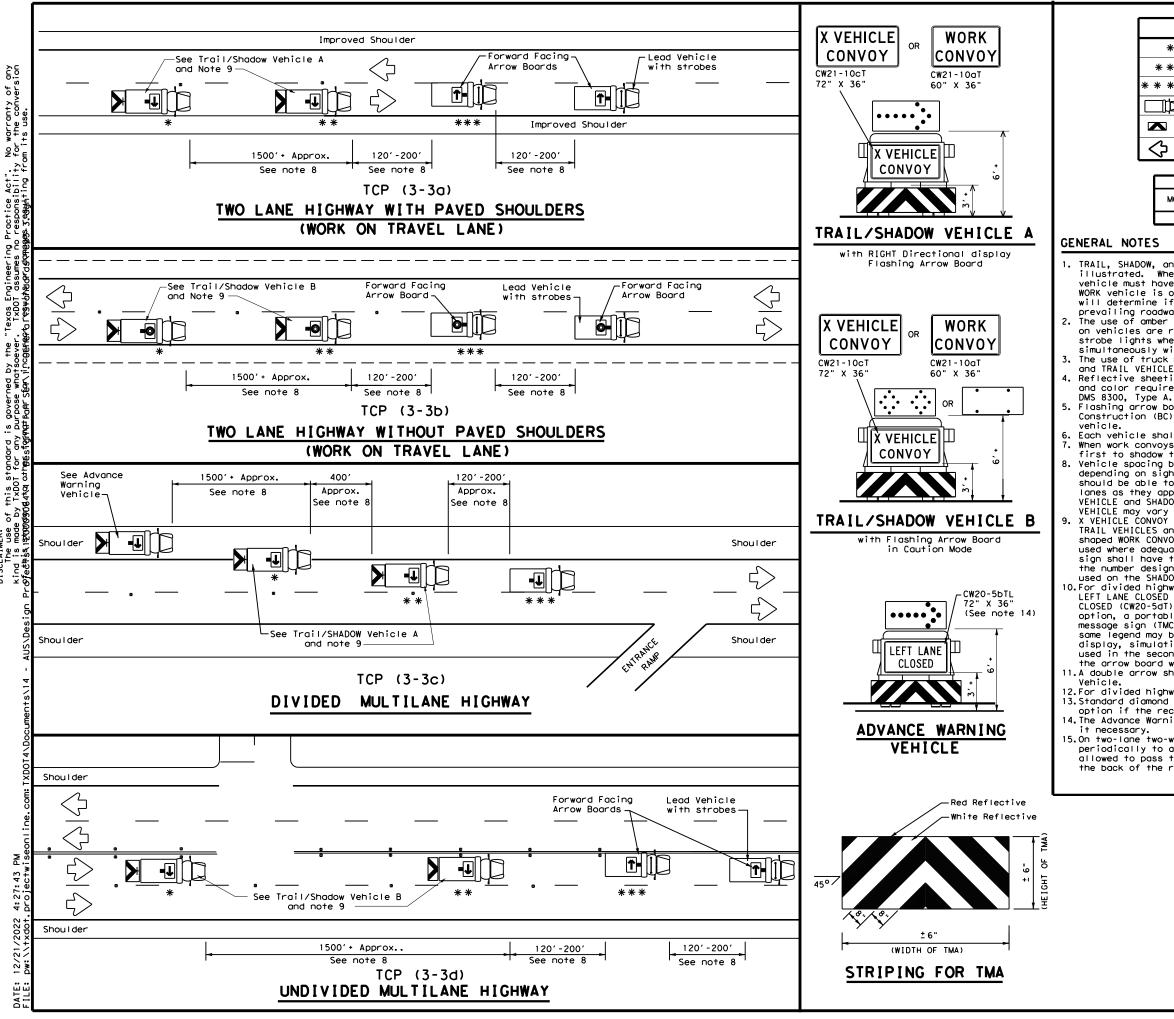

ខ្ល ā

LEGEND						
*	Trail Vehicle		ARROW BOARD DISPLAY			
* *	Shadow Vehicle		ARROW DOARD DISPLAT			
* * *	Work Vehicle	•	RIGHT Directional			
þ	Heavy Work Vehicle	F	LEFT Directional			
	Truck Mounted Attenuator (TMA)	<b>₽</b>	Double Arrow			
$\Diamond$	Traffic Flow	Q	CAUTION (Alternating Diamond or 4 Corner Flash)			

	TYPICAL USAGE							
MOBILE	SHORT DURATION		INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY				
4								

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as

illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING

and TRAIL VEHICLE are required. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity

and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION

Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the

Each vehicle shall have two-way radio communication capability. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary

depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10DT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used. 10.For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an


option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.

11.A double arrow shall not be displayed on the arrow board on the Advance Warning

12.For divided highways with three or four lanes in each direction, use TCP(3-2). 13.Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available. 14. The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes


15.0n two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.

Texas Departmen	nt of Tran	sportation	Oper Div	affic rations ision ndard
RA I SE MARKER F	OPE D PA INST REMOV	RATION VEMENT	IS	
FILE: tcp3-3, dqn	DN: TxD	OT CK:TXDOT DW	: TxDOT	ск: TxDOT
C)TxDOT September 1987	CONT S	ECT JOB	ні	SHWAY
	1200 (	03 064	FM	077
REVISIONS	1200			913
REVISIONS 2-94 4-98 8-95 7-13	DIST	COUNTY		SHEET NO.

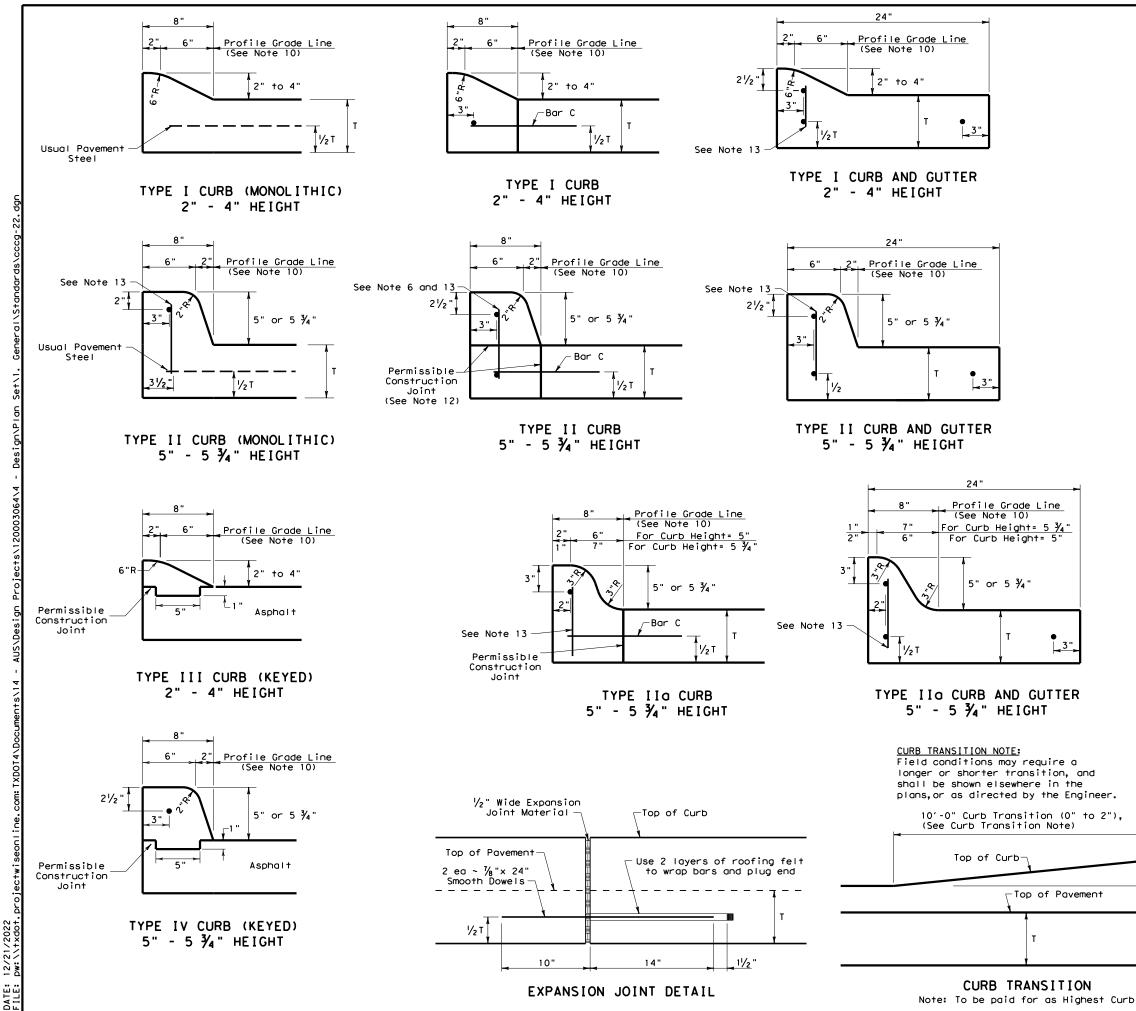

#### GENERAL NOTES

- 1. All materials and construction shall be in accordance with Item 529, "Concrete Curb, Gutter, and Combined Curb and Gutter.
- 2. Concrete shall be Class A.
- When reinforcing bars are used, they shall be No.4 unless otherwise shown. The use of fiber reinforced concrete in 3. lieu of reinforcing steel is acceptable. Use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and dose fibers in accordance with Material Producers List (MPL) "Fibers for Class A and B Concrete Applications.
- 4. Round exposed sharp edges with a rounding tool, to a minimum radius of 1/4 inch.
- 5. All existing curbs and driveways to be removed shall be sawed or removed at existing joints.
- 6. Where concrete curb is to be placed on existing concrete pavement, Bar B may be drilled and grouted in place, or may be inserted into fresh concrete.
- 7. Expansion and contraction joints shall be constructed to match pavement joints in all curbs and curb and gutter adjacent to jointed concrete pavement. Where placement of curb or curb and gutter is not adjacent to concrete pavement, expansion joints shall be provided at structures, curb returns at streets, and at locations directed by The Engineer.
- 8. Vertical and horizontal dowel bars and transverse reinforcing bars shall be placed at four feet C~C.
- 9. Dimension 'T' shown is the thickness of concrete pavement. When curb is installed adjacent to flexible pavement dimension 'T' is 8" maximum.
- 10. Usual profile grade line. Refer to typical sections and plan-profile sheets for exact locations.
- 11. One-half inch expansion joint material shall be provided where curb or curb and gutter is adjacent to sidewalk or riprop.
- 12. When horizontal permissible construction joints are used, the longitudinal pavement steel shall be placed in accordance with pavement details shown elsewhere in the plans. Reinforcing steel for curb section shall then conform to that required for concrete curb.
- 13. Bar B placement as needed (typically at four ft. C-C) to support curb reinforcing steel during concrete placement.

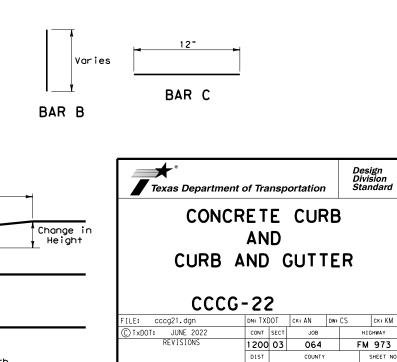

AUS

TRAVIS

34

#### GENERAL NOTES FOR ALL ELECTRICAL WORK

- 1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
- 2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
- 3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is  $\frac{1}{2}$  in. or less in diameter.
- 4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
- 5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
- 6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

#### CONDUIT

#### A. MATERIALS

- 1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
- 2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
- 3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.

AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" × 16" × 4"
#2	8" × 8" × 4"	10" x 10" x 4"	12" × 12" × 4"
#4	8" × 8" × 4"	10" x 10" x 4"	10" × 10" × 4"
#6	8" × 8" × 4"	8" × 8" × 4"	10" × 10" × 4"
#8	8" × 8" × 4"	8" × 8" × 4"	8" × 8" × 4"

- 4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
- 5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
- 6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
- 7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.


- 8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plan a flat, high tensile strength polyester fiber pull tape for pulling conductor the PVC conduit system. When galvanized steel RMC elbows are specifically cal the plans and any portion of the RMC elbow is buried less than 18 in., ground elbow by means of a grounding bushing on a rigid metal extension. Grounding of metal elbow is not required if the entire RMC elbow is encased in a minimum of concrete. PVC extensions are allowed on these concrete encased rigid metal el PVC elbows are subsidiary to various bid items.
- 9. When required, provide High-Density Polyethylene (HDPE) conduit with factory conductors according to Item 622 "Duct Cable." At the Contractor's request an the Engineer, substitute HDPE conduit with no conductors for bored schedule 4 conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule size PVC called for in the plans. Ensure the substituted HDPE meets the requirexcept that the conduit is supplied without factory-installed conductors. Mak the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide and schedule as shown on the plans. Do not extend substituted conduit into gr foundations.
- Use two-hole straps when supporting 2 in. and larger conduits. On electrical properly sized stainless steel or hot dipped galvanized one-hole standoff str the service riser conduit.


#### B. CONSTRUCTION METHODS

- 1. Provide and install expansion joint conduit fittings on all structure-mounted the structure's expansion joints to allow for movement of the conduit. In add and install expansion joint fittings on all continuous runs of galvanized ste externally exposed on structures such as bridges at maximum intervals of 150 requested by the project Engineer, supply manufacturer's specification sheet joint conduit fittings. Repair or replace expansion joint fittings that do no movement at no additional cost to the Department. Provide the method of deter amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as for the required expansion conduit fittings.
- Space all conduit supports at maximum intervals of 5 ft. Install conduit spac attaching metal conduit to surface of concrete structures. See "Conduit Mount on ED(2). Install conduit support within 3 ft. of all enclosures and conduit
- 3. Do not attach conduit supports directly to pre-stressed concrete beams except specifically in the plans or as approved by the Engineer.
- 4. Unless otherwise shown on the plans, jack or bore conduit placed beneath exis driveways, sidewalks, or after the base or surfacing operation has begun. Bac compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tun or Box" prior to installing conduit or duct cable to prevent bending of the conduit of the conduct cable to prevent bending to the conduct cable to prevent be conduct cable to prevent bending to the conduct cable to preve
- 5. When placing conduit in the sub-grade of new roadways, backfill all trenches material unless otherwise noted on the plans. When placing conduit in the sub new roadways, backfill all trenches with cement-stabilized base as per requir Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Fl Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Sho
- 6. Provide and place warning tape approximately 10 in. above all trenched condu
- 7. During construction, temporarily cap or plug open ends of all conduit and rac after installation to prevent entry of dirt, debris and animals. Temporary ca durable duct tape are allowed. Tightly fix the tape to the conduit opening. C conduit and prove it clear in accordance with Item 618 prior to installing an
- 8. Ensure conduit entry into the top of any enclosure is waterproof by installing hubs or using boxes with threaded bosses. This includes surface mounted safet cans, service enclosures, auxiliary enclosures and junction boxes. Grounding tight sealing hubs are not required.
- 9. Fit the ends of all PVC conduit terminations with bushings or bell end fittin install a grounding type bushing on all metal conduit terminations.
- 10. Install a bonding jumper from each grounding bushing to the nearest ground ro or equipment grounding conductor. Ensure all bonding jumpers are the same siz grounding conductor. Bonding of conduit used as a casing under roadways for d required, if the duct extends the full length through the casing.
- 11. At all electrical services, install a 6 AWG solid copper grounding electrode
- 12. Place conduits entering ground boxes so that the conduit openings are betwee from the bottom of the box. See the ground box detail on sheet ED(4).
- 13. Seal ends of all conduits with duct seal, expandable foam, or by other method the Engineer. Seal conduit immediately after completion of conductor installo tests. Do not use duct tape as a permanent conduit sealant. Do not use silico conduit sealant.
- 14. File smooth the cut ends of all mounting strut and conduit. Before installing cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc r more zinc content) to alleviate overspray. Use zinc rich paint to touch up go as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material paint as an alternative for materials required to be galvanized.

ans. Use only ors through alled for in ad the RMC of the rigid of 2 in. of albows. RMC or	
v installed internal and with approval by 40 or schedule 80 PV e 40 and of the same irements of Item 622 ake the transition of de conduit of the size pround boxes or ground boxes and	,
service poles, raps are allowed on	
ed conduits at ddition, provide eel RMC conduit ) ft. When for expansion for expansion allow for ermining the s a substitute	
acers when hting Options" · terminations. ht as shown	
sting roadways, ackfill and unneling Pipe connections.	
s with excavated ub-base of rements of lowable noring."	
it as per Item 618. acceways immediately caps constructed of Clean out the any conductors.	
ng conduit sealing ety switches, meter bushings on water	
ngs. Provide and od, grounding lug, ze as the equipment duct cable is not	
e conductor. en 3 in. and 6 in.	Texas L
ods approved by ation and pull cone caulk as a	ELE CC
ng, paint the field rich paint (94% or galvanized material al with a zinc rich	FILE: ed1-1 CTXDOT Octob REVISI
	71A

Te	✦ <sup>®</sup> exas Department	of Tra	nsp	ortation	,	Oper Div	affic rations vision ndard
E	LECTRI CONDUI ED	TS	8				5
LE:	ed1-14.dgn	DN:		CK:	DW:		ск:
) TxDOT	October 2014	CONT	SECT	JOB		нI	GHWAY
	REVISIONS	1200	03	064		FM	973
		DIST		COUNTY	,		SHEET NO.
		AUS		TRAV	I S		35

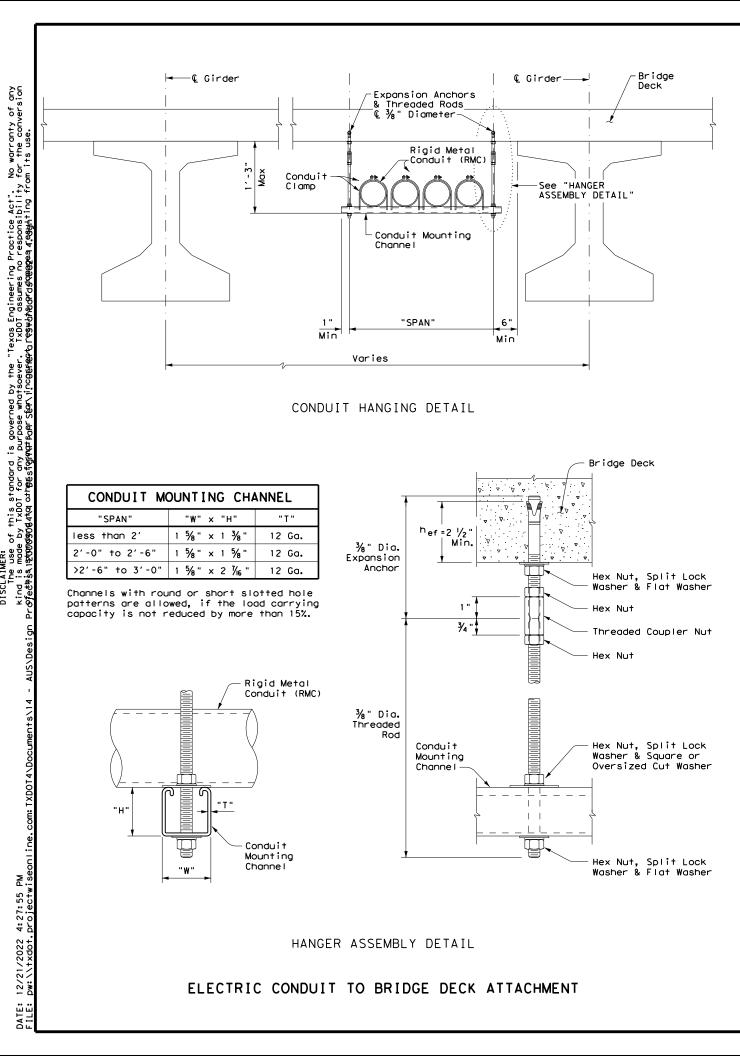

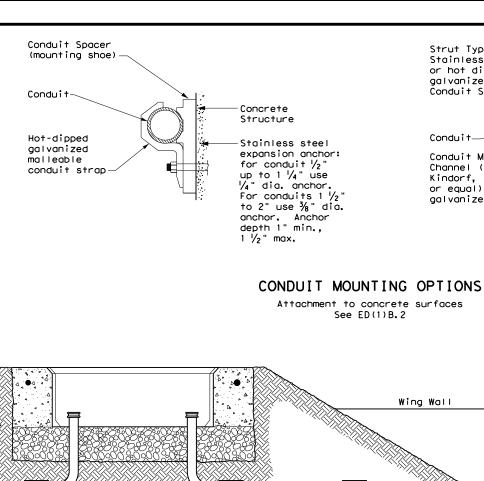




RMC

### EXPANSION ANCHOR NOTES FOR BRIDGE DECK ATTACHMENT

- 1. Use torque controlled mechanical expansion anchors that are approved for use in cracked concrete by the International Code Council, Evaluation Service (ICC-ES). The chosen anchor product shall have a designated ICC-ES Evaluation Report number, and its approval status shall be maintained on the ICC-ES website under Division 031600 for Concrete Anchors.
- 2. Unless otherwise approved by the Engineer: do not use adhesive anchors; do not use expansion anchors that are not included in the ICC-ES approval list; and do not use expansion anchors that are only approved for use in uncracked concrete.
- 3. Use anchors manufactured with stainless steel expansion wedges. Anchors manufactured with carbon steel expansion wedges are not allowed. Anchor bodies can be either zinc-plated carbon steel or stainless steel. For application in marine environment, both the anchor body and expansion wedge shall be stainless steel.
- 4. Install anchors as shown on the plans and in accordance with the anchor manufacturer's published installation instructions. Arrange a field demonstration test to evaluate the procedures and tools. The test shall be witnessed and approved by the Engineer prior to furnishing anchors on the structure.
- 5. Prior to hole drilling, use rebar locator to ensure clearing of existing deck strands or reinforcement. Install anchors to ensure a minimum effective embedment depth, (<sup>h</sup>ef), as shown. Increase (<sup>h</sup>ef) as needed to ensure sufficient thread length for proper torqueing and tightening of anchors.
- 6. Use anchors of minimum 1600 Lbs tensile capacity (minimum of steel, concrete breakout, and concrete pullout strengths as determined by ACI 318 Appendix D) at the required minimum embedment depth ( $^{\rm h}{\rm ef}$ ). No lateral loads shall be introduced after conduit installation.

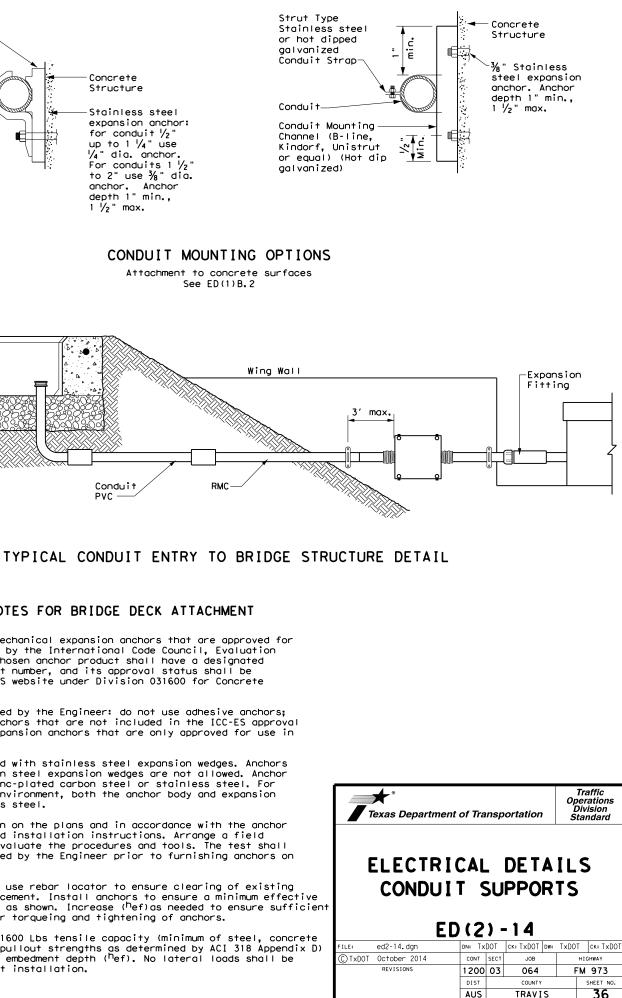

71B

#### ELECTRICAL CONDUCTORS

- A. MATERIAL INFORMATION
- 1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS)11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 ÅWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.
- Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at 2. the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.
- Where two or more circuits are present in one conduit or enclosure, permanently 3. identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.
- Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

#### B. CONSTRUCTION METHODS

- Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any 1. needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.
- 2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.
- Make splices only in junction boxes, ground boxes, pole bases, or electrical 3. enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.
- Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.
- Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.
- 6. Support conductors in illumination poles with a J-hook at the top of the pole.
- 7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.
- 8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.
- 9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.
- 10. Do not terminate more than one conductor under a sinale connector. unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.

Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

- 12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.
- C. TEMPORARY WIRING
- Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.
- 2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of following: molded cord and plug set, receptacle, or circuit breaker type.
- 3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.
- 4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.
- 5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NFC.


#### GROUND RODS & GROUNDING ELECTRODES

#### A. MATERIAL INFORMATION

1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

#### **B.** CONSTRUCTION METHODS


- 1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade
- 2. Do not place ground rods in the same drilled hole as a timber pole.
- 3. Install ground rods so the imprinted part number is at the upper end of the rod.
- 4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.
- 5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.
- 6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.
- 7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

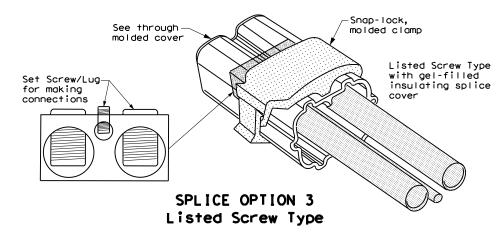


Seal between conductors with tape. Tape to extend past end of tubing by 1/8" to 1/4

ŝ vers warranty the conv Sç. Act bility Practice responsit estresukt ę د د Texas Engir TxDOT as 요로 gover °og⊉ this standa TxDOT for ۶ç Ten α α α α α α α α α α α α α α

> 59 4:27:

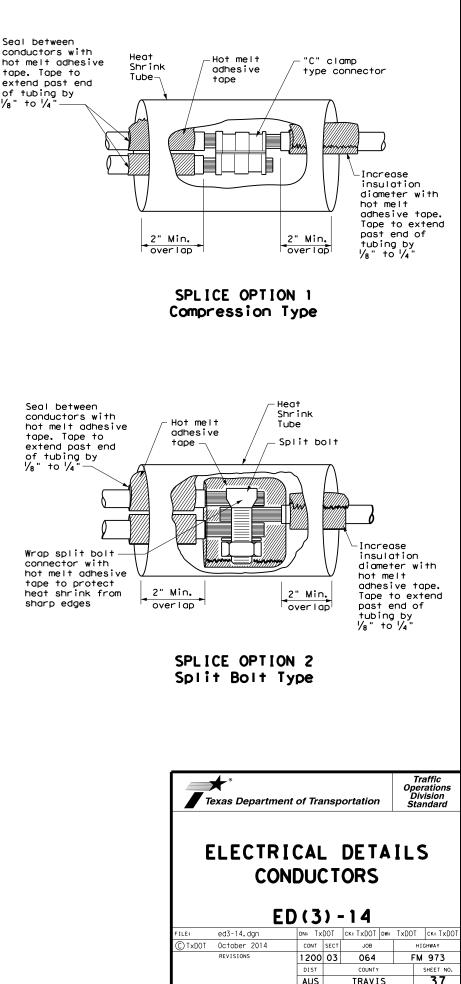


71C

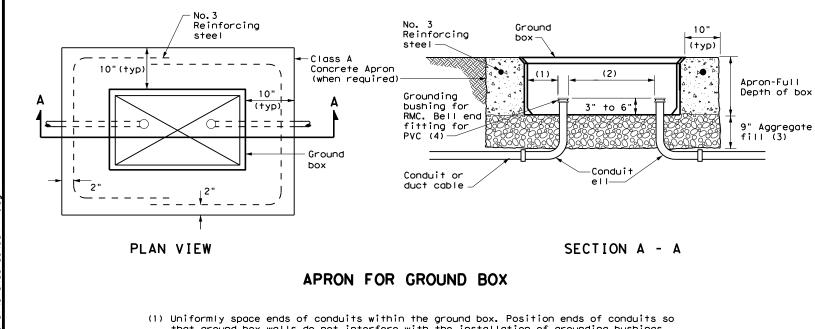

- that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushing.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

GROU	ND BOX DIMENSIONS
TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
А	12 X 23 X 11
В	12 X 23 X 22
С	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

	GROL	JND BO	ох со	VER D	IMENS	IONS		
TYPE			DIMEN	SIONS	(INCH	ES)		
TTPE	Н	Ι	J	К	L	м	N	Р
A, B & E	23 1/4	23	13 3⁄4	13 1/2	9 7/8	5 1⁄8	1 3/8	2
C & D	30 ½	30 1⁄4	17 ½	17 1⁄4	13 ¼	6 ¾	1 3/8	2

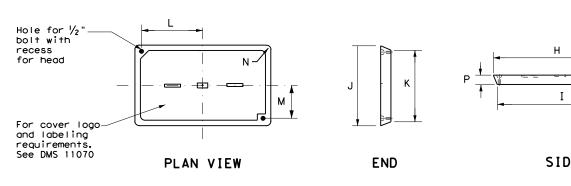

#### **GROUND BOX COVER**

#### GROUND BOXES

#### A. MATERIALS

- Item 624 "Ground Boxes."
- and Electrical Supplies," Item 624.

- B. CONSTRUCTION METHODS
- aaareaate.
- boxes.

- Do not use silicone caulk as a sealant.
- together and to the ground rod with listed connectors.
- below arade.
- fully describing the work required.

DATE:

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and

2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination

3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.

4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of

2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.

3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground

4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.

5. Temporarily seal all conduits in the ground box until conductors are installed.

6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant.

7. When a ground rod is present in a ground box, bond all equipment grounding conductors

8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches

9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes

10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.

11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.

·		★ ° Texas Department	of Tra	nsp	ortation		Oper Div	affic ations ision ndard			
₽ ►		ELECTRICAL DETAILS GROUND BOXES ED(4)-14									
	FILE:	ed4-14.dgn	dn: Tx	DOT	ск: TxDOT	DW:	TxDOT	ск: TxDOT			
	(C) TxDOT	October 2014	CONT	SECT	JOB		HIC	GHWAY			
		REVISIONS	1200	03	064		FM	973			
			DIST		COUNTY		4	SHEET NO.			
			AUS		TRAVI	S		38			
	71D										

#### ELECTRICAL SERVICES NOTES

1. Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State. 2. Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services, "DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)", and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies " Item 628 "Provide other service types as Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans. 3. Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans. 4.Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as concruded work as approved. 5. The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed. 6. Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC. 7.When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used. 8. Provide wiring and electrical components rated for 75°C. Provide red. black. and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility. 9. All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately 0.Provide rigid metal conduit (RMC) for all conduits on service, except for the  $\frac{1}{2}$  in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure. .Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer. 2.Ensure all mounting hardware and installation details of services conform to utility company specifications. 3.For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the lominated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to shows the installing contractor is to redline plan sheets before laminating. 4.When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8  $\frac{1}{2}$  in. x 11 in before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket. 5.Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

#### SERVICE ASSEMBLY ENCLOSURE

1. Provide threaded hub for all conduit entries into the top of enclosure.

- 2. Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photocell or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
- 3. Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
- 4. Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

۱.	Fiel ensi
2.	Wher

			* ELE	CTRICAL	SERV	ICE DAT	4					
Elec. Service ID	Plan Sheet Number	Electrical Service Description		Service Conductors No./Size		Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	
INTERSECTION	11	ELC SRV TY D 120/240 070(NS)AL(E)SP(0)	1 1/4 "	3/#4	N/A	2P/70	30	100	T.S LIGHTING	1P/50, 2P/15	100	<7.1
		for construction. All new electrical s										

electrical service data chart specific to that service as shown in the plans.

\*\* Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National ELectrical Code.

### EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

ELEC SERV TY $x \times x $
Schematic Type
Service Voltage V / V
Disconnect Amp Rating 000 indicates main lug only/ Typically Type T
(SS) = Safety Switch Ahead of Meter-Check with Utility (NS) = No safety Switch Ahead of Meter-Check with Utility
Enclosure Type GS= Galvanized steel("off the shelf") SS= Stainless steel(Custom Enclosure)See MPL AL= Aluminum (Custom Enclosure)See MPL
Photocell Mounting Location (E) = Inside Service/Enclosure Mounted (T) = Top of pole (L) = Luminaire mounted (N) = None/No Photocell or Lighting Contactor Required
Service Support Type GC= Granite concrete OC= Other concrete TP= Timber pole SP= Steel pole SF= Steel frame OT= Pole by others or paid for separately EX= Existing pole TS= Service on traffic signal pole PS= Pedestal Service
O= Overhead Service Feed from Utility U= Underground Service Feed from Utility

2

80 28:

4

2022

Ň

12/

ŝē


#### MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

ld drill flange-mounted remote operator handle if needed, to ure handle is lockable in both the "On" and "Off" positions.


the utility company provides a transformer larger than 50 KVA. verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.

#### PHOTOELECTRIC CONTROL

1. Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.

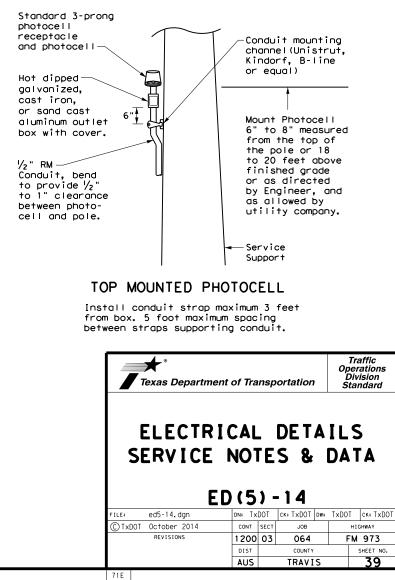




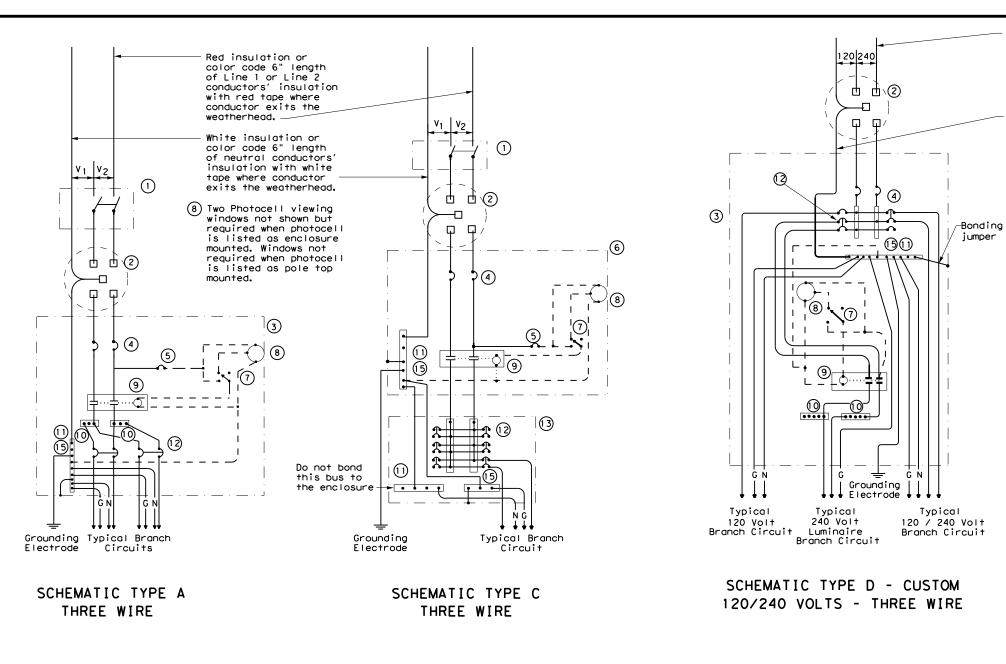


	WIRING LEGEND
	Power Wiring
	Control Wiring
— N —	Neutral Conductor
— c —	Equipment grounding conductor-always required


	SCHEMATIC LEGEND
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure- mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus

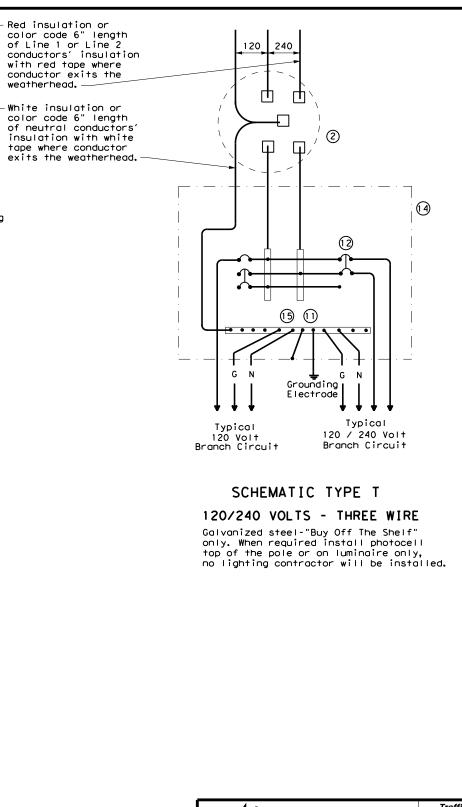

Texas Department	of Tra	nsp	ortation	Op L	Traffic perations Division tandard		
ELECTRICAL DETAILS SERVICE ENCLOSURE AND NOTES							
ED	(6)	) -	14				
FILE: ed6-14.dgn	DN: TX	DOT	CK: TXDOT DW:	TxD0	T CK: TxDOT		
CTxDOT October 2014	CONT	SECT	JOB		HIGHWAY		
REVISIONS	1200	03	064	F	M 973		
	DIST		COUNTY		SHEET NO.		
	AUS		TRAVIS		40		
71F							

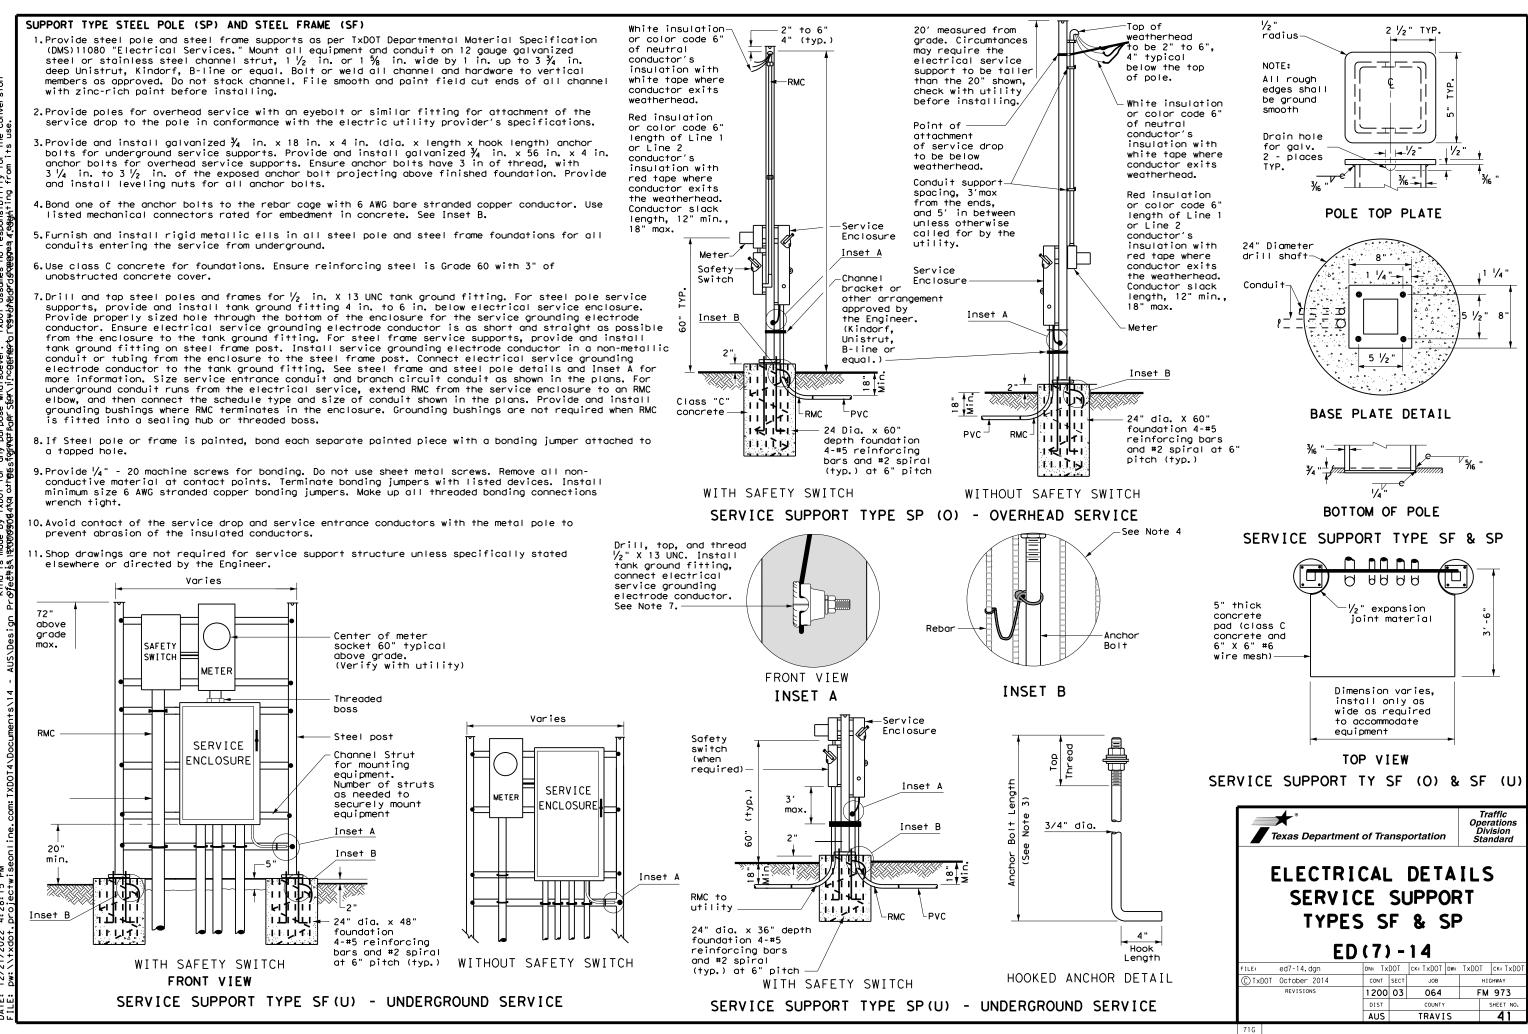

4:28:15 /2022

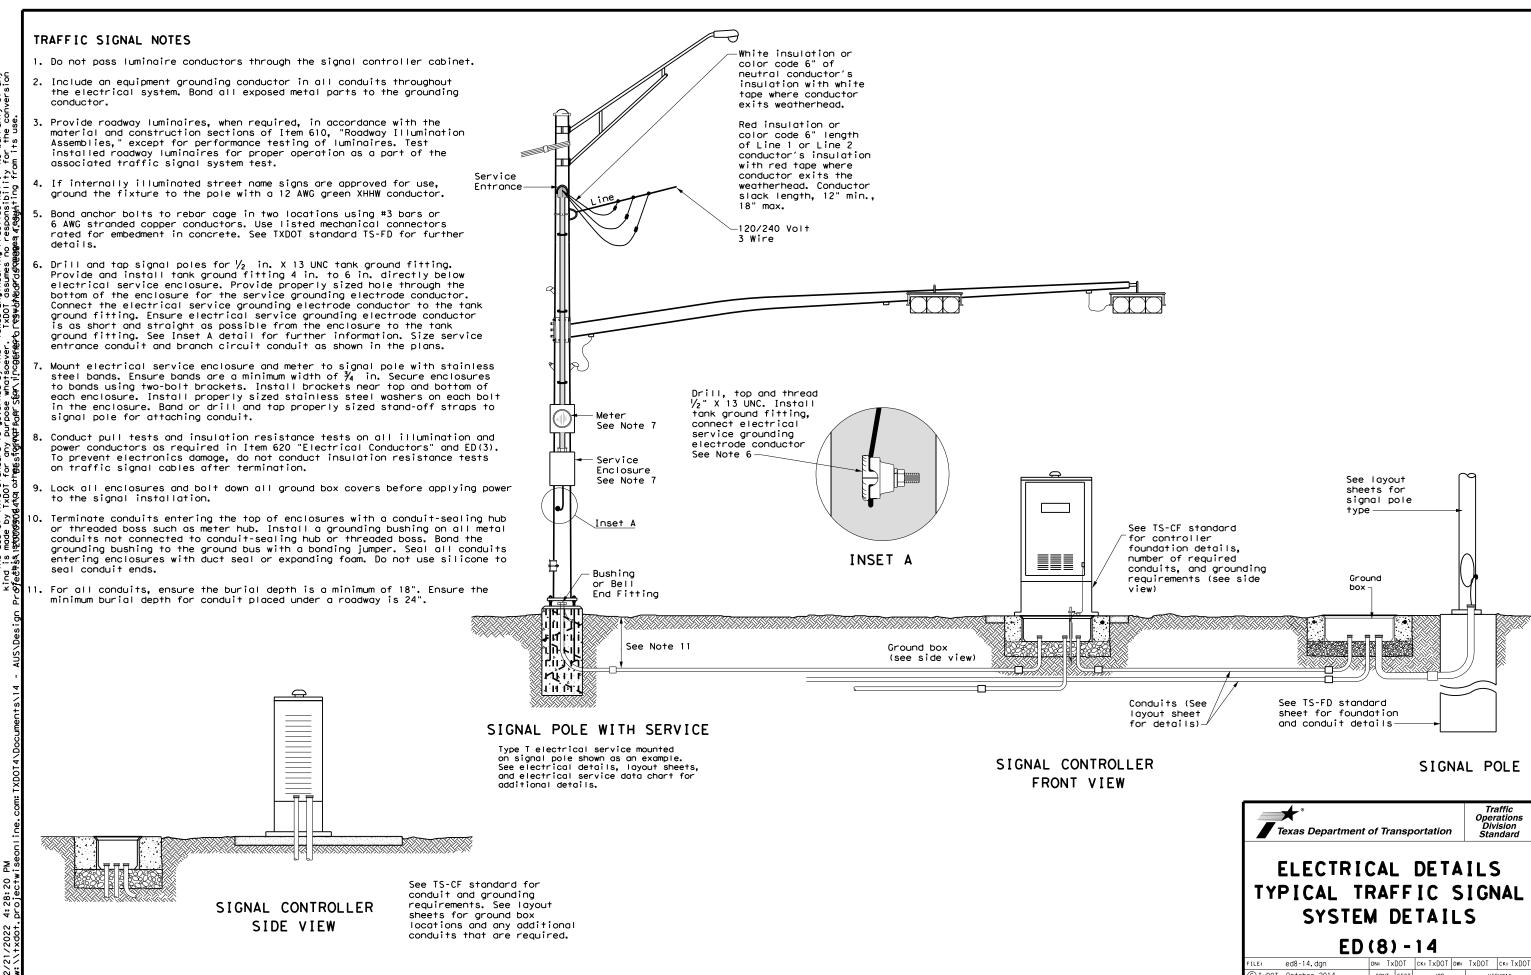


È C ers. warranty the conv Sç. .÷. Act . ponsi Ş ੂ ਕੋ ਉ this st TxDOT ö


12/ DATE:


duits (See rout sheet details)	See TS-FD sta sheet for fou and conduit d	ndation		
R			SIGNA	L POLE
[	✓ * ✓ Texas Department	nt of Trans	portation	Traffic Operations Division Standard
		TRAFF	IC S	IGNAL
	FILE: ed8-14.dgn CTXDOT October 2014 REVISIONS	DN: TXDOT CONT SECT 1200 03 DIST	COUNTY	HIGHWAY FM 973 SHEET NO.
	71Н	AUS	TRAVIS	42

#### PEDESTAL SERVICE NOTES

- 1. Manufacture pedestal electrical services in accordance with Departmental Material Specifications (DMS)11080 "Electrical Services", 11085 "Electrical Services-Pedestal (PS)" and Item 628 "Electrical Services. "Provide pedestal electrical services as listed on the Material Producers list (MPL) on the Department's web site under "Roadway Illumination and Electrical Supplies," Item 628. Ensure all mounting hardware and installation details of services meet utility company specifications. Contact the local utility company for approval of pedestal details prior to installing the electrical pedestal service. Submit any changes required by the utility company prior to manufacturing the pedestal enclosure.
- 2. When a meter socket is required, provide a socket with a minimum 100 amp rating that complies with local utility requirements.
- Provide Class A or C concrete for pedestal service foundations in accordance with Item 420, "Concrete Substructures," except that concrete will not be paid for directly but is considered subsidiary to Item 628.
- 4. Provide #4 reinforcing steel for foundations in accordance with Item 440, "Reinforcement for Concrete.'
- 5. Install  $\frac{1}{2}$  in. X 2  $\frac{1}{16}$  in. minimum length concrete single expansion type anchors for mounting pedestal enclosure to foundation. Anchor location to match mounting holes in each corner of enclosure. Secure each of the four corners of the pedestal enclosure to the anchors in the foundation with  $a \frac{1}{2}$  in galvanized or stainless steel machine thread bolt, a properly sized locknut and a flat washer.
- 6. Finish top of concrete foundation in a neat and workmanlike manner. If leveling washers are used, ensure no more than  $\prime_8$  in. gap at any corner. Do not exceed a maximum dip or rise in the foundation of  $\frac{1}{8}$  in. per foot. When properly installed, ensure the top of the service enclosure is level front to back and side to side within  $\frac{1}{4}$  in. Repair rocking or movement of the service enclosure at no additional cost to the department.
- 7. Do not use liquidtight flexible metal conduit (LFMC) on pedestal type services.
- 8. Ensure all elbows in the foundation are sized as per utility provider's conduit requirements for underground conduit and feeders. PVC extensions may be installed provided the ends of the rigid metal conduits are more than 2 in. below the top of the concrete foundation. Where extension conduits are metal, grounding bushings must be installed with a bonding jumper properly terminated.

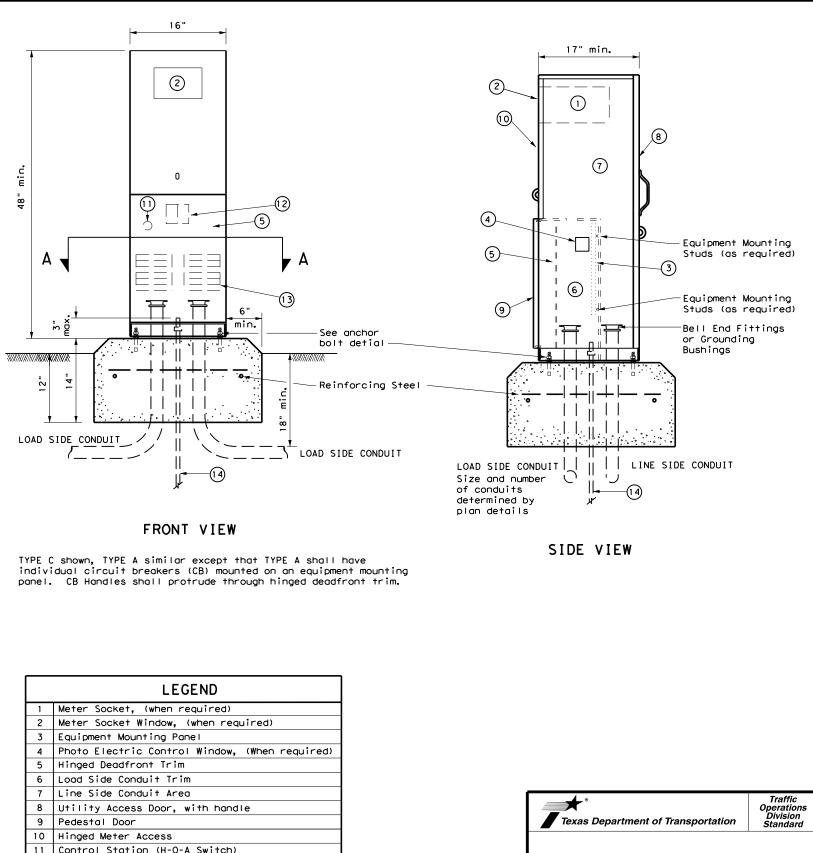





	LEGEND
1	Meter Socket, (when required)
2	Meter Socket Window, (when required)
3	Equipment Mounting Panel
4	Photo Electric Control Window, (When required)
5	Hinged Deadfront Trim
6	Load Side Conduit Trim
7	Line Side Conduit Area
8	Utility Access Door, with handle
9	Pedestal Door
10	Hinged Meter Access
11	Control Station (H-O-A Switch)
12	Main Disconnect
13	Branch Circuit Breakers
14	Copper Clad Ground Rod - 5/8" X 10'

SECTION A-A

ANCHOR BOLT DETAIL

DATE:

## ELECTRICAL DETAILS ELECTRICAL SERVICE SUPPORT PEDESTAL SERVICE TYPE PS

ED	(9		) -	1	4			
ed9-14.dgn	DN:	Тx	DOT	СК:	TxDOT	DW:	TxDOT	ск: TxDOT
October 2014	COM	١T	SECT		JOB		нI	GHWAY
REVISIONS	12	00	03		064		FM	973
	DIS	sτ			COUNTY			SHEET NO.
	AU	IS		1	[RAV ]	S		43
	ed9-14.dgn October 2014	ed9-14.dgn DN: October 2014 COM REVISIONS 120 DIS	ed9-14.dgn DN: Tx October 2014 CONT	ed9-14.dgn DN: TxDOT October 2014 CONT SECT REVISIONS 1200 03 DIST	ed9-14.dgn DN: TxD0T ск: October 2014 Cont SECT REVISIONS 1200 03 DIST	October 2014         CONT         SECT         JOB           REVISIONS         1200         03         064           DIST         COUNTY	ed9-14.dgn         DN:         TxDDT         CK:         TxDDT         DW:           October 2014         CONT         SECT         JOB           REVISIONS         1200         03         064           DIST         COUNTY         COUNTY         COUNTY	ed9-14.dgn DN: TxDOT CK:TXDOT DW: TXDOT October 2014 CONT SECT JOB HI REVISIONS <u>1200 03 064</u> FM D1ST COUNTY

#### TIMBER POLE (TP) SERVICE SUPPORT NOTES

- 1. Ensure electrical service support is a class 5 treated timber pole as per Item 627 "Treated Timber Poles." Embed timber pole to depth required in Item 627.
- 2. Conduit and electrical conductors attached to the electrical service pole and underground within 12 in. of service pole are not paid for directly but are subsidiary to the electrial service.
- 3. Install pole-top mounted photocell (T) on north side of pole, or in service enclosure (E) as required. See Electrical Service Data chart in plan set.
- 4. Gain pole as required to provide flat surface for each channel. Gain timber pole to  $\frac{1}{20}$  in. max. depth and 1  $\frac{1}{20}$  in. max. height. Gain pole in a neat and workmanlike manner.
- 5. Mount meter and service equipment on stainless steel or galvanized channel (Unistrut, Kindorf, or equal). Provide channel sized 1 in. to  $3\frac{3}{4}$ in. maximum depth, and  $1^{\prime}\!/_2$  in. to  $1^{5}\!/_8$  in. maximum width. File smooth the cut ends of galvanized channel and paint with zinc rich paint before installing on pole. Secure each channel section to timber pole with two galvanized or SS lag bolts,  $\frac{1}{4}$  in. minimum diameter by  $\frac{1}{2}$  in. minimum length. Use a galvanized or SS flat washer on each lag bolt. Do not stack channel.
- 6. When excess length must be trimmed from poles, trim from the top end only.
- (1) Class 5 pole, height as required
- (2) Service drop from utility company (attached below weatherhead)
- (3) Service conduit (RMC) and service entrance conductors - One Red, One Black, One White (See Electrical Service Data)
- (4) Safety switch (when required)
- (5) Meter (when required)
- (6) Service enclosure
- (7) 6 AWG bare grounding electrode conductor in  $\frac{1}{2}$  in. PVC to ground rod - extend  $\frac{1}{2}$  in. PVC 6 in, underground,
- (8) 5% in. x 8 ft. Copper clad ground rod - drive ground rod to a depth of 2 in. to 4 in. below grade.
- (9) RMC same size as branch circuit conduit.
- (10) See pole-top mounted photocell detail on ED(5).
- (1) When required by the serving utility provide bare 6 AWG copper conductor. Run wire from pole top to butt wrap or copper butt plate. Protect conductor with non-conductive material to a height of 8 ft. above finished grade.
- (12) When required by utility, cut top of pole at an angle to enhance rain run off.


#### (2) (1)2" to 6" 4" typ. Point of attachment 2 to be below weatherhead 10 (1)Pole brand must be 5' or less above arade 6 -(5) 5-30 Bushing or Bell End (7)Fitting $(\mathfrak{P})$ typ. 6" to 10' Couple to typical Circuit Conduit Upper end of ground rod to be 2" to 4" below finished grade

SERVICE SUPPORT TYPE TP (0)

#### GRANITE CONCRETE (GC) & OTHER CONCRETE (OC) NOTES


Ensure electrical service support structures bid as type Granite Concrete (GC) or Other Concrete (OC) meet the following requirements.

- 1. Provide GC and OC poles that meet the requirements of DMS 11080 'Electrical Services.
- 2. Provide prestressed concrete poles suitable for direct embedment into the ground without special foundations.
- 3. Verify poles are marked as required on DMS 11080. Location of marking should be approximately 4' above final grade. Use the two-point pickup locations when handling pole in horizontal position, and one-point pickup location for use in raising the pole to a vertical position. These marks are small but conspicuous.
- 4. Embed poles 42 in. or 10% of the length plus 2 ft., whichever is greater.
- 5. Ensure all installation details of services are in accordance with utility company specifications.
- 6. Install a one point rack or eye bolt bracket 6 inches to 12 inches below the weatherhead as an overhead service drop anchoring point for the electric utility.
- 7. Furnish and install galvanized or stainless steel channel strut 1  $\frac{1}{2}$  in. or 1 % in. wide by 1 in. up to 3 ¼ in. deep (Unistrut, Kindorf, B-line or equal). Attach channel strut with stainless steel concrete anchors (max. 1" depth), square U-bolts or back to back channel strut with long bolts, or other secure mounting as approved by the Engineer. Ensure bolts are galvanized in accordance with ASTM A153. Do not stack channel struts.
- 8. Backfill the holes thoroughly by tamping in 6 in. lifts. After tamping to grade, place additional backfill material in a 6 inch high cone around the pole to allow for settling. Use material equal in composition and density to the surrounding area. Backfilling will not be paid for directly but is subsidiary to various bid items.

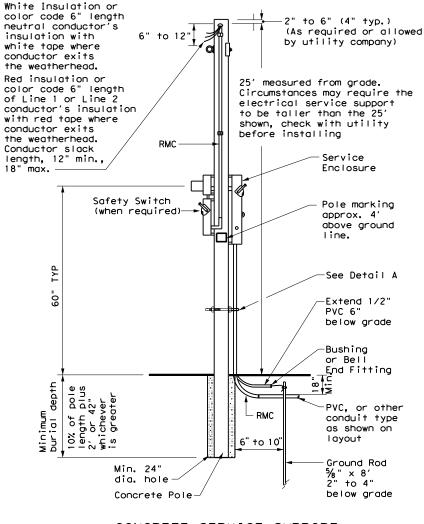

## CONCRETE SERVICE SUPPORT


Overhead(0)

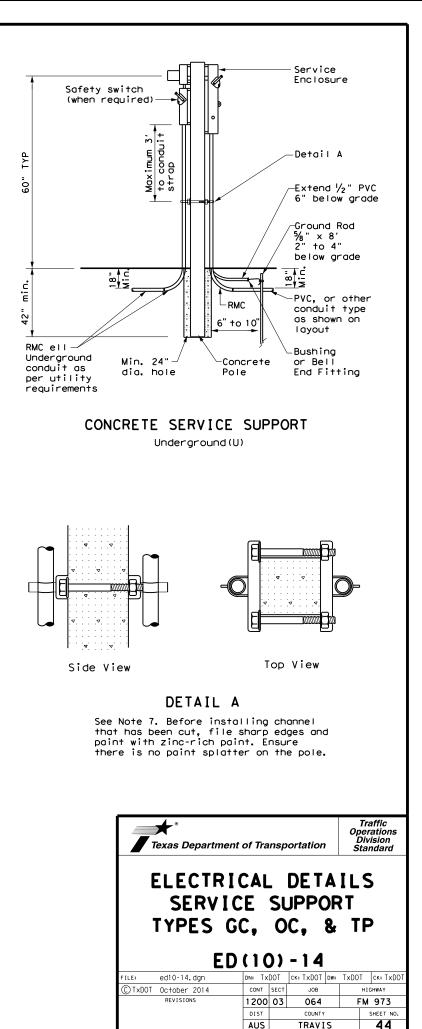


71K

#### DUCT CABLE & HDPE CONDUIT NOTES


- 1. Provide duct cable in accordance with Departmental Material Specification (DMS) 11060 "Duct Cable" and Item 622 "Duct Cable." Provide duct cable as listed on the Material Producer List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 622.
- Provide High-Density Polyethylene (HDPE) conduit in accordance with DMS 11060 and Item 618, "Conduit." Provide HDPE as listed on the MPL on the Department web site under "Roadway Illumination and Electrical Supplies," Item 618.
- 3. Supply duct cable with a minimum 2 in. diameter, unless otherwise shown in the plans. Provide duct cable and HDPE conduit as shown by descriptive code or on the plans. Bend duct cable and HDPE conduit as recommended by the manufacturer, with a minimum bending radius of 26 in. for 2 in. duct. Follow manufacturers' recommendations when handling duct cable and HDPE conduit reels and during installation of duct cable and HDPE conduit.
- 4. Do not splice conductors within duct cable or HDPE conduit. Couple duct cable and HDPE entering a ground box or foundation to a PVC elbow. When galvanized steel RMC elbows are called for in the plans and any portion of the RMC elbow is buried less than 18" from possible contact, ground the RMC elbow.
- 5. Furnish and install duct cable with factory installed conductors, sized as shown in the plans and as required by the National Electrical Code (NEC). The NEC contains specific requirements for duct cable in Article, "Nonmetallic Underground Conduit with Conductors: Type NUCC.
- 6. When conduit casing is called for in the plans, extend duct cable or HDPE conduit through the conduit casing in one continuous length without connection to the casing.
- 7. Seal the ends of duct cable or HDPE conduit with duct seal, expandable foam, or other approved method after completing the pull tests required by Item 622.
- 8. Provide minimum cover of 24 in. under roadways, 18 in. in other locations, or as shown on the plans.
- 9. Furnish and install listed fittings to couple duct cable or HDPE conduit to other types of conduit. Duct cable and HDPE conduit may be field-threaded and spliced with PVC or RMC threaded couplings; connected with listed tie-wrap fittings; connected using listed coupling made of HDPE with stainless steel external banding clamps and locking rings; connected with approved electrofusion conduit couplings; or connected using an approved chemical fusion method using an epoxy or adhesive specifically designed for HDPE couplings and connectors all installed in accordance with their manufacturer's instructions. Do not use PVC glue on HDPE. Do not use water pipe fittings, or connect conduit with heat shrink tubing.

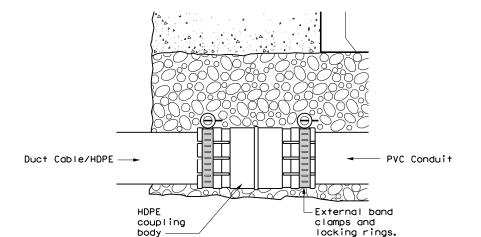




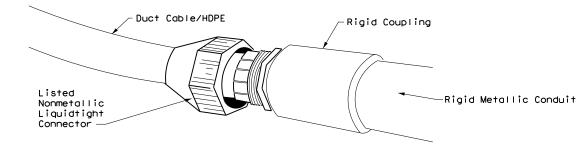


DUCT CABLE/HDPE TO RMC

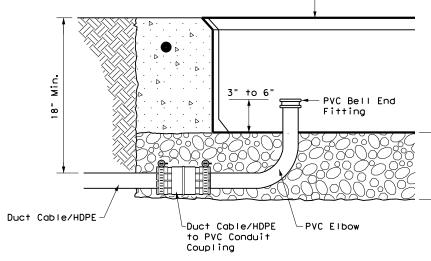

#### DUCT CABLE/HDPE AT GROUND BOX

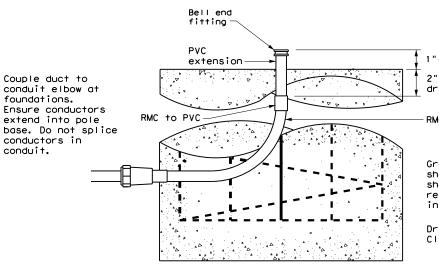

#### DUCT CABLE / HDPE AT FOUNDATION

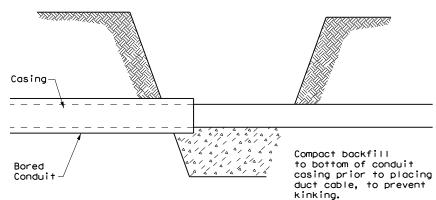



-Ground box

Aggregate bed is to be a minimum, of 9 inches deep, placed under and not in the ground box. Ensure the aggregate does not encroach into the interior of the box.

When the upper end of an RMC Ell does not enter the ground box, it may be extended with a SCH-40 PVC conduit nipple and bell end, provided there is a minimum of 18" of cover over all parts of the elbow. If not, a rigid extension and ground bushing is required.


1"-3" exposed

2" min., from top of drill shaft to RMC

RMC elbow

Ground rods are not shown on this standard sheet, but may be required elsewhere in plans.

Drill shaft foundation Class A Concrete

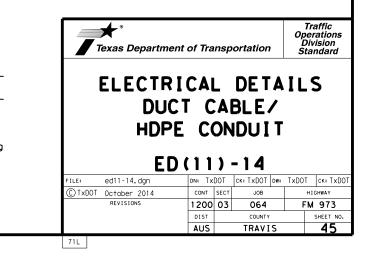


#### BATTERY BOX GROUND BOXES NOTES

#### A. MATERIALS


- Provide polymer concrete or fiberglass reinforced plastic (FRP) battery box ground box and cover in accordance with Departmental Material Specification (DMS) 11071 "Battery Box Ground Boxes." Battery box will accommodate up to 4 batteries, each measuring 8 in. x 13.5 in. x 10 in. (W x L x D). Label battery box ground box cover in accordance with DMS 11071.
- 2. Supply a marine grade batteries with covers. Secure the marine grade batteries with covers to the stainless steel rack in the bottom of the ground box with tie down straps.

#### B. CONSTRUCTION METHODS


- 1. Ensure conduit entry will not interfere with placement of the batteries in the battery box ground box.
- 2. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting battery box ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure the aggregate bed is in place and is a minimum of 9 in. deep prior to setting the box. Install battery box ground box on top of aggregate.
- 3. Cast battery box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Battery box ground box aprons, including concrete and reinforcing steel, are subsidiary to battery box ground boxes when called for by descriptive code.
- 4. Bolt covers down when not working in battery box ground boxes. Keep bolt holes in the box clear of dirt.






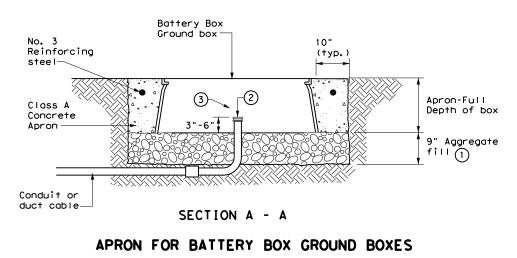


- Place aggregate under the box and not in the box. Aggregate should not encroach on the interior volume of the box.
- (2) Install bushing or bell end fitting on the upper end of all ells.
- (3) Install all conduits in a neat and workmanlike manner.

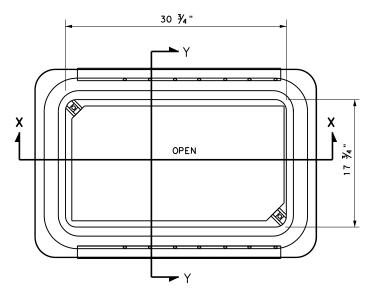

BATTERY BOX TOP VIEW

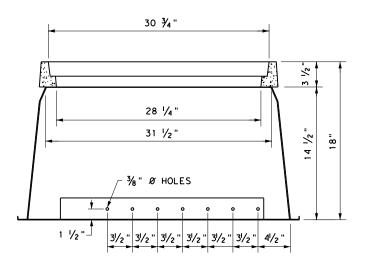

SECTION X-X






2


4:28:36 Droiectw

12/21/2022

DATE:

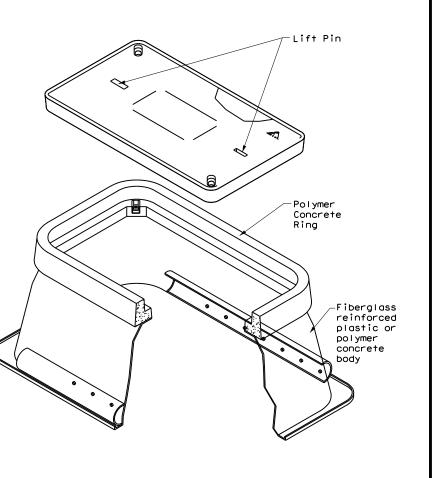

Texas Departme	nt of Trans	portation	Oper Div	affic rations ision ndard
_	TERY	DETA BOX BOXES		0
EC EC	)(12)	-14		
FILE: ed12-14. dgn	) (12) DN: TxDOT	-14 ск: Тхрот dw:	TxDOT	ск: TxDOT
		ск: TxDOT dw:		ck: TxDOT shway
FILE: ed12-14.dgn	DN: TXDOT	CK: TXDOT DW: T JOB	HI	
FILE: ed12-14.dgn CTxDOT October 2014	DN: TXDOT	CK: TXDOT DW: T JOB	FM	SHWAY

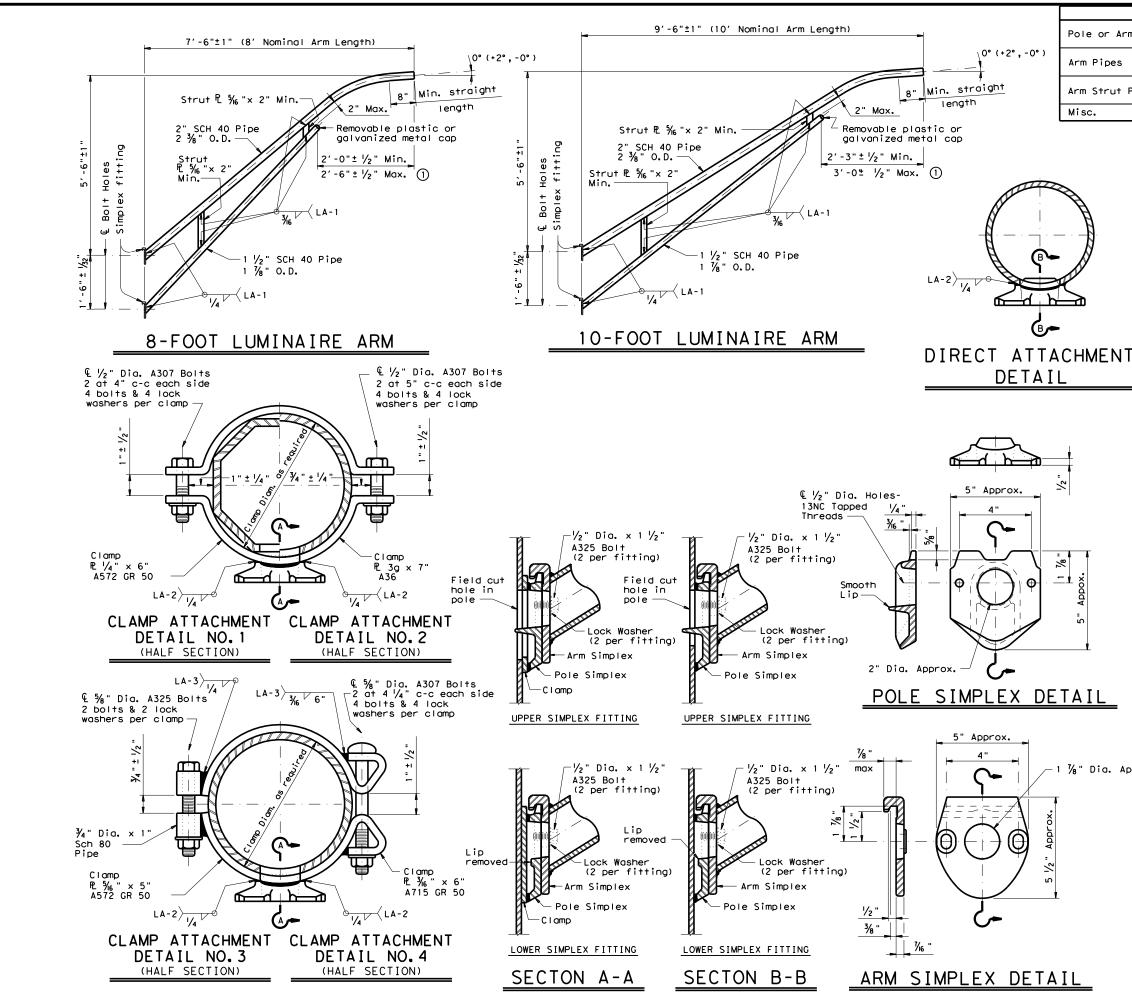

	MATERIALS
le or Arm Simplex	ASTM A27 Gr.65-35 or A148 Gr.80-50, A576 Gr.1021 ③, or A36 (Arm only)
m Pipes	ASTM A53 Gr.B, A501, A1008 HSLAS-F Gr.50 ④, or A1011 HSLAS-F Gr.50 ④
m Strut Plates②	ASTM A36, A572 Gr.50 ④, or A588
sc.	ASTM designations as noted

- (1) Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- (2) Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- (3) A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- (4) ASTM A572, A1008 HSLAS-F, and A1011 HSLAS-F may have higher yield strengths but shall not have less elongation than the grade indicated.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals Arms are designed to support a 60 lb. luminaire having an effective projected area (actual area times drag coefficient) of 1.6 sq. ft.

Materials and fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. In the absense of specified Fabricaton tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.

Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing".


Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.


Each pole simplex fitting shall be supplied with 2 ASTM A325 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans. When clamp attachment is specified, the Fabricator shall ship the clamp assembly securely attached to the pole at the location shown on the plans.

If clamp assemblies are ordered without poles, the Fabricator shall ship one upper and one lower clamp assembly together in a single package, including all nuts and washers required for the clamps and simplex fittings.

1 1/8" Dia. Approx.

Texas Department of Transportation Traffic Operations Division STANDARD ASSEMBLY DRAWINGS FOR LUMINAIRE SUPPORT STRUCTURES ARM DETAILS LUM-A-12 CK: JSY DW: LTT © TxDOT August 1995 DN: LEH CK: TEB REVISION CONT SECT JOB 5-96 1-99 1-12 HIGHWAY 1200 03 064 FM 973 ALIS TRAVIS 47 129



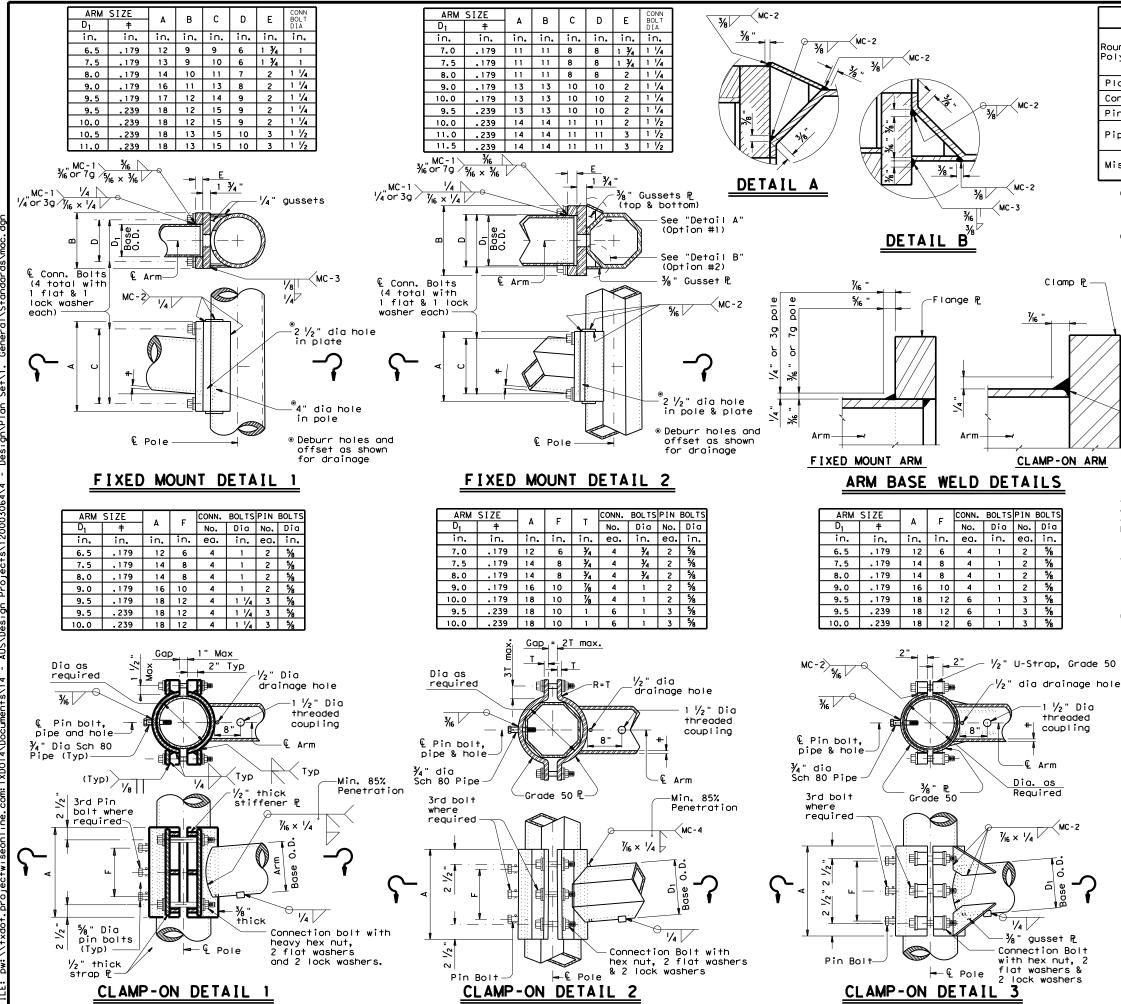

12/21/2022

	MATERIALS
ound Shafts or olygonal Shafts①	ASTM A595 Gr.A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 ②
Plates 🛈	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325 or A449, except where noted
Pin Bolts	ASTM A325
Pipe()	ASTM A53 Gr.B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

① ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.

② ASTM A1011 SS Gr.50 material shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.



Min. 85% Penetration except "Clamp-on Detail 3"

#### **GENERAL NOTES:**

Clamp-on details are used for the second arm on dual mast arm assemblies. A Maximum 1  $\frac{1}{2}$  wide vertical slotted hole shall be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1"

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.


Where duplicate parts occur on a detail, welds shown for one part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces.

#### NOTE:

Pin bolts shall be A325 with threads excluded from the shear plane. Pin bolt and  $\frac{3}{4}$ " dia pipe shall have  $\frac{3}{16}$ " dia holes for a  $\frac{1}{8}$ " dia galvanized cotter pin. Back clamp plate shall be furnished with a  $\frac{3}{4}$ " dia hole for each pin bolt. An  $\frac{1}{6}$  " dia hole for each pin bolt shall be field drilled through the pole ofter arm arighted by beap beap the pole after arm orientations have been approved by the Engineer.


Texas Department of Transportation Traffic Operations Division STANDARD ASSEMBLY FOR TRAFFIC SIGNAL SUPPORT STRUCTURES MAST ARM CONNECTIONS MA-C-12							
MAST AR	M CON			-			
MAST AR	DN: MS			-			
			A-C	-12			
© TxDOT August 1995 REVISIONS	DN: MS	CK: JSY JOB		-12 CK: JSY			
© TxDOT August 1995 S-96 REVISIONS 5-09	DN: MS CONT SECT	CK: JSY JOB		- 12 CK: JSY HIGHWAY			

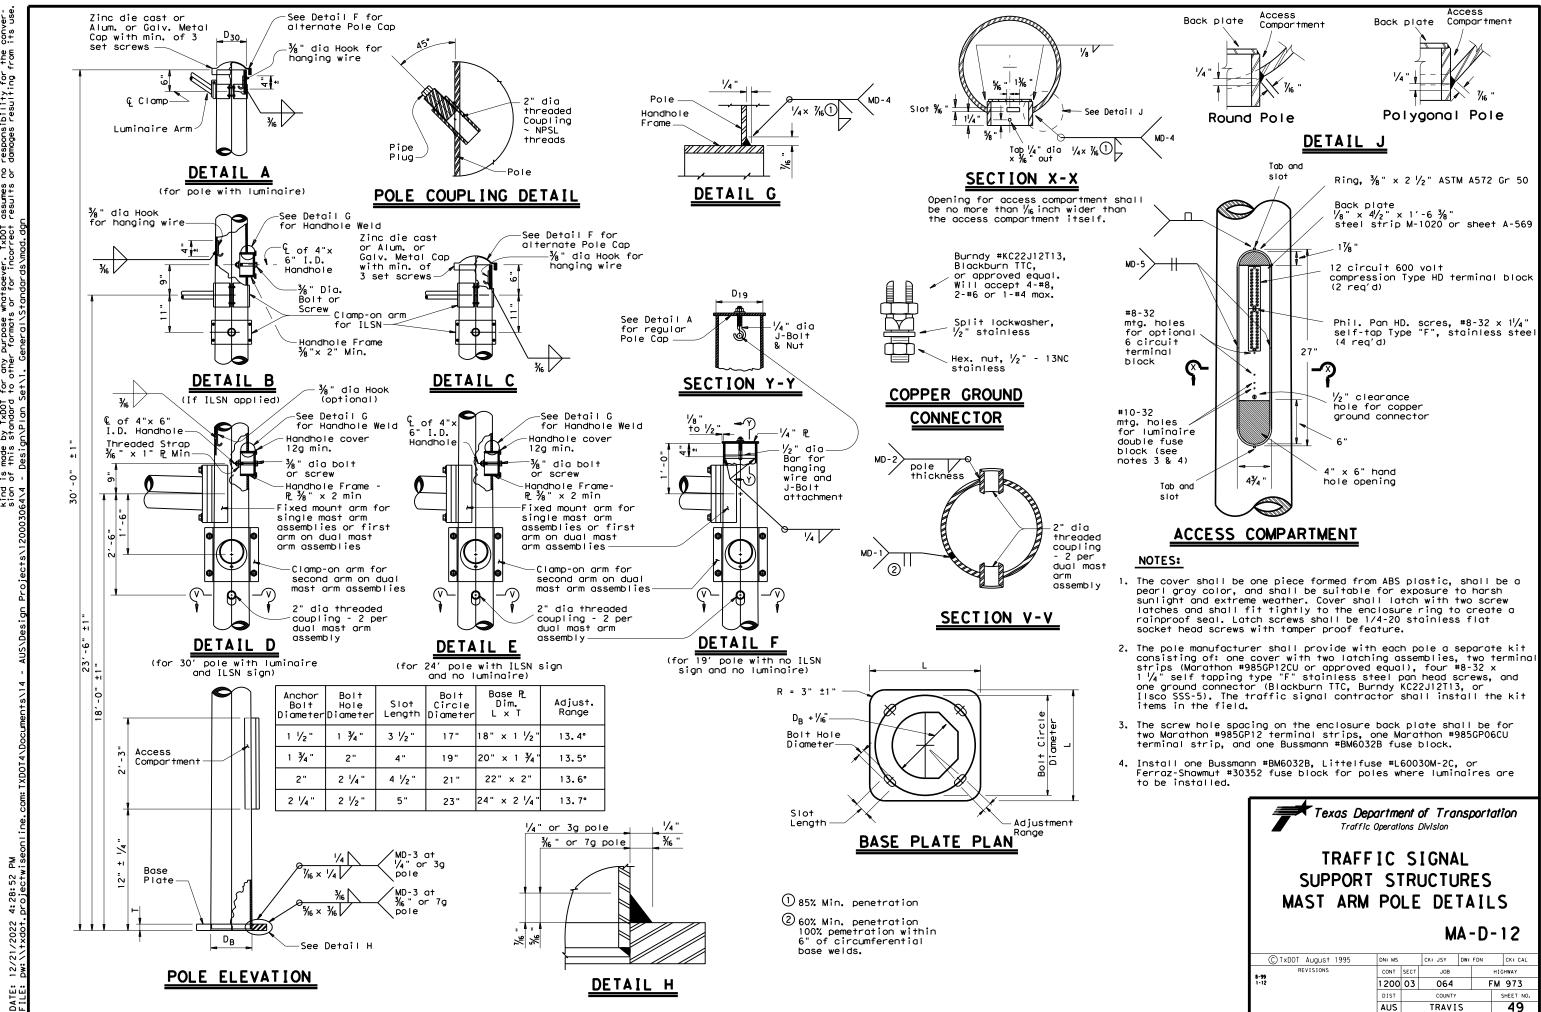


of any conver-its use. tice Act". No warranty responsibility for the damages resulting from y the "Texas Engineering Prac whatsoever. TxDOT assumes no or for incorrect results or is governed by any purpose v other formats of this standard is made by TxDOT for this standard to o the use kind is sion of DISCLAIMER:

Texas De Traffi	<b>partme</b> c Operati			nsµ	porta	rion		
TRAFFIC SIGNAL SUPPORT STRUCTURES MAST ARM POLE DETAILS MA-D-12								
(C) TxDOT August 1995	DN: MS		CK: JSY	DW:	FDN			
G 1800 809031 1333						CK: CAL		
REVISIONS	CONT	SECT	JOB		H	GHWAY		
0 1	CONT 1200		<sub>јов</sub> 064					
REVISIONS 8-99						GHWAY		



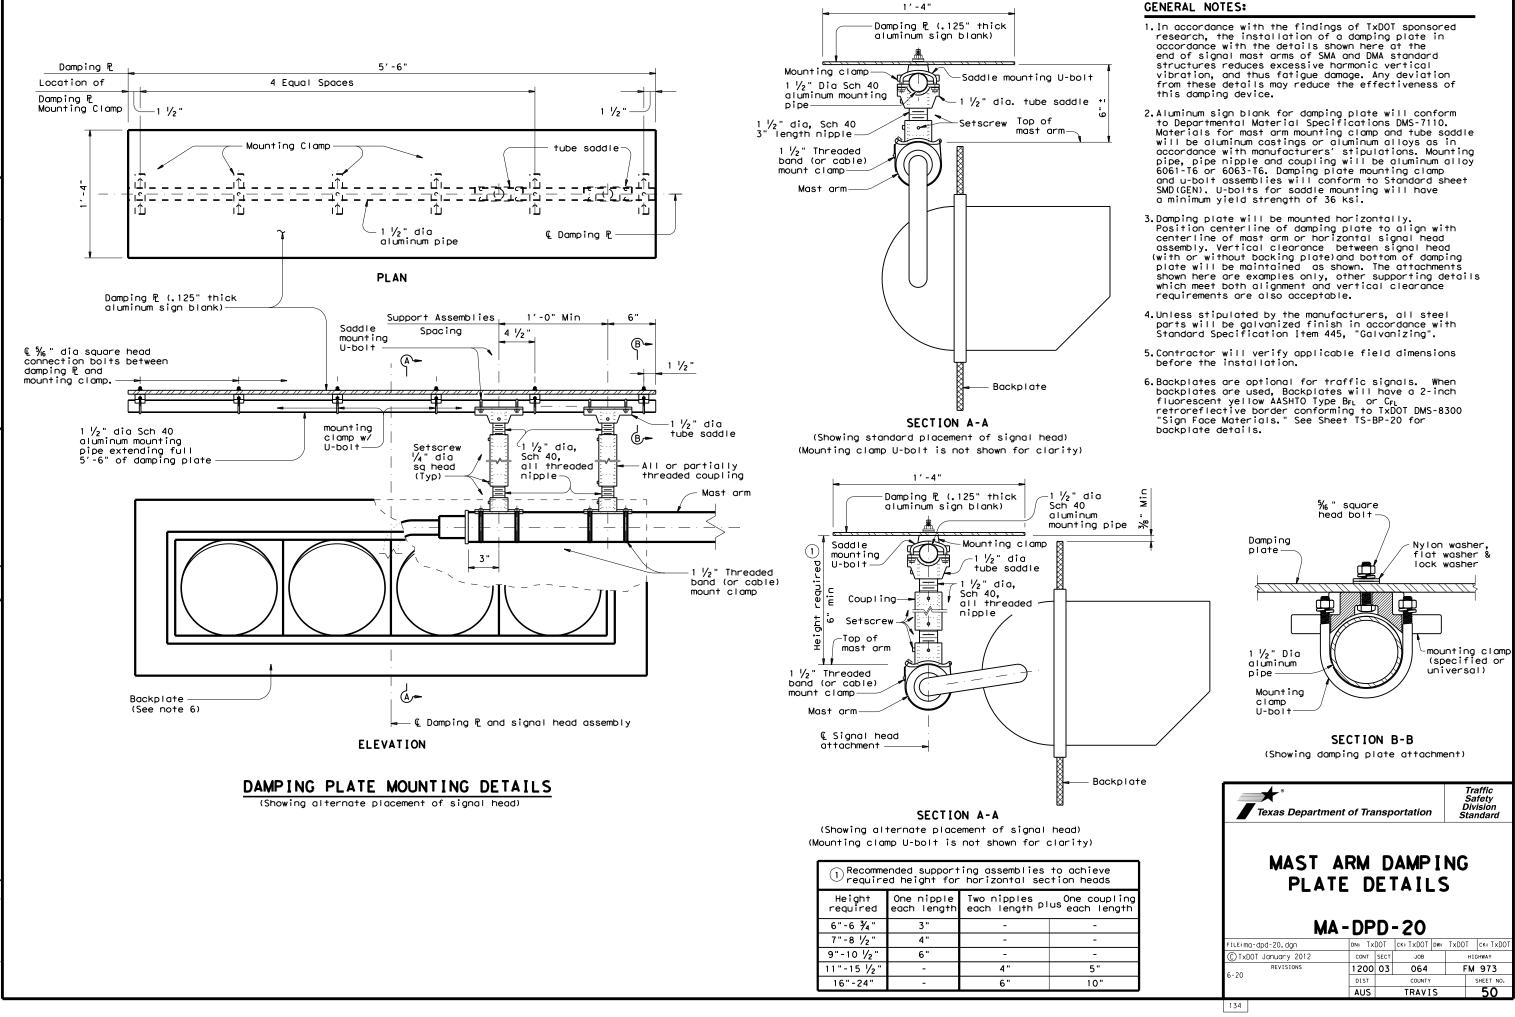

#### GENERAL NOTES:

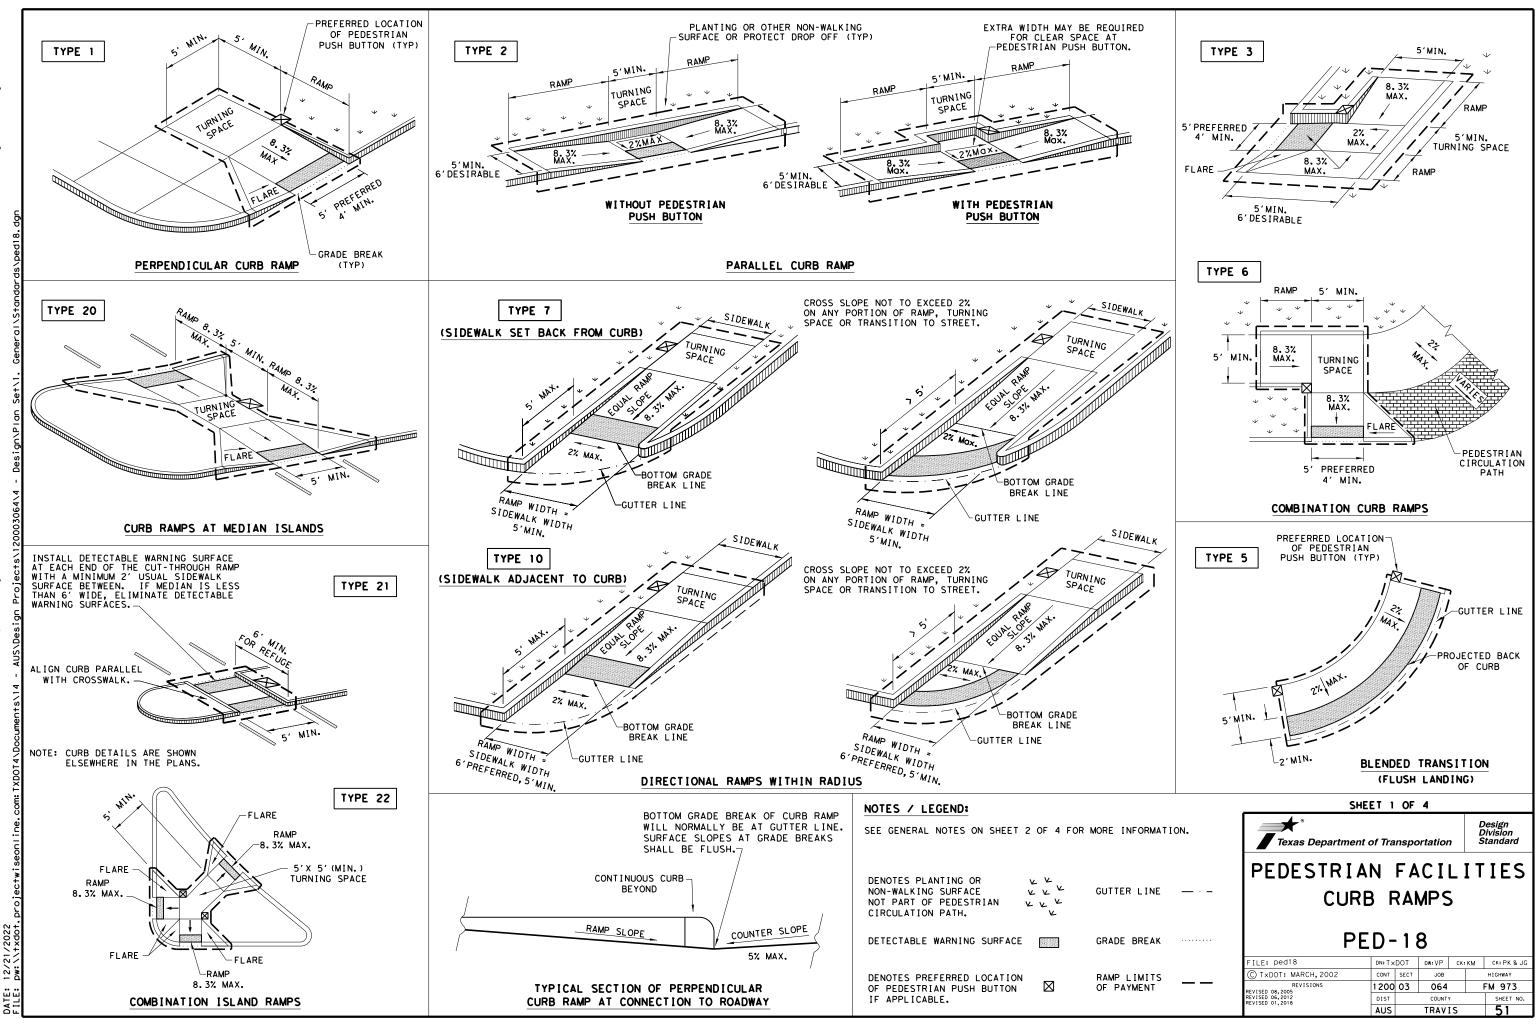

#### GENERAL NOTES

#### CURB RAMPS

- 1. Install a curb ramp or blended transition at each pedestrian street crossing.
- 2. All slopes shown are maximum allowable. Cross slopes of 1.5% and lesser running should be used. Adjust curb ramp length or grade of approach sidewalks as directed.
- 3. Maximum allowable cross slope on sidewalk and curb ramp surfaces is 2%.
- 4. The minimum sidewalk width is 5'. Where the sidewalk is adjacent to the back of curb, a 6' sidewalk width is desirable. Where a 5' sidewalk cannot be provided due to site constraints, sidewalk width may be reduced to 4' for short distances. 5'x 5' passing areas at intervals not to exceed 200' are required.
- 5. Turning Spaces shall be 5'x 5' minimum. Cross slope shall be maximum 2%.
- 6. Clear space at the bottom of curb ramps shall be a minimum of 4'x 4' wholly contained within the crosswalk and wholly outside the parallel vehicular travel path.
- 7. Provide flared sides where the pedestrian circulation path crosses the curb ramp. Flared sides shall be sloped at 10% maximum, measured parallel to the curb. Returned curbs may be used only where pedestrians would not normally walk across the ramp, either because the adjacent surface is planted, substantially obstructed, or otherwise protected.
- 8. Additional information on curb ramp location, design, light reflective value and texture may be found in the latest draft of the Proposed Guidelines for Pedestrian Facilities in the Public Right of Way (PROWAG) as published by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board).
- 9. To serve as a pedestrian refuge area, the median should be a minimum of 6' wide, measured from back of curbs. Medians should be designed to provide accessible passage over or through them.
- 10. Small channelization islands, which do not provide a minimum 5'x 5' landing at the top of curb ramps, shall be cut through level with the surface of the street.
- 11. Crosswalk dimensions, crosswalk markings and stop bar locations shall be as shown elsewhere in the plans. At intersections where crosswalk markings are not required, curb ramps shall align with theoretical crosswalks unless otherwise directed.
- 12. Provide curb ramps to connect the pedestrian access route at each pedestrian street crossing. Handrails are not required on curb ramps.
- Curb ramps and landings shall be constructed and paid for in accordance with Item 531 "Sidewalks".
- 14. Place concrete at a minimum depth of 5" for ramps, flares and landings, unless otherwise directed.
- 15. Furnish and install No. 3 reinforcing steel bars at 18" o.c. both ways, unless otherwise directed.
- 16. Provide a smooth transition where the curb ramps connect to the street.
- 17. Curbs shown on sheet 1 within the limits of payment are considered part of the curb ramp for payment, whether it is concrete curb, gutter, or combined curb and gutter.
- Existing features that comply with applicable standards may remain in place unless otherwise shown on the plans.

#### DETECTABLE WARNING MATERIAL


- 19. Curb ramps must contain a detectable warning surface that consists of raised truncated domes complying with PROWAG. The surface must contrast visually with adjoining surfaces, including side flares. Furnish and install an approved cast-in-place dark brown or dark red detectable warning surface material adjacent to uncolored concrete, unless specified elsewhere in the plans.
- 20. Detectable Warning Materials must meet TxDOT Departmental Materials Specification DMS 4350 and be listed on the Material Producer List. Install products in accordance with manufacturer's specifications.
- 21. Detectable warning surfaces must be firm, stable and slip resistant.
- 22. Detectable warning surfaces shall be a minimum of 24 inches in depth in the direction of pedestrian travel, and extend the full width of the curb ramp or landing where the pedestrian access route enters the street.
- 23. Detectable warning surfaces shall be located so that the edge nearest the curb line is at the back of curb and neither end of that edge is greater than 5 feet from the back of curb. Detectable warning surfaces may be curved along the corner radius.
- 24. Shaded areas on Sheet 1 of 4 indicate the approximate location for the detectable warning surface for each curb ramp type.

#### DETECTABLE WARNING PAVERS (IF USED)

- 25. Furnish detectable warning paver units meeting all requirements of ASTM C-936, C-33. Lay in a two by two unit basket weave pattern or as directed.
- 26. Lay full-size units first followed by closure units consisting of at least 25 percent (25%) of a full unit. Cut detectable warning paver units using a power saw.

#### SIDEWALKS

- 27. Provide clear ground space at operable parts, including pedestrian push buttons. Operable parts shall be placed within unobstructed reach range specified in PROWAG section R406.
- 28. Place traffic signal or illumination poles, ground boxes, controller boxes, signs, drainage facilities and other items so as not to obstruct the pedestrian access route or clear ground space.
- 29. Street grades and cross slopes shall be as shown elsewhere in the plans.
- 30. Changes in level greater than 1/4 inch are not permitted.
- 31. The least possible grade should be used to maximize accessibility. The running slope of sidewalks and crosswalks within the public right of way may follow the grade of the parallel roadway. Where a continuous grade greater than five percent (5%) must be provided, handrails may be desirable to improve accessibility. Handrails may also be needed to protect pedestrians from potentially hazardous conditions. If provided, handrails shall comply with PROWAG R409.
- 32. Handrail extensions shall not protrude into the usable landing area or into intersecting pedestrian routes.
- 33. Driveways and turnouts shall be constructed and paid for in accordance with Item "Intersections, Driveways and Turnouts". Sidewalks shall be constructed and paid for in accordance with Item, "Sidewalks".
- 34. Sidewalk details are shown elsewhere in the plans.

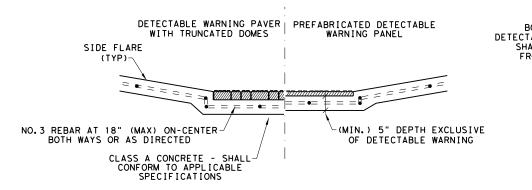


#### SECTION VIEW DETAIL CURB RAMP AT DETECTIBLE WARNINGS

51


15


üü

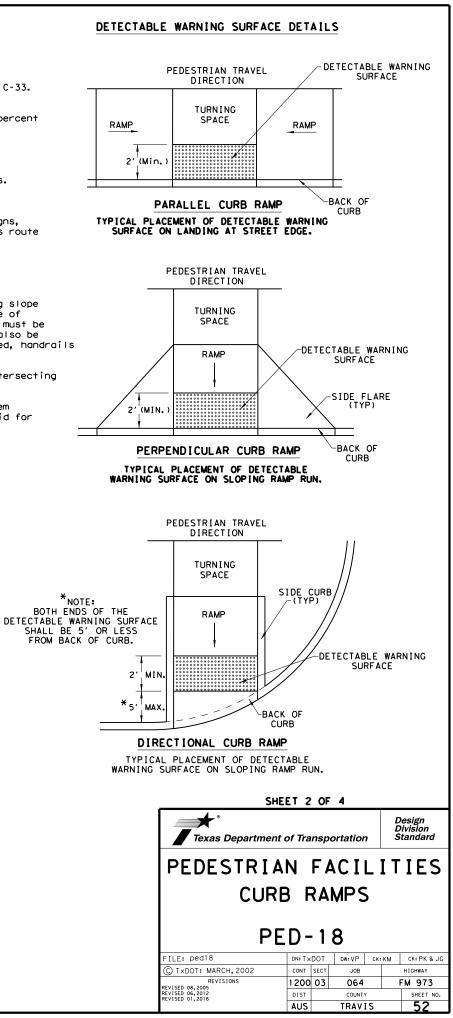






DATE: FIIF:

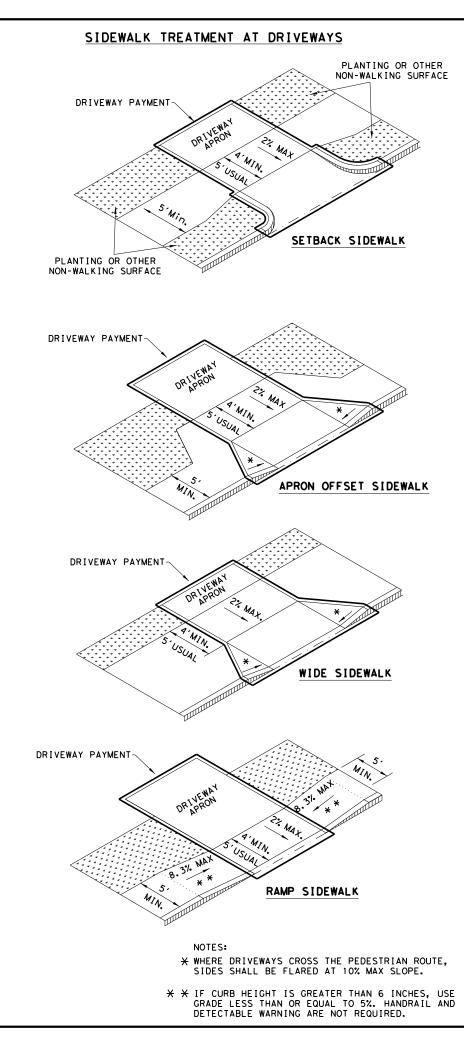

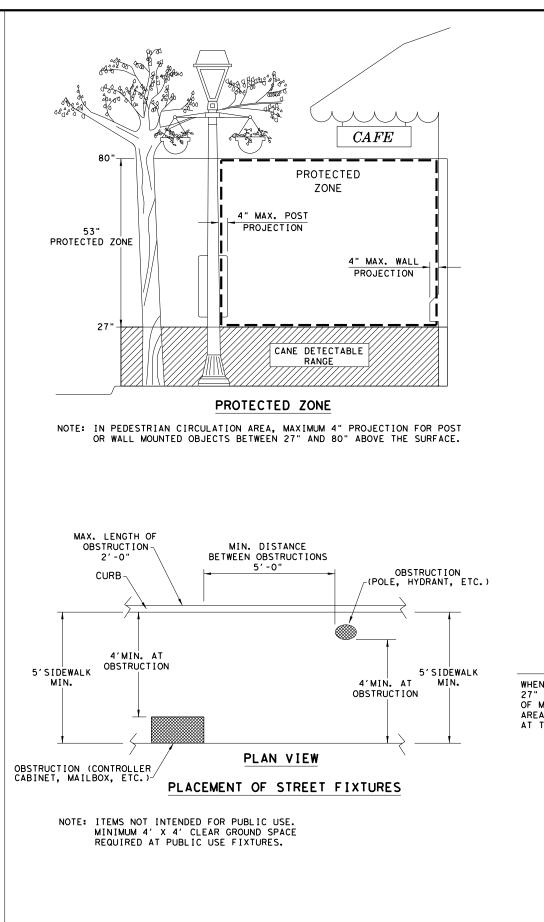

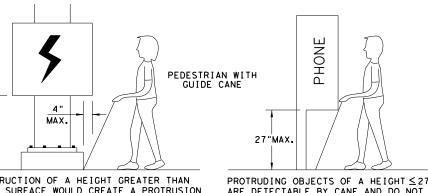

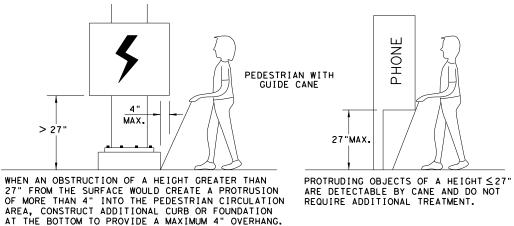






DETECTION BARRIER FOR VERTICAL CLEARANCE < 80"


SHE	ET 3	OF	4				
Texas Department	of Tra	nsp	ortation		D	Design Division Standard	
PEDESTRIAN FACILITIES							
CURE	CURB RAMPS						
PE	D-	1	8				
FILE: ped18	DN: T ×	DOT	DW: VP	СК:	км	CK: PK & JG	
C TxDOT: MARCH, 2002	CONT	SECT	JOB			HIGHWAY	
REVISIONS REVISED 08, 2005	1200	03	064			FM 973	
REVISED 06,2012 REVISED 01,2018	DIST		COUNTY			SHEET NO.	
	AUS		TRAVI	s		53	




DATE: FIIF:

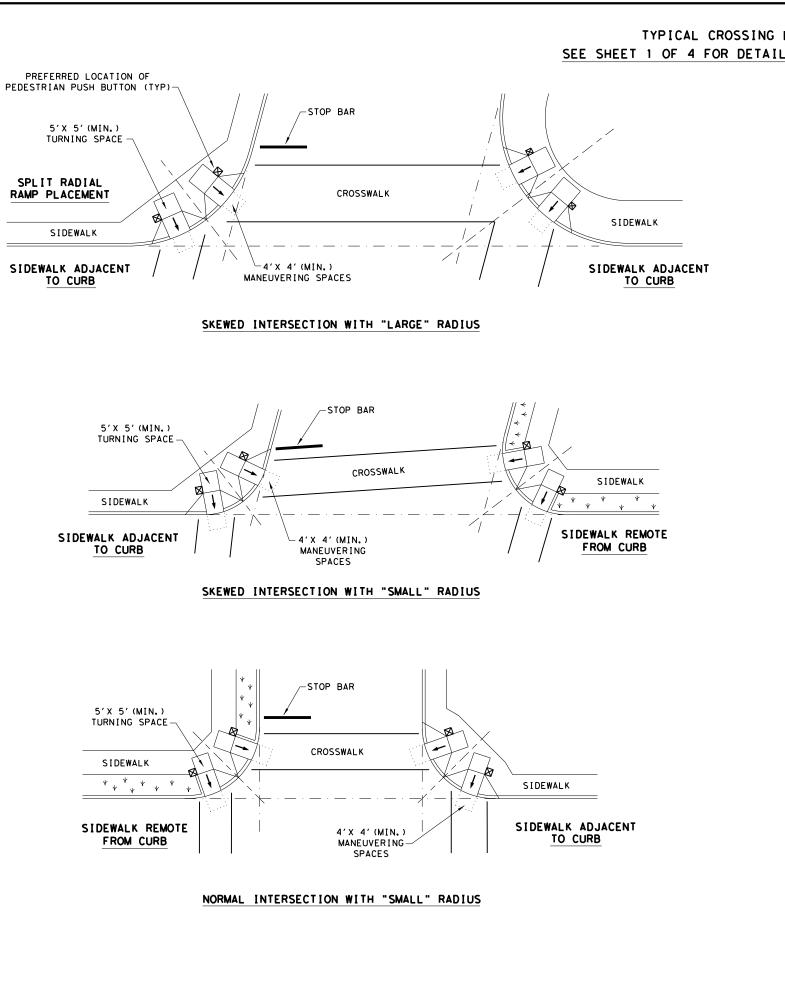


# PUSH BUTTON (IF APPLICABLE).

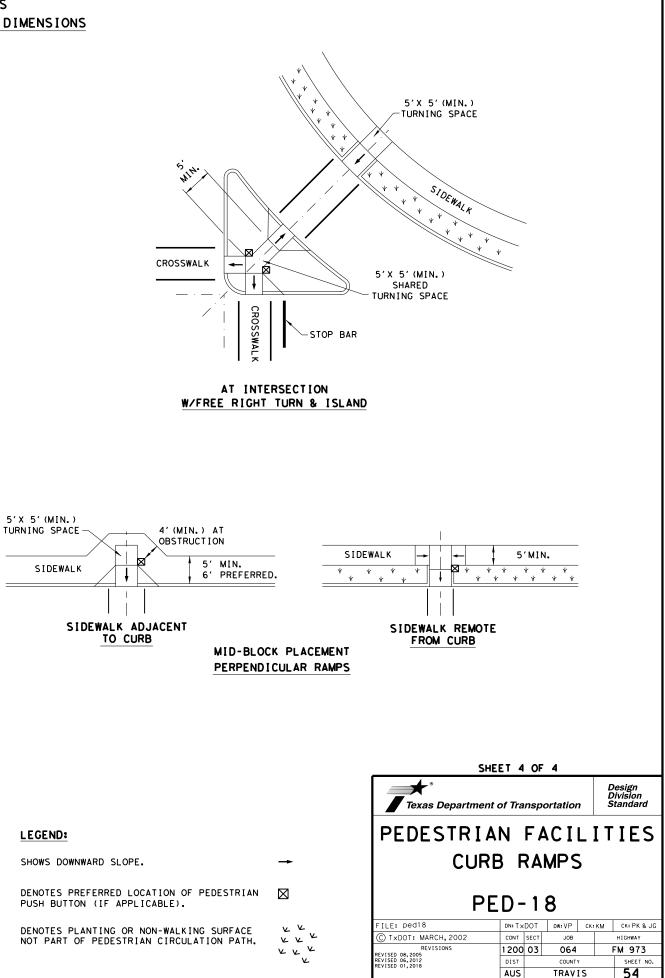

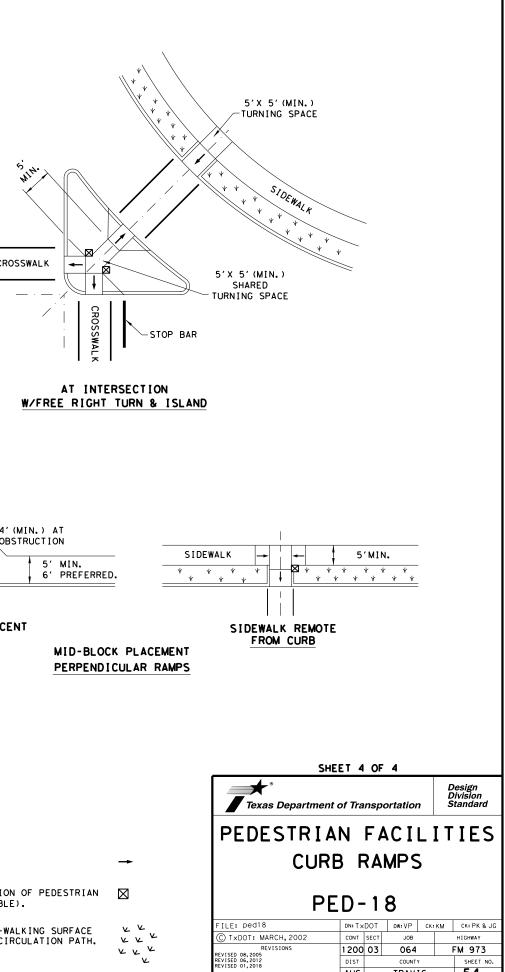

## TYPICAL CROSSING LAYOUTS SEE SHEET 1 OF 4 FOR DETAILS AND DIMENSIONS

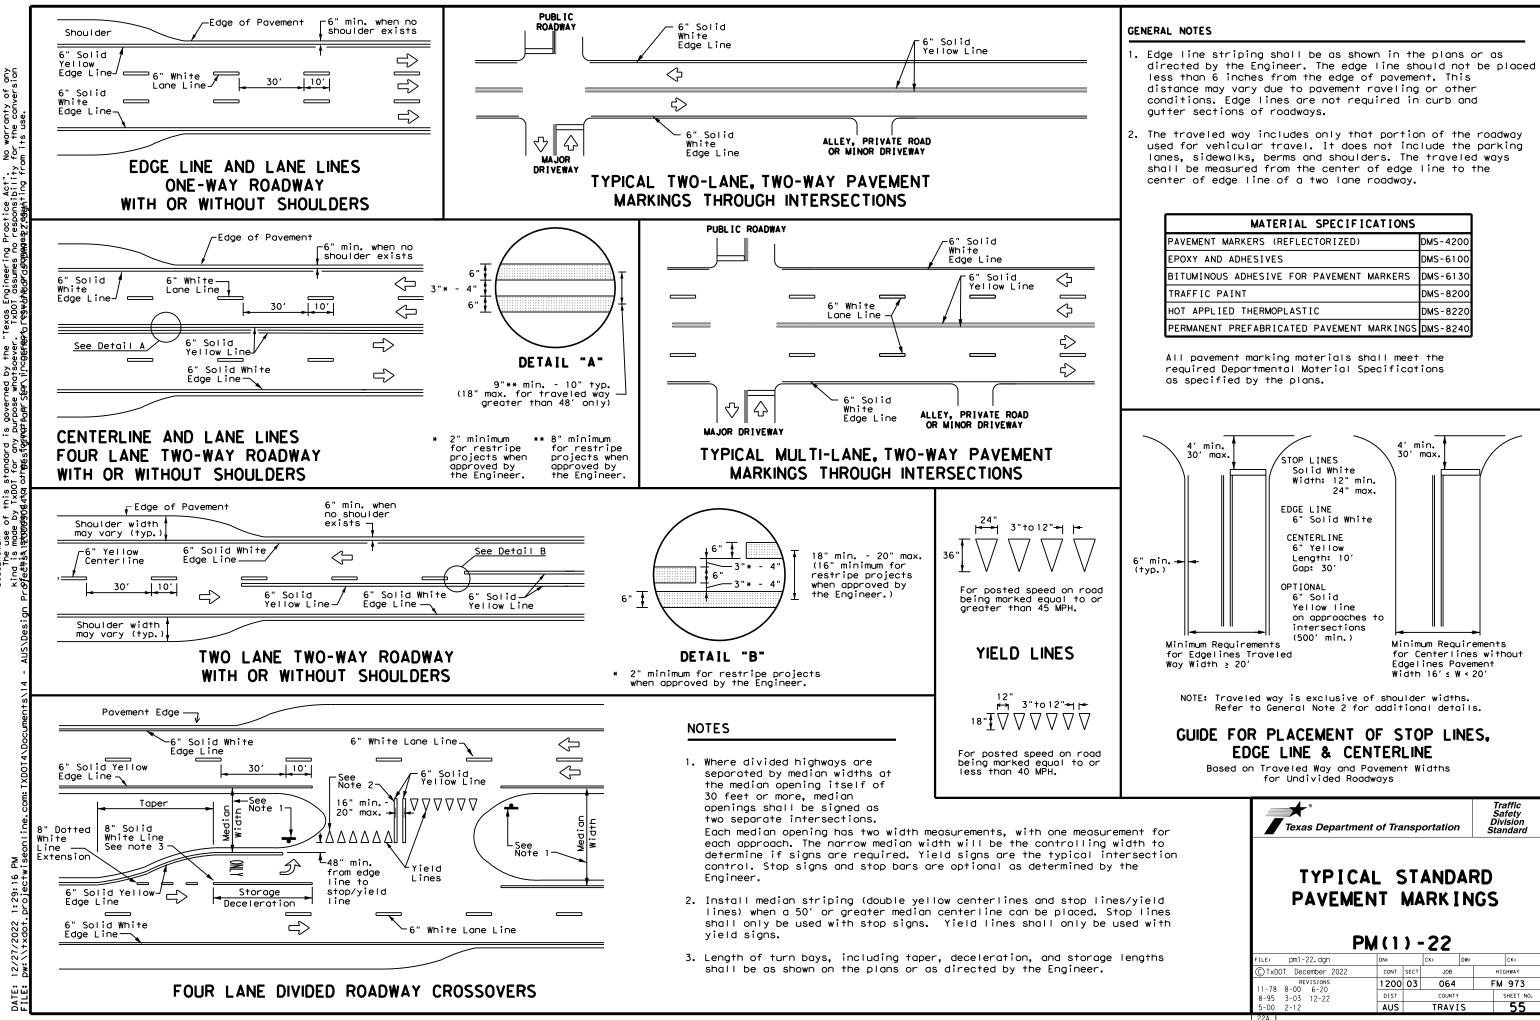


Act bility Practice / p c Texas Engineer TxDOT assume ₽¥¢ goverr urpose this standa / TxDOT for . ° e


> 16 1:29: 12/

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


# FOR VEHICLE POSITIONING GUIDANCE

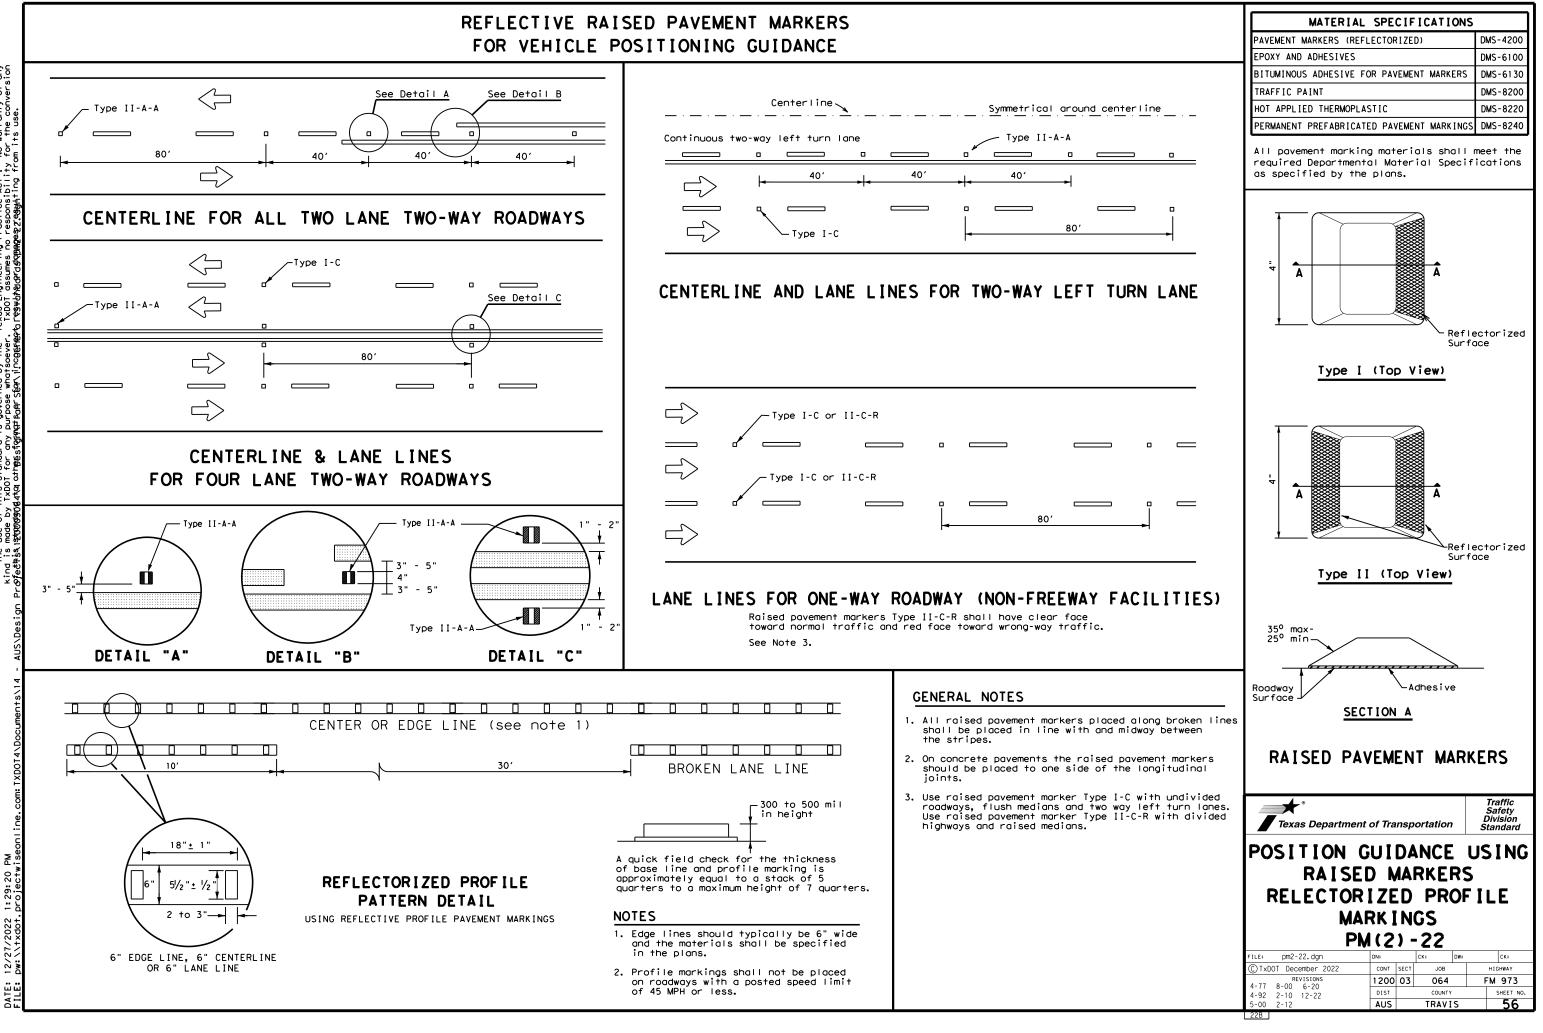

No warranty of any for the conversion on its use Texas Engineering Practice Act". TXDOT assumes no responsibility chreewlitsnorradomages resulting fro whatsoever. .∞ ⊒₿ this standa / IxDOT for ۍ م DISCL

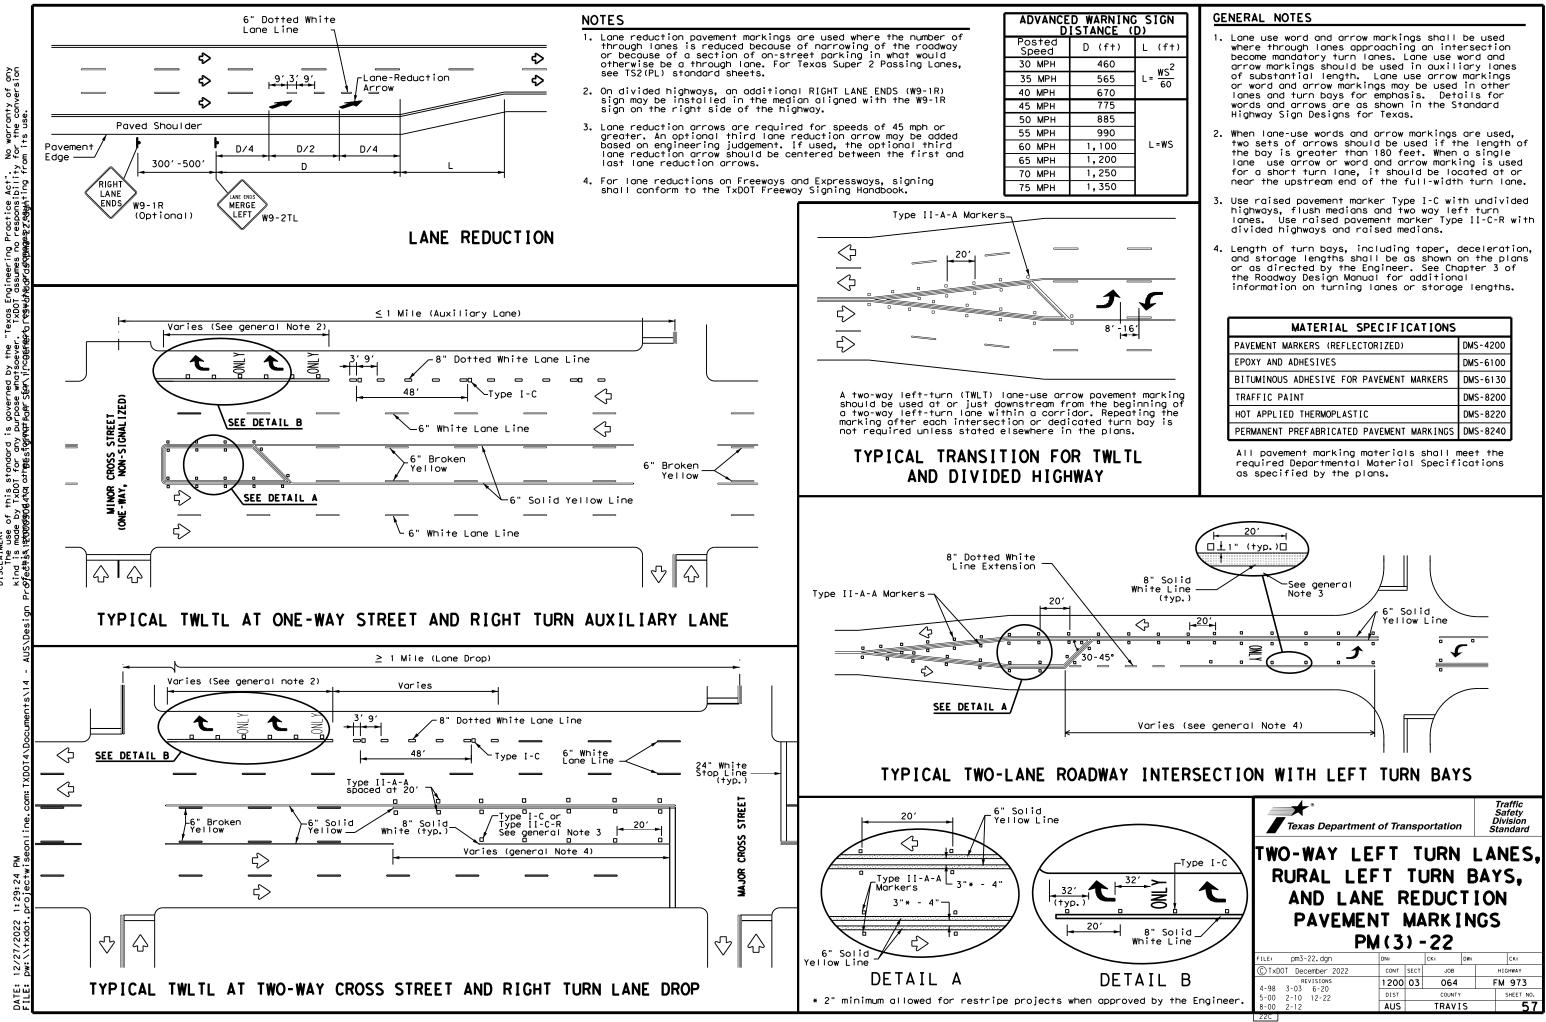

S p of this standard is gover by TxDOT for any purpose NOGOB44(a othBES[<u>forft</u>fadfS

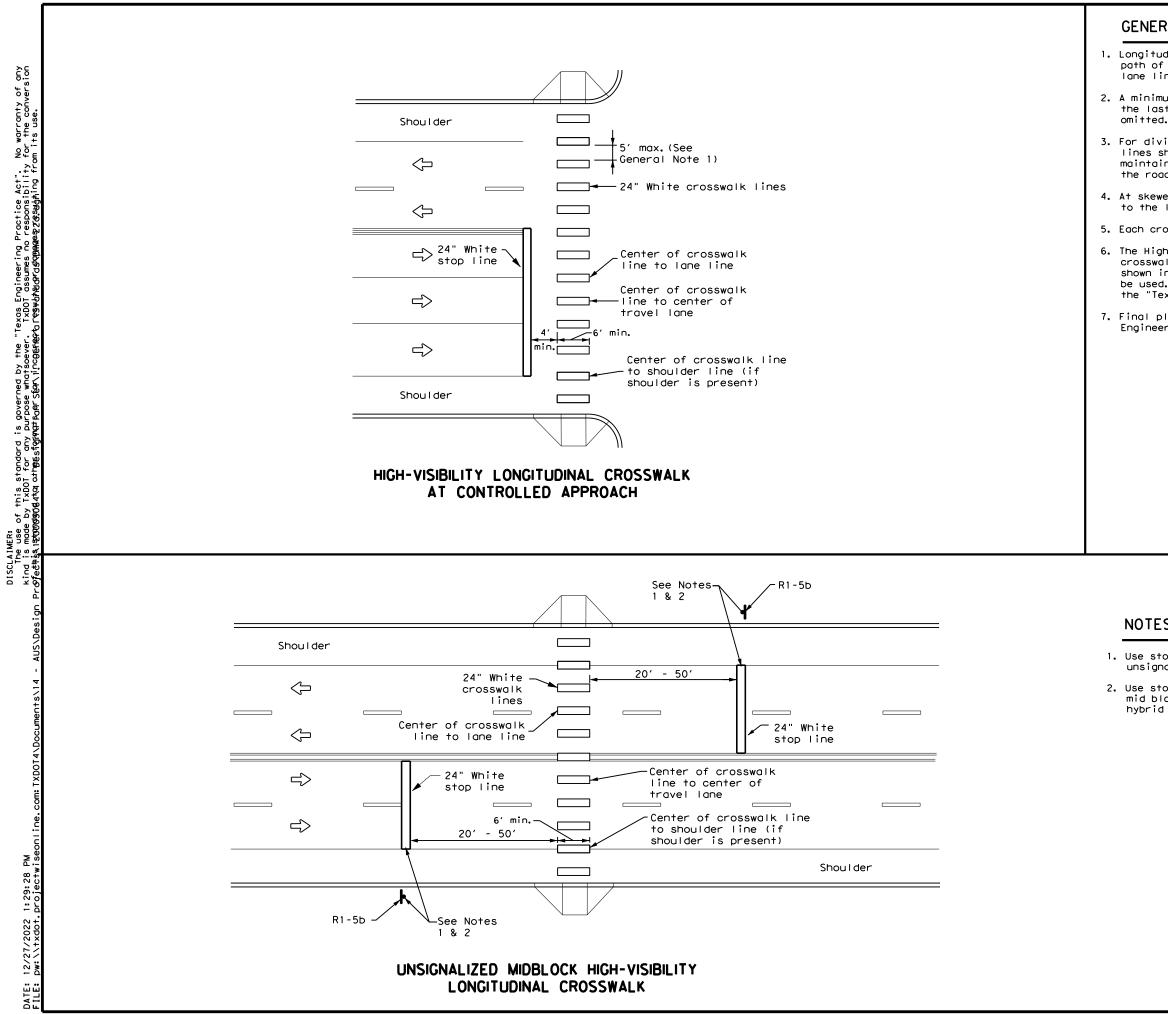

## GENERAL NOTES

- 1. Longitudinal crosswalk lines should not be placed in the wheel path of vehicles. Center the crosswalk lines on travel lanes. lane lines, and shoulder lines (if present).
- 2. A minimum 6" clear distance shall be provided to the curb face. If the last crosswalk line falls into this distance it must be
- 3. For divided roadways, adjustments in spacing of the crosswalk lines should be made in the median so that the crosswalk lines are maintained in their proper location across the travel portion of the roadway.
- 4. At skewed crosswalks, the crosswalk lines are to remain parallel to the lane lines.
- 5. Each crosswalk shall be a minimum of 6' wide.
- 6. The High-Visibility Longitudinal Crosswalk is the preferred crosswalk pattern on State Highways. Other crosswalk patterns as shown in the "Texas Manual on Uniform Traffic Control Devices" may be used. All crosswalk designs and dimension shall comply with the "Texas Manual on Uniform Traffic Control Devices,"
- 7. Final placement of Stop Bar and Crosswalk shall be approved by the Engineer in the field.

DMS-4200
DMS-6100
DMS-6130
DMS-8200
DMS-8220
DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

## NOTES:


1. Use stop bars with Stop Here For Pedestrians (R1-5b) signs at unsignalized midblock cross walks.


2. Use stop bars with STOP HERE ON RED (R10-6 or R10-6a) signs at mid block crosswalks controlled by traffic signals or pedestrian hybrid beacons.

Texas Departme	nt of Tra	nsp	ortatio	n	Sa Div	affic fety ision ndard			
CROSSWALK PAVEMENT MARKINGS									
	NT   M(4)	•			GS				
	•	•			GS	Ск:			
PI	V ( 4 )	•	224			CK: SHWAY			
FILE: pm4-220.dgn © TxDOT December 2022 REVISIONS	DN: CONT	) -	224 CK:	Dw:	ніс	•			
FILE: pm4-22a.dgn © TxDOT December 2022	DN: CONT	SECT	<b>22</b> / ск: јов	DW:	HIC FM	GHWAY			

#### **GENERAL NOTES:**

- 1. Details show a typical warning sign with two flashing beacon heads, other arrangements are possible. When only one beacon is required, install the upper beacon.
- 2. See Item 685, "Roadside Flashing Beacon Assemblies" for further requirements.
- 3. See SMD standard sheets for lateral and vertical clearances and sign mounting details. Install signs as shown on the sign layout sheets.
- 4. Use either a Screw-In Type Anchor Foundation or a Drilled Shaft Foundation as shown elsewhere in the plans. When plans require a Drilled Shaft Foundation, see standard sheet TS-FD. Install the Screw-In Type Anchor Foundation as per manufacturer's recommendations. On a slope, install one edge at ground level. Screw-In/Drilled Shaft Foundation is subsidiary to Item 685. Installation of a ground rod is not required for solar powered flashing beacon assemblies.
- 5. When used, provide Screw-In Type Anchor Foundations as shown on TxDOT's Material Producer List (MPL) in the file "Highway Traffic Signals".
- 6. Install beacon heads as shown here, as shown elsewhere on the plans, or as directed. Use hardware specifically designed for mounting beacon heads on poles.
- 7. Conduit in foundation and within 6 in. of foundation is subsidiary to the Item 685, "Roadside Flashing Beacon Assemblies."
- 8. Unless otherwise shown on the plans, pole shaft shall be one piece, Schedule 40 Aluminum pipe, ASTM B429 or B221 (Alloy 6061-T6 only). Aluminum conduit will not develop the necessary strength and will not be allowed.
- 9. Per manufacturer's recommendations, engage all threads on the pedestal pole base and pipe unless the pipe is fully seated into base. In high winds, use a pole and base collar assembly to add strength and prevent loosening of connection.
- 10. Provide single pole non-fused watertight breakaway electrical connectors for frangible pedestal pole bases, as shown on TxDOT's MPL in the file "Roadway Illumination and Electrical Supplies." Approved models are listed under Item 685. For ungrounded (hot) conductors, install a breakaway connector with a dummy fuse slug). For grounded (neutral) conductors, install a breakaway connector with a white colored marking and a permanently installed dummy fuse (slug).
- 11. Provide clearance as shown above the sidewalk or pavement grade at the edge of the road. When a bottom beacon is not used, mount the bottom of the sign at least 7 ft. above the sidewalk or pavement grade at the edge of the road.
- 12. Make connections to ground rods according to NEC. Ground rod clamps shall be listed for their intended purpose.
- 13. Ensure height of conduit and ground rod is below top of anchor bolts.

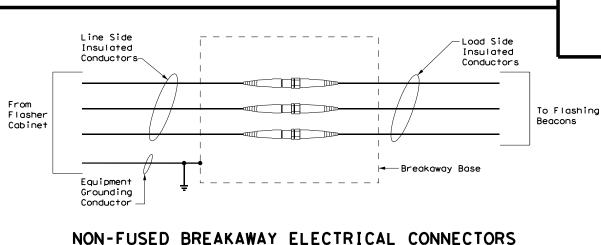

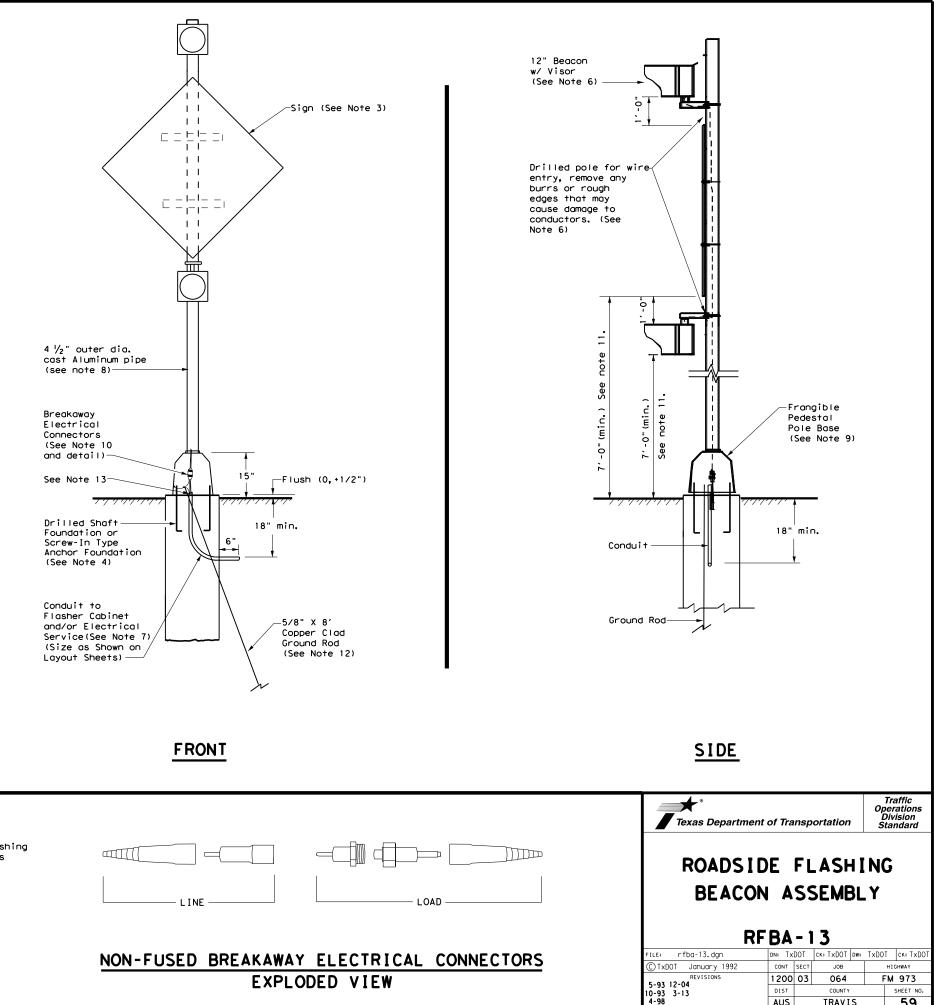

AUS

TRAVIS

59

# Practice Act". Texas Engineering TxDOT assumes no לארפפשאלאאימיתאלאמשמים whatsoever this standard y TxDOT for any Malata othatesfight ° of by Ξ. 4:29:20 12/21/2022 DATE:

warranty of any the conversion

S p

, ¦ ĝ			DOUND							<i>c</i>				
of this standard is governed by the "Texas Engineering Practice Act". No warranty of any made by TADT for any unconverting that any unconverting the source of the converting standard to other formats or for incorrect results or damages resulting from its use Design/Plan Setvl. General/Standards/sma-80.dgn	Arm Length	D <sub>B</sub>	D19	POLES D <sub>24</sub>	D 30	1) thk	D <sub>B</sub>	D19	DNAL POLE	D 30	(1) †hk	Foundation		
₩0+ 00- >₩E	ft.	in.	in.	_∠₄ in.	30 in.	in.	in.	in.	in.	in.	in.	Туре		
5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	20	10.5	7.8	7.1	6.3	.179	11.5	8.5	7.7	6.8	.179	30-A		
arr Tog	24	11.0	8.3 8.8	7.6	6.8	.179	12.0	9.0 9.5	8.2 8.7	7.3	.179	30-A 30-A		
0++ 2++ 2	32	11.5	9.8	8.1 9.1	7.3 8.3	.179	12.5 12.0	9.0	8.2	7.8	.179	30-A		
	36	12.0	9.3	8.6	7.8	.239	12.5	9.5	8.7	7.8	.239	36-A		
s Ac Dons Dges	40	12.0	9.3	8.6	7.8	.239	13.5	10.5	9.7	8.8	.239	36-A		
t c dance dance	44	12.5	9.8	9.1 9.6	8.3 8.8	.239	14.0 15.0	11.0	10.2	9.3	.239	36-A 36-A		
ççç	Arm		ROUND		010	1200			GONAL ARM		1200			
	Length	L	D,	D <sub>2</sub>	1) thk	Rise	L,	D,	2 D 2	1) thk	Rise			
ress dg r	ft.	ft.	in.	in.	in.		ft.	in.	in.	in.	1'-8"			
- 80 -	20 24	19.1 23.1	6.5 7.5	3.8 4.3	.179	1'-9" 1'-10"	19.1 23.1	7.0	3.5	.179	1'-9"			
S T S S S S S S S S S S S S S S S S S S	28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10	)"		
ds / i i z	32	31.0	9.0	4.7	.179	2'-1"	31.0	9.0	3.5	.179	2'-0'			
f f see	36 40	35.0 39.0	9.5 9.5	4.6 4.1	.179	2'-4" 2'-8"	35.0	10.0	3.5	.179	2'-1' 2'-3'			
+ α - α - α - α - α - α - α - α - α - α	44	43.0	10.0	4.1	.239	2'-11"		10.0	3.5	.239	2'-6'			
	48	47.0	10.5	4.1	.239	3'-4"	47.0	11.0	3.5	.239	2′-9'	'		
	Dв = Dıs =	Pole Ba	se 0.D. p 0.D. w	ith no L	uminaire	D <sub>2</sub>	= Arm E = Shaft	nd O.D. Lenath						
, the o	-	and no				Ĺ	= Nomin	ol Arm L	ength					
- 00 + -		w/out L	uminaire p 0.D. w		naire									
	D1 =	Arm Base	e O.D.											
						cker mate		-	d.					
a by a st	(2) D <sub>2</sub>	may be	increase	d by up	to 1" fo	or polygo	nal arms							
of this Desi						See "	Tenon De		ninal Arm	i Lengin	- L			
of s							See	"Slip Jo	int Deta	<b>i</b> I "		90'	Sise <b>U</b>	V +1
the sion 54/4					(-									Γ
0300					+ D <sub>2</sub>					· · ·	· · ·	· ·	╤╢┤╴	Ĺ
DISCLAIMER: The use ( kind is sion of sctsv120003064\4 - D						ne arm sh							I	Mast arm connection-
DISCLA					+r	ne un load								See Sheet "MA-C"
e O									SIGN				Luminaire	
AUS/Design Pr								(11)		,	e		See Sheet	neet"MA-D"
Des:													-Detai	
AUSN														
1									Arm Conne			Nom Arm L.		See Sheet
14									Sheet "MA-			Nom Arm Lo	<u>, m</u> tr	MA-D" Detail
ents					-	Δ			Arm Leng	See	Sheet-			B or C
Ŭ .						acket ssembly—		Bracket Assembly-	3' -0	-	SNS"			
4/Do												El Paso S	<u>└</u> _ <u> </u> ╆,—	
DOT				U.		3 5		-3		3			<b></b>	He i ght na l
ž ž					1		(3) Ibr	-	upling fo	•				
Č.						17' - note	CGB	Connect			See She	: Signal Ar et "MA-D"	m   )	Nominal Unting 1 6" Nomir 30'
M seonline.com:TXD0T4\Documents\14						() 19'-0"Max-17'-6"Nom otherwise noted		et 2 of			Detail	D,E or F —		" Nomina Mounting `-6" Nomi 30
eo								TABLE	OF DIME	NSIONS .	· A -		ļ	0 m
w PM wise							Arm Len Arm Type	gth 24 Ⅱ 10		32' 36 12' 13	5' 40'	44' 48'		- 18′-
2:16:19 P projectwi						-0"Min-19' (unless off	Arm Type			10' 11		12' 12'		- 2 
2:1 Pro						15' -0 (ur					Se	e Sheet M-D"		) - , 6
23 dot.							<u></u>		Crow	wn of Ro	od "N	IA - D "		
2/28/2023 pw:\\txdot.						`\\/\\\\//	\\Y/ <u>}</u> \/}	V//\Y/ <u>}</u>	V////////				7/1 · · · //	XXX^\`
2/2 pw:								_			Fou	ndation		<u>(</u> ),
DATE: FILE:							<u>STR</u>	UCTUF	RE AS	SEMBL	Y See	Sheet -FD" —	/	
DA FI														

Ship e connec	ach pole with tion bolts and	the following c washers and an	ittached: enlar iy additional h	ged hand hole, ardware listed	, pole cap, fixe d in the table.	d-arm		
Nominal	30' Poles Wi		24' Poles V	19' Poles With No Luminaire and No [LSN				
Arm Length	(or two if I	re plus: One LSN attached) ole, clamp-on	plus on	Above hardware plus one small hand hole See note abo				
f†	Designation	Quantity	Designation	Quantity	Designation	Quantity		
20	20L-80		205-80		20-80			
24	24L-80		245-80		24-80			
28	28L-80		285-80		28-80			
32	32L-80	1	325-80		32-80			
36	36L-80		365-80		36-80			
40	40L-80		405-80		40-80			
44	44L-80		445-80		44-80			
48	48L-80	1	485-80		48-80			
raffic	: Signal Arms (	1 per Pole)	Shin e	ach arm with	the listed equir	ment attache		
	Type I Arm (		Type II Arm		Type III Arm			
Nominal	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			<u>g</u>		
Arm Length	1 CGB con	nector	1 Bracket / and 2 CGB (		2 Bracket Assemblies and 3 CGB Connectors			
f†	Designation	Quantity	Designation	Quantity	Designation	Quantity		
20	201-80							
24	241-80		24∐-80					
28	281-80		2811-80					
32			32Ⅲ-80	1	32111-80			
36			3611-80		36111-80			
40					40111-80			
44					44111-80			
48					48111-80	1		
		per 30′ pole)	-	1				
	ol Arm Length		Quantity					
8' Arı	n		2					
ILSN A	rm (Max. 2 pe	r pole) Ship wi	ith clamps, bol	ts and washer	s			
Nomina	ol Arm Length		Quantity					
7' Arı	n							
9' Ari	n							
	Bolt Assembli	es (1 per pole	e)					
Anch Bol Diame	t Bolt	0	Top and Bo	ttom template	ly consists of s, 4 anchor bol	ts. 8 nuts.		
	-	Quantity 1	per Stando	iners, and 4 n Ird Drawing "Ti	ut anchor device S-FD".	es (Type 2)		
1 1/2		1		2				
1 3/4'	' 3'-10"		Templa	tes may be re	moved for shipme	ent.		




Height


Mounting

30'-0" Nomînal

35′-0"

2/28/2023 Mohammed Ali -7846EB8AE6FD4CC...



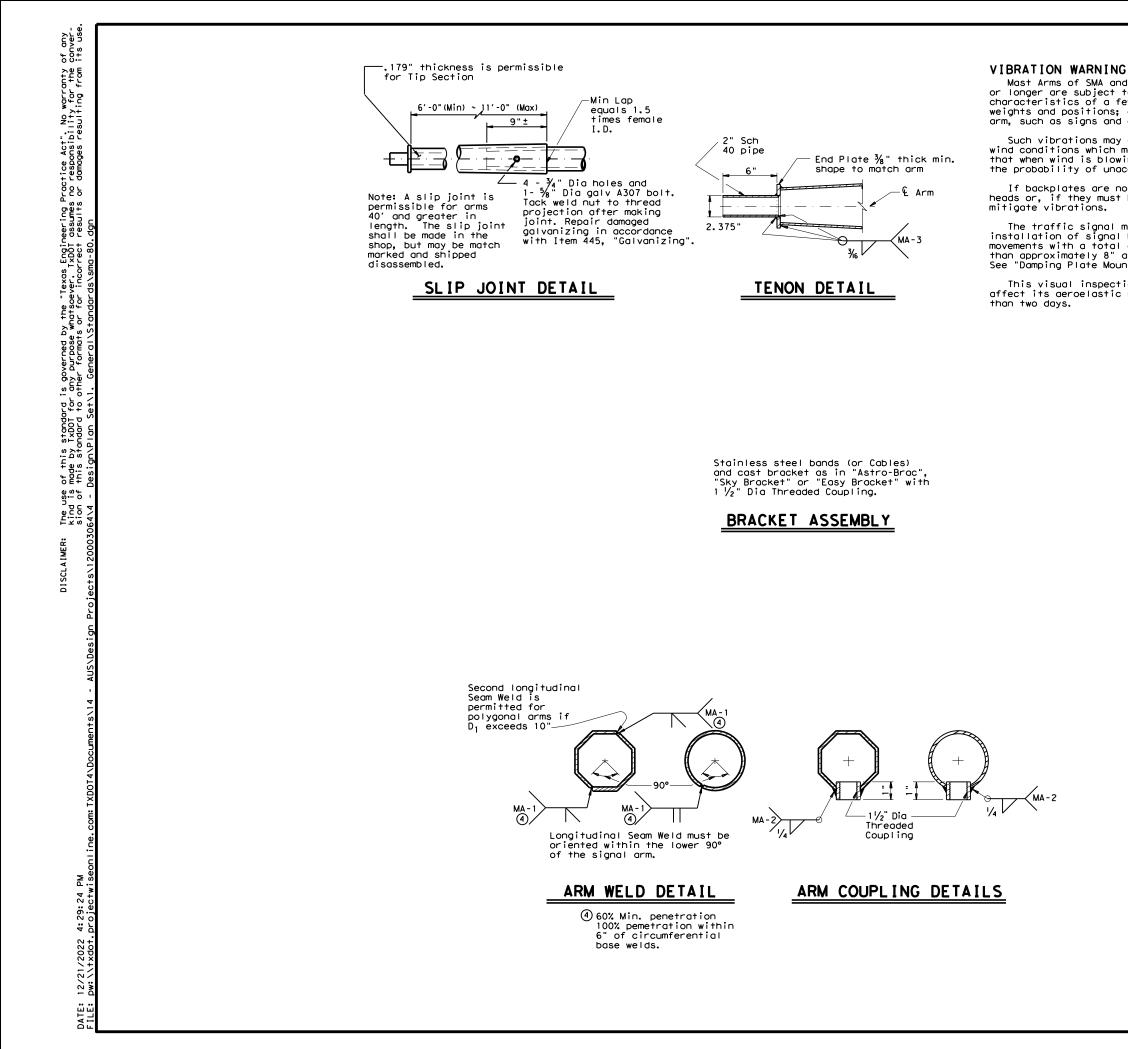

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

Mast Arms of SMA and DMA structures and clamp-on Arms of LMA structures of approximately 40 ft or longer are subject to harmonic vertical vibrations in light wind conditions due to the aeroelastic characteristics of a few of the myriads of possible combinations of the following: signal numbers, weights and positions; existence/solidity of backplates; presence of additional attachments to the arm, such as signs and cameras; arm-wind orientation; and arm-pole stiffness.

Such vibrations may cause fatigue damage to the structure and may lead to galloping in moderate wind conditions which may further damage the structure and alarm the public. Tests have indicated that when wind is blowing toward the back side of signal heads having un-vented backplates attached the probability of unacceptable harmonic vibration and/or galloping is rather high.

If backplates are not required for improved visibility they should not be applied to the signal heads or, if they must be applied, they should be vented as a first and inexpensive measure to

The traffic signal mast arms shall be visually inspected in 5 to 20 mph wind conditions after installation of signal heads and any attachments, including any required backpates. If vertical movements with a total excursion (maximum upward excursion to maximum downward excursion) of more than approximately 8" are observed at the arm tip, a damping plate shall be fitted to the arm. See "Damping Plate Mounting Details" on standard sheet, MA-DPD-10.

This visual inspection shall be repeated after each modification of the structure that could affect its aeroelastic response. Excessive vibrations shall not be allowed to continue for more

#### **GENERAL NOTES:**

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor.

Poles are designed to support one 8'-0" luminaire arm, one 9'-0" internally lighted street nome sign and one traffic signal arm with a length as tabulated. The specified luminaire load applied at the end of the luminaire arm equals 60 lbs vertical dead load plus the horizontal wind load on an effective projected area of 1.6 sq ft. specified internally lighted street name sign load applied 4.5 ft from the centerline of the pole equals 85 lbs vertical dead load plus horizontal wind load on an effective projected area of 11.5 sq ft. The specified signal load applied at the end of the traffic signal arm equals 180 lbs vertical dead load plus the horizontal wind load on an effective projected area of 32.4 sq ft (actual area times drag coefficient)


See Standard Sheet "MA-D" for pole details, "MA-C" for traffic signal arm connection details, "MA-C (ILSN)" for internally lighted street name sign arm connection details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details. See "MA-C" for material specifications.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing", after fabrication.

SHEET 2 OF 2

Texas Depo Traffic C TRAFFI SUPPORT SINGLE MAS (80 MPH	Diperati C ST T A W	ons L S RI RN	Division IGN UCTI A AS D ZO	AL URE SEM	ES IBL Y
(C)TxDOT August 1995	DN: MS		CK: JSY	DW: MMF	CK: JSY
REVISIONS	CONT	SECT	JOB		HIGHWAY
5-96 1-12	1200	03	064		FM 973
	DIST		COUNTY		SHEET NO.
	AUS		TRAVI	S	61
122B					

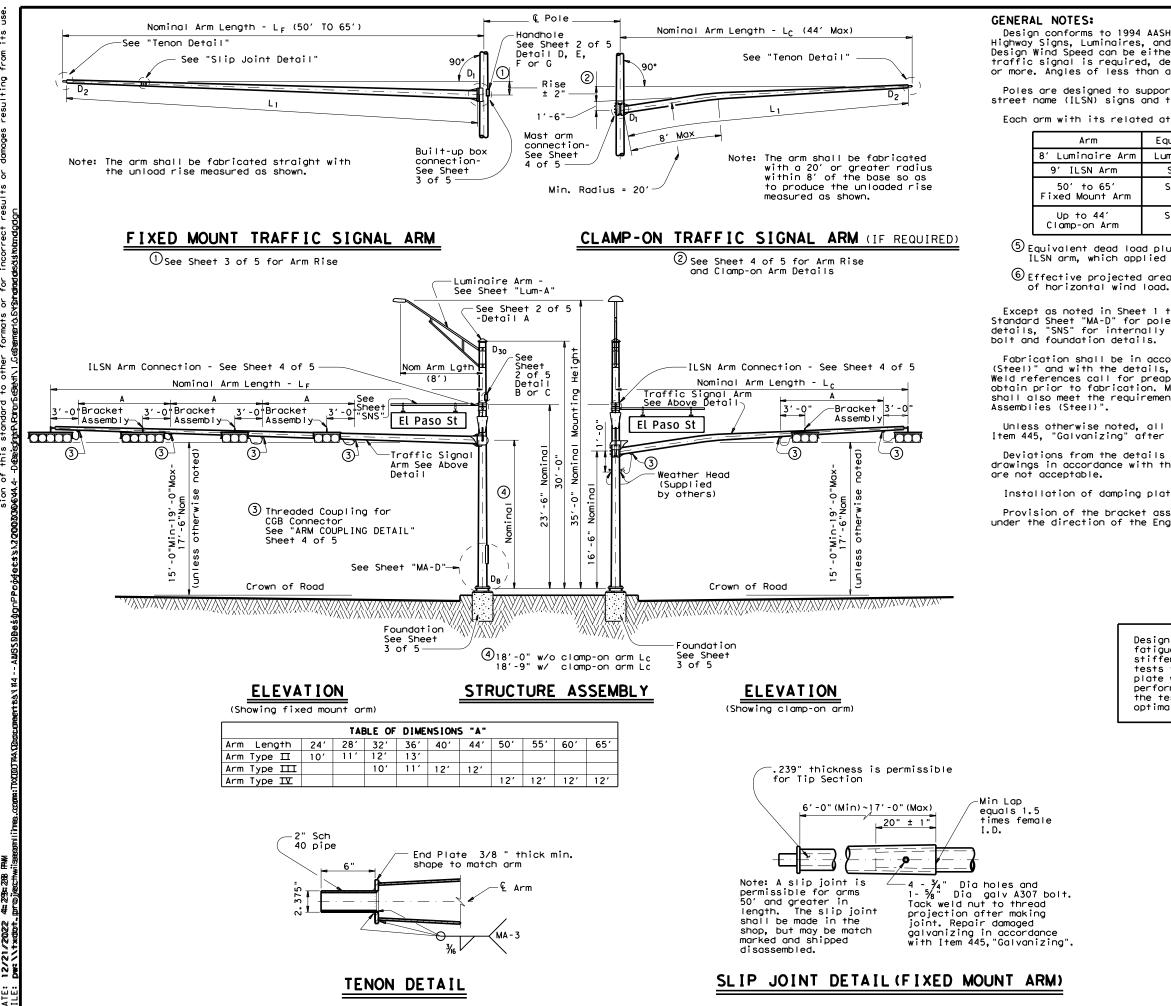

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed can be either 100 mph or 80 mph plus a 1.3 gust factor. If clamp-on traffic signal is required, designs are based on an arm included angle of 90 degrees or more. Angles of less than approximately 75 degrees will require a special design.

Poles are designed to support one 8'-0" luminaire arm, two 9'-0" internally lighted street name (ILSN) signs and two traffic signal arms with limited length combinations.

Each arm with its related attachment is shown below

	Equivalent DL (5)	WL EPA 56
١٢m	Luminaire 60 lbs	1.6 sq ft
	Sign 85 Ibs	11.5 sq ft
ų,	Signal Loads 310 Ibs	52 sq ft
	Signal Loads 180 Ibs	32.4 sq ft

(5) Equivalent dead load plus horizontal wind load applied at the end of arm except ILSN arm, which applied 4.5' from the centerline of the pole.

 ${}^{igodolde{}}$ Effective projected area (actual area times drag coefficient) for the application

Except as noted in Sheet 1 thru 5 of 5, other details not covered shall refer to Standard Sheet "MA-D" for pole details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Material, fabrication tolerances, and shipping practices shall also meet the requirements of this' sheet and Item 686, "Traffic Signal Pole

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing" after fabrication.


Deviations from the details and dimensions shown herein require submission of shop drawings in accordance with the Item 441, "Steel Structures". Alternate designs

Installation of damping plate for the long mast arm is not recommended.

Provision of the bracket assembly used to support the traffic signal heads shall be under the direction of the Engineer for approval.

Design also conforms to NCHRP Report 412 for fatigue resistance except that there are no stiffeners at the base plate. TxDOT is conducting tests to determine if stiffeners at the base plate will or will not result in optimal performance; depending upon the results of the tests, poles may need a retrofit to ensure optimal fatigue performance.

Texas Dep Traffic				nspo	rta	tion
TRAFF SUPPORT LONG MAST (50 (80 AND 100	<b>S1</b> AF TO	RI RM 65	JCTU ASS	RE EME ) ND	SL Z(	ONE)
Sheet 1 of 5						_
C TxDOT July 2000	DN: TX	র্চ্যা	ск: тж9789т	DW: TX	विवि	CK: TXUDONT
REVISIONS 4-20-01	CONT	SECT	JOB		н	IGHWAY
1-12	1200	03	064		FΜ	973
	DIST		COUNTY			SHEET NO.
	-	1			_	
	AUS		TRAV	IS		62

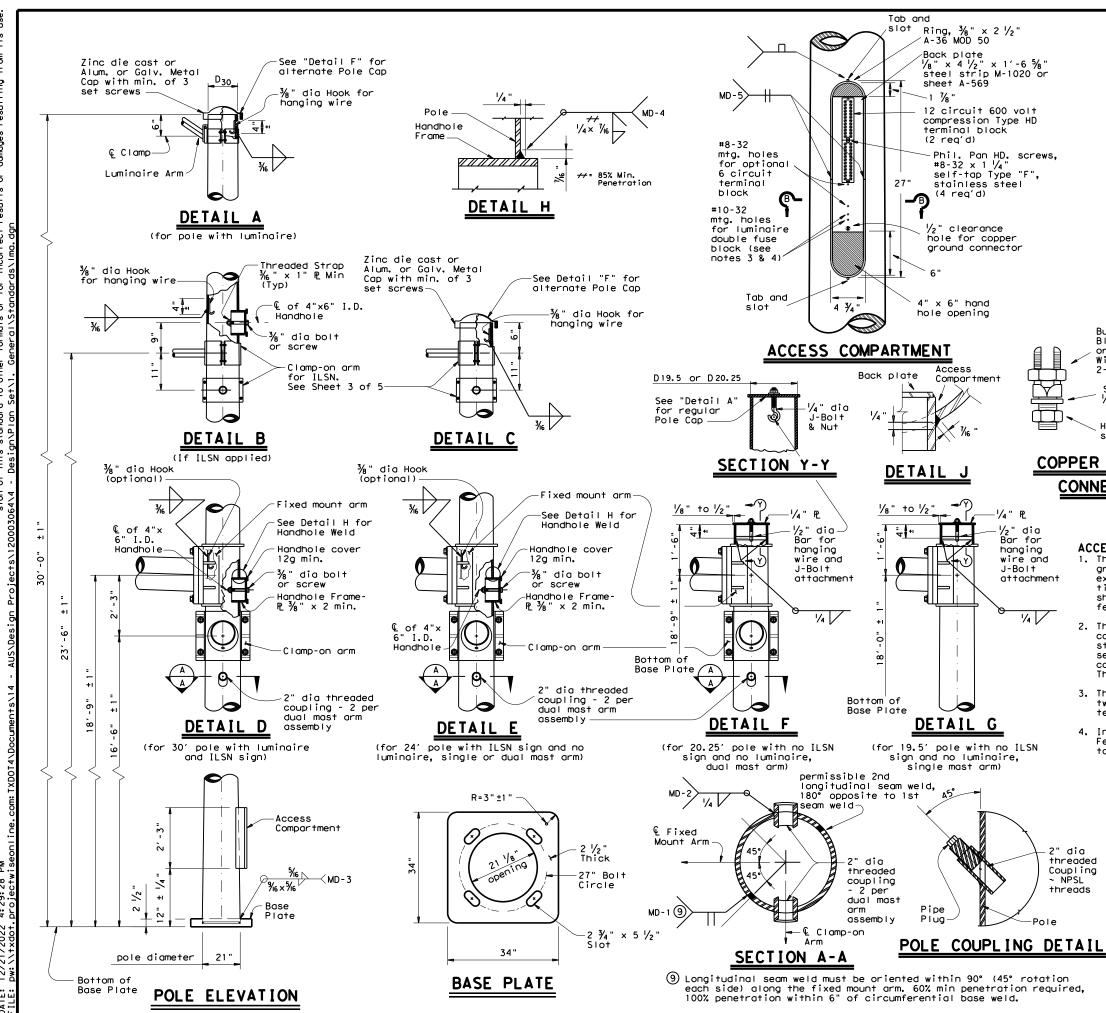


of any conver-its use. tice Act". No warranty responsibility for the damages resulting from assumes no results or y the "Texas Engin whatsoever. TxDOT or for incorrect verned b purpose is go any other 5¢¢ standar TxDOT Indard sto sto of thim adde t The use kind is sion of DISCL

Ξ. 4:29:28 Droiectw 1/2022 12/21 DATE:

	MATERIALS
ound Shafts or olygonal Shafts(7)	ASTM A595 Gr.A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 (8)
Plates 🕧	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325, or A449 except where noted
Pin Bolts	ASTM A325
Pipe7	ASTM A53 Gr.B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

(7) ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F, or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.

(8) ASTM A1011 SS Gr.50 shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.

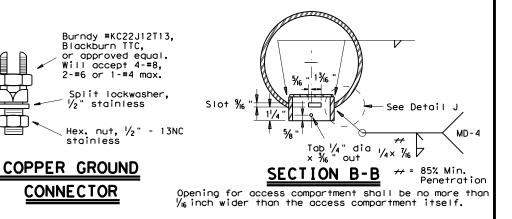

### ACCESS COMPARTMENT NOTES:


The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.

2. The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x  $1 \frac{1}{4}$ " connector (Blackburn TTC, Burndy KC22J12T13, or Ijsco SSS-5). The traffic signal contractor shall install the kit items in the field.

The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.

 Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

Texas Dep Traffic TRAFF SUPPORT LONG MAST	<sup>Operati</sup> IC ST AF	ons L S R R R	Division	AL JR	ES	5
(50 (80 AND 10 Sheet 2 of 5				NC	_	
(80 AND 10		PH	IWI		_	
(80 AND 10 Sheet 2 of 5 © TXDOT July 2000 REVISIONS	0 M	PH	LMA		2)	-12
(80 AND 10 Sheet 2 of 5 ©TxDOT July 2000	<b>O M</b>	<b>PH</b>	LMA CK: ARC		2) TGG	-12 CK: JSY
(80 AND 10 Sheet 2 of 5 © TxD0T July 2000 REVISIONS	DN: JSY CONT	<b>PH</b>	CK: ARC JOB	NC (2	2) TGG	-12 CK: JSY HIGHWAY

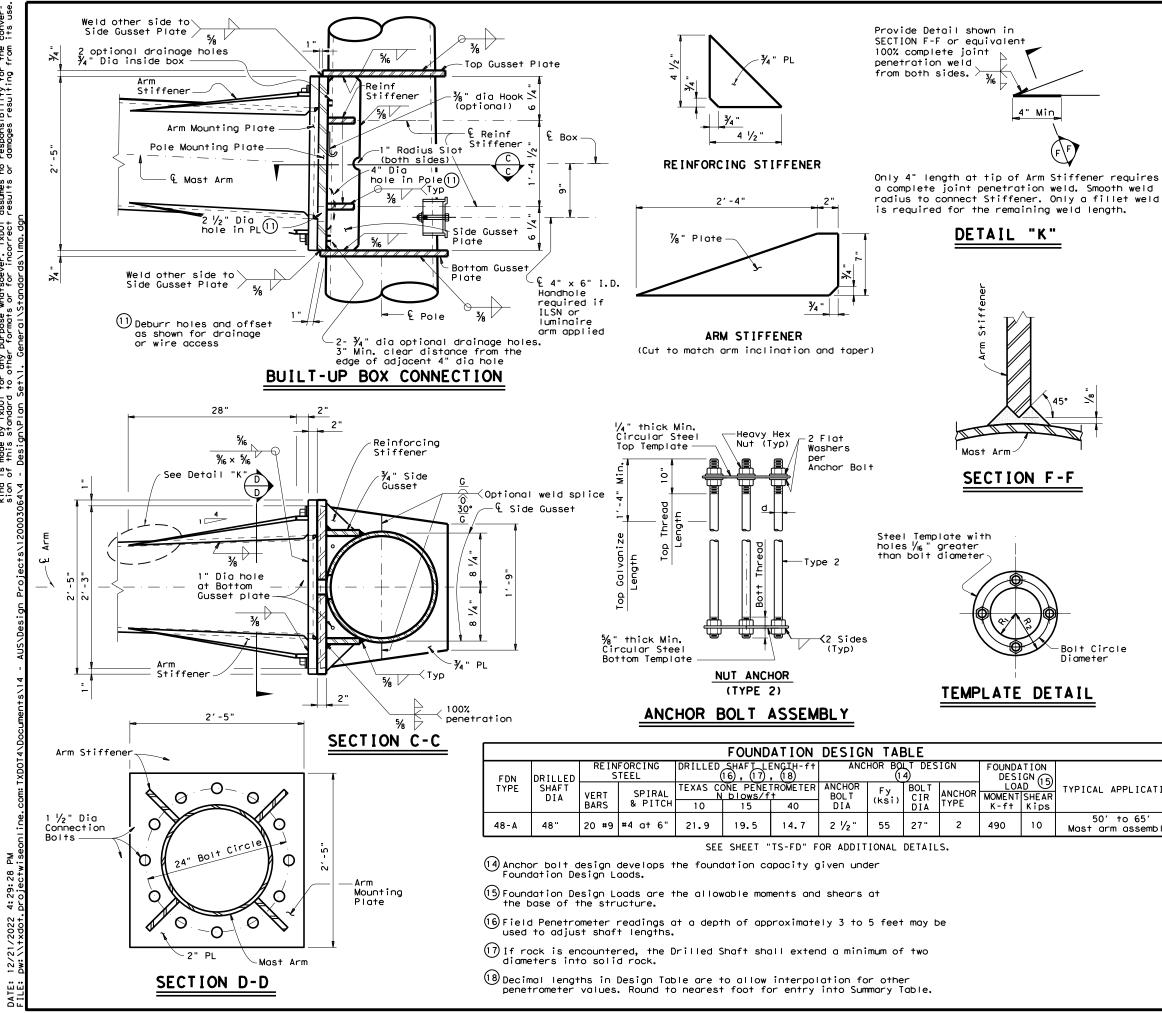

of any conver-its use by the "Texas Engineering Practice Act". No warranty whatseever. TXD01 assumes no responsibility for the s or for incorrect results or damages resulting from overned b purpose is go any other his standard i by TxDOT for standard to o of th made l this The use kind is sion of DISCLAIMER:

	-					
Fixed		ROU	ND POLE	ES (13)		
Mount Arm L F	DB	D19.5 D20.25	D 24	D 30	(12)†hk	Foundation Type
ft.	in.	in.	in.	in.	in.	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
50', 55' 60', 65'	21.0	18.2	17.6	16.8	.3125	48-A

Fixed Mount		F	ROUND ARM	vis (13)	
Arm LF	Lı	Dı	D 2	(12)†nk	<b>D'</b>
ft.	f†.	in.	in.	in.	Rise
50	49	18.5	11.7	.3125	3'- 3"
55	54	18.5	11.0	.3125	3'-7"
60	59	18.5	10.3	.3125	3'-11"
65	64	18.5	9.6	.3125	4' - 4"

= Pole Base O.D. Dв

D<sub>19,5</sub> = Pole Top 0.D. with no Luminaire and no ILSN (single mast arm) D<sub>20,25</sub> = Pole Top 0.D. with no Luminaire

and no ILSN (dual mast arm)

- D24 Pole Top 0.D. with ILSN
- w/out Luminaire = Pole Top O.D. with Luminaire D 30 = Arm Base O.D.
- $D_2$ = Arm End O.D.
- = Shaft Length
- = Fixed Arm Length LF

(12) Thickness shown is minimum, thicker materials may be used.

(13) Shaft profile 16-sided or 18-sided is considered to be equivalent to round section.


### **GENERAL NOTES:**

Built-up Box Connection: For the welded arm-to-pole connection as a build-up box configuration illustrated here is an example only, fabricators are required to submit a shop drawing of box connection for approval. The drawing shall specify the details of each box element, welds of arm-to-pole connection, arm-to-plate socket connection, and arm rise creation. Specify the proper location of drain holes along the pole.  $2 \frac{1}{2}$ " dia hole in the pole mounting plate and 4" dia hole in the pole need to be aligned for wiring access or drainage. Arm stiffeners cut to match arm inclination and toper shall also be included.

The deviation from flat for either arm or pole mounting plate shall not exceed  $\gamma_2$  in , which is measured along the center of mounting plate to a radial distance of 13.5 in. The deformed-from-flat connection between arm and pole mounting plates shall not be allowed if the center of both mounting plates cannot contact directly.

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.

		ANCHOR	BOLT	& TEM	PLATE	SIZE	
	Bolt Dia in.	Length ŧ	Top Thread	Bottom Thread		R2	Rı
	2 1/2 "	5′-2"	10"	6 ½"	27"	16"	11"
PLICATION	†Min d	dimension	given,	longer l	bolts are	e accep	table.
o 65' ossembly.				c Operation	ns Division	-	tion
		LON	IPPOR GMAS (50 ND 1(	T ARI	M ASS 55 FT PH WIN	RES EMBL	ONE)
		LON (80 A Sheet 3 © TXDOT JUI	IPPOR G MAS (50 ND 1( of 5	T ARI T ARI TO E DO MF	RUCTU MASS 55 FT PHWIN LMA	RES EMBL	ONE)
	4-20	LON (80 A Sheet 3 © TxDOT JUI REVIS	IPPOR G MAS (50 ND 1( of 5	T STI T ARI TO E DO MF	RUCTU M ASS 55 FT) PH WIN LMA	RES EMBL ) ND Z( (3) -	ONE ) 12 CK: JSY IGHWAY
	4-20	LON (80 A Sheet 3 © TXDOT JUI REVIS	IPPOR G MAS (50 ND 1( of 5	T ARI T ARI TO E DO MF	RUCTU M ASS 55 FT) PH WIN LMA	RES EMBL ) ND Z( (3) -	ONE ) 12 CK: JSY

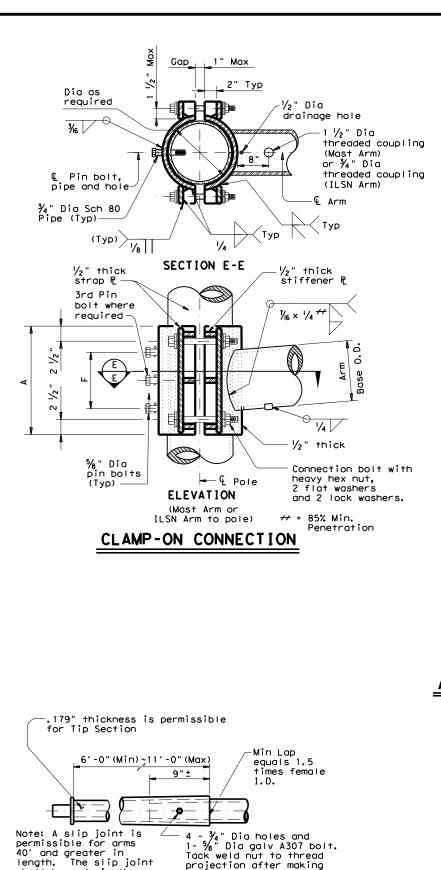

				8	30 MPH W	IND						CLAMP	-ON	ARM	CONNECTIO	NC
lamp-on		ROUND	ARMS				P	OLYGONAL	ARMS		ILSN A	rm Size			4 Conn.	5% " Dia.
ArmLC	Lı	Dı	D 2	+nk (12)	Rise	L	Dı	D <sub>2</sub>	thk (12)	Rise	Sch 40	<b>-</b>	A	F	Bolts	Pin Bolts
ft.	ft.	in.	in.	in.	Rise	ft.	in.	in.	in.	Rise	pipe Di	Thick			Dia	No.
20	19.1	6.5	3.8	.179	1′-9"	19.1	7.0	3.5	.179	1′-8"	in.	in.	in.	in.	in.	ea
24	23.1	7.5	4.3	.179	1′-10"	23.1	7.5	3.5	.179	1′-9"	3	.216	10	4	3⁄4	2
28	27.1	8.0	4.2	.179	1′-11"	27.1	8.0	3.5	.179	1'-10"					4 Conn.	5∕8″ Dia.
32	31.0	9.0	4.7	.179	2′-1"	31.0	9.0	3.5	.179	2'-0"	Mast A	rm Size	Δ	F	Bolts	Pin Bolts
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2′-1"	Base Di	Thick	<b>^</b>	г	Dia	No.
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"	in.	in.	in.	in.	in.	ea
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"	6,5	.179	12	6	1	2
				1	00 MPH 1						7,5	.179	14	8	1	2
											8.0	.179	14	8	1	2
lamp-on		ROUND	ARMS						IAL ARMS				16	10	1	2
Arm LC	Lı	Dı	D 2	+nk (12)	Rise	L	Dı	D <sub>2</sub>	+nk (12)	Rise	9.0	.179			1	
ft.	ft.	in.	in.	in.	N13C	ft.	in.	in.	in.	N13C	9.5	.179	18	12	1 1/4	3
20	19.1	8.0	5.3	.179	1′-8″	19.1	8.0	3.5	.179	1′-7"	9.5	.239	18	12	1 1/4	3
24	23.1	9.0	5.8	.179	1′-9"	23.1	9.0	3.5	.179	1′-8"	10.0	.239	18	12	1 1/4	3
28	27.1	9.5	5.7	.179	1′-10"	27.1	10.0	3.5	.179	1′-9"	10.5	.239	18	12	1 1/4	3
32	31.0	9.5	5.2	.239	1′-11"	31.0	9.5	3.5	.239	1'-10"	11.0	.239	18	12	1 1/4	3
36	35.0	10.0	5.1	.239	2'-0"	35.0	10.0	3.5	.239	1′-11″	11.5	.239	18	12	1 1/4	3
40	39.0	10.5	5.1	.239	2'-3"	39.0	11.0	3.5	.239	2'-1"						


				8	30 MPH W	IND						CLAMP	-ON	ARM	CONNECTI	ON
Clamp-on		ROUND	ARMS				P	OLYGONAL	ARMS		ILSN Arr	n Size			4 Conn.	5%∥ Dia.
Arm LC	Lı	Dı	D 2	+nk (12)	Rise	L	Dı	D <sub>2</sub>	thk (12)	Rise	Sch 40	This	<b>A</b>	F	Bolts	Pin Bolts
ft.	ft.	in.	in.	in.	Rise	f†.	in.	in.	in.	Rise	pipe Dia	Thick			Dia	No.
20	19.1	6.5	3.8	.179	1′-9"	19.1	7.0	3.5	.179	1′-8"	in.	in.	in.	in.	in.	ea
24	23.1	7.5	4.3	.179	1′-10"	23.1	7.5	3.5	.179	1′-9"	3	.216	10	4	3⁄4	2
28	27.1	8.0	4.2	.179	1′-11"	27.1	8.0	3.5	.179	1′-10"			1	1	4 6	5/ " D'-
32	31.0	9.0	4.7	.179	2′-1″	31.0	9.0	3.5	.179	2'-0"	Mast Arr	n Size		F	4 Conn. Bolts	%" Dia. Pin Bolts
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2′-1"	Base Dia	Thick	A	- F	Dia	No.
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"	in.	in.	in.	in.	in.	ea
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"	6.5	.179	12	6	1	2
				1	00 MPH						7.5	.179	14	8	1	2
											8.0	.179	14	8	1	2
Clamp-on		ROUND					-		NAL ARMS			.179	16	10	1	2
Arm LC	Lı	Dı	D2	+nk(12)	Rise	L,	Dı	D <sub>2</sub>	+nk (12)	Rise	9.0				1 1/4	
ft.	ft.	in.	in.	in.		ft.	in.	in.	in.		9.5	.179	18	12		3
20	19.1	8.0	5.3	.179	1′-8″	19.1	8.0	3.5	.179	1′-7"	9,5	.239	18	12	1 1/4	3
24	23.1	9.0	5.8	.179	1′-9"	23.1	9.0	3.5	.179	1′-8"	10.0	.239	18	12	1 1/4	3
28	27.1	9.5	5.7	.179	1′-10"	27.1	10.0	3.5	.179	1′-9"	10.5	.239	18	12	1 1/4	3
32	31.0	9.5	5.2	.239	1'-11"	31.0	9.5	3.5	.239	1′-10"	11.0	.239	18	12	1 1/4	3
36	35.0	10.0	5.1	.239	2'-0"	35.0	10.0	3.5	.239	1′-11″	11.5	.239	18	12	1 1/4	3
40	39.0	10.5	5.1	.239	2'-3"	39.0	11.0	3.5	.239	2'-1"						
44	43.0	11.0	5.1	.239	2'-8"	43.0	11.5	4.0	.239	2'-3"						

D1 = Arm Base O.D.


D<sub>2</sub> = Arm End O.D. L<sub>1</sub> = Shaft Length

LC = Clamp-on Arm Length

(12) Thickness shown is minimum, thicker materials may be used.



# ARM COUPLING DETAIL



# ILSN ARM COUPLING DETAIL

Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with

# BRACKET ASSEMBLY

MA-1(19) ARM WELD DETAIL

(19) Longitudinal Seam Weld must be oriented within the lower 90° of the signal arm. 60% Min penetration 100% penetration within 6" of circumferential base welds.


galvanizing in accordance with Item 445, "Galvanizing". shop, but may be match SLIP JOINT DETAIL (CLAMP-ON ARM)

shall be made in the

marked and shipped disassembled.

projection after making joint. Repair damaged

1 1/2" Dia Threaded Coupling.



## **GENERAL NOTES:**

Clamp-on details are used for the second arm on dual mast arm assemblies or ILSN arm support. For a clamp-on mast arm, a maximum 1  $\frac{1}{2}$  wide vertical slotted hole may be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1". For an ILSN arm, a 1  $\frac{1}{2}$ " diameter hole shall be cut in the front clamp plate for wire access. A matched hole shall be field drilled through the pole to provide wire access after arm is oriented. Deburr both holes.

Where duplicate parts occur on a detail, welds shown for part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces. Pin bolts shall be ASTM A325 with threads excluded from the shear plane. Pin bolt and  $\frac{3}{4}$ " diameter pipe shall have  $\frac{3}{16}$ " diameter holes for a  $\frac{1}{8}$ " diameter galvanized cotter pin. Back clamp plate shall be furnished with a  $\frac{3}{16}$ " diameter hole for each pin bolt. An  $\frac{1}{16}$ " diameter a  $\frac{1}{4}$ " diameter hole for each pin bolt. An  $\frac{1}{16}$  " diameter hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.

LONG MAS	T ARI	65 F1	SEME	BLY
(80 AND 1) Sheet 4 of 5	DO MF			-12
	DN: JK			-12
Sheet 4 of 5	DN: JK	LM	A (4)	-12
Sheet 4 of 5 © TxDOT November 2000 REVISIONS	DN: JK		A ( 4 )	-12
Sheet 4 of 5 © TxDOT November 2000 4-20-01	DN: JK CONT SE		A ( 4 ) DW: FDN 3 4	CK: CAL

			Shippin	ng Parts	s List			
			following attack	ned: en l	arged han		e cap, fixed arm co	onnection
Dolt: Nomi:			ny additional ha ith Luminaire		4' Poles w		19.50' (Si	ngle Mast Arm)
Arm			e plus: one (or		ee note ab			ual Mast Arm)
Leng	th		ttached) small		ne small h		Poles with no Lumi	
- 0y			omp-on simplex				See note	
			<u> </u>	e Mast /	\rm			
Lff	t.	Designation	Quantity		gnation	Quantity	Designation	Quantity
50	-	50L			0S		50	
55		55L		5	55		55	
60		60L		6	05		60	
65		65L		6	55		65	
			Dual	Mast Ar	'n			
Lf	LC							
ft.	ft.	Designation	Quantity	Desi	gnation	Quantity	Designation	Quantity
50	20	5020L			0205		5020	
	24	5024L			0245		5024	
	28	5028L		5	0285		5028	
	32	5032L			0325		5032	
	36	5036L			0365		5036	
	40	5040L		5	0405		5040	
	44	5044L			0445		5044	
55	20	5520L		5	5205		5520	
	24	5524L			5245		5524	
	28	5528L			5285		5528	
	32	5532L		5	5325		5532	
	36	5536L			5365		5536	
	40	5540L			5405		5540	
	44	5544L			544S		5544	
60	20	6020L			0205		6020	
	24	6024L			024S		6024	
	28	6028L			0285		6028	
	32	6032L			0325		6032	
	36	6036L			0365		6036	
	40	6040L			0405		6040	
	44	6044L			0445	1	6044	
65	20	6520L			5205		6520	
	24	6524L			5245		6524	
	28	6528L			5285		6528	
	32	6532L			5325		6532	
	36	6536L			5365		6536	
	40	6540L			540S		6540	
	44	6544L		<u> </u>	5445		6544	
Foun		n Summary Table		<b>N</b> 1	Det est	<b>() , , , , , , , , , , , , , , , , , , ,</b>	Notoo	
		Location Ideat	Avg. N	No.	Drill Sho		Notes	
		ident.	Blow/ft.	Eoch	Length (			·
				1	48-	<b>\</b>		ions may be listed
		POLE B	10	1	22			ped according to s
							and typ	e. Quantities are

	ignal Arms (Fixed ) arm with listed			Luminaire /	Arms (1	per 30' pole)
lominal	Type IV Arm (4		]	Nominal Arr		Quantity
rm	3 Brocket As		1	8' Arm	-	1
ength	and 4 CGB Ca					
t,	Designation	Quantity	-	ILSN Arm	(Max, 2 per pol	e) Ship with
)	501V		-		clamps, bolts	
5	551V		-	Nominal A		Quantity
0	601V			7' Arm	3	
5	651V			9' Arm		
roffic S					with listed equip	
	Type I Arm (1		Type II Arm ()		Type III Arm	
Nominal	2 CGB connector	•	1 Brocket Asser		2 Brocket Assem	
Arm .ength	w/bolts and	washers	CGB connectors, w/bolts and		CGB connectors, w/bolts and	
ft.	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	201-80					
24	241-80		2411-80			
28	281-80		2811-80			
32			3211-80		32111-80	
36			3611-80		36111-80	
40					40111-80	
4					44111-80	
lominal .rm	2 CGB connector w/bolts and	-	1 Bracket Asser CGB connectors,	•	2 Bracket Asse CGB connectors	•
ft.	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	201-100					
24	241-100		2411-100			
28	281-100		2811-100			
32			3211-100		32111-100	
36			3611-100		36111-100	
40					40111-100	
14					44111-100	1
Anchor Bo Anchor Bolt	Anchor Bolt	(1 per pole)	and bottom to	•	onsists of the fol nor bolts, 8 nuts, vices (type 2)	•
Diameter	Length	Quantity		Drawing "TS-FD"	• •	
2 1/2 "	5' - 3"	1		y be removed for		
	MURCHISON STI	REET			-	
JIJAI I	Abbr	reviations				
	Lf=	Fixed Arm	•		Taxas	Department of T
ion	LC=	Clamp-on /				nffic Operations Division
r's		Length (4	4' Mox.)		_	ONG MAST
W			A CONTRACT OF THE OWNER	₽ <sup>°°</sup> .		
				DJ. ALI		M ASSEMBI

Location Ident.	Avg. N Blow/ft.	No. Each	Drill Shaft *** Length (feet) 48-A
POLE B	10	1	22
Total Drill	Shaft Length		22


- be listed separately ding to similarity of loca tities are for the Contract information only.
- \*\*\* Decimal lengths in Design Table are to all interpolation for other penetrometer values. Round to nearest foot for entry into Summary Toble.






ARM ASSEMBLY PARTS LIST

Sheet 5 of 5			LMA	(!	5)-	12
© TxDOT November 2000	DN: JK		CK: GRB	DW:	FDN	CK: CAL
REVISIONS 4-20-01	CONT SECT JOB			HIGHWAY		
1-12	1200	03	064		F١	/ 973
	DIST		COUNTY	OUNTY		SHEET NO.
	AUS		TRAVI	S		66
131E						

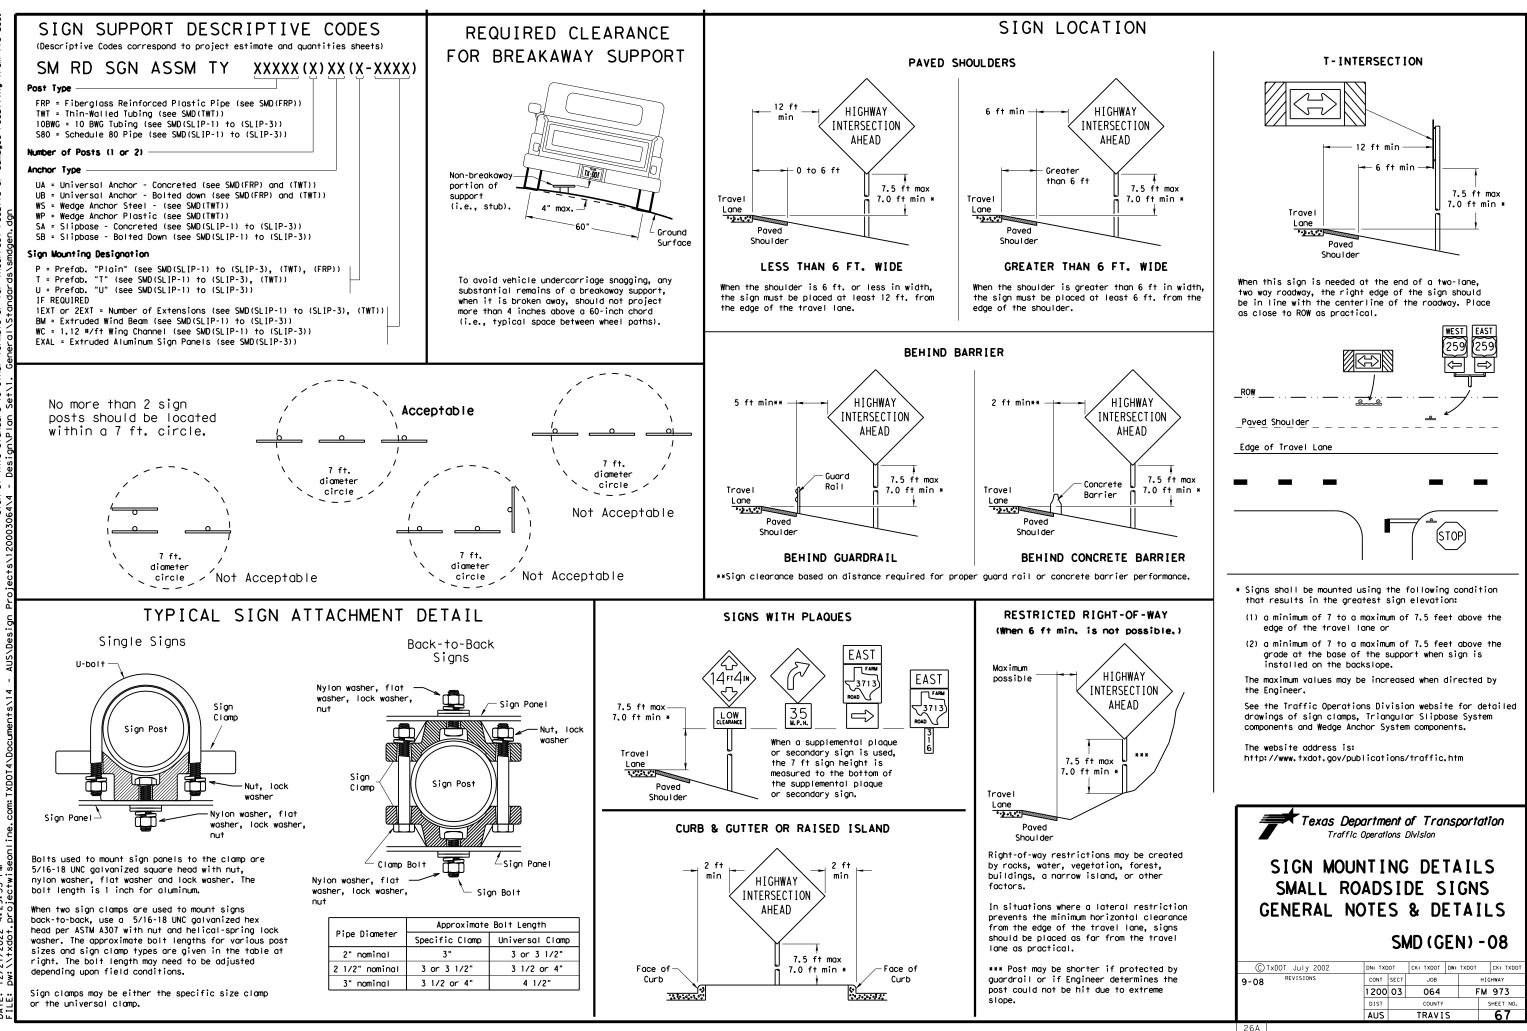



## GENERAL NOTES:

- 1. Details show a typical warning sign with two flashing beacon heads, other arrangements are possible. When only one beacon is required, install the upper beacon.
- 2. See Item 685, "Roadside Flashing Beacon Assemblies" for further requirements.
- 3. See SMD standard sheets for lateral and vertical clearances and sign mounting details. Install signs as shown on the sign layout sheets.
- 4. Use either a Screw-In Type Anchor Foundation or a Drilled Shaft Foundation as shown elsewhere in the plans. When plans require a Drilled Shaft Foundation, see standard sheet TS-FD. Install the Screw-In Type Anchor Foundation as per manufacturer's recommendations. On a slope, install one edge at ground level. Screw-In/Drilled Shaft Foundation is subsidiary to Item 685. Installation of a ground rod is not required for solar powered flashing beacon assemblies.
- 5. When used, provide Screw-In Type Anchor Foundations as shown on TxDOT's Material Producer List (MPL) in the file "Highway Traffic Signals".
- 6. Use materials specifically designed for attaching cabinets, beacon heads, solar panels, etc., to poles.
- 7. Install beacon heads as shown here, as shown elsewhere on the plans, or as directed. Use hardware specifically designed for mounting beacon heads on poles.
- Conduit in foundation and within 6 in. of foundation is subsidiary to the Item 685, "Roadside Flashing Beacon Assemblies."
- 9. Per manufacturer's recommendations, engage all threads on the pedestal pole base and pipe unless the pipe is fully seated into base. In high winds, use a pole and base collar assembly to add strength and prevent loosening on connection.
- Provide single pole non-fused watertight breakaway electrical connectors for frangible pedestal pole bases, as shown on TxDOT's MPL in the file "Roadway Illumination and Electrical Supplies." Approved models are listed under Item 685. For ungrounded (hot) conductors, install a breakaway connector with a dummy fuse slug). For grounded (neutral) conductors, install a breakaway connector with a white colored marking and a permanently installed dummy fuse (slug).
- 11. Install the batteries in a battery box. Place the batteries on a % " thick plastic sheet and connect together. Place a plastic cover (battery bell jar) over the top of each battery and secure the battery bell jar to the battery with a strap. The batteries, bell jars, straps and  $\frac{3}{16}$ plastic sheet are subsidiary to the Item 685, "Roadside Flashing Beacon Assemblies." When required, install batteries in the flasher cabinet. Wire batteries according to manufacturers recommendations. Provide the number of batteries as required by the manufacturer.
- 12. See standard sheet Electrical Details (ED) for additional requirements regarding the installation of ground boxes/battery boxes, conduit, and cabinets.
- 13. Provide clearance as shown above the sidewalk or pavement grade at the edge of the road. When a bottom beacon is not used, mount the bottom of the sign at least 7 ft, above the sidewalk or pavement grade at the edge of the road.
- 14. Unless otherwise shown on the plans, pole shaft shall be one piece, Schedule 40 Aluminum pipe, ASTM B429 or B221 (Alloy 6061-T6 only). Aluminum conduit will not develop the necessary strength and will not be allowed.
- 15. Orient solar panel for optimum exposure to sunlight (face to the south). Prior to installation, check the location to ensure there is no overhead obstruction that would block the solar panel from receiving full sunlight. Unless specified elsewhere, mount a minimum of 14' above grade.
- 16. Ensure height of conduit is below top of anchor bolts.

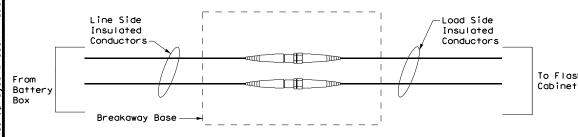


NON-FUSED BREAKAWAY ELECTRICAL CONNECTORS

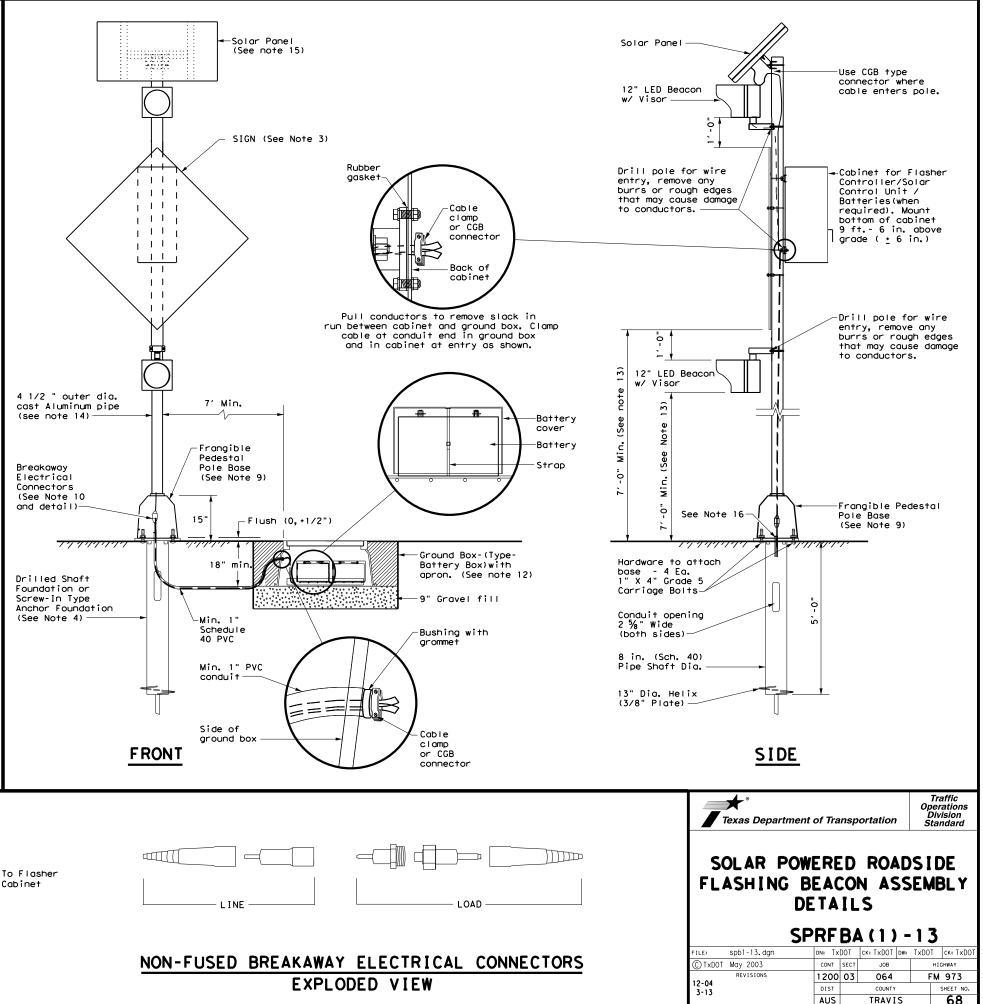

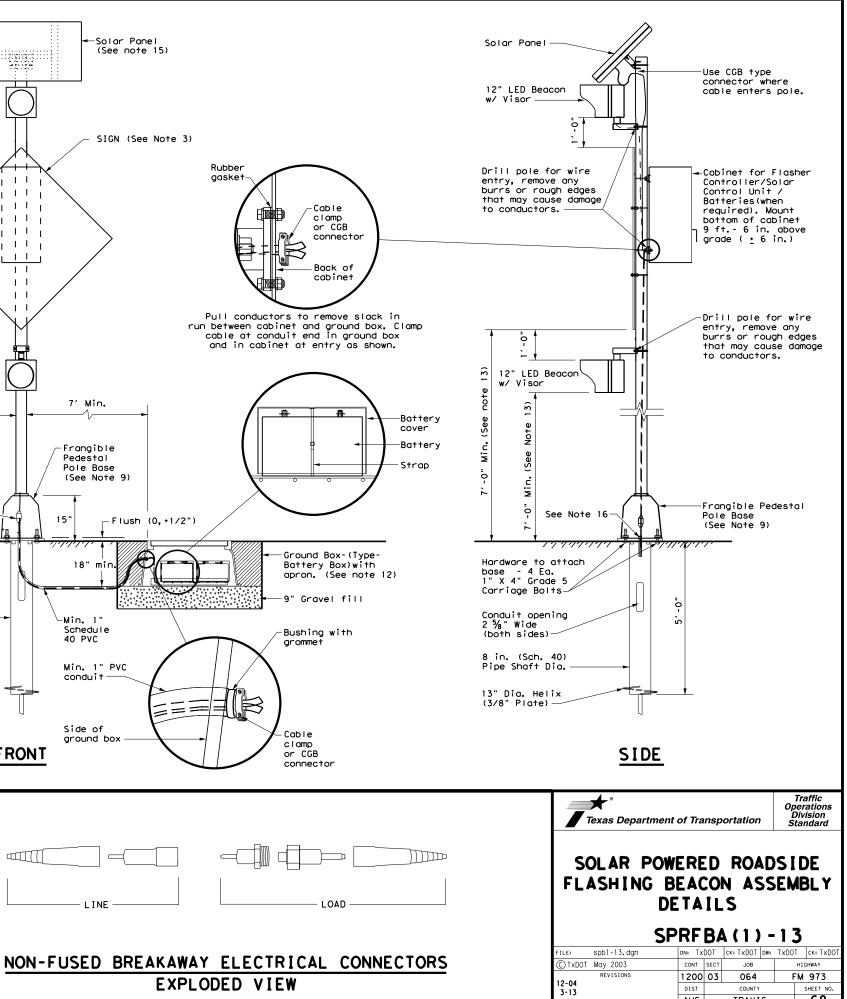

4:29:3

2022

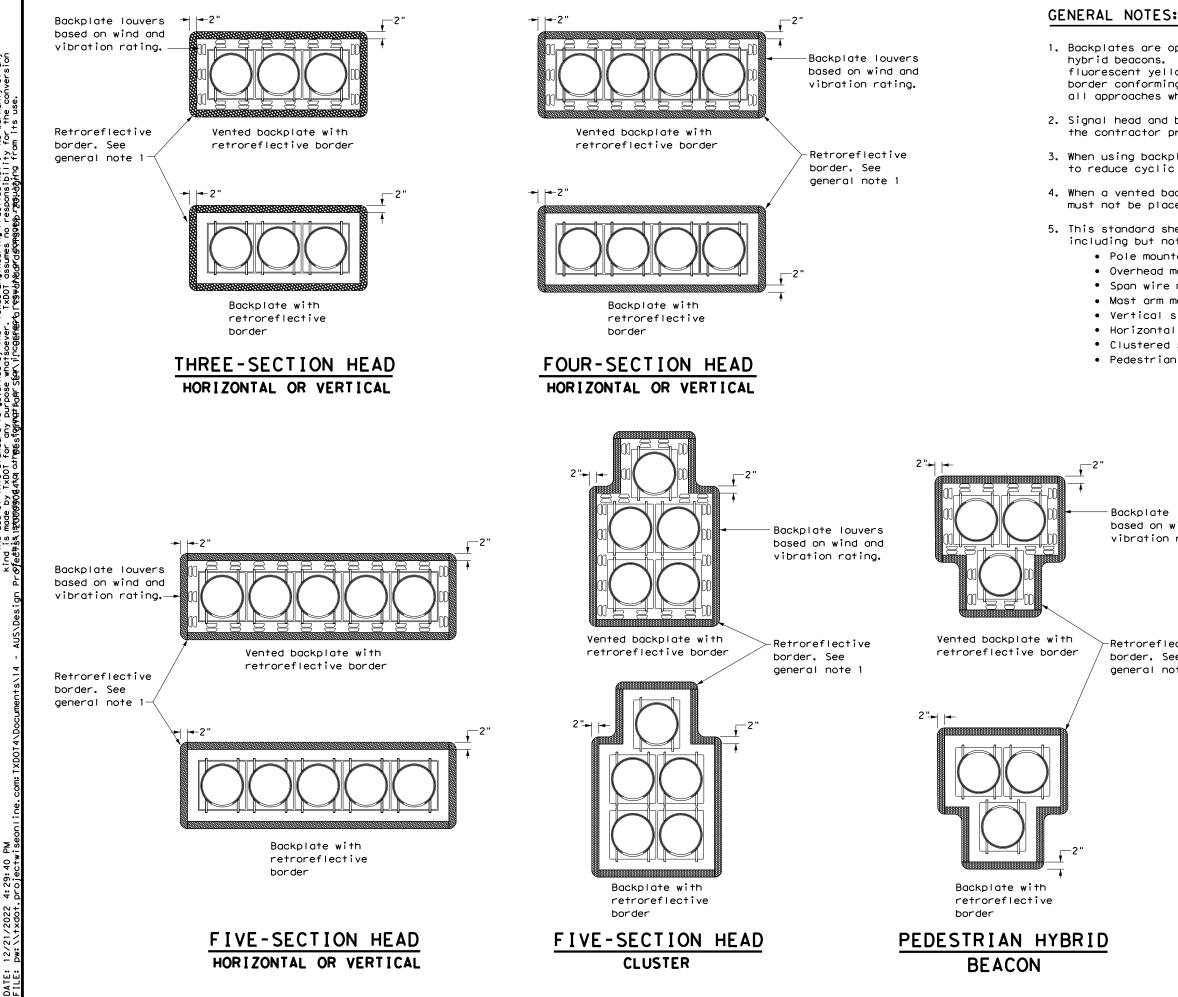


1. Backplates are optional for traffic signals and pedestrian hybrid beacons. When backplates are used, a 2-inch wide fluorescent yellow AASHTO Type B<sub>FL</sub> or C<sub>FL</sub> retroreflective border conforming to TxDOT DMS-8300 is required. Place on all approaches when used. 2. Signal head and backplate compatability must be verified by the contractor prior to installation. 3. When using backplates on signal heads, venting is preferred to reduce cyclic vibration stress. 4. When a vented backplate is used, the retroreflective border must not be placed over the louvers. 5. This standard sheet applies to all signal heads with backplates, including but not limited to: • Pole mounted • Overhead mounted • Span wire mounted • Mast arm mounted • Vertical signal heads • Horizontal signal heads • Clustered signal heads • Pedestrian hybrid beacons

> Backplate louvers based on wind and vibration rating.

Retroreflective border. See general note 1

Texas Department	of Tra	nsp	ortation	Ċ	Traffic Safety Division tandard					
TRAFFIC SIGNAL										
HEA BAC	_		-							
TS-										
FILE: ts-bp-20.dgn		DOT	CK: TXDOT DW:	TxDO	T ск: TxDOT					
© TxDOT June 2020	CONT	SECT	JOB		HIGHWAY					
REVISIONS	1200	03	064	F	M 973					
	DIST		COUNTY		SHEET NO.					
	AUS		TRAVIS		69					
134										

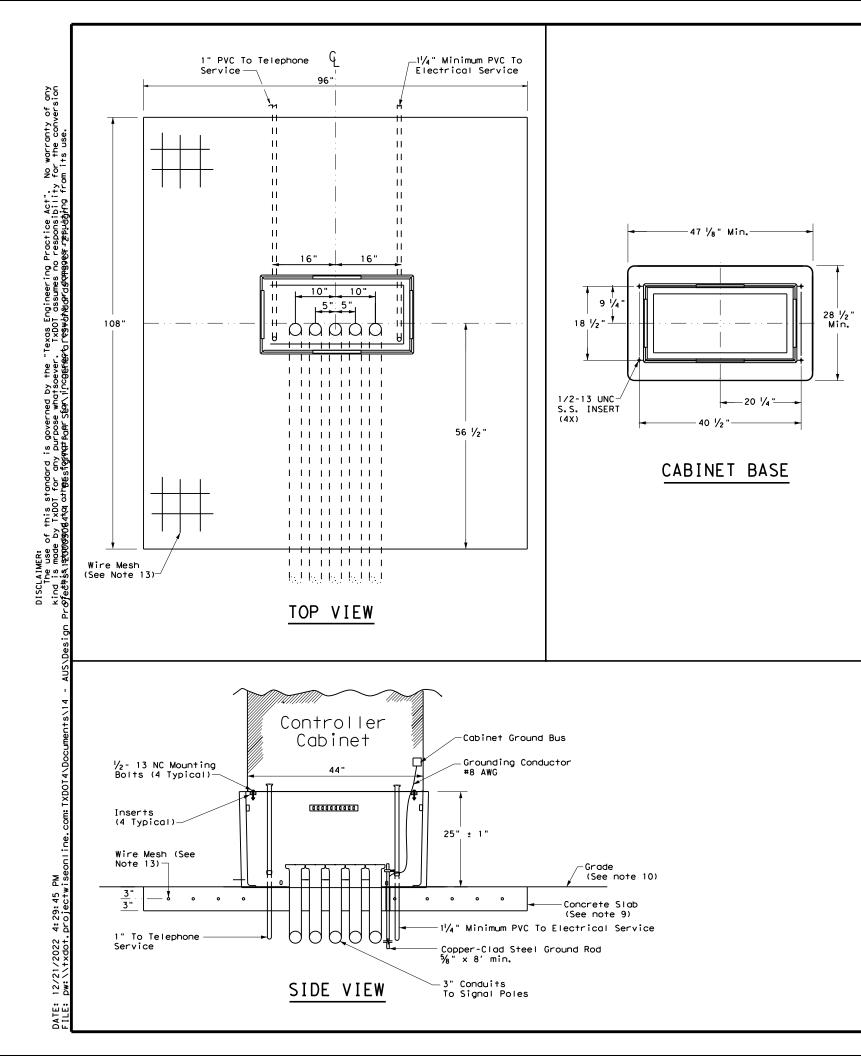

# TRAFFIC SIGNAL CONTROLLER BASE:

- 1. Traffic Safety Division.
- 2. (psi), minimum flexural strength of 3600 psi, and minimum shear strength of 3600 psi.
- 3. The polymer concrete cabinet base must conform to the dimensions shown and must accommodate a standard TxDOT basemount cabinet.
- Provide the cabinet base with 4 cable racks mounted one on each side of the base 2" to 7 " from the top 5. 1#2"-13 UNC stainless steel screws and inserts.
- 6. The cabinet base, when secured to the concrete slab with controller cabinet attached, must withstand a
- 7. The traffic signal base must be permanently marked either by impress or by permanent ink with the manufacturer's model number and name or logo.
- 8. Seal the base to the concrete with a silicone caulk bead and fastened to the slab per manufacturer's instructions.

## CONCRETE SLAB:

- 9. Traffic signal controller pad must be a portland cement concrete slab poured in place, must conform to the dimensions shown, and must be level.
- Grade earthwork such that it is flush with the concrete pad on all four sides, unless otherwise shown on the 10. contour to match plans.
- 11.
- 12. Install a PVC sleeve to prevent the ground rod from direct embedment in the slab.
- 13. Provide welded wire mesh 6X6-W2.9 X W2.9 for reinforcement. Provide joints and splices in the mesh with a
- 14. Provide Class B concrete minimum for the slab in accordance with Item 421. Construct the slab in accordance with Item 531.

### CONDUITS:

- 15. Terminate the conduits with a bushing between 2 and 4-inches above the slab.
- Extend conduits for future use at least 18-inches from the edge of the slab, terminate underground with a coupling, and cap and seal so that the seal can be removed without damaging the coupling. This must also apply to unused telephone conduit. 16.
- 17. Stub up two separate conduits through the slab from the electrical and telephone services. Run the conduit for the circumstance share a conduit with any other function.
- 18. substitute.

## CONTROLLER CABINET:

- 19. Anchor the controller cabinet to the base using
- 20. The silicone caulk bead specified in Item 680.3

## PAYMENT:

21. Bid TS-CF as subsidiary to Item 680.

Provide a traffic signal controller base (cabinet base) manufactured of polymer concrete material consisting of calcareous and siliceous stone; glass fibers and thermoset polyester resin. The polymer concrete cabinet base must be reinforced on the inside of the cabinet base with fiberglass matting. Provide one of the following bases: Armorcast Part # A6001848X24, Quazite Model # PG3048Z709, or other as approved by TxDOT

The polymer concrete material must have a minimum compressive strength of 10,300 pounds per square inch

4. Supply the cabinet base with four 1#2"-13 UNC stainless steel inserts for attachment of the cabinet to the base. Inserts must withstand a minimum torque of 50 ft-1b and a minimum straight pull out strength of 750 lbs.

edge of the base. Unless approved otherwise, cable racks must be 1-1/2 x 9#16x 3#16inch steel channel with eight T-slots spaced at 1-1/2 inches. The cable racks must easily accommodate the insertion of tie wraps to attach field wiring to the racks to serve as strain relief. Secure cable racks to the base using

minimum wind load of 125 mph or a 850 lb force applied at 49" above the bottom of the base without causing the base or cabinet to come out of their anchored position or cause any permanent deformation. The monufacturer must supply certification by an independent testing laboratory or sealed by a Texas Licensed Professional Engineer. Provide the cabinet base with hardware for attachment to a concrete slab.

plans. Subsidiary to ITEM 680, four inch rip rap may be used in lieu of earthwork. Slopes shall gradually

Bond a #8 AWG copper ground wire and an 8 ft ground rod bonded to the reinforcing mesh by a suitable UL Listed clamp and terminated to the cabinet grounding bus for the purpose of providing a local ground for the electrical grounding conductor. The electrical grounding conductor specified in Item 680-3.A.4 is required and must be terminated to the cabinet ground bus.


minimum 6-inch overlap. Center the mesh between top and bottom and provide a minimum 3 inch cover on the edges.

Stub up and run 3-inch conduits through the slab to the various traffic signal poles and ground boxes as shown on the layouts. Install the number of conduits as shown on layouts plus two additional 3 inch conduits for future

electrical feed directly to the electrical service enclosure. Run the conduit for the telephone line directly to the telephone service, usually located on the same pole as the electrical service. Telephone must not under any

Terminate electric and telephone conduits above the slab with a coupling. After the base is installed, extend the conduits above the top of the base and secure to the base using a steel one-hole strap or similar suitable

3. B must be RTV 133.	nent of Trans	sportation	Traffic Safety Division Standard
TRAI	FFIC	SIGNA	NI
CONTRO BAS	DLLER SE AN	CABI D PAD	NET
CONTRO BAS	DLLER	CABI D PAD	NET )
CONTRO BAS	DLLER SE AN TS-CF	CABI D PAD - 21	NET )
FILE: ts-cf-21.dgn CTxD0T October 2000 REVISIONS	DLLER SE AN TS-CF	CABI D PAD -21 CK: DW: JOB	
FILE: ts-cf-21.dgn © TXDOT October 2000	DLLER SE AN TS-CF	CABI D PAD -21 CK: DW: JOB	. ПЕТ . ск: нісникач

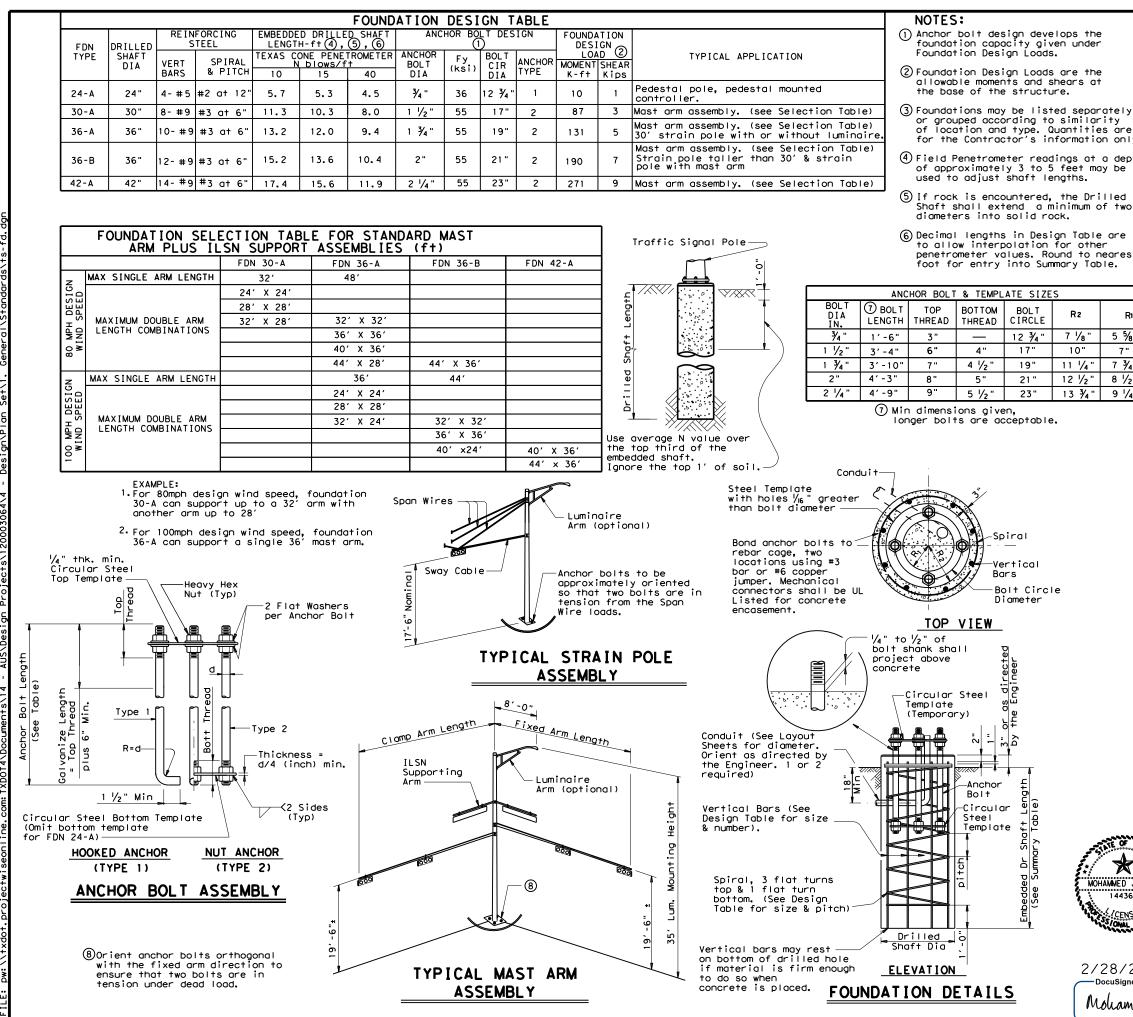

DATE: 2/28/2023 2:16:25 PM FILE: nur.\\+vdo+ nroiger+witeenoline com:T

	FO	JNDA	TION	I SU	IMMAR	Y TA	BLE	3	
	LOCATION IDENTIFICATION	AVG. N Blow	FDN TYPE	NO.	C	RILLED	SHAFT (FEET)	LENGTH	6
	IDENTIFICATION	/ft.	TTPE	EA	24-A	30-A	36-A	36-B	42-A
	POLE A	10	36-A	1			13.2		
	POLE C	10	30-A	1		11.3			
	POLE D	10	24-A	1	5.7				
у.	POLE E	10	24-A	1	5.7				
	POLE F	10	24-A	1	5.7				
oth									
+									
۱ I									
, "									
."									
4"									
_									
	TOTAL DRILLED S	SHAF T	LENGT	нs	17.1	11.3	13.2		

FM973 AT MURCHISON STREET

### GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals and interim revisions thereto.

Reinforcing steel shall conform to Item 440, "Reinforcing Steel".


Concrete shall be Class "C".

Threads for anchor bolts and nuts shall be rolled or cut threads of 8UN series up to 2" in diameter or UNC series for all sizes. Bolts and nuts shall have Class 2A and 2B fit tolerances. Galvanized nuts shall be tapped after galvanizing.

Anchor bolts that are larger than 1" in diameter shall conform to "alloy steel" or "medium-strength mild steel" per Item 449, "Anchor Bolts". Anchor bolts that are 1" in diameter or less shall conform to ASTM A36. Galvanize a minimum of the top end thread length plus 6" for all anchor bolts unless otherwise noted. Exposed washers and exposed nuts shall be galvanized. All galvanizing shall be in accordance with Item 445, "Galvanizing".

Templates and embedded nuts need not be galvanized. Lubricate and tighten anchor bolts when erecting the structure in accordance with Item 449, "Anchor Bolts".

Constant and			of Trop ntions Divisi		tion	
4367 ENSS	TRAFFIC SIGNAL POLE FOUNDATION					
			TS-	FD-	12	
/2023	© TxDOT August 1995	DN: MS	CK: JSY	DW: MAO/MM	CK: JSY/TEB	
igned by:	REVISIONS 5-96 11-99	CONT SE	CT JOB		HIGHWAY	
· · ·	11-99 1-12	1200 0	3 064	F	M 973	
ummed Ali		DIST	COUNTY	·	SHEET NO.	
mmca nu		AUS	TRAVI	S	71	

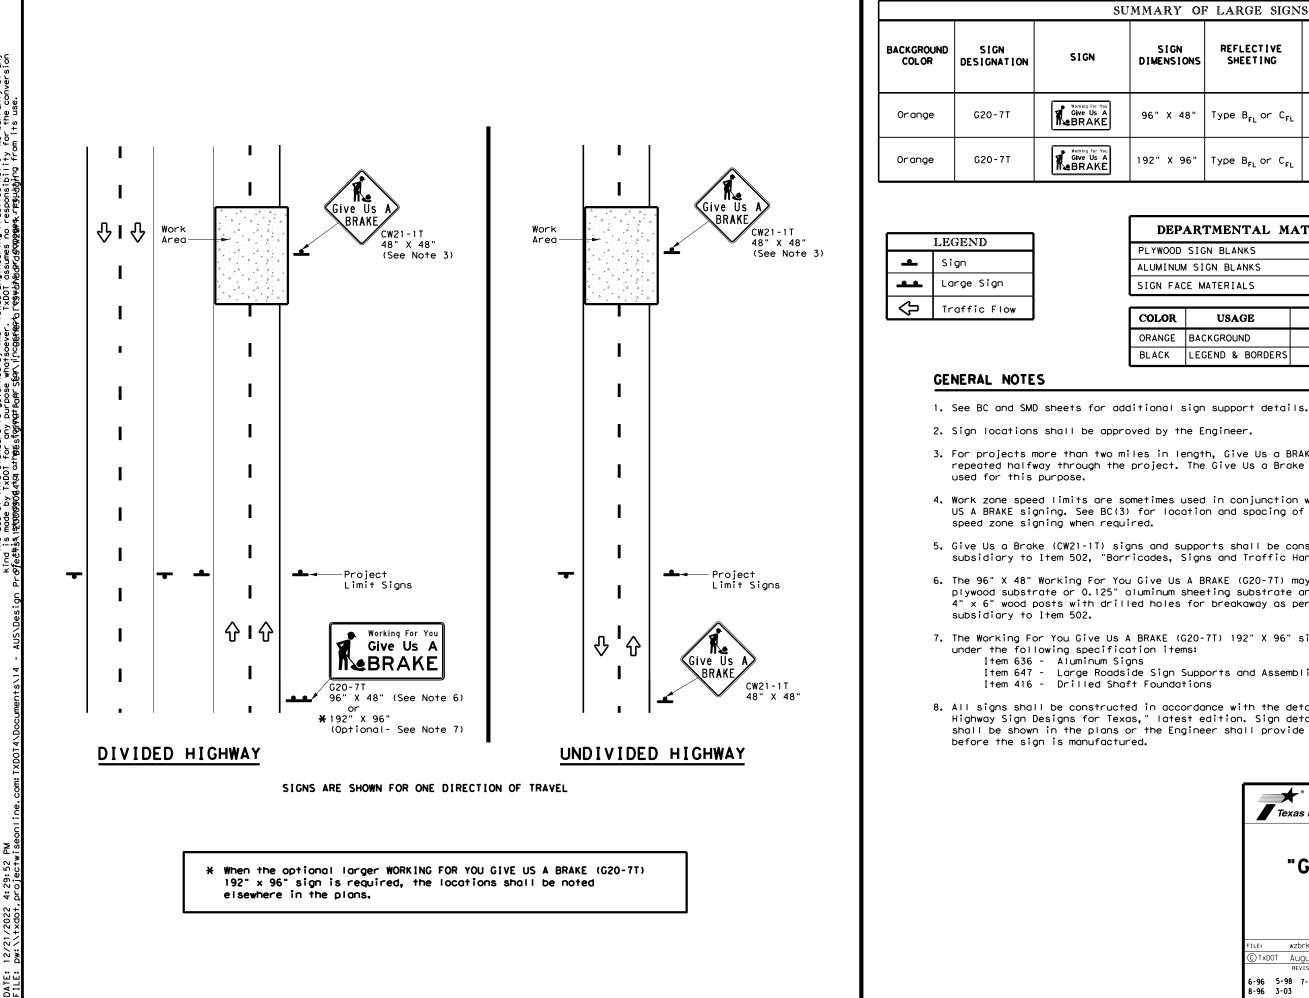

U	UMMARY OF LARGE SIGNS									
	SIGN DIMENSIONS	REFLECTIVE SHEETING			NIZE TURA EEL	-	DRILLED SHAFT			
	DIMENSIONS	51221110		Size	ы С	F) @	24" DIA. (LF)			
	96" X 48"	Type B <sub>FL</sub> or C <sub>FL</sub>	32				•			
	192" X 96"	Type B <sub>FL</sub> or C <sub>FL</sub>	128	W8×18	16	17	12			

▲ See Note 6 Below

DEPARTMENTAL MATERIAL SPEC	IFICATIONS
PLYWOOD SIGN BLANKS	DMS-7100
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

COLOR	USAGE SHEETING MATERIAL				
ORANGE	BACKGROUND	TYPE B <sub>FL</sub> OR TYPE C <sub>FL</sub>			
BLACK	LEGEND & BORDERS	NON-REFLECTIVE ACRYLIC FILM			

3. For projects more than two miles in length, Give Us a BRAKE signs should be repeated halfway through the project. The Give Us a Brake (CW21-1T) may be

4. Work zone speed limits are sometimes used in conjunction with GIVE US A BRAKE signing. See BC(3) for location and spacing of construction


5. Give Us a Brake (CW21-1T) signs and supports shall be considered subsidiary to Item 502, "Barricades, Signs and Traffic Handling."

6. The 96" X 48" Working For You Give Us A BRAKE (G20-7T) may use a 1/2" or 5/8" plywood substrate or 0.125" aluminum sheeting substrate and may be supported by two 4" x 6" wood posts with drilled holes for breakaway as per BC(5) and will be

7. The Working For You Give Us A BRAKE (G20-7T) 192" X 96" sign shall be paid for Item 647 - Large Roadside Sign Supports and Assemblies.

8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor

Texas Department	of Tra	nsp	ortation	Op D	Traffic erations Division Candard				
WORK ZONE "GIVE US A BRAKE" SIGNS WZ (BRK) - 13									
₩2		Kr	() = 1 3	)					
FILE: wzbrk-13.dgn	DN: T:	<dot< th=""><th>CK: TXDOT DW:</th><th>TxDO</th><th>T ск: TxDOT</th></dot<>	CK: TXDOT DW:	TxDO	T ск: TxDOT				
© TxDOT August 1995	CONT	SECT	JOB		HIGHWAY				
REVISIONS	1200	03	064	F	M 973				
6-96 5-98 7-13	DIST		COUNTY		SHEET NO.				
8-96 3-03	AUS		TRAVIS		72				
116									

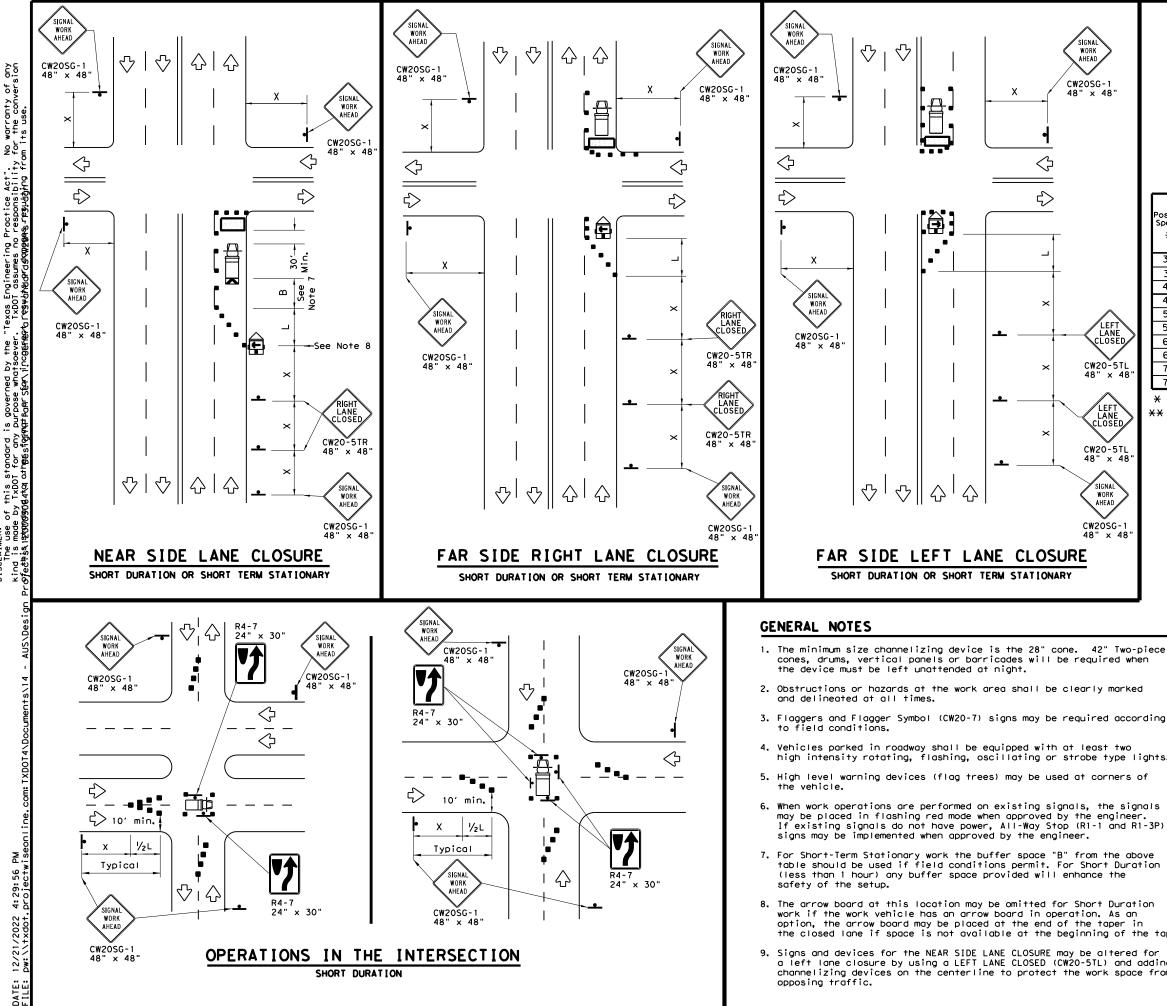

Texas Engineering Practice Act". TxDOT assumes no responsibility Marqsิฟปูสัพญศรฐคระศรีเปลู่ทุ่กอ fro SCLAIMER: The use of this standard is governed by the ind is made by TxD01 for any purpose whatsoever ethis stronggodd4tq athgesiggraph fan Sfan lincgeff Ξ

DATE: FIIF:

LEGEND								
<u>~~~~</u>	Type 3 Barricade		Channelizing Devices					
₿	Heavy Work Vehicle	K	Truck Mounted Attenuator (TMA)					
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)					
4	Sign	$\diamond$	Traffic Flow					
$\langle \rangle$	Flag	ſ	Flagger					

Speed	ed Formula Desirable Spaci Taper Lengths Channe * * Dev		Špacir Channe		Minimum Sign Spacing "x"	Suggested Longitudina। Buffer Space		
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"В"
30		150'	165'	180'	30′	60′	120'	90'
35	$L = \frac{WS^2}{60}$	2051	225′	245'	35′	70′	160'	120′
40	60	265′	295′	320'	40′	80′	240'	155'
45		450'	495 <i>'</i>	540'	45 <i>'</i>	90 <i>'</i>	320′	195'
50		500'	550'	600′	50 <i>'</i>	100'	400′	240'
55	L=WS	550'	605 <i>'</i>	660 <i>′</i>	55 <i>'</i>	110'	500 <i>1</i>	295′
60	2-115	600 <i>'</i>	660 <i>'</i>	720'	60′	120'	600 <i>'</i>	350′
65		650 <i>'</i>	715′	780′	65 <i>'</i>	130'	700'	410′
70		700′	770′	840'	70′	140′	800′	475′
75		750'	825′	900'	75′	150'	900′	540'


X Conventional Roads Only


XX Taper lengths have been rounded off.

L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)


WORKERS IN BUCKET TRUCKS SHALL NOT WORK ABOVE OPEN LANES OF TRAFFIC.


ed						
ording						
lights.						
of	SHEET 1 OF 2					
gnals er. R1-3P)	Texas Department of	of Tra	nspo	ortation	Op L	Traffic perations Division tandard
bove ation	TRAFFIC SIGNAL WORK TYPICAL DETAILS					
tion n in the taper.		_		5-1)-		3
d for	FILE: wzbts-13.dgn	DN: Tx		ск: TxDOT dw:		-
adding ce from	© TxDOT April 1992	CONT	SECT	JOB		HIGHWAY
	REVISIONS	1200	03	064	F	M 973
	2-98 10-99 7-13 4-98 3-03	DIST		COUNTY		SHEET NO.
	<b>4-98 3-03</b>	AUS		TRAVIS		73

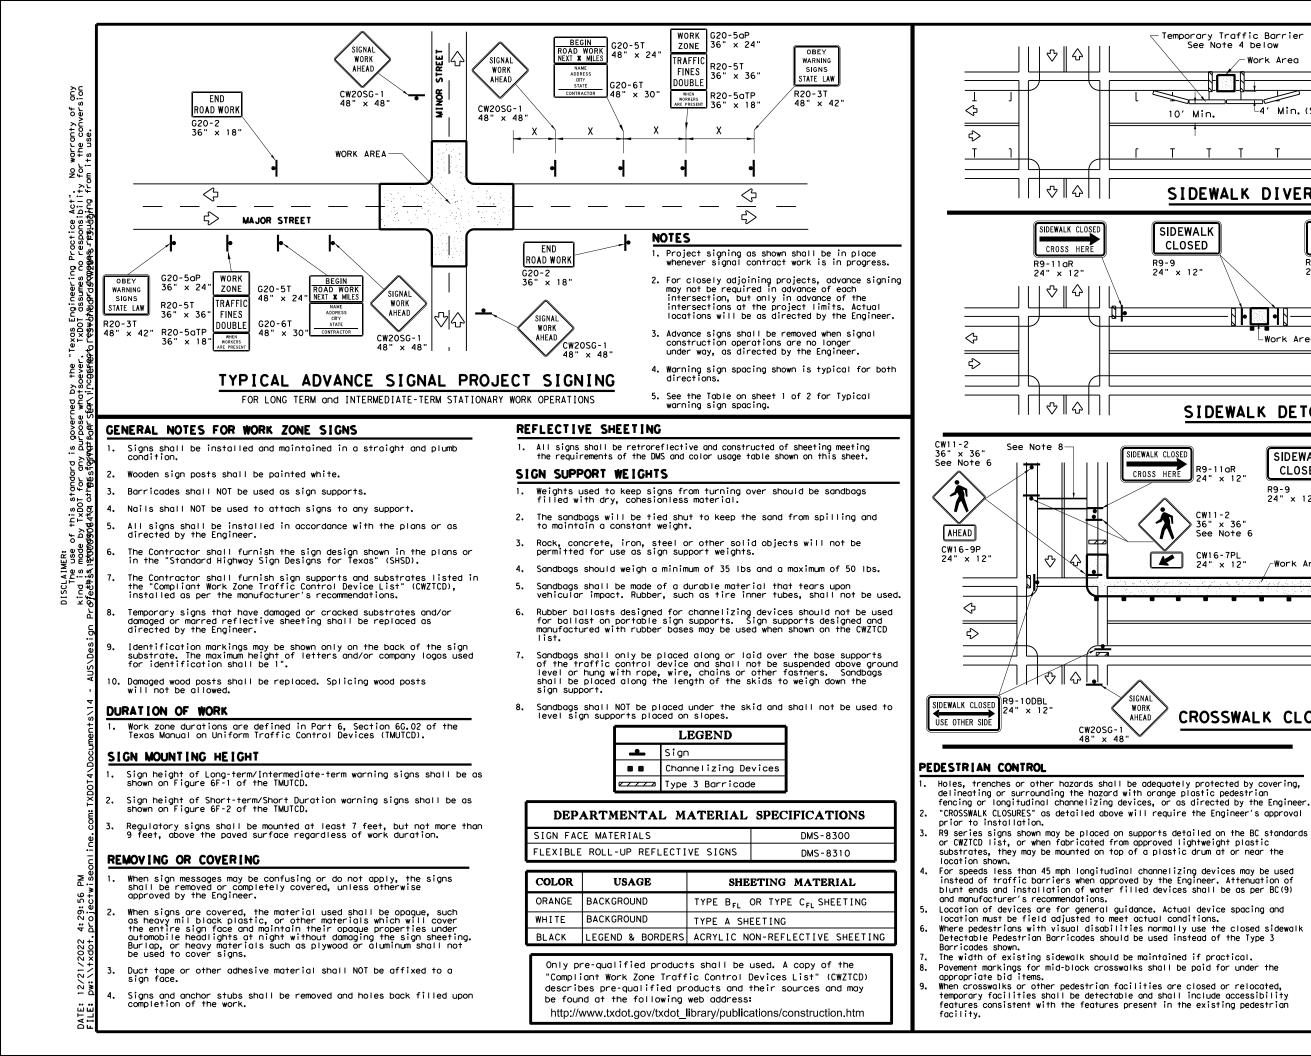

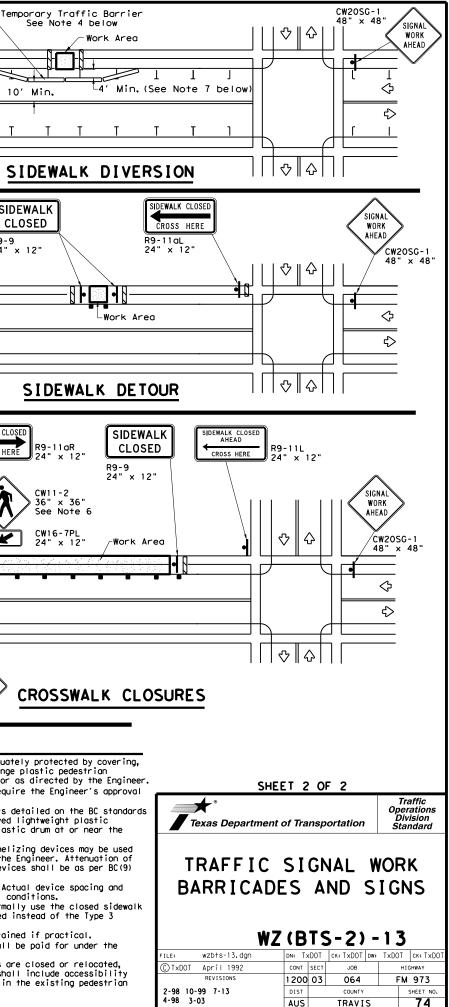


· · · · ·

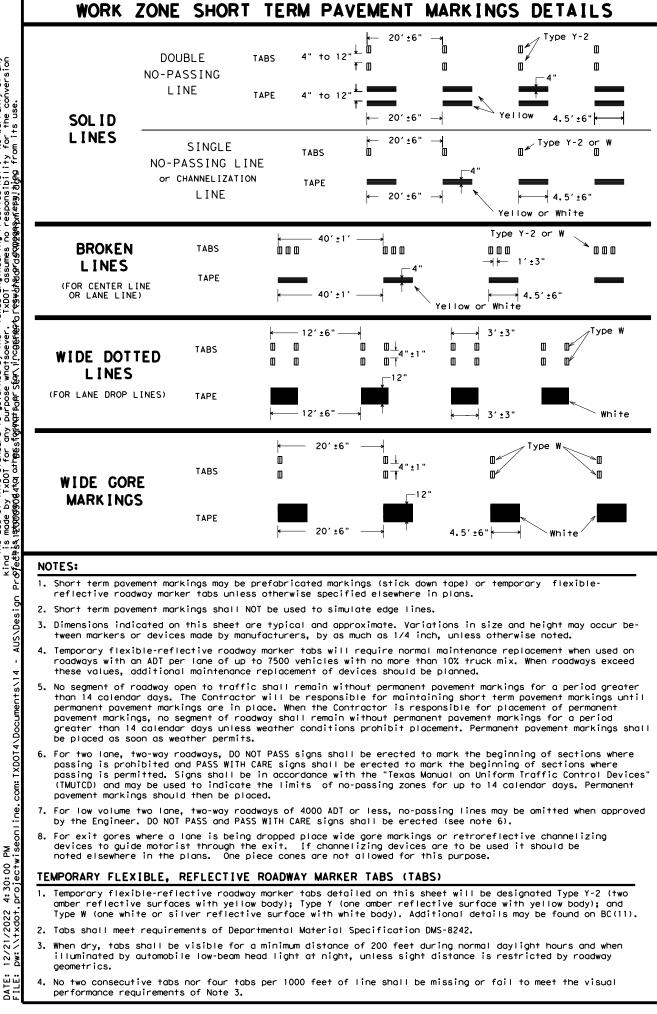

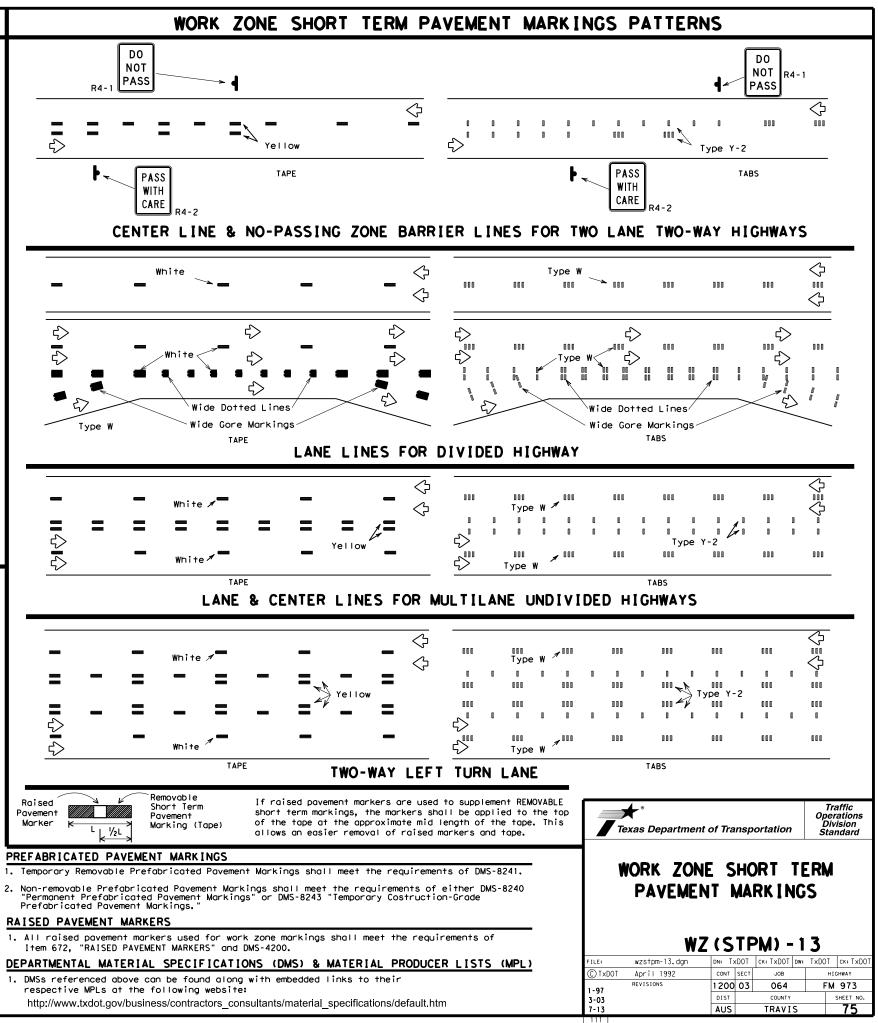

warranty of any r the conversion its nee S p Proctice Act". responsibility g this st T×DOT

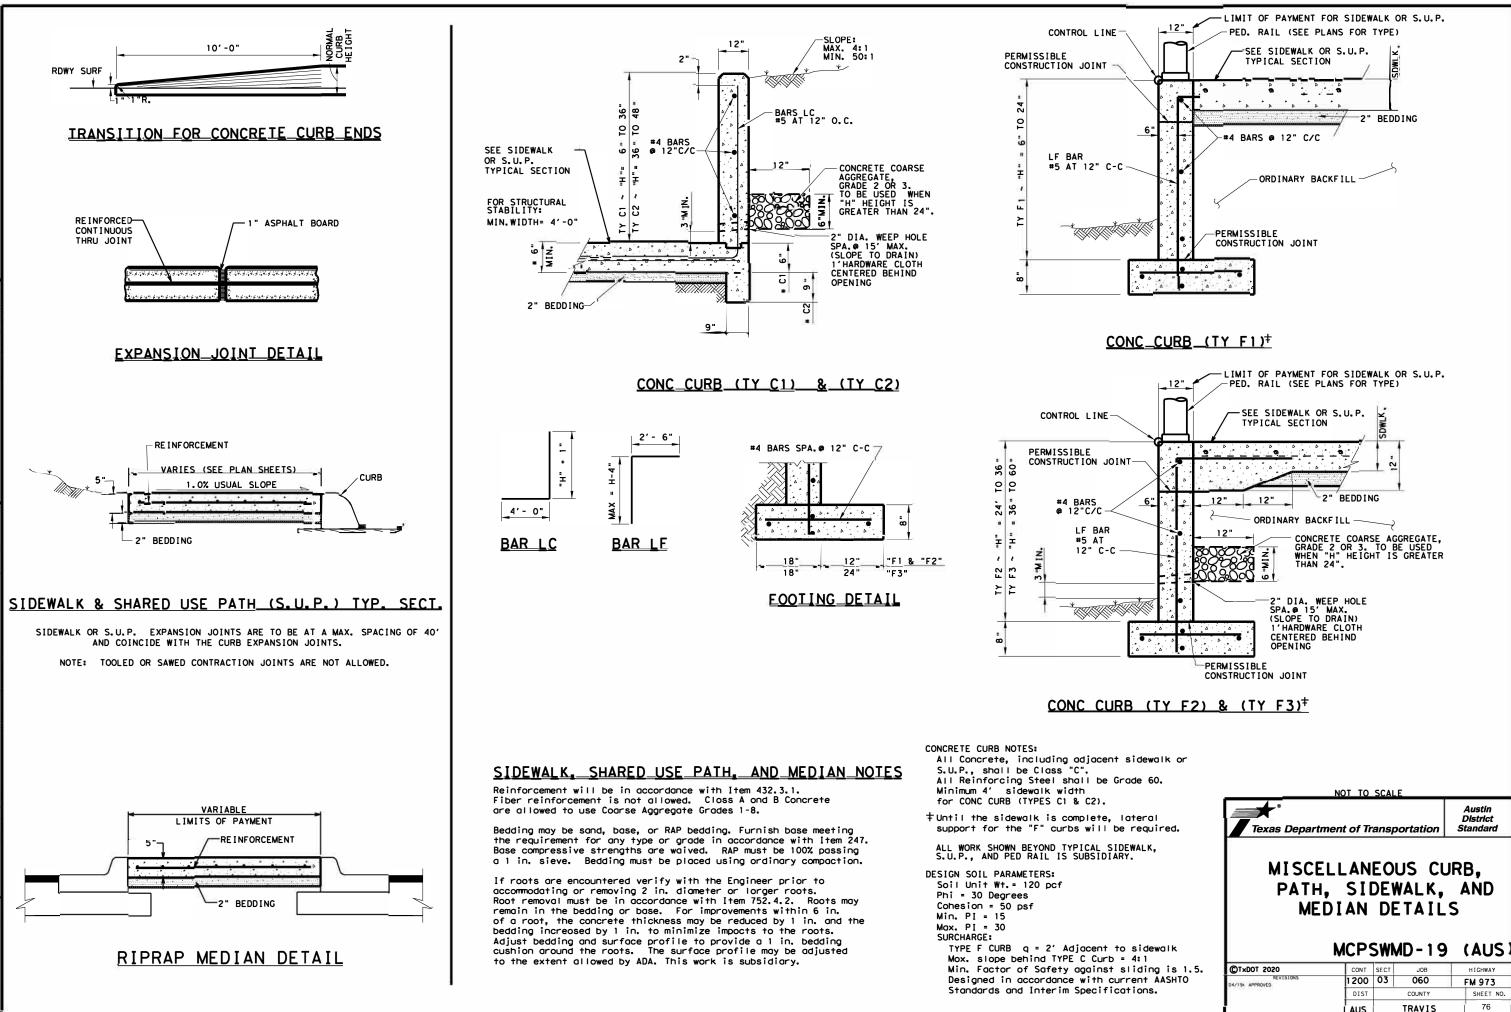

Μ 12:55:01 Dro iectwi /2020 9/2