

PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: TH40_ITS_pentable.tbl
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PO_SHT01_TITLE_SHEET.dgn
 DATE: 8/1/2023 2:22:13 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PO_SHT01_TITLE_SHEET.dgn

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	INDEX OF SHEETS

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENTS POTTER COUNTY

HIGHWAY: VARIOUS
 FEDERAL PROJECT: F 2B24(460)
AMARILLO DISTRICT ITS IMPROVEMENTS


FOR THE CONSTRUCTION OF MISCELLANEOUS TYPE WORK
 CONSISTING OF INFRASTRUCTURE-BASED INTELLIGENT
 TRANSPORTATION SYSTEMS, CCTV AND DMS.
 LIMITS: VARIOUS LOCATIONS IN THE AMARILLO DISTRICT
 NET LENGTH: 0.001 LF = 0.001 MILES

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NUMBER	
6	F 2B24(460)	1	
STATE	STATE DISTRICT	COUNTY	
TEXAS	AMA	POTTER	
CONTROL	SECTION	JOB	HIGHWAY NO.
0904	00	220	VARIOUS

FINAL PLANS

CONTRACTOR NAME: _____
 CONTRACTORS ADDRESS: _____
 DATE CONTRACTOR BEGAN WORK: _____
 DATE CONTRACTOR WAS COMPLETED & ACCEPTED: _____
 FINAL CONTRACT COST: _____
 AE SIGNATURE & DATE: _____

CSJ: 0904-00-220
 LIMITS: VARIOUS LOCATIONS IN
 OLDHAM, POTTER, RANDALL,
 CARSON, GRAY AND DONLEY
 COUNTIES.
 ①-⑱
 TYPE OF WORK: CCTV AND DMS INSTALLS

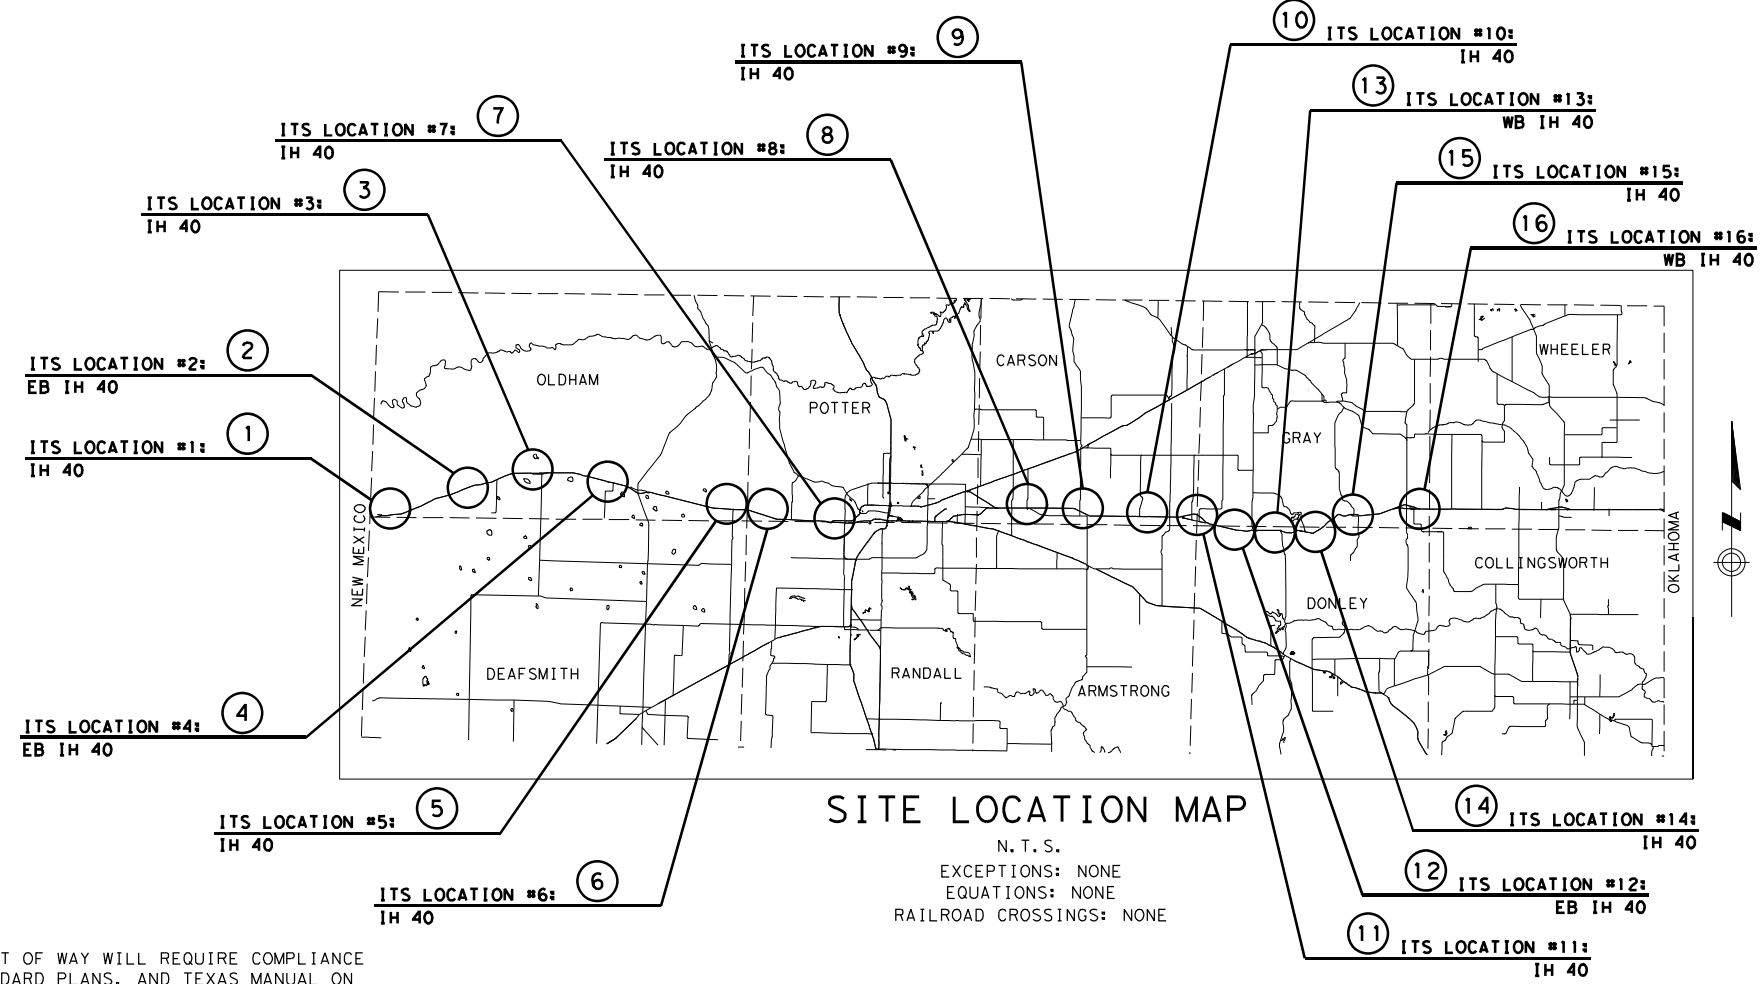

SITE LOCATION MAP

N. T. S.
 EXCEPTIONS: NONE
 EQUATIONS: NONE
 RAILROAD CROSSINGS: NONE



RECOMMENDED FOR LETTING: _____
 DATE: 6/26/2024

DocuSigned by:
Bernice Lind, PE
 25B59152F691499...

AREA ENGINEER _____
 DATE: 7/1/2024

DocuSigned by:
Kit Black
 9B5A6EA6AE8B46E...

DISTRICT DIRECTOR OF TRANSPORTATION
 PLANNING AND DEVELOPMENT

APPROVED FOR LETTING: _____
 DATE: 7/2/2024

DocuSigned by:
Blair Johnson
 8B80E3AEB2BC43A...
 DISTRICT ENGINEER

NOTE:
 ALL CONSTRUCTION WITHIN THE STATE RIGHT OF WAY WILL REQUIRE COMPLIANCE TO TXDOT STANDARD SPECIFICATIONS, STANDARD PLANS, AND TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
 SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND THE CONTRACT PROVISIONS LISTED AND DATED AS FOLLOWS SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, OCTOBER 23, 2023)



INDEX OF SHEETS

SHEET	DESCRIPTION
I. GENERAL	
1	TITLE SHEET
2	INDEX OF SHEETS
3-3B	GENERAL NOTES
4-4A	ESTIMATE AND QUANTITY
5-6	SUMMARY OF QUANTITIES
7	ITS ELECTRICAL SERVICES SUMMARY

V. ENVIRONMENTAL ISSUES

121	EPIC
122-123	SW3P

VI. ENVIRONMENTAL ISSUES STANDARDS

124-126	EC (9) -16
---------	------------

II. TRAFFIC CONTROL PLAN

8-19	BC (1-12) -21
20-24	TCP (1-1, 1-2, 1-3, 1-4, 1-5) -18
25	TCP (2-4) -18
26	TCP (2-5) -18
27-31	TCP (6-1, 6-2, 6-3, 6-4, 6-5) -12
32-33	WZ (BTS-1, 2) -13
34	WZ (RS) -22


III. TRAFFIC ITEMS

35	IH 40 EB CCTV1
36	IH 40 EB CCTV1 QUANTITIES
37	IH 40 EB CCTV2 AND DMS1
38	IH 40 EB CCTV2 AND DMS1 QUANTITIES
39	IH 40 EB CCTV3
40	IH 40 EB CCTV3 QUANTITIES
41	IH 40 EB CCTV4 AND DMS2
42	IH 40 EB CCTV4 AND DMS2 QUANTITIES
43	IH 40 EB/WB CCTV5
44	IH 40 EB/WB CCTV5 QUANTITIES
45	IH 40 EB CCTV6
46	IH 40 EB CCTV6 QUANTITIES
47	IH 40 EB CCTV7
48	IH 40 EB CCTV7 QUANTITIES
49	IH 40 WB CCTV8
50	IH 40 WB CCTV8 QUANTITIES
51	IH 40 EB CCTV9
52	IH 40 EB CCTV9 QUANTITIES
53	IH 40 EB CCTV10
54	IH 40 EB CCTV10 QUANTITIES
55	IH 40 EB CCTV11
56	IH 40 EB CCTV11 QUANTITIES
57-58	IH 40 EB CCTV12 AND DMS3
59	IH 40 EB CCTV12 AND DMS3 QUANTITIES
60	IH 40 EB/WB CCTV13 AND DMS4
61	IH 40 EB/WB CCTV13 AND DMS4 QUANTITIES
62	IH 40 EB CCTV14
63	IH 40 EB CCTV14 QUANTITIES
64	IH 40 EB CCTV15
65	IH 40 EB CCTV15 QUANTITIES
66	IH 40 WB CCTV16 AND DMS5
67	IH 40 WB CCTV16 AND DMS5 QUANTITIES
68	ITS DETAILS
69	ITS BLOCK DIAGRAM
70	ITS ELEVATION DETAILS

IV. TRAFFIC STANDARDS

71	COSS-Z21-10
72-73	COSSD
74	COSSF-21
75	COSS-FD
76	COSS-SE
77	COSS & OSB-SZ-21 (MOD)
78-83	D & OM (1, 2, 3, 5, 6, VIA) -20
84-86	DMS (TM-1) -16 THRU DMS (TM-3) -16
87-94	ED (1) -14, ED (3) -14 THRU ED (8) -14 & ED (11) -14
95	GF (31) -19
96	GF (31) DAT-19
97	GF (31) MS-19
98-99	GF (31) TR TL3-20
100-112	ITS (1, 2, 4, 4A, 5, 6, 7, 10, 11, 15, 16, 17, 18) -15
113	ITS (3) -16
114	ITS (19) -17
115	ITS (20) -15
116	ITS (21) -15
117	ITS (22) -15
118	SGT (10S) 31-16
119	SGT (12S) 31-18
120	WV & IZ-14

NO.	DATE	REVISION	APPROVED



INDEX OF SHEETS

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED (*) ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

, P.E. **8/1/2023**
 Signature of Registrant & Date

SHEET 1 OF 1		
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	VARIOUS
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

DATE: 8/1/2023 2:22:13 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\PO_SHT02_INDEX_01.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl

GENERAL NOTES

General – This project approved to use 2014 specs by email from Jason Pike on 05/06/2024.

Q&A on Proposal or Contractor questions on this project are to be addressed to the Traffic Office navigate to:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

Use the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink of the project you want to view the Q&A for and click on the link in the window that pops up.

Early review documentation including watermark Plans, CTD and cross sections (if applicable) will be posted to TxDOT District's FTP website.

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All manufactured material used on the project must come from MPL located here:

<https://www.txdot.gov/business/resources/materials/material-producer-list.html>

Alternate materials are noted in this contract.

If Contractor damages any sprinkler heads, risers or water lines that are not to be relocated, he or she is required to replace or repair all damage at his or her own expense and to the Engineer's satisfaction.

If portions of the right-of-way is used to store materials, equipment, and other uses with the approval of the Engineer, materials, equipment, etc., must either be located outside the 30 feet traffic safety clearance zone or be adequately protected.

Item 6 Control of Materials

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

Item 7 Legal Relations and Responsibilities

No significant traffic generator events identified.

The total area disturbed for this project is approximately 0.46 acres. The disturbed area in this project, all project locations in the Contract, and the Contractor Project Specific Locations (PSLs), within 1 mile of the project limits, for the Contract will further establish the authorization requirements for storm water discharges. The Department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction activities shown on the plans. The Contractor is to obtain required authorization from the TCEQ for Contractor PSLs for construction support activities on or off the ROW. When the total area disturbed in the Contract and PSLs within 1 mile of the project limits exceeds 5 acres, provide a copy of the Contractor NOI for PSLs on the ROW to the Engineer and to the local government that operates a separate storm sewer system.

Item 8 Prosecution and Progress

Create, maintain, and submit for approval, a Critical Path Method (CPM) project schedule.

The 120 day convenience delay is intended to provide lead time for the Engineer and contractor to acquire required construction materials for: intelligent traffic control elements.

Item 416 Drilled Shaft Foundations

A stabilization method is to be used to prevent caving of the material and is to be submitted as part of the Contractor's Safety Plan.

Calculate overhead sign support clearance and report to the Engineer. Obtain Engineer's approval of location before installing foundation.

Item 421 Hydraulic Cement Concrete

The sand equivalent value of fine aggregate is not to be less than 85 when subjected to test method tex-203-F.

Item 432 Riprap

24" tie bars (#3 bars at 18" c-c) are to be used across all construction joints. Tie bars should be 12" into each side of the construction joint. When tying new riprap into existing riprap drill and epoxy grout 8" minimum into existing concrete. This is to be considered subsidiary to the payment for riprap.

Item 502 Barricades, Signs, and Traffic Handling

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Temporary rumble strips will be required as shown on WZ(RS)-22 regardless of loose gravel, and/or soft or bleeding asphalt. Adjust the traffic control setup such that rumble strips are not placed in areas of heavily rutted pavements, unpaved surfaces, or horizontal curves. Temporary rumble strips will not be allowed on interstate highway.

The Contractor is to have the option of using either plastic drums, vertical panels, grabber cones or a combination where drums are shown as channelizing devices, as approved by the Engineer. Plastic drums are to be used in all transition areas in accordance with BC(8)-21.

Any work being done above travel lanes will require the lanes to be closed for traffic safety.

Notify the Engineer 24 hours prior to any lane closure.

Item 506 Temporary Erosion, Sedimentation, and Environmental Controls

Erosion control devices are to be installed as needed in coordination with the work progress, or as directed by the Engineer.

Item 540 Metal Beam Guard Fence

Drive steel posts for metal beam guard fence a minimum of 1/3 of the post length to final specified depth.

Item 544 Guardrail End Treatments

Use Single Guardrail End Treatment (Ty III)(Steel Post).

Item 618 Conduit

The locations of conduit as shown are for diagrammatic purposed only and may be varied to meet local conditions, subject to approval. Backfill all open trenches before the end of the workday and do not leave any trench open overnight.

Item 620 Electrical Conductors

Provide breakaway electrical connectors for breakaway poles. Use Bussman HEBW,

Littlefuse LEB, Ferraz-Shawmut FEB, or equal on ungrounded conductors. For grounded conductors, use Bussman HET, Littlefuse LET, Ferraz-Shawmut FEBN, or equal. These breakaway connectors have a white colored marking and a permanently installed solid neutral. See the latest RID (2) standard for additional details.

Item 624 Ground Boxes

Do not place ground boxes in driveways or bottom of a ditch. Alternate ground box locations will be as directed.

Item 628 Electrical Services

Notify the utility company as soon as possible in order to minimize delay and coordinate the work necessary for the utility company to provide power.

The Contractor is responsible for submitting application(s) to applicable utility company which will be set up in the Contractor's name with 911 address(es) for service location(s). Costs and charges from the utility company will be paid by the Department in accordance with the standard specification.

Once the project is complete and accepted by the Department, the Department will transfer utility services into the Department's name using the corresponding 911 addresses and meter numbers.

Item 658 Delineator and Object Marker Assemblies

For all guard fence post mounted applications provide hollow or tubular posts with approved anchorage.

Item 6001 Portable Changeable Message Sign

Supply 2 Portable Changeable Message Signs (Type II – Lamp Matrix) for this project. This work will be paid at the unit price bid for each unit, which will include any moving, maintenance, and removing of the PCMS. No payment will be made for removing and replacing damaged PCMS. The Portable Changeable Message Signs will become property of the Contractor at the completion of the project.

If the Contractor chooses to have more than one lane closure set-up at a time, provide additional PCMS in accordance with TCP at no additional charge to the department.

Item 6010 Closed Circuit Television (CCTV) Field Equipment

The Amarillo District Traffic Management Control (TMC) Center is currently using the Department's Lonestar software. The cameras currently in use at the TMC CCTV control sub-systems are Bosch MIC-IPSTARLIGHT 7100i or greater.

County: POTTER

Sheet: 3B

Highway: VARIOUS

Control: 0904-00-220

Item 6028 Dynamic Message Sign System

The DMS supplied by the Department for this project will be stored for pick up at TxDOT Amarillo District office, 5715 Canyon Dr., Amarillo TX 79110.

To arrange for pickup of equipment contact:
Traffic Systems Specialist Jamey Whitley - Jamey.Whitley@txdot.gov (806)356-3292

Item 6185 Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)

In addition to the shadow vehicles with truck mounted attenuator (TMA) that are specified as being required on the traffic control plan for this project, provide 0 additional shadow vehicle(s) with TMA for TCP (1-1)-18, (1-2)-18, (1-3)-18, (1-4)-18, (1-5)-18, (2-4)-18, (2-5)-18, (6-1)-12, (6-2)-12, (6-3)-12, (6-4)-12, (6-5)-12 as detailed on the General Notes of this standard sheets.

Therefore, 2 total shadow vehicles with TMA will be required for this type of work. The Contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMAs needed for the project.

Item 6247 Installation of Traffic Management Equipment

The equipment supplied by the Department for this project will be stored for pick up at TxDOT Amarillo District office, 5715 Canyon Dr, Amarillo TX 79110.

To arrange for pickup of equipment contact:
Traffic Systems Specialist: Jamey Whitley - Jamey.Whitley@txdot.gov (806)356-3292



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0904-00-220

DISTRICT Amarillo

COUNTY Potter

HIGHWAY Various

CONTROL SECTION JOB				0904-00-220		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00188833			
COUNTY				Potter			
HIGHWAY				Various			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	416-6005	DRILL SHAFT (42 IN)	LF	304.000		304.000	
	416-6023	DRILL SHAFT (SIGN MTS) (54 IN)	LF	105.000		105.000	
	432-6001	RIPRAP (CONC)(4 IN)	CY	42.000		42.000	
	432-6045	RIPRAP (MOW STRIP)(4 IN)	CY	91.000		91.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	11.000		11.000	
	540-6002	MTL W-BEAM GD FEN (STEEL POST)	LF	1,975.000		1,975.000	
	540-6006	MTL BEAM GD FEN TRANS (THRIE-BEAM)	EA	1.000		1.000	
	540-6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	7.000		7.000	
	544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	12.000		12.000	
	618-6046	CONDT (PVC) (SCH 80) (2")	LF	9,335.000		9,335.000	
	618-6047	CONDT (PVC) (SCH 80) (2") (BORE)	LF	1,025.000		1,025.000	
	618-6053	CONDT (PVC) (SCH 80) (3")	LF	1,880.000		1,880.000	
	618-6054	CONDT (PVC) (SCH 80) (3") (BORE)	LF	30.000		30.000	
	620-6007	ELEC CONDR (NO.8) BARE	LF	1,805.000		1,805.000	
	620-6008	ELEC CONDR (NO.8) INSULATED	LF	3,610.000		3,610.000	
	620-6009	ELEC CONDR (NO.6) BARE	LF	1,815.000		1,815.000	
	620-6010	ELEC CONDR (NO.6) INSULATED	LF	3,630.000		3,630.000	
	620-6011	ELEC CONDR (NO.4) BARE	LF	1,525.000		1,525.000	
	620-6012	ELEC CONDR (NO.4) INSULATED	LF	3,900.000		3,900.000	
	620-6015	ELEC CONDR (NO.2) BARE	LF	4,115.000		4,115.000	
	620-6016	ELEC CONDR (NO.2) INSULATED	LF	9,665.000		9,665.000	
	620-6019	ELEC CONDR (NO.1/0) BARE	LF	1,100.000		1,100.000	
	620-6020	ELEC CONDR (NO.1/0) INSULATED	LF	3,300.000		3,300.000	
	620-6025	ELEC CONDR (NO.4/0) BARE	LF	1,910.000		1,910.000	
	620-6026	ELEC CONDR (NO.4/0) INSULATED	LF	5,730.000		5,730.000	
	624-6002	GROUND BOX TY A (122311)W/APRON	EA	32.000		32.000	
	624-6008	GROUND BOX TY C (162911)W/APRON	EA	9.000		9.000	
	628-6220	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	EA	16.000		16.000	
	650-6028	INS OH SN SUP(30 FT BAL TEE)	EA	5.000		5.000	
	658-6061	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2	EA	21.000		21.000	
	658-6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	11.000		11.000	
	6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EA	2.000		2.000	
	6010-6002	CCTV FIELD EQUIPMENT (DIGITAL)	EA	16.000		16.000	
	6010-6004	CCTV MOUNT (POLE)	EA	16.000		16.000	
	6028-6001	INSTALL DMS (POLE MTD CABINET)	EA	5.000		5.000	
	6064-6037	ITS POLE (50 FT)(90 MPH)	EA	16.000		16.000	



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0904-00-220

DISTRICT Amarillo

COUNTY Potter

HIGHWAY Various


CONTROL SECTION JOB				0904-00-220		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00188833			
COUNTY				Potter			
HIGHWAY				Various			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	6064-6080	ITS POLE MNT CAB (TY 2)(CONF 1)	EA	16.000		16.000	
	6185-6002	TMA (STATIONARY)	DAY	182.000		182.000	
	6247-6005	INSTALL OF CELLULAR MODEM	EA	21.000		21.000	
	16	MATERIAL FURNISHED BY THE STATE (PARTICIPATING)	LS	1.000		1.000	
	18	ELECTRICAL: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	
		EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS	1.000		1.000	
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	

DATE: 8/1/2023 2:22:14 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\PO_SHT03_QUANTITIES_01.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: TH40_ITS_pentable.tbl

ITS LOCATION	MILE MARKER	SHEET NAME	416 6005	416 6023	432 6001	432 6045	540 6002	540 6006	540 6016	544 6001	618 6046	618 6047	618 6053
			DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC) (4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GD FEN (STEEL POST)	MTL BEAM GD FEN TRANS (THRIE-BEAM)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	CONDT (PVC) (SCH 80) (2")	CONDT (PVC) (SCH 80) (2") (BORE)	CONDT (PVC) (SCH 80) (3")
			LF	LF	CY	CY	LF	EA	EA	EA	LF	LF	LF
1	MM 1.32	IH 40 EB CCTV #1	19		2						280	140	
2	MM 12.28	IH 40 EB CCTV #2	19		2						375	90	
	MM 12.38	IH 40 EB DMS #1		21	2	8	175		1	1	540	90	
3	MM 22.11	IH 40 EB CCTV #3	19		2						75		
4	MM 32.08	IH 40 EB CCTV #4	19		2						1080		
	MM 32.14	IH 40 EB DMS #2		21	2	17	375		1	3	780	25	
5	MM 49.44	IH 40 EB/WB CCTV #5	19		2	5	75	1	1		150	80	
6	MM 53.08	IH 40 EB CCTV #6	19		2	25	550		1	3	130	25	
7	MM 63.41	IH 40 EB CCTV #7	19		2						125	35	
8	MM 87.24	IH 40 WB CCTV #8	19		2						175	30	
9	MM 96.93	IH 40 EB CCTV #9	19		2						275		
10	MM 106.34	IH 40 EB CCTV #10	19		2						230	115	
11	MM 113.90	IH 40 EB CCTV #11	19		2						1600		
12	MM 118.77	IH 40 EB CCTV #12	19		2						675		
	MM 118.98	IH 40 EB DMS #3		21	2	17	375		1	3			1880
13	MM 126.12	IH 40 EB/WB CCTV #13	19		2						525	35	
	MM 125.96	IH 40 EB/WB DMS #4		21	2	11	250		1	1	725	125	
14	MM 129.19	IH 40 EB CCTV #14	19		2						120	40	
15	MM 133.97	IH 40 EB CCTV #15	19		2						165	35	
16	MM 146.50	IH 40 WB CCTV #16	19		2						290	80	
	MM 146.39	IH 40 WB DMS #5		21	2	8	175		1	1	1020	80	
TOTAL			304	105	42	91	1975	1	7	12	9335	1025	1880

ITS LOCATION	MILE MARKER	SHEET NAME	618 6054	620 6007	620 6008	620 6009	620 6010	620 6011	620 6012	620 6015	620 6016	620 6019	620 6020
			CONDT (PVC) (SCH 80) (3") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	ELEC CONDR (NO. 6) BARE	ELEC CONDR (NO. 6) INSULATED	ELEC CONDR (NO. 4) BARE	ELEC CONDR (NO. 4) INSULATED	ELEC CONDR (NO. 2) BARE	ELEC CONDR (NO. 2) INSULATED	ELEC CONDR (NO. 1/0) BARE	ELEC CONDR (NO. 1/0) INSULATED
			LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF
1	MM 1.32	IH 40 EB CCTV #1				420	840						
2	MM 12.28	IH 40 EB CCTV #2				465	930						
	MM 12.38	IH 40 EB DMS #1								630	1890		
3	MM 22.11	IH 40 EB CCTV #3		75	150								
4	MM 32.08	IH 40 EB CCTV #4								1080	2160		
	MM 32.14	IH 40 EB DMS #2								805	2415		
5	MM 49.44	IH 40 EB/WB CCTV #5		230	460								
6	MM 53.08	IH 40 EB CCTV #6		155	310								
7	MM 63.41	IH 40 EB CCTV #7		160	320								
8	MM 87.24	IH 40 WB CCTV #8		205	410								
9	MM 96.93	IH 40 EB CCTV #9		275	550								
10	MM 106.34	IH 40 EB CCTV #10		345	690								
11	MM 113.90	IH 40 EB CCTV #11								1600	3200		
12	MM 118.77	IH 40 EB CCTV #12						675	1350				
	MM 118.98	IH 40 EB DMS #3	30										
13	MM 126.12	IH 40 EB/WB CCTV #13				560	1120						
	MM 125.96	IH 40 EB/WB DMS #4						850	2550				
14	MM 129.19	IH 40 EB CCTV #14		160	320								
15	MM 133.97	IH 40 EB CCTV #15		200	400								
16	MM 146.50	IH 40 WB CCTV #16				370	740						
	MM 146.39	IH 40 WB DMS #5										1100	3300
TOTAL			30	1805	3610	1815	3630	1525	3900	4115	9665	1100	3300

NO.	DATE	REVISION	APPROVED

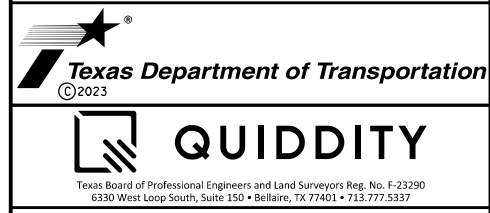

SUMMARY OF QUANTITIES ITS

SHEET 1 OF 2

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	VARIOUS
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

5


DATE: 8/1/2023 2:22:17 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 1x DOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PO_SHT04_QUANTITIES_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: TH40_ITS_pentable.tbl

ITS LOCATION	MILE MARKER	SHEET NAME	620 6025	620 6026	624 6002	624 6008	628 6220	650 6028	658 6061	658 6062	6010 6002	6010 6004	6028 6001
			ELEC CONDR (NO. 4/0) BARE	ELEC CONDR (NO. 4/0) INSULATED	GROUND BOX TY A (122311) W/ APRON	GROUND BOX TY C (162911) W/ APRON	ELC SRV TY D 120/240 100(NS)AL (N) SP(O)	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2 (BI)	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)
			LF	LF	EA	EA	EA	EA	EA	EA	EA	EA	EA
1	MM 1.32	IH 40 EB CCTV #1			2		1				1	1	
2	MM 12.28	IH 40 EB CCTV #2				2	1				1	1	
	MM 12.38	IH 40 EB DMS #1						1	3				1
3	MM 22.11	IH 40 EB CCTV #3			1		1				1	1	
4	MM 32.08	IH 40 EB CCTV #4			1	2	1				1	1	
	MM 32.14	IH 40 EB DMS #2			1			1	3	4			1
5	MM 49.44	IH 40 EB/WB CCTV #5			2		1		2		1	1	
6	MM 53.08	IH 40 EB CCTV #6			2		1		3	4	1	1	
7	MM 63.41	IH 40 EB CCTV #7			2		1				1	1	
8	MM 87.24	IH 40 WB CCTV #8			2		1				1	1	
9	MM 96.93	IH 40 EB CCTV #9			2		1				1	1	
10	MM 106.34	IH 40 EB CCTV #10			2		1				1	1	
11	MM 113.90	IH 40 EB CCTV #11			2		1				1	1	
12	MM 118.77	IH 40 EB CCTV #12				2	1				1	1	
	MM 118.98	IH 40 EB DMS #3	1910	5730	4			1	3	3			1
13	MM 126.12	IH 40 EB/WB CCTV #13			2	1	1				1	1	
	MM 125.96	IH 40 EB/WB DMS #4			2			1	4				1
14	MM 129.19	IH 40 EB CCTV #14			2		1				1	1	
15	MM 133.97	IH 40 EB CCTV #15			2		1				1	1	
16	MM 146.50	IH 40 WB CCTV #16				2	1				1	1	
	MM 146.39	IH 40 WB DMS #5			1			1	3				1
TOTAL			1910	5730	32	9	16	5	21	11	16	16	5

ITS LOCATION	MILE MARKER	SHEET NAME	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE				
			ITS POLE (50 FT) (90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-1 1/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)
			EA	EA	EA	EA	EA	EA	EA	EA
1	MM 1.32	IH 40 EB CCTV #1	1	1	1		1	1	1	
2	MM 12.28	IH 40 EB CCTV #2	1	1	1		1	1	1	
	MM 12.38	IH 40 EB DMS #1			1	1	1	1	1	1
3	MM 22.11	IH 40 EB CCTV #3	1	1	1		1	1	1	
4	MM 32.08	IH 40 EB CCTV #4	1	1	1		1	1	1	
	MM 32.14	IH 40 EB DMS #2			1	1	1	1	1	1
5	MM 49.44	IH 40 EB/WB CCTV #5	1	1	1		1	1	1	
6	MM 53.08	IH 40 EB CCTV #6	1	1	1		1	1	1	
7	MM 63.41	IH 40 EB CCTV #7	1	1	1		1	1	1	
8	MM 87.24	IH 40 WB CCTV #8	1	1	1		1	1	1	
9	MM 96.93	IH 40 EB CCTV #9	1	1	1		1	1	1	
10	MM 106.34	IH 40 EB CCTV #10	1	1	1		1	1	1	
11	MM 113.90	IH 40 EB CCTV #11	1	1	1		1	1	1	
12	MM 118.77	IH 40 EB CCTV #12	1	1	1		1	1	1	
	MM 118.98	IH 40 EB DMS #3			1	1	1	1	1	1
13	MM 126.12	IH 40 EB/WB CCTV #13	1	1	1		1	1	1	
	MM 125.96	IH 40 EB/WB DMS #4			1	1	1	1	1	1
14	MM 129.19	IH 40 EB CCTV #14	1	1	1		1	1	1	
15	MM 133.97	IH 40 EB CCTV #15	1	1	1		1	1	1	
16	MM 146.50	IH 40 WB CCTV #16	1	1	1		1	1	1	
	MM 146.39	IH 40 WB DMS #5			1	1	1	1	1	1
TOTAL			16	16	21	5	21	21	21	5

*SUPPLIED BY THE STATE, INSTALLED BY CONTRACTOR, INSTALLATION IS SUBSIDIARY TO THE VARIOUS BID ITEMS.

NO.	DATE	REVISION	APPROVED

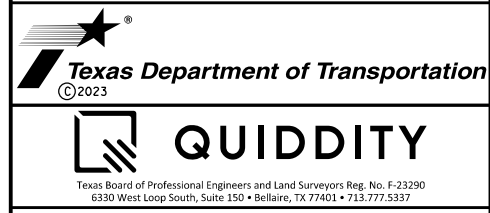


SUMMARY OF QUANTITIES ITS			
SHEET 2 OF 2			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6	SEE TITLE SHEET	VARIOUS	
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	AMA	POTTER	6
CONT.	SECT.	JOB	
0904	00	220	

PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: TH40_ITS_pentable.tbl
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PO_SHT05_ELEC_SS-01.dgn
 DATE: 8/1/2023 2:22:20 PM

ELECTRICAL SERVICES SUMMARY												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-1	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #1	1P/20	15	120	1.8
E-2	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CCTV #2 DMS #1	1P/20 2P/70	15 50	120 240	13.8
E-3	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #3	1P/20	15	120	1.8
E-4	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/100	N/A	100	CCTV #4 DMS #2	1P/20 2P/70	15 50	120 240	13.8
E-5	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #5	1P/20	15	120	1.8
E-6	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #6	1P/20	15	120	1.8
E-7	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #7	1P/20	15	120	1.8
E-8	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #8	1P/20	15	120	1.8
E-9	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #9	1P/20	15	120	1.8
E-10	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #10	1P/20	15	120	1.8
E-11	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #11	1P/20	15	120	1.8
E-12	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/100	N/A	100	CCTV #12 DMS #3	1P/20 2P/70	15 50	120 240	13.8
E-13	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/100	N/A	100	CCTV #13 DMS #4	1P/20 2P/70	15 50	120 240	13.8
E-14	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #14	1P/20	15	120	1.8
E-15	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #15	1P/20	15	120	1.8
E-16	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/100	N/A	100	CCTV #16 DMS #5	1P/20 2P/70	15 50	120 240	13.8

NO.	DATE	REVISION	APPROVED



ITS ELECTRICAL SERVICES SUMMARY

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	VARIOUS
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to digital format or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\Standards\bc-21.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION
GENERAL NOTES
AND REQUIREMENTS**

BC (1) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
4-03	7-13	0904	00	220	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
5-10	5-21	AMA	POTTER	8					


DATE: 8/1/2023 2:22:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase (CAD) Standard Signs.dwg
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of CAD standards to PDF files or for incorrect results or damages resulting from its use.

TYPICAL LOCATION OF CROSSROAD SIGNS

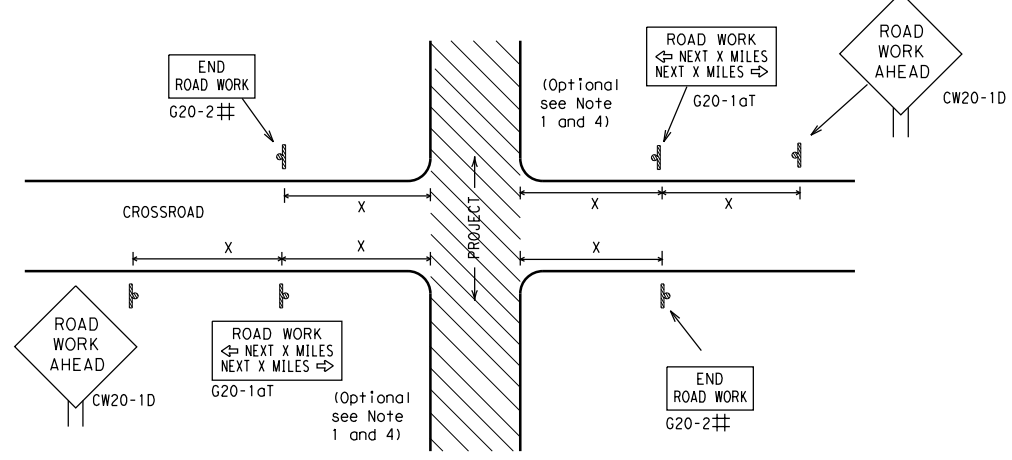

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

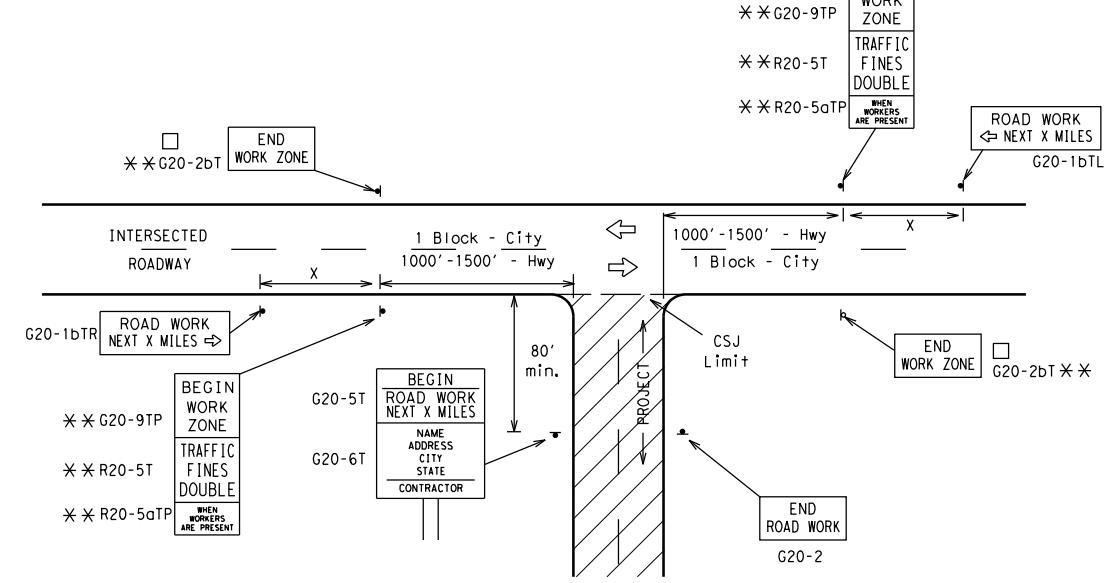

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

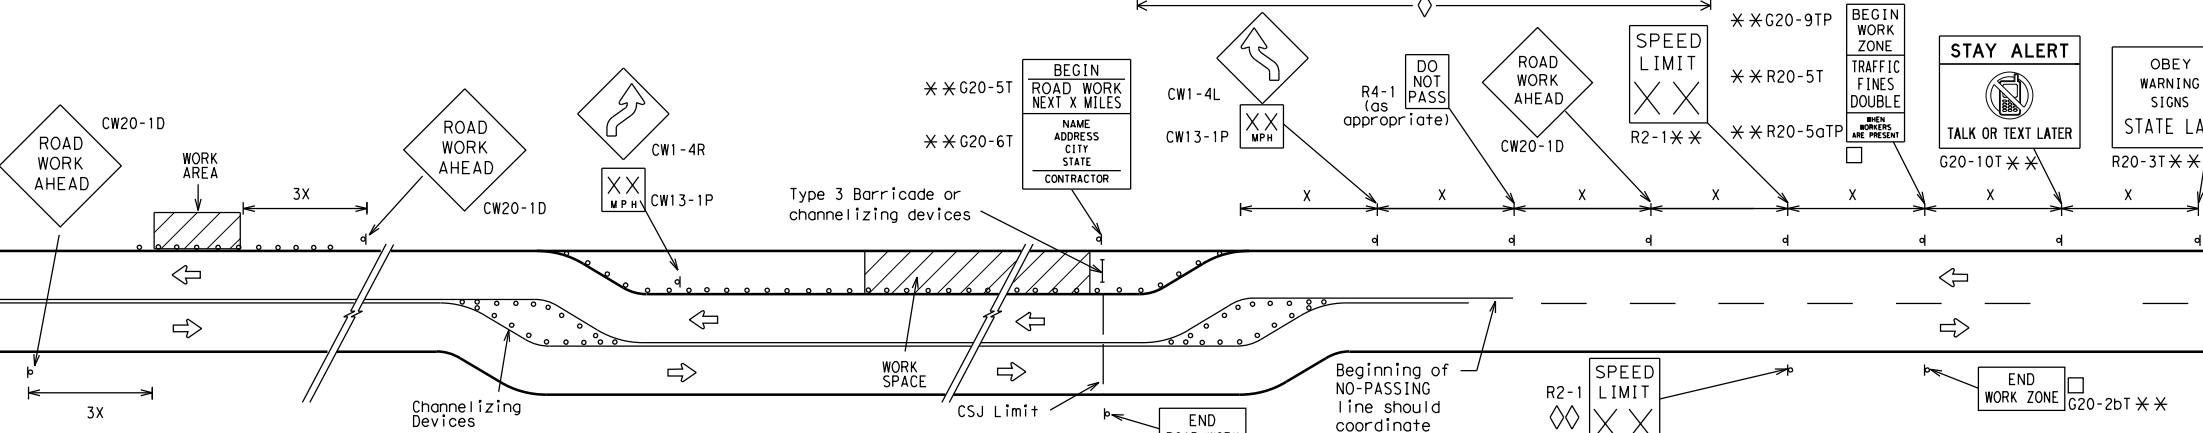


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

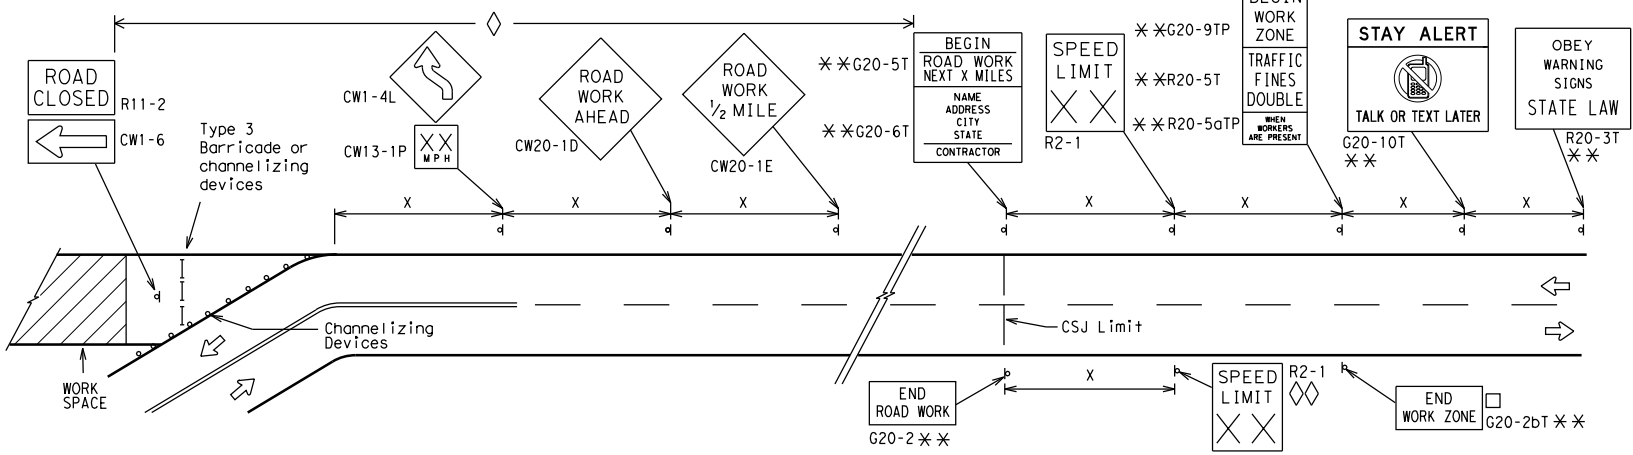

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

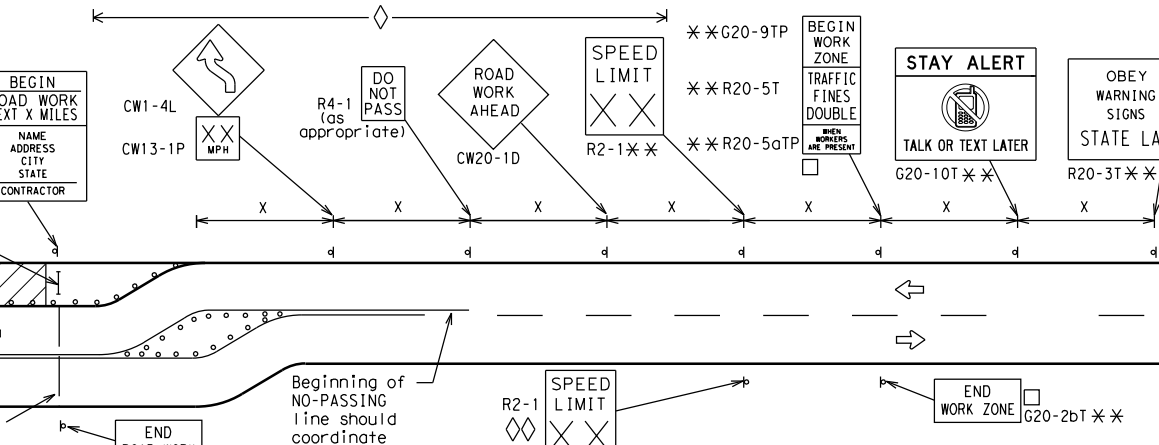

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC (2) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AMA	POTTER	9	

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

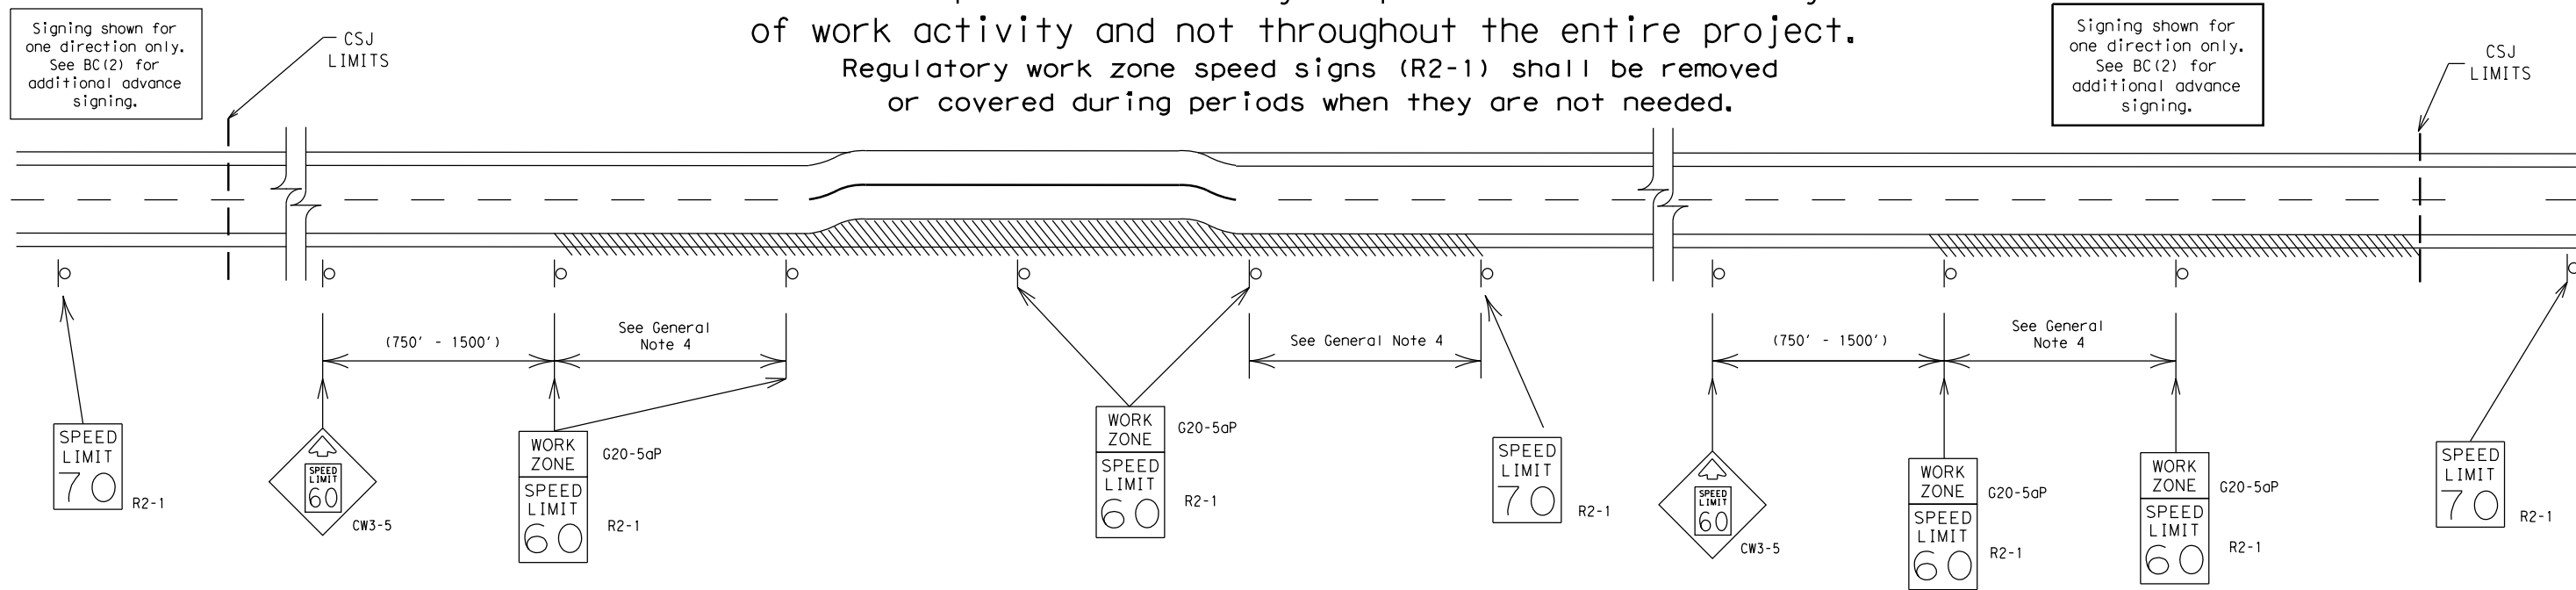

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for incorrect results or damages resulting from its use.
 DATE: 8/1/2023 2:22:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase CAD\01509-0027-12.dgn


SHEET 3 OF 12

		Traffic Safety Division Standard	
BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT			
BC (3) - 21			
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT November 2002	CONT	SECT	JOB
REVISIONS		0904 00	220
9-07 8-14	DIST	COUNTY	SHEET NO.
7-13 5-21	AMA	POTTER	10

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:22:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS2 Design Phase\CAD\standards\bc-21 (5).dgn


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

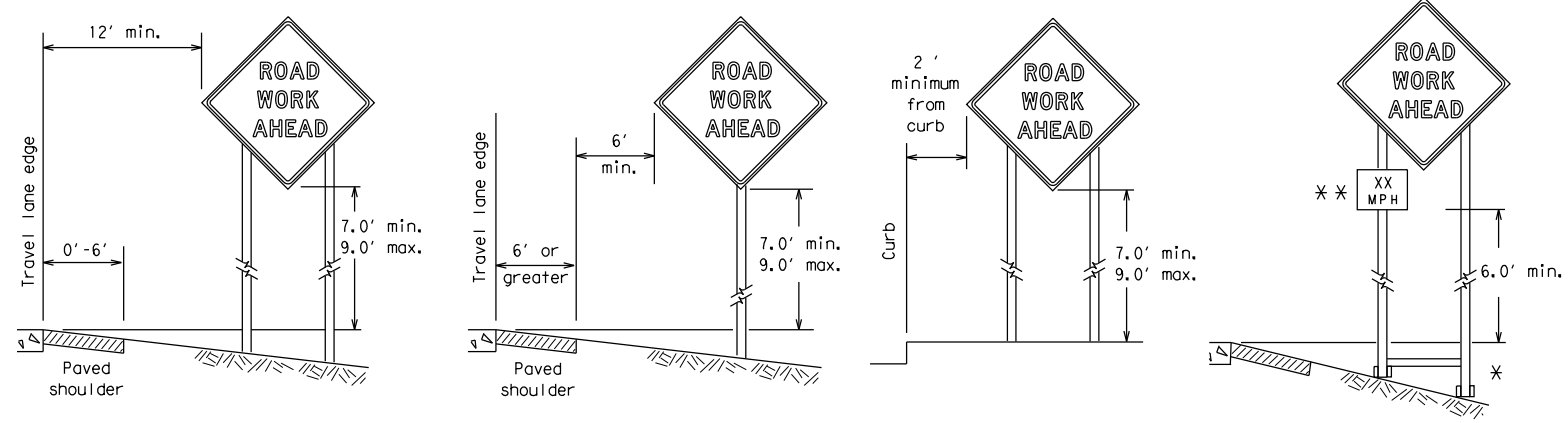

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

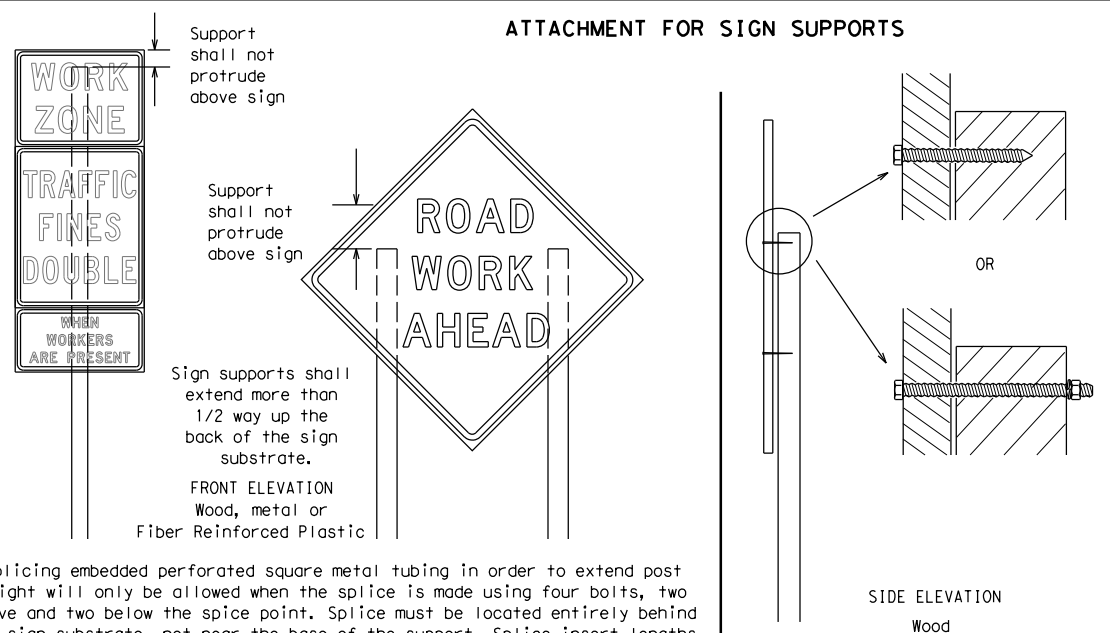

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - Long-term stationary - work that occupies a location more than 3 days.
 - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - Short, duration - work that occupies a location up to 1 hour.
 - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflectORIZED when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

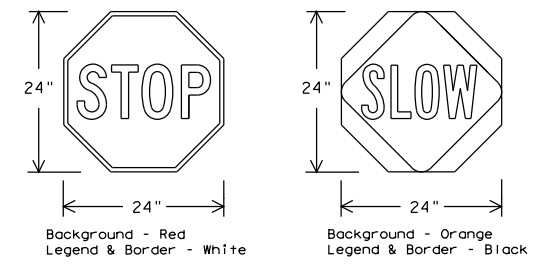

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.




BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	AMA	POTTER	11					


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:24 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\CAD\standards\bc-21(5).dgn

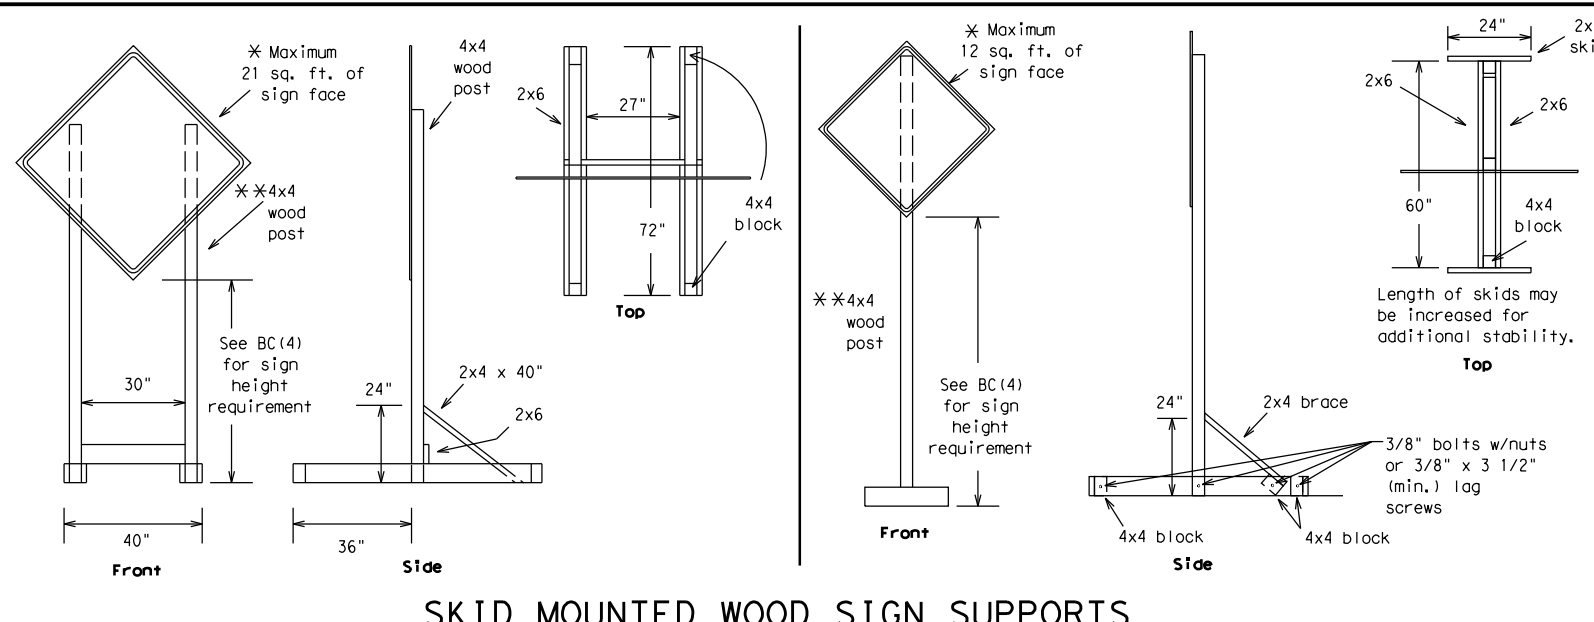


SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

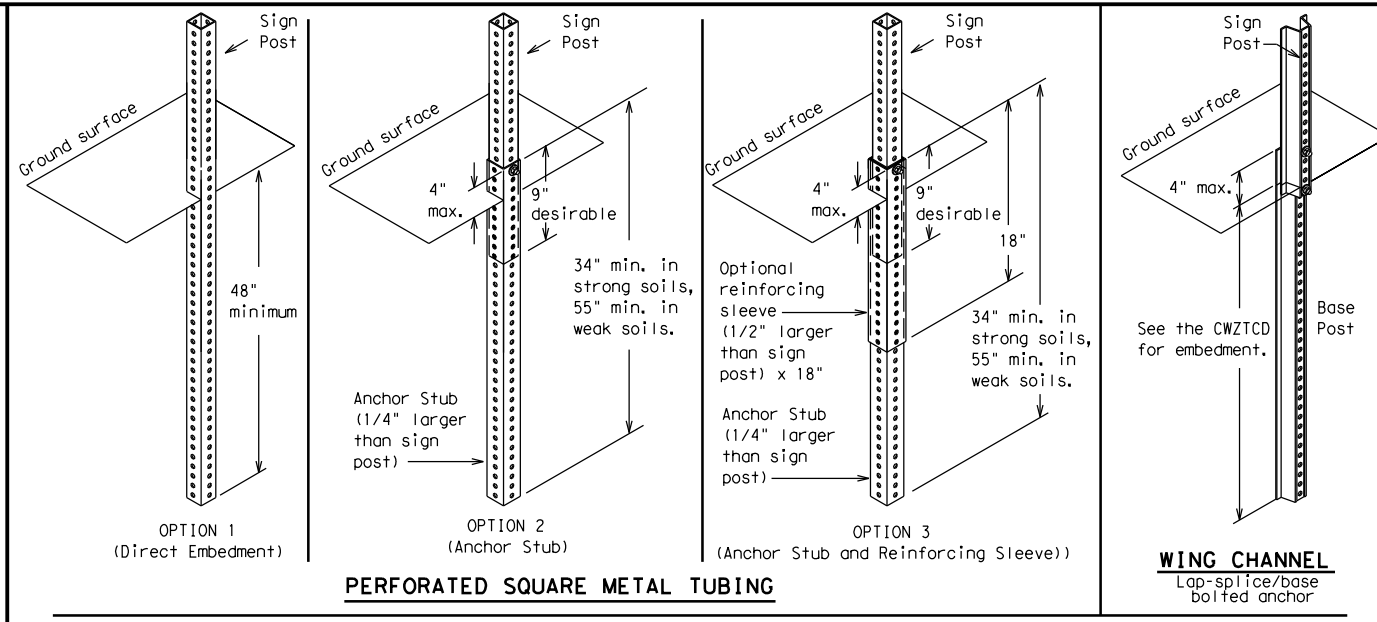

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

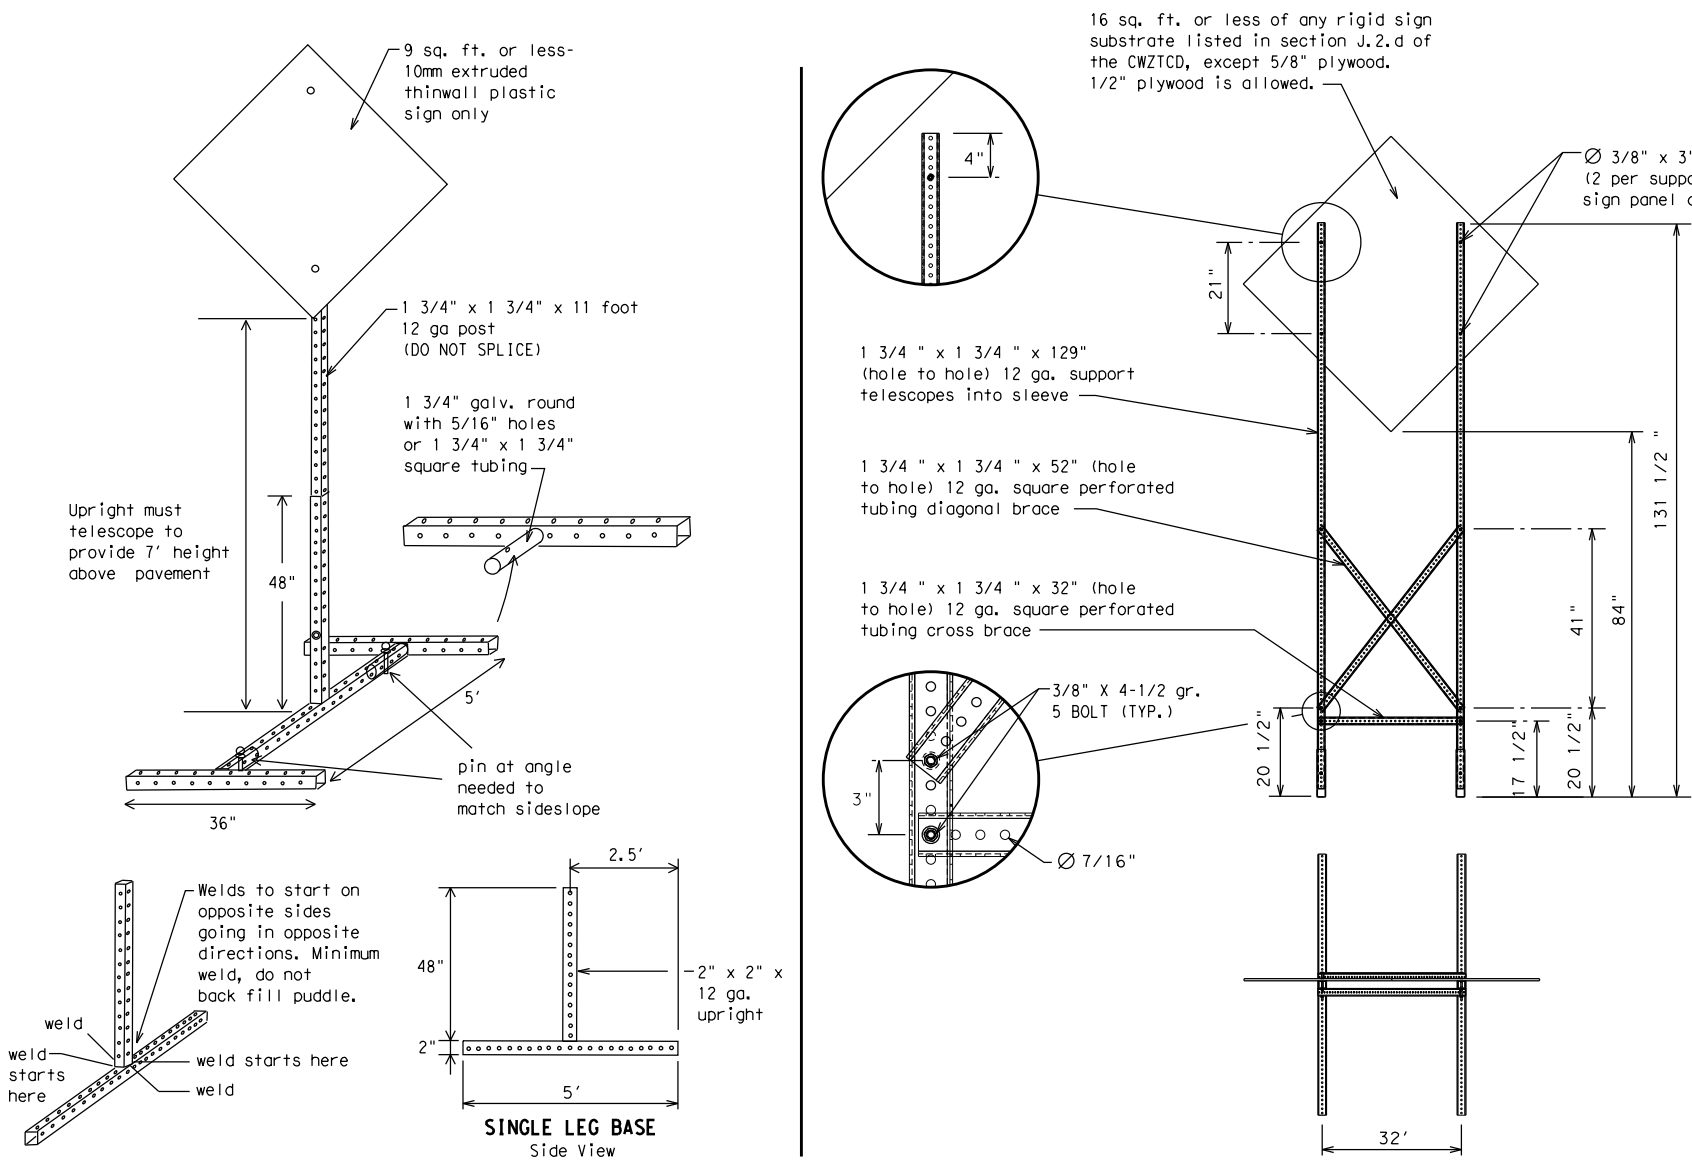

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AMA	POTTER	12	

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT
ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

FORM X LINES RIGHT
USE XXXXX RD EXIT
USE EXIT I-XX NORTH
USE I-XX E TO I-XX N
WATCH FOR TRUCKS
EXPECT DELAYS
PREPARE TO STOP
END SHOULDER USE
WATCH FOR WORKERS

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM - X PM
APR XX - XX X PM - X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM - XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:24 PM
FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\bc-21(15).dgn

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number



BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC (6) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	AMA	POTTER	13					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:22:25 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2_Design Phase\CAD\standards\bc-21 (5).dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

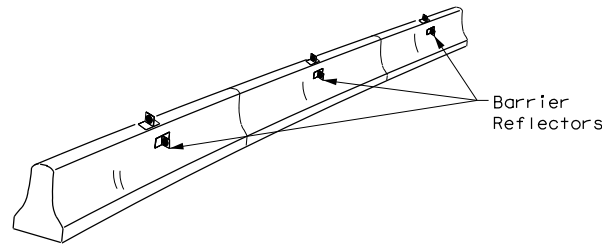

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

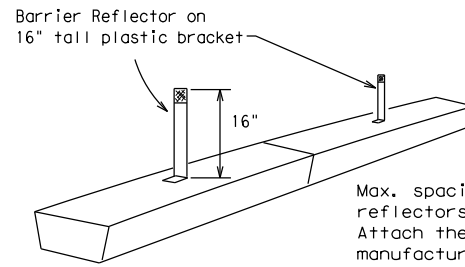


LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

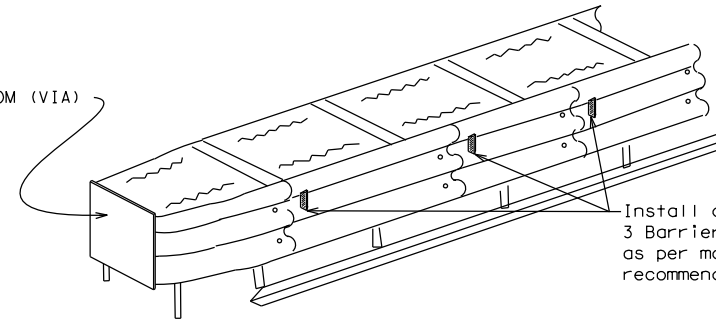

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

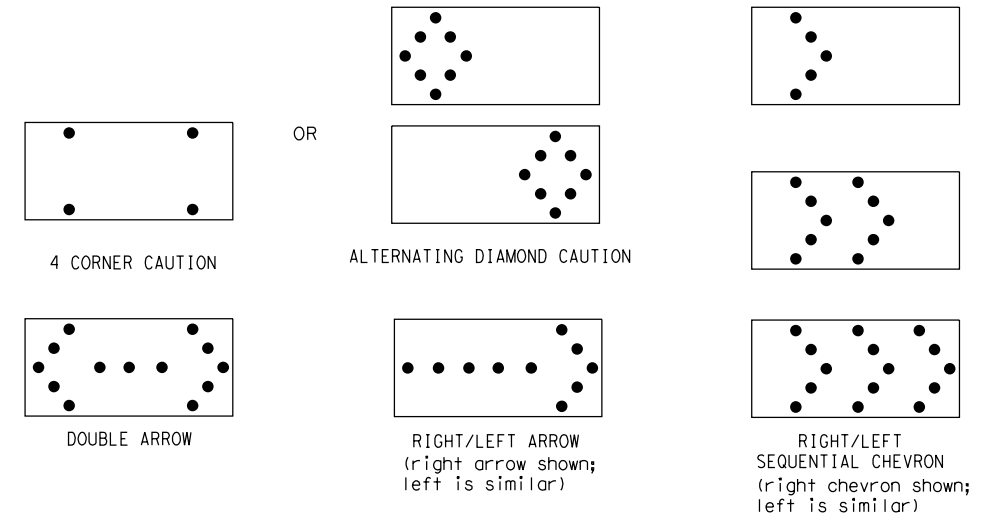

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	AMA	POTTER	14					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:22:25 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2_Design_Phase\CAD\standards\bc-21 (5).dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS




- Pre-qualified plastic drums shall meet the following requirements:
- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
 - The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
 - Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
 - Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
 - The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
 - The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
 - Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
 - Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
 - Drum body shall have a maximum unballasted weight of 11 lbs.
 - Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

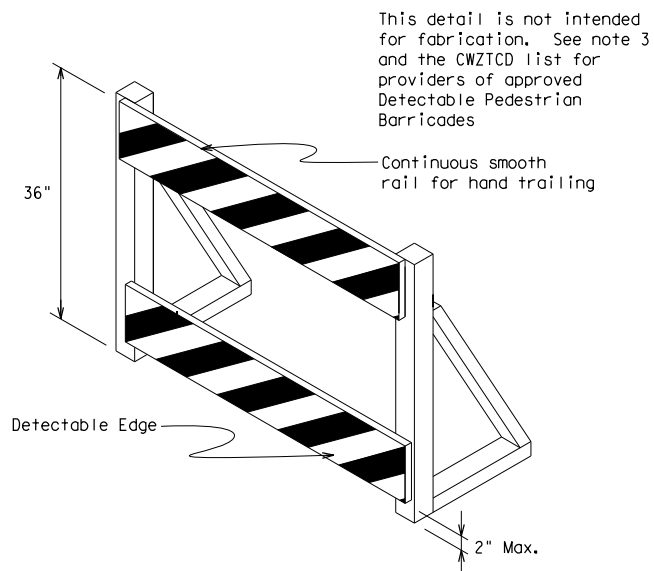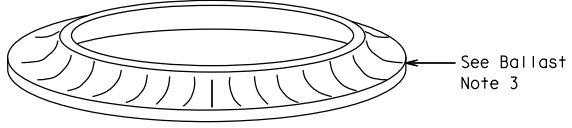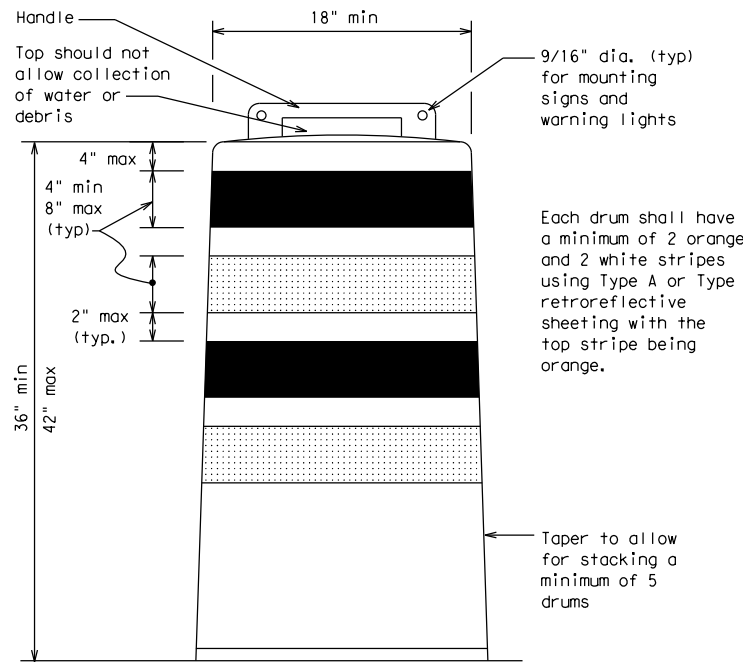

DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

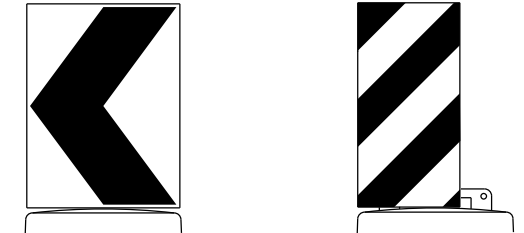

18" x 24" Sign (Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer

12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
4-03	8-14	DIST	COUNTY	SHEET NO.					
9-07	5-21	AMA	POTTER	15					
7-13									


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:26 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\bc-21 (5).dgn

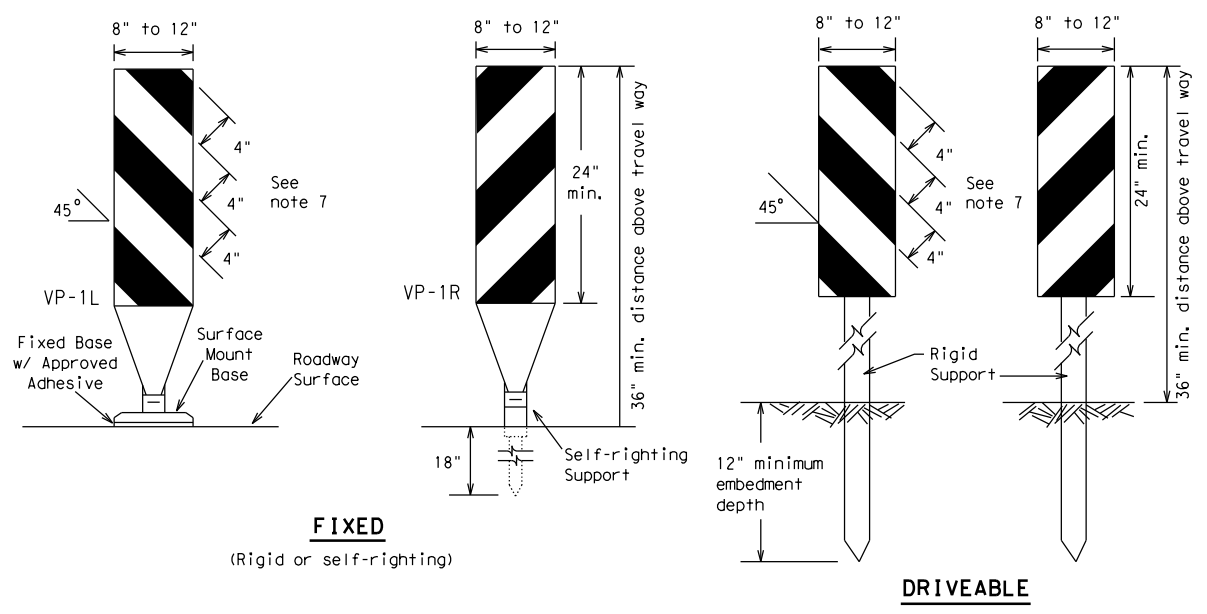

FIXED
(Rigid or self-righting)


DRIVEABLE

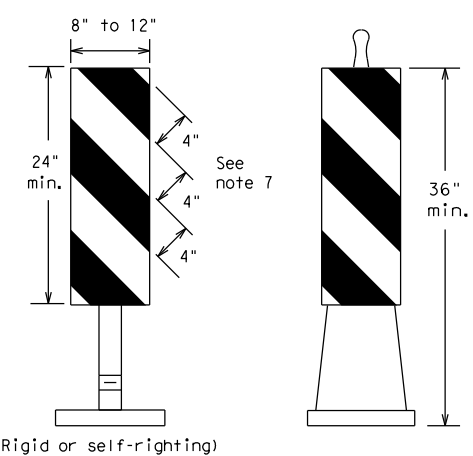

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

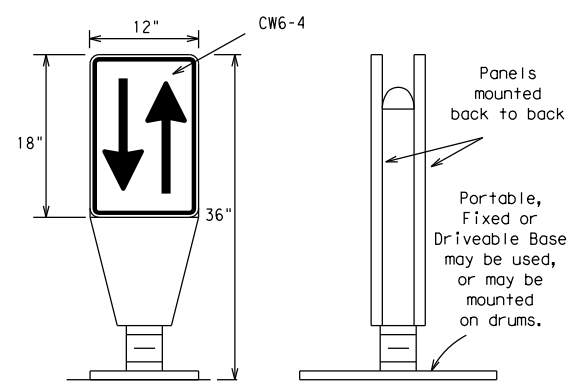


OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

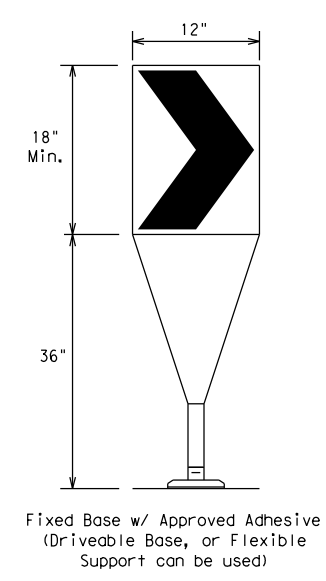

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

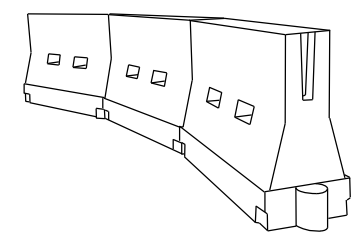

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * X			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

*X Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	AMA	POTTER		16				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:22:26 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\CAD\standards\bc-21 (5).dgn


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

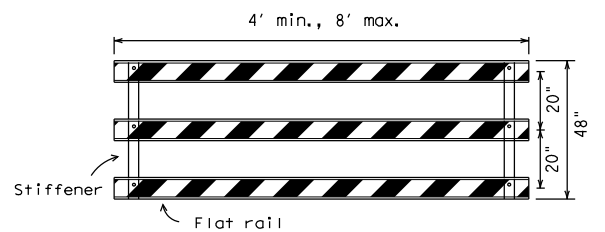


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

Each roadway of a divided highway shall be barricaded in the same manner.

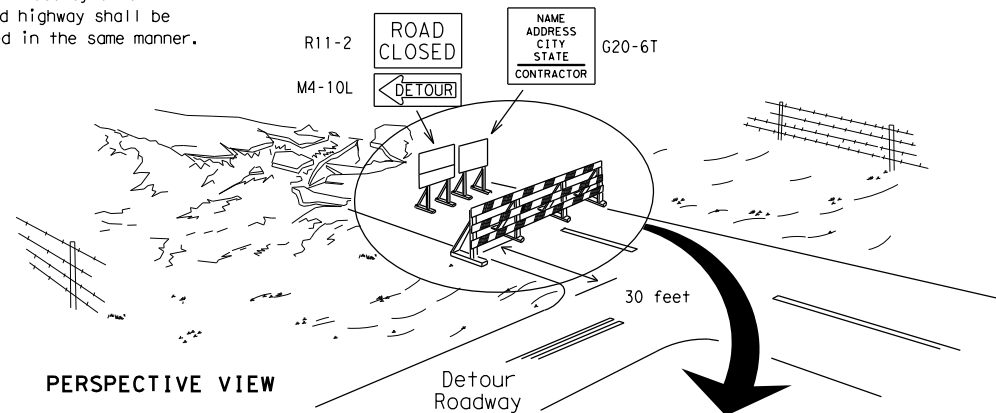

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

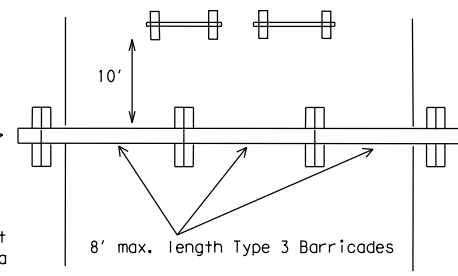


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

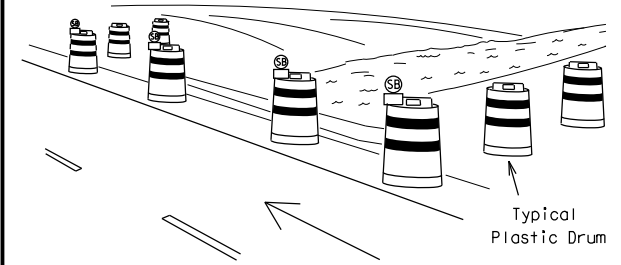

PERSPECTIVE VIEW

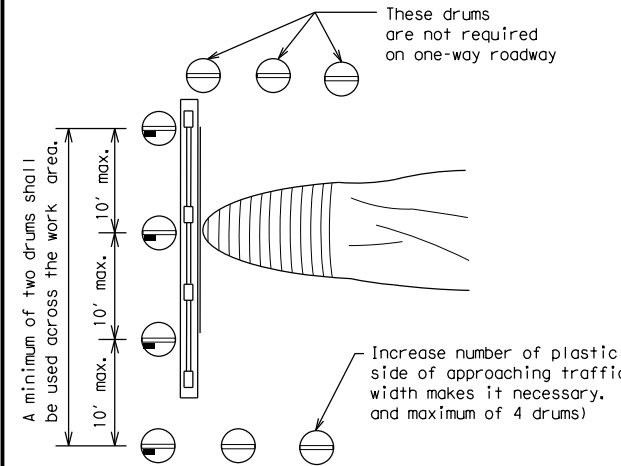


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

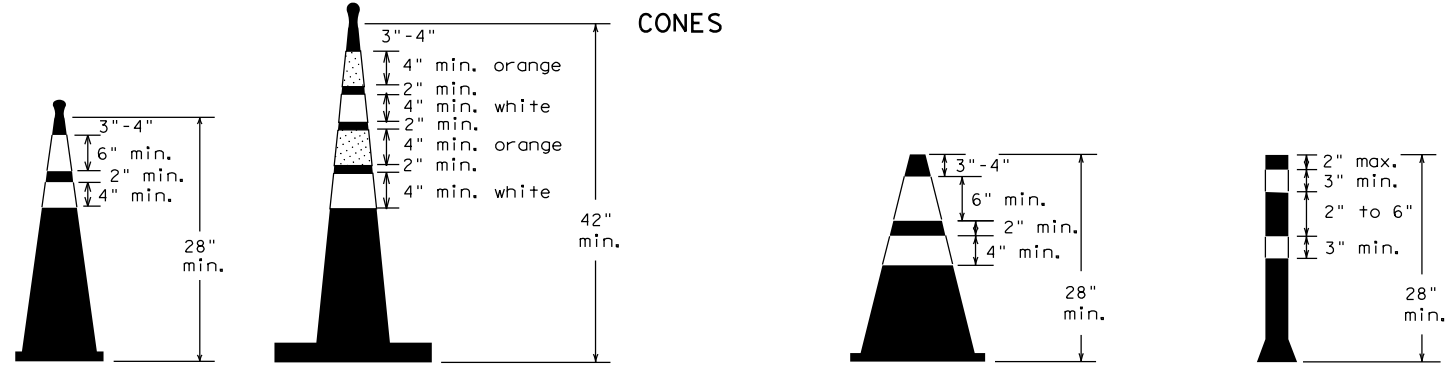


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.

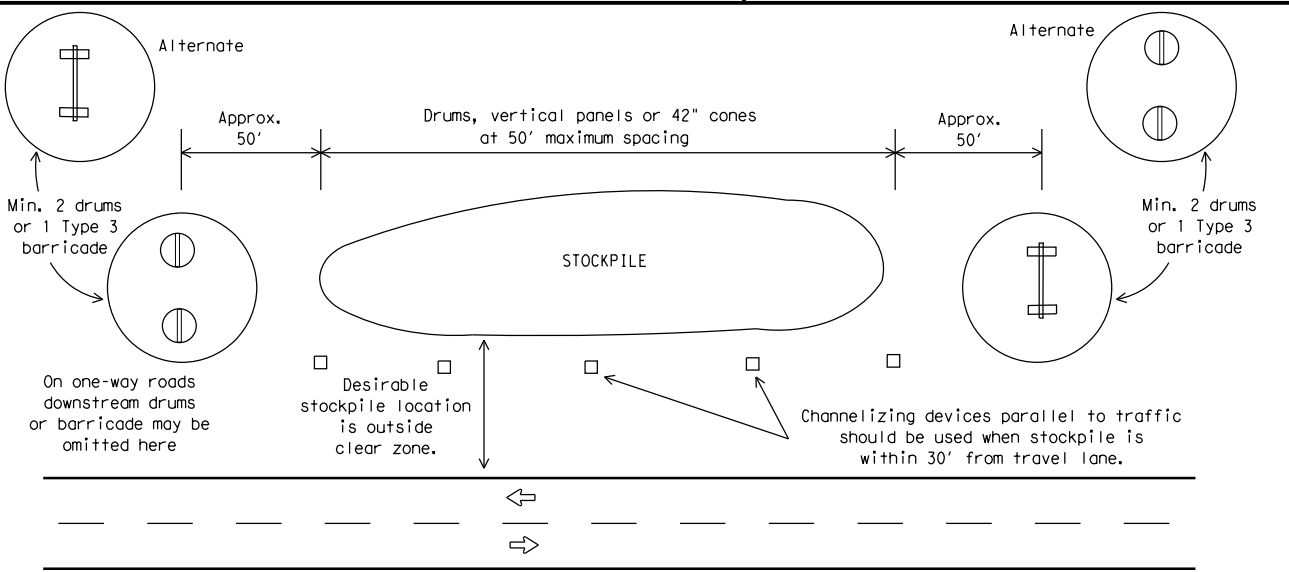

TRAFFIC CONTROL FOR MATERIAL STOCKPILES



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (10) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AMA	POTTER	17	

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

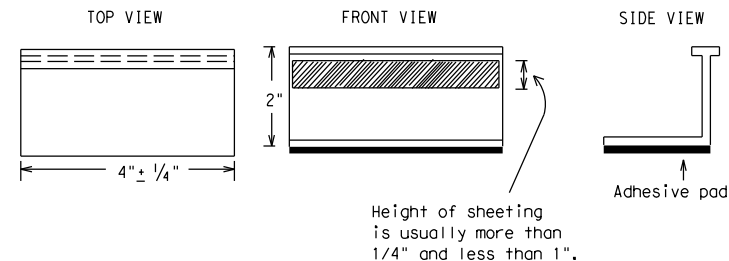

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12




BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	AMA	POTTER	18	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 8/1/2023 2:22:27 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2_Design Phase\CAD\standards\bc-21(5).dgn

PAVEMENT MARKING PATTERNS

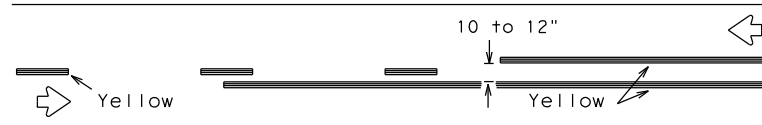


REFLECTORIZED PAVEMENT MARKINGS - PATTERN A

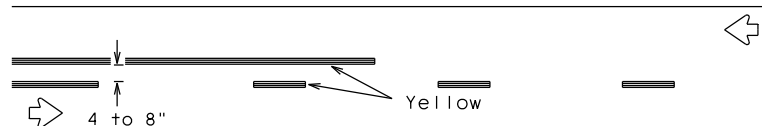


REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

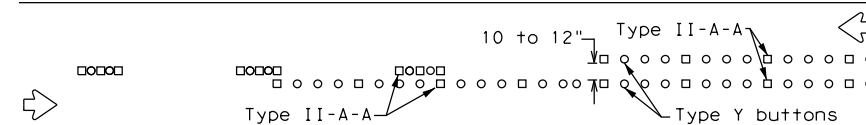


RAISED PAVEMENT MARKERS - PATTERN A

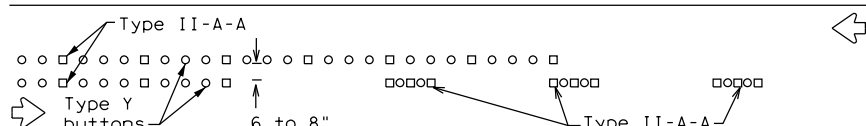


RAISED PAVEMENT MARKERS - PATTERN B

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

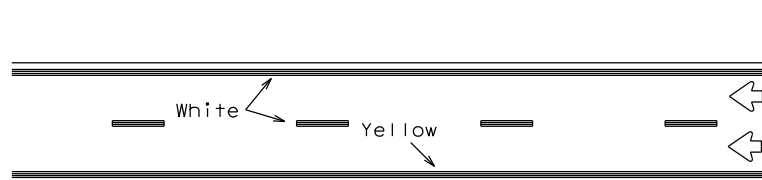


REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

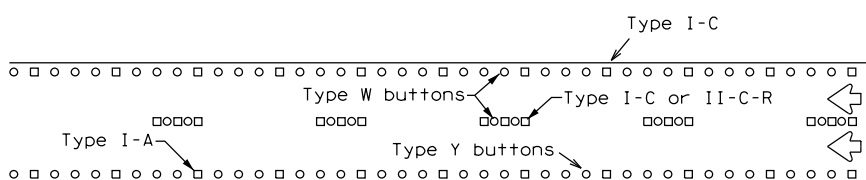


RAISED PAVEMENT MARKERS

EDGE & LANE LINES FOR DIVIDED HIGHWAY

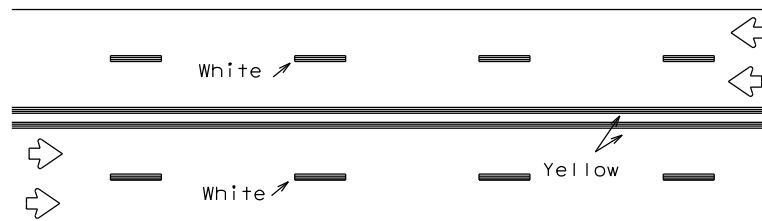


REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

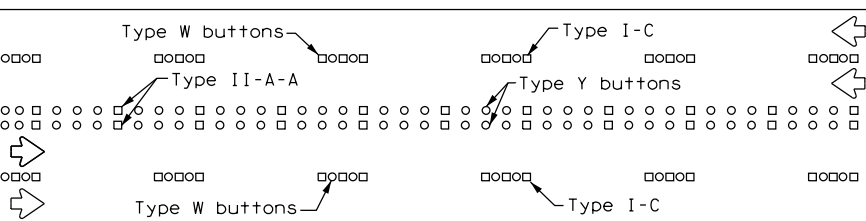


RAISED PAVEMENT MARKERS

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

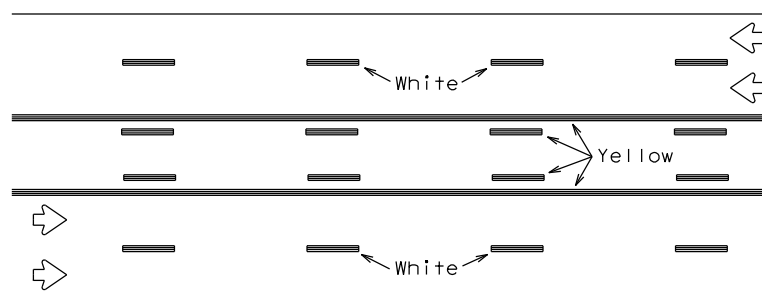

REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectORIZED pavement markings.

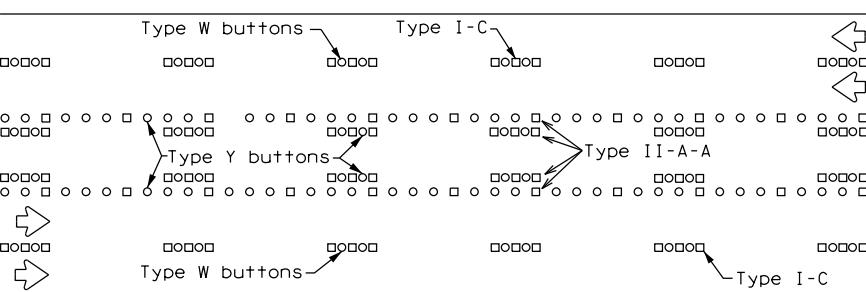



RAISED PAVEMENT MARKERS

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

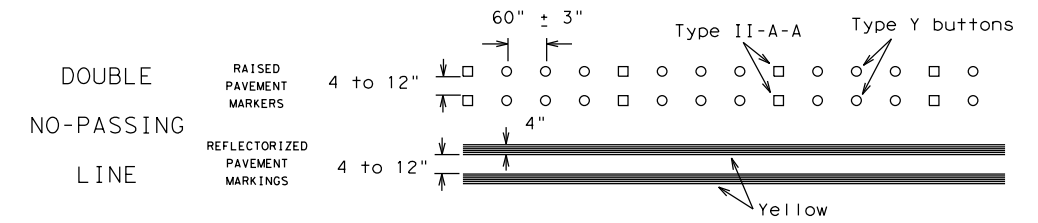


SOLID LINES

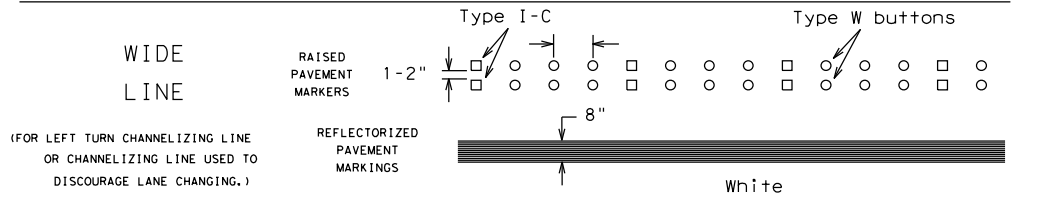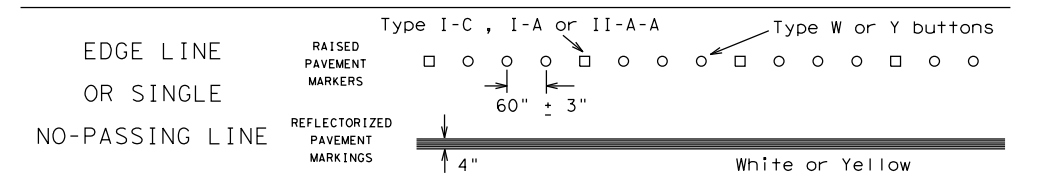

BROKEN LINES

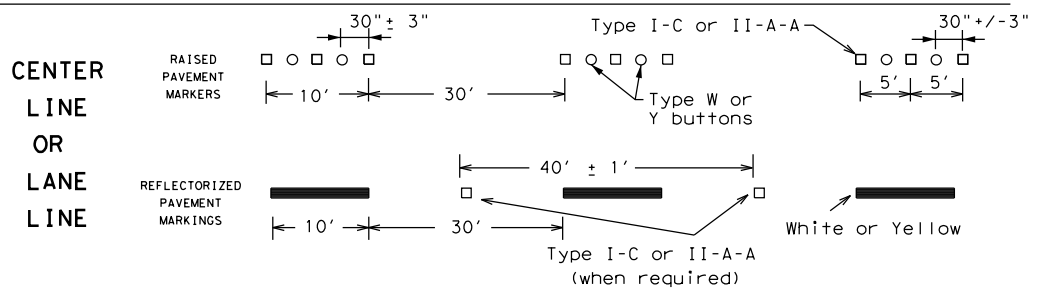


AUXILIARY OR LANEDROP LINE

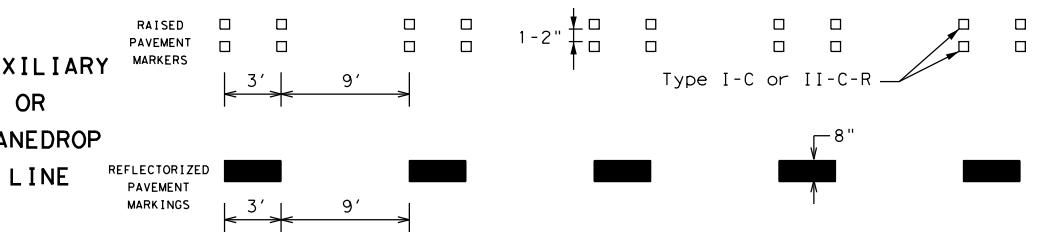

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

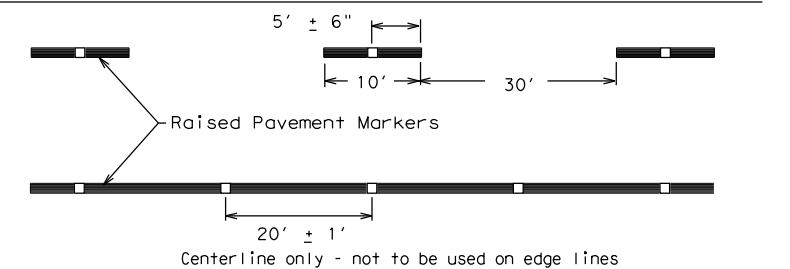

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC (12) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	AMA	POTTER	19	
11-02 8-14				


Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TXDOT for any purpose whatsoever. TXDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:27 PM
FILE: K:\01509\01509-002T-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2_Design Phase\CAD\standards\bc-21 (5).dgn


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for purposes other than those intended for its use.

DATE: 8/1/2023 2:22:28 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2_Design Phase\01509-0027-12\Traffic Control Plans\TCP (1-1) - 18.dgn

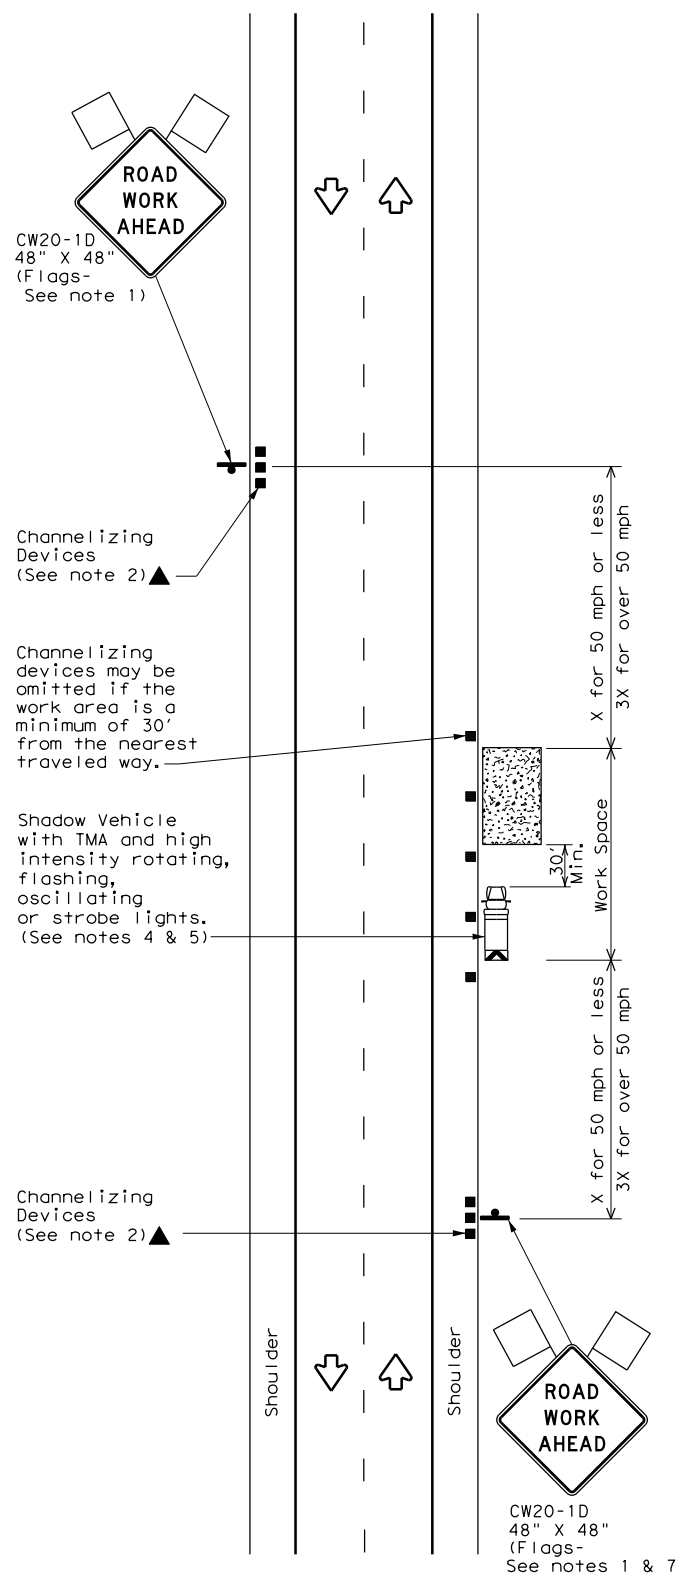


TCP (1-1a)

WORK SPACE NEAR SHOULDER
 Conventional Roads

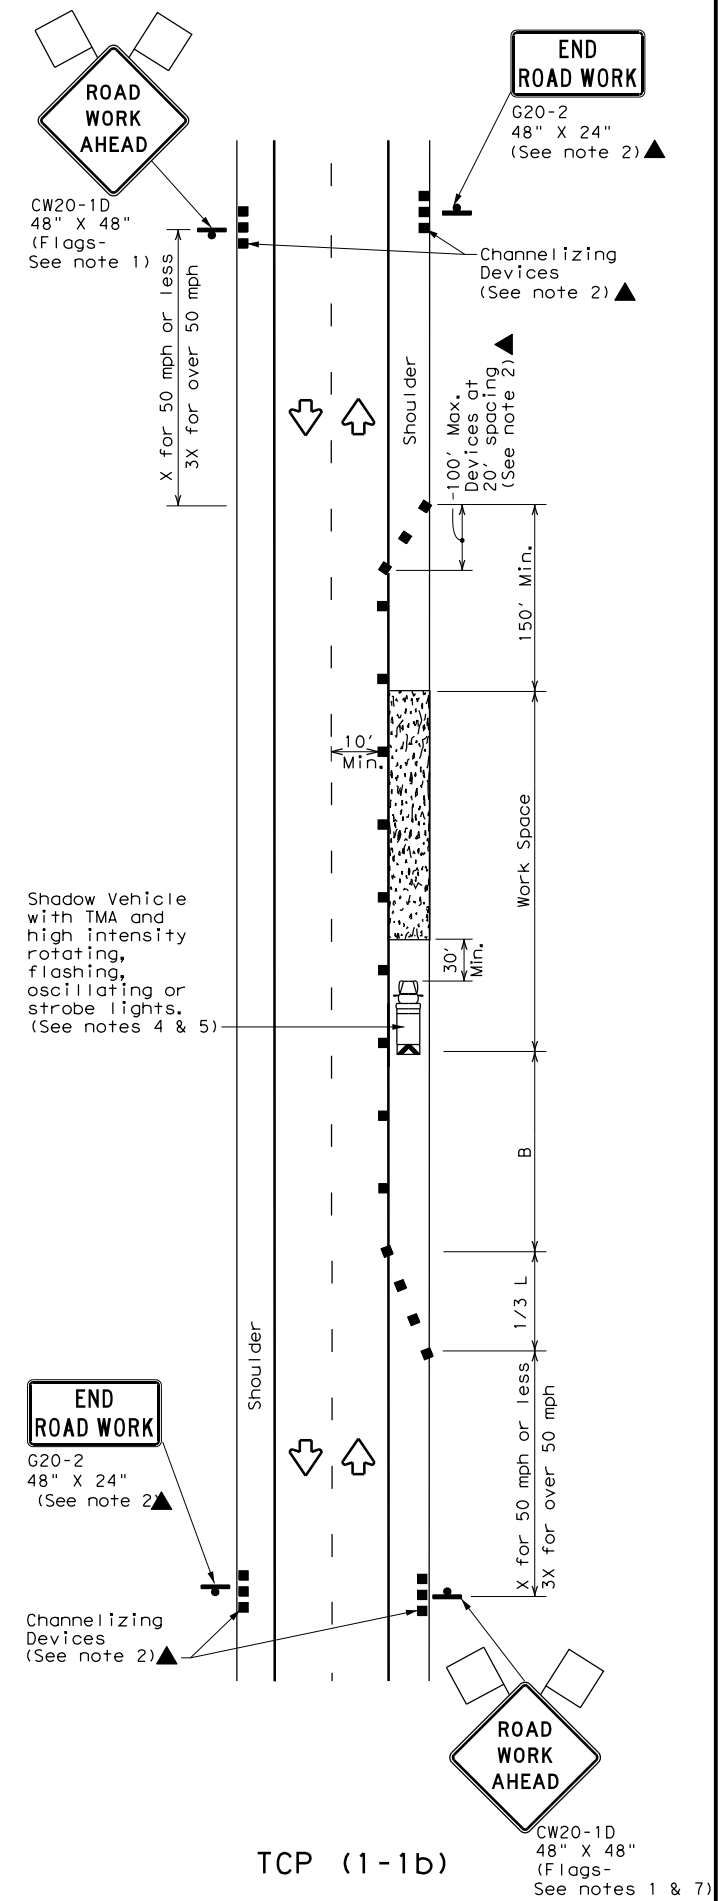

TCP (1-1b)

WORK SPACE ON SHOULDER
 Conventional Roads

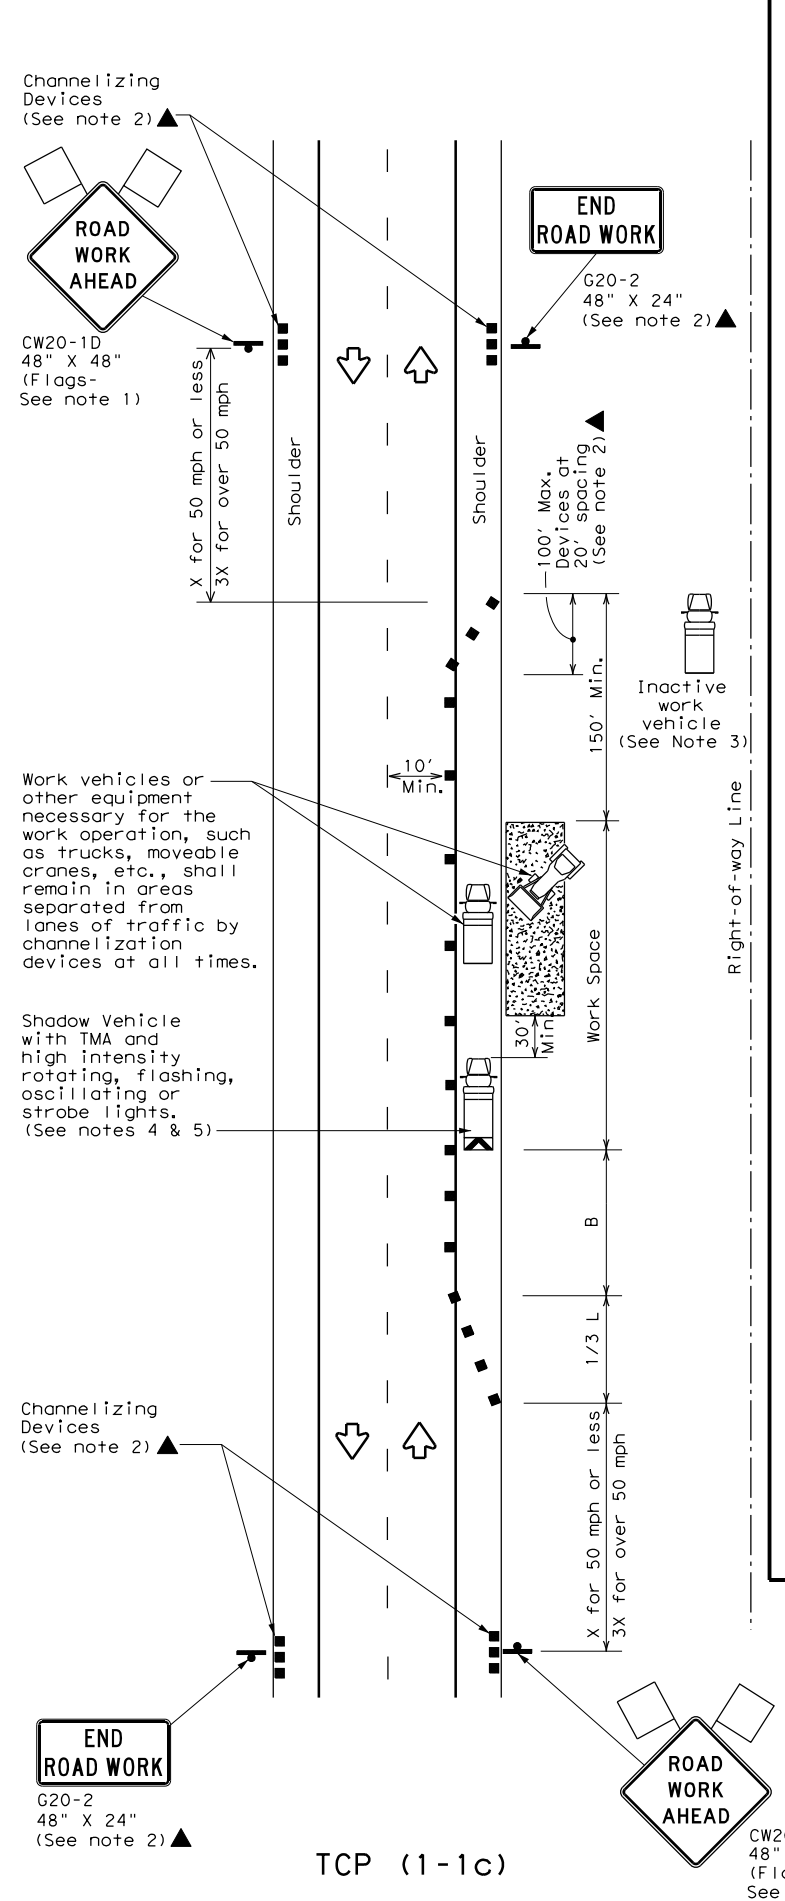

TCP (1-1c)

WORK VEHICLES ON SHOULDER
 Conventional Roads

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.




TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK


TCP (1-1) - 18

FILE: tcp1-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CON:	SECT:	JOB:	HIGHWAY:
REVISIONS	0904	00	220	VARIOUS
2-94 4-98	DIST:	COUNTY:	SHEET NO.:	
8-95 2-12	AMA	POTTER	20	
1-97 2-18				

DATE: 8/1/2023 2:22:28 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS V2 Design Phase 01.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for incorrect results or damages resulting from its use.

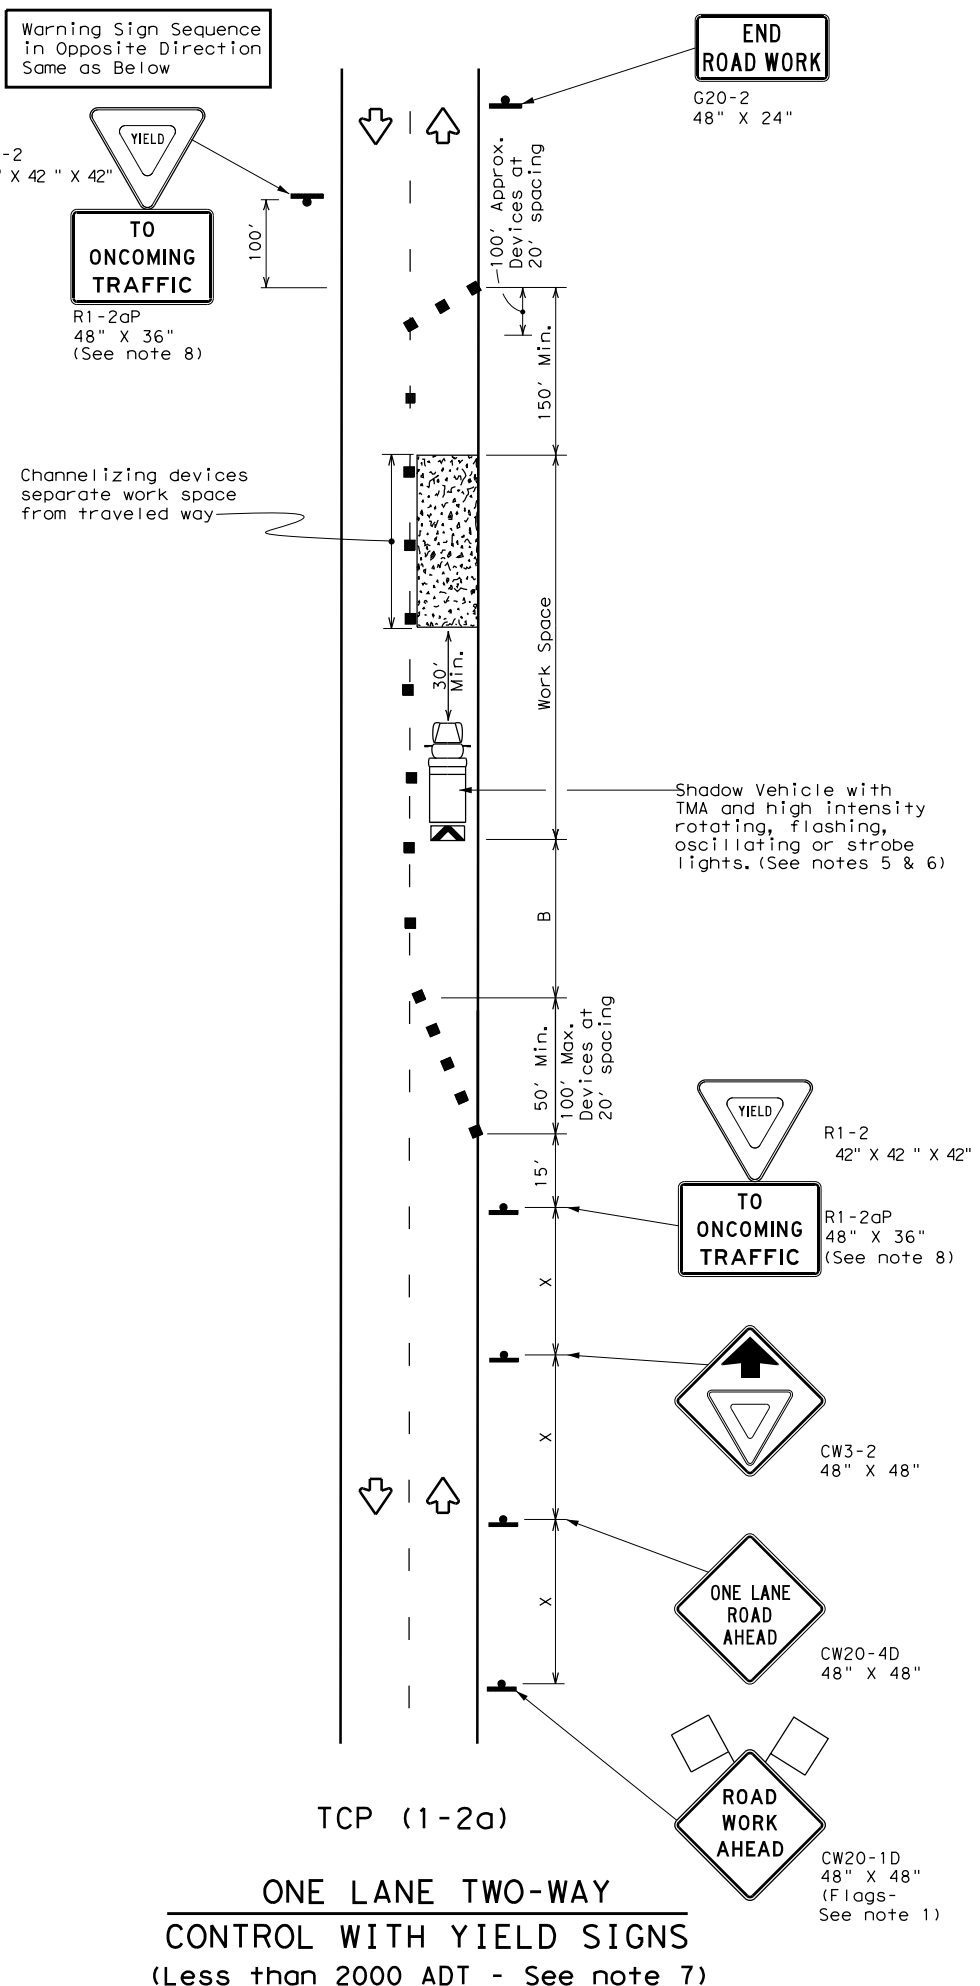

TCP (1-2a)
ONE LANE TWO-WAY
CONTROL WITH YIELD SIGNS
 (Less than 2000 ADT - See note 7)

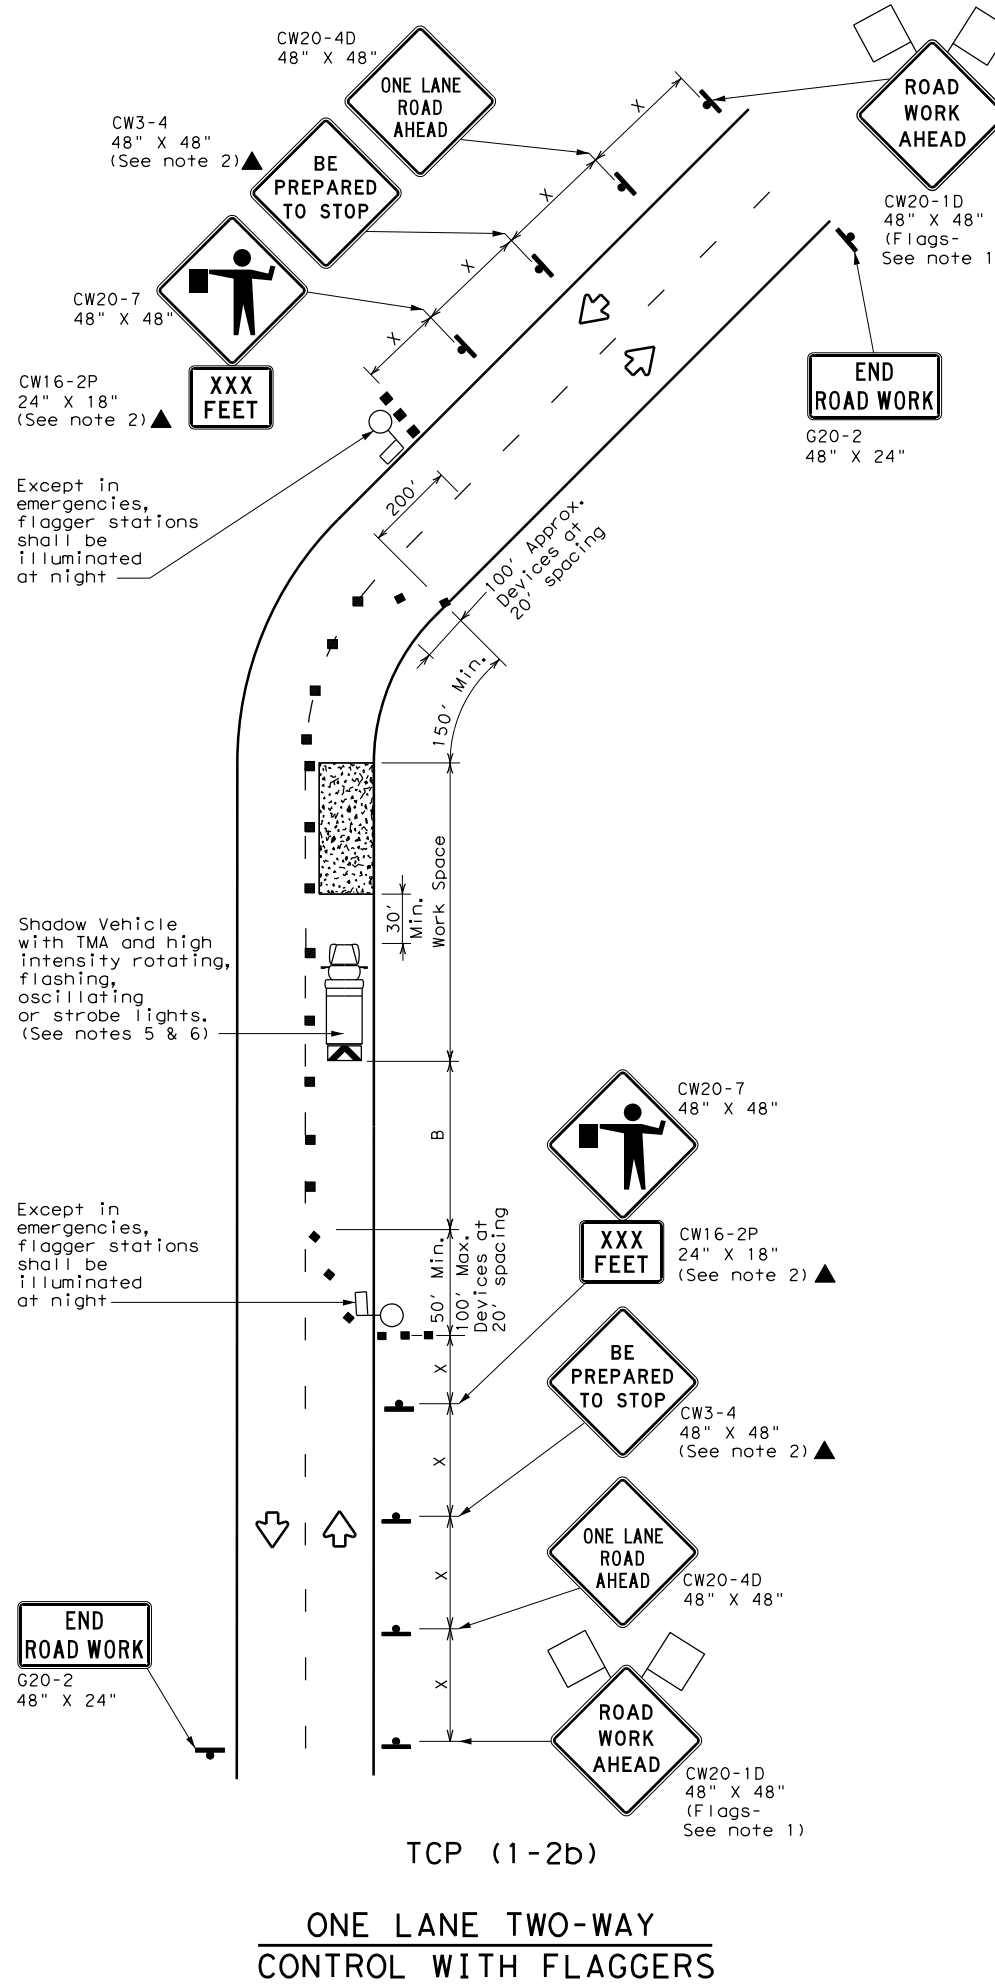

TCP (1-2b)
ONE LANE TWO-WAY
CONTROL WITH FLAGGERS

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
 - Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger or R1-2 "YIELD" sign is less than 1500 feet.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- TCP (1-2a)**
- R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet.
 - R1-2 "YIELD" sign with R1-2aP "TO ONCOMING TRAFFIC" plaque shall be placed on a support at a 7 foot minimum mounting height.
- TCP (1-2b)**
- Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
 - Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

Texas Department of Transportation



Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
ONE-LANE TWO-WAY
TRAFFIC CONTROL
TCP (1-2) - 18

FILE: tcp1-2-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CON:	SECT:	JOB:	HIGHWAY:
REVISIONS	0904	00	220	VARIOUS
4-90 4-98	DIST:	COUNTY:	SHEET NO.:	
2-94 2-12	AMA	POTTER	21	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for purposes other than those intended.

DATE: 8/1/2023 2:22:30 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase\AD\1509-0027-12\01509-0027-12.dgn

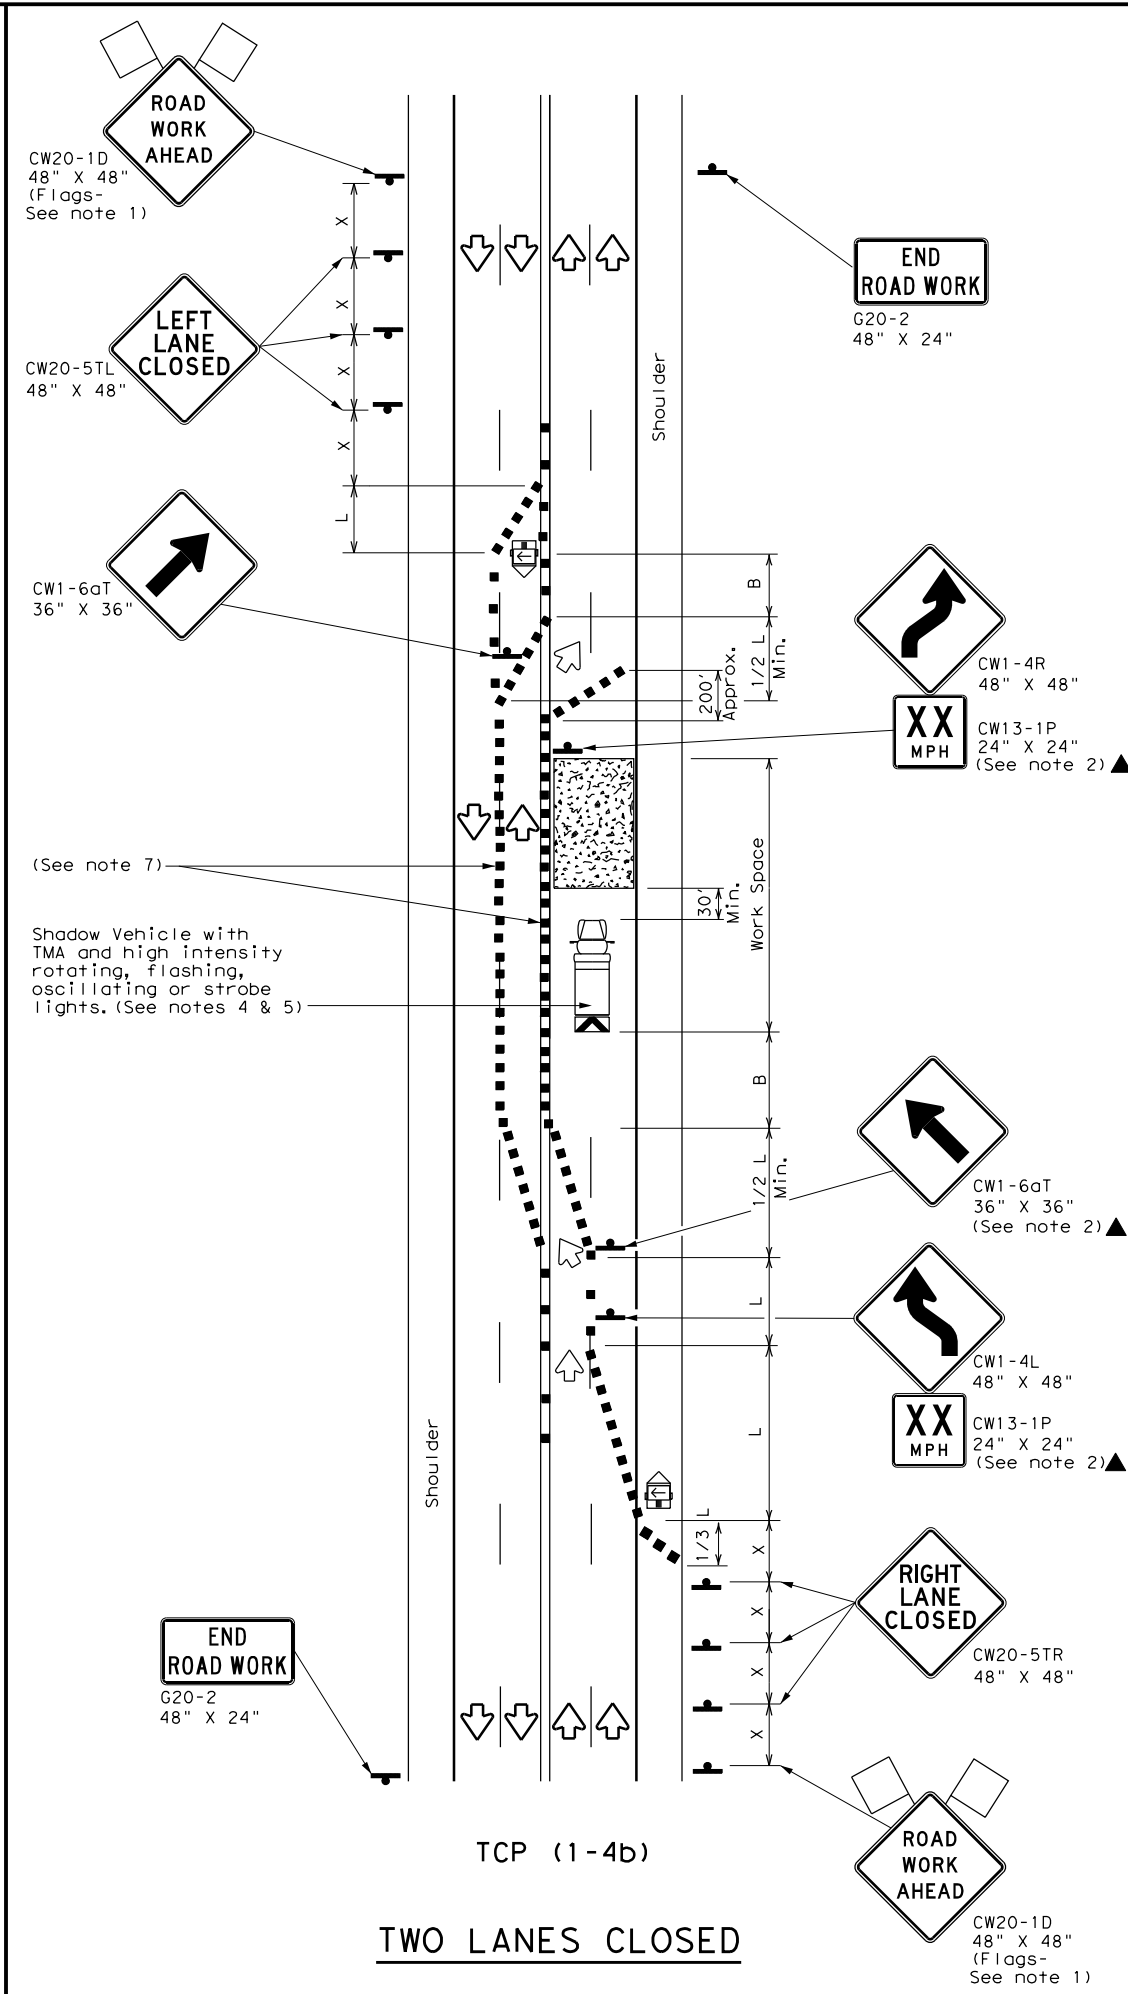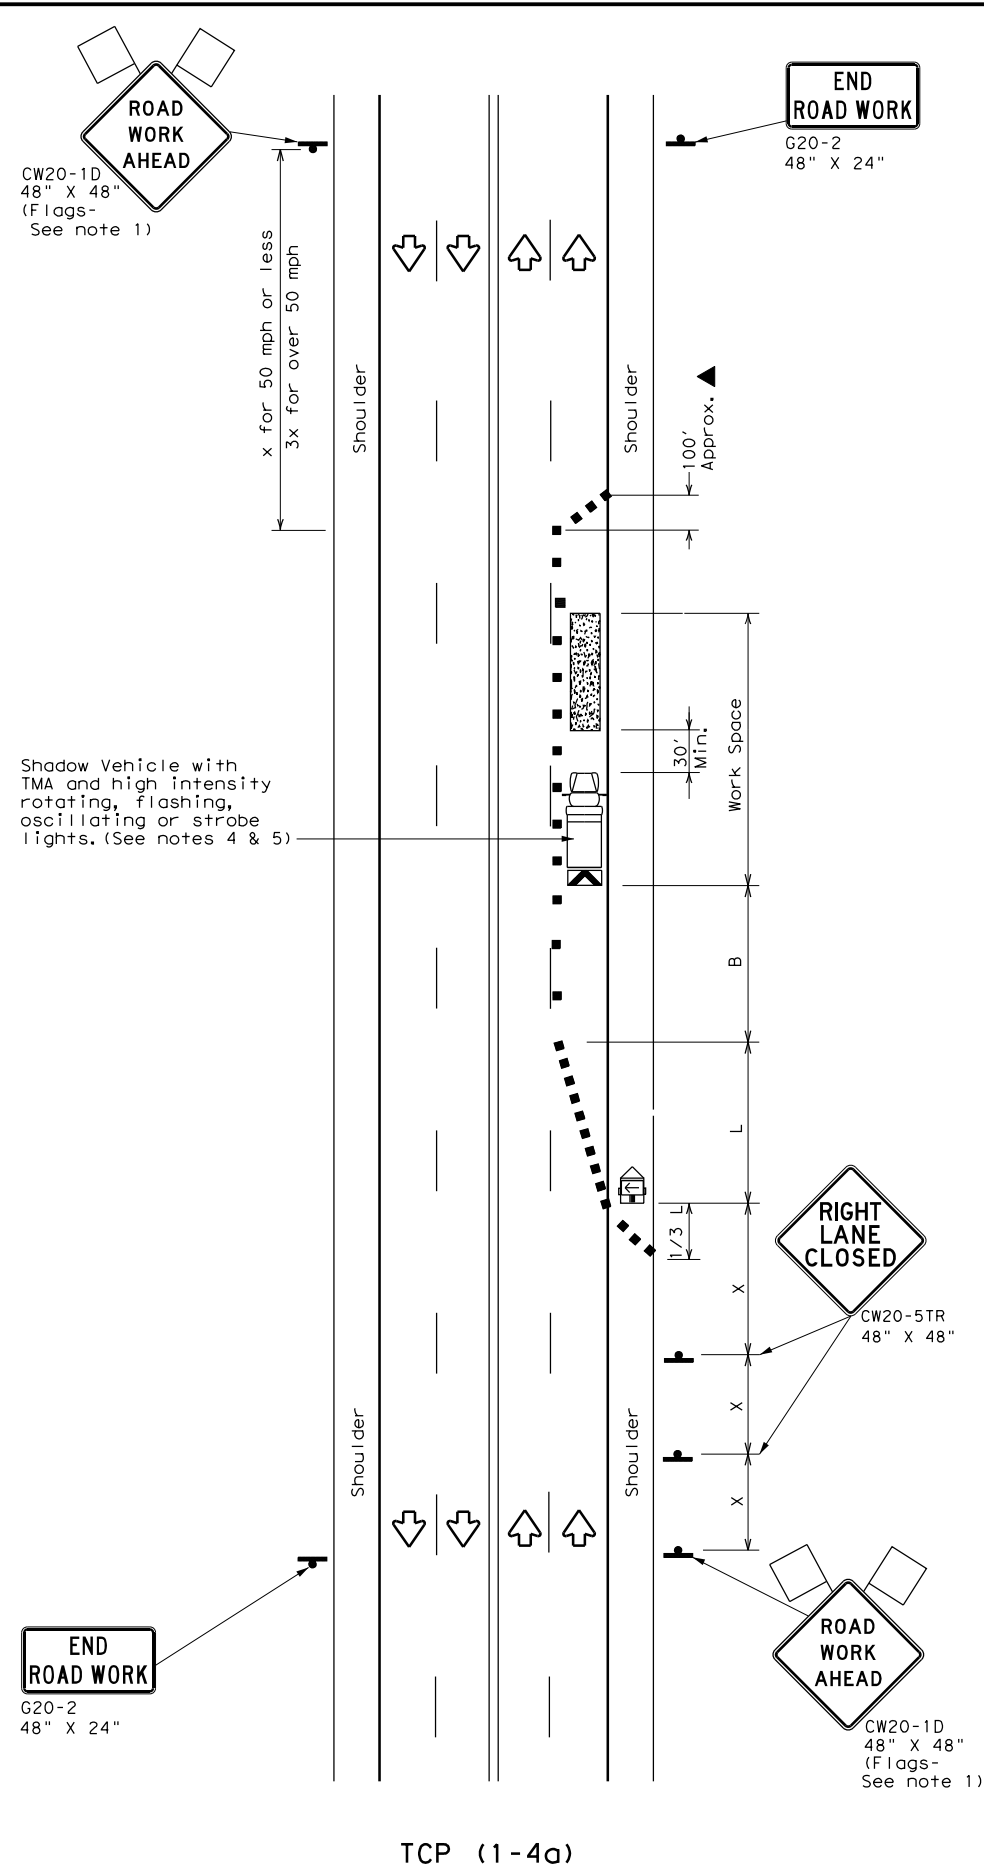

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	$L = WS$	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the visibility of the work zone is less than 1500 feet.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.

TCP (1-4a)

- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline where needed to protect the work space from opposing traffic with the arrow panel placed in the closed lane near the end of the merging taper.

TCP (1-4b)

- Where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2S where S is the speed in mph. This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

Texas Department of Transportation Traffic Operations Division Standard




TRAFFIC CONTROL PLAN
LANE CLOSURES ON MULTILANE CONVENTIONAL ROADS

TCP (1-4) - 18

FILE: tcp1-4-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CON:	SECT:	JOB:	HIGHWAY:
REVISIONS	0904	00	220	VARIOUS
2-94 4-98	DIST:	COUNTY:	SHEET NO.:	
8-95 2-12	AMA	POTTER	23	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for purposes other than those intended. TxDOT is not responsible for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:30 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\AD\1509-0027-12\01509-0027-12.dgn

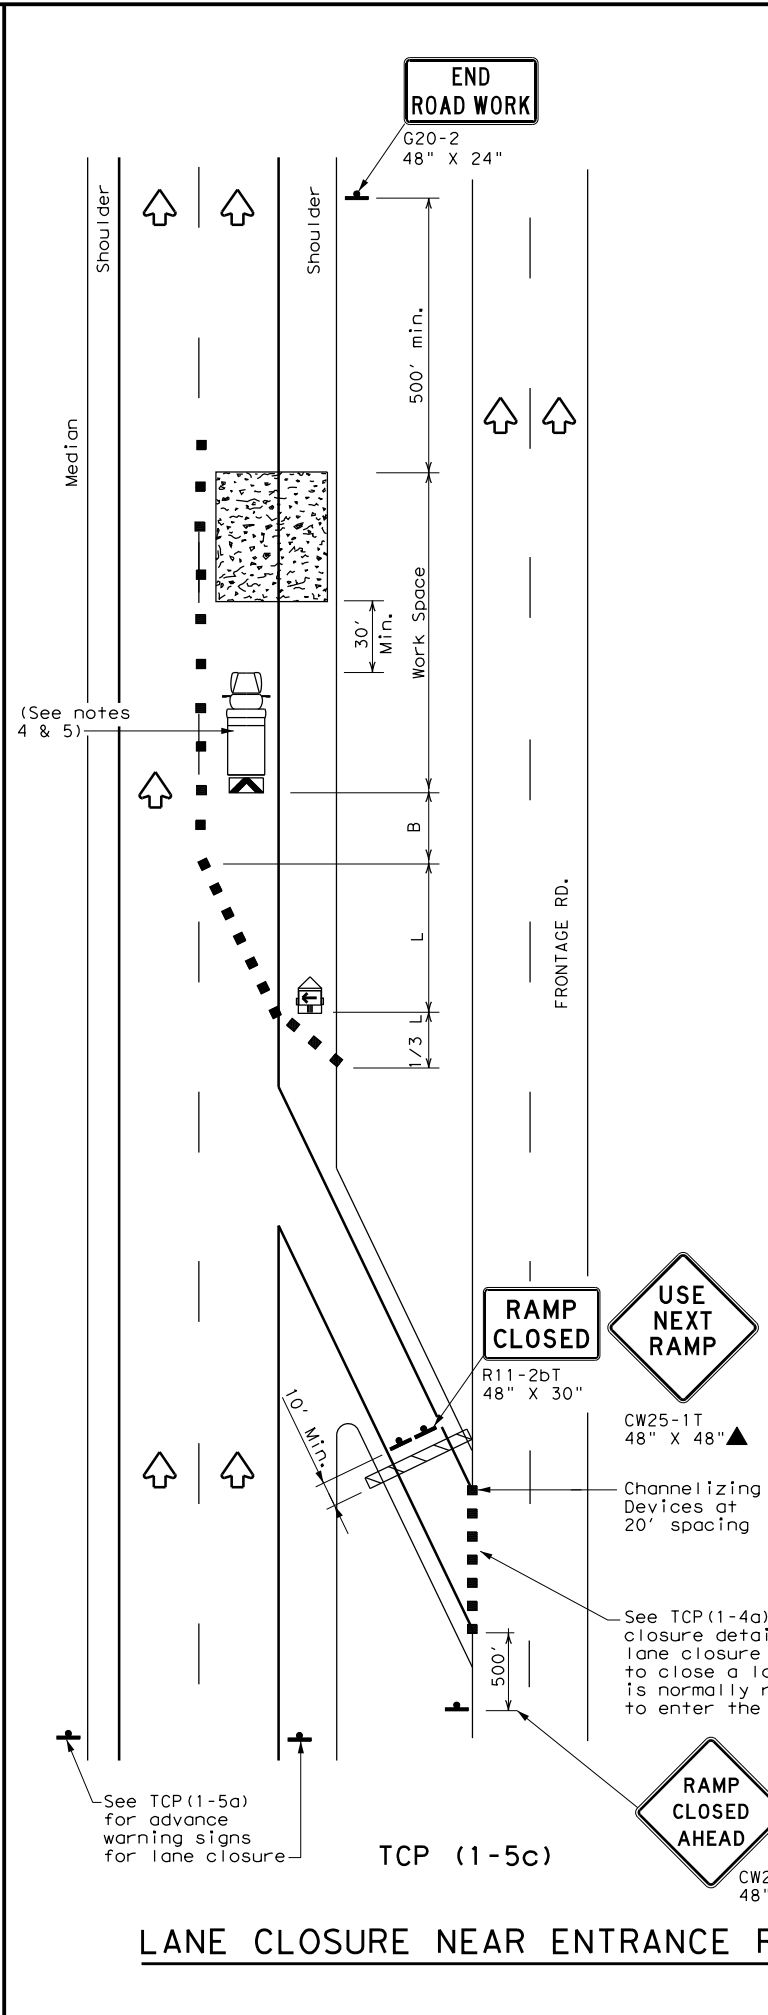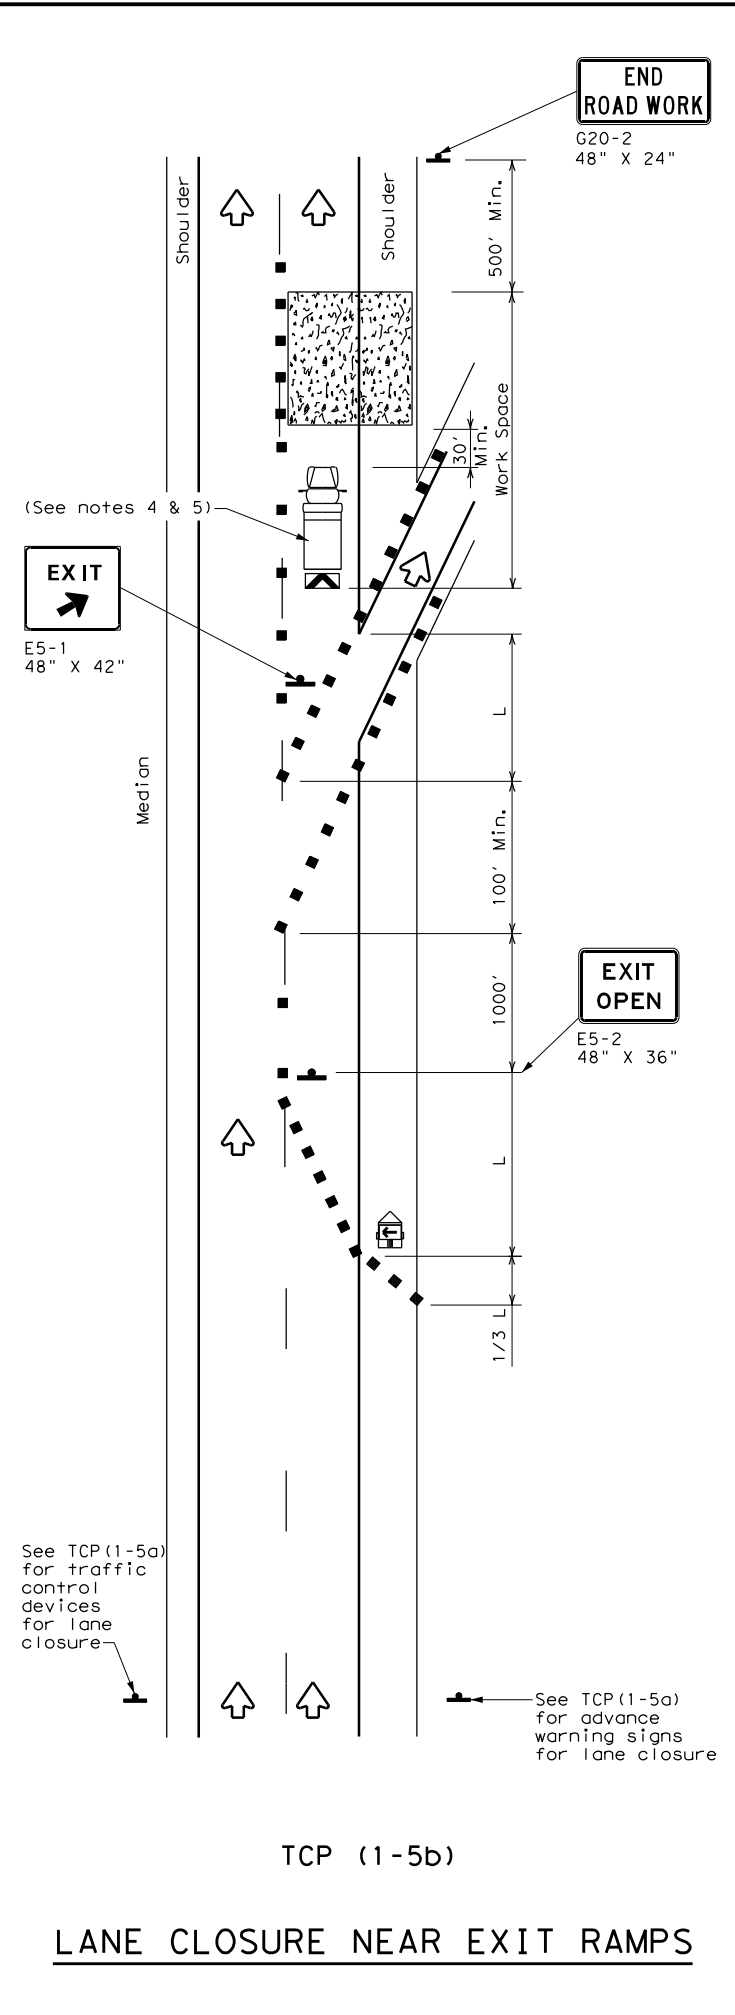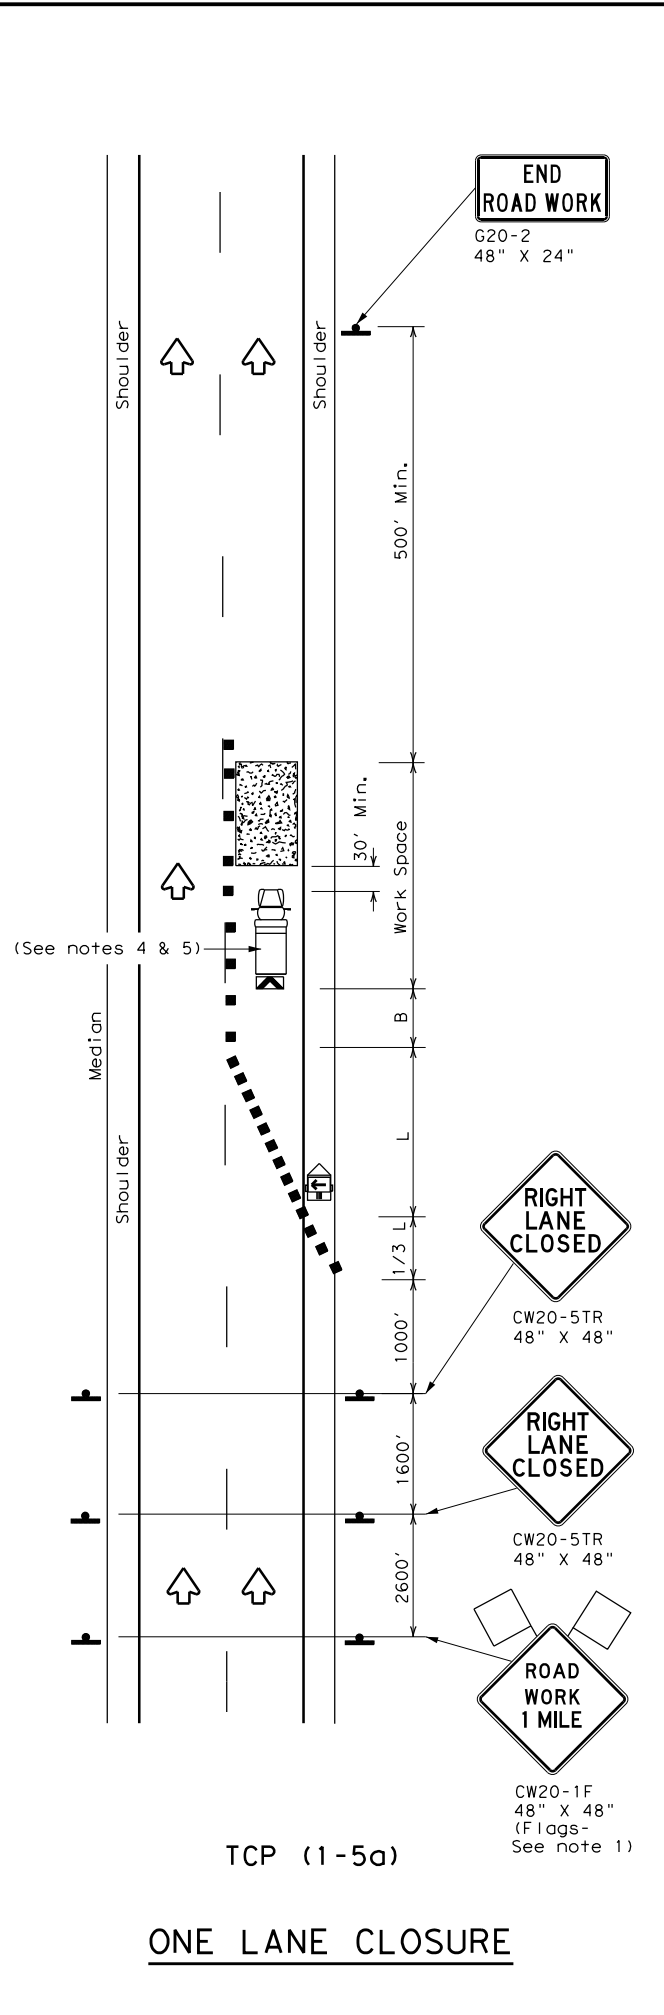

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓		

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

Traffic Operations Division Standard


TRAFFIC CONTROL PLAN
LANE CLOSURES FOR
DIVIDED HIGHWAYS

TCP (1-5) - 18


FILE: tcp1-5-18.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2012	CON: 0904	SECT: 00	JOB: 220	HIGHWAY: VARIOUS
2-18	DIST: AMA		COUNTY: POTTER	SHEET NO.: 24

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for purposes other than those intended. TxDOT is not responsible for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:31 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\ADP\01509-0027-12\01509-0027-12.dgn

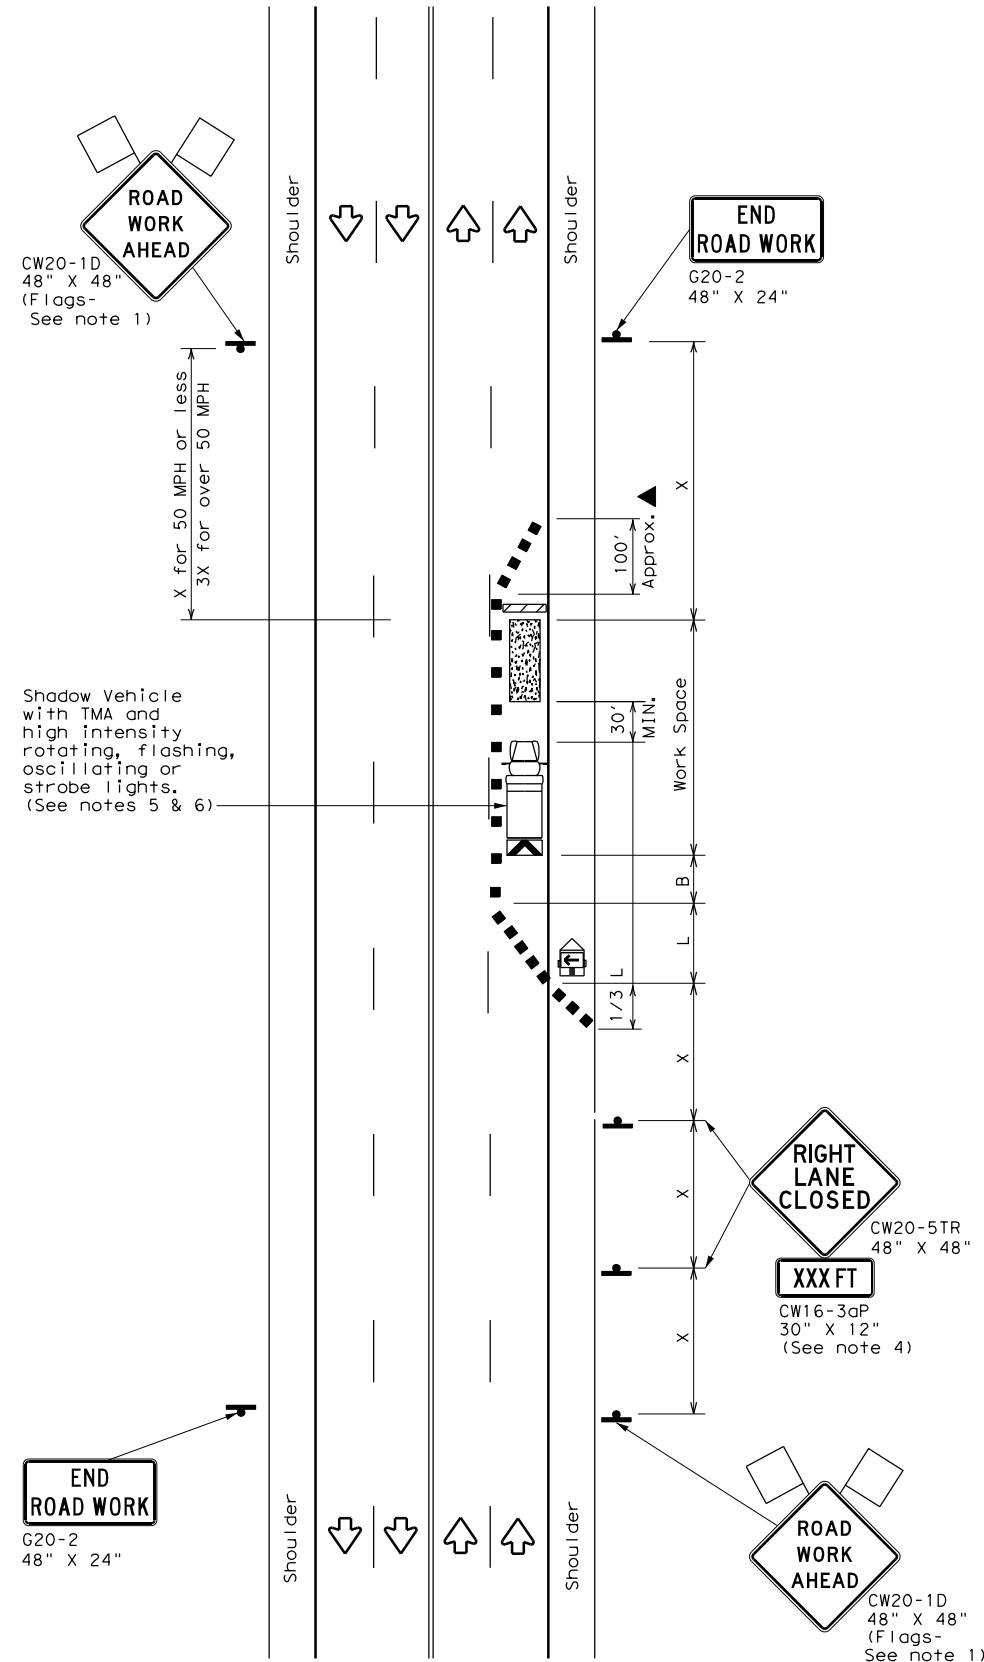

TCP (2-4a)
 ONE LANE CLOSED

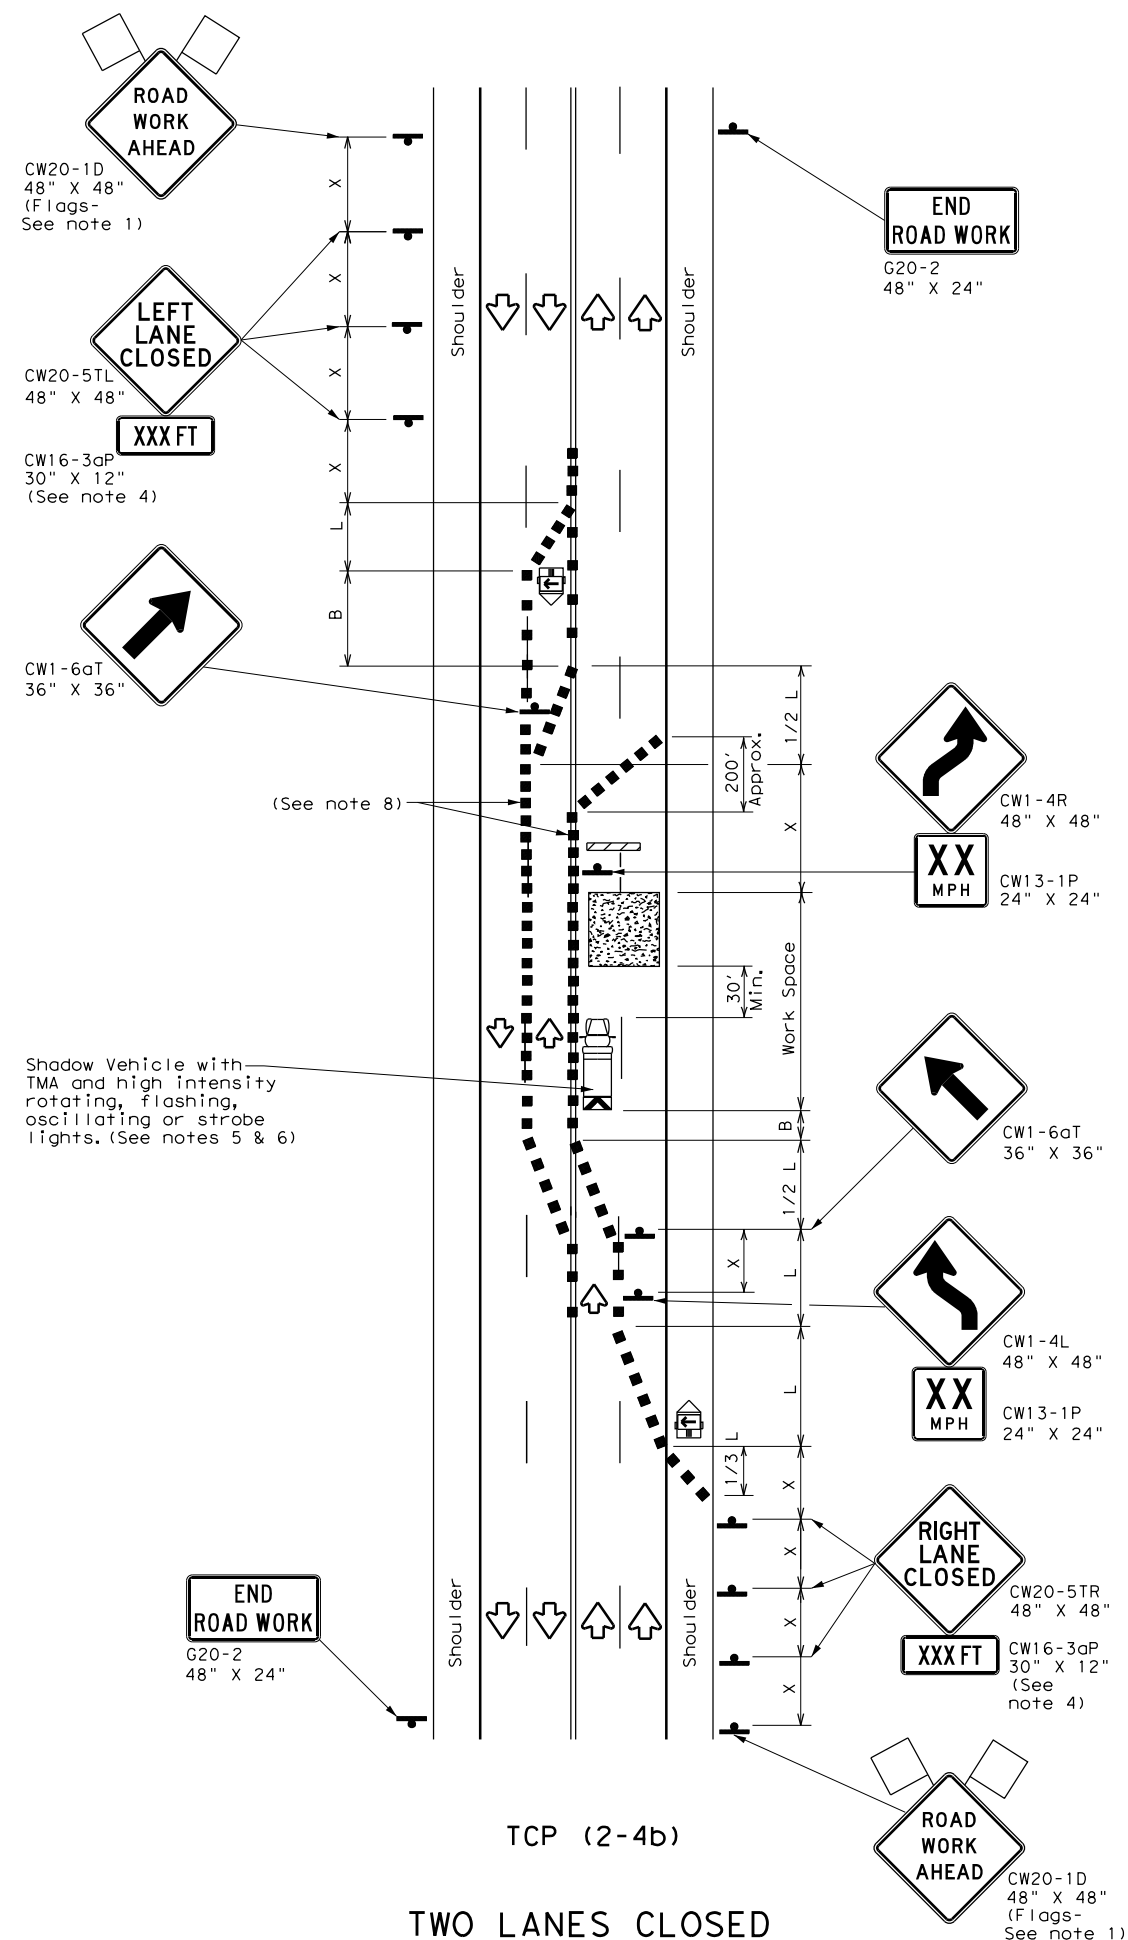

TCP (2-4b)
 TWO LANES CLOSED

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓	✓	

GENERAL NOTES

- Flags attached to signs where shown, are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- The downstream taper is optional. When used, it should be 100 feet minimum length per lane.
- For short term applications, when post mounted signs are not used, the distance legend may be shown on the sign face rather than on a CW16-3aP supplemental plaque.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

TCP (2-4a)

- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic with the arrow board placed in the closed lane near the end of the merging taper.


TCP (2-4b)

- For shorter durations where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2(S) where S is the speed in mph. This tighter devices spacing is intended for the area of conflicting markings, not the entire work zone.


		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN LANE CLOSURES ON MULTILANE CONVENTIONAL ROADS			
TCP (2-4) - 18			
FILE: tcp2-4-18.dgn	DN:	CK:	DW:
© TxDOT December 1985	CON:	SECT:	JOB:
REVISIONS	0904	00	220
8-95 3-03	DIST:	COUNTY:	SHEET NO.
1-97 2-12	AMA	POTTER	25
4-98 2-18			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for purposes other than those intended. TxDOT is not responsible for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:32 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\AD\01509-0027-12.dgn

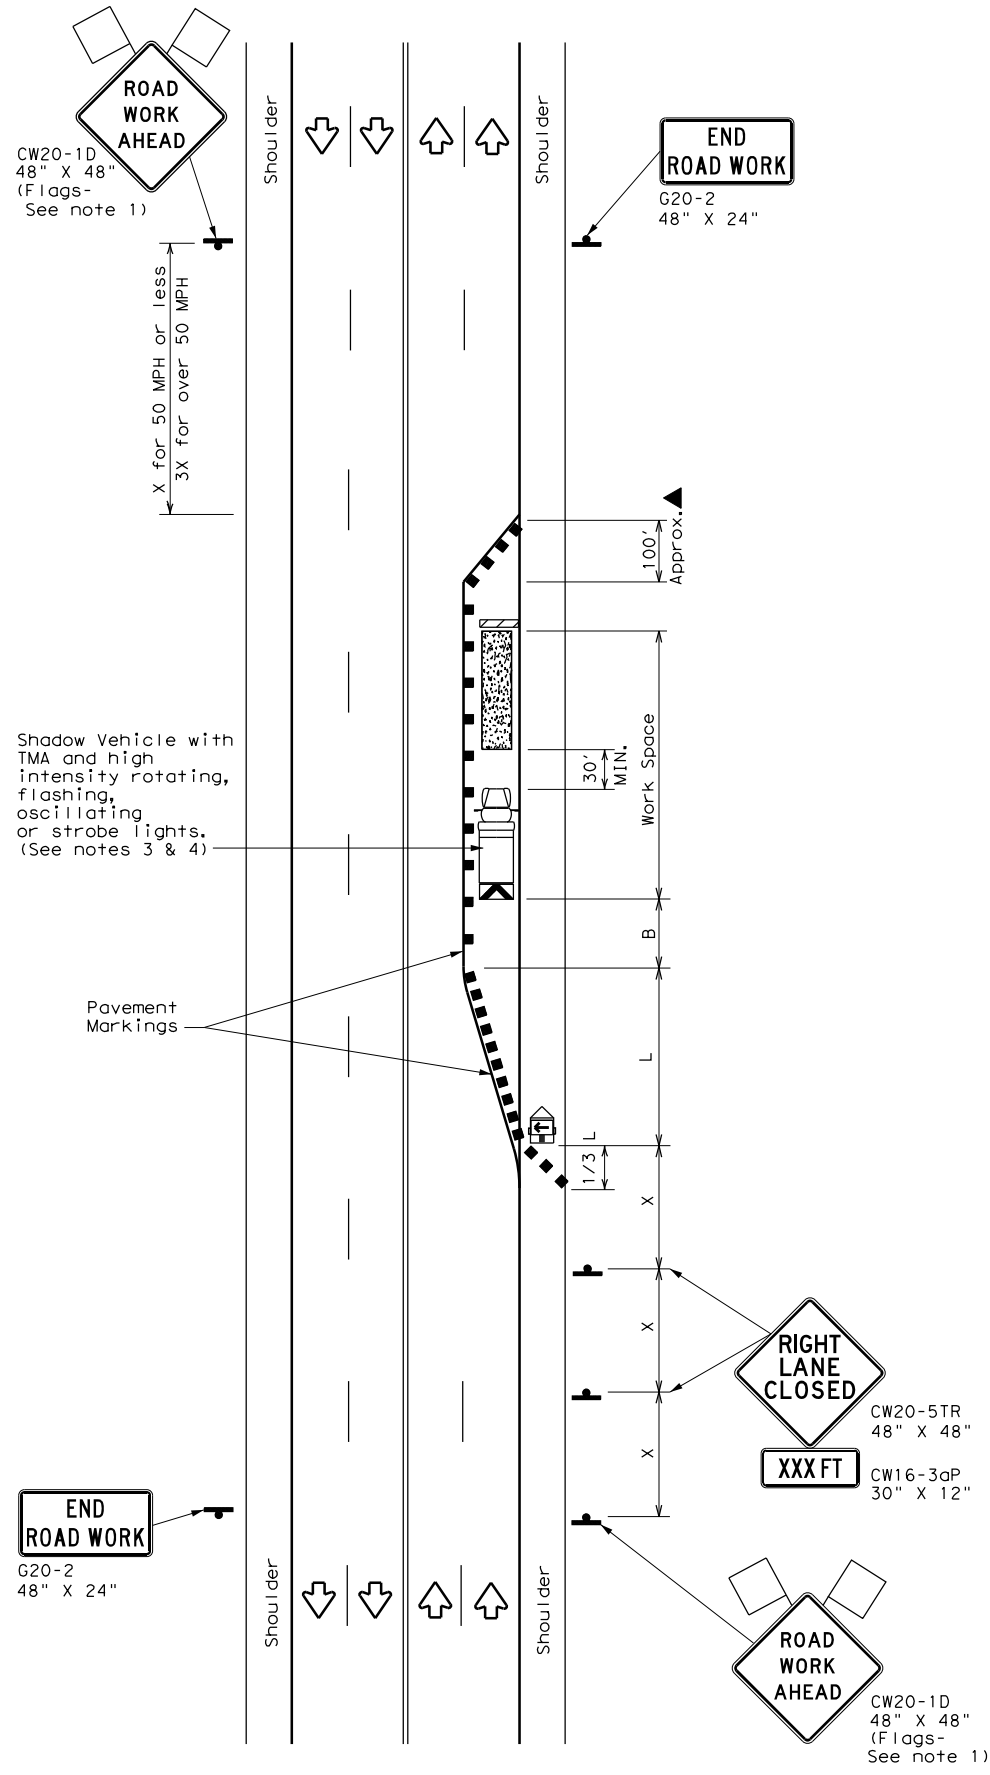

TCP (2-5a)
 ONE LANE CLOSED

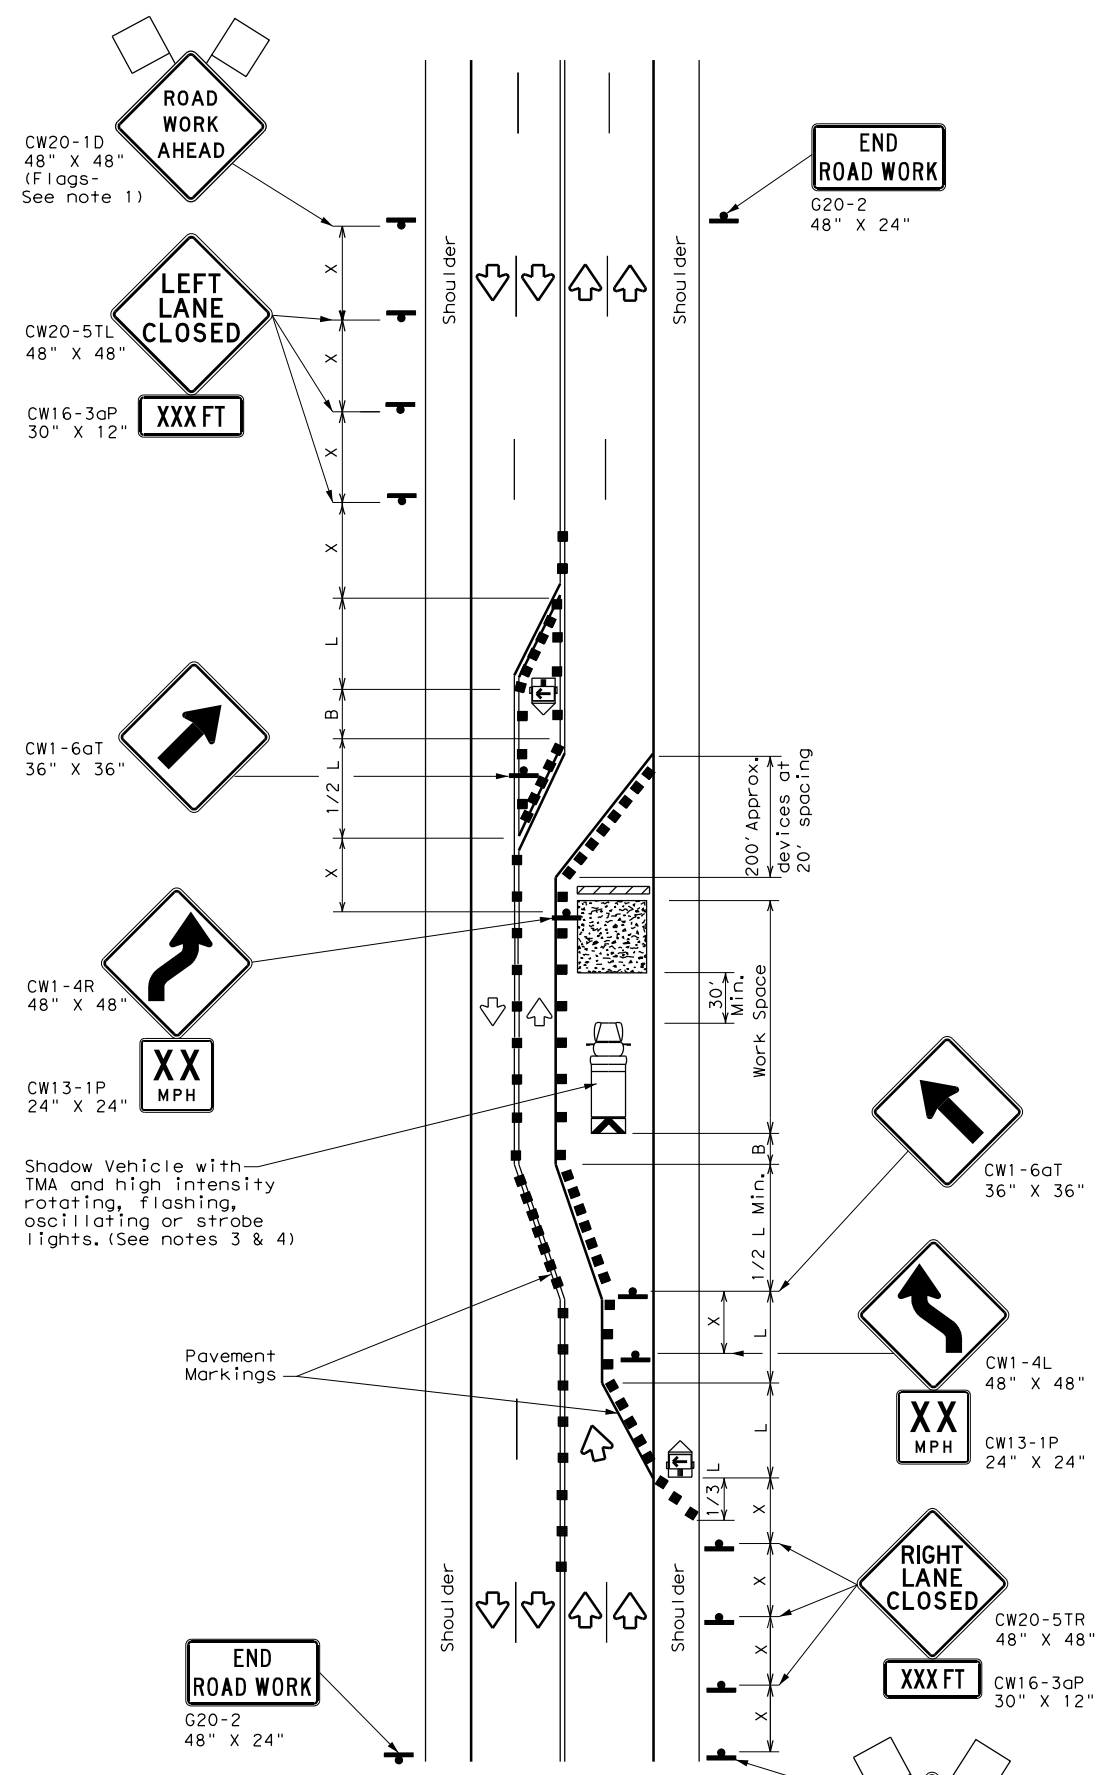

TCP (2-5b)
 TWO LANES CLOSED

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * X	Formula	Minimum Desirable Taper Lengths X X			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'


* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
			✓	✓


- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.
 - The downstream taper is optional. When used, it should be 100 feet approximately per lane, with channelizing devices spaced at 20 feet.
- TCP (2-5a)**
- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic, with the arrow board placed in the closed lane near the end of the merging taper.
- TCP (2-5b)**
- Conflicting pavement markings shall be removed for long-term projects.

		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN LONG TERM LANE CLOSURES MULTILANE CONVENTIONAL RDS.			
TCP (2-5) - 18			
FILE: tcp2-5-18.dgn	DN:	CK:	DW:
© TxDOT December 1985	CON:	SECT:	JOB:
REVISIONS	0904	00	220
8-95 2-12	DIST:	COUNTY:	SHEET NO.
1-97 3-03	AMA	POTTER	26
4-98 2-18			

DATE: 8/1/2023 2:22:32 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\01509-0027-12\01509-0027-12.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

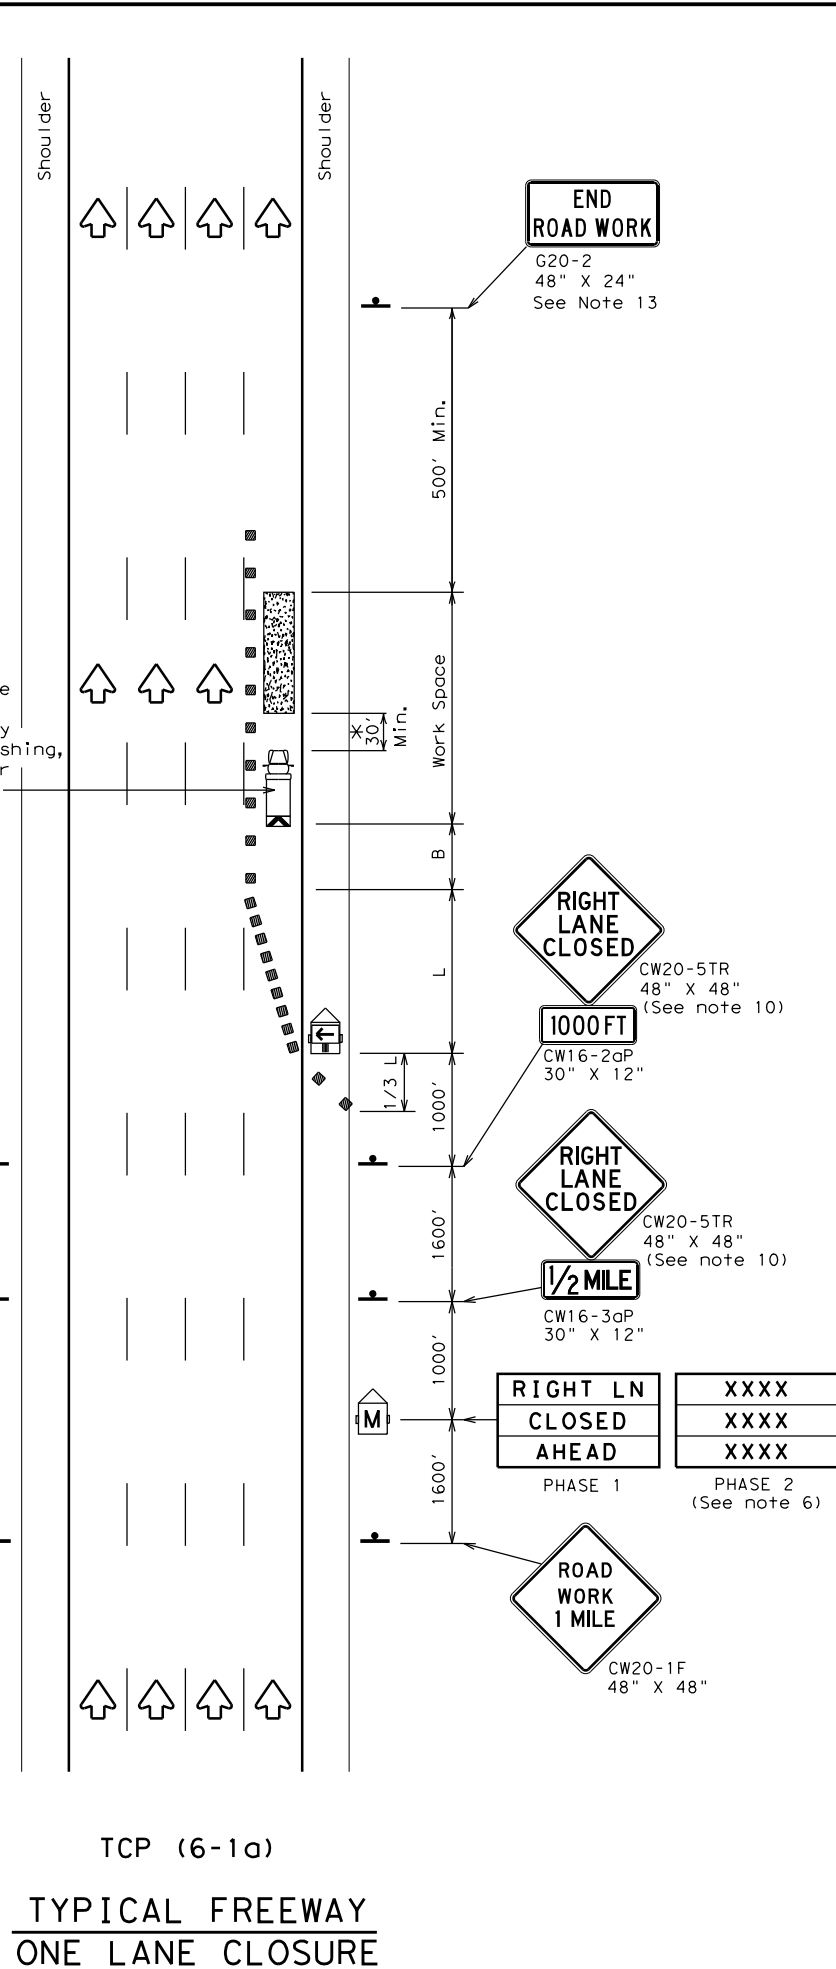

TCP (6-1a)
 TYPICAL FREEWAY
 ONE LANE CLOSURE

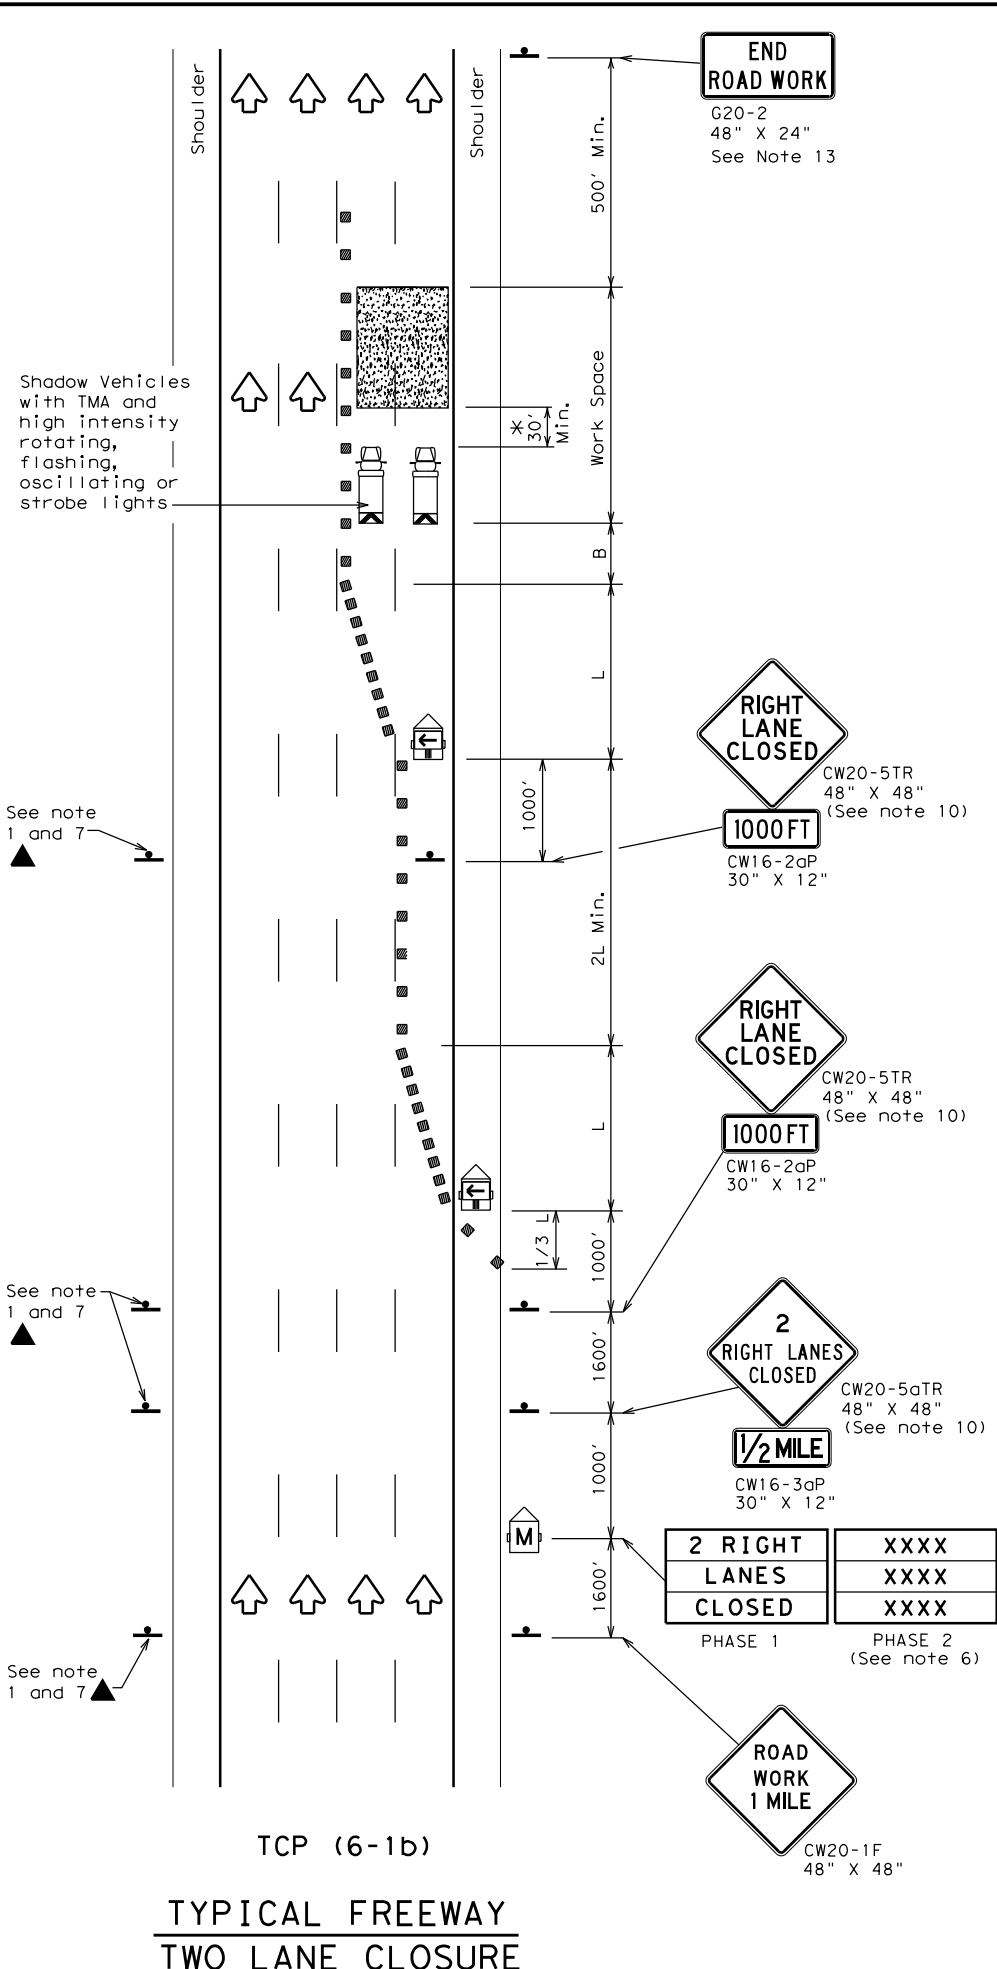

TCP (6-1b)
 TYPICAL FREEWAY
 TWO LANE CLOSURE

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80	800'	880'	960'	80'	160'	615'	

** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- Drums or 42" cones are the typical channelizing devices. For Intermediate Term Stationary work, drums shall be used on tapers with drums or 42" cones used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
- All construction signs and barricades placed during any phase of work shall remain in place until removal is approved by the Engineer.
- The Engineer may direct the Contractor to furnish additional signs and barricades as required to maintain traffic flow, detours and motorist safety during construction.
- Static message boards or changeable message signs stating the date and duration of ramp or freeway lane closures shall be placed a minimum of seven (7) calendar days in advance of the actual closure.
- Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE LEFT," recommended advisory speed, delay information, or other specific warnings.
- Duplicate construction warning signs should be erected on the medians side of freeways where median width will permit and traffic volume justifies the signing.
- The number of closed lanes may be increased provided the spacing of traffic control devices, taper lengths and tangent lengths meet the requirements of the TMUTCD.
- Warning signs for intermediate term stationary work should be mounted at 7' to the bottom of the sign.
- Warning signs shown shall be appropriately altered for left lane closures. When signs are mounted at 1' height for short term stationary or short duration work, sign versions shown in the SHSD for Texas with distances on the sign face rather than mounted on a plaque below the sign may be used.
- When possible, PCMS units should be located in advance of the last available exit ramp prior to the lane closure to allow motorists an alternate route. They may also be relocated to improve advance warning in case of unanticipated queuing or congestion.
- For Intermediate Term Stationary work at night, floodlights should be used to illuminate the work area and equipment crossings. Floodlights shall not produce a disabling glare condition for road users or workers.
- The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

* A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.




**TRAFFIC CONTROL PLAN
 FREEWAY LANE CLOSURES**

TCP (6-1) - 12


FILE:	tcp6-1.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	February 1998	CONT	SECT	JOB	HIGHWAY				
8-12	REVISIONS	0904	00	220	VARIOUS				
		DIST	COUNTY	SHEET NO.					
		AMA	POTTER	27					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:33 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase 01\01509-0027-12.dgn

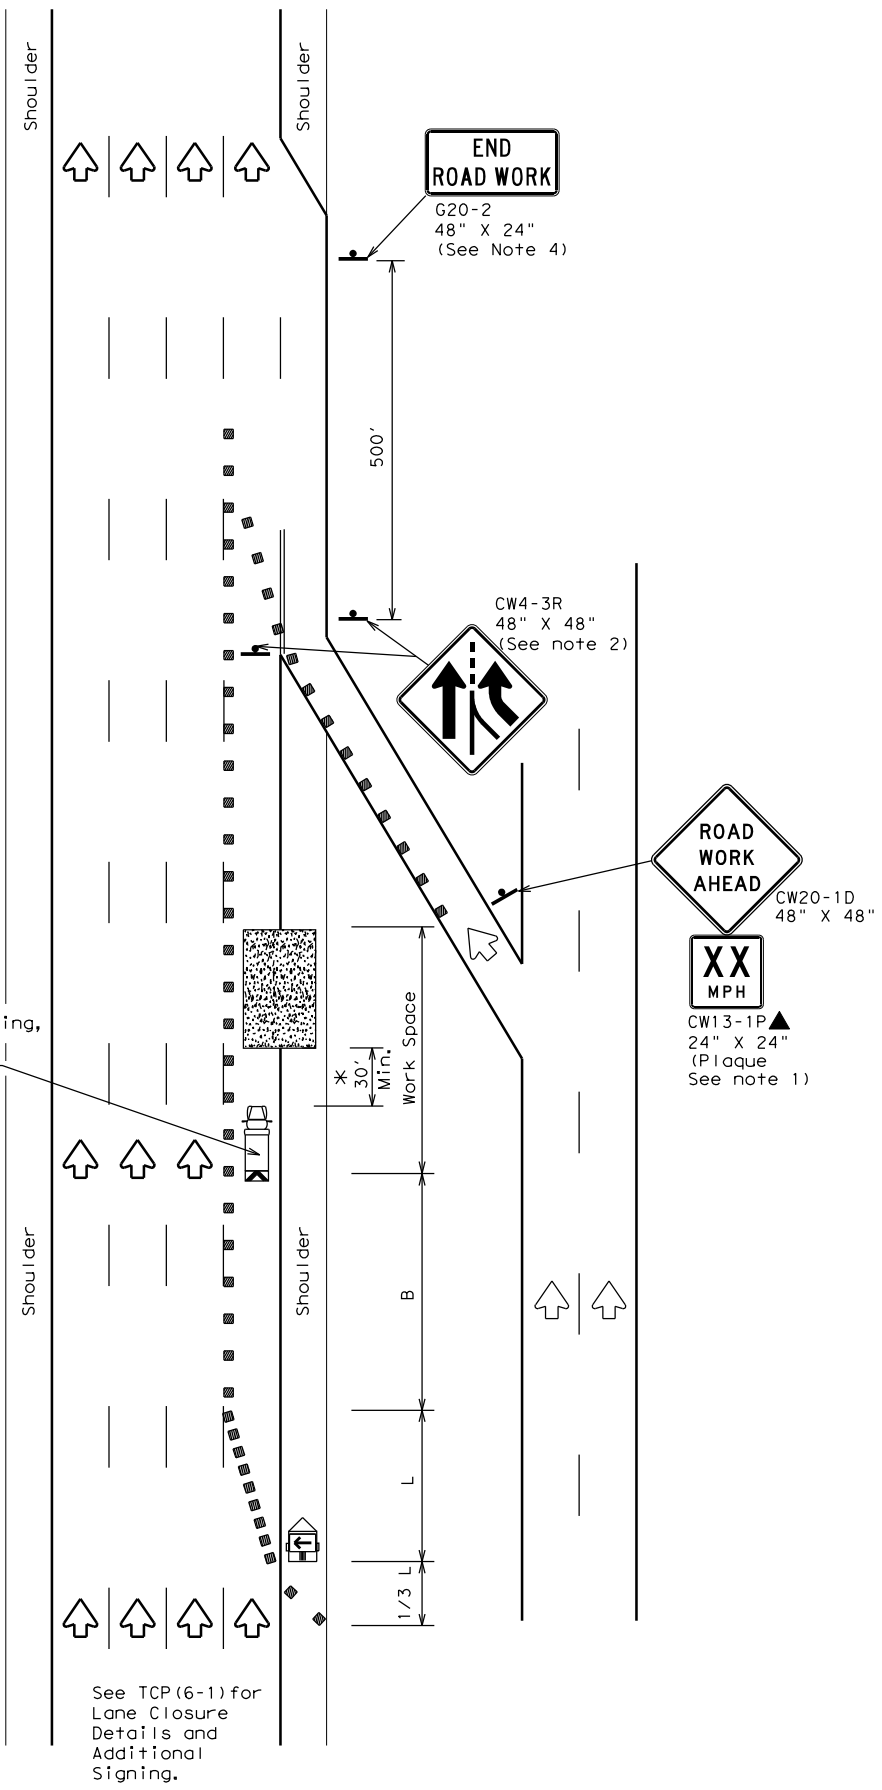

TCP (6-2a)
ENTRANCE RAMP OPEN
WORK WITHIN 500' OF RAMP

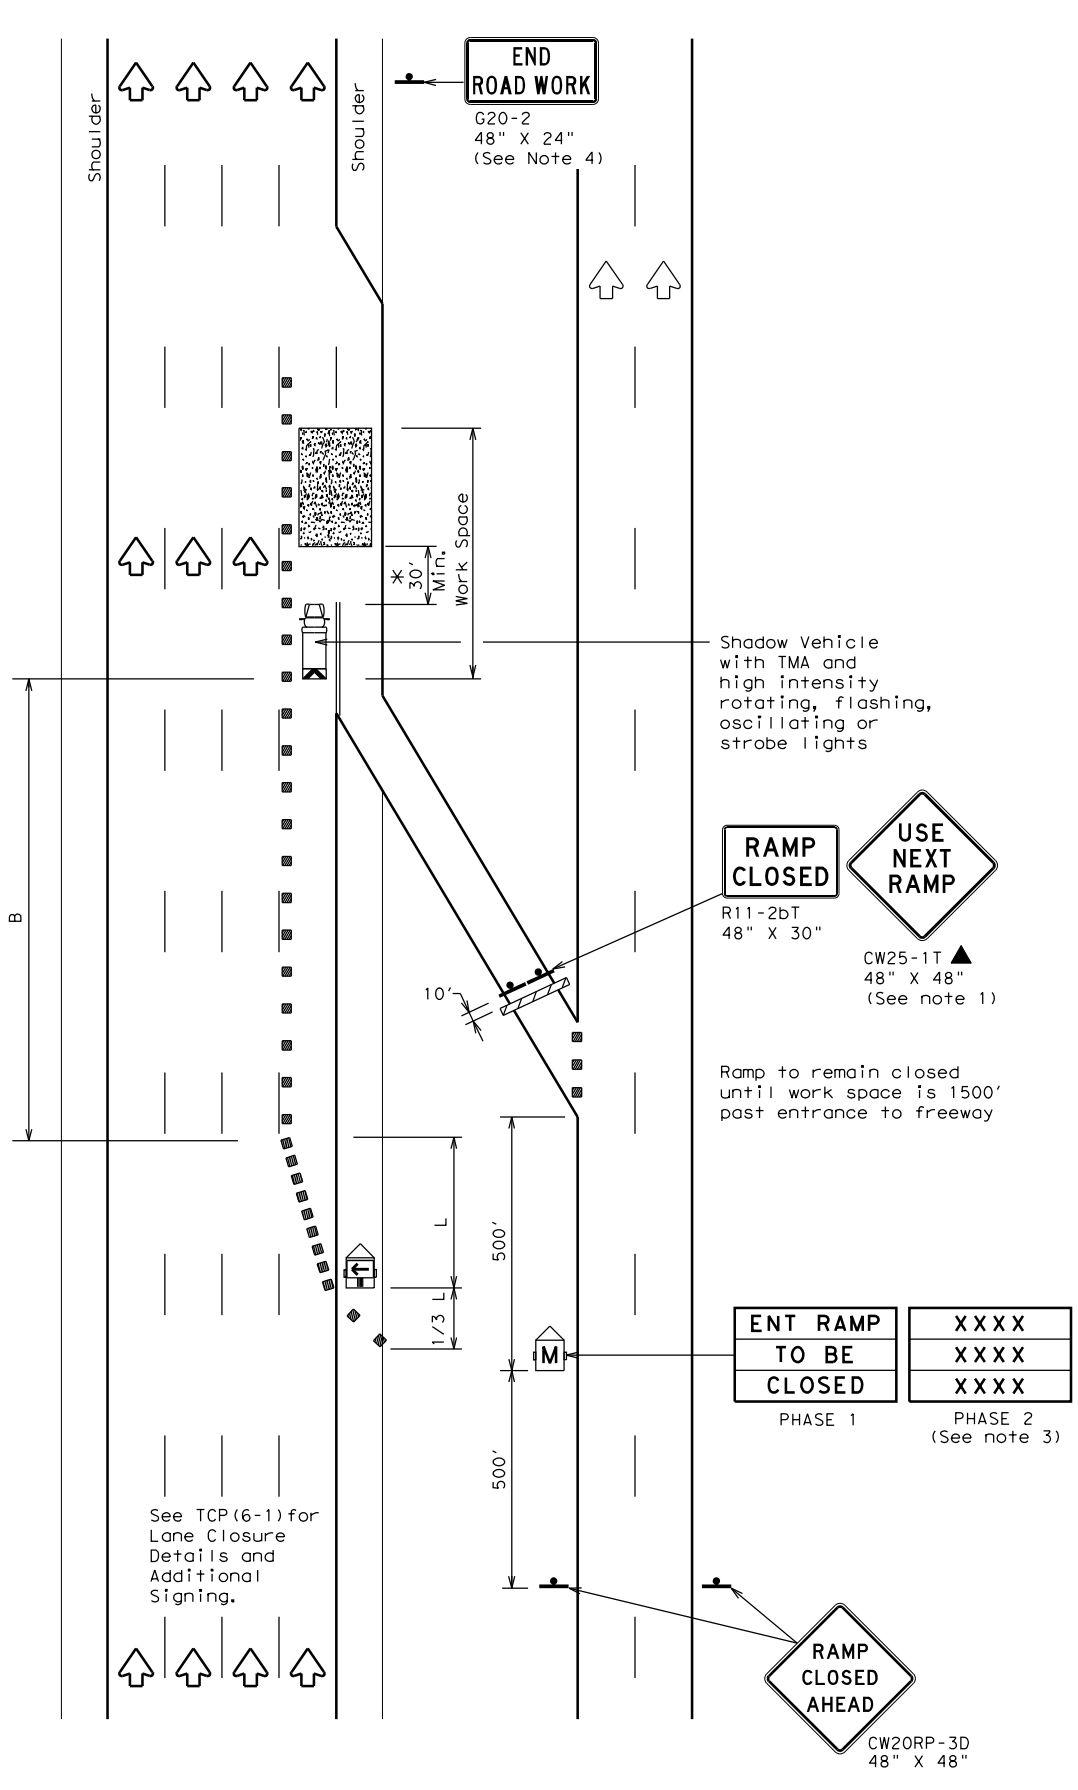

TCP (6-2b)
ENTRANCE RAMP CLOSED

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- ADDED LANE Symbol (CW4-3) sign may be omitted when sign between ramp and mainline can be seen from both roadways.
- See "Advance Notice List" on BC(6) for recommended date and time formatting options for PCMS Phase 2 message.
- The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




TRAFFIC CONTROL PLAN
WORK AREA NEAR RAMP

TCP (6-2) - 12


FILE:	tcp6-2.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	February 1994	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
1-97	8-98	DIST	COUNTY	SHEET NO.					
4-98	8-12	AMA	POTTER	28					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:22:33 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\AD\12-08-23\01509-0027-12.dwg

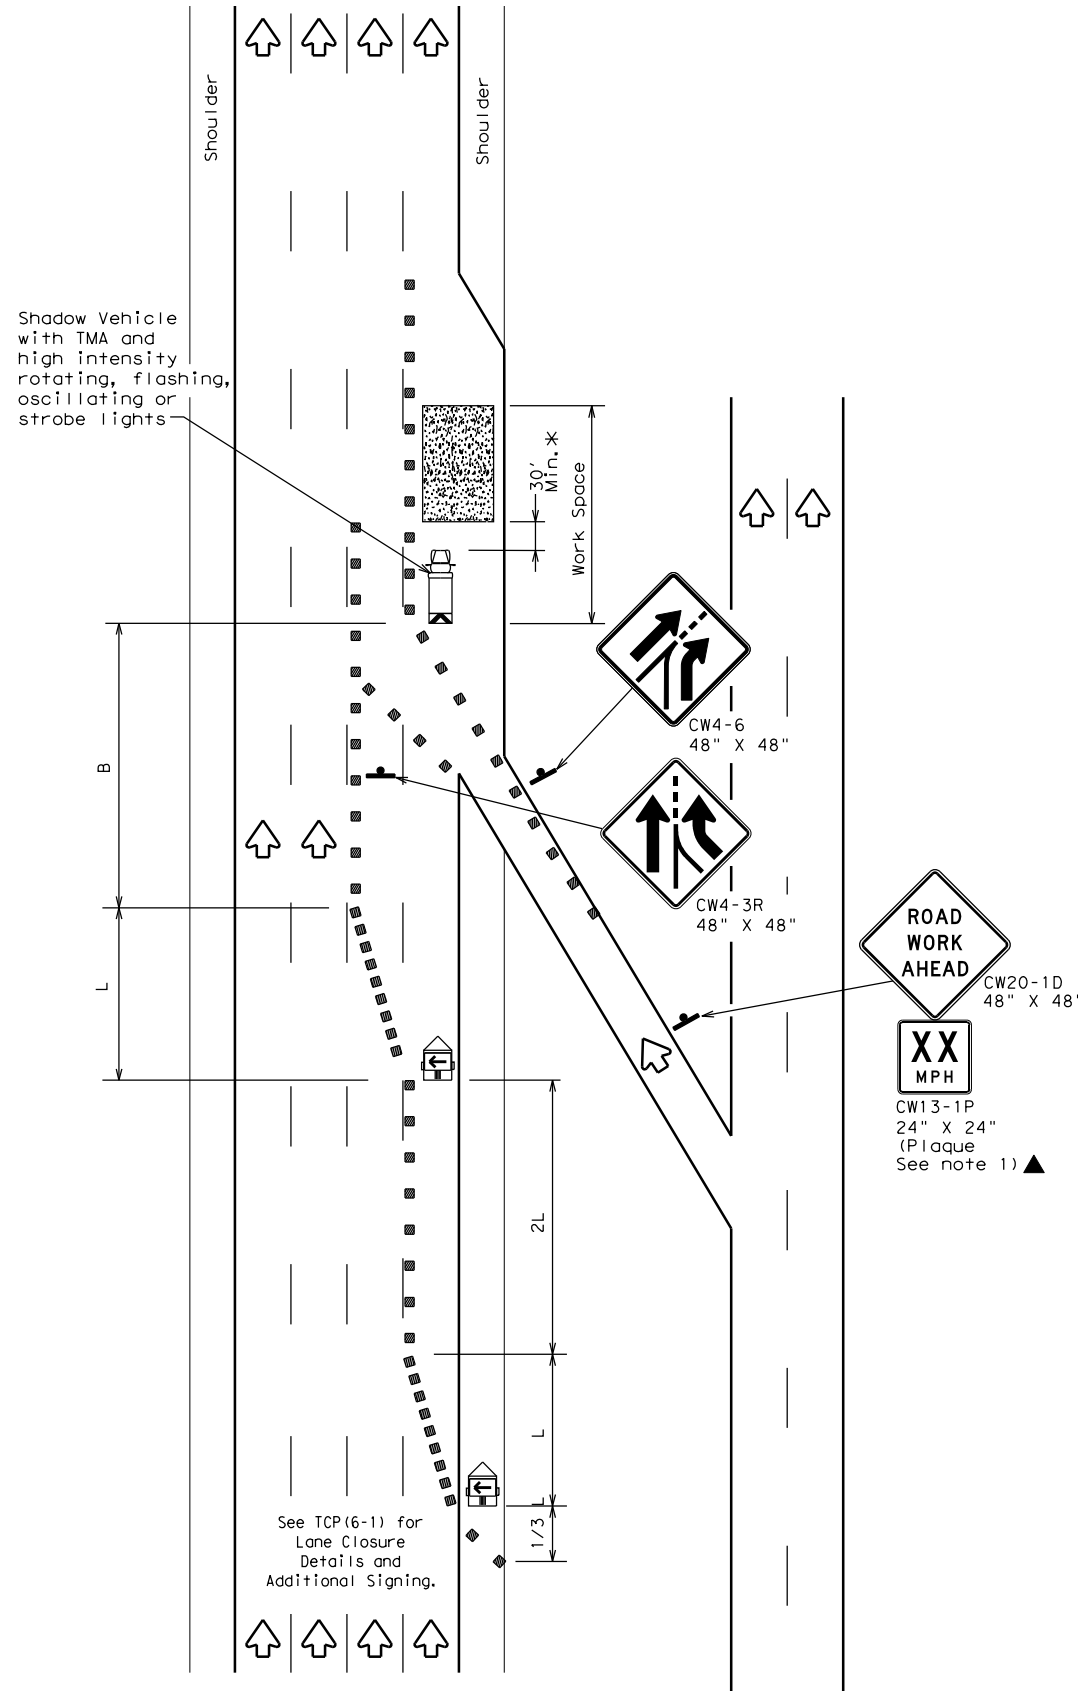

TCP (6-3a)
 ENTRANCE RAMP OPEN

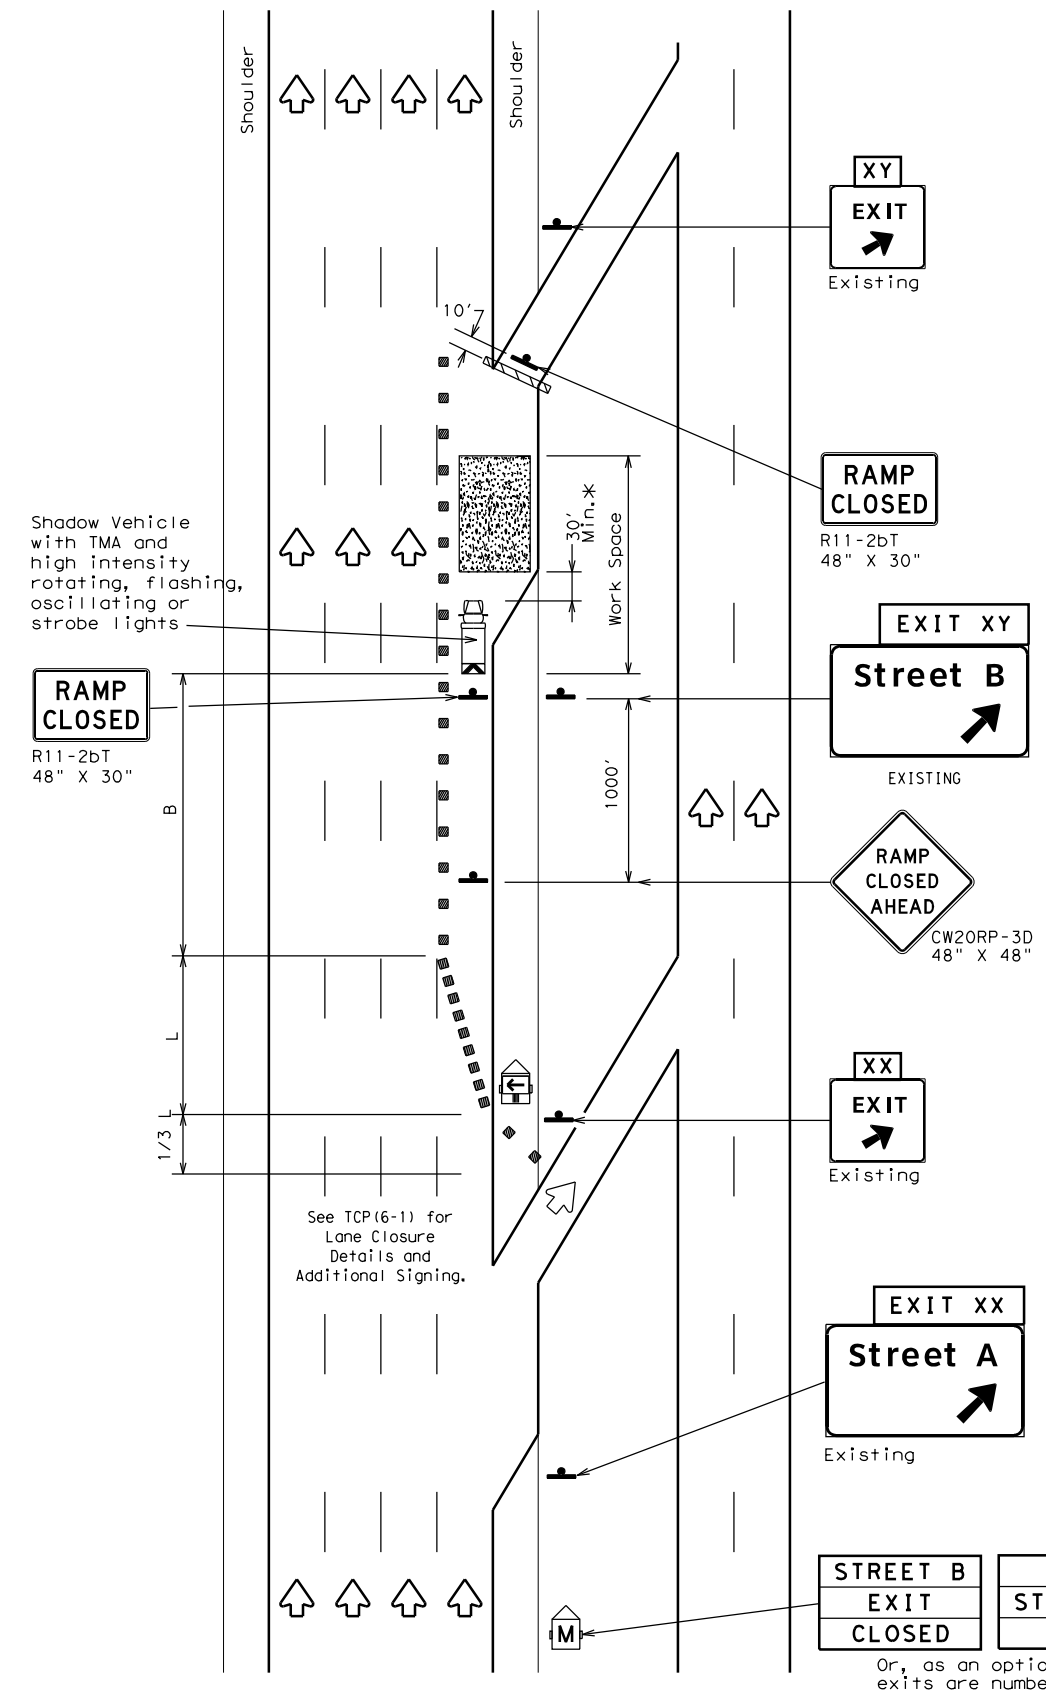

TCP (6-3b)
 EXIT RAMP CLOSED
 TRAFFIC EXITS PRIOR TO CLOSED RAMP

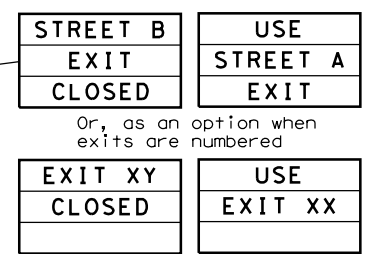

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L" **			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES:

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




TRAFFIC CONTROL PLAN
 WORK AREA BEYOND RAMP

TCP (6-3) - 12

FILE: tcp6-3.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1994	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
1-97 8-98	DIST	COUNTY	SHEET NO.	
4-98 8-12	AMA	POTTER	29	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:34 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\AD\1509-0027-12\01509-0027-12.dgn

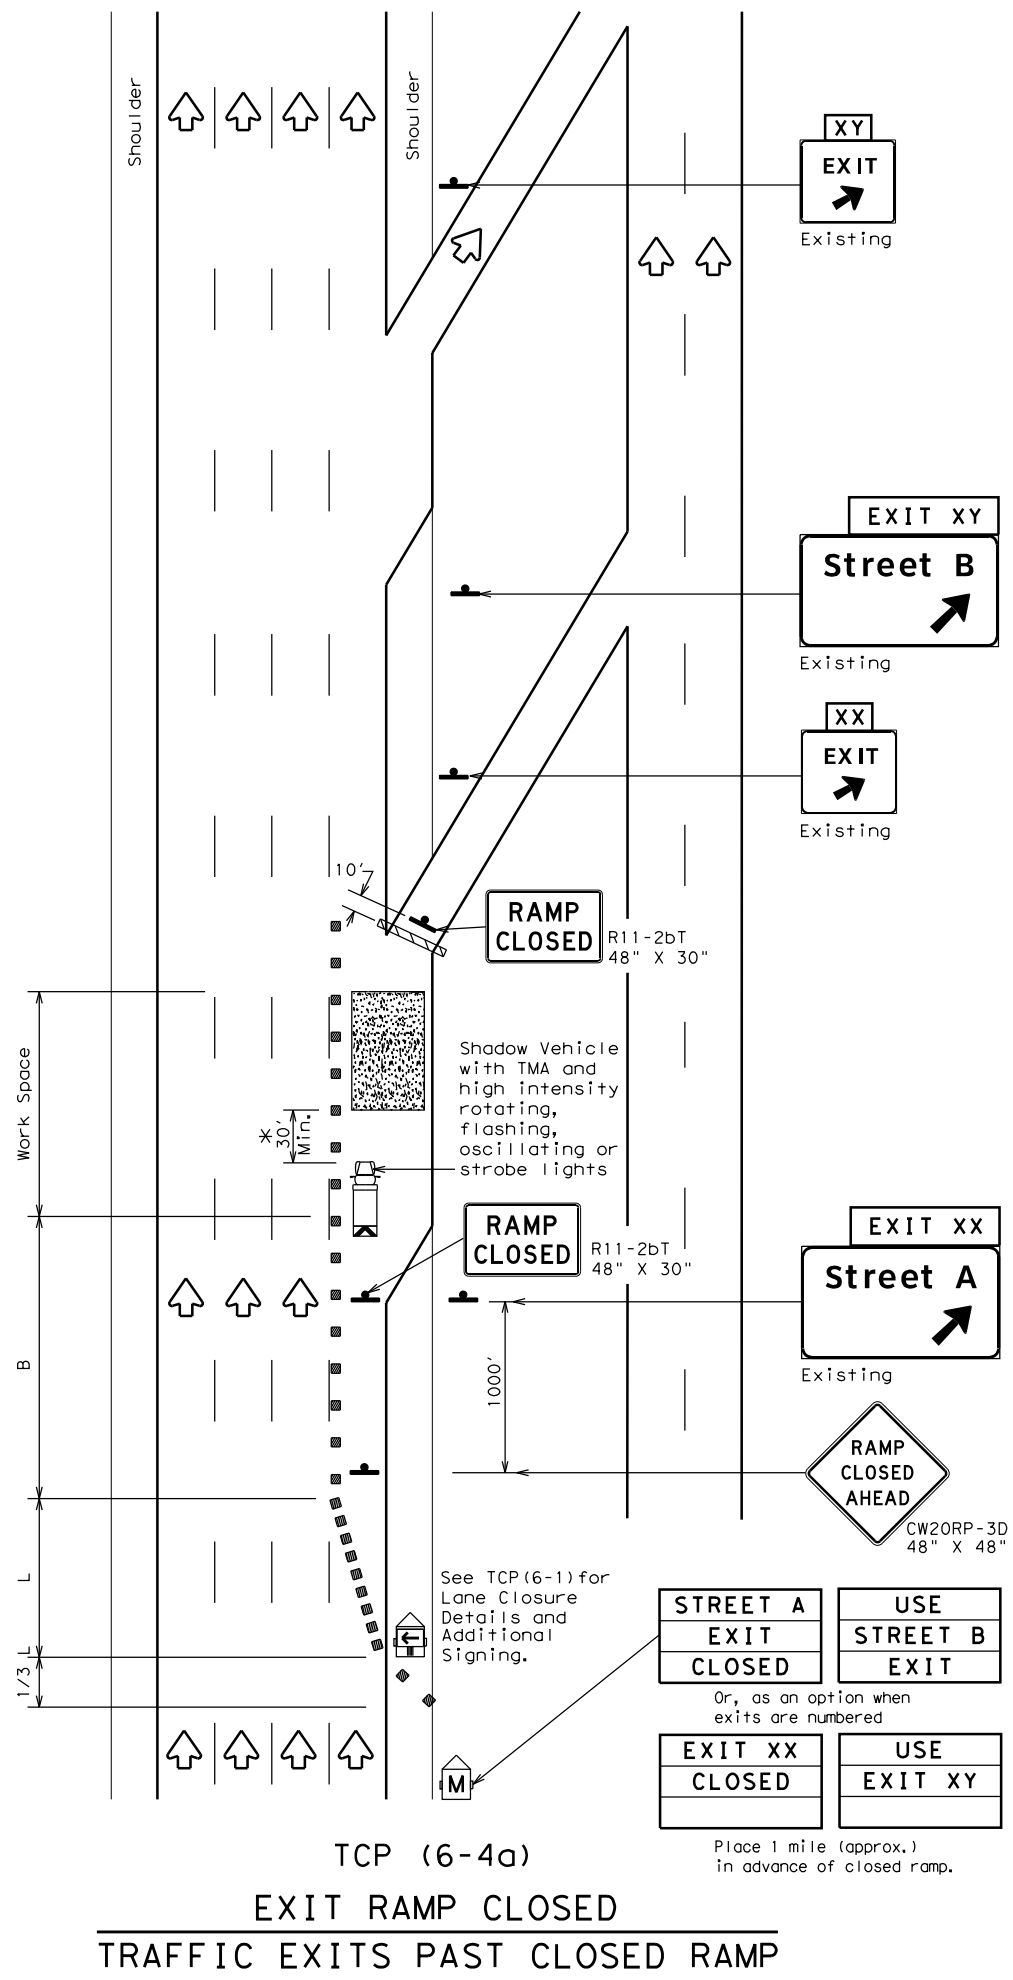


TCP (6-4a)
EXIT RAMP CLOSED
TRAFFIC EXITS PAST CLOSED RAMP

STREET A EXIT CLOSED	USE STREET B EXIT
EXIT XX CLOSED	USE EXIT XY

Or, as an option when exits are numbered

Place 1 mile (approx.) in advance of closed ramp.

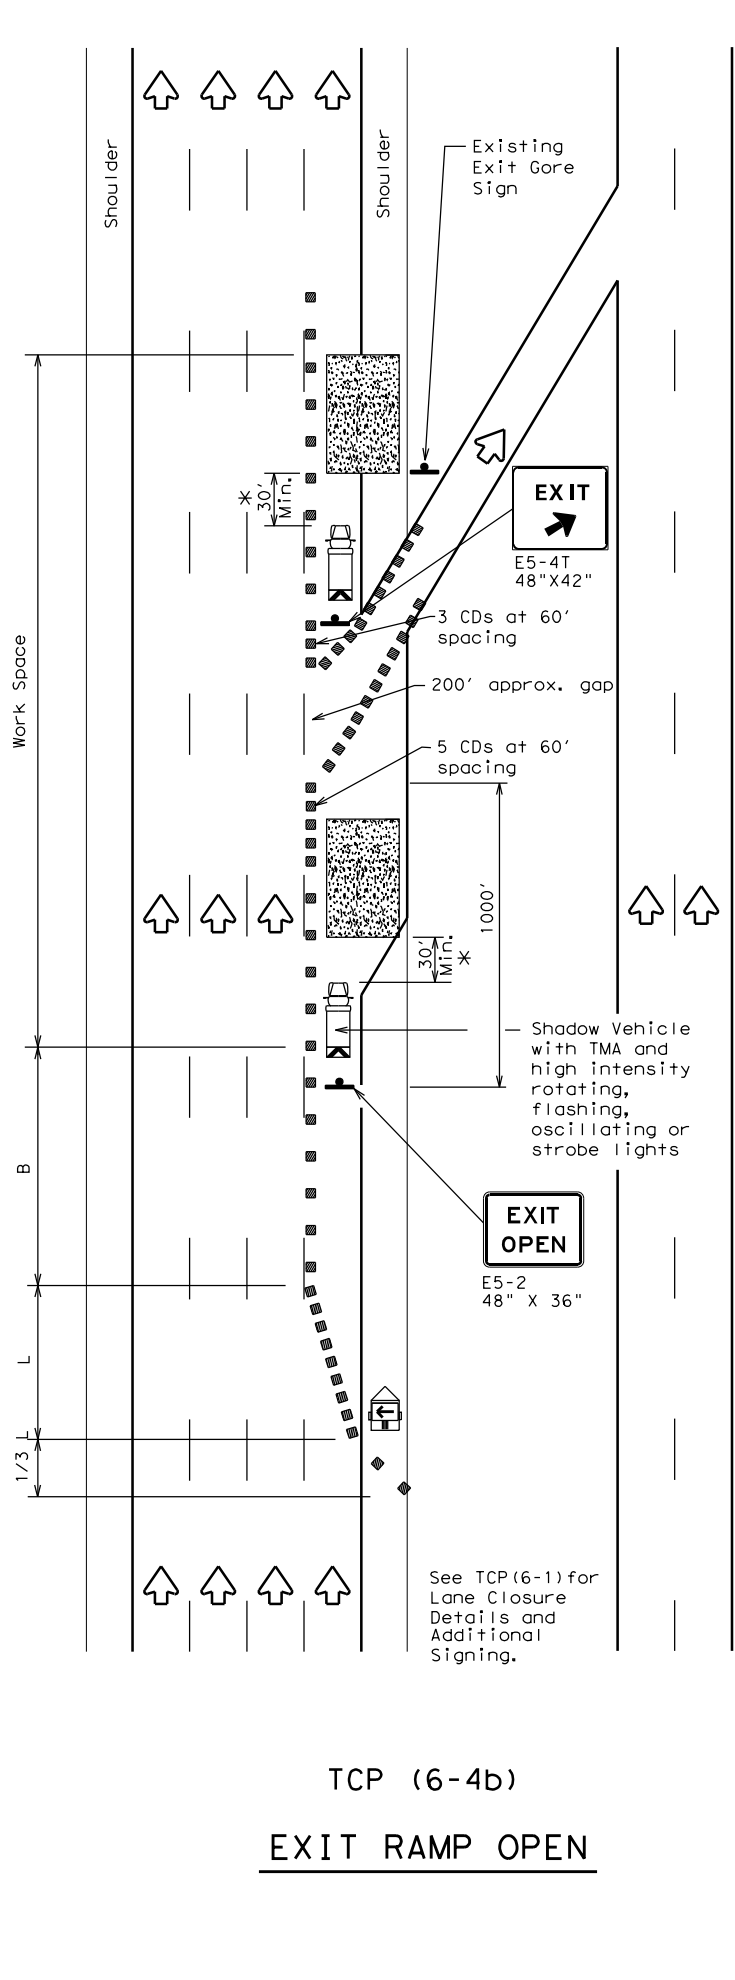

TCP (6-4b)
EXIT RAMP OPEN

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

- GENERAL NOTES**
- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
 - See BC Standards for sign details.

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




TRAFFIC CONTROL PLAN
WORK AREA AT EXIT RAMP

TCP (6-4) - 12


FILE: tcp6-4.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1994	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
1-97 8-98	DIST	COUNTY	SHEET NO.	
4-98 8-12	AMA	POTTER	30	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:22:35 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase 01.dwg

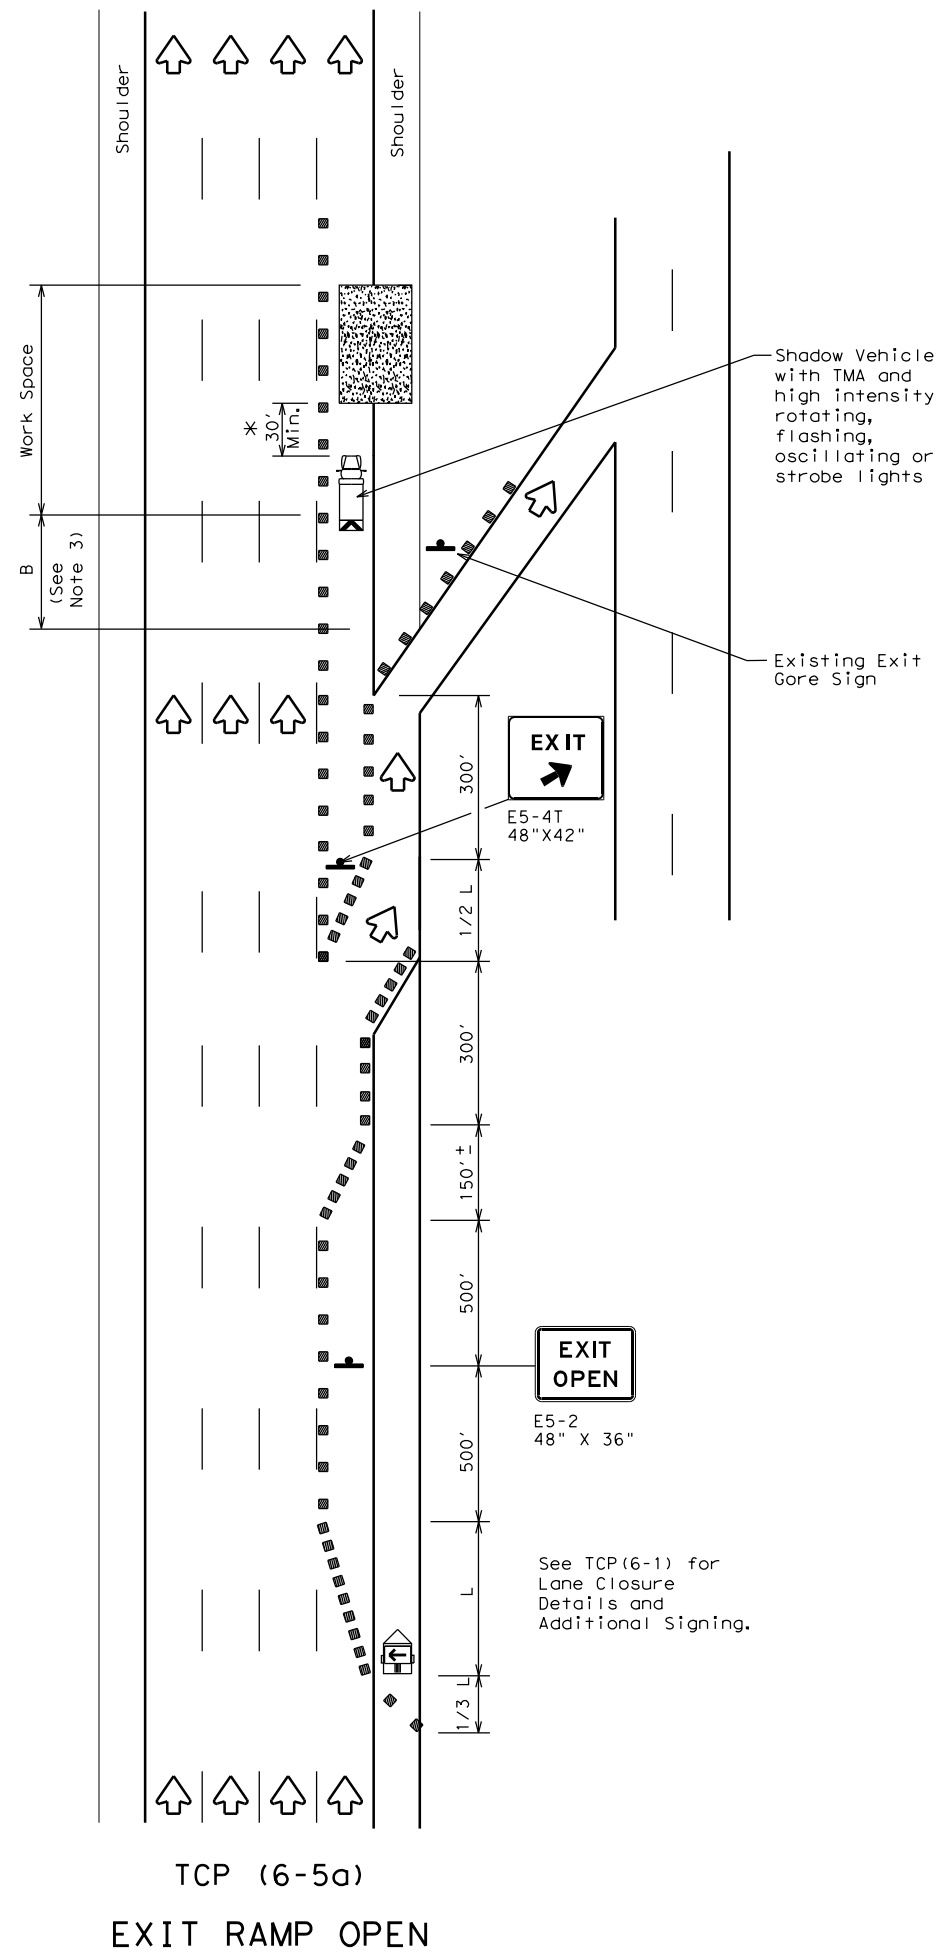

TCP (6-5a)
 EXIT RAMP OPEN

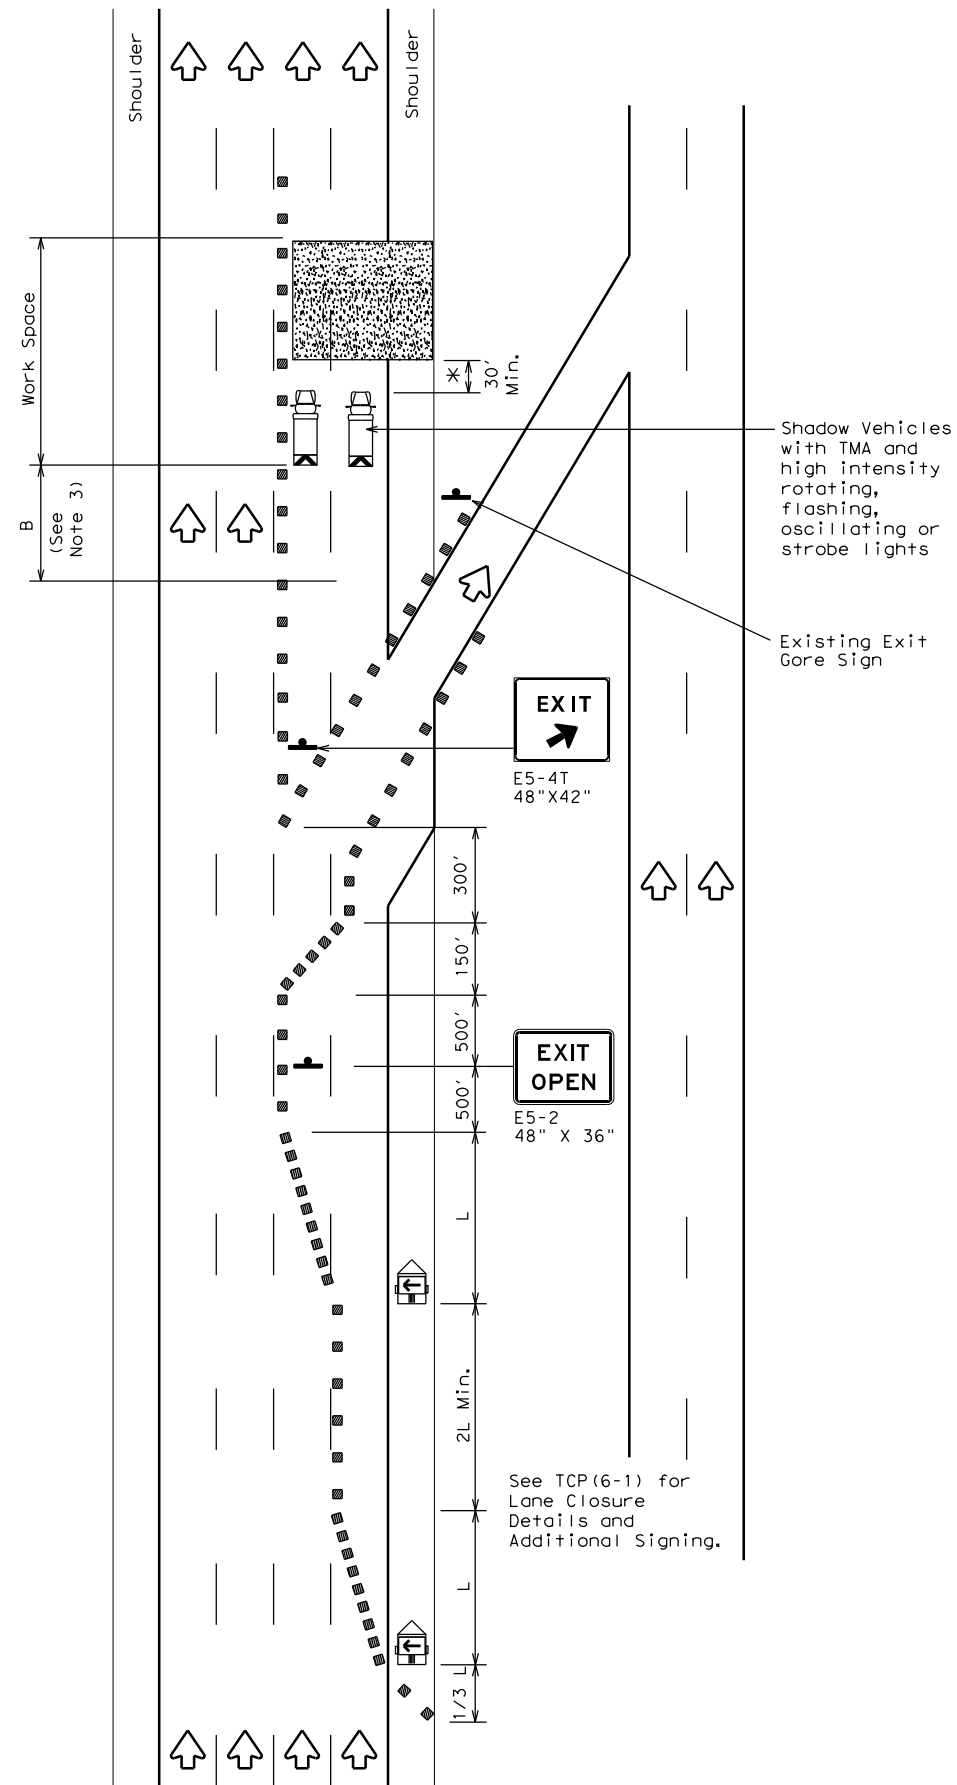

TCP (6-5b)
 EXIT RAMP OPEN
 TWO LANE CLOSURE WITHIN
 1500' PAST EXIT RAMP

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- See BC standards for sign details.
- If adequate longitudinal buffer length "B" does not exist between the work space and the exit ramp, consideration should be given to closing the ramp.

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.




TRAFFIC CONTROL PLAN
 WORK AREA BEYOND EXIT RAMP

TCP (6-5) - 12


FILE:	tcp6-5.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	February 1998	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0904	00	220	VARIOUS				
1-97	8-98	DIST	COUNTY	SHEET NO.					
4-98	8-12	AMA	POTTER	31					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided herein. TxDOT is not responsible for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:22:35 PM
 FILE: K:\01509\01509-002T-12 TxDOT WA 12 AMA PS&E_IH 40 ITS\2 Design Phase of AD&S\01509-002T-12\01509-002T-12.dgn

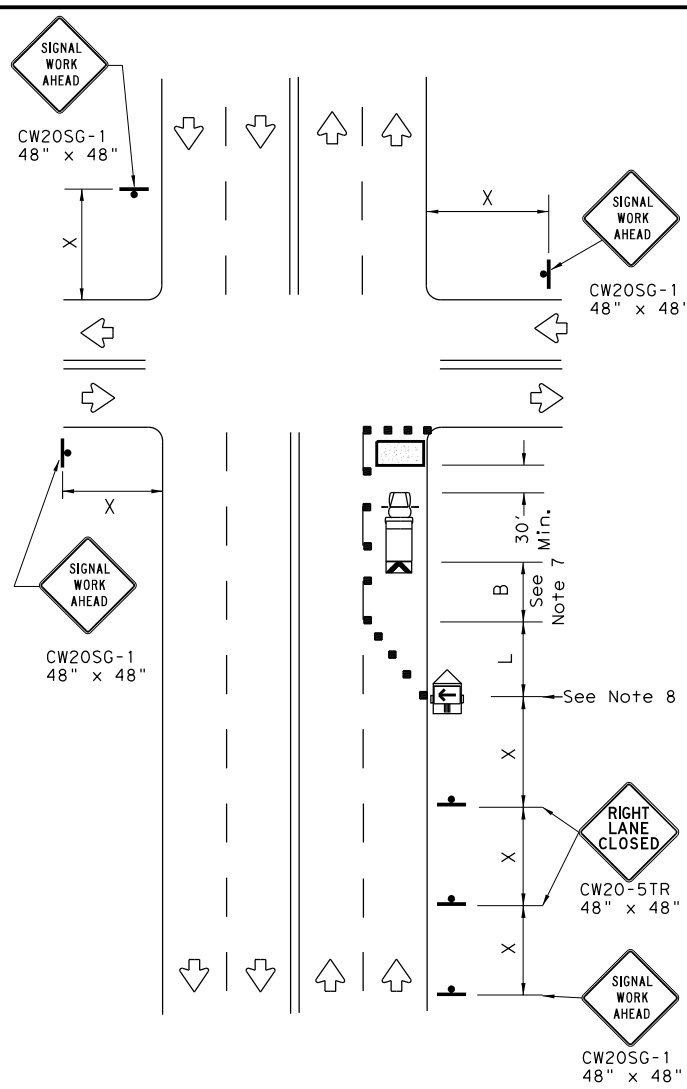

NEAR SIDE LANE CLOSURE
 SHORT DURATION OR SHORT TERM STATIONARY

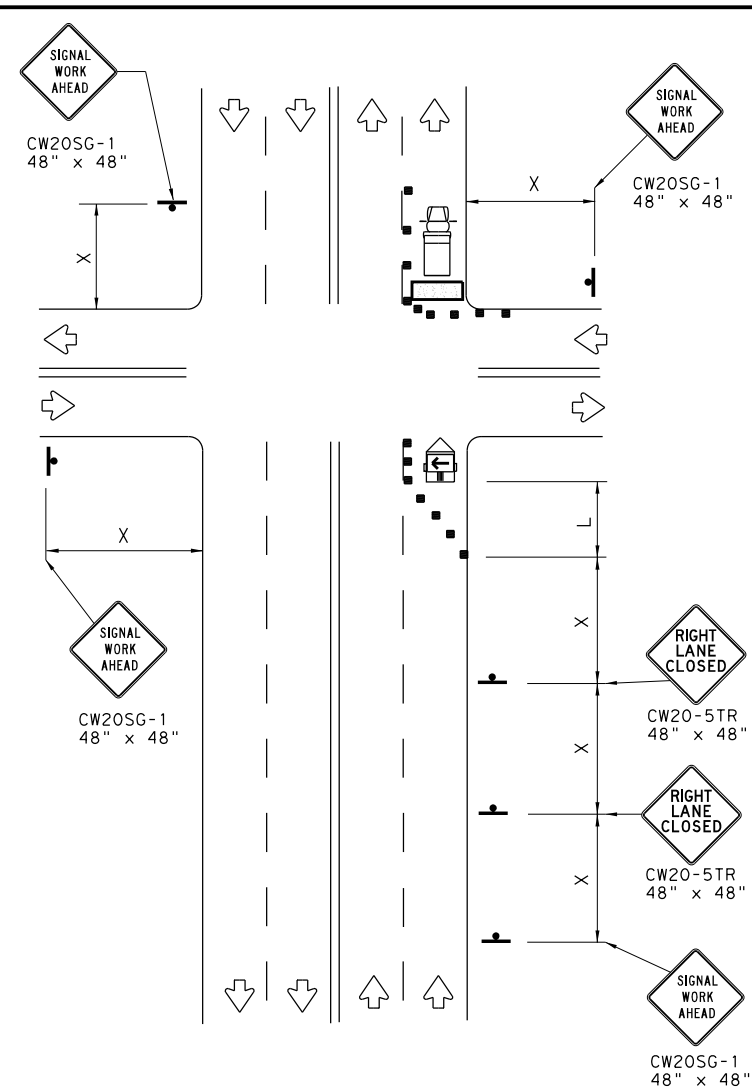

FAR SIDE RIGHT LANE CLOSURE
 SHORT DURATION OR SHORT TERM STATIONARY

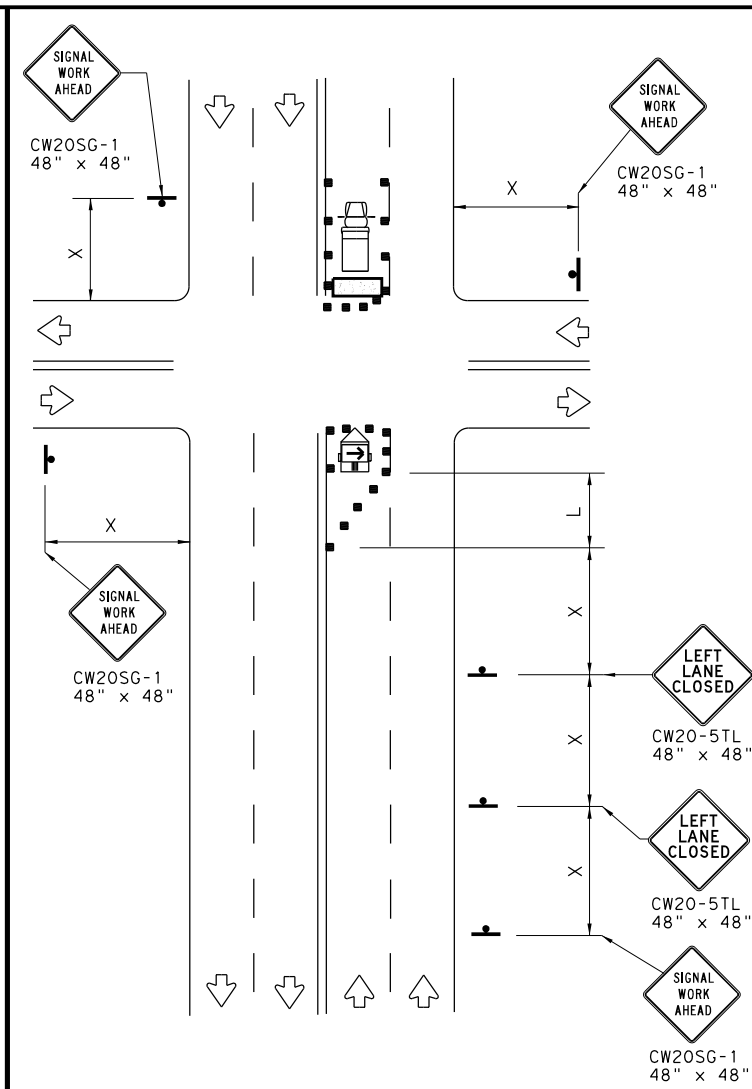


FAR SIDE LEFT LANE CLOSURE
 SHORT DURATION OR SHORT TERM STATIONARY

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger


Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

WORKERS IN BUCKET TRUCKS SHALL NOT WORK ABOVE OPEN LANES OF TRAFFIC.

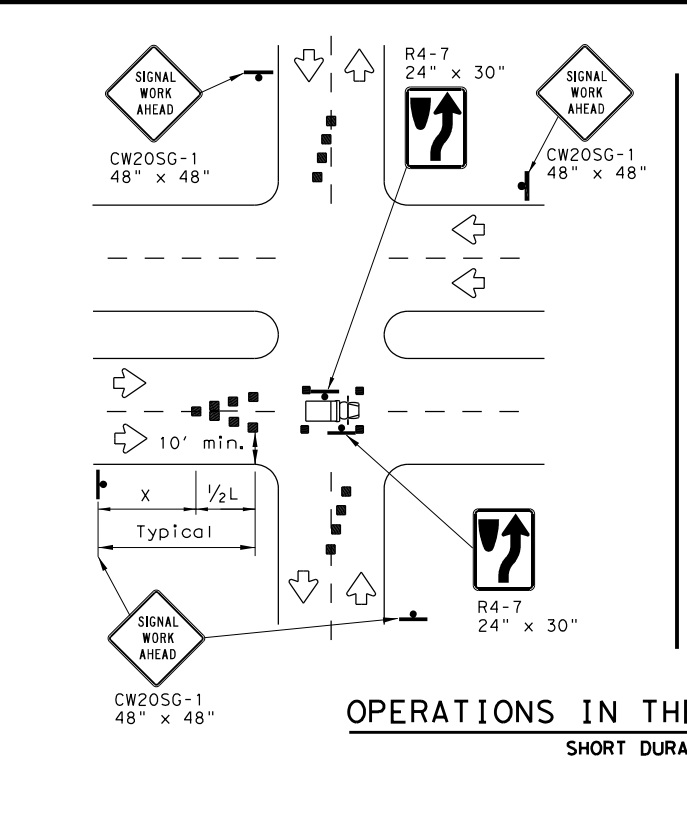

OPERATIONS IN THE INTERSECTION
 SHORT DURATION

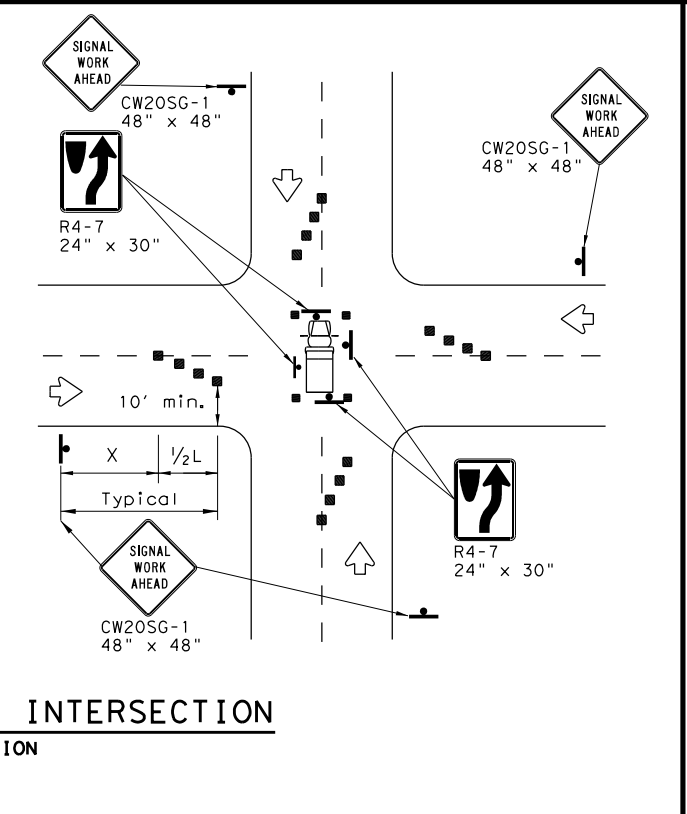

GENERAL NOTES

- The minimum size channelizing device is the 28" cone. 42" Two-piece cones, drums, vertical panels or barricades will be required when the device must be left unattended at night.
- Obstructions or hazards at the work area shall be clearly marked and delineated at all times.
- Flaggers and Flagger Symbol (CW20-7) signs may be required according to field conditions.
- Vehicles parked in roadway shall be equipped with at least two high intensity rotating, flashing, oscillating or strobe type lights.
- High level warning devices (flag trees) may be used at corners of the vehicle.
- When work operations are performed on existing signals, the signals may be placed in flashing red mode when approved by the engineer. If existing signals do not have power, All-Way Stop (R1-1 and R1-3P) signs may be implemented when approved by the engineer.
- For Short-Term Stationary work the buffer space "B" from the above table should be used if field conditions permit. For Short Duration (less than 1 hour) any buffer space provided will enhance the safety of the setup.
- The arrow board at this location may be omitted for Short Duration work if the work vehicle has an arrow board in operation. As an option, the arrow board may be placed at the end of the taper in the closed lane if space is not available at the beginning of the taper.
- Signs and devices for the NEAR SIDE LANE CLOSURE may be altered for a left lane closure by using a LEFT LANE CLOSED (CW20-5TL) and adding channelizing devices on the centerline to protect the work space from opposing traffic.

SHEET 1 OF 2




TRAFFIC SIGNAL WORK TYPICAL DETAILS

WZ(BTS-1)-13

FILE: wzbts-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
2-98 10-99 7-13	DIST	COUNTY	SHEET NO.	
4-98 3-03	AMA	POTTER	32	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided in this standard or for incorrect use of this standard.

DATE: 8/11/2023 2:22:36 PM
FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2_Design Phase\TRAFFIC SIGNAL WORK BARRICADES AND SIGNS\SHEET 2 OF 2.dgn

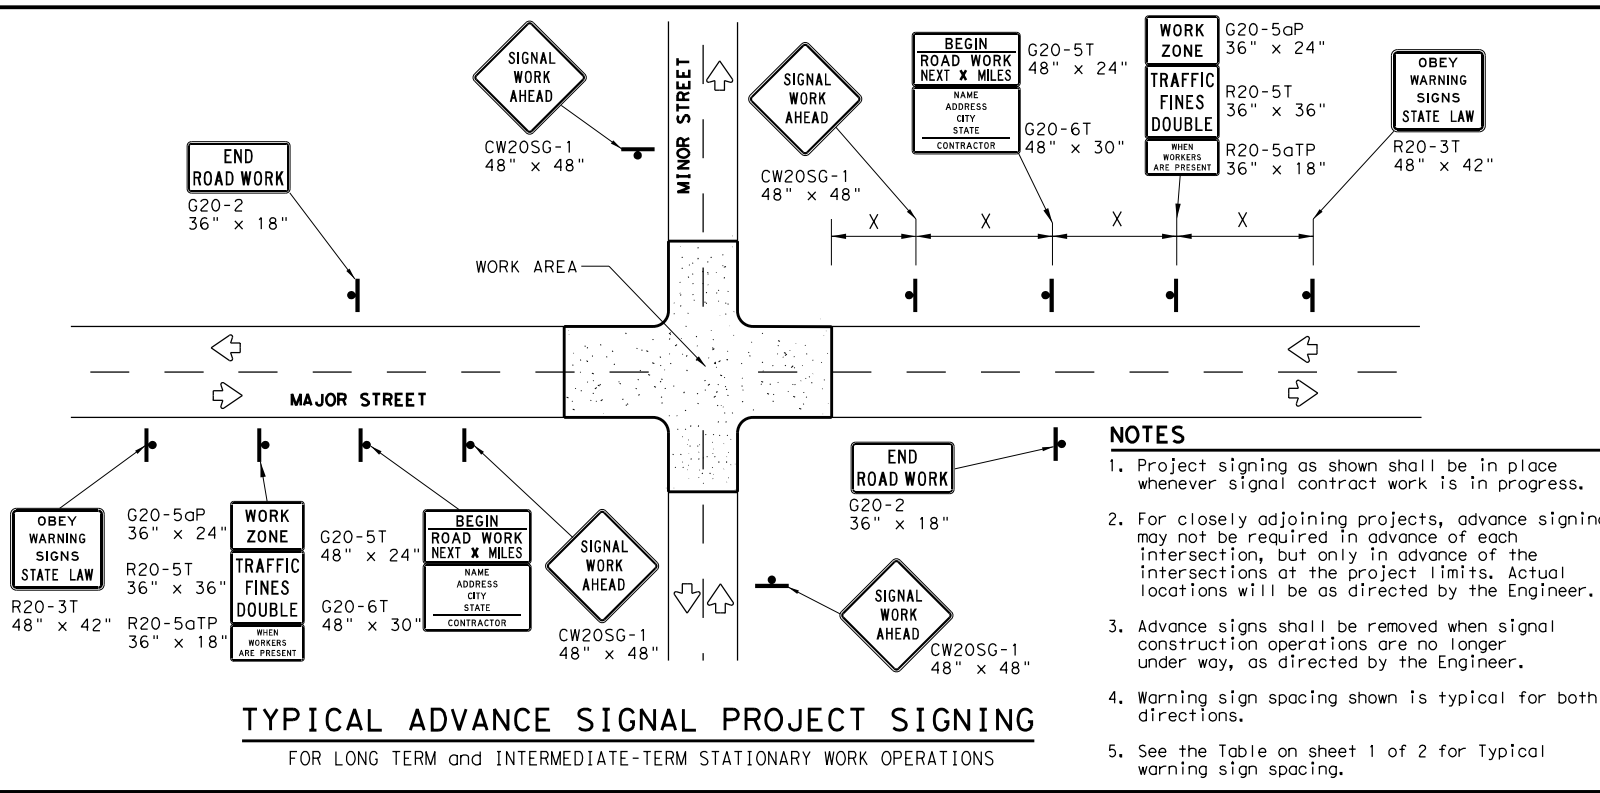

- NOTES**
- Project signing as shown shall be in place whenever signal contract work is in progress.
 - For closely adjoining projects, advance signing may not be required in advance of each intersection, but only in advance of the intersections at the project limits. Actual locations will be as directed by the Engineer.
 - Advance signs shall be removed when signal construction operations are no longer under way, as directed by the Engineer.
 - Warning sign spacing shown is typical for both directions.
 - See the Table on sheet 1 of 2 for Typical warning sign spacing.

GENERAL NOTES FOR WORK ZONE SIGNS

- Signs shall be installed and maintained in a straight and plumb condition.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- Nails shall NOT be used to attach signs to any support.
- All signs shall be installed in accordance with the plans or as directed by the Engineer.
- The Contractor shall furnish the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD).
- The Contractor shall furnish sign supports and substrates listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD), installed as per the manufacturer's recommendations.
- Temporary signs that have damaged or cracked substrates and/or damaged or marred reflective sheeting shall be replaced as directed by the Engineer.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1".
- Damaged wood posts shall be replaced. Splicing wood posts will not be allowed.

DURATION OF WORK

- Work zone durations are defined in Part 6, Section 60.02 of the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

SIGN MOUNTING HEIGHT

- Sign height of Long-term/Intermediate-term warning signs shall be as shown on Figure 6F-1 of the TMUTCD.
- Sign height of Short-term/Short Duration warning signs shall be as shown on Figure 6F-2 of the TMUTCD.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered, unless otherwise approved by the Engineer.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night without damaging the sign sheeting. Burlap, or heavy materials such as plywood or aluminum shall not be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes back filled upon completion of the work.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the requirements of the DMS and color usage table shown on this sheet.

SIGN SUPPORT WEIGHTS

- Weights used to keep signs from turning over should be sandbags filled with dry, cohesionless material.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects will not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber, such as tire inner tubes, shall not be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

LEGEND




—	Sign
■	Channelizing Devices
▨	Type 3 Barricade

DEPARTMENTAL MATERIAL SPECIFICATIONS

SIGN FACE MATERIALS	DMS-8300
FLEXIBLE ROLL-UP REFLECTIVE SIGNS	DMS-8310

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL} SHEETING
WHITE	BACKGROUND	TYPE A SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be found at the following web address:
http://www.txdot.gov/txdot_library/publications/construction.htm

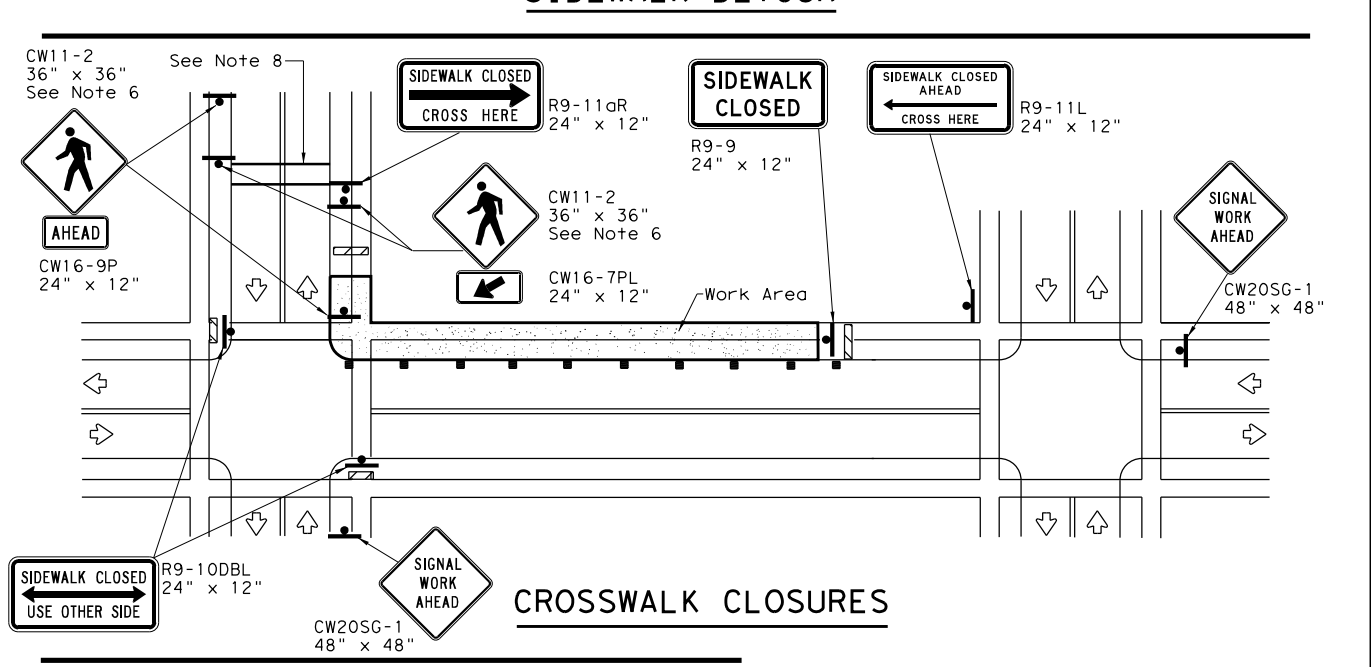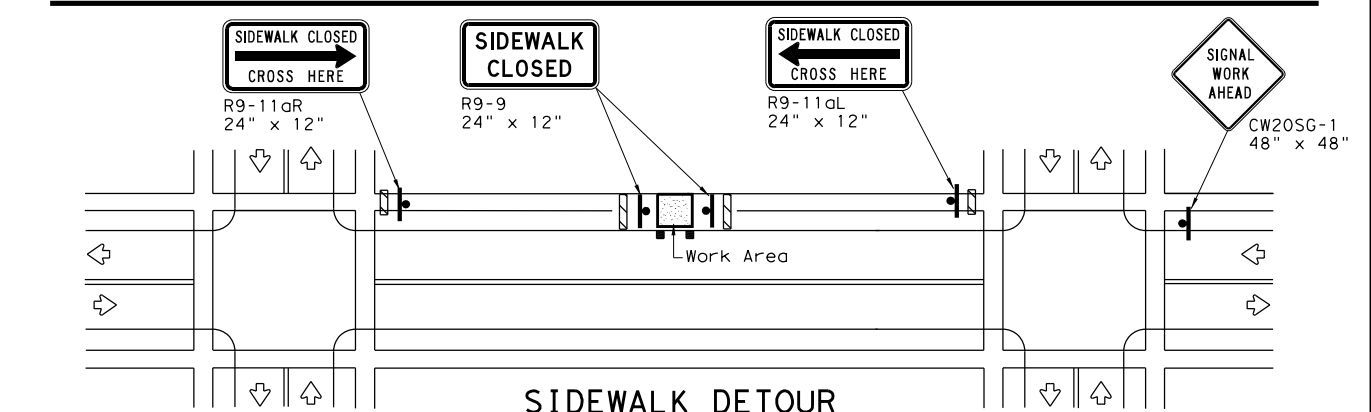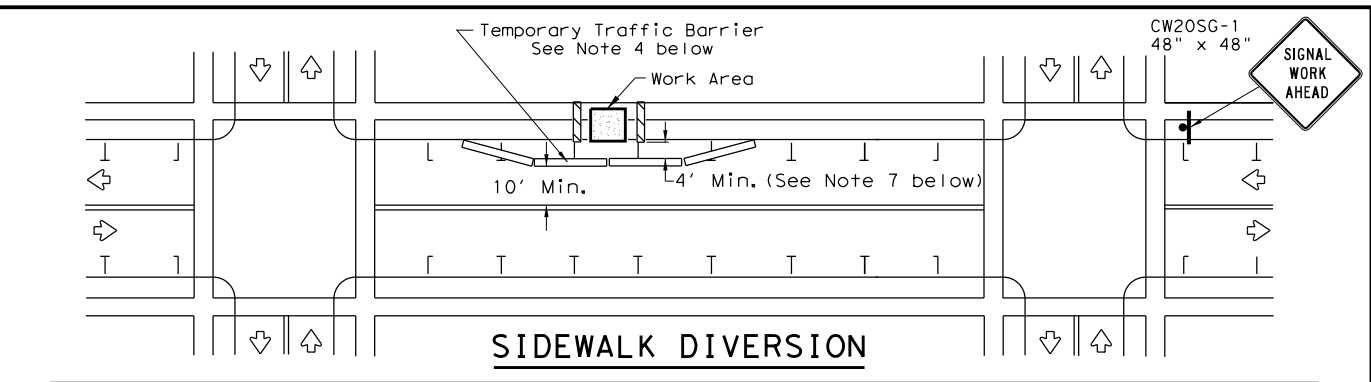

PEDESTRIAN CONTROL

- Holes, trenches or other hazards shall be adequately protected by covering, delineating or surrounding the hazard with orange plastic pedestrian fencing or longitudinal channelizing devices, or as directed by the Engineer.
- "CROSSWALK CLOSURES" as detailed above will require the Engineer's approval prior to installation.
- R9 series signs shown may be placed on supports detailed on the BC standards or CWZTCD list, or when fabricated from approved lightweight plastic substrates, they may be mounted on top of a plastic drum at or near the location shown.
- For speeds less than 45 mph longitudinal channelizing devices may be used instead of traffic barriers when approved by the Engineer. Attenuation of blunt ends and installation of water filled devices shall be as per BC(9) and manufacturer's recommendations.
- Location of devices are for general guidance. Actual device spacing and location must be field adjusted to meet actual conditions.
- Where pedestrians with visual disabilities normally use the closed sidewalk Detectable Pedestrian Barricades should be used instead of the Type 3 Barricades shown.
- The width of existing sidewalk should be maintained if practical.
- Pavement markings for mid-block crosswalks shall be paid for under the appropriate bid items.
- When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.

SHEET 2 OF 2

Texas Department of Transportation Traffic Operations Division Standard

TRAFFIC SIGNAL WORK BARRICADES AND SIGNS


WZ(BTS-2)-13

FILE: wZbts-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS		090400	220	VARIOUS
2-98 10-99 7-13	DIST	COUNTY	SHEET NO.	
4-98 3-03	AMA	POTTER	33	


DATE: 8/1/2023 2:22:36 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS.V2 Design Phase 01.dwg
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of units or for incorrect results or damages resulting from its use.

Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

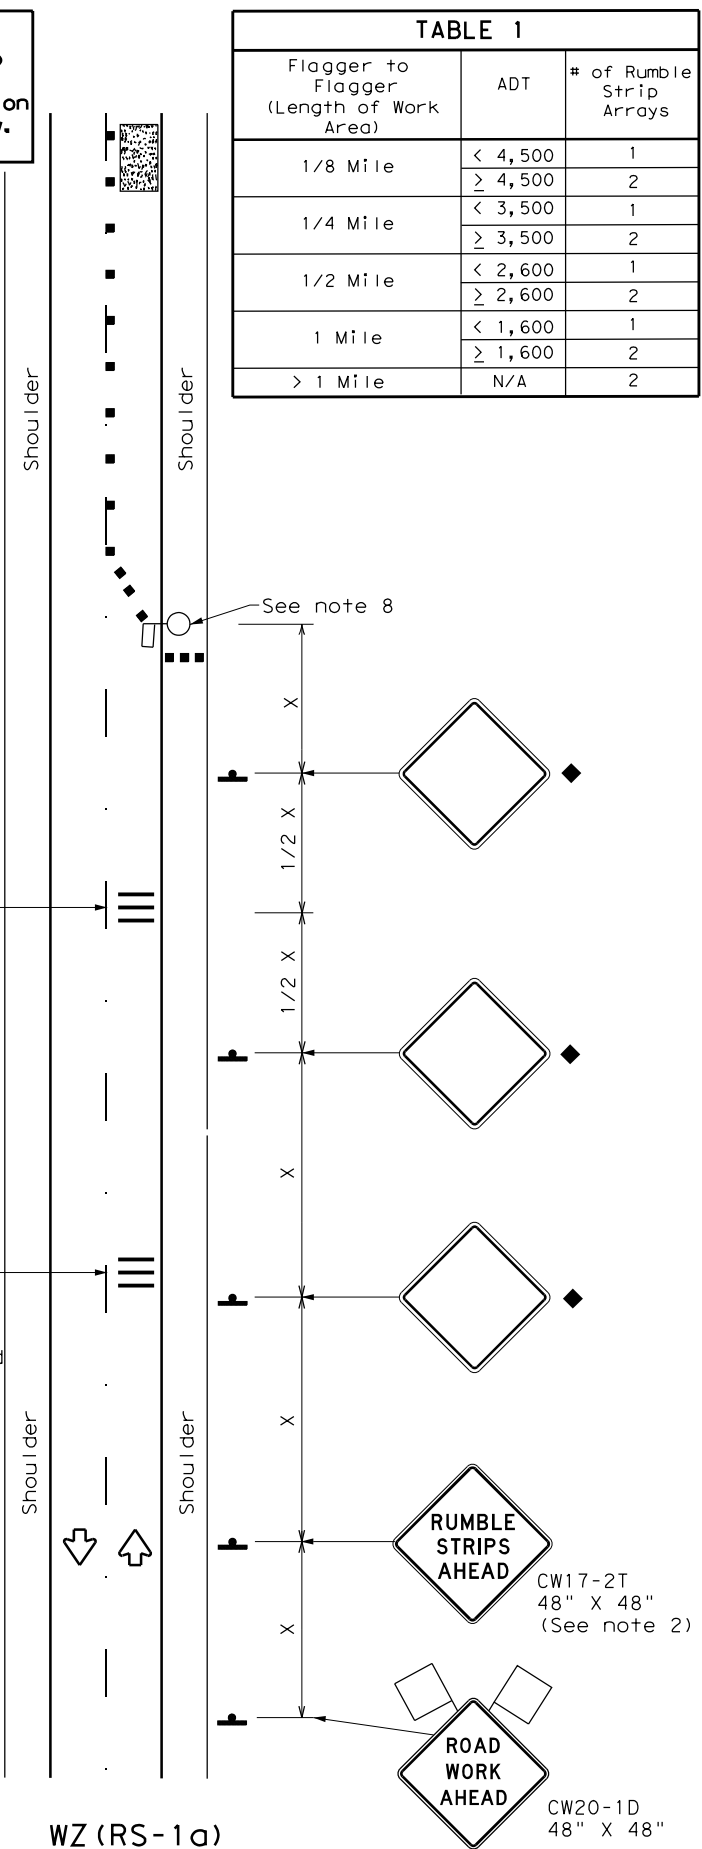

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

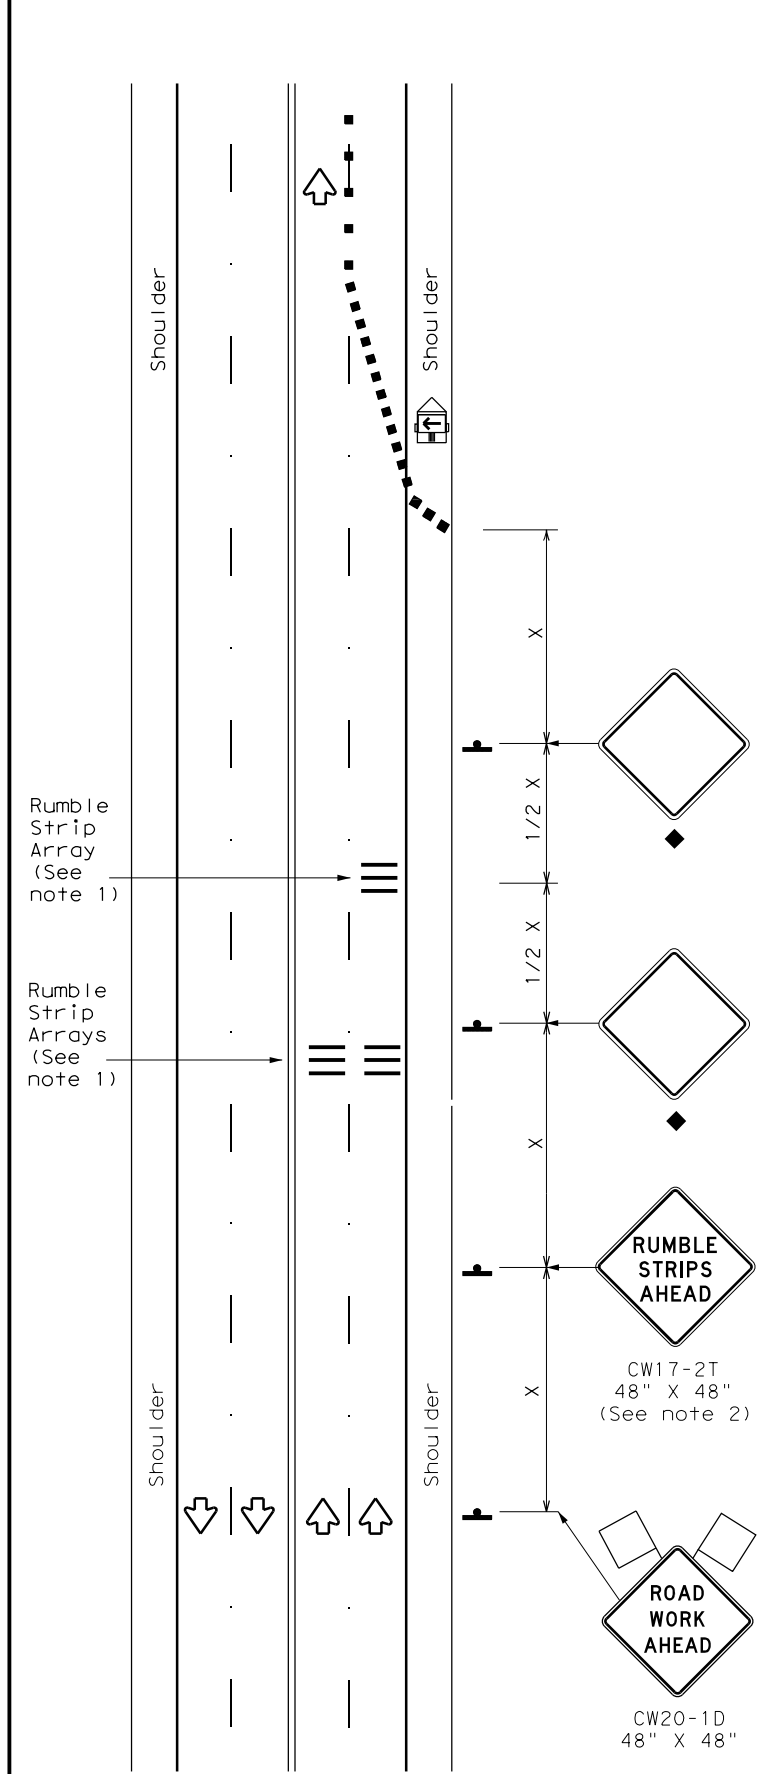

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.
 * For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

TEMPORARY RUMBLE STRIPS

WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
2-14 1-22 4-16	DIST	COUNTY	SHEET NO.	
	AMA	POTTER		34


DATE: 8/1/2023 2:22:39 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\P1_ITS01_MM01_01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'




LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP --- EXISTING ELECTRIC UTILITY POLE
- PP --- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB --- PROPOSED GROUND BOX TY A W/ APRON
- GB --- PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- PROPOSED BORED CONDUIT
- 1 --- CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GFEN (STEEL POST)
- PROPOSED BRF GF2
- PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

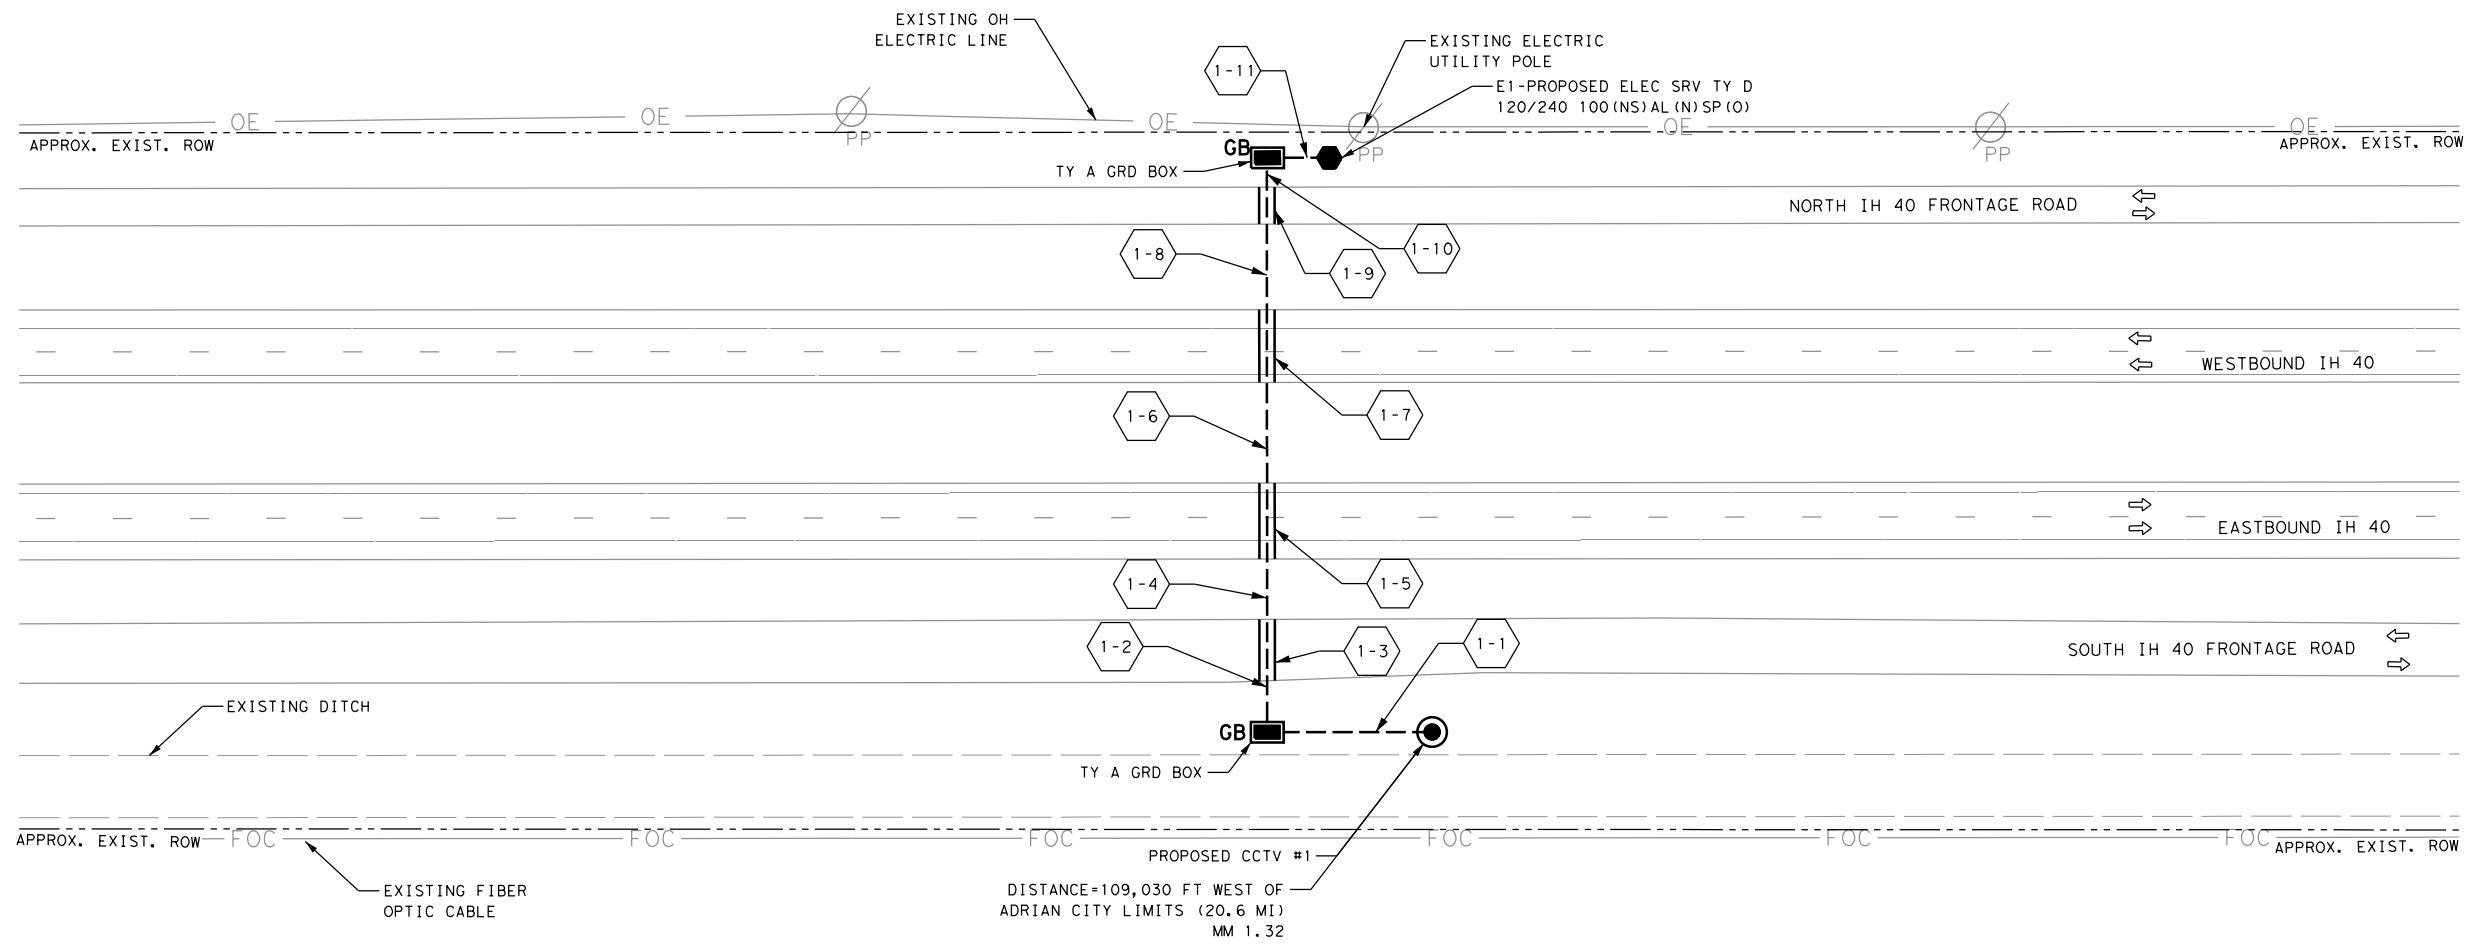


NO.	DATE	REVISION	APPROVED



IH 40 EB
 CCTV1

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

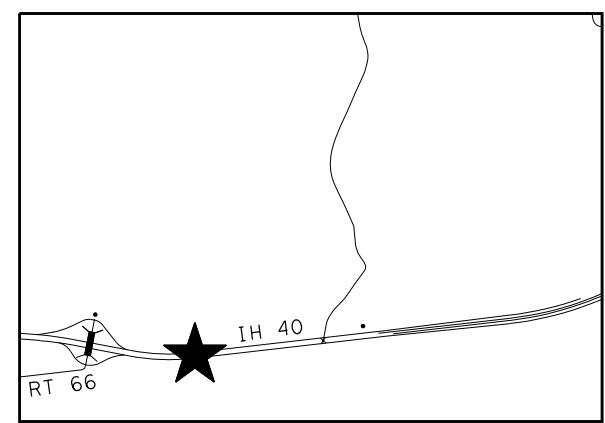

★ = LOCATION OF CCTV1

DATE: 8/1/2023 2:22:40 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS01_MM01_02.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-1 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)

SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-1	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #1	1P/20	15	120	1.8

CCTV #1 CONDUIT SUMMARY


RUN NUMBER	618 6046 CONDT (PVC) (SCH80)(2")	618 6047 CONDT (PVC) (SCH80)(2") (BORE)	620 6009 ELEC CONDR (NO. 6) BARE	620 6010 ELEC CONDR (NO. 6) INSULATED	RUN LENGTH FEET
1-1	1		1	2	80
1-2	1		1	2	25
1-3		1	1	2	35
1-4	1		1	2	35
1-5		1	1	2	45
1-6	1		1	2	55
1-7		1	1	2	40
1-8	1		1	2	45
1-9		1	1	2	20
1-10	1		1	2	15
1-11	1		1	2	25
TOTAL	LF	LF	LF	LF	
	280	140	420	840	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #1 MISCELLANEOUS SUMMARY

LOCATION	416 6005 DRILL SHAFT (42 IN)	432 6001 RIP RAP (CONC)(4 IN)	624 6002 GROUND BOX TY A (122311) W/ APRON	6010 6002 CCTV FIELD EQUIPMENT (DIGITAL)	6010 6004 CCTV MOUNT (POLE)	6064 6037 ITS POLE (50 FT)(90 MPH)	6064 6080 ITS POLE MNT CAB (TY 2) (CONF 1)	6247 6005 INSTALL OF CELLULAR MODEM	*MATERIAL PROVIDED BY THE STATE		
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
CCTV #1	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



**IH 40 EB
CCTV1 QUANTITIES**

SHEET 1 OF 1


FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

36




LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP / O EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB [] PROPOSED GROUND BOX TY A W/ APRON
- GB [] PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- ===== PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- MTL W-BEAM GD FEN (STEEL POST)
- PROPOSED BRF GF2
- PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

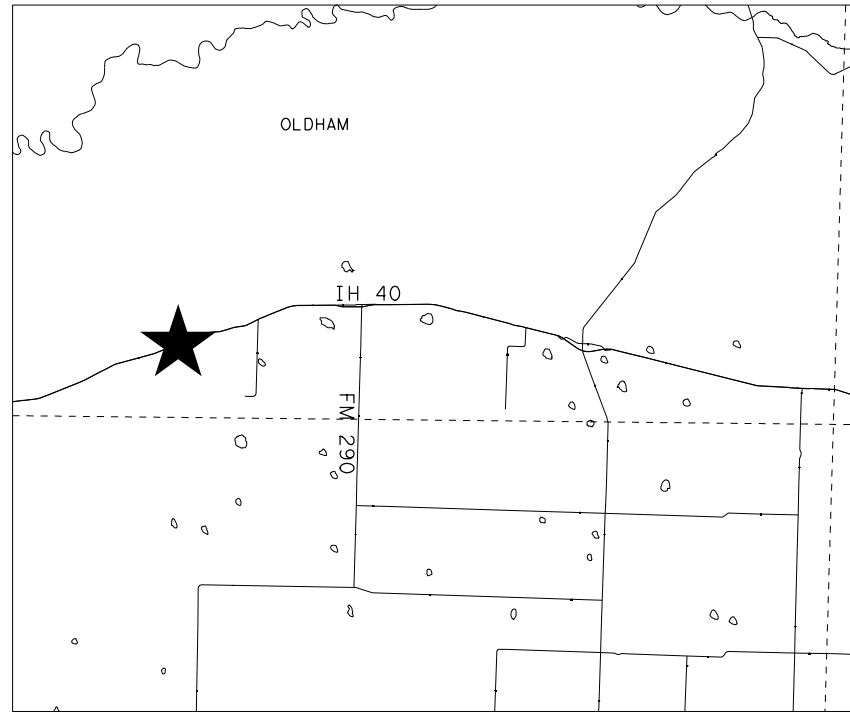

★ = LOCATION OF CCTV2 & DMS1

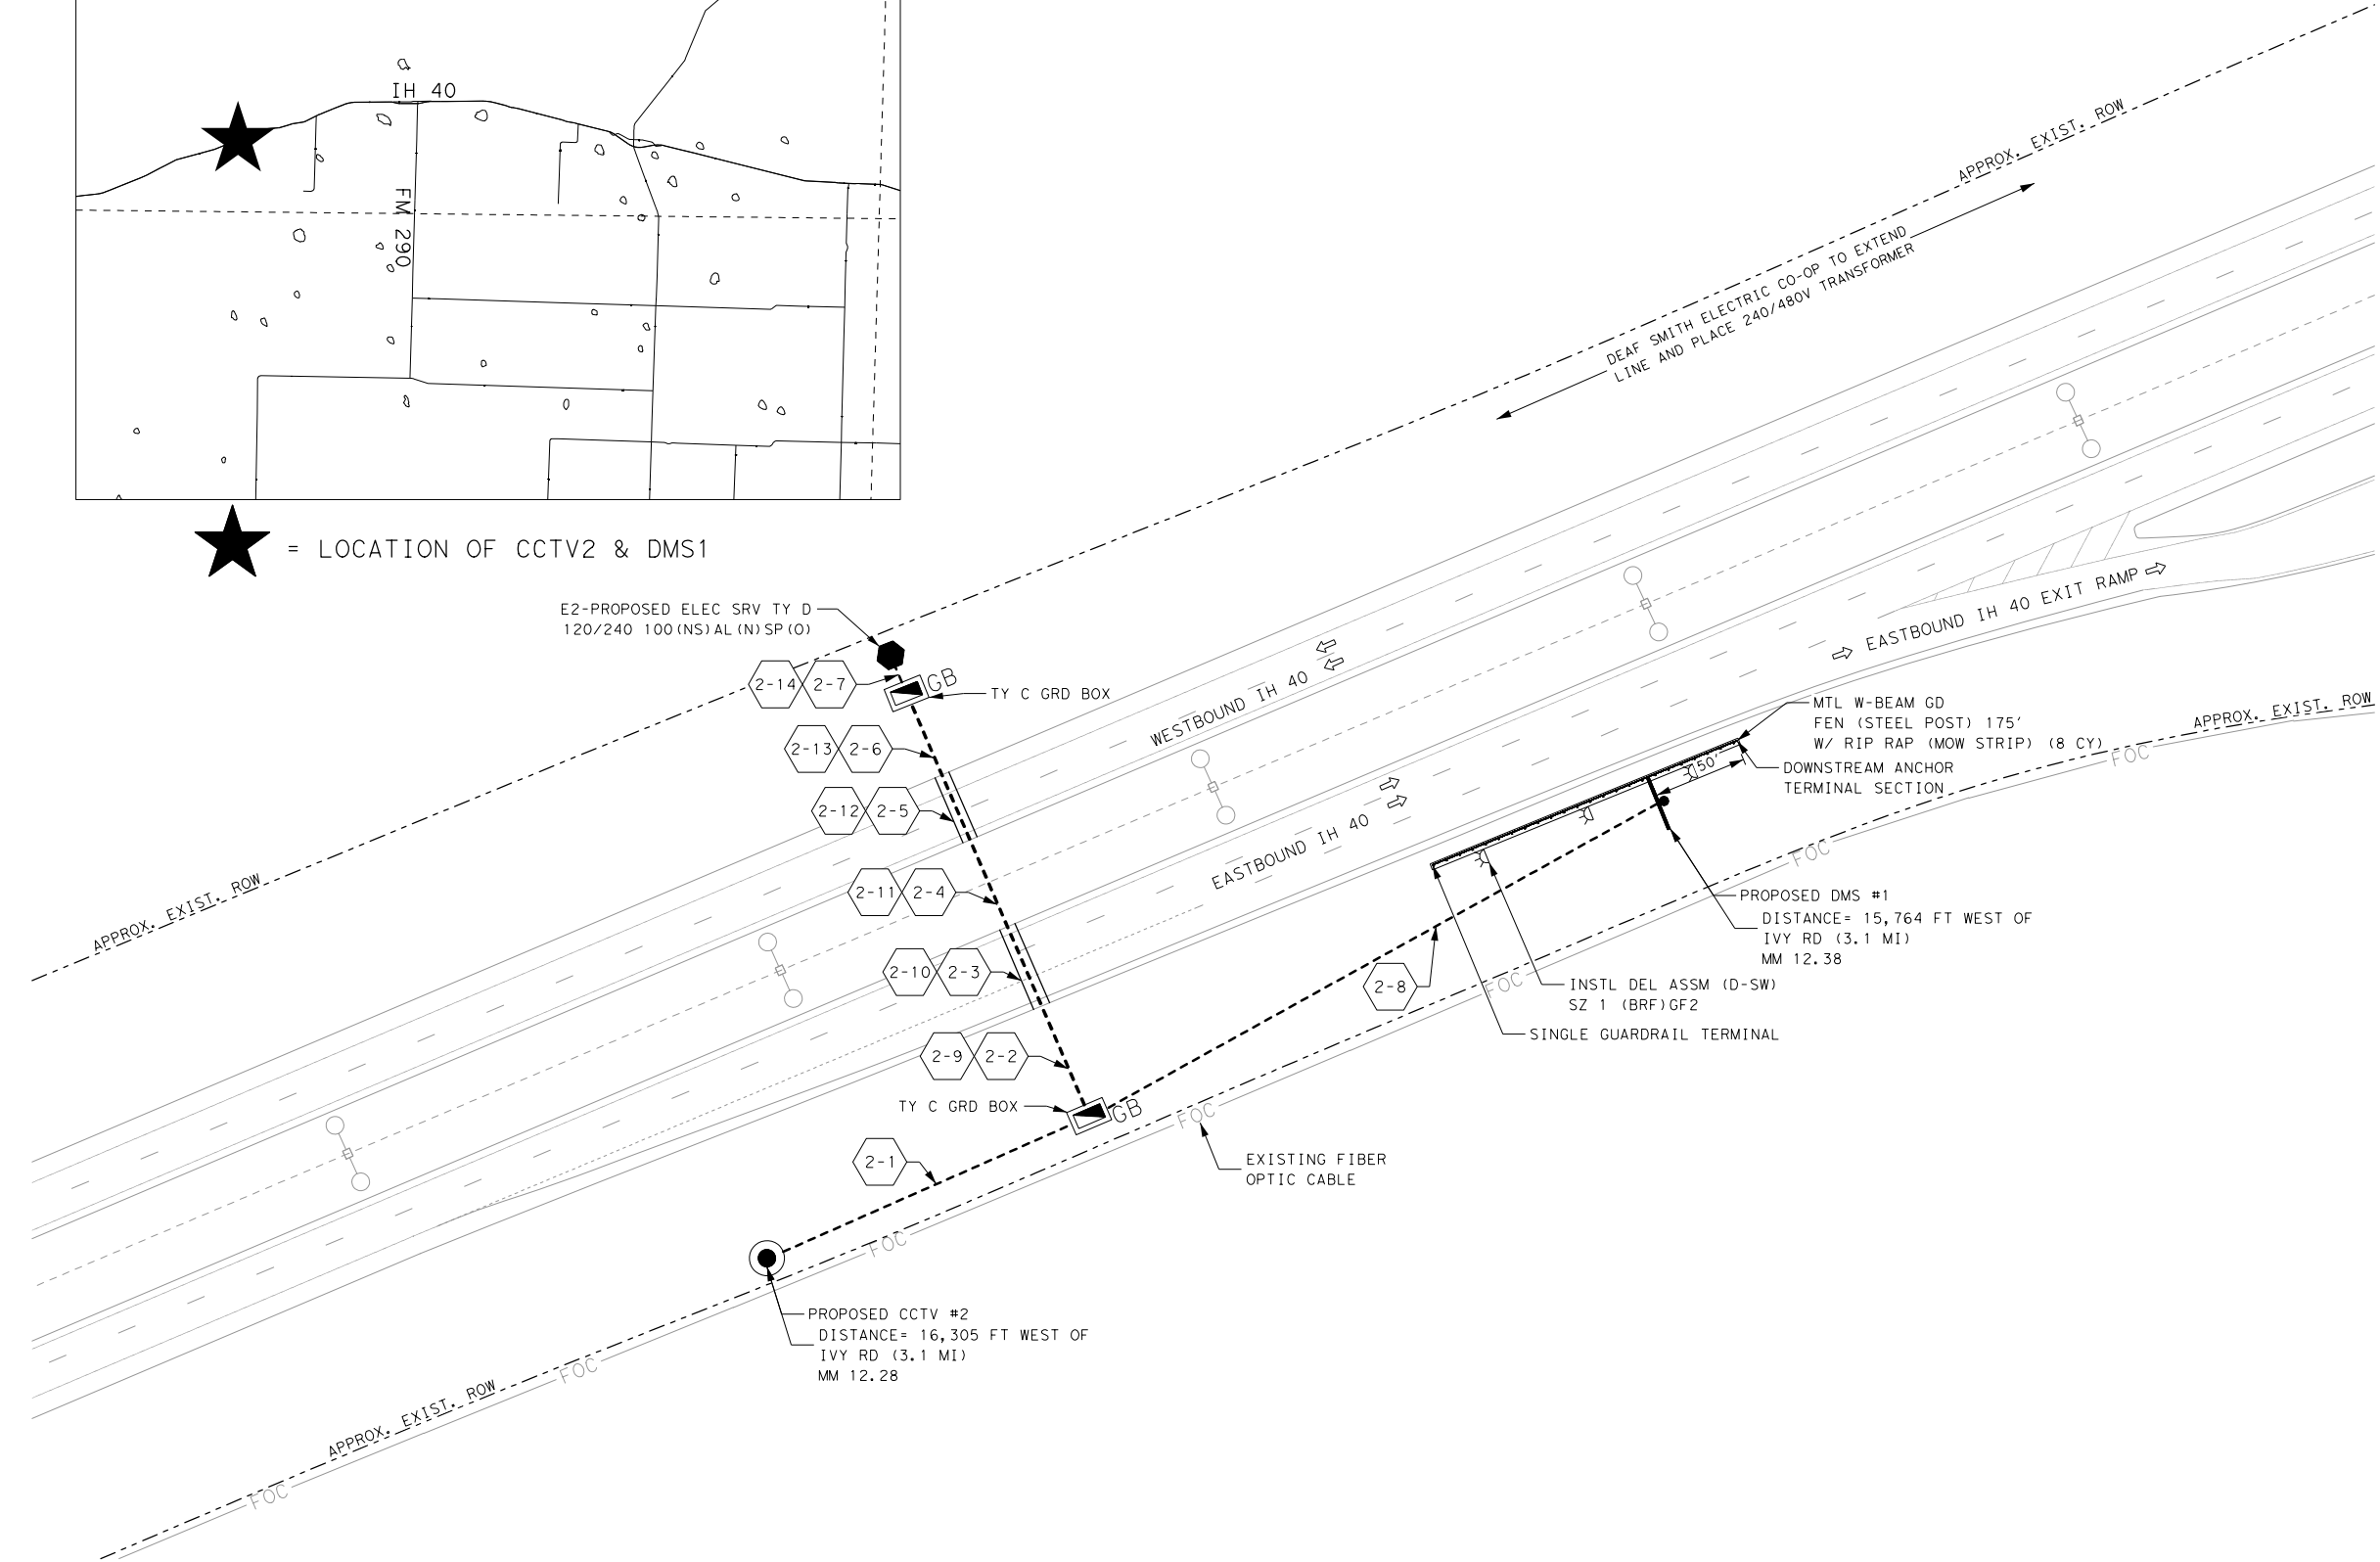

NO.	DATE	REVISION	APPROVED

08/01/2023

Carl B. Laferney



Pacheco Koch 4060 BRYANT IRVIN ROAD
 FORT WORTH, TX 76109
 817.412.7155
 a Westwood company TX REG. ENGINEERING FIRM F-469

IH 40 EB
 CCTV2 AND DMS1

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

37

PLOTTED: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_pentab.le.tbl
 USER: USER: keorellano
 DATE: 8/1/2023 8:59:38 AM
 FILE: \\S:\55565-23-020\DGN\Civil\Sheets\038_IH_40_EB_CCTV2_AND_DMS1_QUANTITIES.dgn

ELECTRICAL SERVICE E-2 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./ LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-2	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CCTV #2 DMS #1	1P/20 2P/70	15 50	120 240	13.8


CCTV #2 AND DMS #1 CONDUIT SUMMARY							
RUN NUMBER	618 6046	618 6047	620 6009	620 6010	620 6015	620 6016	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 6) BARE	ELEC CONDR (NO. 6) INSULATED	ELEC CONDR (NO. 2) BARE	ELEC CONDR (NO.2) INSULATED	FEET
2-1	1		1	2			190
2-2	1		1	2			65
2-3		1	1	2			50
2-4	1		1	2			55
2-5		1	1	2			40
2-6	1		1	2			45
2-7	1		1	2			20
2-8	1				1	3	355
2-9	1				1	3	65
2-10		1			1	3	50
2-11	1				1	3	55
2-12		1			1	3	40
2-13	1				1	3	45
2-14	1				1	3	20
TOTAL	LF	LF	LF	LF	LF	LF	
	915	180	465	930	630	1890	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #2 AND DMS #1 MISCELLANEOUS SUMMARY										
LOCATION	416 6005	416 6023	432 6001	432 6045	540 6002	540 6016	544 6001	624 6008	650 6028	658 6061
	DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC) (4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GFEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY C (162911) W/ APRON	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D-SW) SZ 1(BRF)GF2
	LF	LF	CY	CY	LF	EA	EA	EA	EA	EA
IH 40 EB CCTV #2	19		2					2		
IH 40 EB DMS #1		21	2	8	175	1	1		1	3
TOTAL	19	21	4	8	175	1	1	2	1	3

CCTV #2 AND DMS #1 MISCELLANEOUS SUMMARY											
LOCATION	6010 6002	6010 6004	6028 6001	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE				
	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-1 1/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)
	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 EB CCTV #2	1	1		1	1	1		1	1	1	
IH 40 EB DMS #1			1			1	1	1	1	1	1
TOTAL	1	1	1	1	1	2	1	2	2	2	1

NO.	DATE	REVISION	APPROVED



08/01/2023

Carl B. Laferney



Pacheco Koch a Westwood company



4060 BRYANT IRVIN ROAD
FORT WORTH, TX 76109
817.412.7155
TX REG. ENGINEERING
FIRM F-469

IH 40 EB
CCTV2 AND DMS1
QUANTITIES

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220
		38

DATE: 8/1/2023 2:22:42 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI ITS03_MM22-01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl

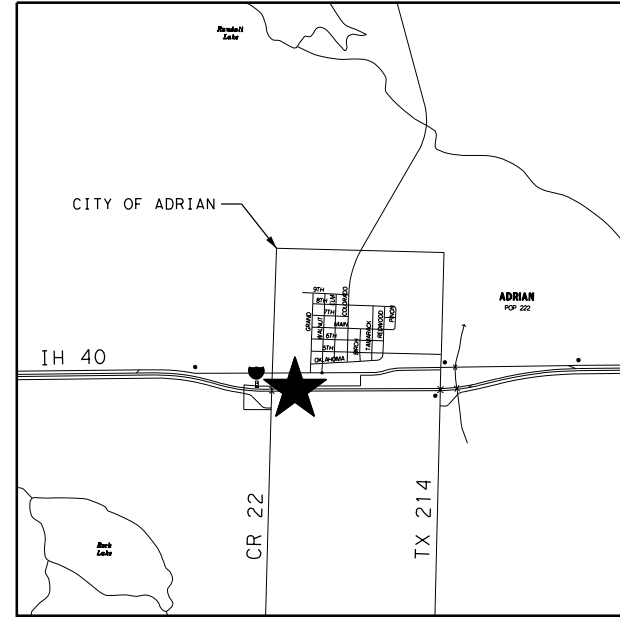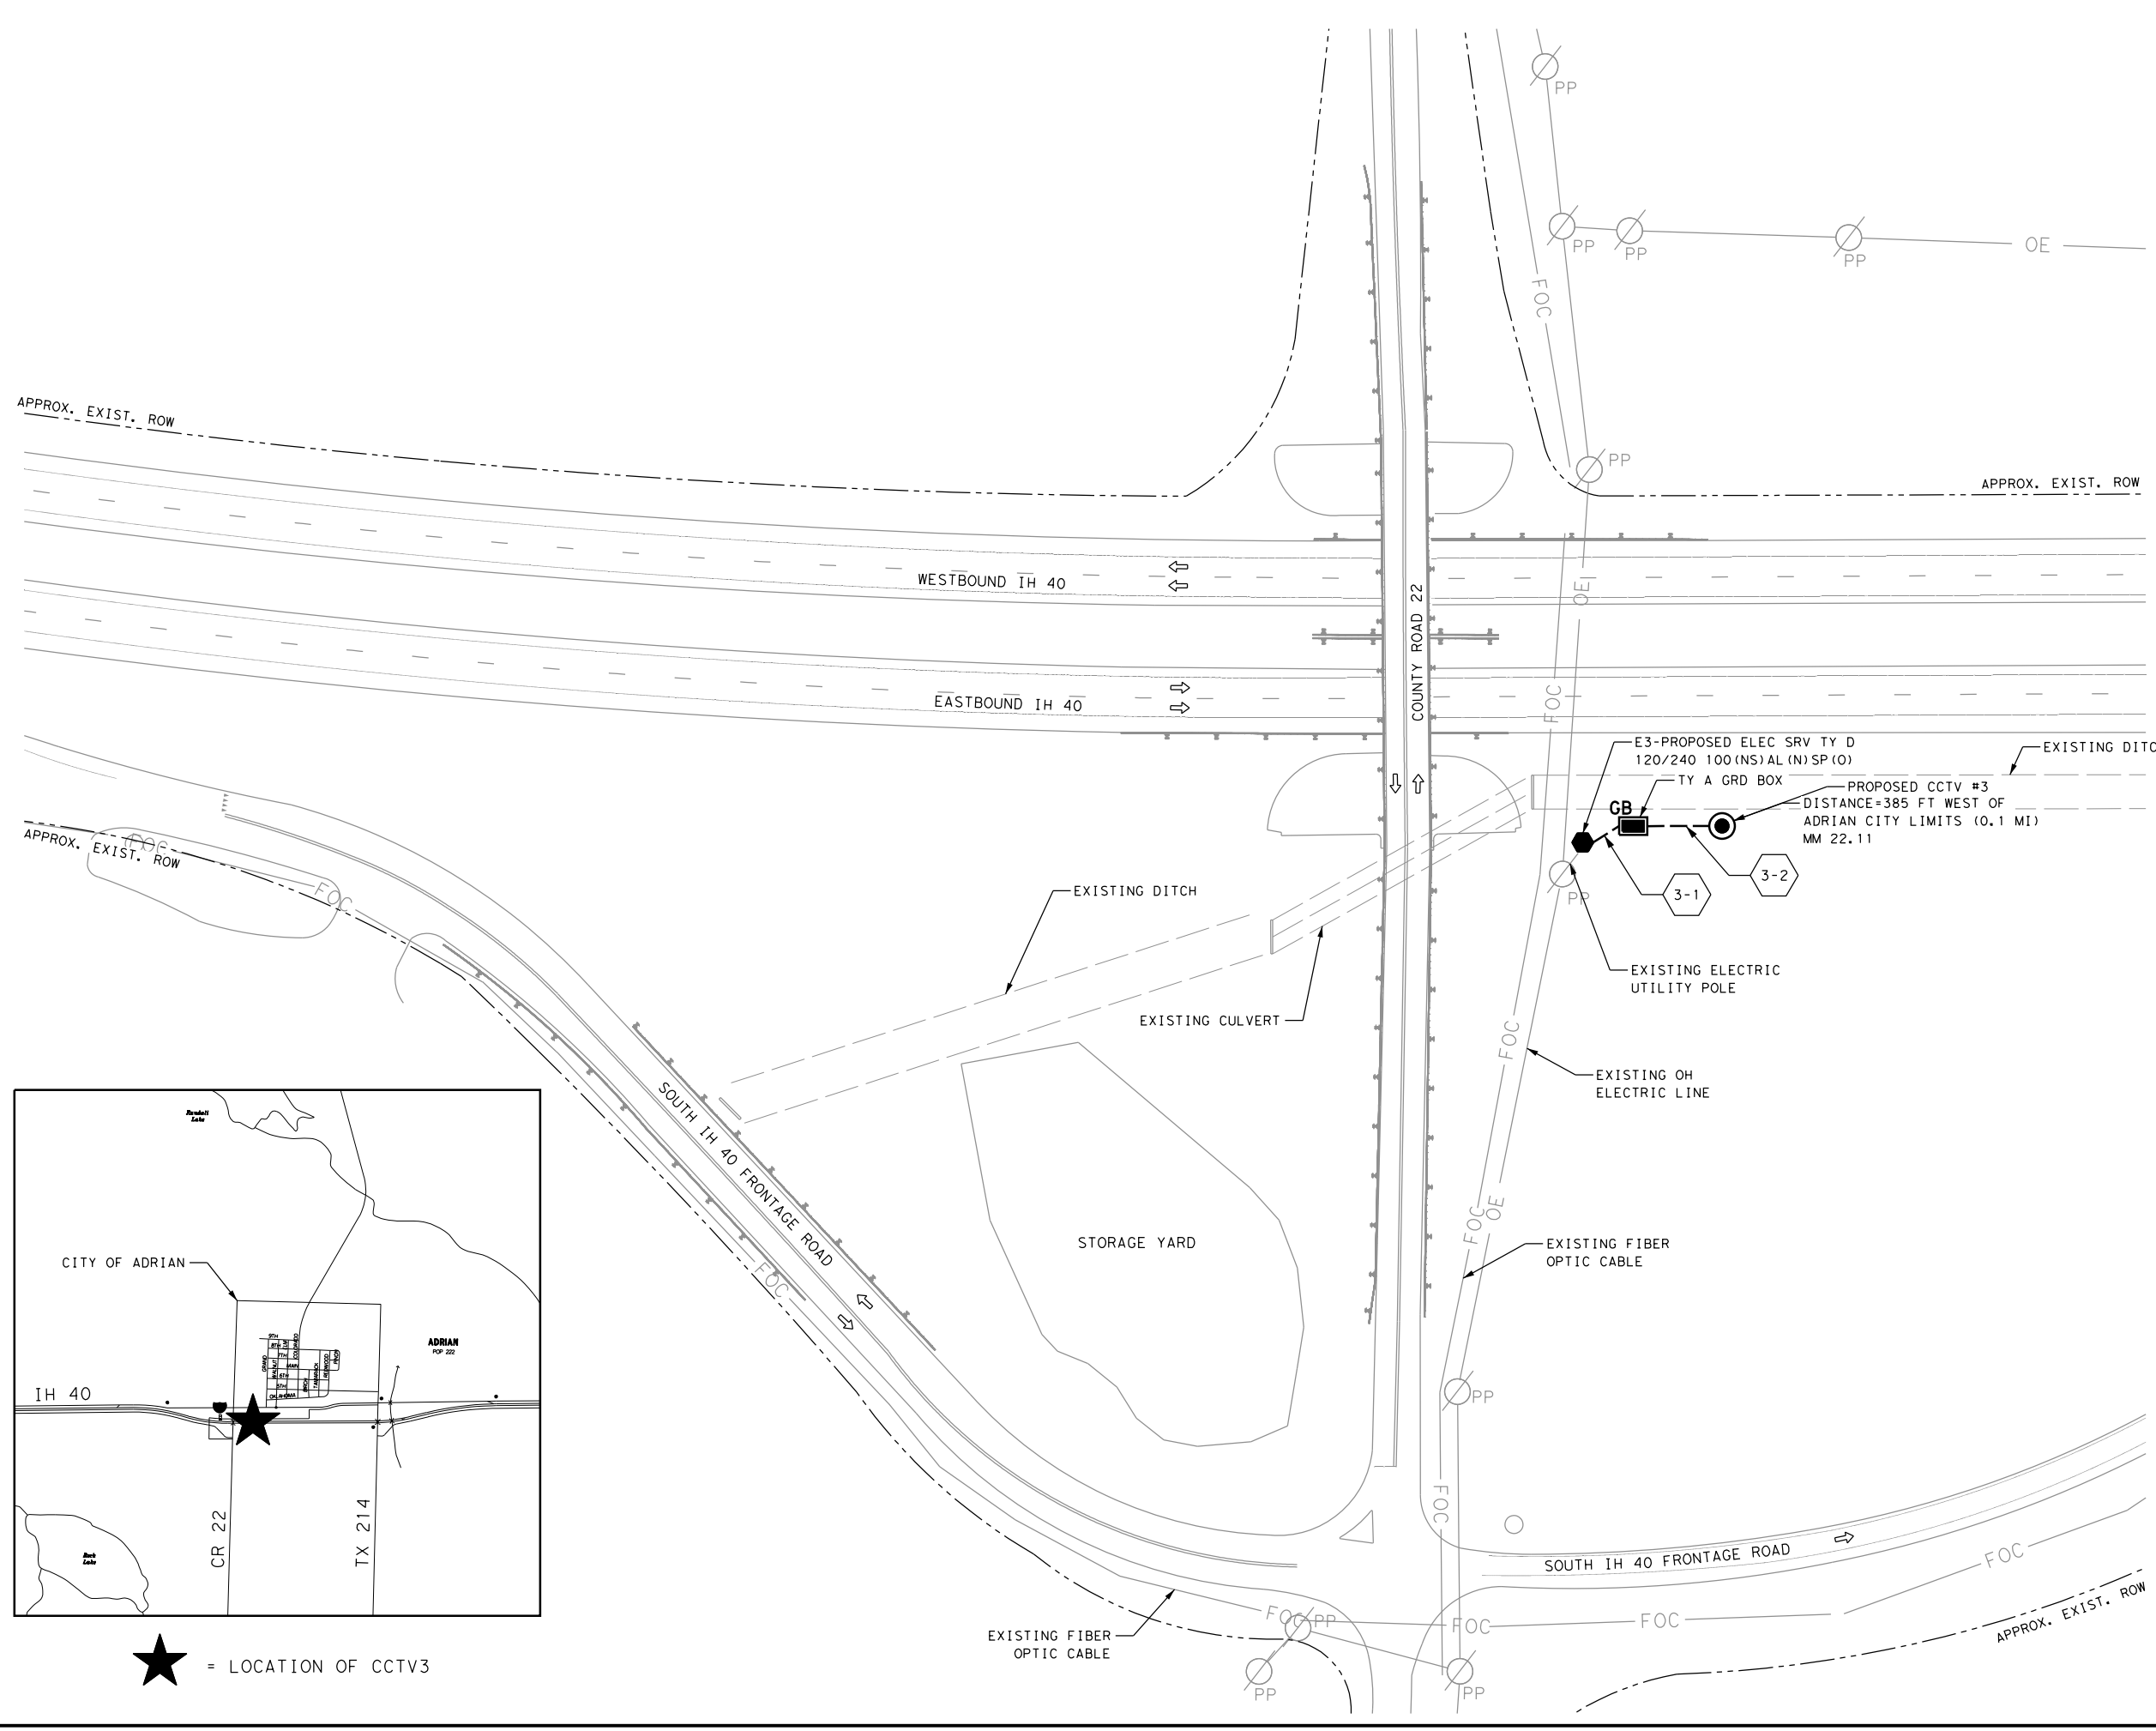

★ = LOCATION OF CCTV3


0' 25' 50' 100'
SCALE: 1" = 100'



LEGEND

- APPROX. EXIST. ROW
- OE EXISTING OVERHEAD ELECTRIC LINE
- PP EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB PROPOSED GROUND BOX TY A W/ APRON
- GB PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- PROPOSED BORED CONDUIT
- 1 CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GF2 FEN (STEEL POST)
- PROPOSED BRF GF2
- PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED



**IH 40 EB
CCTV3**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

39

DATE: 8/1/2023 2:22:43 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS03_MM22_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-3 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-3	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #3	1P/20	15	120	1.8

CCTV #3 CONDUIT SUMMARY				
RUN NUMBER	618 6046	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
3-1	1	1	2	25
3-2	1	1	2	50
TOTAL	LF	LF	LF	
	75	75	150	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #3 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #3	19	2	1	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



IH 40 EB
CCTV3 QUANTITIES

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

40

0' 25' 50' 100'
 SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ↔ LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED

08/01/2023
Carl B. Laferney



Texas Department of Transportation
 ©2023

Pacheco Koch
 a Westwood company
 4060 BRYANT IRVIN ROAD
 FORT WORTH, TX 76109
 817.412.7155
 TX REG. ENGINEERING
 FIRM F-469

**IH 40 EB
 CCTV4 AND DMS2**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

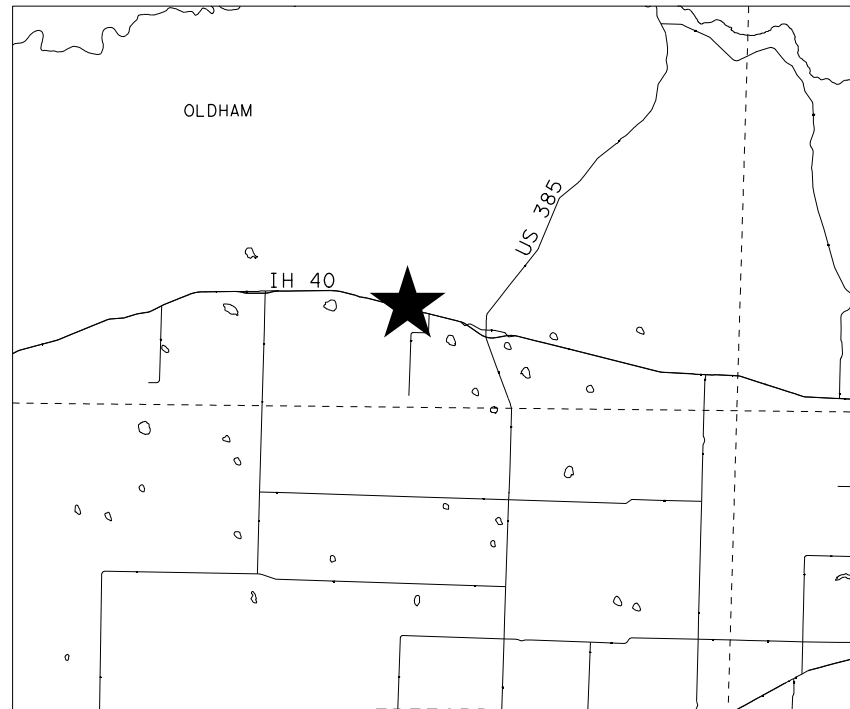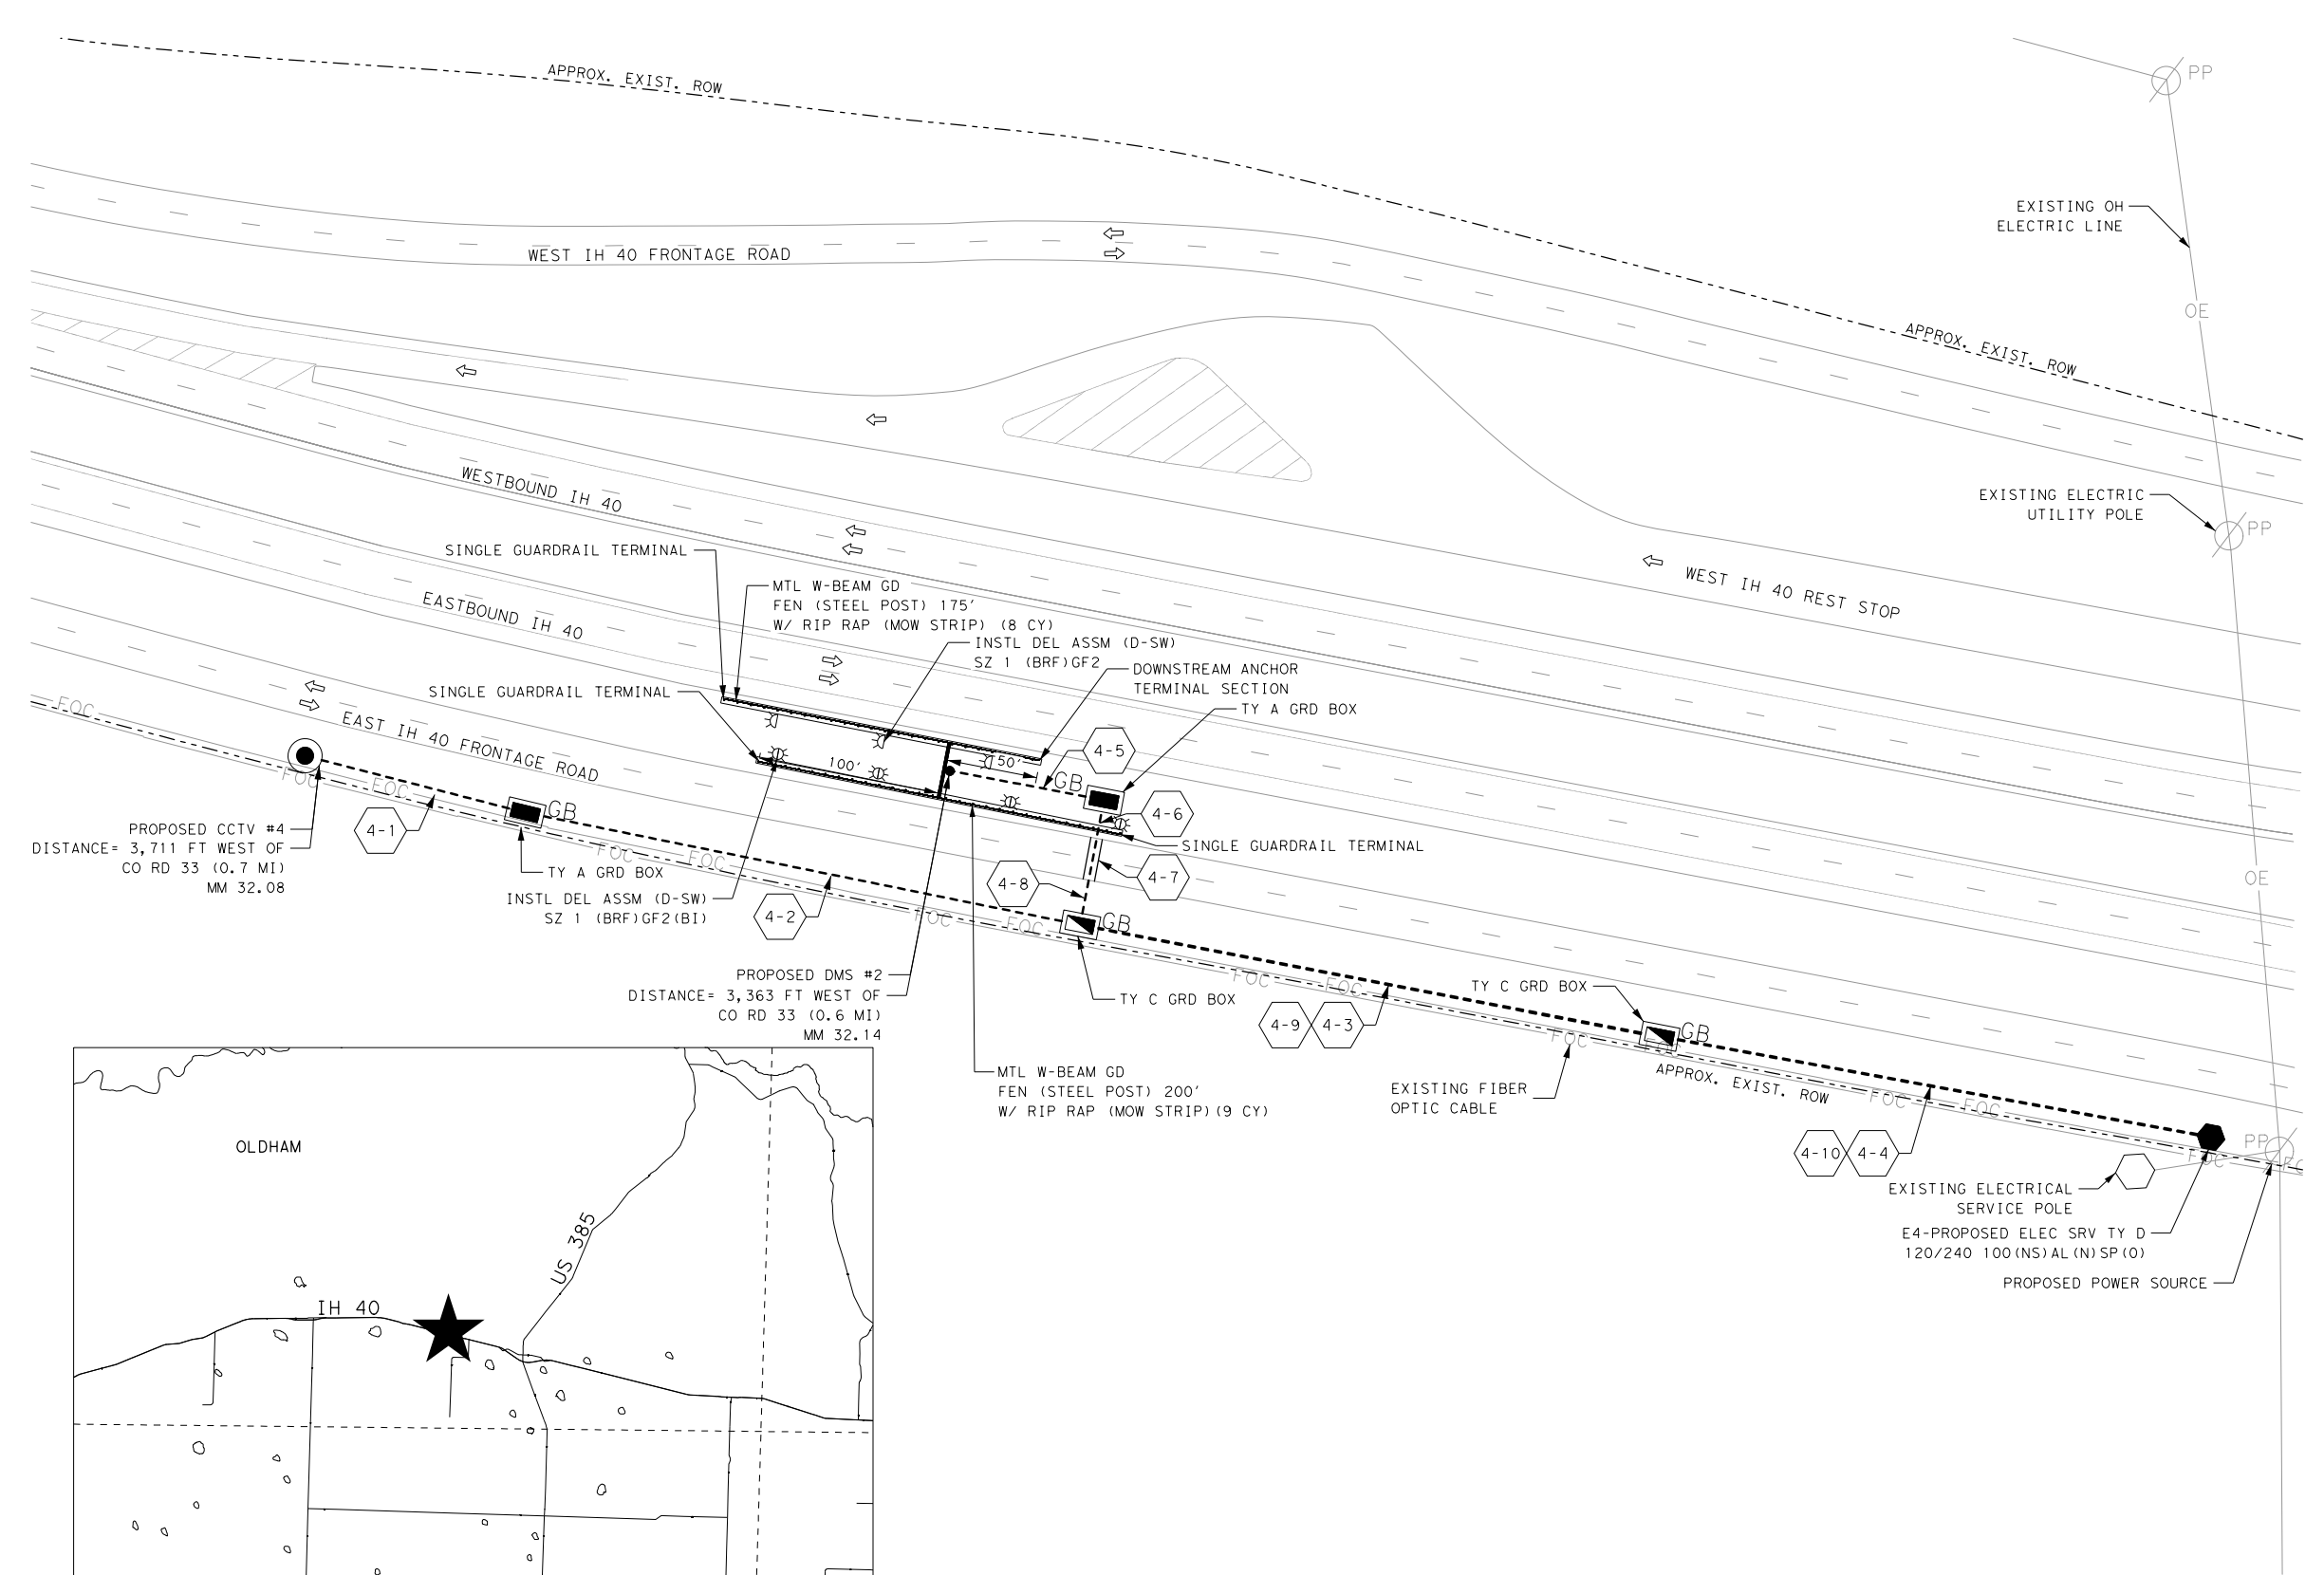

★ = LOCATION OF CCTV4 & DMS2

NOTES:
 1. CCTV #4 TO BE INSTALLED 6' OFF OF THE EXISTING FENCE/FIBER OPTIC CABLE.

DATE: 8/1/2023 8:59:55 AM
 USER: keorellano
 FILE: \\S:\5565-23-020\DGN\Civil\Sheets\042 IH 40 EB CCTV4 AND DMS2 QUANTITIES.dgn
 PLOT: PLOT: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_pentab.tbl

ELECTRICAL SERVICE E-4 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-4	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CCTV #4 DMS #2	1P/20 2P/70	15 50	120 240	13.8

CCTV #4 AND DMS #2 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6015	620 6016	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 2) BARE	ELEC CONDR (NO. 2) INSULATED	FEET
4-1	1		1	2	130
4-2	1		1	2	315
4-3	1		1	2	325
4-4	1		1	2	310
4-5	1		1	3	90
4-6	1		1	3	25
4-7		1	1	3	25
4-8	1		1	3	30
4-9	1		1	3	325
4-10	1		1	3	310
TOTAL	LF	LF	LF	LF	
	1860	25	1885	4575	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #4 AND DMS #2 MISCELLANEOUS SUMMARY												
LOCATION	416 6005	416 6023	432 6001	432 6045	540 6002	540 6016	544 6001	624 6002	624 6008	650 6028	658 6061	658 6062
	DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC) (4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GFEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY A (122311) W/ APRON	GROUND BOX TY C (162911) W/ APRON	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2(BI)
	LF	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA	EA
IH 40 EB CCTV #4	19		2					1	2			
IH 40 EB DMS #2		21	2	17	375	1	3	1		1	3	4
TOTAL	19	21	4	17	375	1	3	2	2	1	3	4

CCTV #4 AND DMS #2 MISCELLANEOUS SUMMARY										
LOCATION	6010 6002	6010 6004	6028 6001	6064 6037	6064 6080	*MATERIAL PROVIDED BY THE STATE				
	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-1 1/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)
	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 EB CCTV #4	1	1		1	1		1	1	1	
IH 40 EB DMS #2			1			1	1	1	1	1
TOTAL	1	1	1	1	1	1	2	2	2	1

NO.	DATE	REVISION	APPROVED

Carl B. Laferney



Pacheco Koch
a Westwood company

4060 BRYANT IRVIN ROAD
FORT WORTH, TX 76109
817.412.7155
TX REG. ENGINEERING
FIRM F-469

IH 40 EB
CCTV4 AND DMS2
QUANTITIES

SHEET 1 OF 1		
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220
		42


DATE: 8/1/2023 2:22:45 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS05_MM49_5_01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PP ● PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ↑ LANE ASSIGNMENT ARROWS

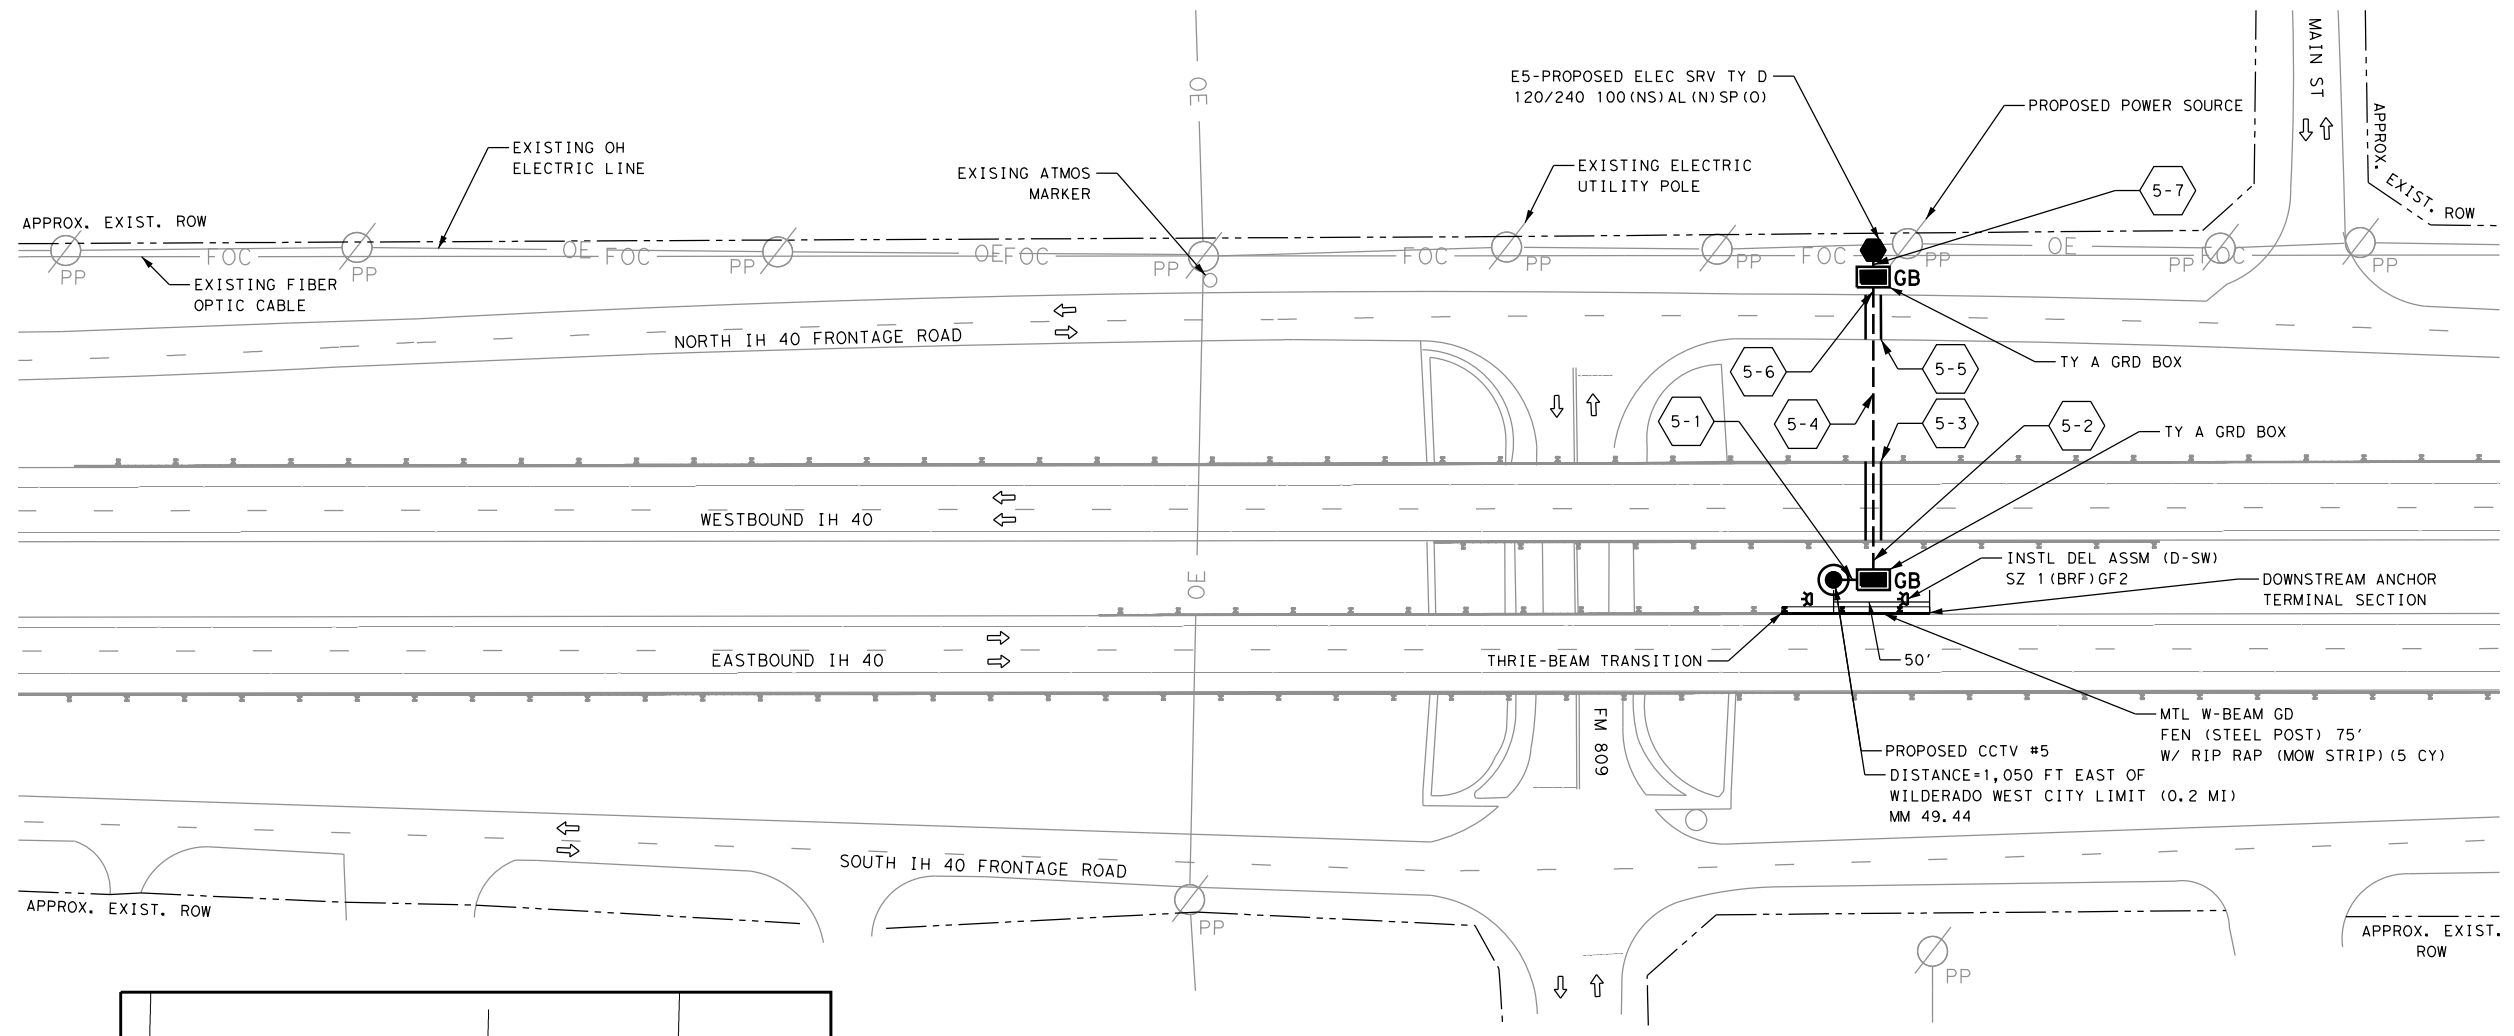

NO.	DATE	REVISION	APPROVED

P.E., P.E. ASPI
 8/1/2023

Texas Department of Transportation
 ©2023


QUIDDITY
Texas Board of Professional Engineers and Land Surveyors Reg. No. F-23290
 6330 West Loop South, Suite 150 • Bellaire, TX 77401 • 713.777.5337

**IH 40 EB/WB
 CCTV5**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

43

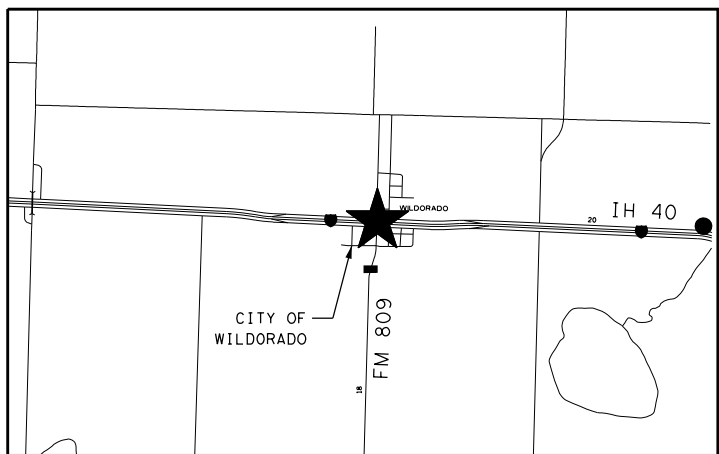

★ = LOCATION OF CCTV #5

DATE: 8/1/2023 2:22:46 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS05_MM49_5_02.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: TH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-5 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-5	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #5	1P/20	15	120	1.8

CCTV #5 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
5-1	1		1	2	25
5-2	1		1	2	25
5-3		1	1	2	50
5-4	1		1	2	70
5-5		1	1	2	30
5-6	1		1	2	15
5-7	1		1	2	15
TOTAL	LF	LF	LF	LF	
	150	80	230	460	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #5 MISCELLANEOUS SUMMARY										
LOCATION	416 6005	432 6001	432 6045	540 6002	540 6006	540 6016	624 6002	658 6061	6010 6002	6010 6004
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GD FEN (STEEL POST)	MTL BEAM GD FEN TRANS (THRIE-BEAM)	DOWNSTREAM ANCHOR TERMINAL SECTION	GROUND BOX TY A (122311) W/ APRON	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)
	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA
IH 40 CCTV #5	19	2	5	75	1	1	2	2	1	1

CCTV #5 MISCELLANEOUS SUMMARY						
LOCATION	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	EA	EA	EA	EA	EA	EA
IH 40 CCTV #5	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



IH 40 EB
CCTV5 QUANTITIES


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	OLDHAM
CONT.	SECT.	JOB
0904	00	220

44



DATE: 8/1/2023 2:22:48 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS06_MM53-01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_penttable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'




LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- ▬ PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

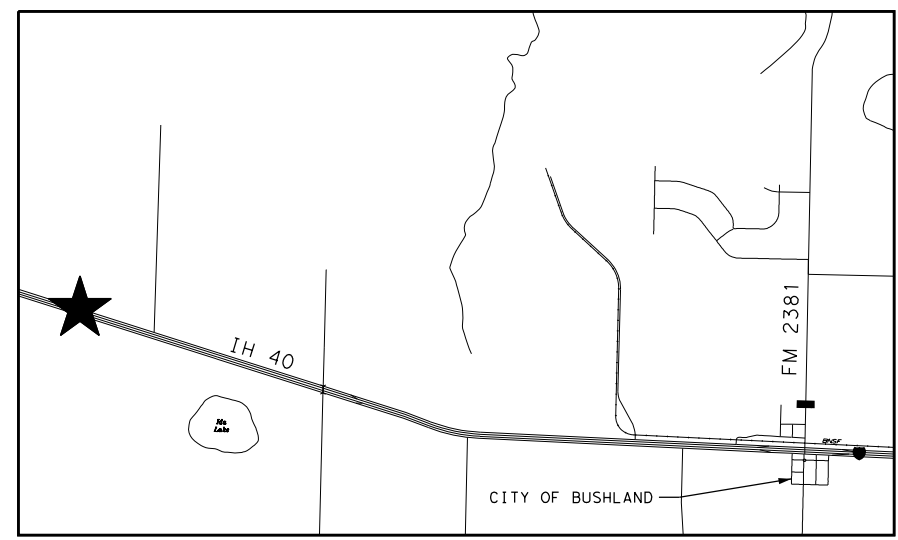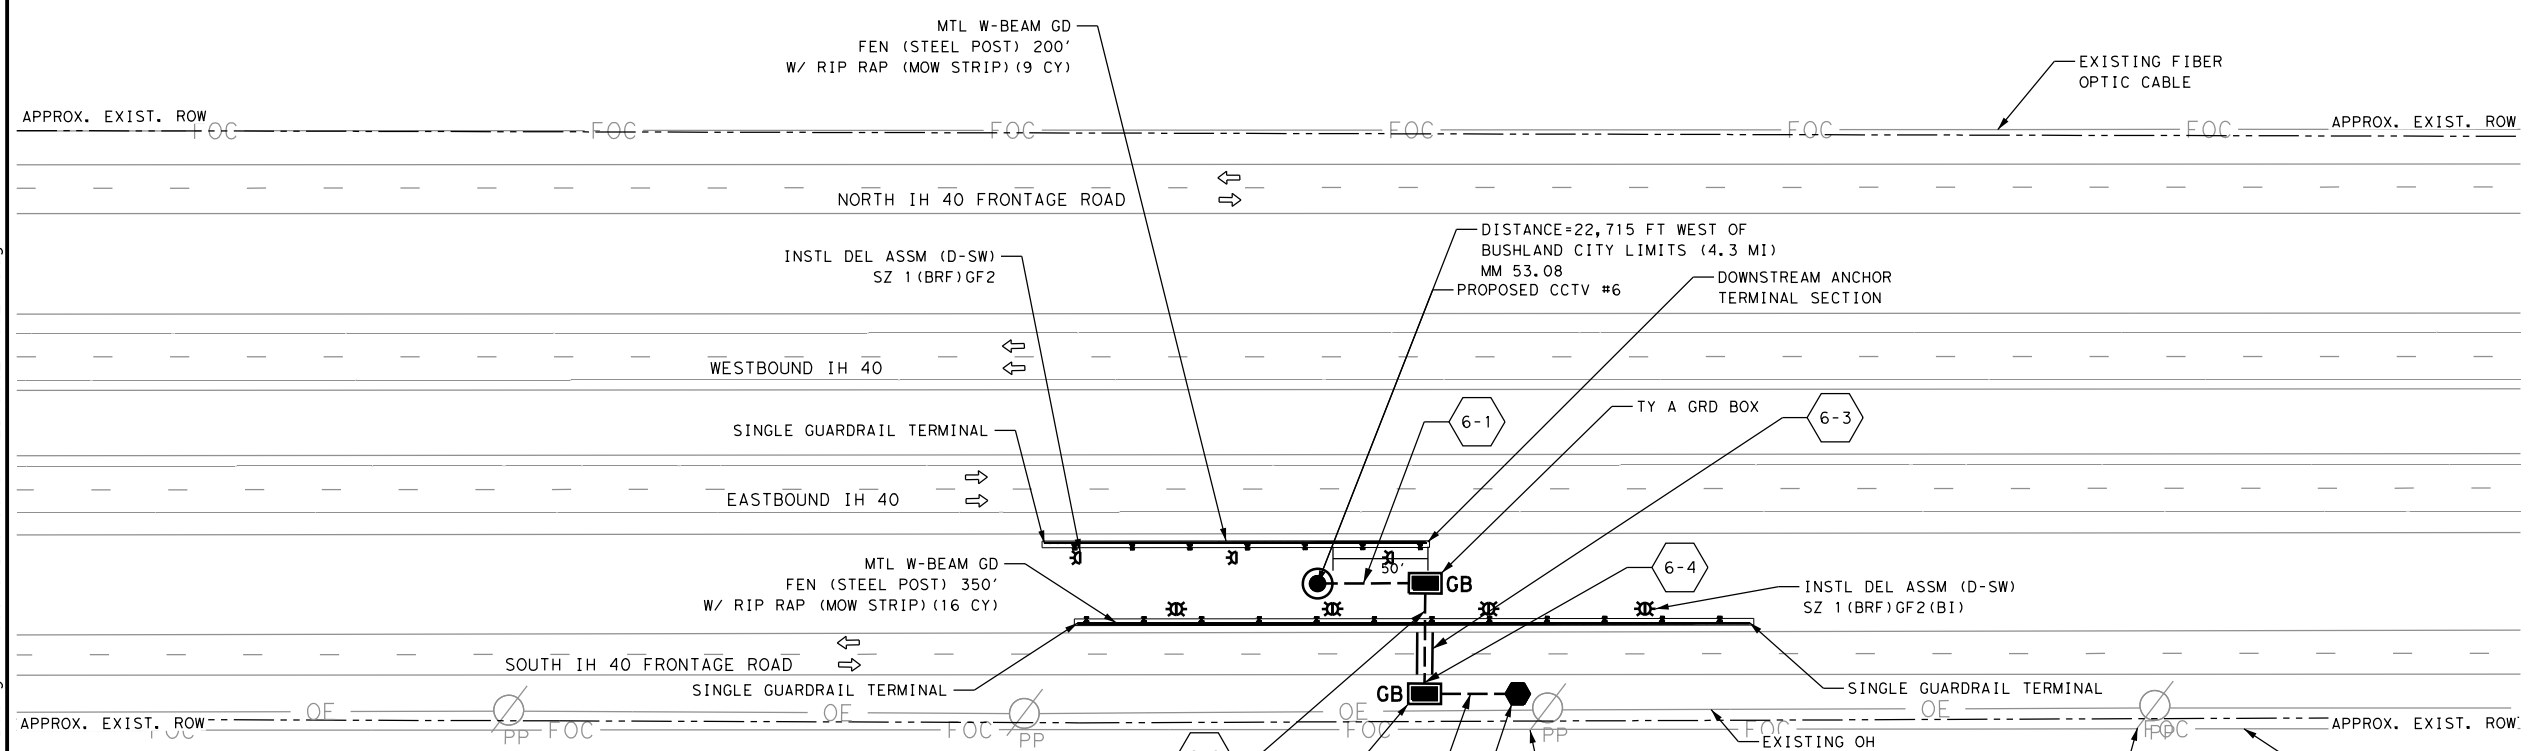

★ = LOCATION OF CCTV6

NO.	DATE	REVISION	APPROVED



IH 40 EB
 CCTV6

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

45

DATE: 8/1/2023 2:22:48 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS06_MM53_02.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-6 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-6	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #6	1P/20	15	120	1.8

CCTV #6 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
6-1	1		1	2	50
6-2	1		1	2	25
6-3		1	1	2	25
6-4	1		1	2	10
6-5	1		1	2	45
TOTAL	LF	LF	LF	LF	
	130	25	155	310	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #6 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	432 6045	540 6002	540 6016	544 6001	624 6002	658 6061	658 6062	6010 6002	6010 6004
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GD FEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY A (122311) W/ APRON	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2 (BI)	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)
	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #6	19	2	25	550	1	3	2	3	4	1	1

CCTV #6 MISCELLANEOUS SUMMARY						
LOCATION	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	EA	EA	EA	EA	EA	EA
IH 40 CCTV #6	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



IH 40 EB
CCTV6 QUANTITIES

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

46



DATE: 8/1/2023 2:22:52 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS07_MM63.5_01.dgn
 USER: T_Cowser
 PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB □ PROPOSED GROUND BOX TY A W/ APRON
- GB □ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊖ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

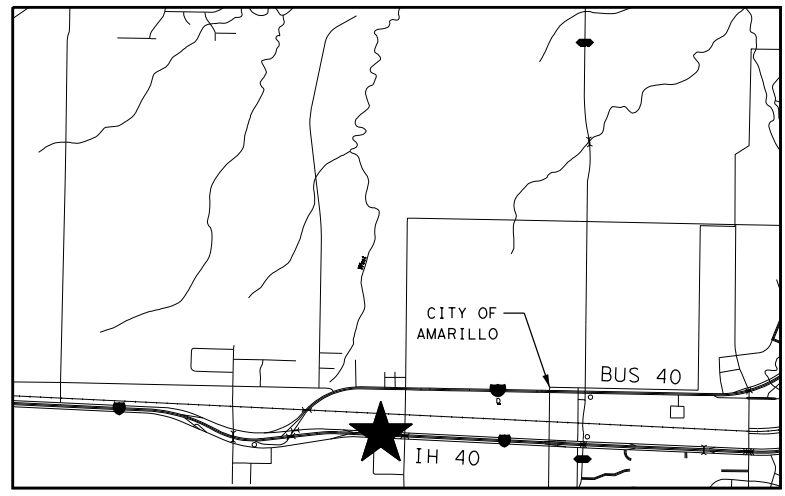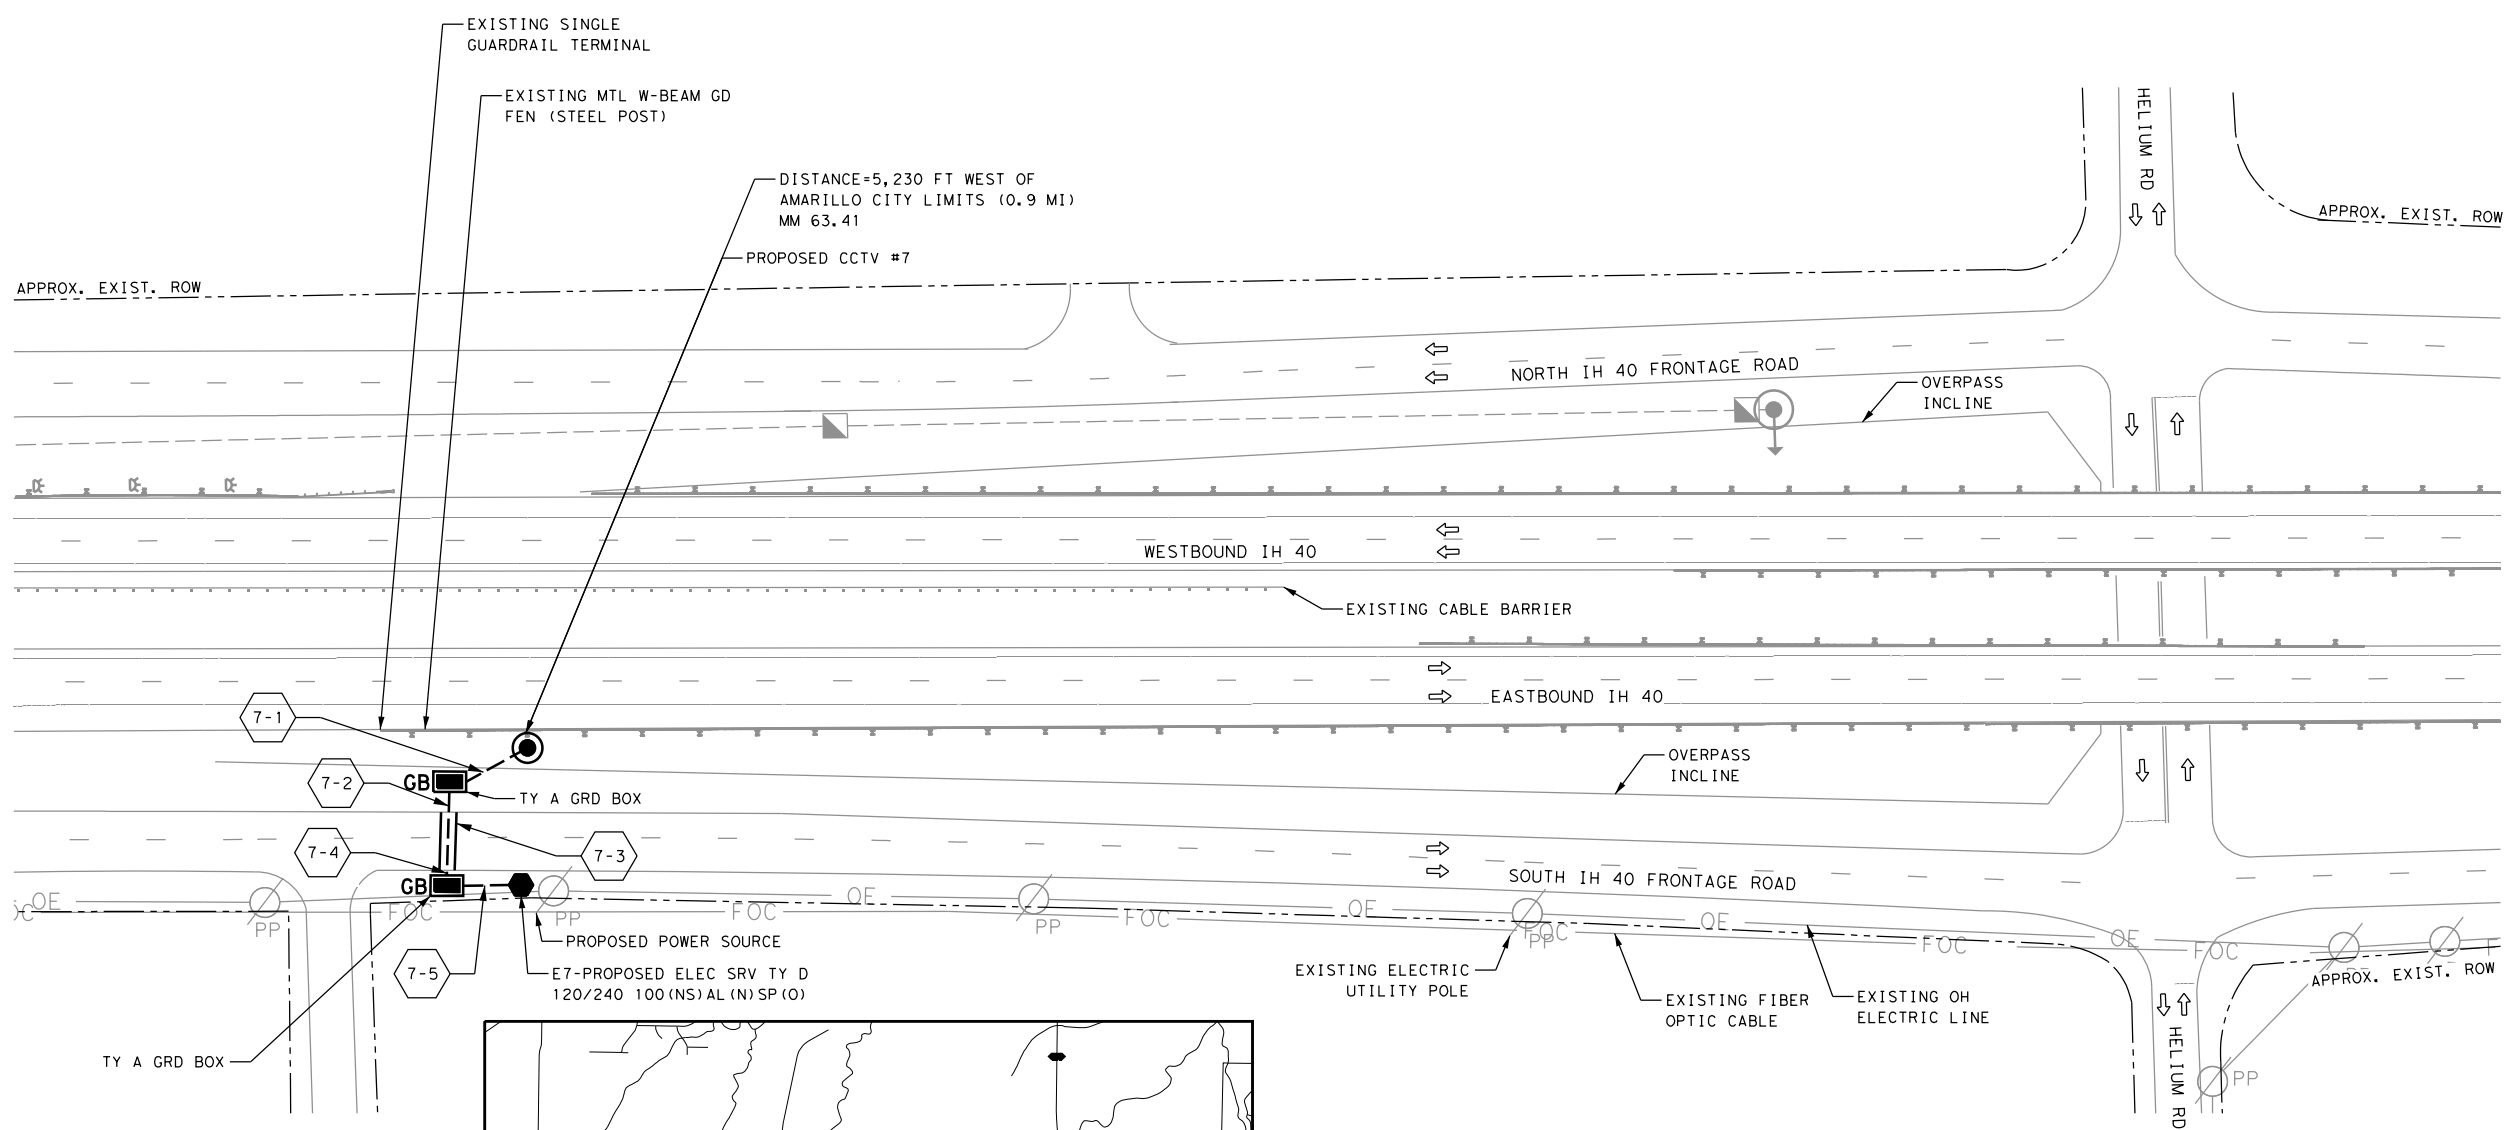

★ = LOCATION OF CCTV7

NO.	DATE	REVISION	APPROVED



IH 40 EB
 CCTV7

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220
		47

DATE: 8/1/2023 2:22:53 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\P1_ITS07_MM63_5_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: TH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-7 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-7	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #7	1P/20	15	120	1.8

CCTV #7 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
7-1	1		1	2	50
7-2	1		1	2	20
7-3		1	1	2	35
7-4	1		1	2	10
7-5	1		1	2	45
TOTAL	LF	LF	LF	LF	
	125	35	160	320	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #7 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #7	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED




IH 40 EB
CCTV7 QUANTITIES

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

48

DATE: 8/1/2023 2:22:54 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS08_MM87_01.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

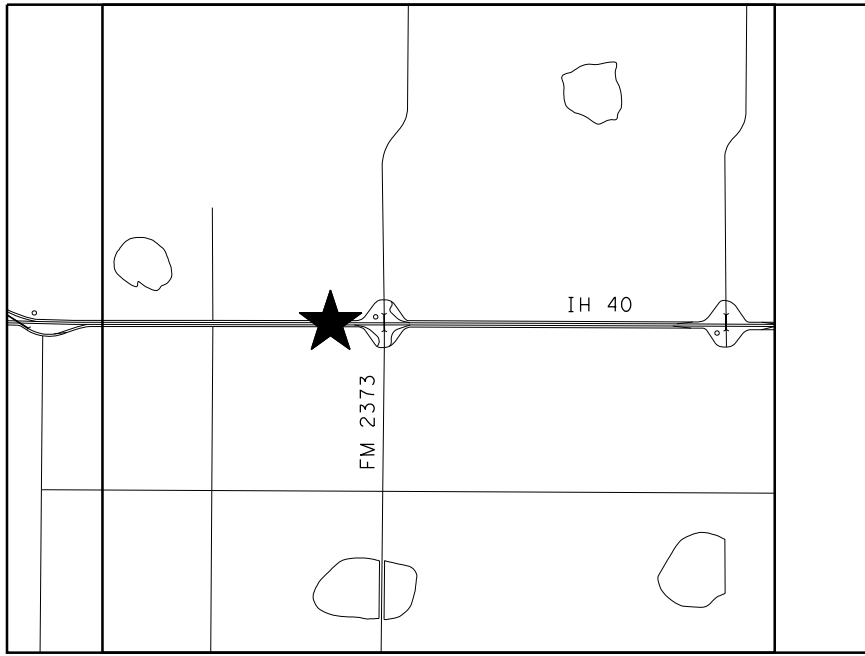


0' 25' 50' 100'
SCALE: 1" = 100'




LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ⇨ LANE ASSIGNMENT ARROWS

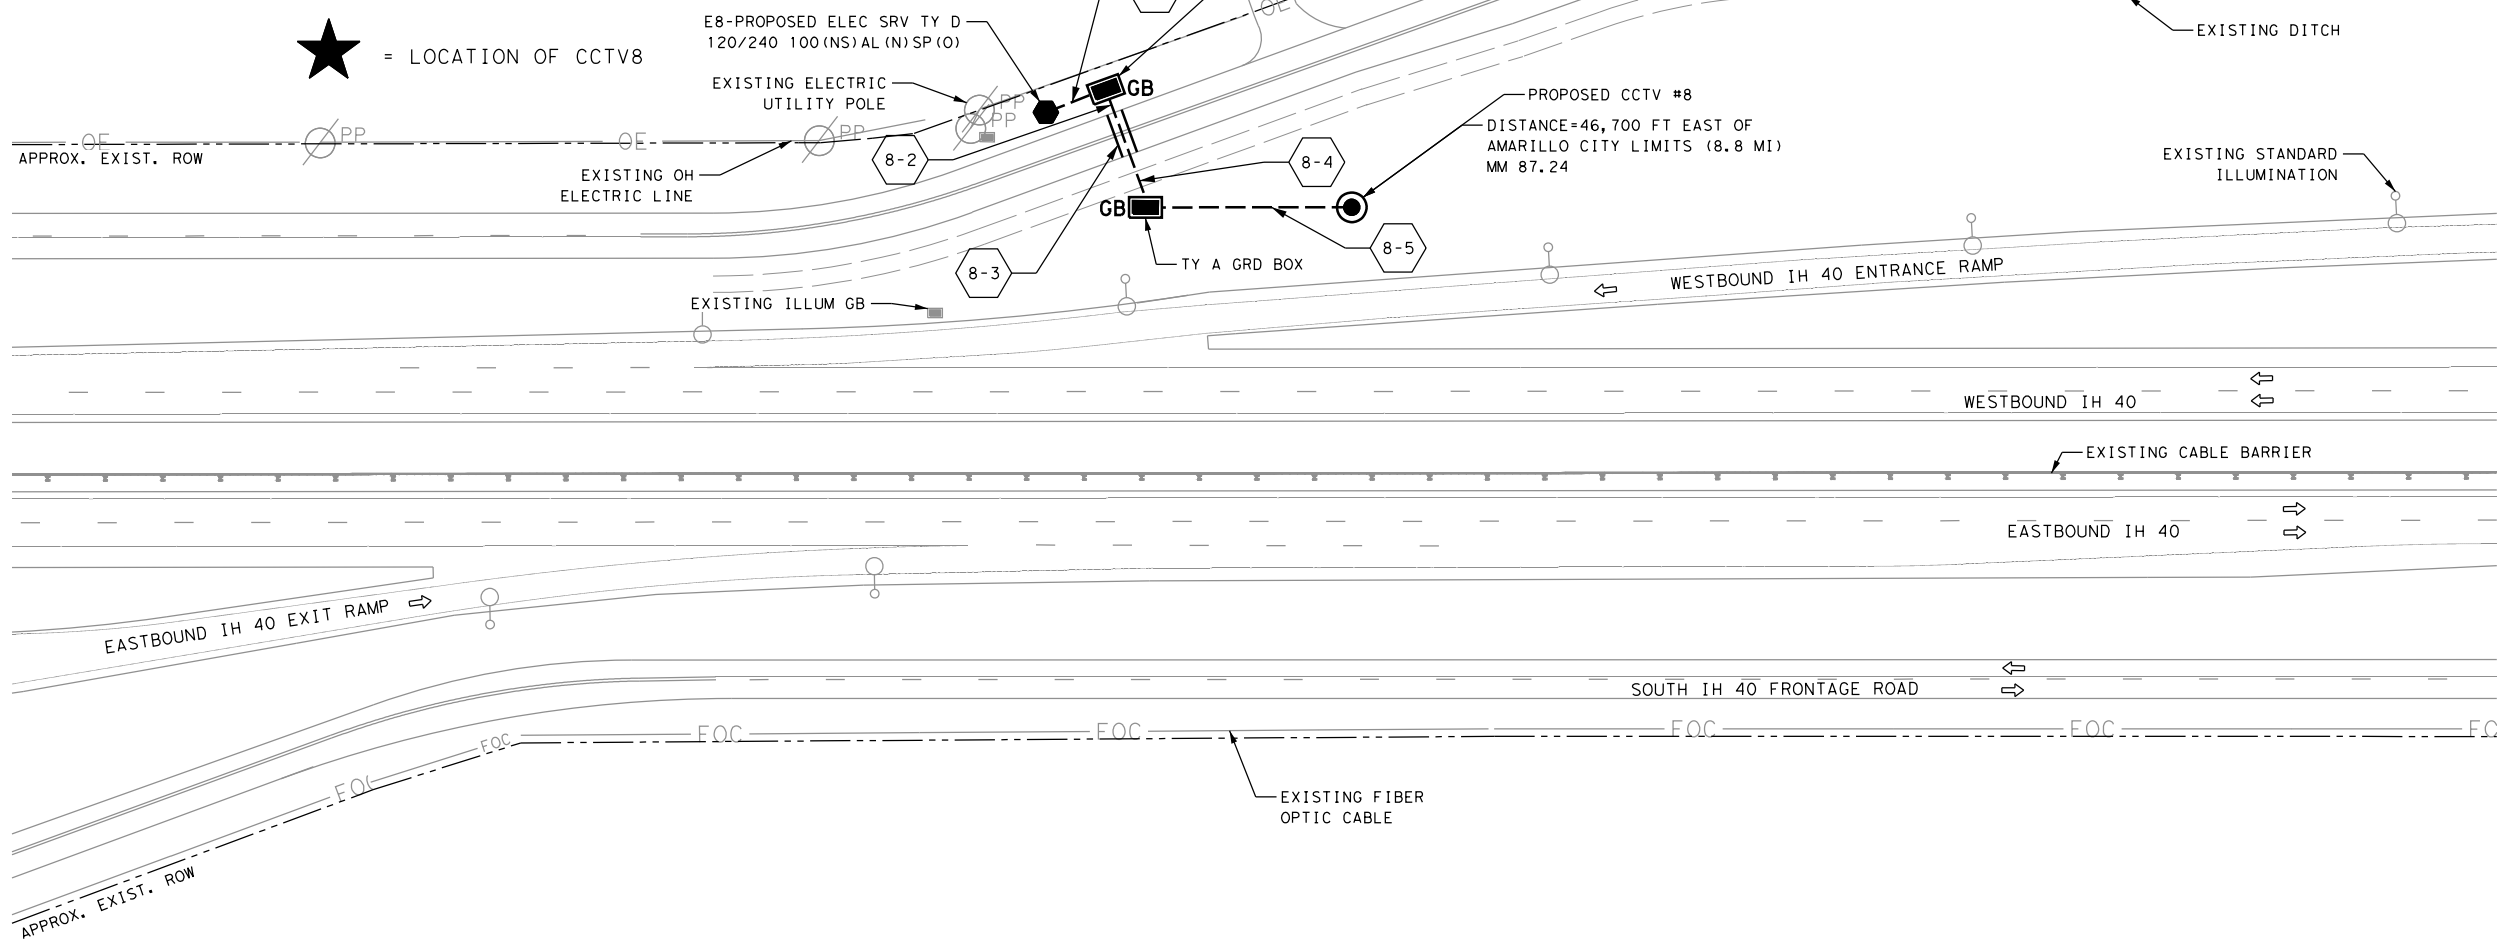

NO.	DATE	REVISION	APPROVED



**IH 40 WB
CCTV8**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220

DATE: 8/1/2023 2:22:55 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI ITS08_MM87_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: TH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-8 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-8	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #8	1P/20	15	120	1.8

CCTV #8 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
8-1	1		1	2	30
8-2	1		1	2	10
8-3		1	1	2	30
8-4	1		1	2	30
8-5	1		1	2	105
TOTAL	LF	LF	LF	LF	
	175	30	205	410	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #8 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
CCTV #8	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



IH 40 EB
CCTV8 QUANTITIES


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220

50

DATE: 8/1/2023 2:22:57 PM USER: T_Cowser
 FILE: K:\01509\01509-002\7-12\TXDOT\WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\P1_ITS09_MM97_01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl

0' 25' 50' 100'
SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GFEN (STEEL POST)
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ⇌ LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED





Texas Board of Professional Engineers and Land Surveyors Reg. No. F-23290
6330 West Loop South, Suite 150 • Bellaire, TX 77401 • 713.777.5337

**IH 40 EB
CCTV9**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220
		51

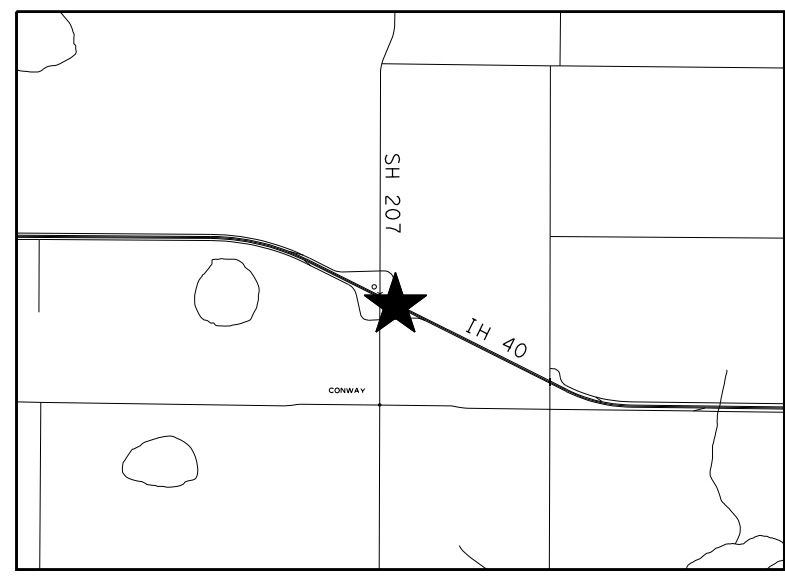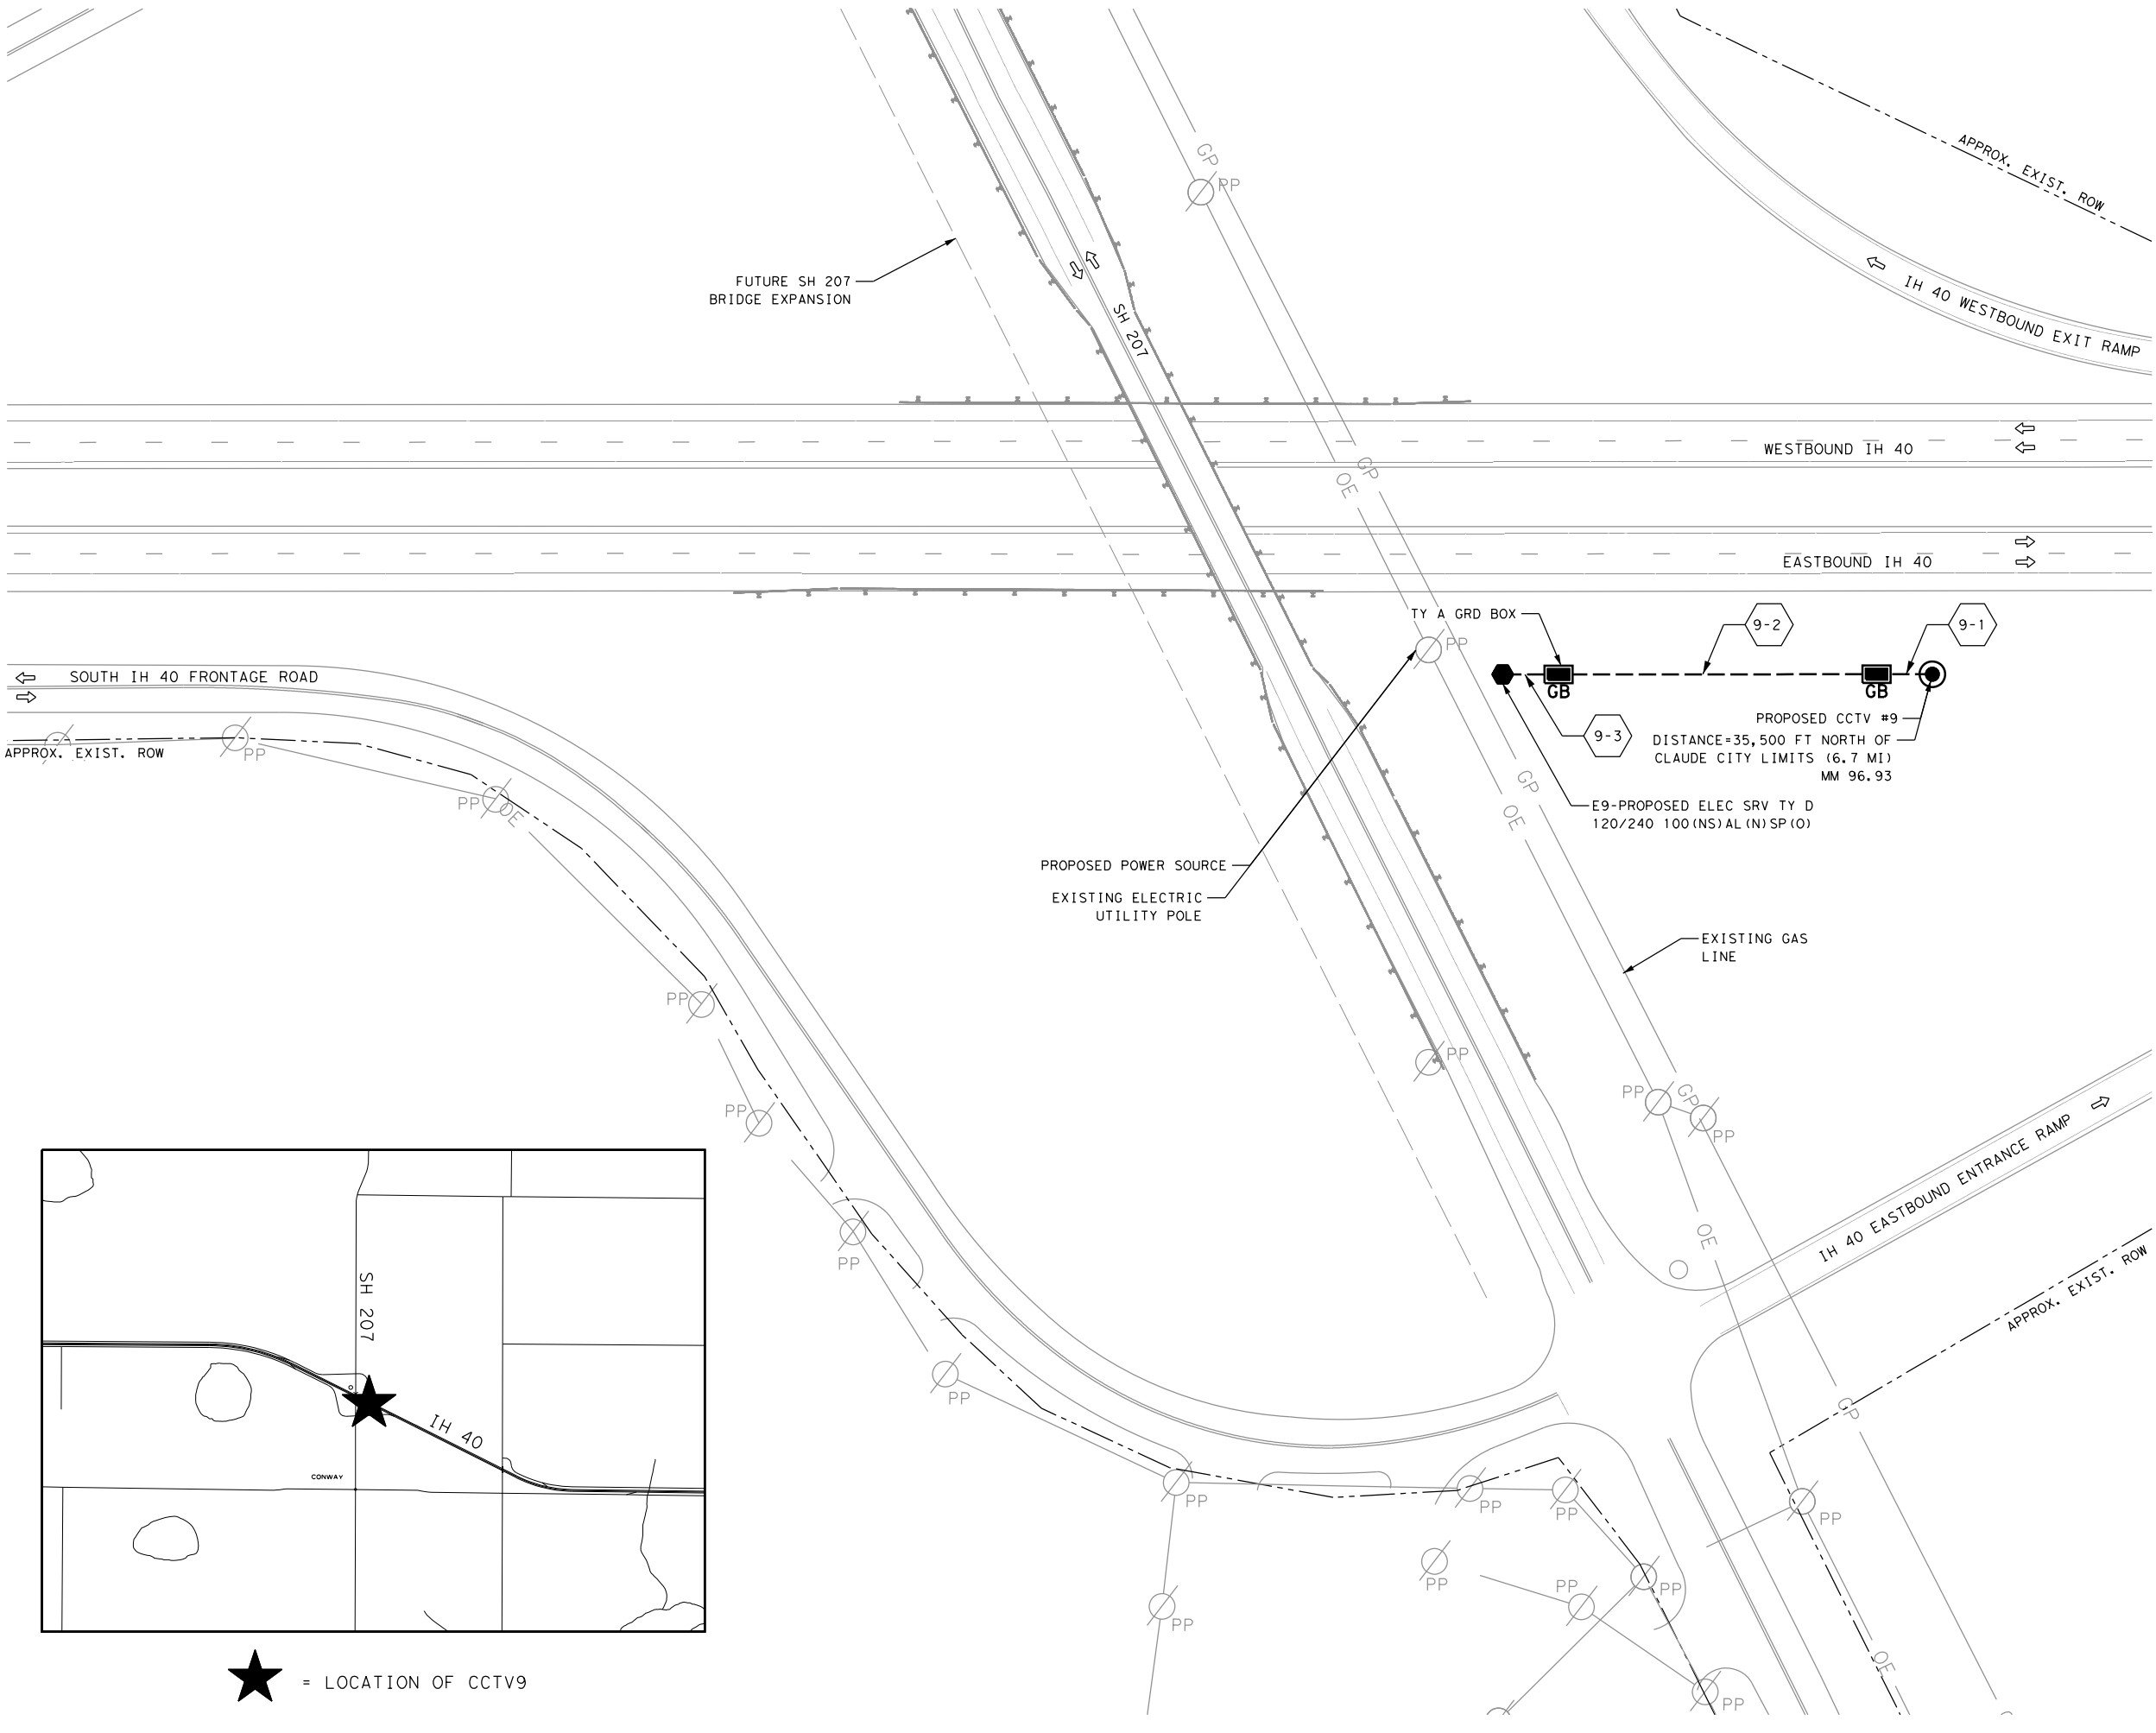

★ = LOCATION OF CCTV9

DATE: 8/1/2023 2:22:58 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS09_MM97_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-9 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-9	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #9	1P/20	15	120	1.8

CCTV #9 CONDUIT SUMMARY				
RUN NUMBER	618 6046	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
9-1	1	1	2	40
9-2	1	1	2	195
9-3	1	1	2	40
TOTAL	LF	LF	LF	
	275	275	550	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #9 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #9	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED




IH 40 EB
CCTV9 QUANTITIES

SHEET 1 OF 1



FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220

52

DATE: 8/1/2023 2:23:00 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS10_MM107-01.dgn
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_penttable.tbl

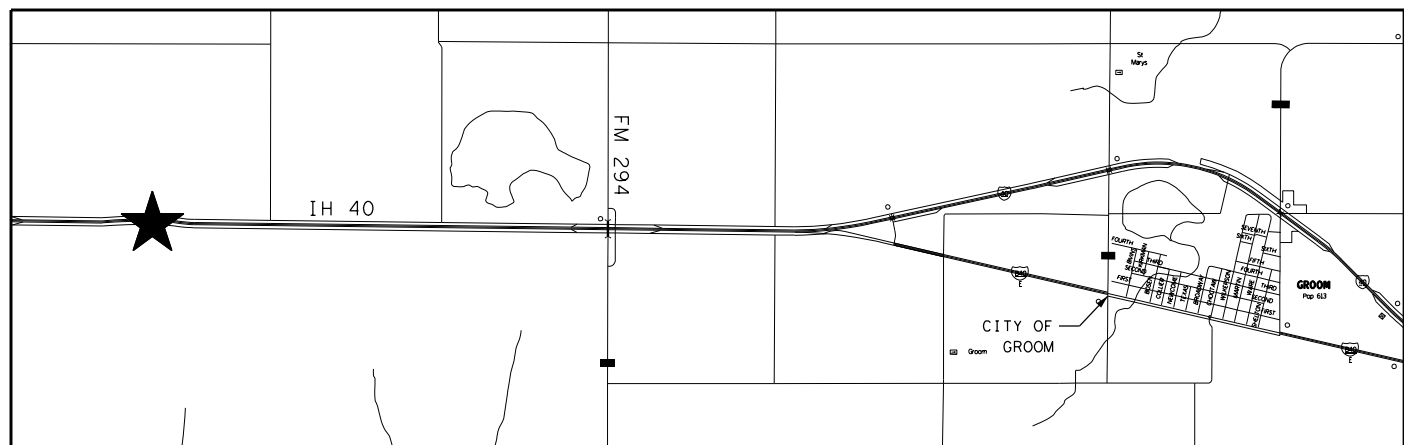

★ = LOCATION OF CCTV10

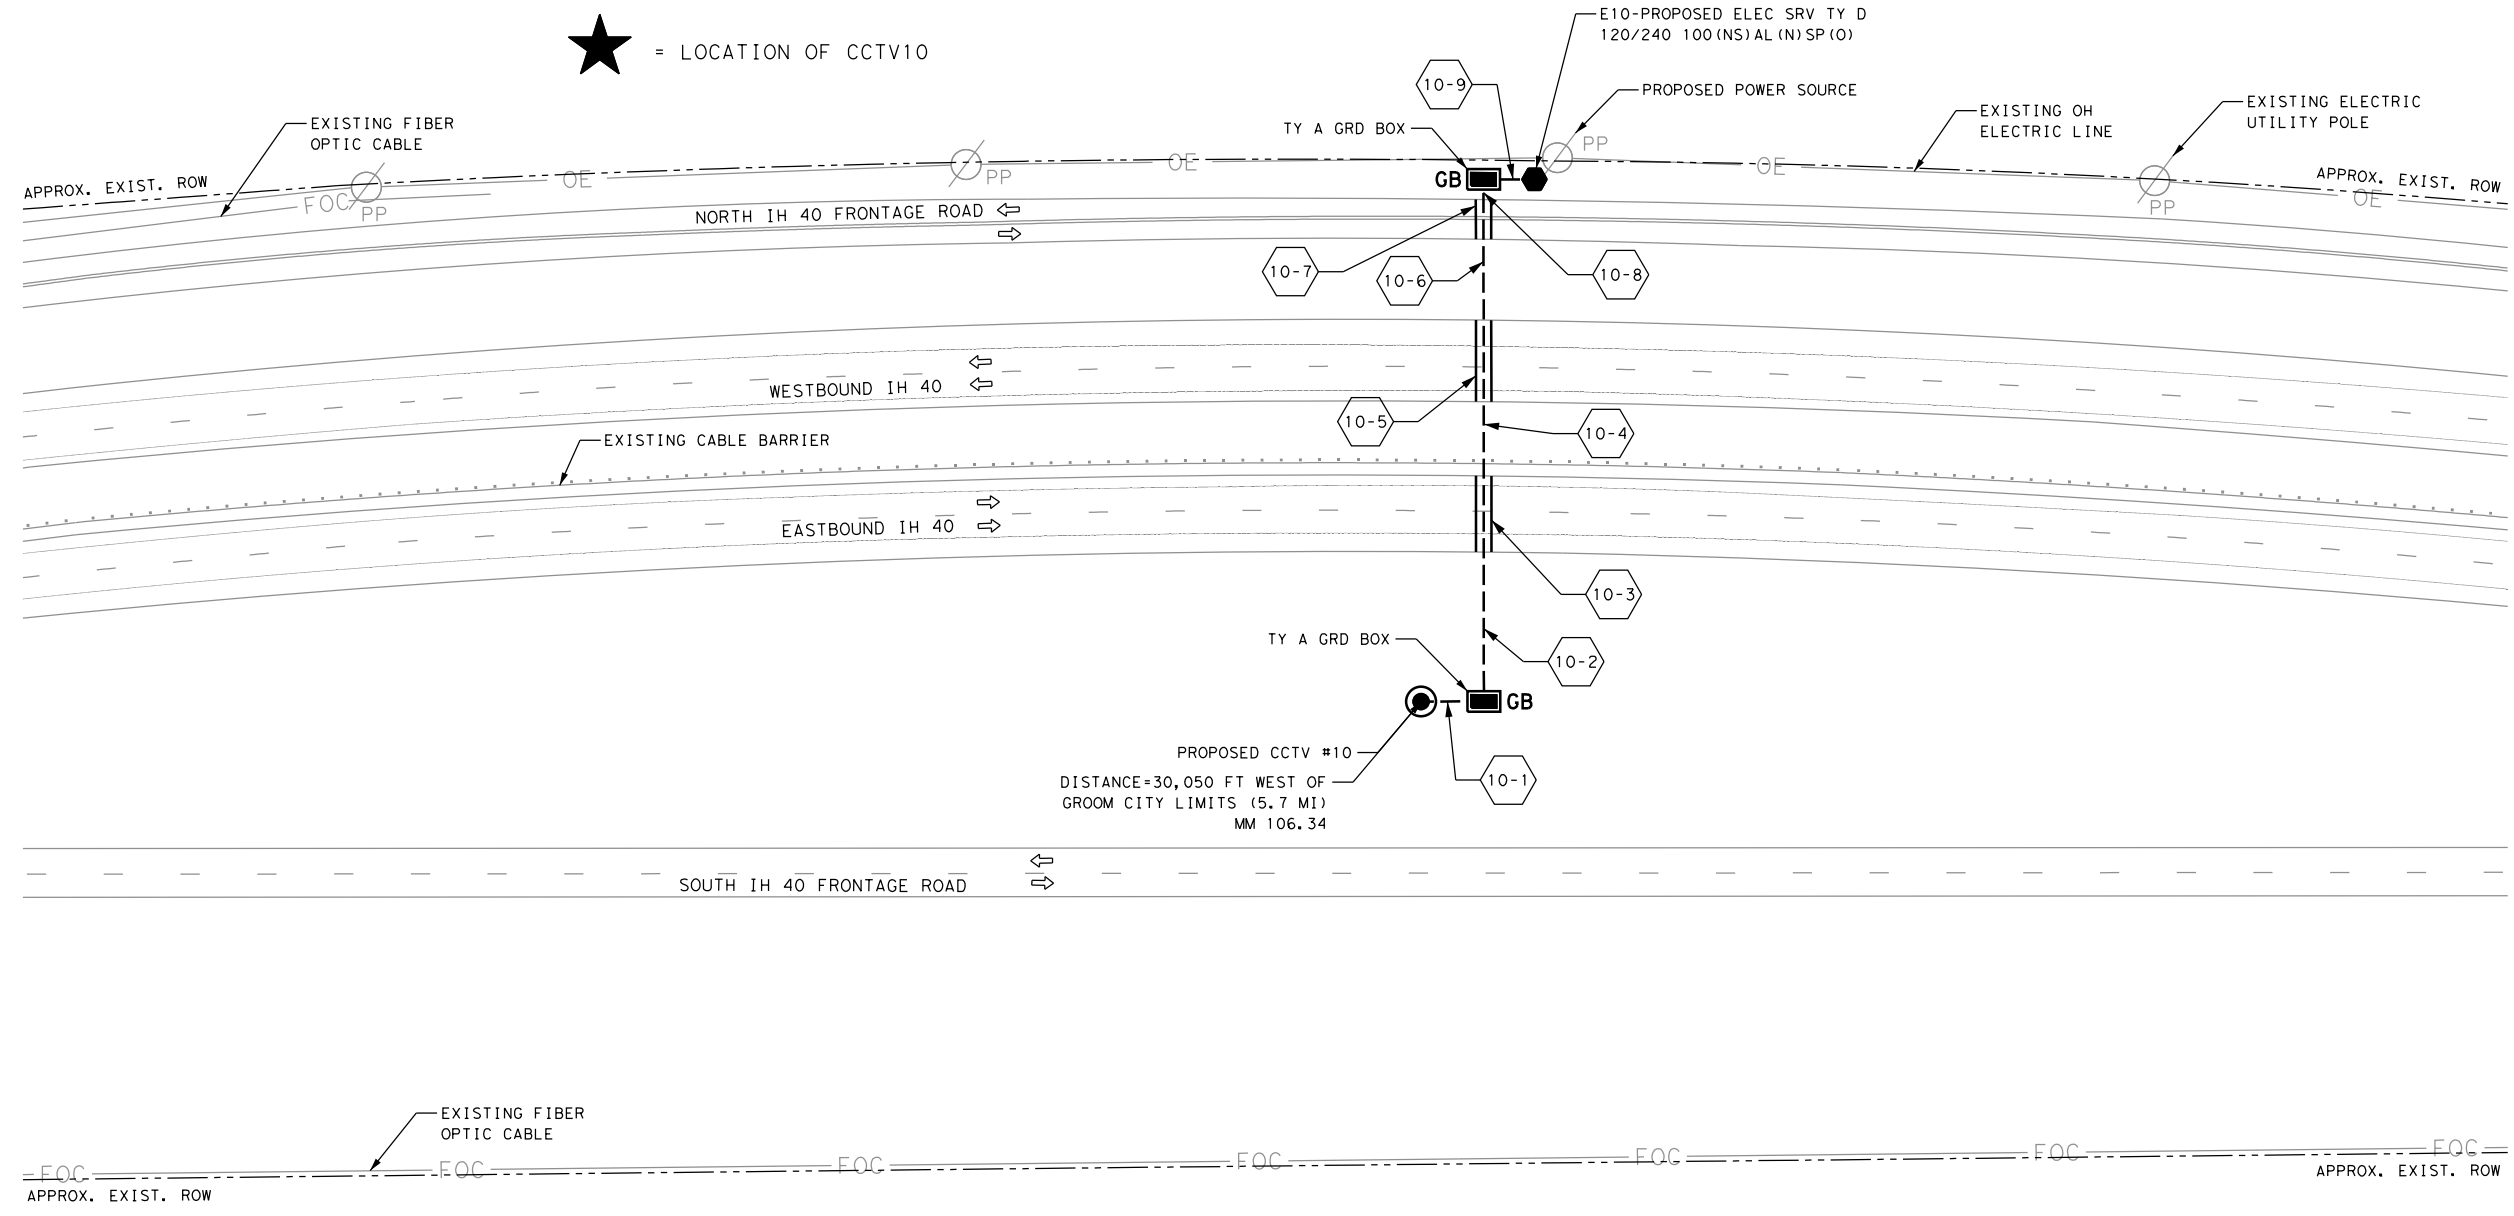

LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▩ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- ▬ PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ↔ LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED



**IH 40 EB
CCTV10**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220

53

DATE: 8/1/2023 2:23:00 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS10_MM107_02.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl


ELECTRICAL SERVICE E-10 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-10	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #10	1P/20	15	120	1.8

CCTV #10 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
10-1	1		1	2	30
10-2	1		1	2	75
10-3		1	1	2	45
10-4	1		1	2	45
10-5		1	1	2	45
10-6	1		1	2	45
10-7		1	1	2	25
10-8	1		1	2	10
10-9	1		1	2	25
TOTAL	LF	LF	LF	LF	
	230	115	345	690	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #10 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #10	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED




IH 40 EB
CCTV10 QUANTITIES

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220


54

DATE: 8/1/2023 2:23:02 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITST11_MM113_01.dgn
 USER: T_Cowser
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

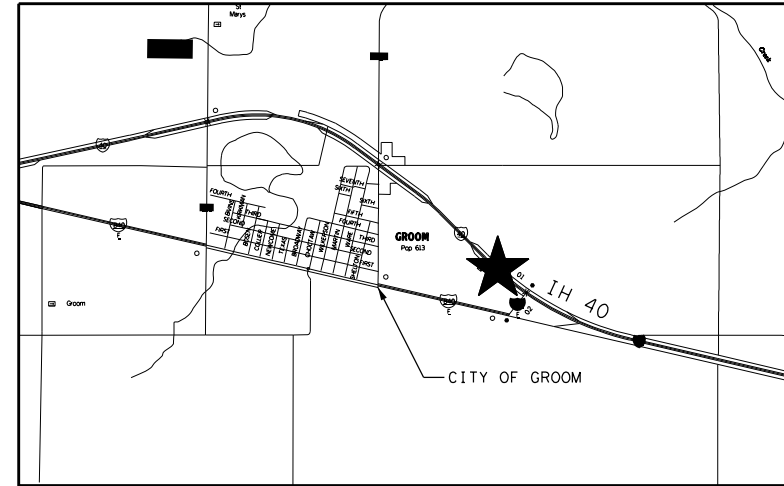


★ = LOCATION OF CCTV11

0' 25' 50' 100'
SCALE: 1" = 100'




LEGEND

- APPROX. EXIST. ROW
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- GB ■ PROPOSED ELEC SRV TY D 120/240 100 (NS) AL (N) SP (O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ■ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

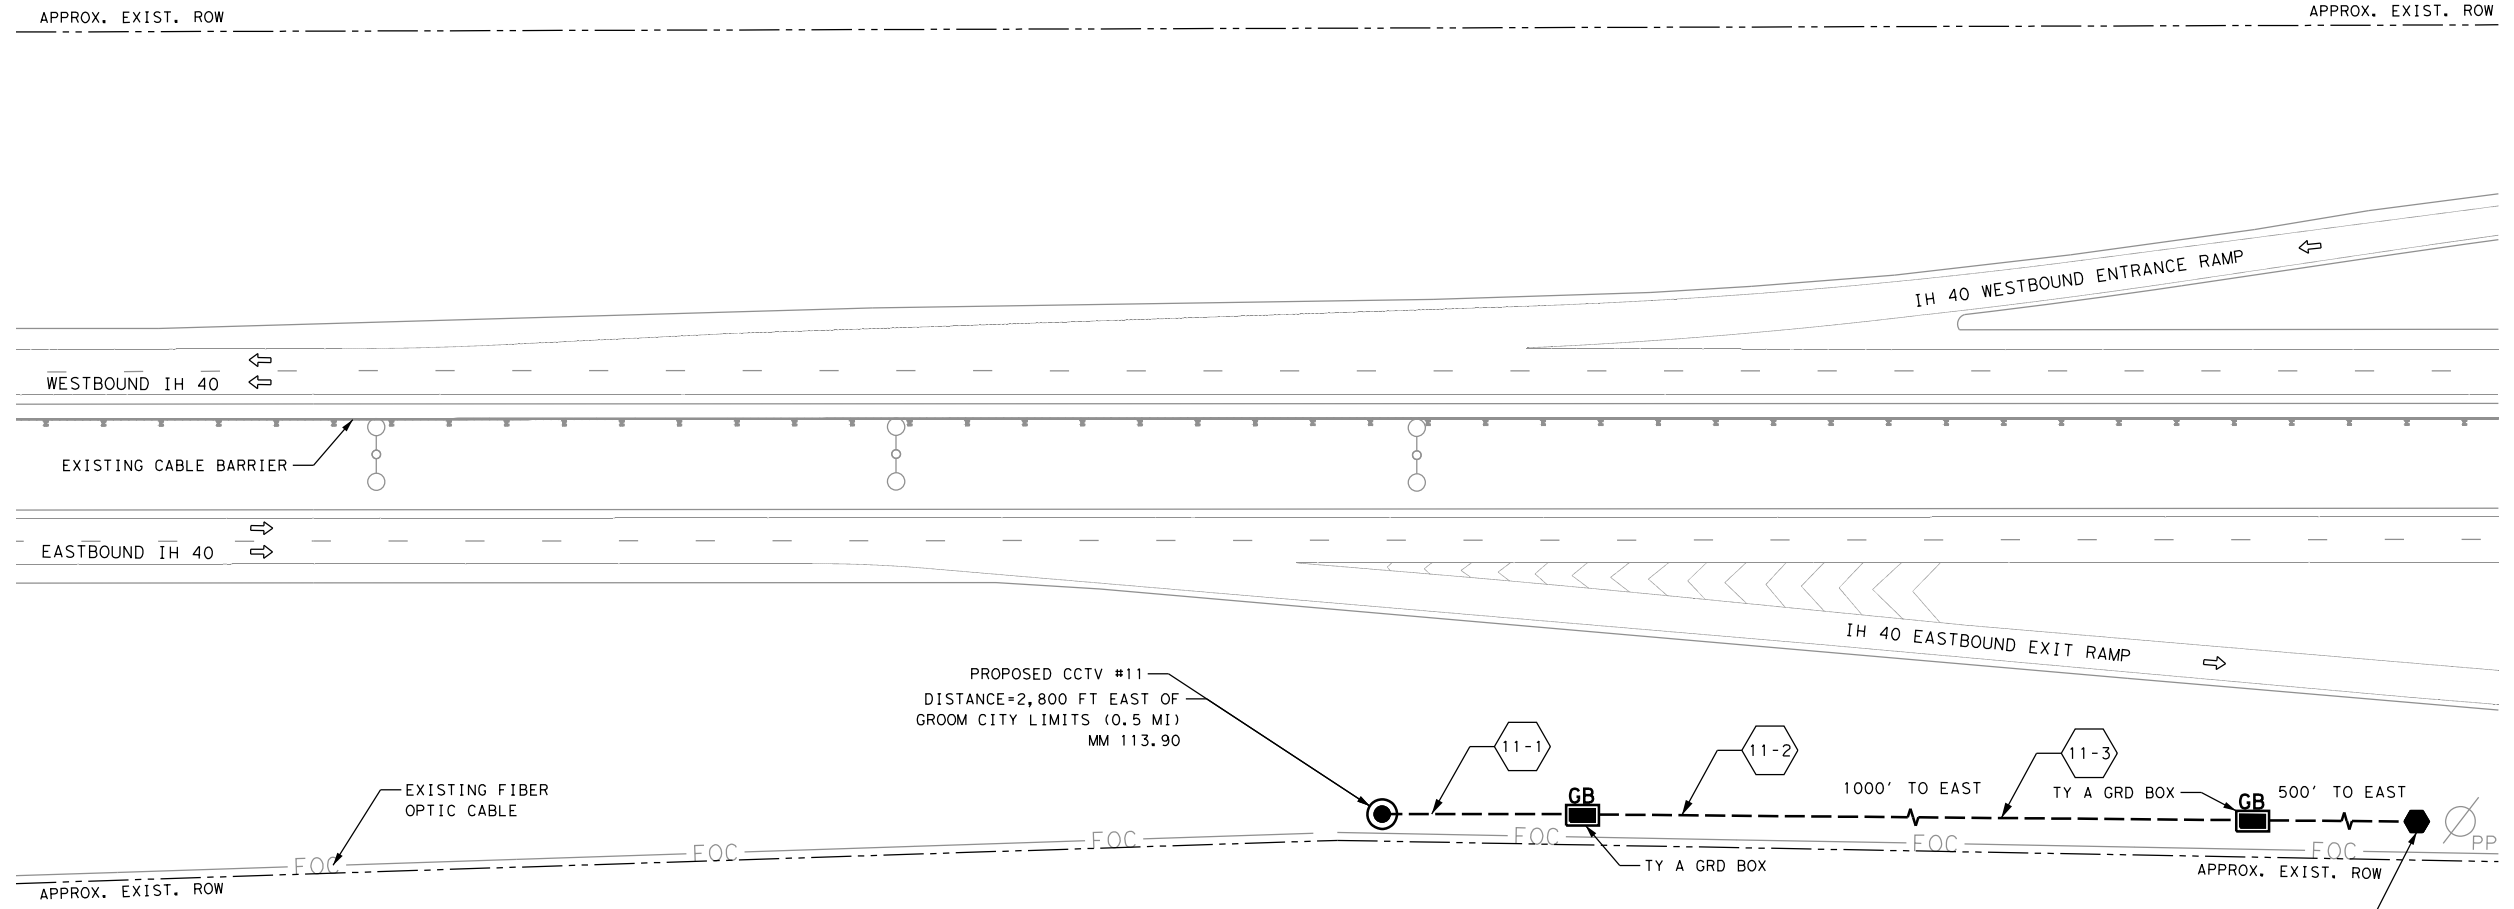

NO.	DATE	REVISION	APPROVED



**IH 40 EB
CCTV11**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220

DATE: 8/1/2023 2:23:03 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI ITS11_MM113_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl


ELECTRICAL SERVICE E-11 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-11	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #11	1P/20	15	120	1.8

CCTV #11 CONDUIT SUMMARY				
RUN NUMBER	618 6046	620 6015	620 6016	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	ELEC CONDR (NO. 2) BARE	ELEC CONDR (NO. 2) INSULATED	FEET
11-1	1	1	2	100
11-2	1	1	2	1000
11-3	1	1	2	500
TOTAL	LF	LF	LF	
	1600	1600	3200	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #11 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #11	19	2	2	1	1	1	1	1	1	1	1


NO.	DATE	REVISION	APPROVED

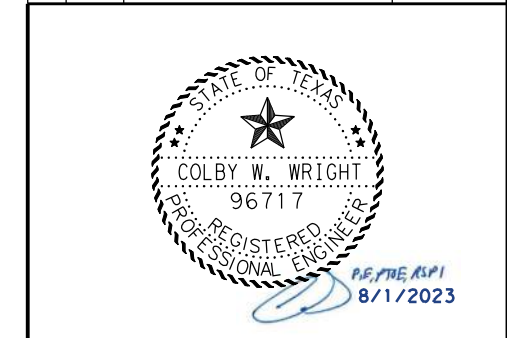


IH 40 EB
CCTV11 QUANTITIES

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220


SHEET 1 OF 1

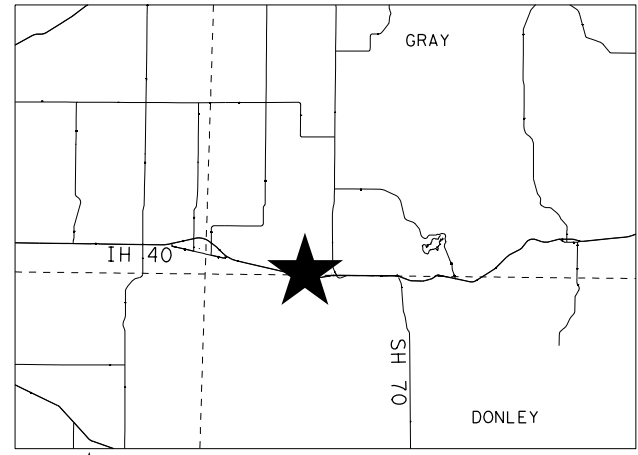

★ = LOCATION OF CCTV12 & DMS3

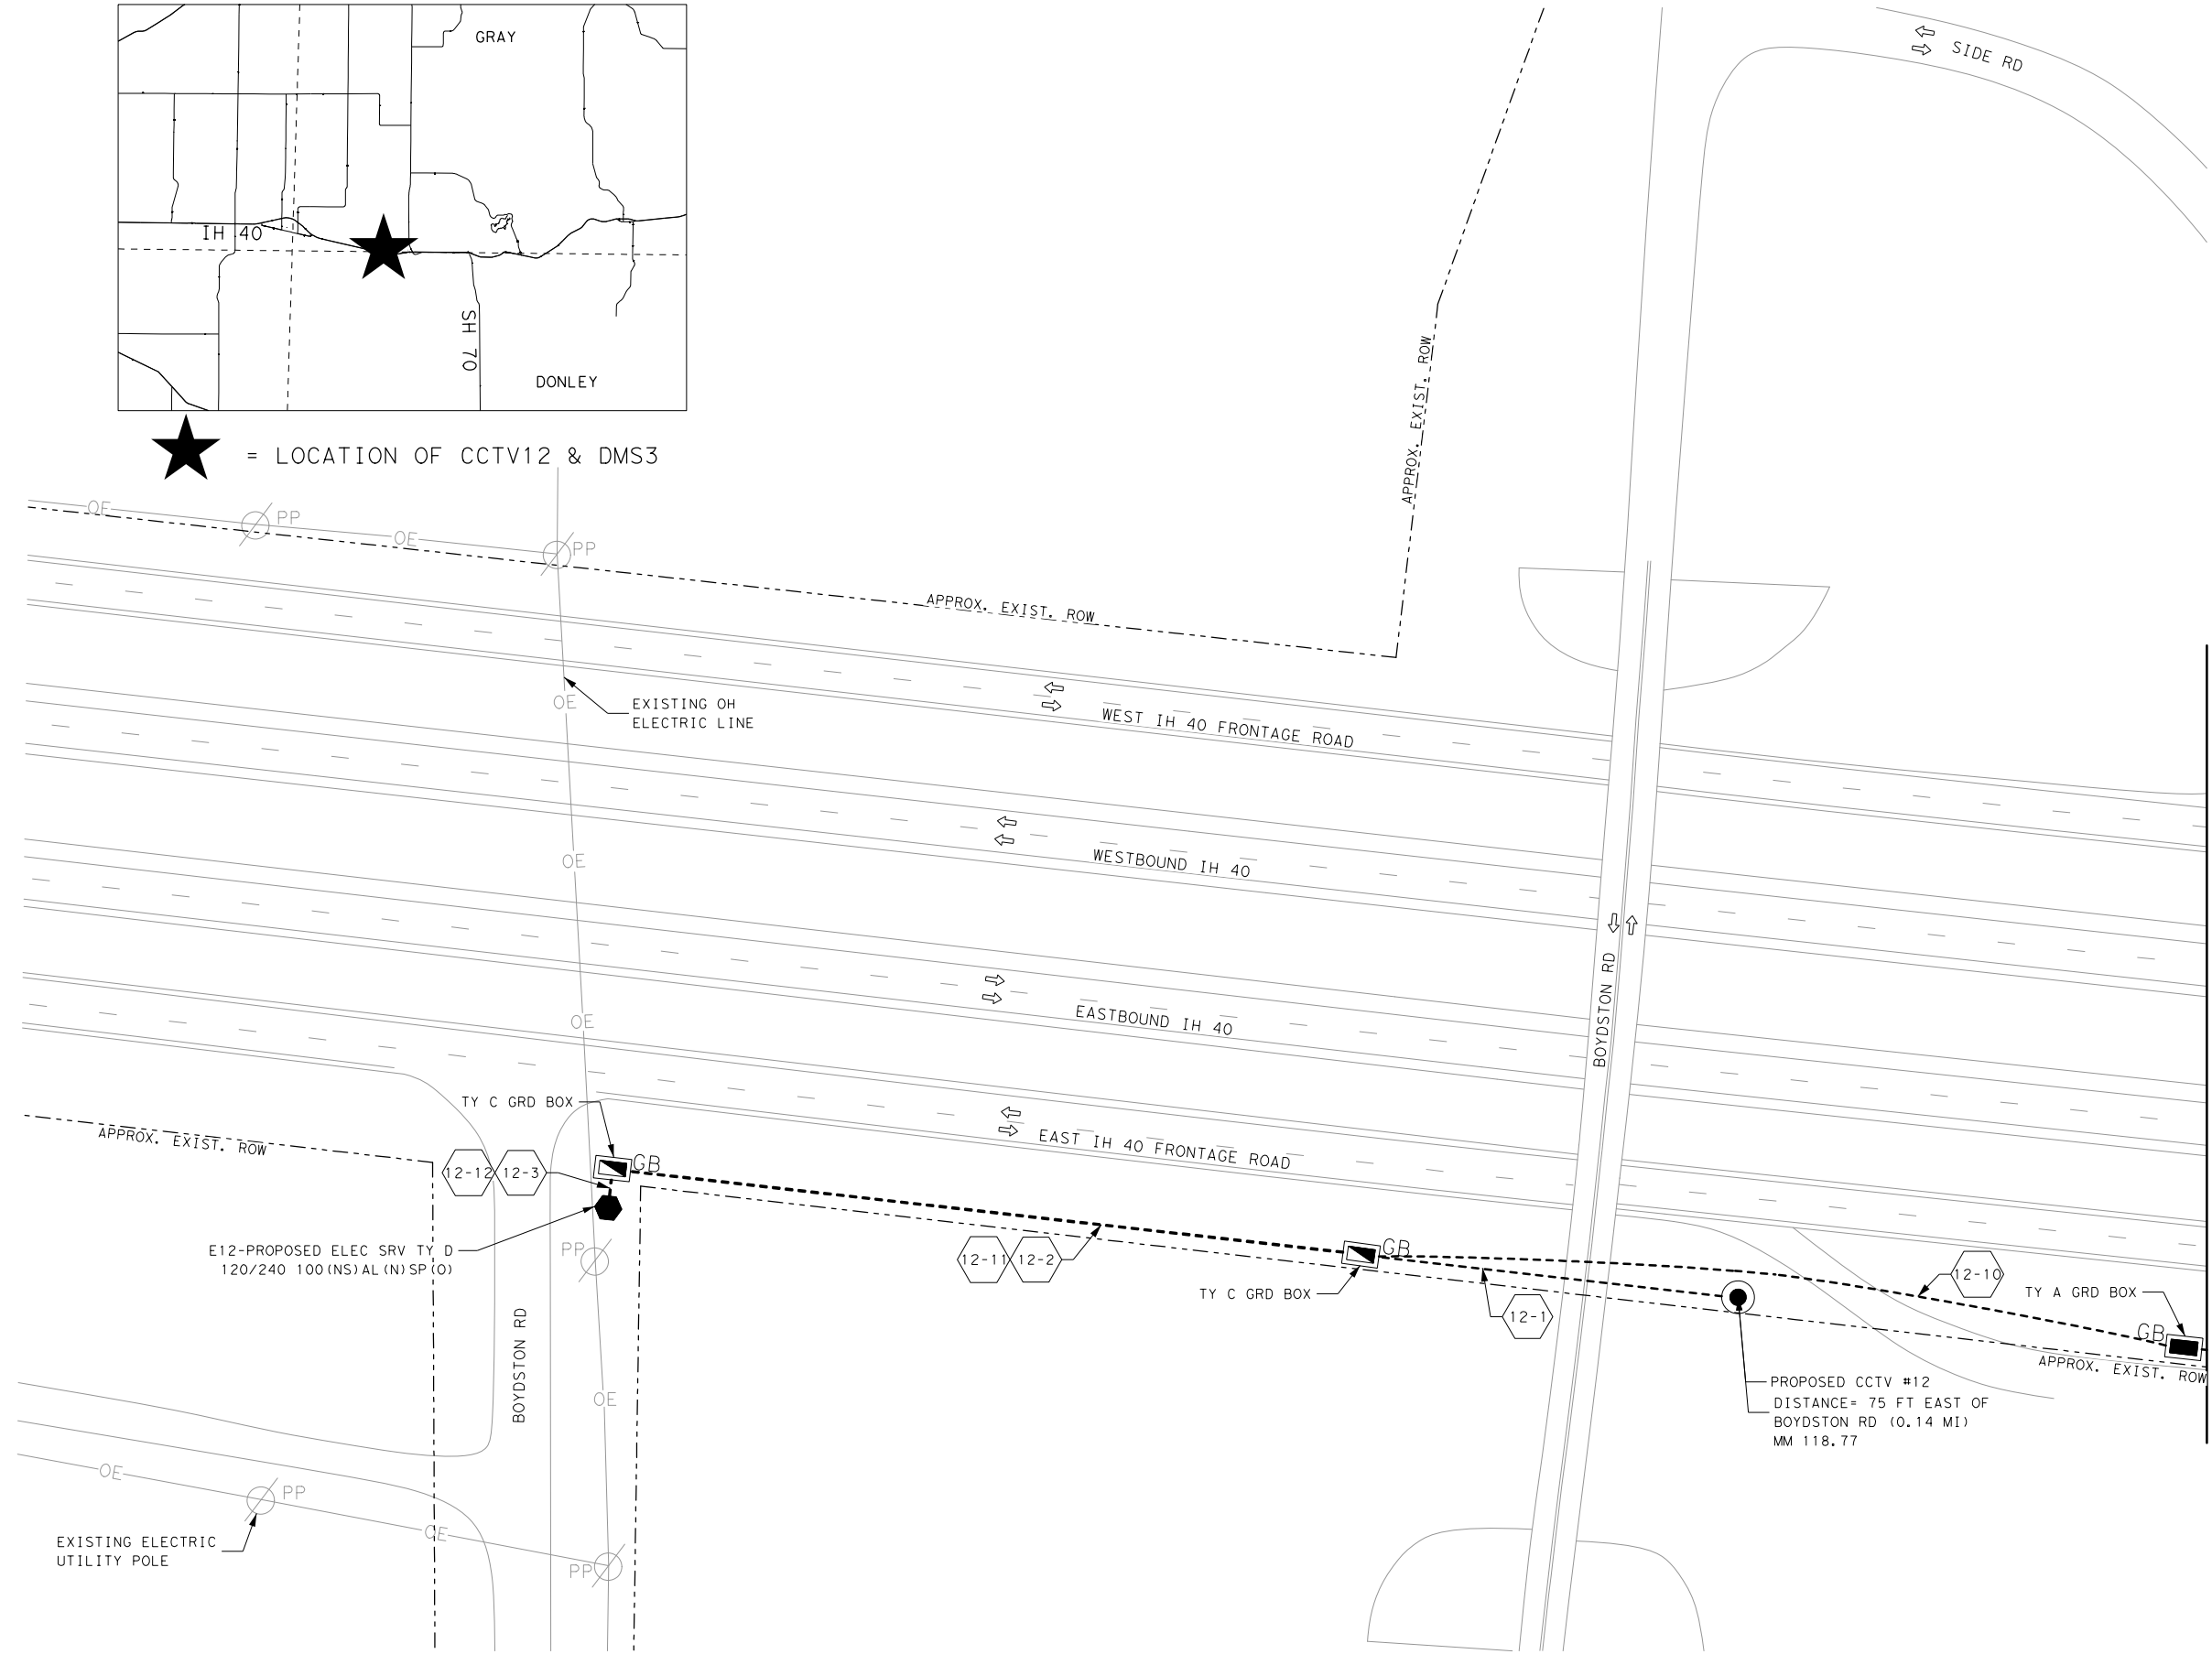

0' 25' 50' 100'
 SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB □ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- ==== PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GF2 FEN (STEEL POST)
- ⊞ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ↑ LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED

08/01/2023

Carl B. Laferney

Texas Department of Transportation
 ©2023

Pacheco Koch
 a Westwood company
 4060 BRYANT IRVIN ROAD
 FORT WORTH, TX 76109
 817.412.7155
 TX REG. ENGINEERING
 FIRM F-469

IH 40 EB
 CCTV12 AND DMS3

SHEET 1 OF 2

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

57

MATCH LINE A-A

PLOTDRIVER: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_penttable.tbl


DATE: 8/1/2023 9:00:12 AM
 USER: kearelliano
 FILE: M:\DWG-55\5565-23.020\020\Civil\Sheets\058_IH 40 EB CCTV12 AND DMS3.dgn

0' 25' 50' 100'
 SCALE: 1" = 100'




LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- GB ■ PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ■ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- ===== PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

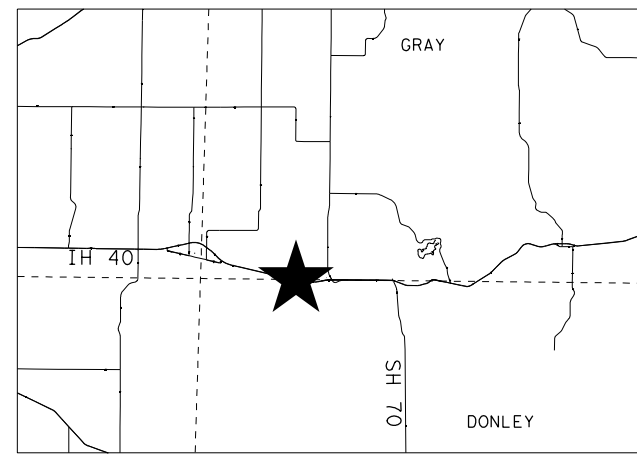

★ = LOCATION OF CCTV12 & DMS3

MATCH LINE A-A

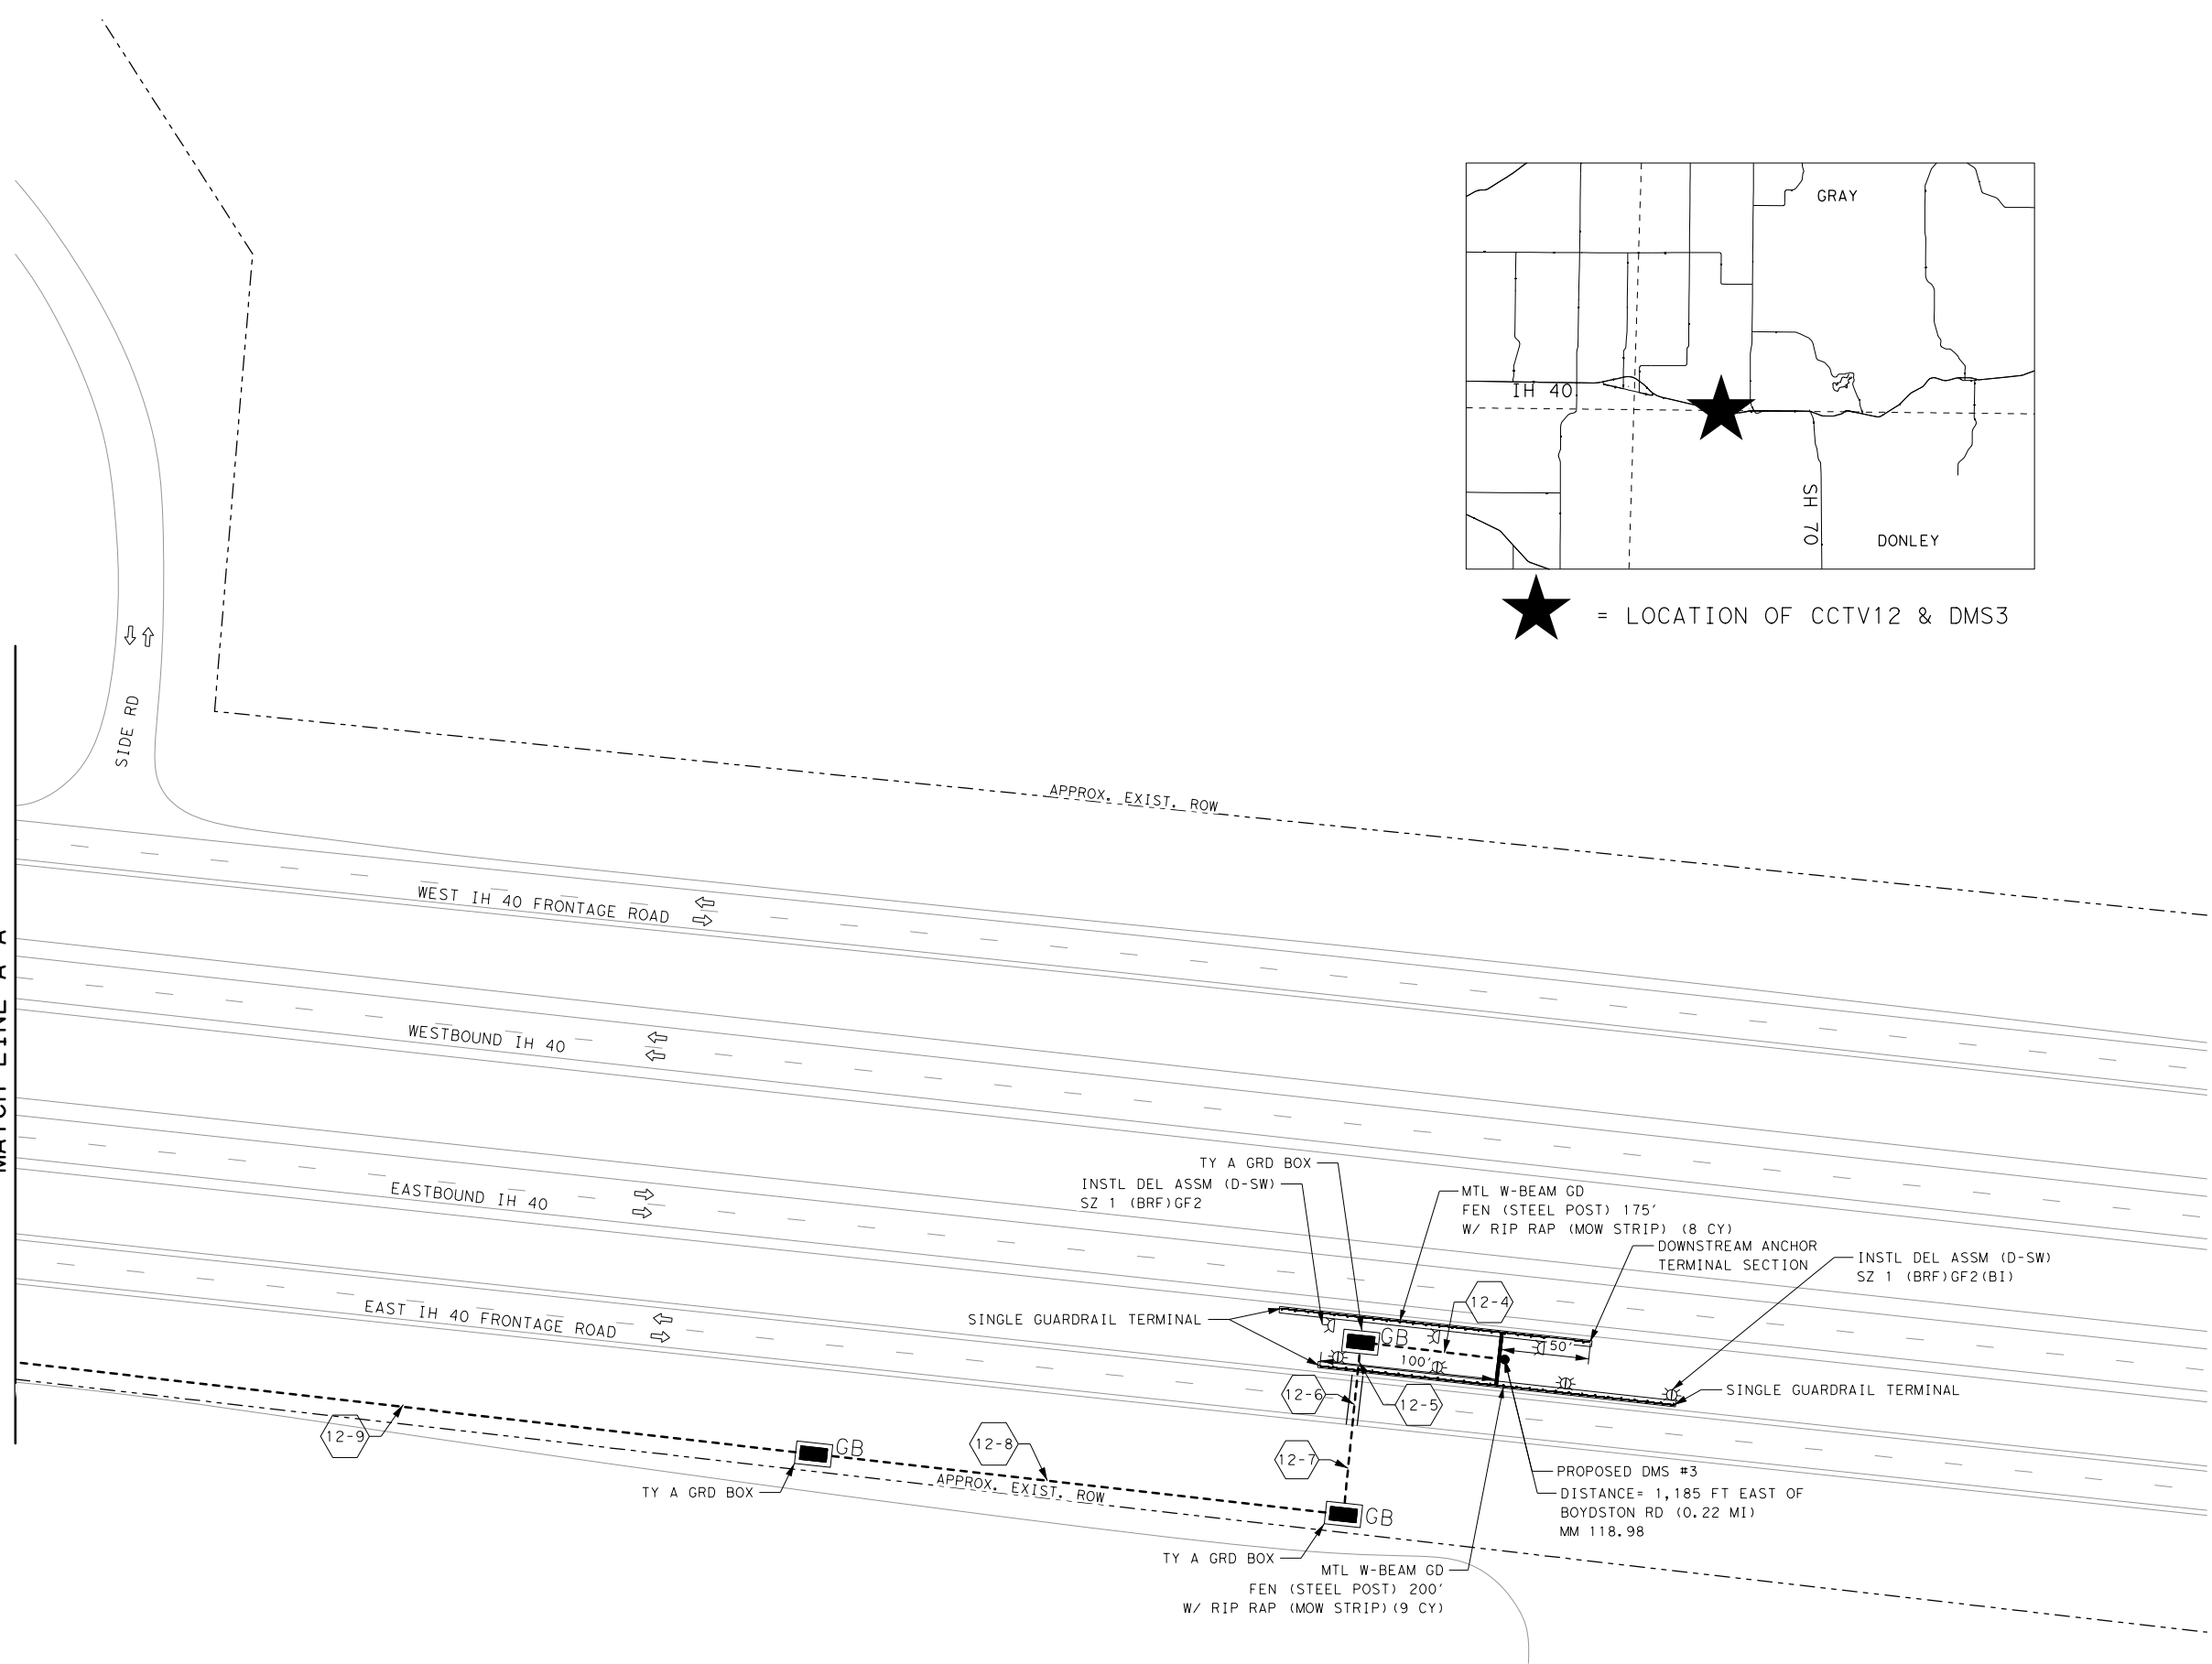

NO.	DATE	REVISION	APPROVED



08/01/2023
 Carl B. Lafferney



Pacheco Koch
 a Westwood company
 4060 BRYANT IRVIN ROAD
 FORT WORTH, TX 76109
 817.412.7155
 TX REG. ENGINEERING
 FIRM F-469

IH 40 EB
 CCTV12 AND DMS3

SHEET 2 OF 2

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

58

PLOTRIVER: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_pentab.le.tbl
 USER: USER: kearell.lano
 DATE: 8/1/2023 9:00:15 AM
 FILE: DMG-5515565-23-020.DGN\Civil\Sheets\059_IH_40_EB_CCTV12_AND_DMS3_QUANTITIES.dgn

ELECTRICAL SERVICE E-12 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-12	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CTV #12 DMS #3	1P/20 2P/70	15 50	120 240	13.8

CCTV #12 AND DMS #3 CONDUIT SUMMARY								
RUN NUMBER	618 6046	618 6053	618 6054	620 6011	620 6012	620 6025	620 6026	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(3")	CONDT (PVC) (SCH80)(3") (BORE)	ELEC CONDR (NO. 4) BARE	ELEC CONDR (NO. 4) INSULATED	ELEC CONDR (NO. 4/0) BARE	ELEC CONDR (NO.4/0) INSULATED	FEET
12-1	1			1	2			220
12-2	1			1	2			430
12-3	1			1	2			25
12-4		1				1	3	85
12-5		1				1	3	25
12-6			1			1	3	30
12-7		1				1	3	55
12-8		1				1	3	305
12-9		1				1	3	475
12-10		1				1	3	480
12-11		1				1	3	430
12-12		1				1	3	25
TOTAL	LF	LF	LF			LF	LF	
	675	1880	30	675	1350	1910	5730	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #12 AND DMS#3 MISCELLANEOUS SUMMARY												
LOCATION	416 6005	416 6023	432 6001	432 6045	540 6002	540 6016	544 6001	624 6002	624 6008	650 6028	658 6061	658 6062
	DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC) (4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GF FEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY A (122311) W/ APRON	GROUND BOX TY C (162911) W/ APRON	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2(BI)
	LF	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA	EA
IH 40 EB CCTV #12	19		2						2			
IH 40 EB DMS #3		21	2	17	375	1	3	4		1	3	3
TOTAL	19	21	4	17	375	1	3	4	2	1	3	3

CCTV #12 AND DMS#3 MISCELLANEOUS SUMMARY												
LOCATION	6010 6002	6010 6004	6028 6001	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE					
	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-1 1/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)	
	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	
IH 40 EB CCTV #12	1	1		1	1	1		1	1	1		
IH 40 EB DMS #3			1			1	1	1	1	1	1	
TOTAL	1	1	1	1	1	2	1	2	2	2	1	

NO.	DATE	REVISION	APPROVED



08/01/2023

Carl B. Laferney



**IH 40 EB
CCTV12 AND DMS3
QUANTITIES**


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY/DONLEY
CONT.	SECT.	JOB
0904	00	220

59

DATE: 8/1/2023 2:23:05 PM USER: T_Cowser
 FILE: K:\01509\01509-002\7-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheets\P1-ITS13-MM126-01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt PENTABLE: IH40-ITS-pentable.tbl


0' 25' 50' 100'
 SCALE: 1" = 100'

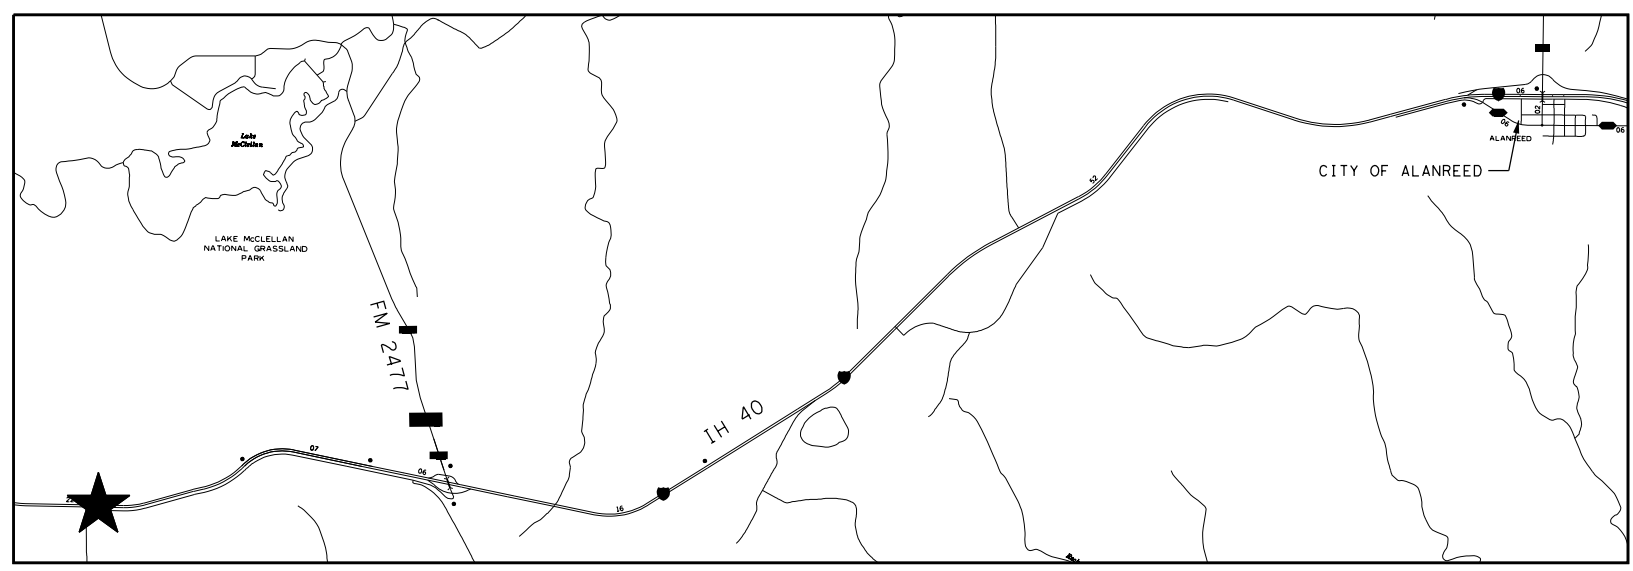


★ = LOCATION OF CCTV13 & DMS4

LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB □ PROPOSED GROUND BOX TY A W/ APRON
- GB □ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊕ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

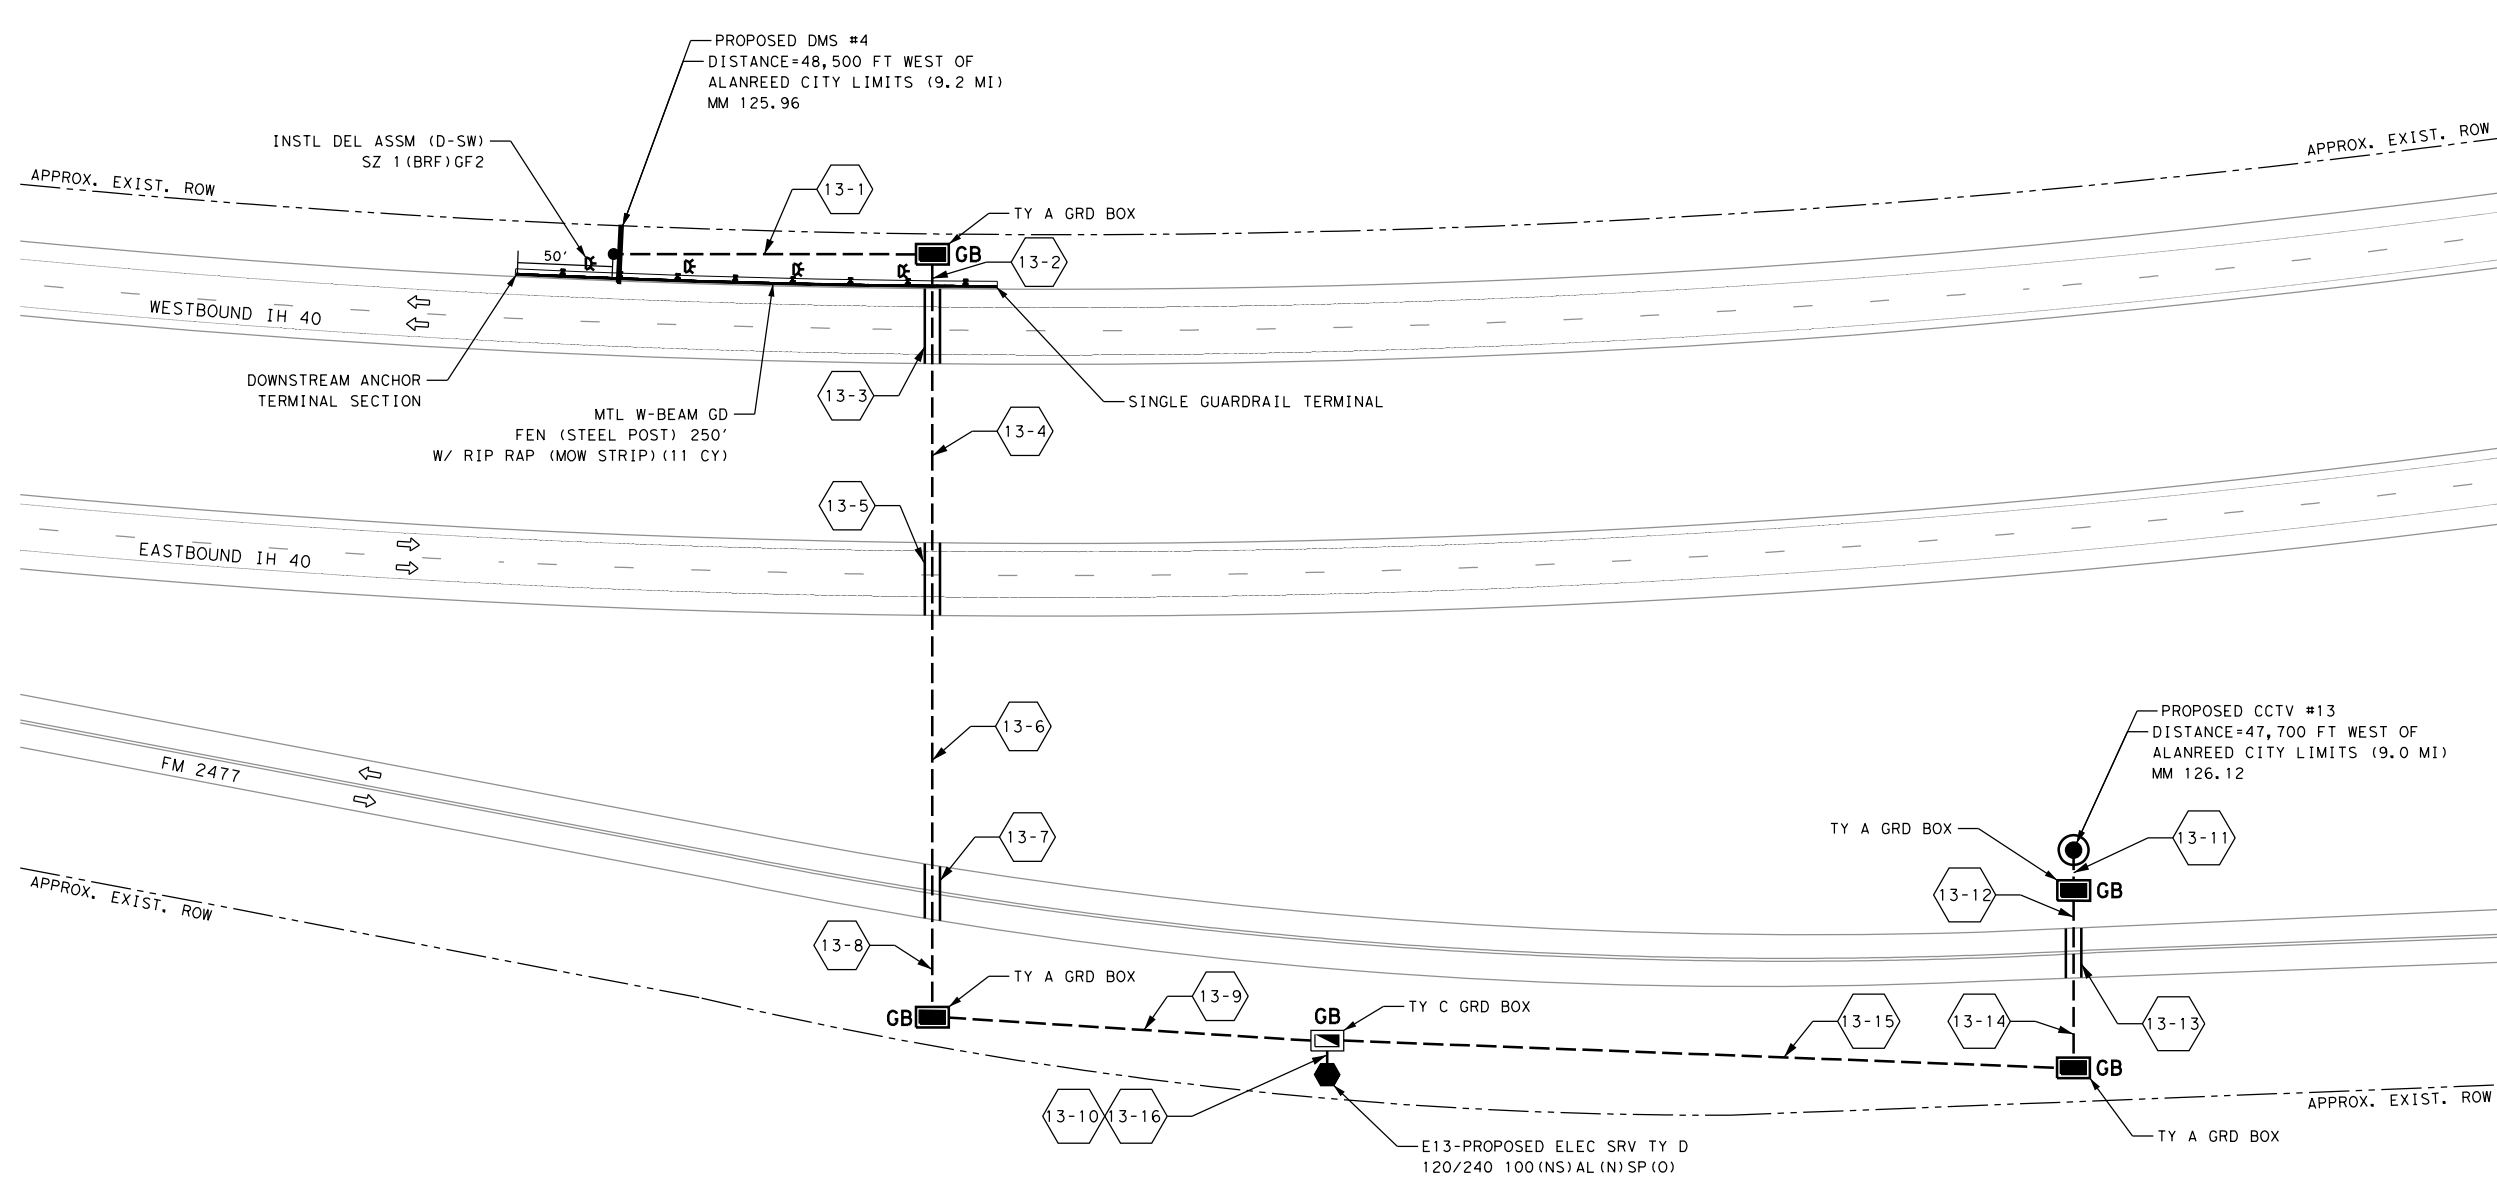

NO.	DATE	REVISION	APPROVED



**IH 40 EB/WB
 CCTV13 AND DMS4**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	DONLEY
CONT.	SECT.	JOB
0904	00	220

60

PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl
 USER: T_Cowser
 DATE: 8/1/2023 2:23:06 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS\3_MMI\26_02.dgn

ELECTRICAL SERVICE E-13 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)

SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-13	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CCTV #13 DMS #4	1P/20 2P/70	15 50	120 240	13.8

CCTV #13 AND DMS #4 CONDUIT SUMMARY

RUN NUMBER	618 6046	618 6047	620 6009	620 6010	620 6011	620 6012	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 6) BARE	ELEC CONDR (NO. 6) INSULATED	ELEC CONDR (NO. 4) BARE	ELEC CONDR (NO. 4) INSULATED	FEET
13-1	1				1	3	170
13-2	1				1	3	25
13-3		1			1	3	45
13-4	1				1	3	100
13-5		1			1	3	45
13-6	1				1	3	135
13-7		1			1	3	35
13-8	1				1	3	60
13-9	1				1	3	210
13-10	1				1	3	25
13-11	1		1	2			25
13-12	1		1	2			25
13-13		1	1	2			35
13-14	1		1	2			55
13-15	1		1	2			395
13-16	1		1	2			25
TOTAL	LF	LF	LF	LF	LF	LF	
	1250	160	560	1120	850	2550	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #13 AND DMS #4 MISCELLANEOUS SUMMARY

LOCATION	416 6005	416 6023	432 6001	432 6045	540 6002	540 6016	544 6001	624 6002	624 6008	650 6028	658 6061
	DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC)(4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GD FEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY A (122311) W/ APRON	GROUND BOX TY C (162911) W/ APRON	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2
	LF	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA
IH 40 CCTV #13	19		2					2	1		
IH 40 DMS #4		21	2	11	250	1	1	2		1	4
TOTAL	19	21	4	11	250	1	1	4	1	1	4

CCTV #13 AND DMS #4 MISCELLANEOUS SUMMARY

LOCATION	6010 6002	6010 6004	6028 6001	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE				
	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)	ITS POLE (50 FT) (90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-11/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)
	LF	LF	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #13	1	1		1	1	1		1	1	1	
IH 40 DMS #4			1			1	1	1	1	1	1
TOTAL	1	1	1	1	1	2	1	2	2	2	1

NO.	DATE	REVISION	APPROVED



**IH 40 EB
CCTV13 AND DMS4 QUANTITIES**


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	CARSON
CONT.	SECT.	JOB
0904	00	220


61

DATE: 8/1/2023 2:23:09 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS\14_MM129_01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'


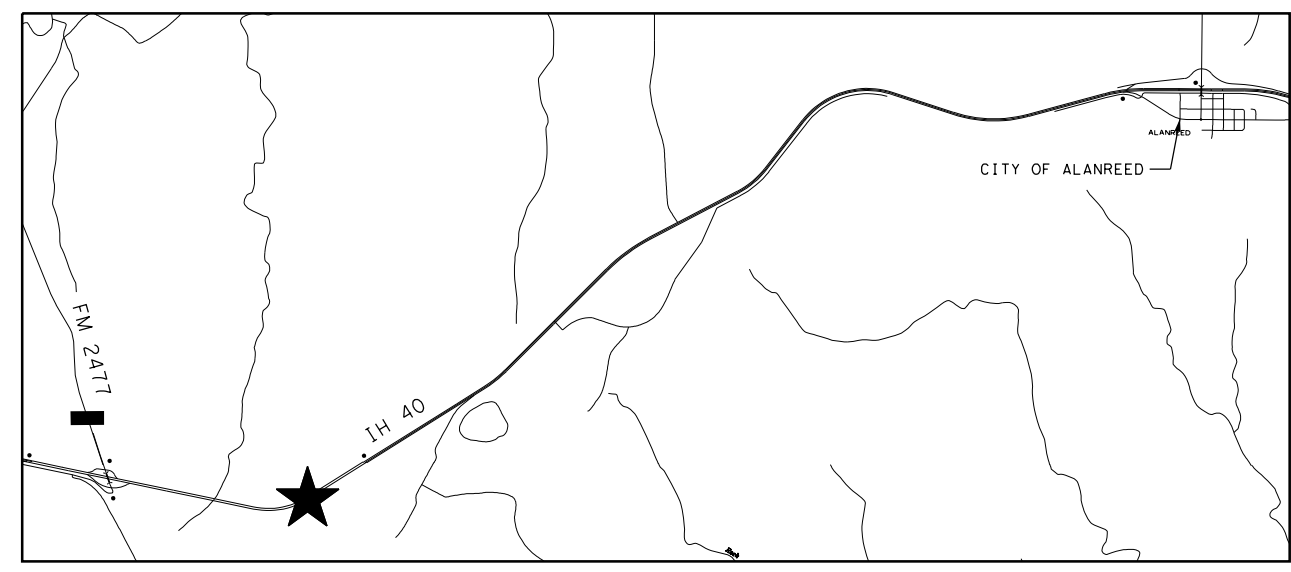


★ = LOCATION OF CCTV14



LEGEND

- EXISTING ROW (APPROX.)
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- GB ■ PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ▣ PROPOSED GROUND BOX TY A W/ APRON
- GB ▤ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GF2 FEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊖ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- ⊕ PROPOSED DMS
- ↑ LANE ASSIGNMENT ARROWS

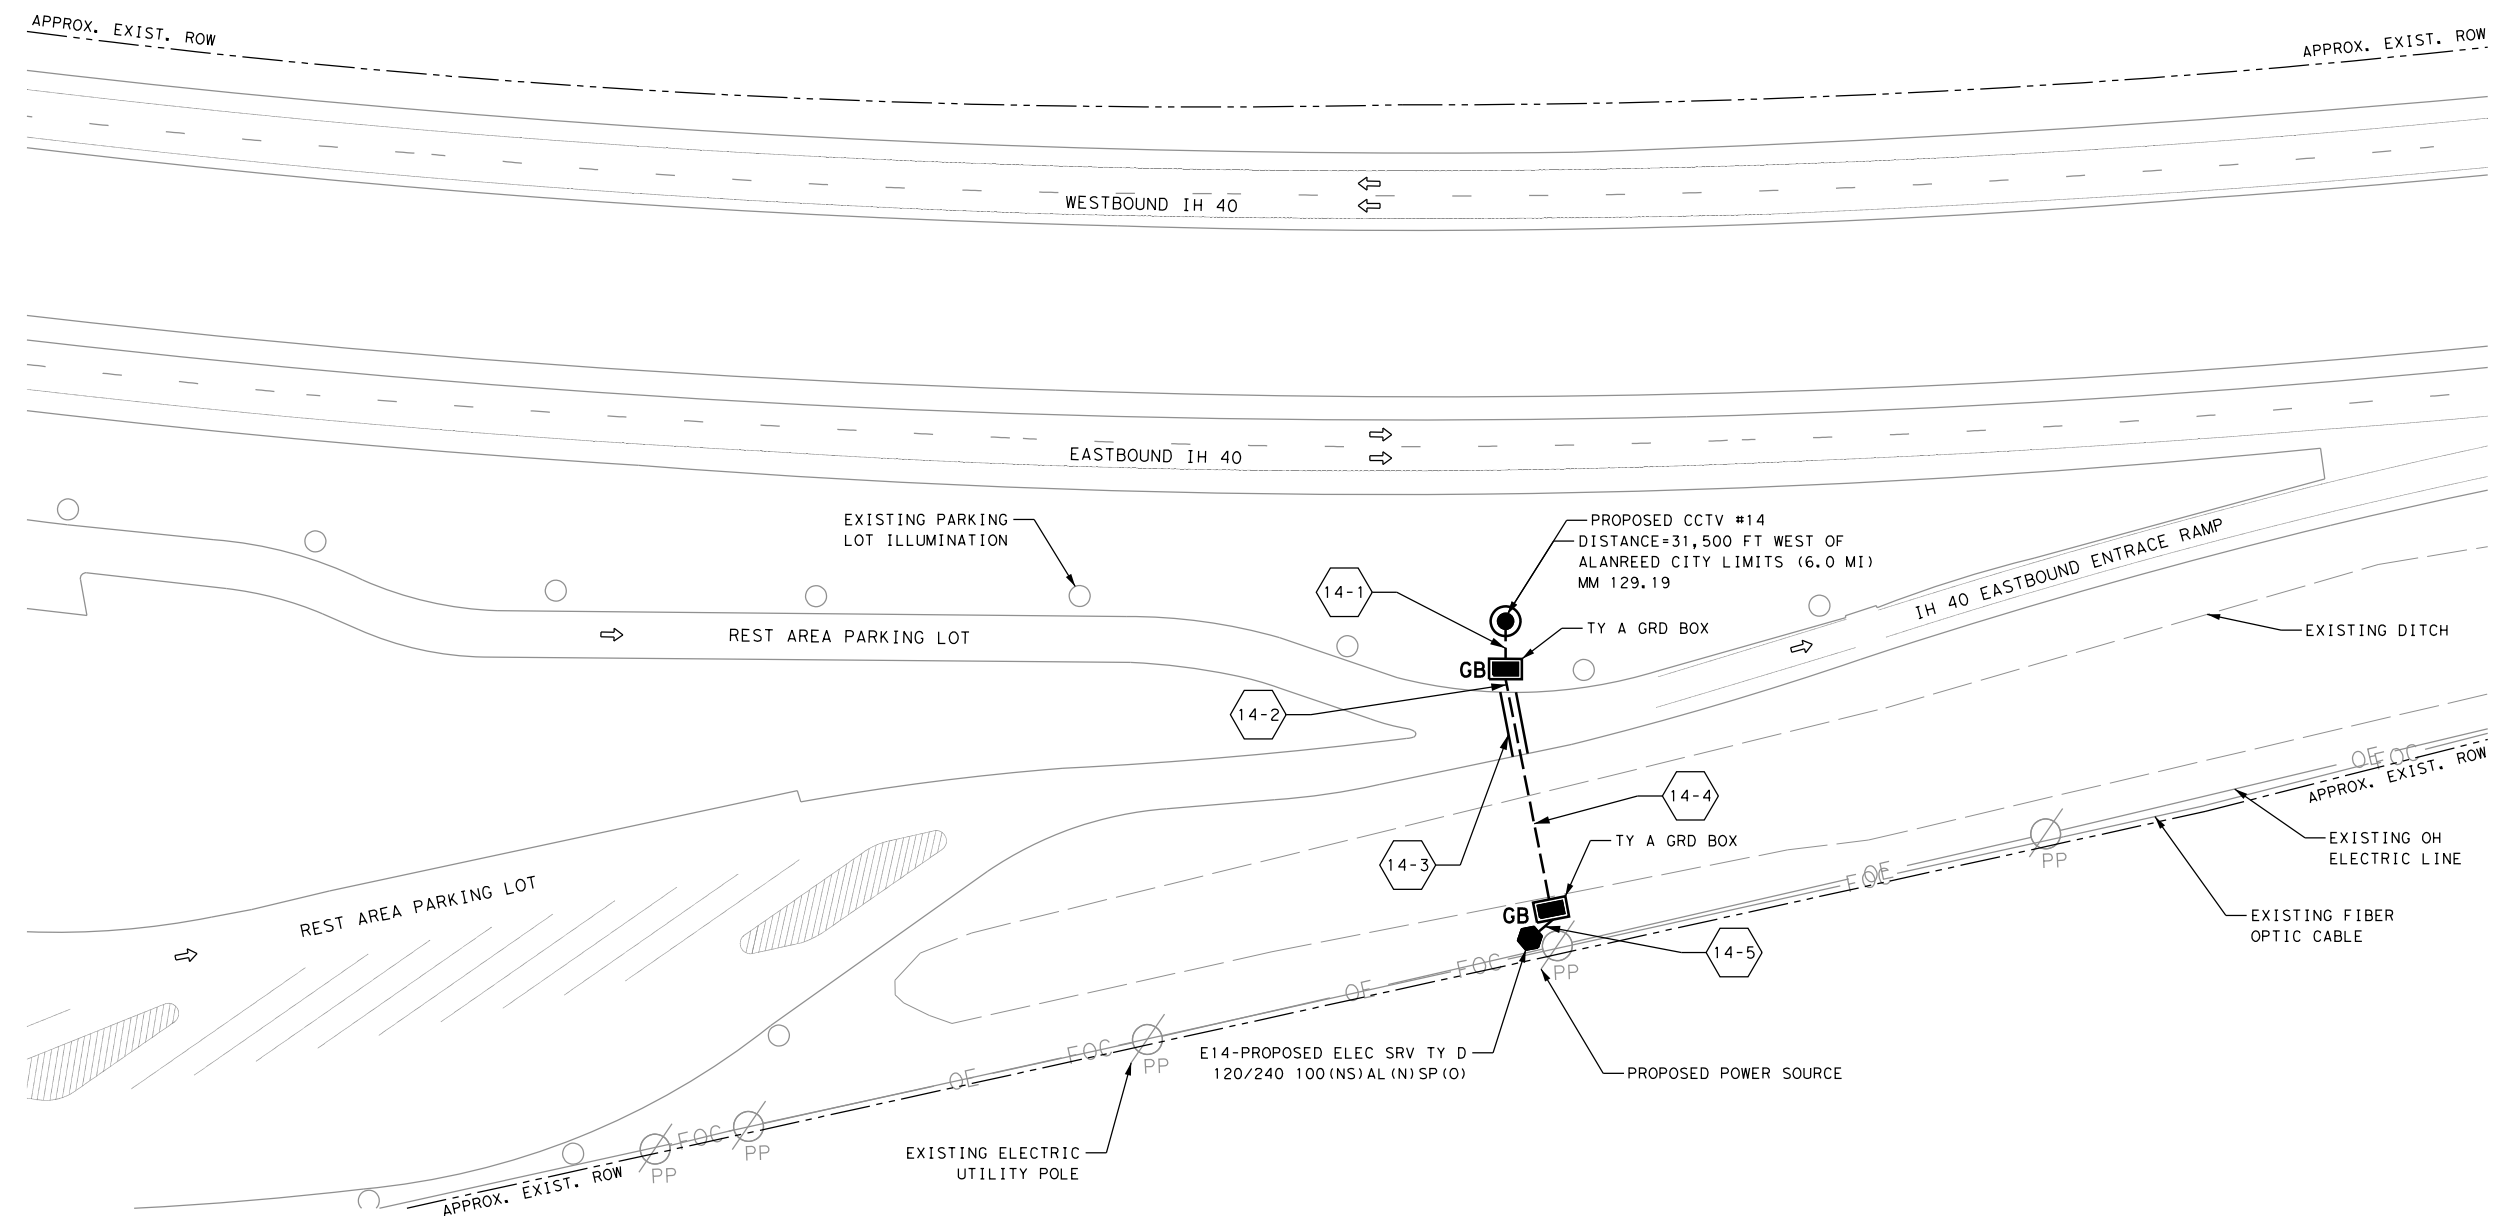

**IH 40 EB
CCTV14**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	DONLEY
CONT.	SECT.	JOB
0904	00	220

62

DATE: 8/1/2023 2:23:09 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI ITS\14_MMI 29_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: IH40_ITS_pentable.tbl


ELECTRICAL SERVICE E-14 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-14	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #14	1P/20	15	120	1.8

CCTV #14 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
14-1	1		1	2	25
14-2	1		1	2	10
14-3		1	1	2	40
14-4	1		1	2	65
14-5	1		1	2	20
TOTAL	LF	LF	LF	LF	
	120	40	160	320	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #14 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #14	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



IH 40 EB
CCTV14 QUANTITIES


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	DONLEY
CONT.	SECT.	JOB
0904	00	220

63


DATE: 8/1/2023 2:23:11 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI_ITS15_MM134_01.dgn
 PLOTDRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_penttable.tbl

0' 25' 50' 100'
 SCALE: 1" = 100'




LEGEND


- APPROX. EXIST. ROW
- OE --- EXISTING OVERHEAD ELECTRIC LINE
- PP EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB PROPOSED GROUND BOX TY A W/ APRON
- GB PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- === PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GFEN (STEEL POST)
- ⊕ PROPOSED BRF GF2
- ⊖ PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- ⊙ PROPOSED DMS
- ← LANE ASSIGNMENT ARROWS

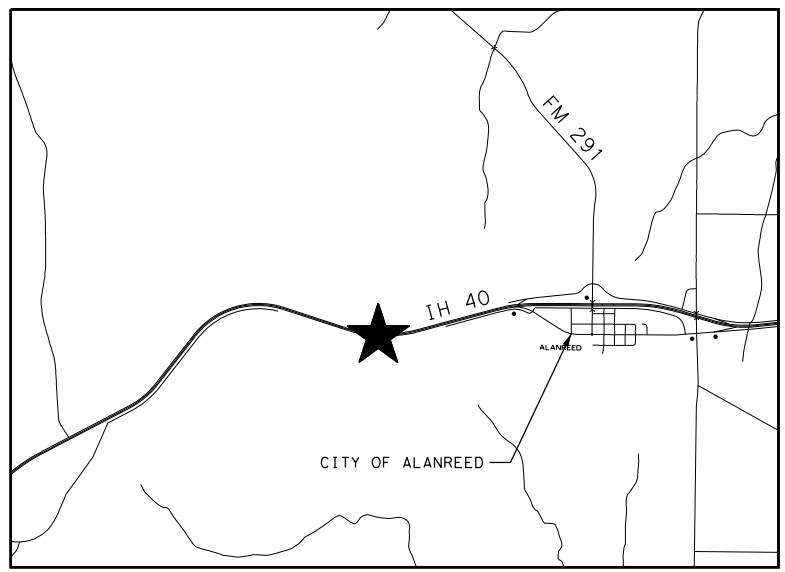

★ = LOCATION OF CCTV15

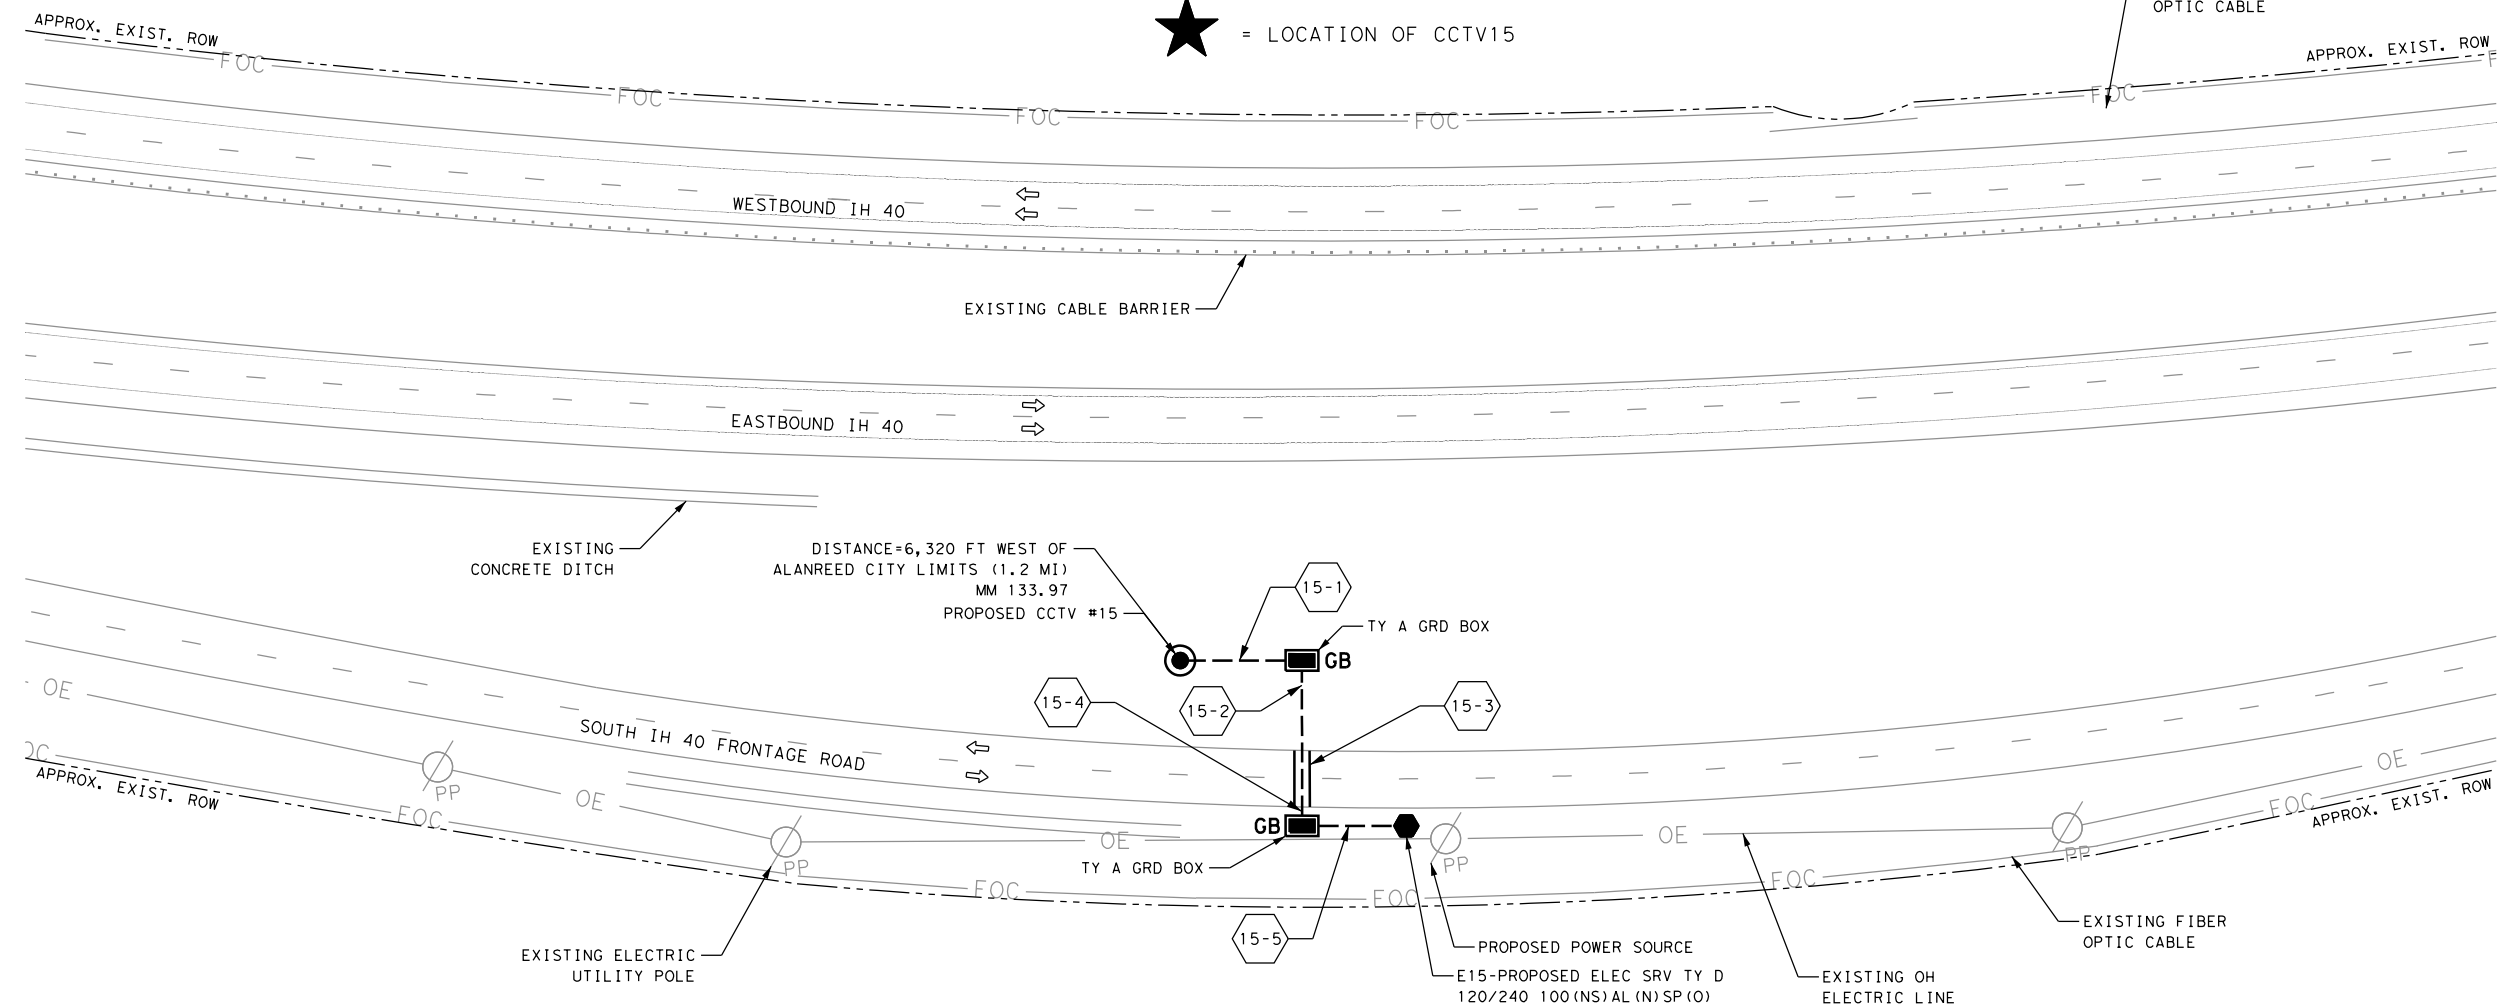

NO.	DATE	REVISION	APPROVED



**IH 40 EB
 CCTV15**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

DATE: 8/1/2023 2:23:12 PM
 USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\PI ITS15_MMI 34_02.dgn
 PLOT DRIVER: BW_HALF_PDF.plt
 PENTABLE: IH40_ITS_pentable.tbl

ELECTRICAL SERVICE E-15 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-15	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/2"	3/#6	N/A	2P/60	N/A	100	CCTV #15	1P/20	15	120	1.8

CCTV #15 CONDUIT SUMMARY					
RUN NUMBER	618 6046	618 6047	620 6007	620 6008	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 8) BARE	ELEC CONDR (NO. 8) INSULATED	FEET
15-1	1		1	2	60
15-2	1		1	2	45
15-3		1	1	2	35
15-4	1		1	2	10
15-5	1		1	2	50
TOTAL	LF	LF	LF	LF	
	165	35	200	400	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #15 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	432 6001	624 6002	6010 6002	6010 6004	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE		
	DRILL SHAFT (42 IN)	RIP RAP (CONC)(4 IN)	GROUND BOX TY A (122311) W/ APRON	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH
	LF	CY	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 CCTV #15	19	2	2	1	1	1	1	1	1	1	1

NO.	DATE	REVISION	APPROVED



Texas Board of Professional Engineers and Land Surveyors Reg. No. F-23290
6330 West Loop South, Suite 150 • Bellaire, TX 77401 • 713.777.5337


IH 40 EB
CCTV15 QUANTITIES

SHEET 1 OF 1


FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

65

DATE: 8/1/2023
 FILE: M:\DWG-59\5565-23-020\DGN\Civil\Sheets\066 IH 40 WB CCTV16 AND DMS5.dgn
 USER: USER: kearelliano
 PLOTDRIVER: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_pentab(re.tbl)

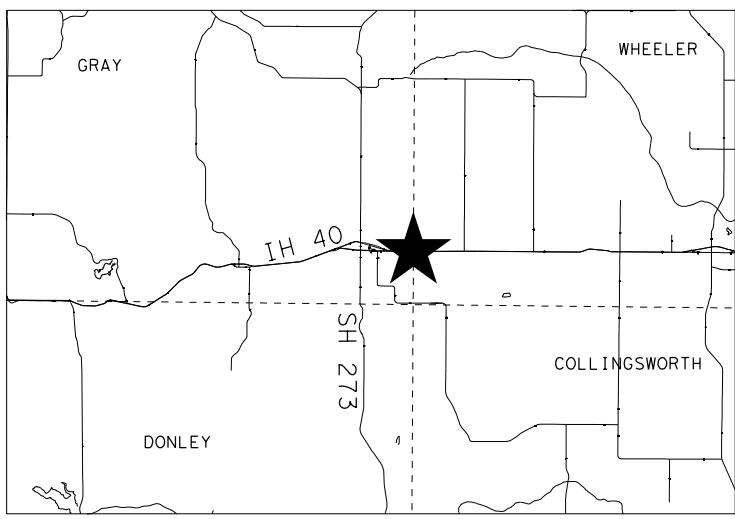

★ = LOCATION OF CCTV16 & DMS5

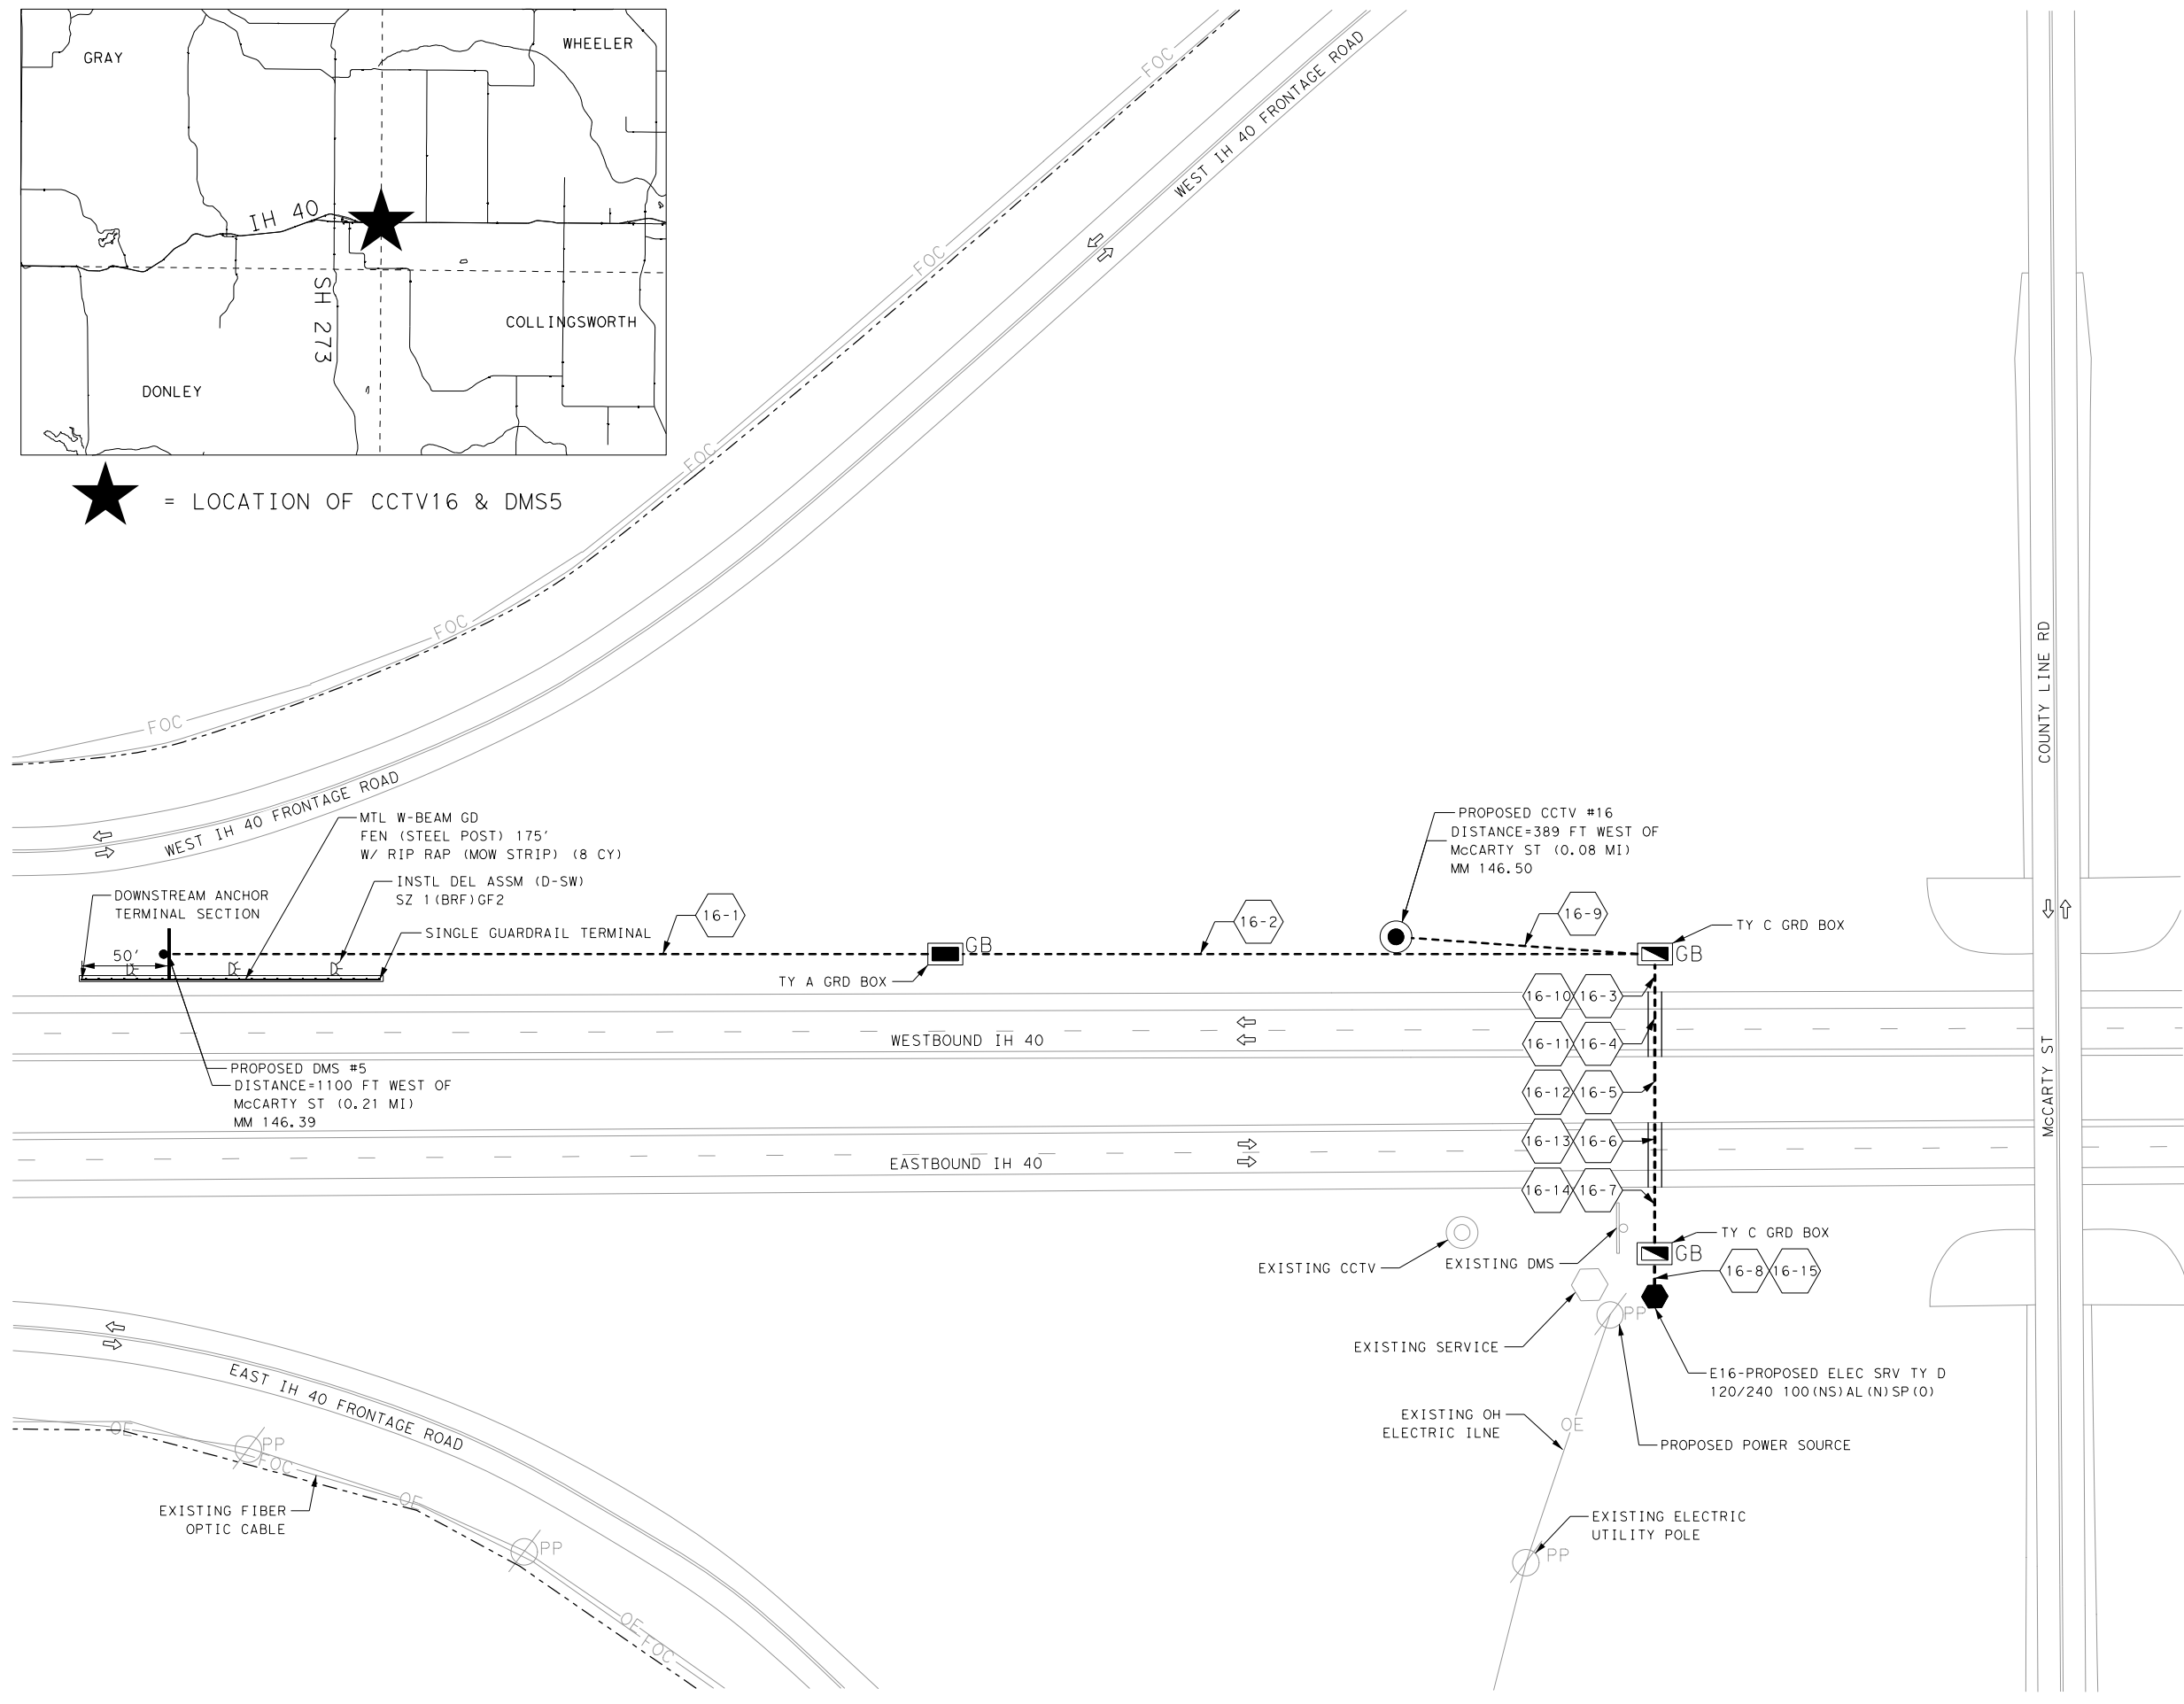


0' 25' 50' 100'
 SCALE: 1" = 100'



LEGEND

- EXISTING ROW (APPROX.)
- OE — EXISTING OVERHEAD ELECTRIC LINE
- PP ○ EXISTING ELECTRIC UTILITY POLE
- PROPOSED ELEC SRV TY D 120/240 100(NS)AL(N)SP(O)
- GB ■ PROPOSED GROUND BOX TY A W/ APRON
- GB ▣ PROPOSED GROUND BOX TY C W/ APRON
- PROPOSED TRENCHED CONDUIT
- ==== PROPOSED BORED CONDUIT
- ① CONDUIT RUN NUMBER
- PROPOSED MTL W-BEAM GD FEN (STEEL POST)
- PROPOSED BRF GF2
- PROPOSED BRF GF2 BI-DIRECTIONAL
- PROPOSED CCTV POLE
- PROPOSED DMS
- ↑ LANE ASSIGNMENT ARROWS

NO.	DATE	REVISION	APPROVED



Carl B. Laferney



**IH 40 WB
 CCTV16 AND DMS5**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

66

PLOTTED: PK_PDF_BW.plt
 PENTABLE: IH40_ITS_pentab.tbl
 USER: USER: kearelliano
 DATE: 8/1/2023 9:00:32 AM
 FILE: M:\DWG-55\5565-23\020\067\I\Sheets\067_IH_40_WB_CCTV16_AND_DMS5_QUANTITIES.dgn

ELECTRICAL SERVICE E-16 ELECTRICAL SERVICE POLE DATA (ITEM 628-6220)												
SERVICE POLE NO.	ELECTRICAL SERVICE DESCRIPTION DATA	SERVICE CONDUIT SIZE (RMC)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	BRANCH CIRCUIT AMPS	VOLTAGE	KVA LOAD
E-16	ELC SRV TY D 120/240 100(NS)AL(N)SP(O)	1 1/4"	3/#2	N/A	2P/100	N/A	100	CTV #16 DMS #5	1P/20 2P/70	15 50	120 240	13.8

CCTV #16 AND DMS #5 CONDUIT SUMMARY							
RUN NUMBER	618 6046	618 6047	620 6009	620 6010	620 6019	620 6020	RUN LENGTH
	CONDT (PVC) (SCH80)(2")	CONDT (PVC) (SCH80)(2") (BORE)	ELEC CONDR (NO. 6) BARE	ELEC CONDR (NO. 6) INSULATED	ELEC CONDR (NO. 1/0) BARE	ELEC CONDR (NO.1/0) INSULATED	FEET
16-1	1				1	3	465
16-2	1				1	3	420
16-3	1				1	3	25
16-4		1			1	3	40
16-5	1				1	3	40
16-6		1			1	3	40
16-7	1				1	3	45
16-8	1				1	3	25
16-9	1		1	2			155
16-10	1		1	2			25
16-11		1	1	2			40
16-12	1		1	2			40
16-13		1	1	2			40
16-14	1		1	2			45
16-15	1		1	2			25
TOTAL	LF	LF	LF	LF	LF	LF	
	1310	160	370	740	1100	3300	

NOTE: ALL WIRE LENGTHS HAVE 5 FT ADDITIONAL LENGTH FOR EACH END CALCULATED IN THE TOTAL.

CCTV #16 AND DMS #5 MISCELLANEOUS SUMMARY											
LOCATION	416 6005	416 6023	432 6001	432 6045	540 6002	540 6016	544 6001	624 6002	624 6008	650 6028	658 6061
	DRILL SHAFT (42 IN)	DRILL SHAFT (SIGN MTS) (CONC) (54 IN)	RIP RAP (CONC) (4 IN)	RIP RAP (MOW STRIP) (4 IN)	MTL W-BEAM GFEN (STEEL POST)	DOWNSTREAM ANCHOR TERMINAL SECTION	GUARDRAIL END TREATMENT (INSTALL)	GROUND BOX TY A (122311) W/ APRON	GROUND BOX TY C (162911) W/ APRON	INS OH SN SUP (30 FT BAL TEE)	INSTL DEL ASSM (D- SW) SZ 1(BRF)GF2
	LF	LF	CY	CY	LF	EA	EA	EA	EA	EA	EA
IH 40 WB CCTV #16	19		2						2		
IH 40 WB DMS #5		21	2	8	175	1	1	1		1	3
TOTAL	19	21	4	8	175	1	1	1	2	1	3

CCTV #16 AND DMS #5 MISCELLANEOUS SUMMARY											
LOCATION	6010 6002	6010 6004	6028 6001	6064 6037	6064 6080	6247 6005	*MATERIAL PROVIDED BY THE STATE				
	CCTV FIELD EQUIPMENT (DIGITAL)	CCTV MOUNT (POLE)	INSTALL DMS (POLE MTD CABINET)	ITS POLE (50 FT)(90 MPH)	ITS POLE MNT CAB (TY 2) (CONF 1)	INSTALL OF CELLULAR MODEM	3 LINE, 21 CHARACTER DMS (30'-6"x 8'-1 1/16")	4G CELLULAR MODEM	ANTENNA FOR CELLULAR MODEM	FIELD HARDENED ETHERNET SWITCH	DMS (POLE MTD CABINET)
	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA
IH 40 WB CCTV #16	1	1		1	1	1		1	1	1	
IH 40 WB DMS #5			1			1	1	1	1	1	1
TOTAL	1	1	1	1	1	2	1	2	2	2	1

NO.	DATE	REVISION	APPROVED



08/01/2023
Carl B. Laferney



IH 40 WB
CCTV16 AND DMS5
QUANTITIES


SHEET 1 OF 1		
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	IH 40
STATE	DIST.	COUNTY
TEXAS	AMA	GRAY
CONT.	SECT.	JOB
0904	00	220

DATE: 8/1/2023 2:23:14 PM USER: T_Cowser
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\sheet\2_01_ITS_DETAILS.dgn
 PLOT DRIVER: BW_HALF_PDF.plt PENTABLE: TH40_ITS_pentable.tbl

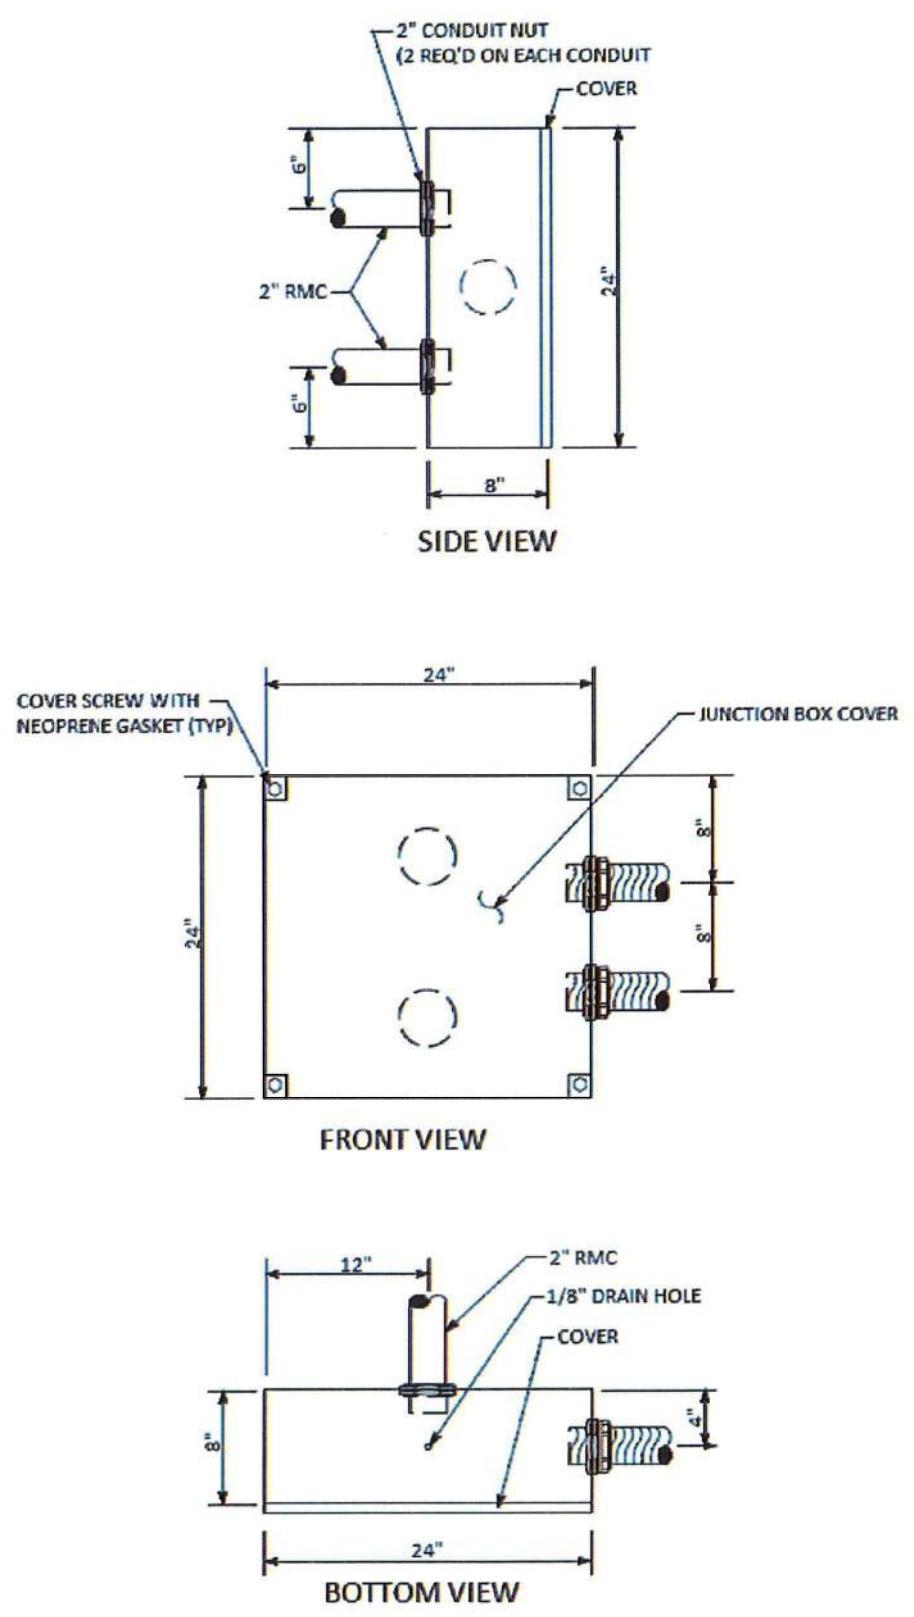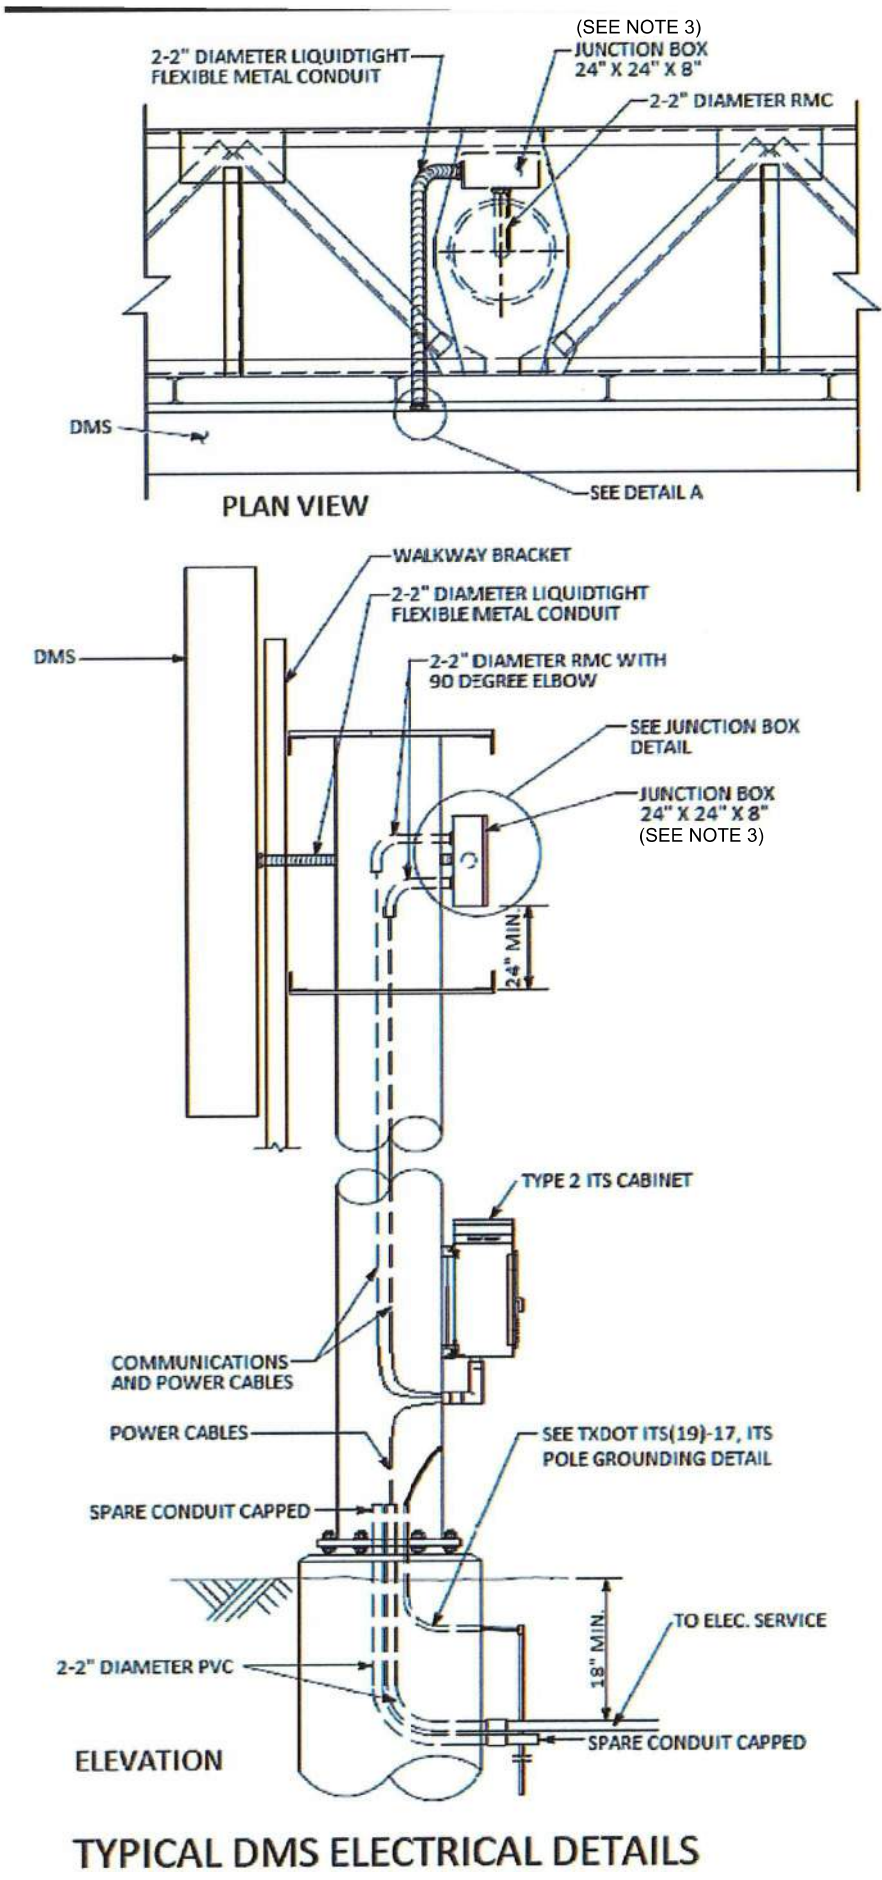


NOTES:

- ROUTING OF FLEXIBLE CONDUIT WILL BE DETERMINED BY DMS MANUFACTURER
- JUNCTION BOX SHALL BE NEMA 4X RATED ENCLOSURE. THE FRONT FACE OF THE JUNCTION BOX SHALL HAVE A REMOVABLE NEMA 4X FASKETED COVER HELD IN PLACE BY A MINIMUM OF 4 SCREWS.
- FOR POLES WITH TWO DMS SIGNS TWO JUNCTION BOXES WILL BE REQUIRED AND SHALL BE MOUNTED ON THE SIDE OF THE POLE.

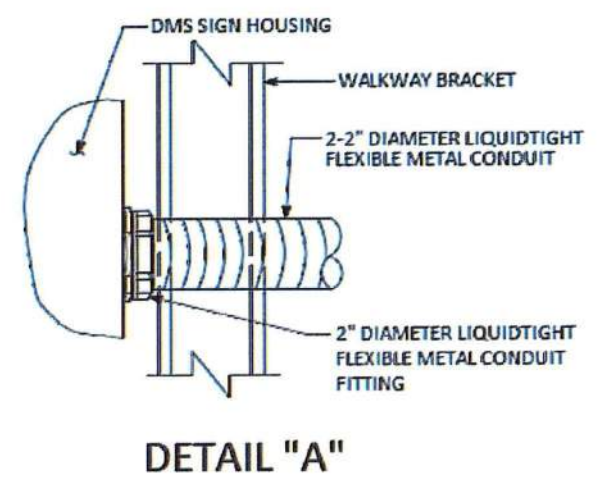


NO.	DATE	REVISION	APPROVED




ITS DETAILS

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6	SEE TITLE SHEET	VARIOUS	
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	AMA	POTTER	68
CONT.	SECT.	JOB	
0904	00	220	

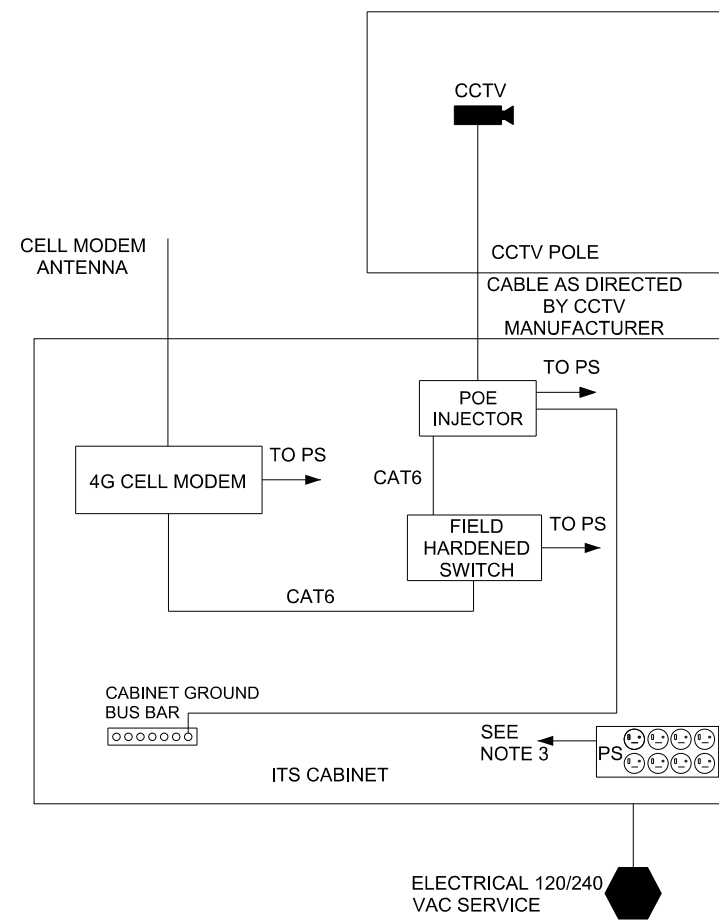

1 **CCTV BLOCK DIAGRAM**
 NOT TO SCALE

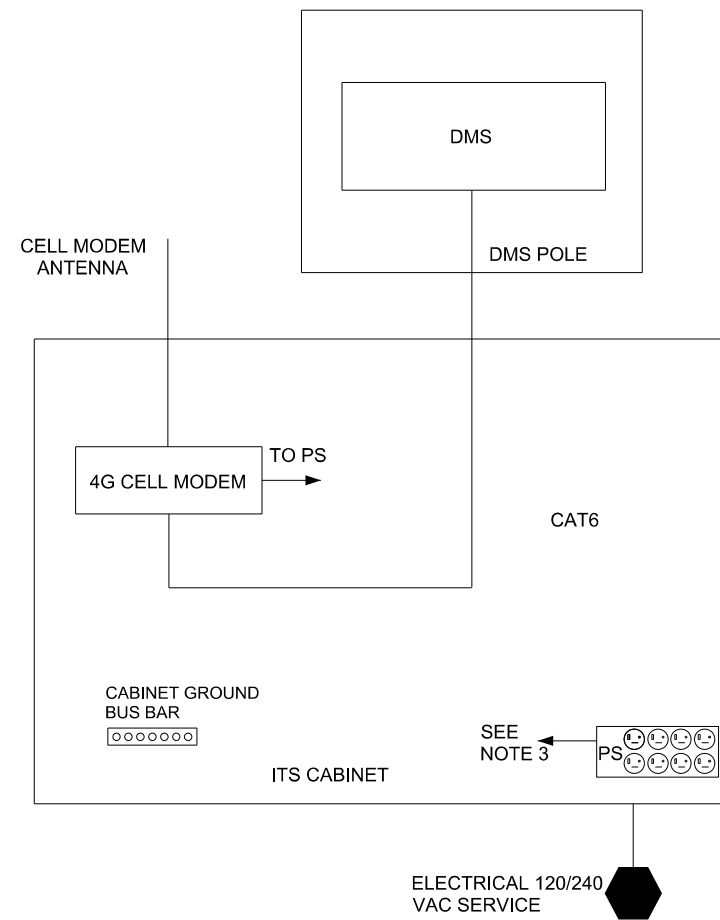

2 **DMS BLOCK DIAGRAM**
 NOT TO SCALE

- NOTES:**
- CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF THE EQUIPMENT PROVIDED. IF THE EQUIPMENT IS DAMAGED DURING TRANSPORTATION OR WORK THE CONTRACTOR SHALL REPLACE THE EQUIPMENT AT THE CONTRACTOR'S EXPENSE. CONTACT THE TRAFFIC ENGINEERING INSEPCION AND MAINTENANCE SECTION AT (806)-356-3200 AT LEAST 48 HOURS IN ADVANCE TO COORDINATE PICK-UP AND INSTALLATION OF EQUIPMENT PROVIDED BY TXDOT.
 - CONTRACTOR SHALL FURNISH AND INSTALL ALL CABLING TO COMPLETE A FULLY FUNCTIONAL SYSTEM INCLUDING BUT NOT LIMITED TO CAT6 CABLES FOR ETHERNET CONNECTION.
 - POWER STRIPS (PS) SHALL BE PLUGGED INTO SOCKET IN CABINET.

NO.	DATE	REVISION	APPROVED




ITS BLOCK DIAGRAM

SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6	SEE TITLE SHEET	VARIOUS	
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	AMA	POTTER	69
CONT.	SECT.	JOB	
0904	00	220	

NOTES:
 SEE THE FOLLOWING TXDOT STANDARDS FOR ADDITIONAL INFORMATION:

- ITS(1)-15, ITS POLE DETAILS OCTAGONAL POLE (EIGHT SIDED POLE)
- ITS(2)-15, ITS POLE DETAILS DOCECAHEDRAL POLE (TWELVE SIDED POLE) (ALTERNATIVE)
- ITS(3)-16, ITS POLE FOUNDATION DETAILS
- ITS(4)-15, ITS POLE DESIGN DETAILS DATA LOOKUP TABLE
- ITS(5)-15, ITS POLE AIR TERMINAL DETAILS
- ITS(6)-15, ITS POLE EQUIPMENT MOUNTING DETAILS
- ITS(7)-15, ITS POLE RIPRAP DETAILS
- ITS(15)-15, ITS POLE MOUNTED CABINET TYPE 2 DETAILS
- ITS(17)-15, ITS POLE MOUNTED CABINET MISC. MOUNTING DETAILS
- ITS(19)-17, ITS POLE GROUNDING DETAILS

CONTRACTOR MAY ADJUST FINAL LOCATION OF CCTV AS NEEDED TO AVOID CONFLICTS WITH DRAINAGE, UTILITIES (EXISTING OR PROPOSED) AND/OR WITH AUTHORIZATION FROM ENGINEER.

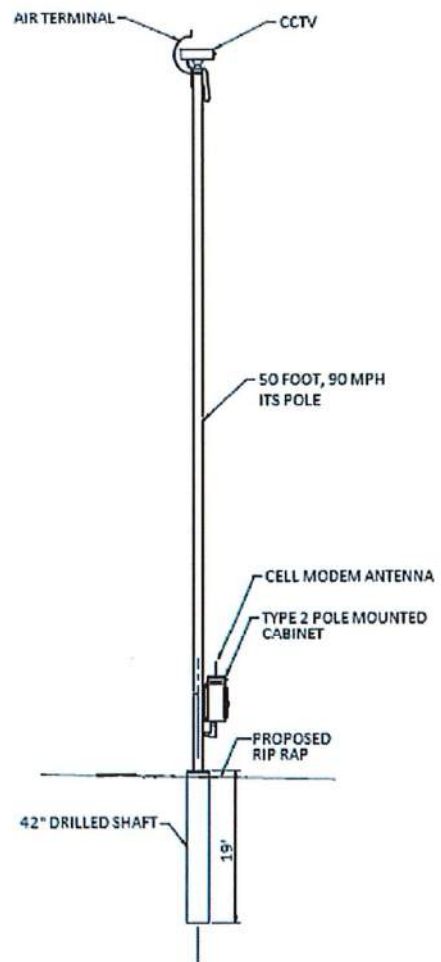


3 PROPOSED CCTV DETAIL
 NOT TO SCALE

NOTES:
 SEE THE FOLLOWING TXDOT STANDARDS FOR ADDITIONAL INFORMATION:


- DMS(TM-1)-16, DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (NON BUILDUP)
- DMS(TM-2)-16, DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (WITH BUILDUP)
- DMS(TM-3)-16, DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (WITH BUILDUP)
- COSS-Z2I-10, CANTILEVER OVERHEAD SIGN SUPPORTS
- COSSD, CANTILEVER OVERHEAD SIGN SUPPORT DETAILS
- COSSF, CANTILEVER OVERHEAD SIGN SUPPORT FOUNDATIONS
- COSS-FD, FOUNDATION EMBEDMENT SELECTION CHARTS
- ITS(10)-15, ITS POLE EXTENSION OVERHEAD SIGN STRUCTURE STEEL PIPE COLUMN (1 OF 2)
- ITS(11)-15, ITS POLE EXTENSION OVERHEAD SIGN STRUCTURE STEEL PIPE COLUMN (2 OF 2)
- ITS(15)-15, ITS POLE MOUNTED CABINET TYPE 2 DETAILS
- ITS(17)-15, ITS POLE MOUNTED CABINET MISC. MOUNTING DETAILS
- ITS(19)-17, ITS POLE GROUNDING DETAILS

CONTRACTOR MAY ADJUST FINAL LOCATION OF DMS AS NEEDED TO AVOID CONFLICTS WITH DRAINAGE, UTILITIES (EXISTING OR PROPOSED) AND/OR WITH AUTHORIZATION FROM ENGINEER.

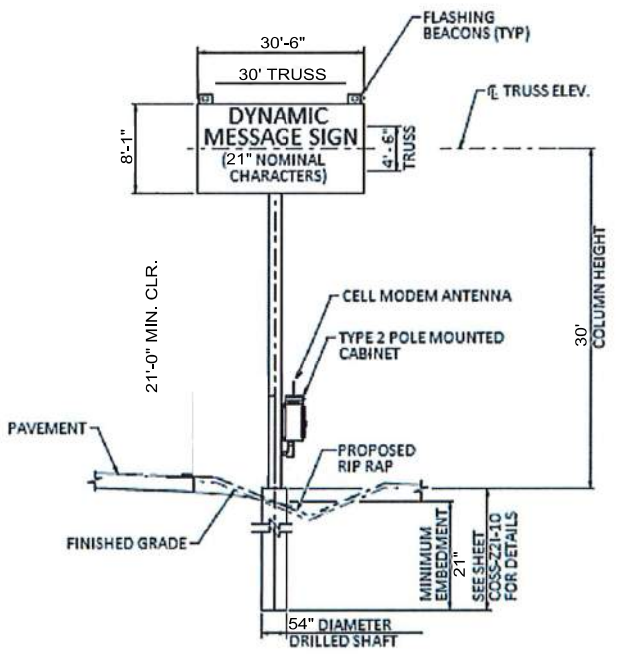

4 PROPOSED DMS DETAIL
 NOT TO SCALE

NO.	DATE	REVISION	APPROVED



ITS ELEVATION DETAILS

SHEET 1 OF 1		
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6	SEE TITLE SHEET	VARIOUS
STATE	DIST.	COUNTY
TEXAS	AMA	POTTER
CONT.	SECT.	JOB
0904	00	220

ZONE 2 WITH ICE 90 MPH WIND

Table with columns for TOWER HEIGHT, SPAN (10', 15', 20', 25'), TOWER PIPE, ANCHOR BOLTS, BASE PLATE, TRUSS, and DESIGN LOADS. It provides detailed design specifications for different tower heights and spans.

ZONE 2 WITH ICE 90 MPH WIND


Table with columns for TOWER HEIGHT, SPAN (30', 35', 40'), TOWER PIPE, ANCHOR BOLTS, BASE PLATE, TRUSS, and DESIGN LOADS. It provides detailed design specifications for spans of 30', 35', and 40'.

GENERAL NOTES :

Design conforms to AASHTO 1994 Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. Steel for tower pipe shall conform to ASTM A53 Grade B or to ASTM A501. Tower pipe wall thickness shown is the minimum allowable. Fabricator may use the wall thickness shown or pipe of the same diameter with greater wall thickness. All connection bolts shall conform to Item 447, "Structural Bolting". All structural steel, connection bolts, nuts and washers shall be galvanized in accordance with the Specifications. Compensate for truss deflection at free end by offsetting upper and lower bolt holes at truss-to-tower connection. For truss details see standard drawing COSSD. For base and foundation details see standard drawing COSSF. For cantilever truss lengths falling between those shown use sizes called for in the next longer span. Truss and towers for cantilever sign supports are designed for the equivalent area of a 10'-0" deep sign panel over 100% of the span length. Design includes 3 pounds per foot squared for sign panel and 20 pounds per foot for lights and 50 pounds per foot for walkways all placed as specified for the design sign panel. Details called for hereon are applicable for Design Wind Heights up to 30' inclusive. Number of High Strength bolts required in truss connection or splice are indicated in brackets, e.g. [3], after the member size. Deflections shown include the design loads for Truss, Sign Panel, Lights and Walkways.

TRUSS DETAILS

Table with columns for SPAN (10', 15', & 20'; 25'; 30'; 35'; 40') and rows for W x D = WIDTH x DEPTH, CHORD, DEAD LOAD DIAGONAL, WIND LOAD DIAGONAL, DEAD LOAD VERTICAL, WIND LOAD STRUT, TRUSS DEAD LOAD, SIZE H. S. BOLTS IN CONNECTION, and NO. & SIZE OF H. S. BOLTS IN CHORD ANGLE TO TOWER CONNECTION PLATE.

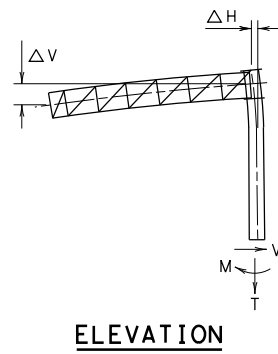

ELEVATION (SHOWING DESIGN LOADS AND DEAD LOAD DEFLECTIONS)

- ① "Low-Alloy Steel" for non-bridge structures per Item 442, "Metal For Structures".
② "Carbon Steel" for non-bridge structures per Item 442, "Metal For Structures".


Table with columns for REVISIONS, DATE, DRAWING NUMBER, SHEET NUMBER, COUNTY, and SHEET NUMBER. It includes details for revision 4-10 and sheet 71.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act"...

DATE: 8/1/2023 2:23:21 PM FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\stds63.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:22 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\stds66.dgn

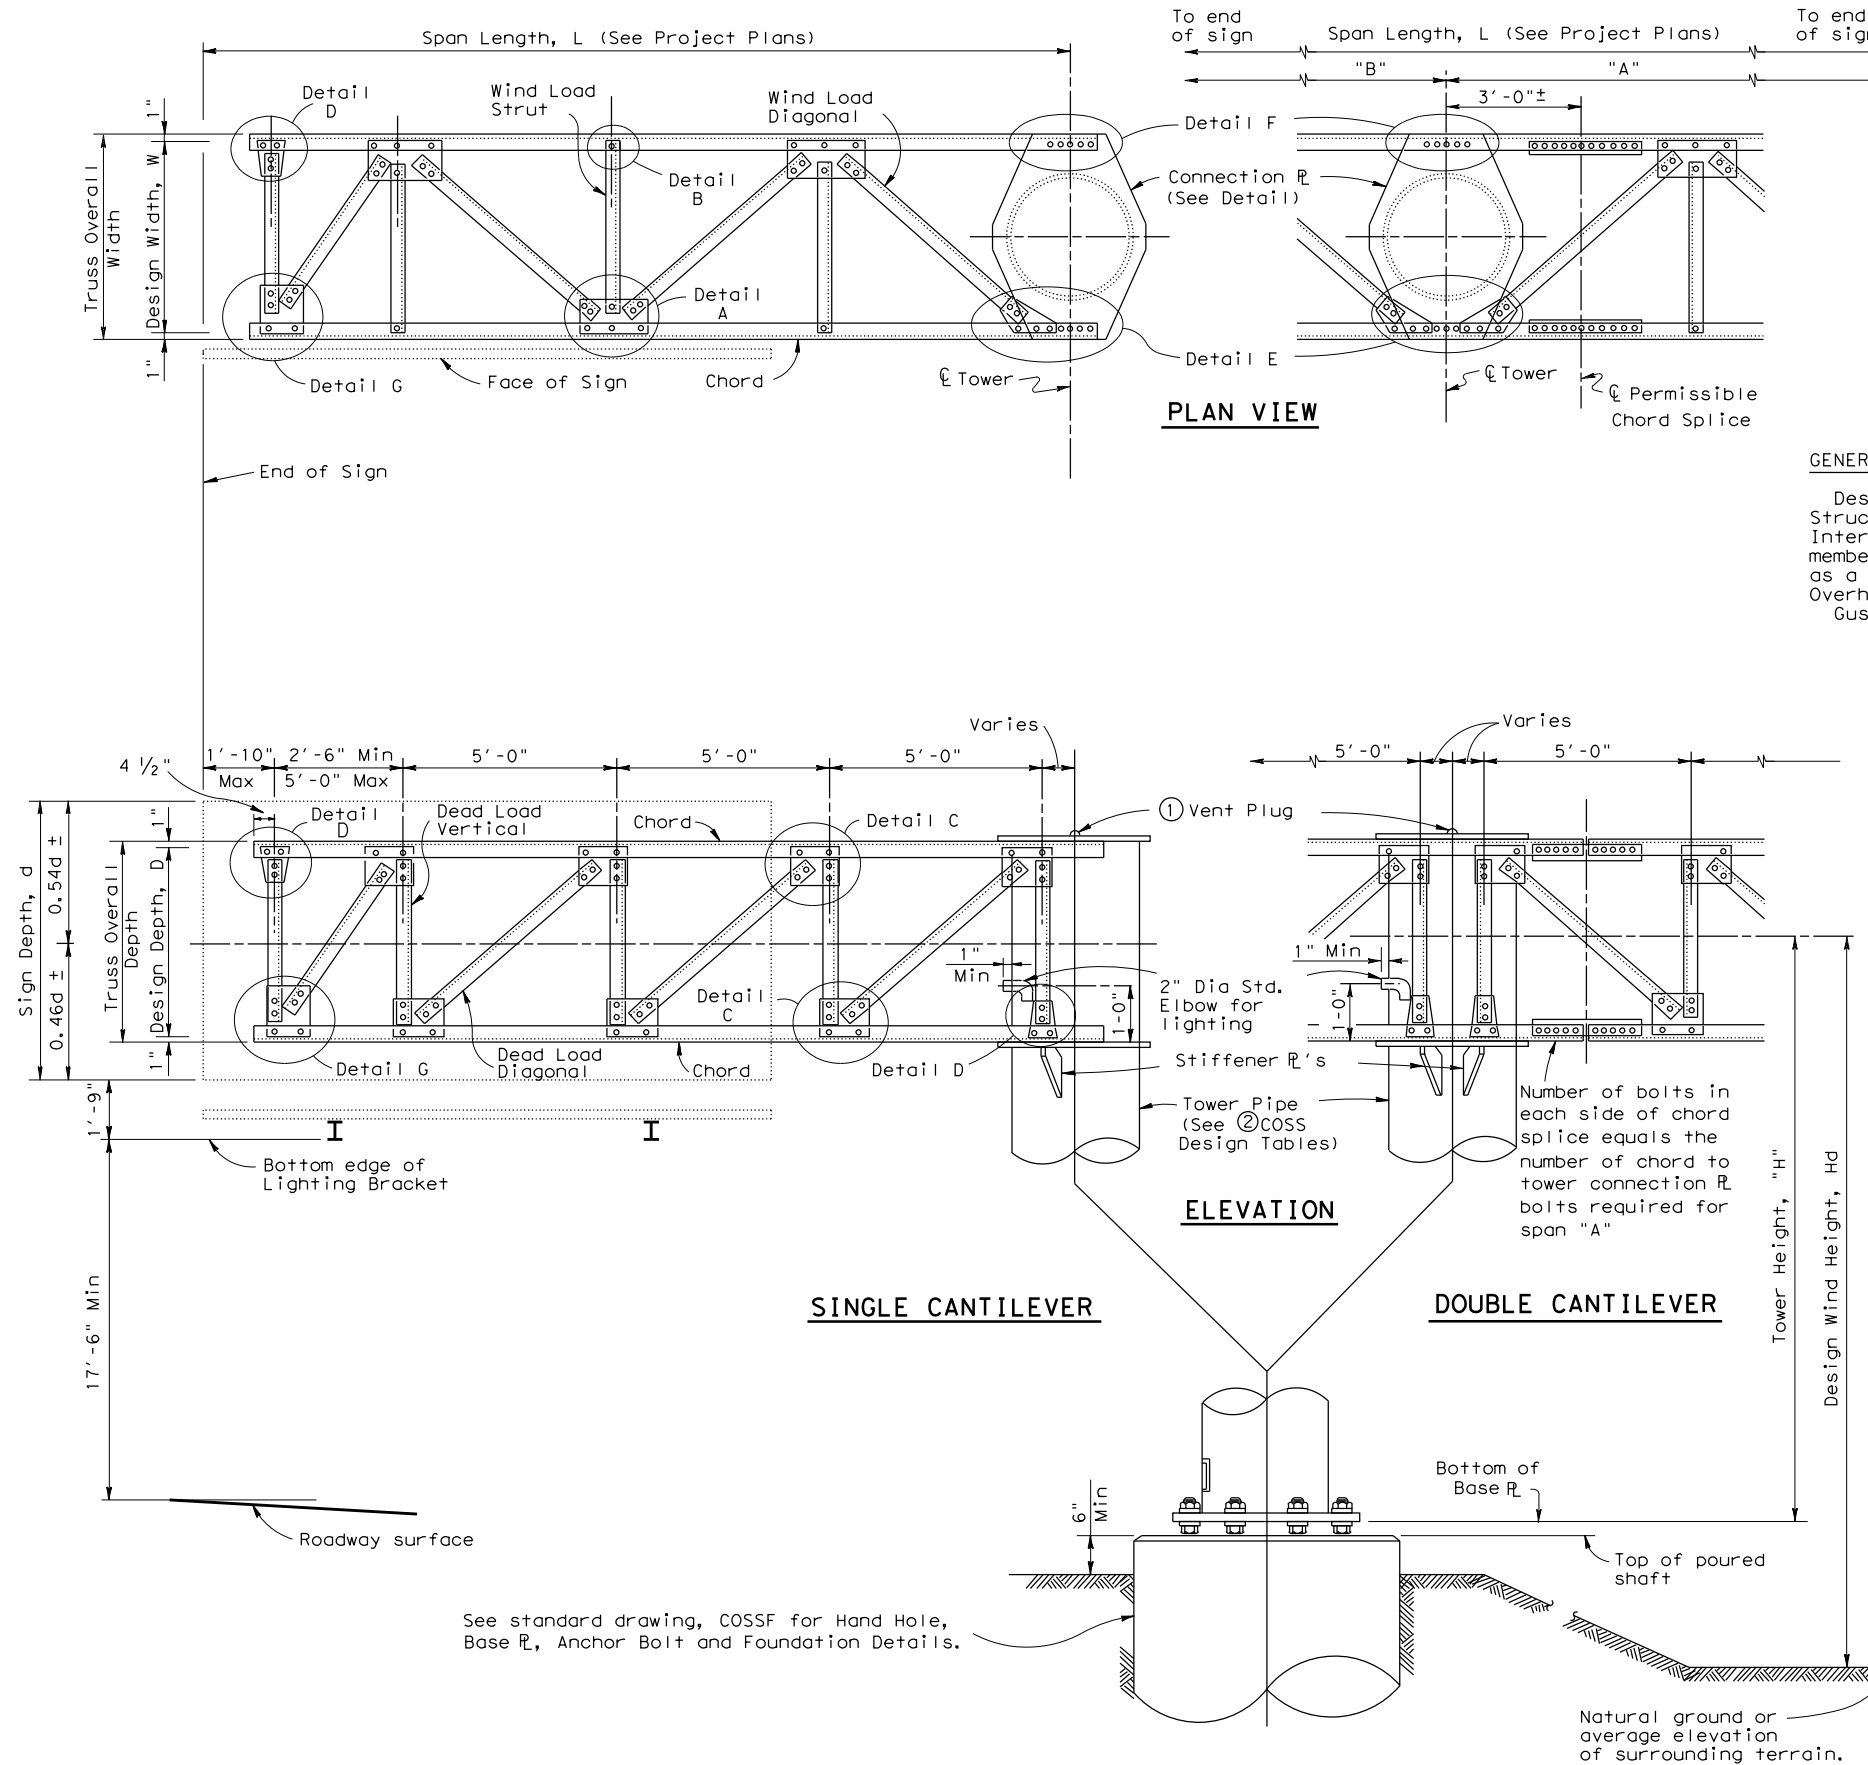

GENERAL NOTES:

Design conforms to 1975 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals and Interim revisions thereto. Connection details are typical only. Actual size of member and number of bolts will vary. The details on this sheet are intended as a guide only. See "Cantilever Overhead Sign Supports" or "High Level Cantilever Overhead Sign Supports" sheets for number of bolts and size of members. Gusset plates to be same thickness as thickest web member in connection.

- ① Note: Cap shall be solid steel sheet $\frac{3}{8}$ " nominal thickness. Drill, tap and plug galvanizing vent. Weld plate to pipe with $\frac{3}{8}$ " weld all around.
- ② For COSS design tables see standard drawing, "Cantilever Overhead Sign Supports" or "High Level Cantilever Overhead Sign Supports".

SHEET 1 OF 2




CANTILEVER OVERHEAD SIGN SUPPORT DETAILS

COSSD

© TxDOT November 2007		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS		CONT	SECT	JOB	HIGHWAY
		0904	00	220	VARIOUS
		DIST	COUNTY	SHEET NO.	
		AMA	POTTER	72	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH 40 ITS\2 Design Phase\CAD\standards\stds66.dgn

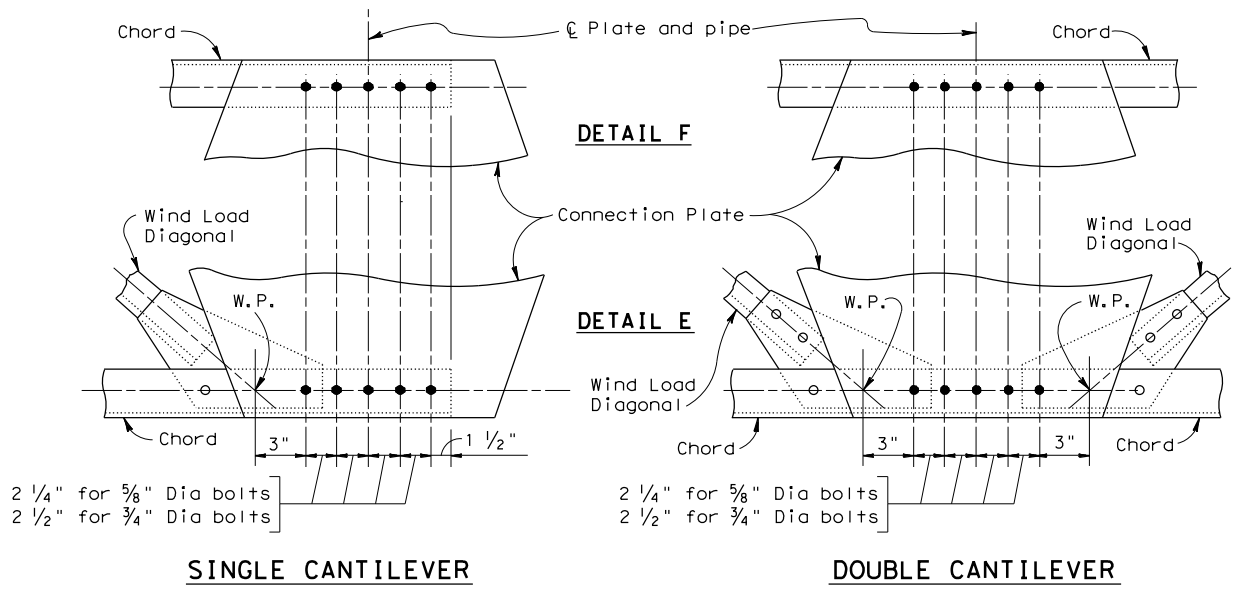


2 1/4" for 5/8" Dia bolts
 2 1/2" for 3/4" Dia bolts


SINGLE CANTILEVER

DOUBLE CANTILEVER


CONNECTION DETAILS

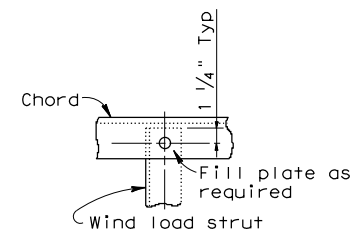

DETAIL B

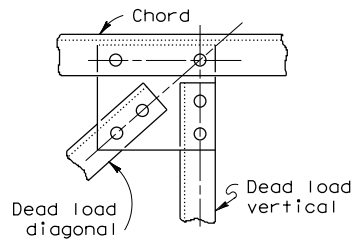


DETAIL C

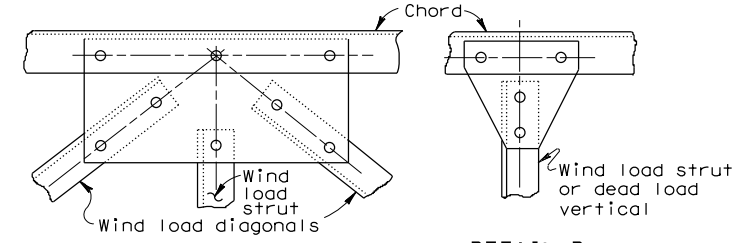


DETAIL A

DETAIL D

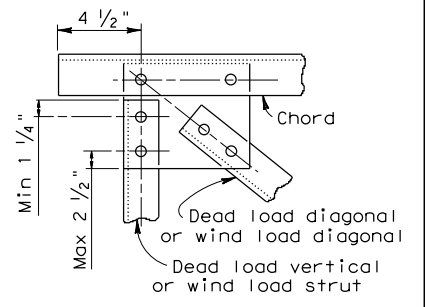


DETAIL G

TOTAL NO. OF BOLTS IN DIAG'S. IN JOINT	NUMBER OF BOLTS REQD. IN GUSSET PL TO CHORD CONNECTION
0	2
2	2
3	3
4	3
5	4
6	4
8	5
10	6

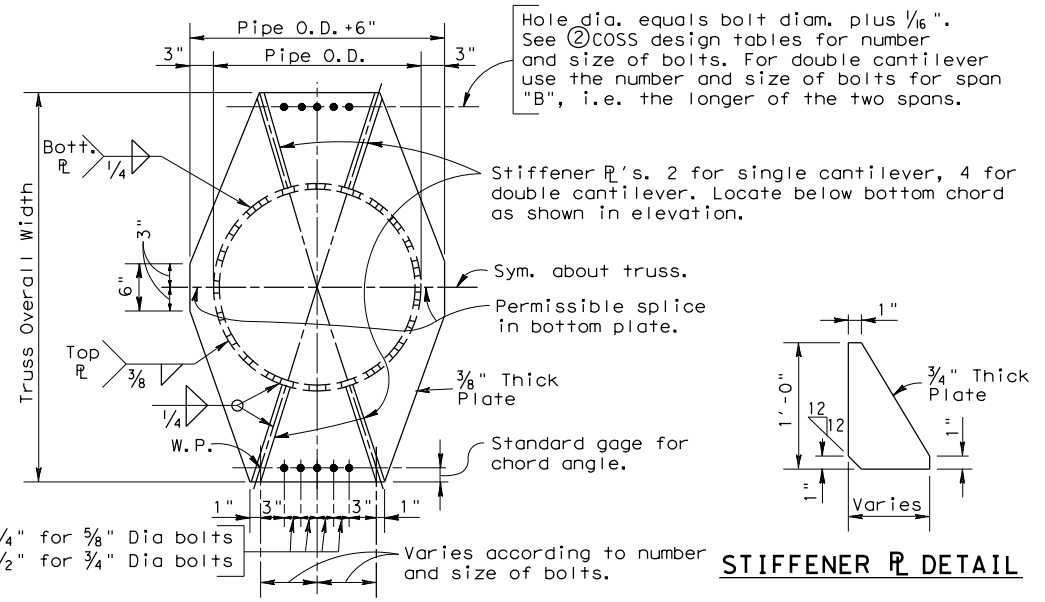


CONNECTION PLATE DETAIL

STIFFENER R DETAIL

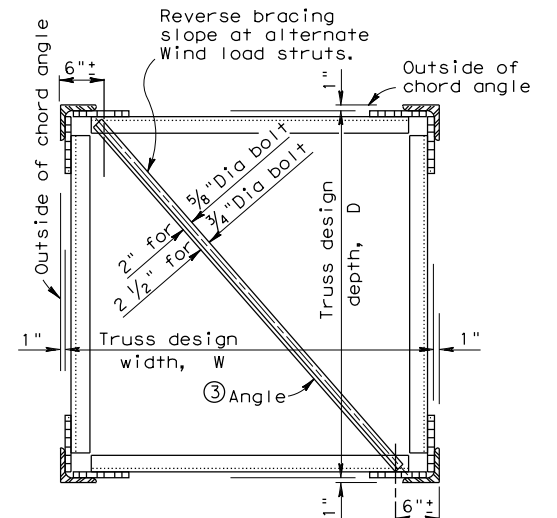


TRUSS SECTION


(DIAGONALS NOT SHOWN)

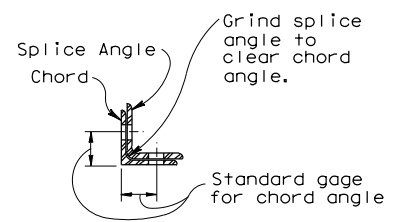


SECTION ON C SPLICE

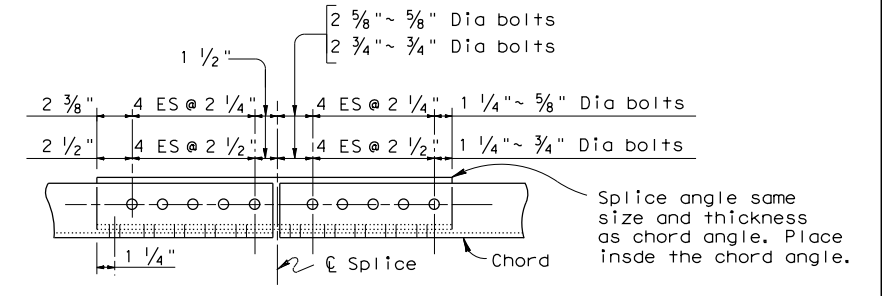

SINGLE SHEAR CHORD SPLICE

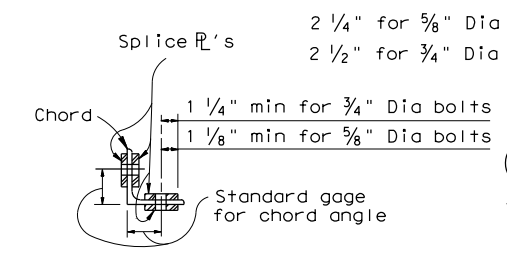


SECTION ON C SPLICE

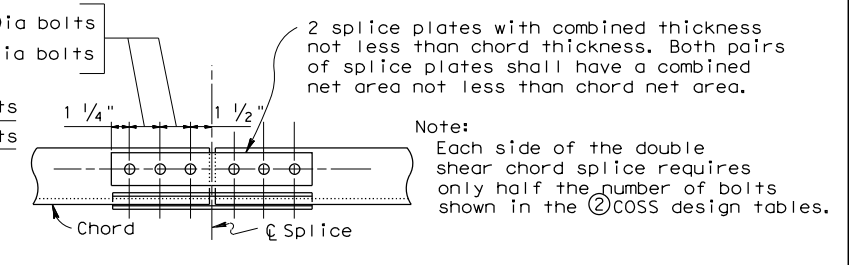


DOUBLE SHEAR CHORD SPLICE

SPLICE DETAILS

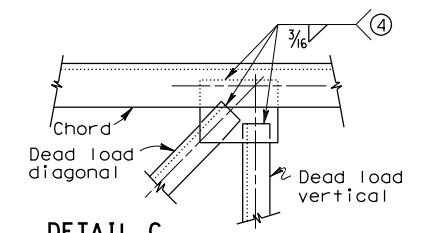

DETAIL C
 (Gusset plates in other details to be similar)

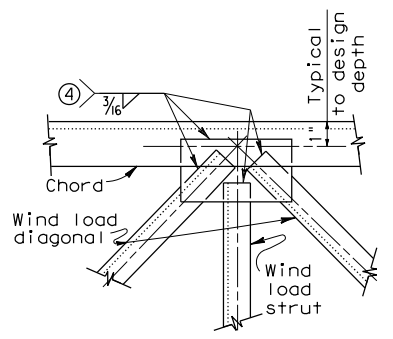

DETAIL A

ALTERNATE WELDED CONNECTION DETAILS

③ 2" x 2" x 3/16" angle for 5/8" Dia bolts [1]
 2 1/2" x 2" x 3/16" angle for 3/4" Dia bolts [1]

NUMBER OF BOLTS	④ MINIMUM LENGTH OF 3/16" FILLET WELD REQUIRED	
	TO REPLACE 5/8" DIA BOLTS	TO REPLACE 3/4" DIA BOLTS
1	2"	3"
2	4"	6"
3	6"	9"
4	8"	11 1/2"
5	10"	14 1/2"
6	12"	17 1/2"
7	14"	20"

SHEET 2 OF 2



CANTILEVER OVERHEAD SIGN SUPPORT DETAILS

COSSD

© TxDOT November 2007					DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS					CONT	SECT	JOB	HIGHWAY
					0904	00	220	VARIOUS
					DIST	COUNTY		SHEET NO.
					AMA	POTTER		73

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:23:23 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS2 Design Phase of Plans.dwg

Washers shall conform to ASTM F436.


ANCHOR BOLT DIA. d	WASHER DIMENSIONS			HOLE IN BASE PLATE	
	OUTSIDE DIAMETER	HOLE DIAMETER	THICKNESS		
			MIN.		MAX.
1 1/2" or less	2d	d + 1/8"	0.136"	0.177"	d + 1/4"
1 3/4"	2d - 1/8"	d + 1/8"	0.178"	0.280"	d + 5/16"
2"	2d - 1/4"	d + 1/8"	0.178"	0.280"	d + 5/16"
Over 2"	2d - 1/2"	d + 1/8"	0.240"	0.340"	d + 5/16"

ANCHOR BOLT SIZE				
DIA	BOLT LENGTH	THREAD LENGTH	PROJECTION LENGTH	GALVAN. LENGTH
1 1/4"	2'-11"	5"	5 1/4"	11 1/4"
1 3/8"	3'-1"	5 1/2"	5 3/4"	11 3/4"
1 1/2"	3'-4"	6"	6 1/4"	1'-0 1/4"
1 3/4"	3'-10"	7"	7 1/4"	1'-1 1/4"
2"	4'-3"	8"	8 1/4"	1'-2 1/4"
2 1/4"	4'-9"	9"	9 1/4"	1'-3 1/4"
2 1/2"	5'-2"	10"	10 1/4"	1'-4 1/4"
2 3/4"	5'-8"	11"	11 1/4"	1'-5 1/4"
3"	6'-1"	1'-0"	1'-0 1/4"	1'-6 1/4"


- ① Anchor Bolt Fabrication Tolerances:
 Bolt Length ~ ±1/2"
 Thread Length ~ ±1/2"
 Galvanized Length ~ -1/4"
- ② Thread length applies to upper and lower threads

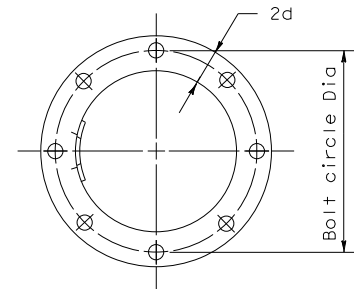


TOP VIEW OF TOP & BOTTOM TEMPLATES

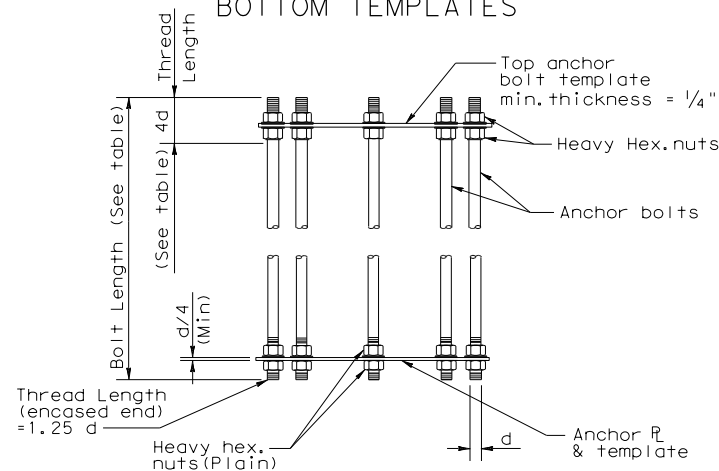

ANCHOR BOLT ASSEMBLY (PRIOR TO INSTALLATION)

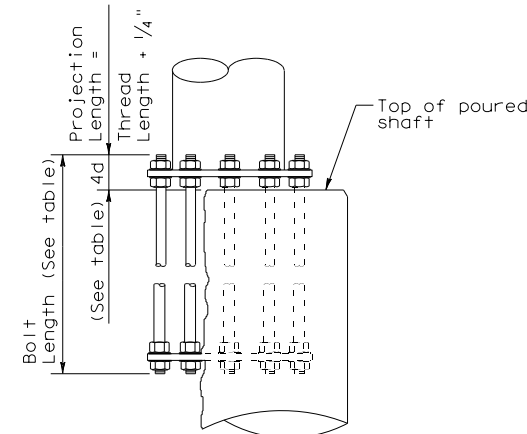


BEARING SEAT ELEVATION

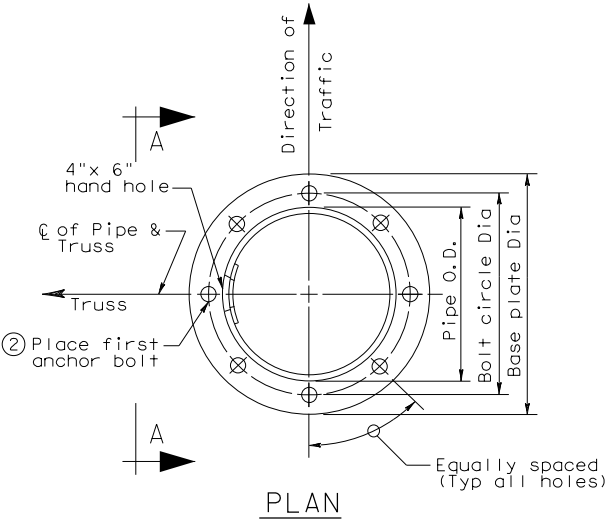

PLAN

- ② See "Cantilever Overhead Sign Support" or "High Lever Cantilever Overhead Sign Support" sheets for number and size.

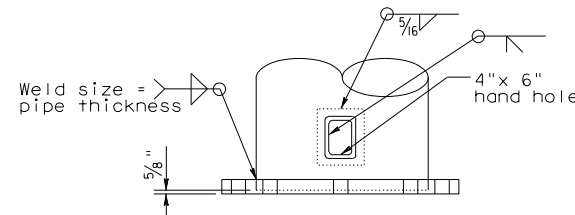


VIEW A-A


③ BASE PLATE & HANDHOLE DETAILS

- ③ See "Cantilever Overhead Sign Support" or "High Level Cantilever Overhead Sign Support" sheets for Diameter and thickness of base plate.


ANCHOR BOLT SIZE	PIPE OUTSIDE DIAMETER											
	16"			20"			24"			30"		
	BOLT CIRCLE DIA	DRILLED SHAFT SIZE	DRILLED SHAFT REINF	BOLT CIRCLE DIA	DRILLED SHAFT SIZE	DRILLED SHAFT REINF	BOLT CIRCLE DIA	DRILLED SHAFT SIZE	DRILLED SHAFT REINF	BOLT CIRCLE DIA	DRILLED SHAFT SIZE	DRILLED SHAFT REINF
1 1/4" Dia x 2'-11"	20 1/2"	36" Dia	14-#8 (A)	24 1/2"	36" Dia	14-#8 (A)						
1 3/8" Dia x 3'-1"	20 3/4"	36" Dia	12-#9 (A)	24 3/4"	42" Dia	14-#9 (A)						
1 1/2" Dia x 3'-4"	21"	36" Dia	12-#9 (A)	25"	42" Dia	14-#9 (A)	29"	42" Dia	14-#9 (C)			
1 3/4" Dia x 3'-10"	21 1/2"	36" Dia	10-#10 (A)	25 3/8"	42" Dia	12-#10 (B)	29 3/8"	48" Dia	16-#10 (C)	35 3/8"	54" Dia	18-#10 (C)
2" Dia x 4'-3"	22"	36" Dia	12-#10 (A)	25 3/4"	42" Dia	12-#10 (B)	29 3/4"	48" Dia	16-#10 (C)	35 3/4"	54" Dia	18-#10 (C)
2 1/4" Dia x 4'-9"	22 1/2"	42" Dia	12-#11 (A)	26"	42" Dia	10-#11 (B)	30"	48" Dia	14-#11 (C)	36"	54" Dia	14-#11 (D)
2 1/2" Dia x 5'-2"				26 1/2"	42" Dia	12-#11 (B)	30 1/2"	48" Dia	16-#11 (C)	36 1/2"	54" Dia	16-#11 (D)
2 3/4" Dia x 5'-8"							31 1/2"	48" Dia	18-#11 (D)	37"	54" Dia	20-#11 (D)
3" Dia x 6'-1"										37 1/2"	54" Dia	24-#11 (D)

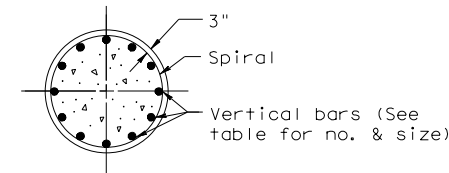

SECTION

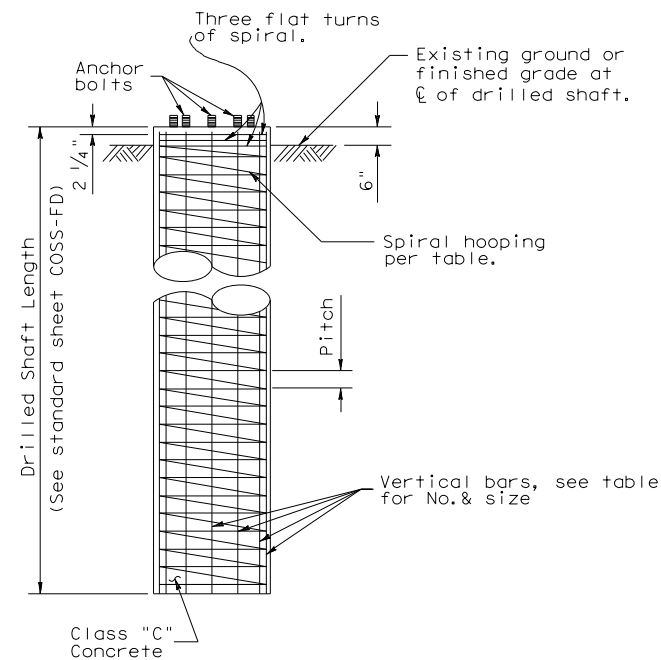

FOUNDATION DETAIL

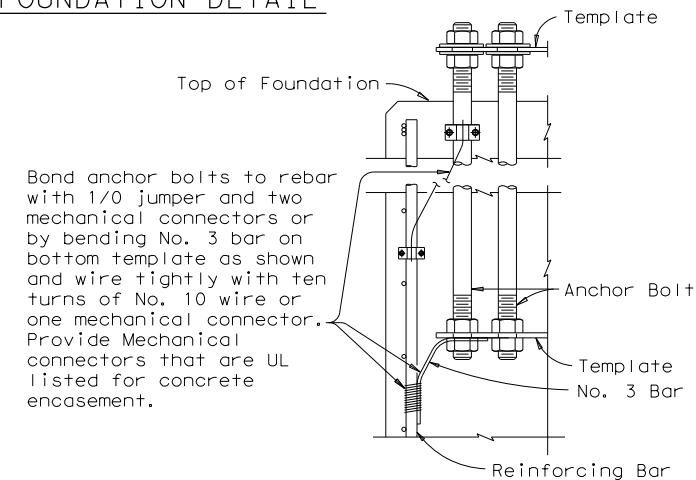

LIGHTNING PROTECTION SYSTEM

- A = #3 Plain spiral at 6" pitch (Grade 40)
- B = #4 Plain spiral at 6" pitch (Grade 40)
- C = #4 Plain spiral at 6" pitch (Grade 60)
- D = #4 Plain spiral at 3 1/2" pitch (Grade 60)

GENERAL NOTES

- Concrete shall be Class "C".
- Reinforcing shall conform to Item 440, "Reinforcing Steel".
- Anchor bolts and nuts for anchor bolts shall be "Alloy Steel" per Item 449, "Anchor Bolts".
- Anchor bolts shall be rigidly held in position during concrete placement using steel templates at the top and bottom. The top templates shall be removed after the concrete has set.
- Lubricate and tighten anchor bolts when erecting the structure per Item 449, "Anchor Bolts". After the structure has been aligned in its final position and the anchor bolts have been properly tightened, tack weld anchor bolt nuts to washer, and tack weld washers to base plate. Galvanizing in tack welded areas shall be repaired in accordance with Item 445, "Galvanizing".
- All vertical reinforcing shall be carried to the bottom of the Drilled Shaft.




CANTILEVER OVERHEAD SIGN SUPPORT FOUNDATION
 COSSF-21

FILE: cosSF-21.dgn	DN:	CK:	DW:	CK:
© TxDOT November 2007	CONT	SECT	JOB	HIGHWAY
8-21	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	74	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DISCLAIMER:


DATE: 8/1/2023 2:23:24 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\stds68.dgn

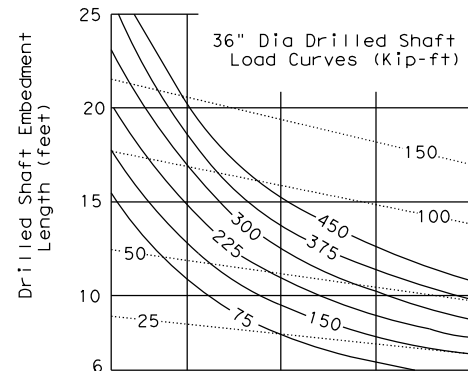


①	28.5°	30°	32°	34°	36°
②	12	21	35	50	65

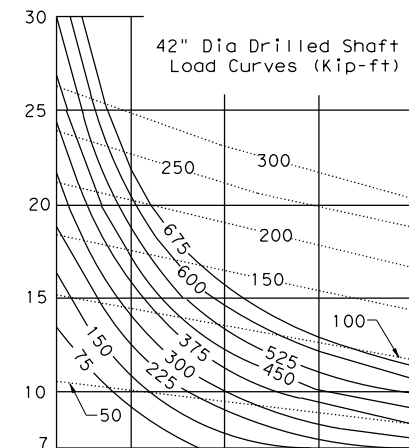


①	28.5°	30°	32°	34°	36°
②	12	21	35	50	65

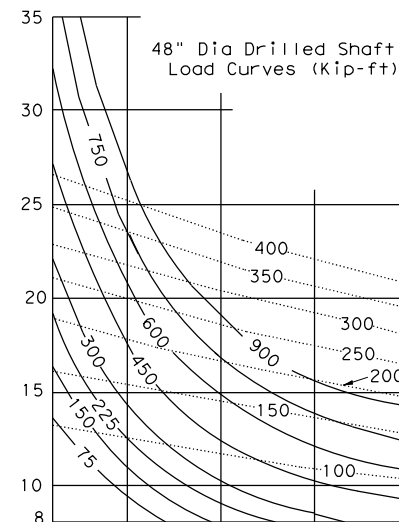

①	28.5°	30°	32°	34°	36°
②	12	21	35	50	65

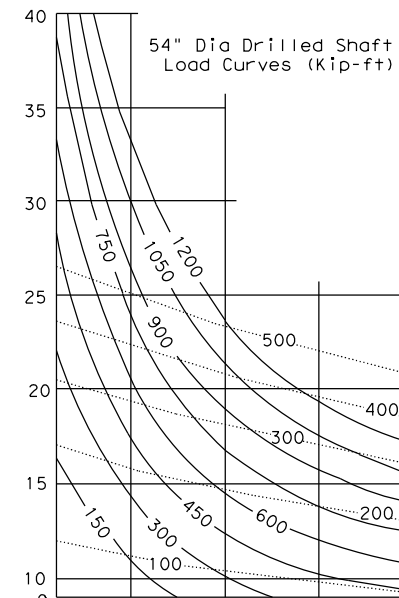

①	28.5°	30°	32°	34°	36°
②	12	21	35	50	65

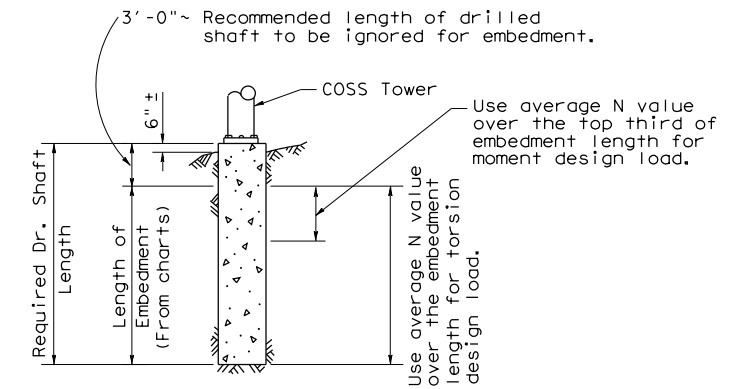

PROCEDURE:

- Determine design moment and torsion, and the required drilled shaft diameter as outlined in the selection example sheet COSS-SE.
- Make an initial estimate of the required embedment length.
- From soil exploration data determine type of soil and average N value or soil property along the upper third of the drilled shaft.
- Enter chart (for the correct shaft diameter and soil type) from the bottom at the average N value or soil property determined in step 3.
- Proceed vertically into chart and locate intersection with design moment. Interpolate between moment curves (solid lines) as needed.
- From intersection point turn 90° to left and read embedment length along vertical scale.
- If embedment length differs significantly from estimated value return to step 3 with the embedment length determined in step 6.
- From soil exploration data determine average N value or soil property over the entire length of the embedment.
- Enter chart (for correct shaft diameter and soil type) from the bottom at the average N value or soil property determined in step 8.
- Proceed vertically into chart and locate intersection with design torsion. Interpolate between torsion curves (dashed lines) as needed.
- From intersection point turn 90° to left and read embedment length along vertical scale.
- Compute the required length of drilled shaft by adding 3'-0" to longer embedment length required for moment or torsion.

- ① ϕ = Angle of internal friction of soil (degrees)
- ② N = Texas cone penetrometer value (blows per ft)
- ④ C(psi) = Cohesive shear strength of soil (psi)
- ⑤ C(psf) = Cohesive shear strength of soil (psf)


③ SUBMERGED SAND SOIL (COHESIONLESS)

Moment _____
 Torsion


③ Note:
 For unsubmerged sands and clayey sands the charts for clay soil will give a conservative foundation design.

GENERAL NOTES:


These charts are for use with Cantilever Overhead Sign Supports with one shaft per tower.
 Solid curves are base moment in Kip-ft.
 Dash curves are base torsion in Kip-ft.
 Minimum embedment of drilled shaft is two diameters.
 Add 3'-0" to the required embedment length to determine the required length of drilled shaft.

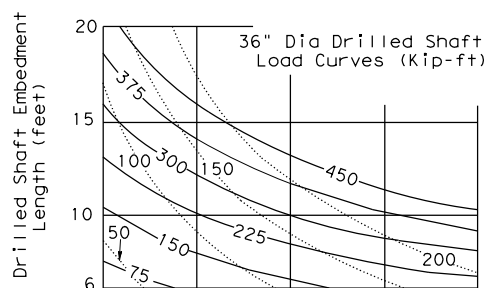


④	4	8	12	16	20
⑤	576	1152	1728	2304	2880
②	10	20	30	40	50

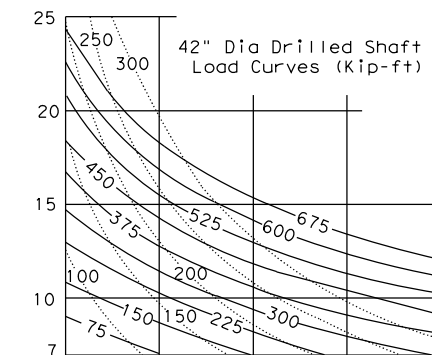

④	4	8	12	16	20
⑤	576	1152	1728	2304	2880
②	10	20	30	40	50

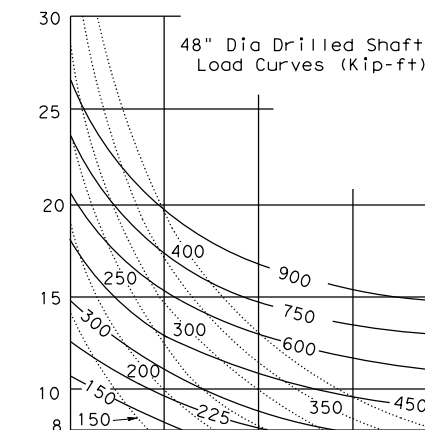

④	4	8	12	16	20
⑤	576	1152	1728	2304	2880
②	10	20	30	40	50

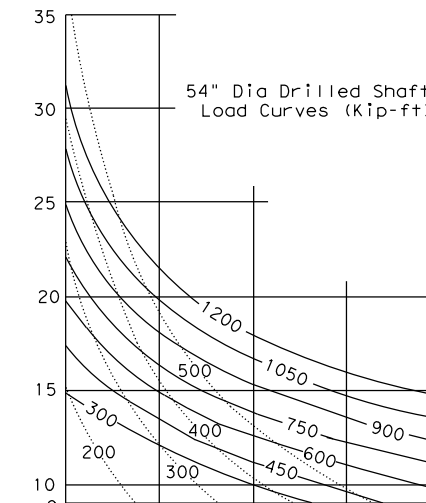

④	4	8	12	16	20
⑤	576	1152	1728	2304	2880
②	10	20	30	40	50

CLAY SOIL (COHESIVE)

Moment _____
 Torsion




FOUNDATION EMBEDMENT SELECTION CHARTS

COSS-FD

© TxDOT November 2007	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS	CONT	SECT	JOB	HIGHWAY
	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	75	

DATE: 8/11/2023 2:23:24 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2_Design Phase\CAD\standards\stds60.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

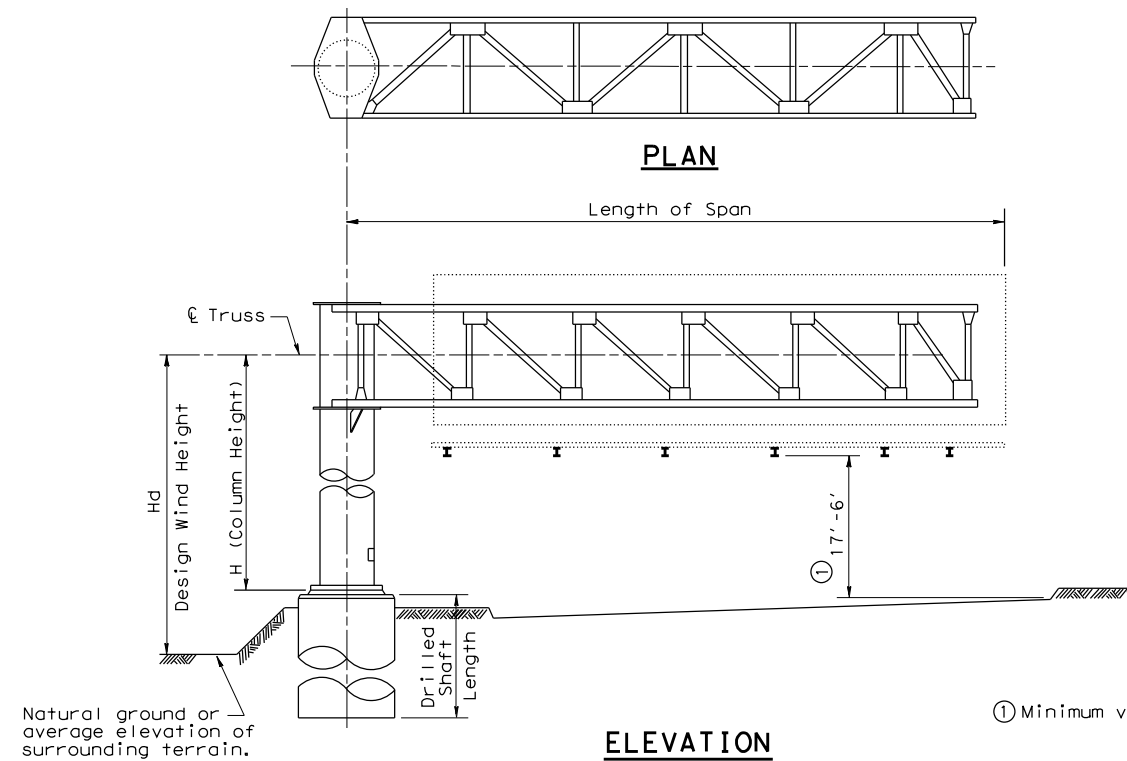


ELEVATION

SELECTION EXAMPLE CANTILEVER SPAN

- Given: Cantilever Span = 33'; Column Height, H = 23.3'; Design Wind Height, Hd = 27'; Avg. Penetrometer Value, N = 15 (clay type soil); Hill County
- Step 1: Select applicable COSS standard. From Wind Velocity and Ice Zone sheet (WV & IZ-96) determine that Hill County is in Zone 4 (70 mph) and is above the ice line. Since Design Wind Height is less than 30', use standard COSS-Z4 & Z4I. If Design Wind Height is more than 30', use COSS-Z3 & Z3I. NOTE: In Zone 1 if Design Wind Height is greater than 30' use HCOSS-Z1.
- Step 2: Determine tower details from COSS-Z4 & Z4I. Use column height to nearest tabulated value, i.e., 23'. Round span length up to the nearest tabulated value, i.e., 35'. Tower details are:
 Tower pipe 24" Dia with min. wall thickness = 0.312"
 Base plate 33 3/4" Dia x 1 3/4"
 Anchor bolts 8-1 3/4" Dia on 29 3/8" bolt circle
 Horizontal deflection of tower at C truss = 0.889". During installation, double nuts at base plate may be used to plumb tower to compensate for horizontal deflection.
 Design Moment = 244 Kip-ft
 Design Torsion = 162 Kip-ft
- Step 3: Determine truss details from COSS-Z4 & Z4I. Read from small table at bottom of sheet for span = 35'. Truss design width, W and depth, D = 4.0' x 4.0'.
 Chord L 3 x 3 x 5/16 (HYC) with 6 bolt connection at tower
 D.L. Diag. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W. L. Diag. L 3 x 3 x 3/16 (HYC) with 2 bolt connection
 D. L. Vert. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W. L. Strut. L 2 x 2 x 3/16 (HYC) with 1 bolt connection
 Bolts are 5/8" Dia high strength with 5-3/4" Dia bolt alternate for chord connection at tower.
 D.L. of truss = 50 lb/ft
 Truss deflection at free end = 3.2". The fabricator shall compensate for this deflection by offsetting bolt holes between the upper and lower chords at the truss-to-tower connection.
- Step 4: Determine foundation details. Use standard COSSF. From COSSF with 24" Dia pipe and 1 3/4" Dia anchor bolts:
 Anchor Bolts 1 3/4" Dia x 3'-10"
 Drilled Shaft Dia 42"
 Vertical Reinforcing 12 ~ #10 bars
 Spiral C = #4 at 6" pitch Grade 60.
 Misc. handhole, base plate, anchor bolt, and foundation details are shown on COSSF.
- Step 5: Determine drilled shaft length from COSS-FD. Enter the appropriate graph (for 42" Dia drilled shaft in clay soil) from the bottom with N = 15. Proceed upward interpolating moment curves (solid lines) to locate 244 Kip-ft. Project to the left side of the graph to determine the required embedment length, i.e., 12'. Repeat the procedure for torsion curves (dashed lines) to locate 162 Kip-ft. The embedment length required to satisfy torsion is 14'. Add 3'-0" to the longer length to obtain a required drilled shaft length of 17'.

① Minimum vertical clearance

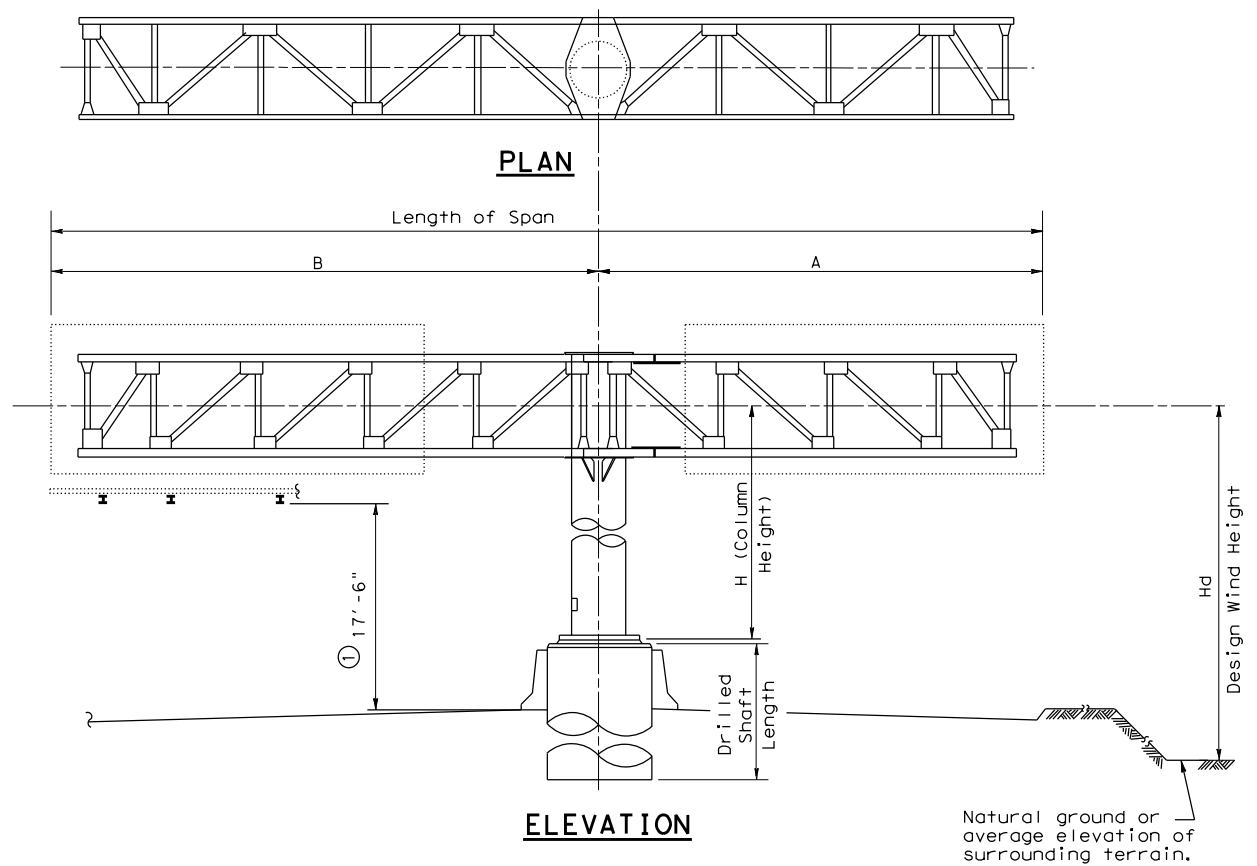

ELEVATION

SELECTION EXAMPLE DOUBLE CANTILEVER SPAN

- Given: Short span, A = 9'; Long Span, B = 25'; Total Cantilever Span = 34'; Column Height, H = 24'; Design Wind Height, Hd = 26'; Avg. Penetrometer Value, N = 20 (clay type soil); Wheeler County.
- Step 1: Select applicable COSS standard. From Wind Velocity and Ice Zone sheet determine that Wheeler County is in Zone 2 (90 mph) and is above the ice line. Since Design Wind Height is less than 30' use standard COSS-Z2I. If Design Wind Height is more than 30', use HCOSS-Z1.
- Step 2: Determine tower details from COSS-Z2I. Use column height = 24'. Round total span length up to the next longer tabulated length span, i.e., 35'. If total span length is greater than 40', a special design would be required. Tower details are:
 Tower pipe 30" Dia with min. wall thickness = 0.310"
 Base Plate 40 1/2" Dia x 1 3/4"
 Anchor bolts 8 ~ 2" Dia on 35 3/4" bolt circle
 Horizontal deflection of tower at C truss = 0.574-0.316 = 0.26". During installation, double nuts at base plate may be used to plumb tower and compensate for horizontal deflection.
 Design Moment = 403 Kip-ft (use total span = 35')
 Design Torsion = 136 Kip-ft (use long span = 25')
- Step 3: Determine truss details from COSS-Z2I. Read from small table at bottom of sheet 2 of 2 for Span A = 9' (use 10'):
 Chord L 3 x 3 x 3/16 (HYC) with 3 bolt connection at splice
 D.L. Diag. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W.L. Diag. L 3 x 3 x 3/16 (HYC) with 2 bolt connection
 D.L. Vert. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W.L. Strut. L 2 x 2 x 3/16 (HYC) with 1 bolt connection
 Bolts are 5/8" Dia high strength.
 D.L. of truss = 42 lb/ft.
 Span B = 25':
 Chord L 3 x 3 x 1/4 (HYC) with 4 bolt connection at tower
 D.L. Diag. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W.L. Diag. L 3 x 3 x 3/16 (HYC) with 2 bolt connection
 D.L. Vert. L 2 x 2 x 3/16 (HYC) with 2 bolt connection
 W.L. Strut. L 2 x 2 x 3/16 (HYC) with 1 bolt connection
 Bolts are 5/8" Dia high strength with 3 ~ 3/4" Dia bolt alternate for chord connection at tower.
 D.L. of truss = 47 lb/ft.
 Truss defl. at free end = 0.2" for Span A, = 1.3" for Span B. The fabricator shall compensate for deflections by offsetting bolt holes between upper and lower chords at splice and at truss-to-tower connection. Top chord shall be shortened between the tower and the splice to achieve the required offset.
- Step 4: Determine foundation details. Use standard COSSF. From COSSF with 30" Dia pipe and 2" Dia anchor bolts:
 Anchor bolts 2" Dia x 4'-3"
 Drilled shaft Dia 54"
 Vertical Reinforcing 18 ~ #10 bars
 Spiral C = #4 at 6" pitch Grade 60
 Misc. handhole, base plate, anchor bolt, and foundation details are shown on COSSF.
- Step 5: Determine drilled shaft length from COSS-FD. Enter the appropriate graph (for 54" Dia drilled shaft in clay type soil) from the bottom with N = 20. Proceed upward interpolating moment curves (solid lines) to locate 403 Kip-ft. Project to the left side of graph to determine required embedment length, i.e., 13'. Repeat the procedure for the torsion curves (dashed lines) to locate 136 Kip-ft. Embedment length required to satisfy torsion is 9'. Add 3' to the longer length to obtain required drilled shaft length of 16'.



CANTILEVER OVERHEAD SIGN SUPPORTS SELECTION EXAMPLES

COSS-SE


© TxDOT November 2007		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS		CONT	SECT	JOB	HIGHWAY
		0904	00	220	VARIOUS
		DIST	COUNTY		SHEET NO.
		AMA	POTTER		76

COSS STRUCTURES


	STRUCTURE NO. AND STATION	DMS (VARIOUS)					
TRUSS DETAILS	DESIGN WIND HEIGHT, Hd (feet)	35' (TOTAL); 20' (CANT.)					
	LENGTH OF SPAN (feet)	35' (TOTAL); 20' (CANT.)					
	W x D & SIZE HS BOLTS	4.5" x 4.5" w/ 5/8" Dia HS Bolts	x w/ "	Dia HS Bolts	x w/ "	Dia HS Bolts	
	LENGTH OF TRUSS PANELS	End = 2.5' (2)	Other = 365' (2)	End =	Other =	End =	Other =
	CHORD	L3 X 3 X 3/16 (3)					
	DEAD LOAD DIAGONAL	L2 X 2 X 3/16 (2)					
	WIND LOAD DIAGONAL	L3 X 3 X 3/16 (3)					
	DEAD LOAD VERTICAL	L2 X 2 X 3/16 (2)					
	WIND LOAD STRUT	L2 X 2 X 3/16 (2)					
	TRUSS DL & DEFL	DL =	42 lb/ft, Δv = 0.9"	DL =	lb/ft, Δv = "	DL =	lb/ft, Δv = "
TOWER DETAILS	TOWER HEIGHT AT TRUSS CL (feet)	30'					
	TOWER PIPE DIA & WALL THICKNESS	Dia = 30" Thick = 0.375"		Dia =	Thick =		
	TOWER PIPE ΔH AT CL TRUSS	= ∅ (+0.635-0.635)					
	NO. & SIZE OF ANCHOR BOLTS	8 W/ 2 1/4"					
	ANCHOR BOLT CIRCLE DIA	36"					
DESIGN LOADS	SHEAR (Kips)	9.76					
	TORSION (Kip-ft)	87.07					
	MOMENT (Kip-ft)	501.47 (TOTAL - 35' SPAN)					
FOUNDATION	SOIL (Sand or Clay) & "N"	N/A w/ "N" = N/A		w/ "N" =	w/ "N" =		
	SIZE & LENGTH OF DR SHAFT	54" DIA X 21' L					
	MAIN SHAFT STEEL	14 ~ #11 BARS					
	SHAFT SPIRAL REINFORCING	#4 PS AT 3 1/2" PITCH 46 ∅					

OSB STRUCTURES

	STRUCTURE NO. AND STATION	DMS (VARIOUS)				
TRUSS	DESIGN WIND HEIGHT, Hd (feet)					
	LENGTH OF SPAN (feet)					
	W x D & SIZE HS BOLTS	x w/ "	Dia HS Bolts	x w/ "	Dia HS Bolts	
	LENGTH OF TRUSS PANELS	5.0' w/ Center Panel(s) at	5.0' w/ Center Panel(s) at	5.0' w/ Center Panel(s) at	5.0' w/ Center Panel(s) at	
	CHORD					
	DEAD LOAD DIAGONAL					
	WIND LOAD DIAGONAL					
	DEAD LOAD VERTICAL					
	WIND LOAD STRUT					
	TRUSS DL & DEFL	DL =	lb/ft, Δ = "	DL =	lb/ft, Δ = "	DL =
TOWERS	COLUMN SPACING	LEFT TOWER	RIGHT TOWER	LEFT TOWER	RIGHT TOWER	
	TOWER HEIGHT (feet)	H _L =	H _R =	H _L =	H _R =	
	COLUMN SIZE	W x	W x	W x	W x	
	ANCHOR BOLTS					
	BASE PLATE					
	TOWER DIAGONALS					
	TOWER STRUTS					
	TOWER UPLIFT (Kips)					
	DRILLED SHAFTS					
	MAXIMUM BRACING SPACING, "S"					
SOIL N (BLOWS PER FT.)						

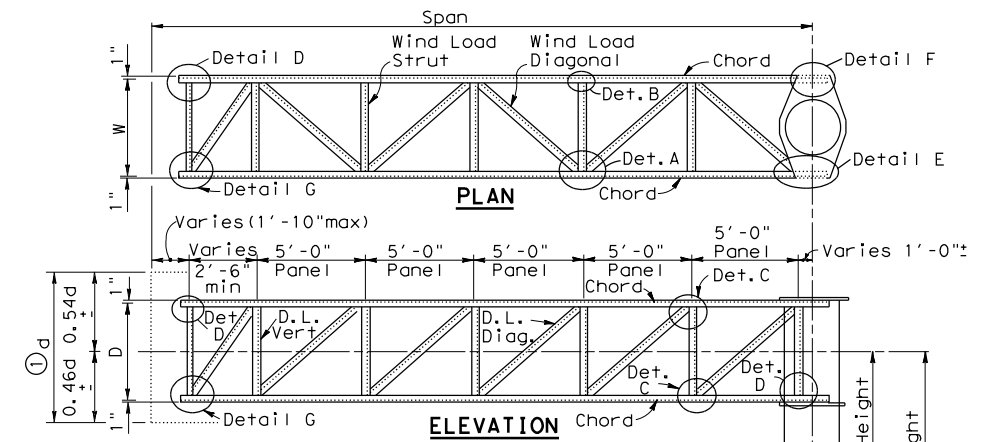

- ① d = Sign Depth
Where signs of different depths are used, the bottom edges of all signs may be placed in line. Where this is done, all signs should be so positioned that the bottom edges are approximately 0.46 of the depth of the deepest sign below the CL of the truss.
- ② "Low-Alloy Steel" for non-bridge structures per Item 442, "Metal For Structures".
- ③ "Carbon Steel" for non-bridge structures per Item 442, "Metal For Structures".

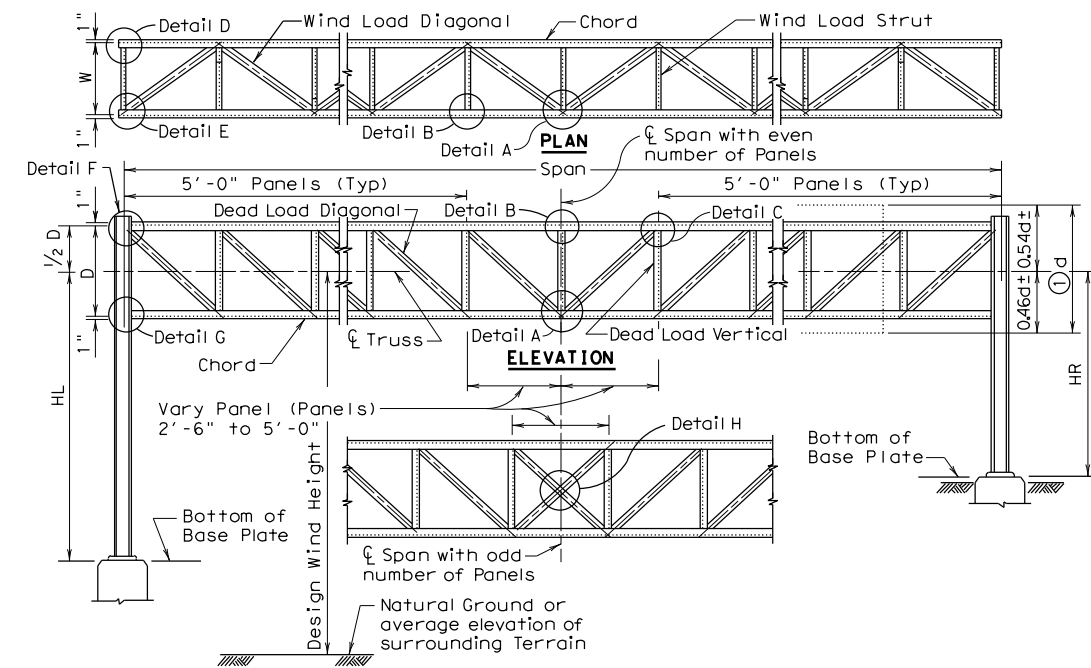

GENERAL NOTES

1. Use tower details, truss details, truss to tower connection, and foundation details, shown on standard drawings OSBT, OSBC, COSSD, and COSSF.
2. Dimensions and connections, should be determined, using member size or combination of members shown on this sheet.
3. Number of high strength bolts required in truss connection or splice are indicated in brackets, e.g. [3], after the member size.
4. Design of truss includes 3 pounds per square foot for sign panel, 20 pounds per foot for lights, and 50 pounds per foot for walkway, all placed as specified for the design sign panel.

NOTES ON USAGE

1. This sheet shall only be included in the PS&E package when the COSS and/or OSB standards are not sufficient to define the COSS or OSB design and details.
2. These sheets should not be included in the PS&E package if no design data is included hereon.
3. If included in the contract plans this sheet must contain "(MOD)" after the designation and must be sealed by a Texas P.E.



				Texas Department of Transportation Traffic Safety Division Standard	
OVERHEAD SIGN BRIDGE DETAILS					
COSS & OSB-SZ-21 (MOD)					
FILE:	COSS-osb-sz-21.dgn	DN:	CK:	DW:	CK:
© TxDOT	November 2007	CONT	SECT	JOB	HIGHWAY
8-21	REVISIONS	0904	00	220	VARIOUS
		DIST	COUNTY	SHEET NO.	
		AMA	POTTER	77	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard for any purpose other than that for which it was developed.

DATE: 8/1/2023 2:23:25 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\01509-0027-12.dgn

DATE: 8/1/2023 2:23:26 PM
 FILE: K:\01509\01509-0027-12 TXDOT WA 12 AMA PS&E IH 40 ITS2 Design Phase of ADSS of 01509-0027-12.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES		
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	SINGLE		DOUBLE			
SHEETING	Yellow, White or Red Type B or C reflective sheeting				Yellow, White or Red Type B or C Reflective Sheeting				INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX (XX) NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRF = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back	
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (flx). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE	WC	YFLX, WFLX	WC		YFLX, WFLX
					MOUNT TYPE	GND	GND, SRF	GND		GND, SRF

OBJECT MARKERS								D & OM DESCRIPTIVE CODES	
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4	
SHEETING	Yellow-Type B _{FL} or C _{FL} Sheeting		Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			Red -Type B _{FL} or C _{FL} Sheeting
POST TYPE	TWT		WC	WC	WFLX	TWT			TWT
MOUNT TYPE	WAS, WAP		GND	GND	GND, SRF	WAS, WAP			WAS, WAP
									INSTL OM ASSM (OM-XX) (XXXX)XXX (XX) TYPE OF OBJECT MARKER 1, 2, 3, or 4 NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector unit (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION If Required BI = Bi-Directional

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.		
DEVICE	GF1	GF2	CTB	W1-8				W1-6			
SHEETING	Yellow, White, Red			SIZE (W x L)	18" x 24" (Conventional)	24" x 30" (Conventional Oversize)	30" x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)	48" x 24" (Conventional)	60" x 30" (Expressway & Freeway)
NOTE	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			MOUNTING HEIGHT	4'-0" or 7'-0"		7'-0" Only	MOUNTING HEIGHT	7'-0"		
				NOTE	1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						

Texas Department of Transportation
 Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION









D & OM(1)-20

FILE: dom1-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	AMA	POTTER	78	

20A


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:26 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase 01.dwg

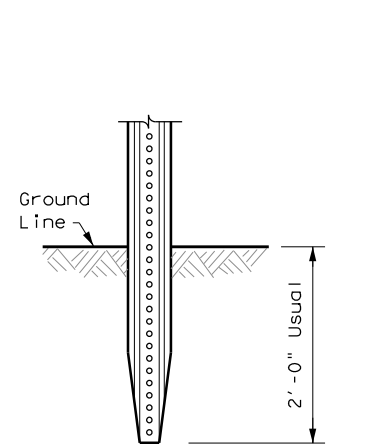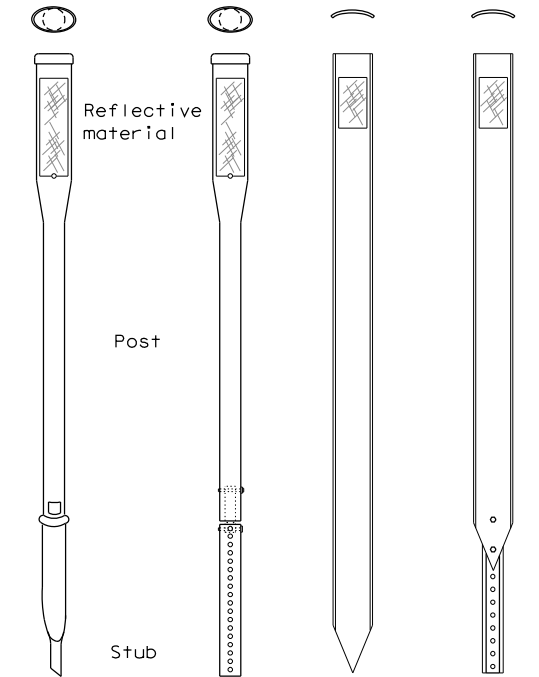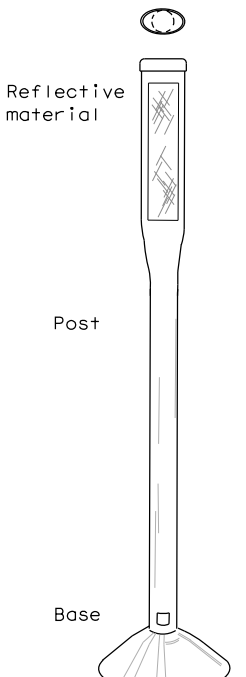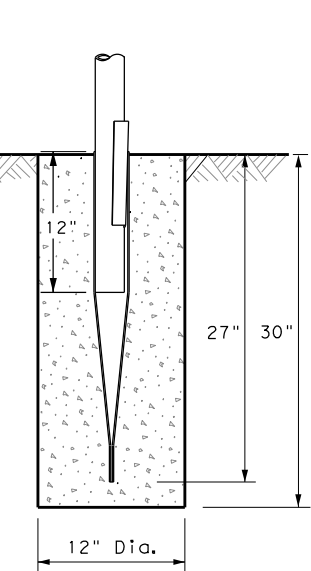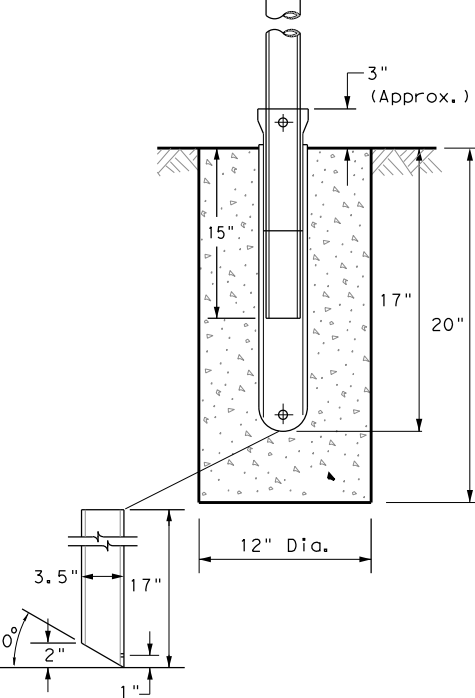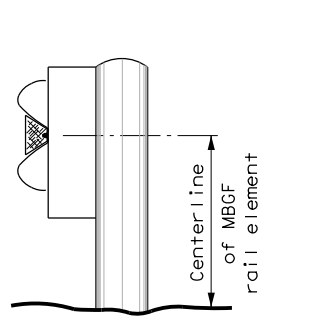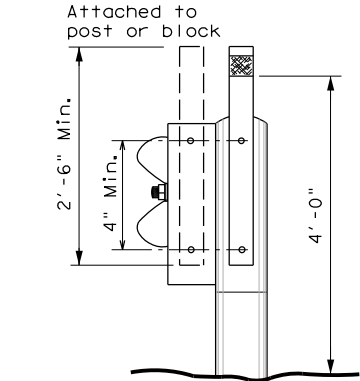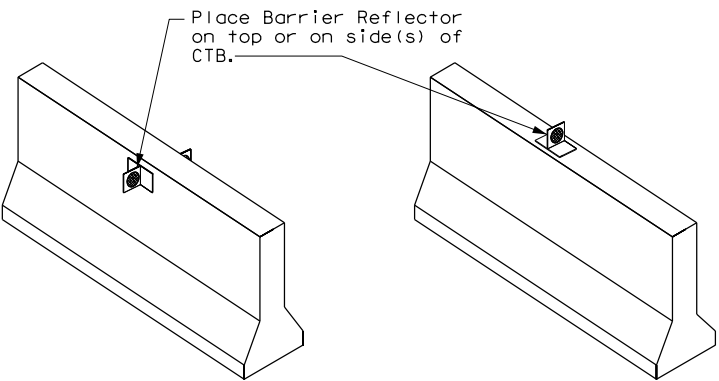POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS			
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT		
GND	GND	SRF	WAS	WAP	GF 1		
 <p style="text-align: center;">2'-0" Usual</p>	 <p style="text-align: center;">Reflective material</p> <p style="text-align: center;">Post</p> <p style="text-align: center;">Stub</p>	 <p style="text-align: center;">Reflective material</p> <p style="text-align: center;">Post</p> <p style="text-align: center;">Base</p>	 <p style="text-align: center;">12" Dia.</p> <p style="text-align: center;">27" 30"</p>	 <p style="text-align: center;">3" (Approx.)</p> <p style="text-align: center;">15"</p> <p style="text-align: center;">17" 20"</p> <p style="text-align: center;">12" Dia.</p> <p style="text-align: center;">3.5"</p> <p style="text-align: center;">17"</p> <p style="text-align: center;">1"</p> <p style="text-align: center;">30°</p>	 <p style="text-align: center;">Centerline of MBCF rail element</p>	 <p style="text-align: center;">Attached to post or block</p> <p style="text-align: center;">2'-6" Min.</p> <p style="text-align: center;">4" Min.</p> <p style="text-align: center;">4'-0"</p>	
	EMBEDDED		SURFACE MOUNT		STEEL		
NOTES 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.		NOTES 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.		NOTE 1. Install per manufacturer's recommendations.		CONCRETE TRAFFIC BARRIER (CTB)  <p style="text-align: center;">Place Barrier Reflector on top or on side(s) of CTB.</p>	

- GENERAL NOTES**
- Place delineators on a section of roadway at a consistent distance from the edge of pavement.
 - Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
 - When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
 - Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
 - Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
 - Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.

TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS

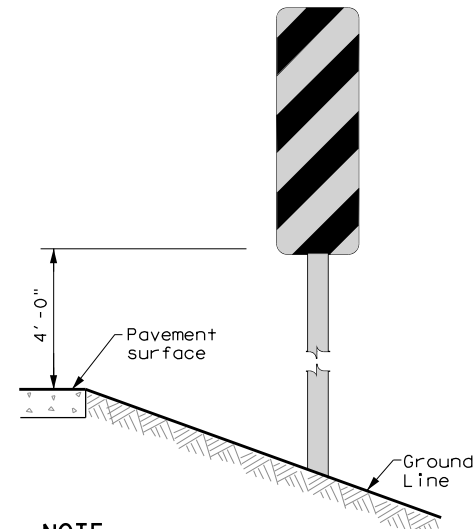


4'-0"

Pavement surface

Ground Line

NOTE
 Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)

CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN

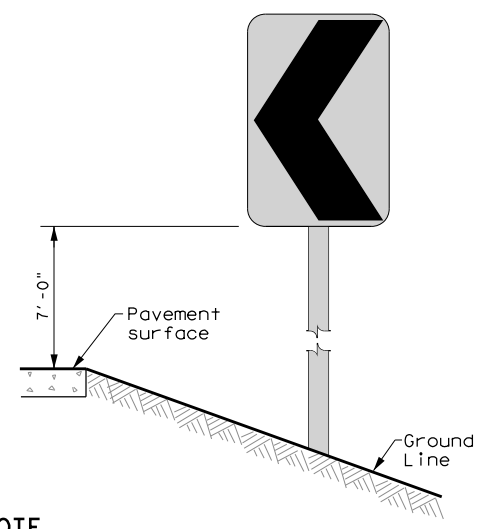


7'-0"

Pavement surface

Ground Line

NOTE
 Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.

DELINEATORS AND TYPE 2 OBJECT MARKERS

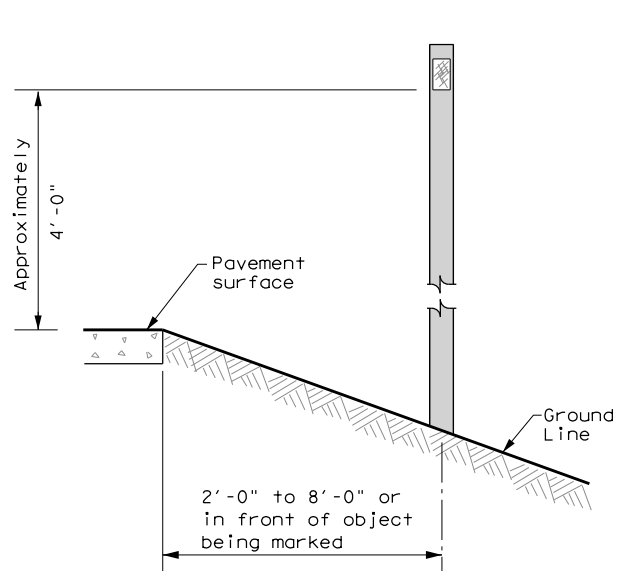


Approximately 4'-0"

Pavement surface

Ground Line

2'-0" to 8'-0" or in front of object being marked

See general notes 1, 2 and 3.



Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER INSTALLATION

D & OM(2)-20

FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	AMA	POTTER	79	

20B


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:23:32 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\01509-0027-12.dwg

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	● RPMs	● RPMs
15 MPH & 20 MPH	● RPMs and One Direction Large Arrow sign	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	● RPMs and Chevrons


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

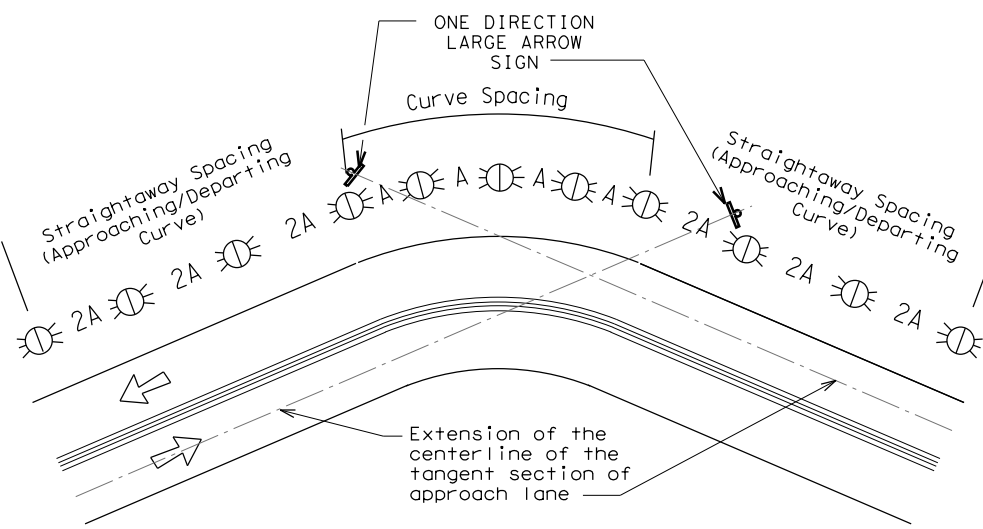

NOTE

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

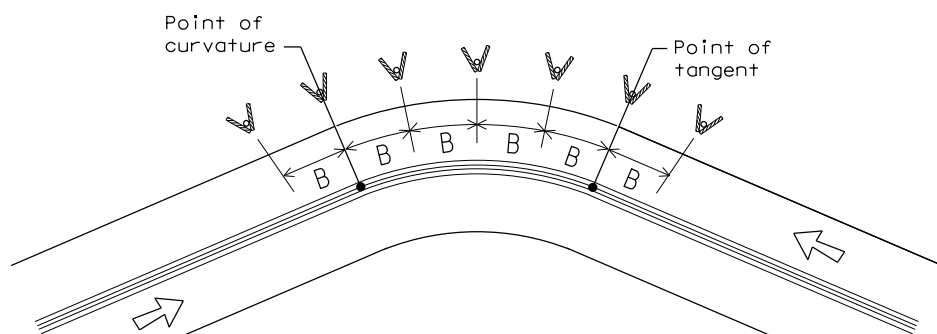

NOTE

At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Traffic Safety Division Standard


DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(3)-20

FILE: dom3-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS		0904 00	220	VARIOUS
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	AMA	POTTER	80	

20C


**TWO-WAY, TWO LANE ROADWAY
WITH REDUCED WIDTH APPROACH RAIL**

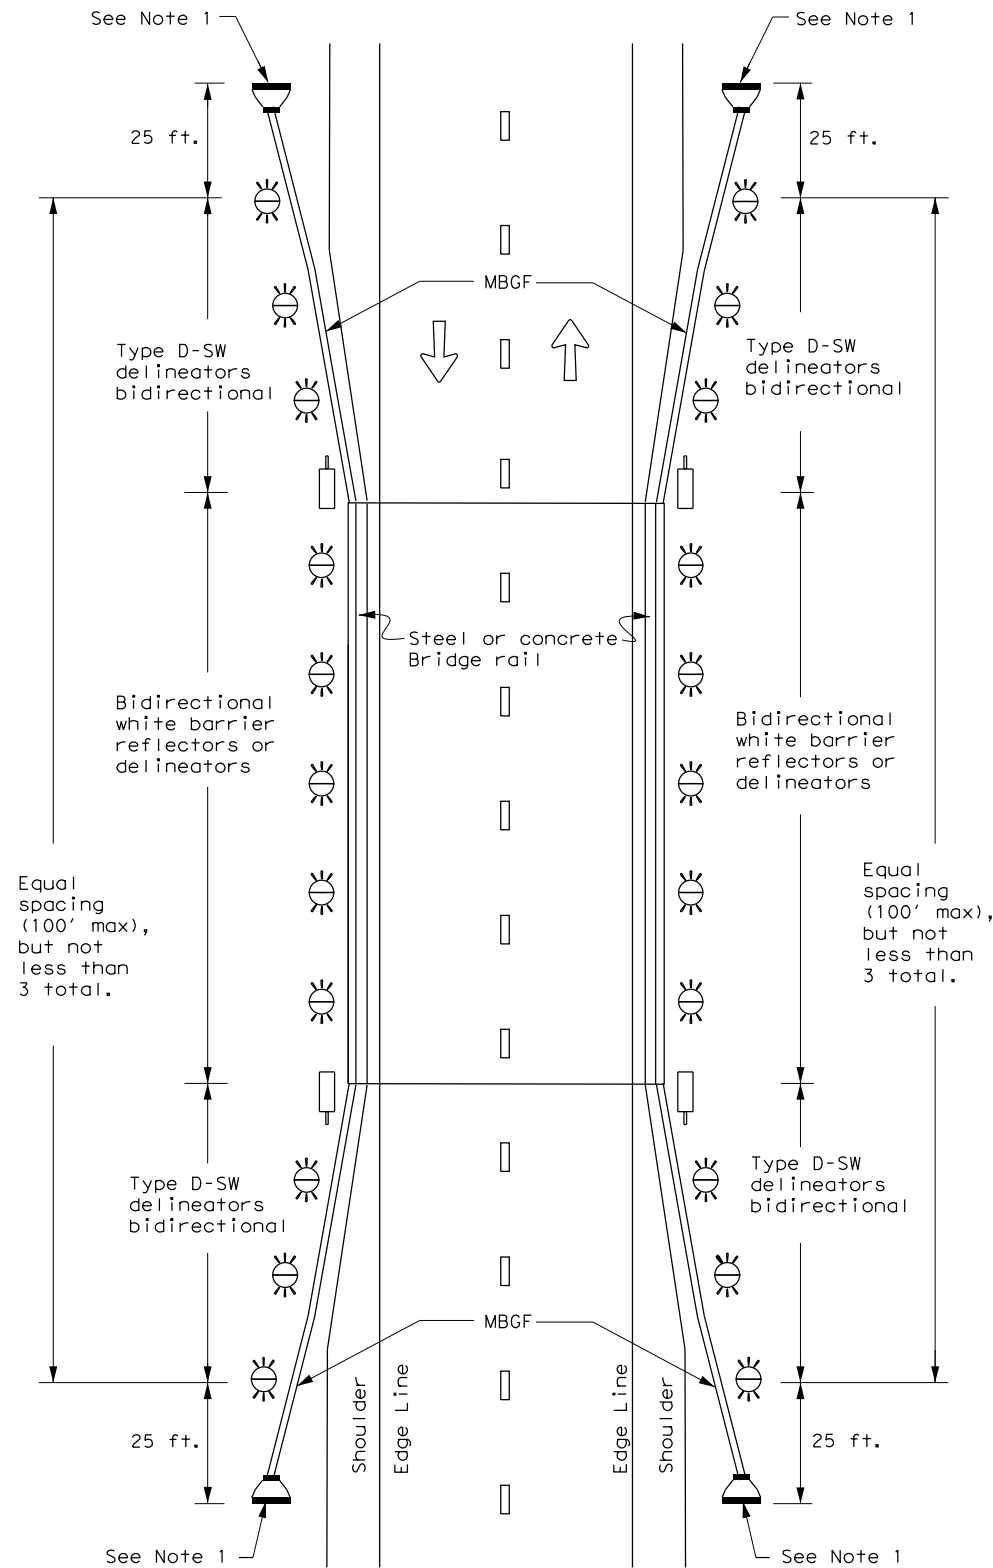

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY
WITH METAL BEAM GUARD FENCE (MBGF)**

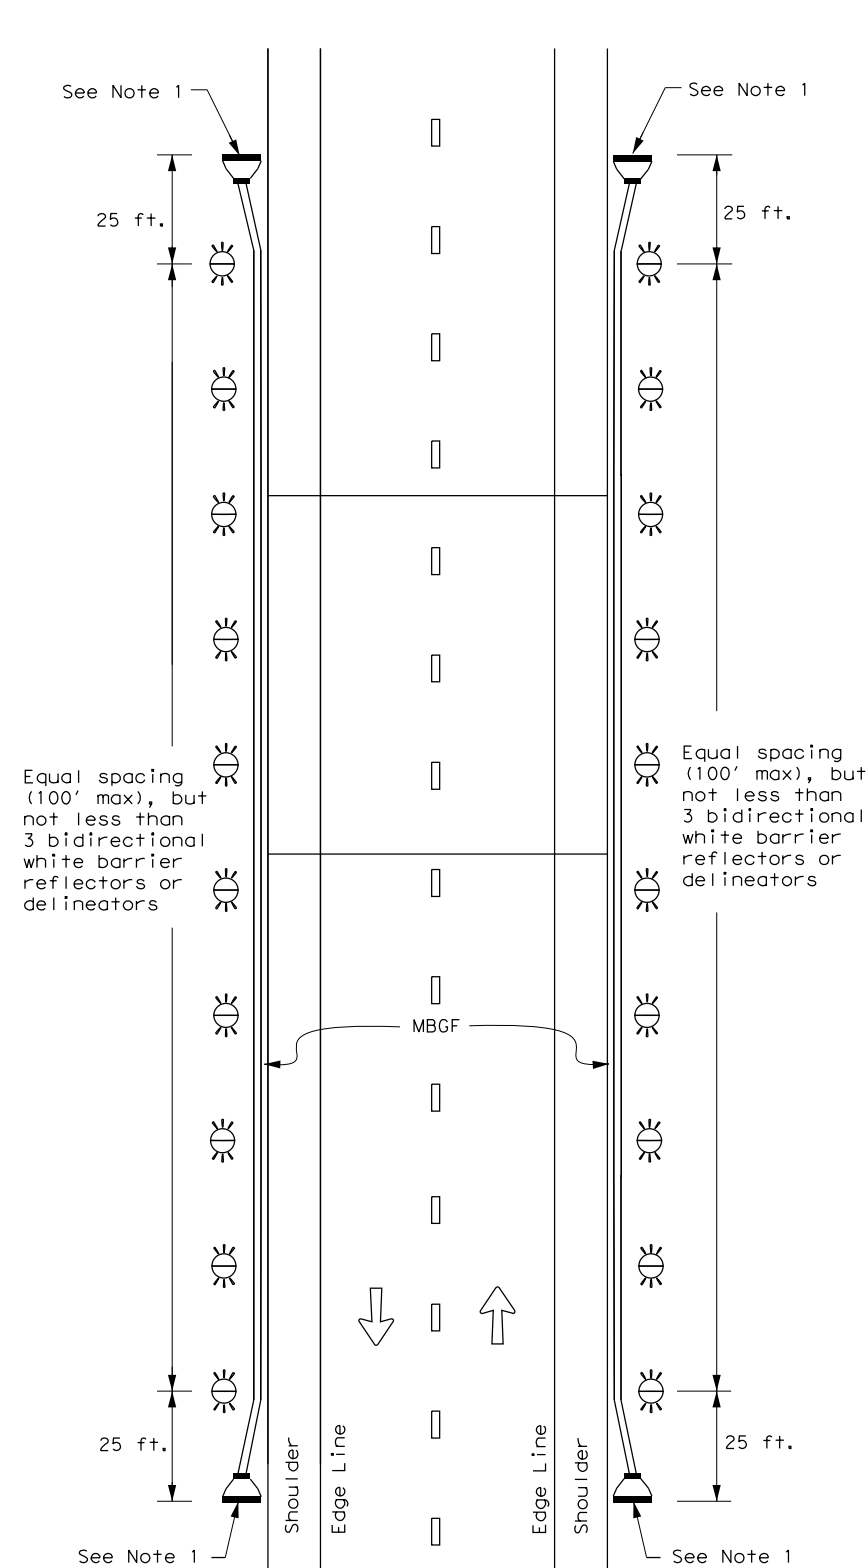

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY
BRIDGE WITH NO APPROACH RAIL**

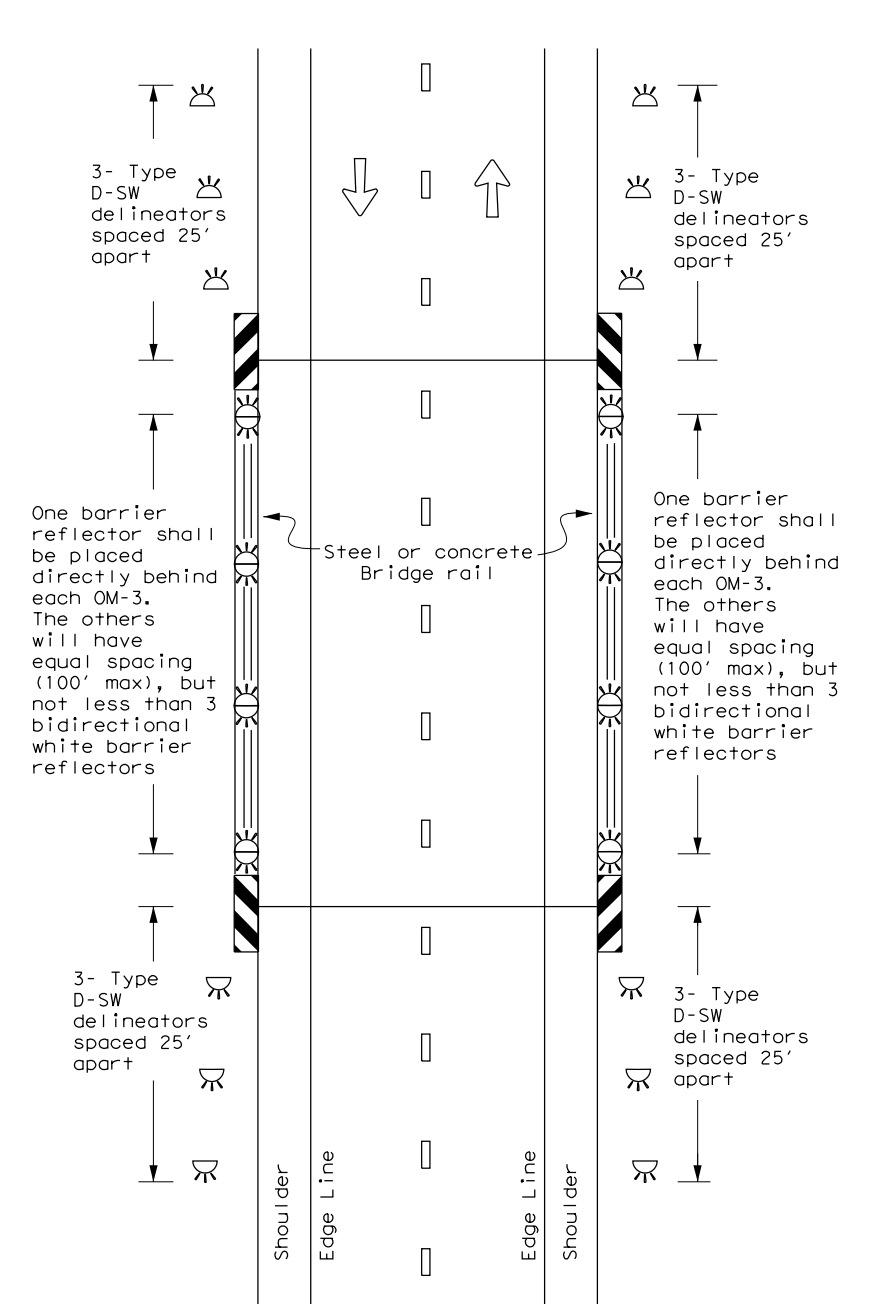

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow



Traffic Safety Division Standard

**DELINEATOR &
OBJECT MARKER
PLACEMENT DETAILS**

D & OM(5) - 20


FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CON: 0904	SECT: 00	JOB: 220	HIGHWAY: VARIOUS
7-20	DIST: AMA	COUNTY: POTTER	SHEET NO. 81	

DATE: 8/1/2023 2:23:32 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\ADMS\01509-0027-12.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any drawings or for incorrect results or damages resulting from its use.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:23:33 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\01509-0027-12.dwg


CONTINUOUS CONCRETE OR STEEL BARRIER

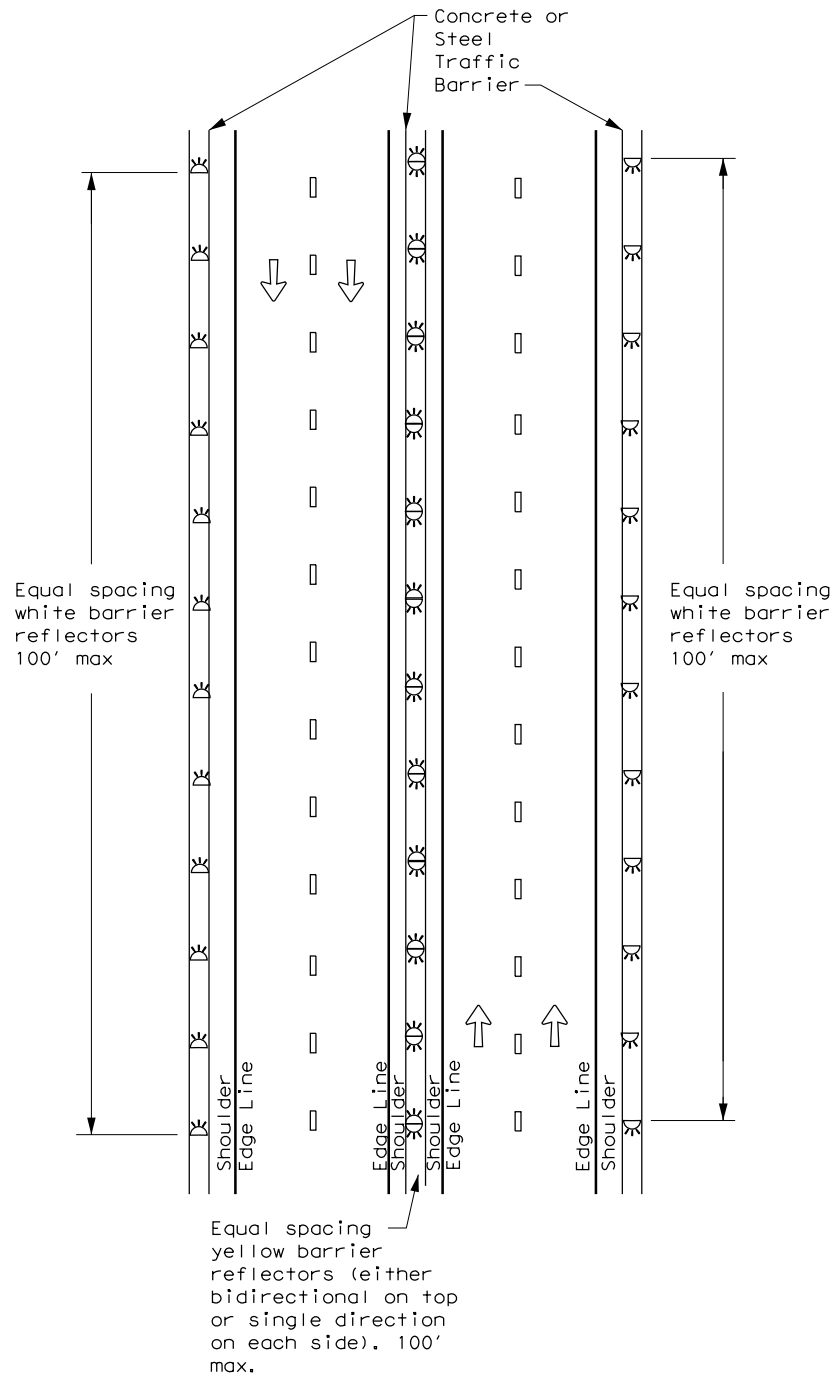


MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

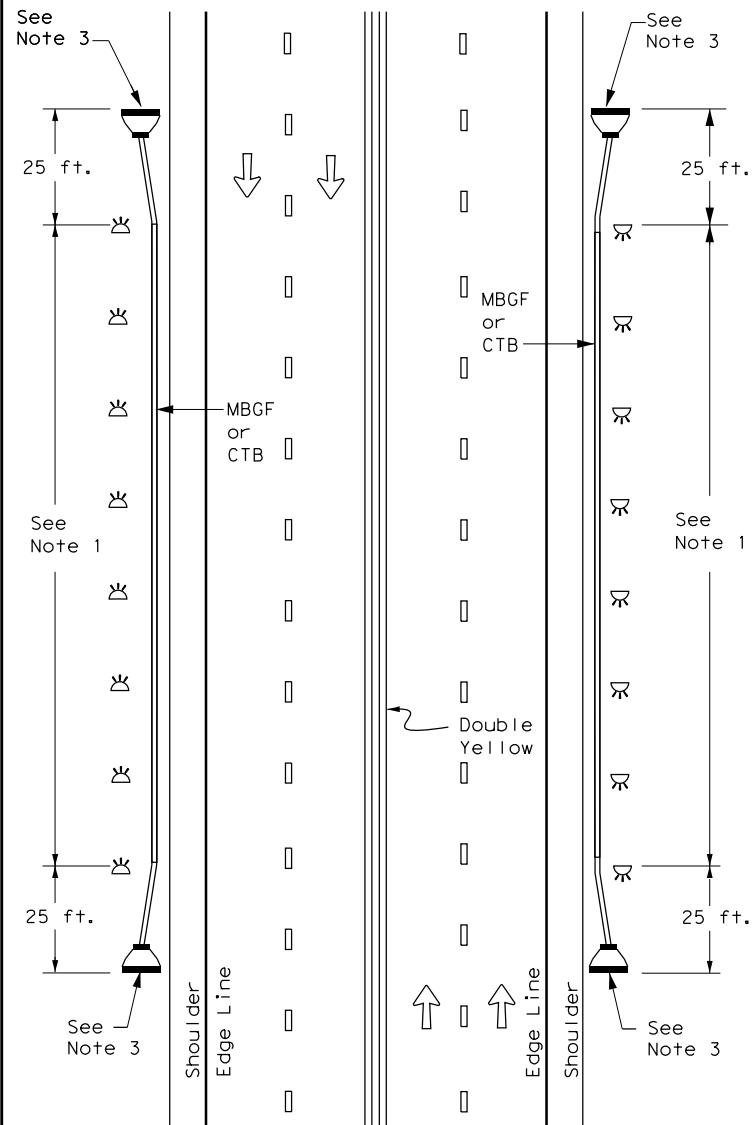

DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

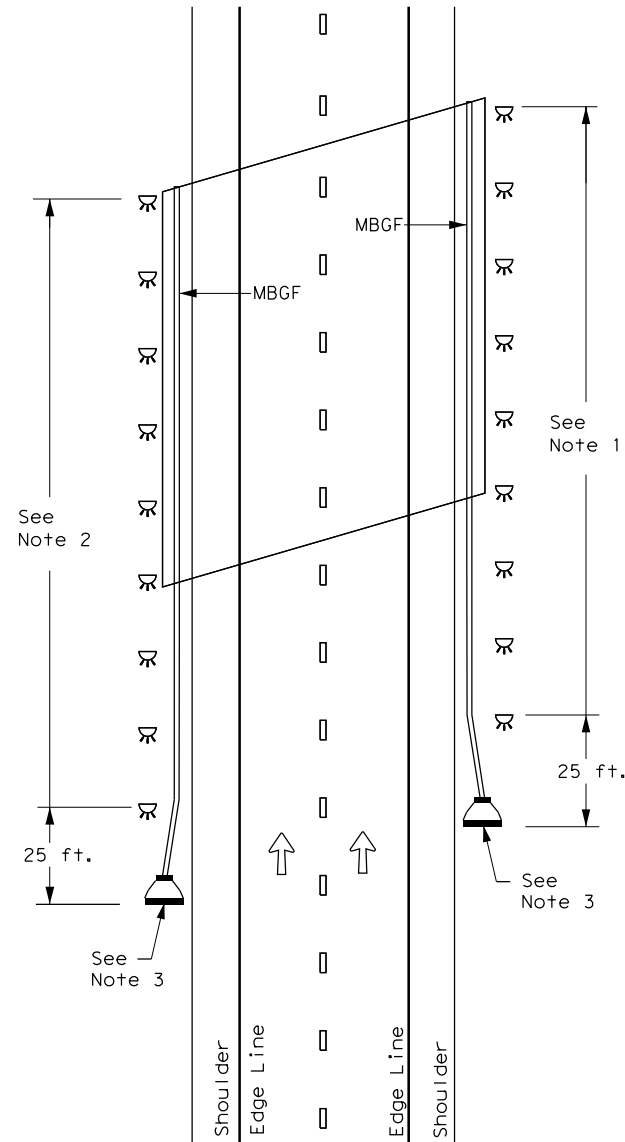

EMERGENCY CROSSOVER

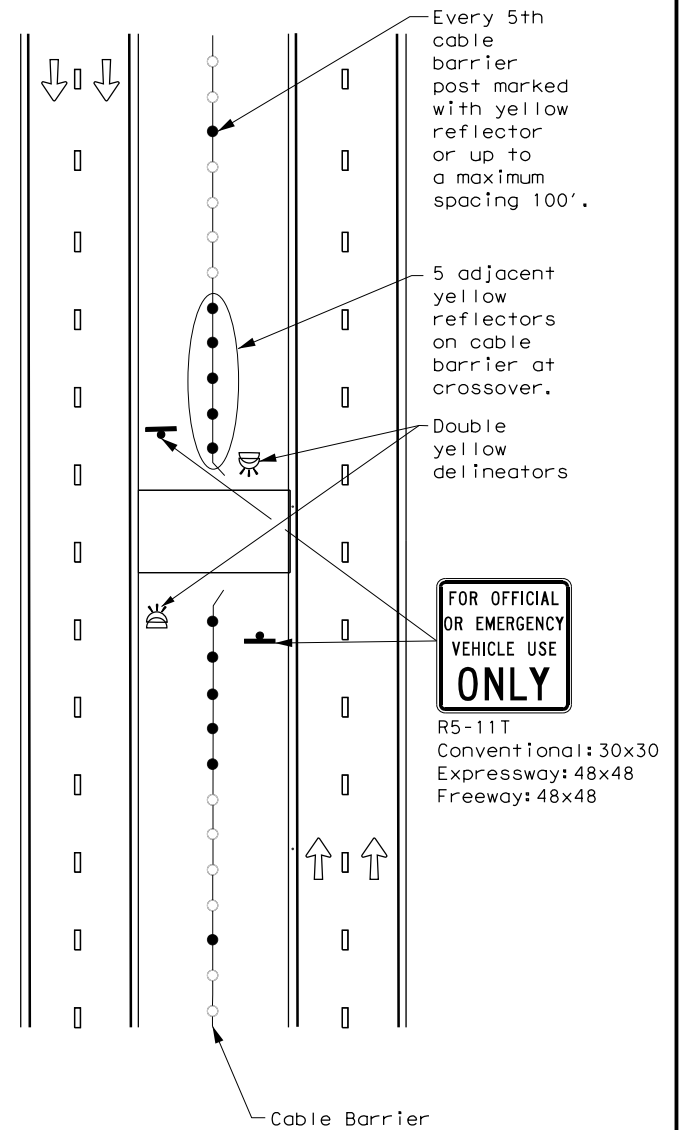

NOTES

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow










DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(6) - 20


FILE: dom6-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
7-20	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	82	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:34 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\01509-0027-12\01509-0027-12.dgn

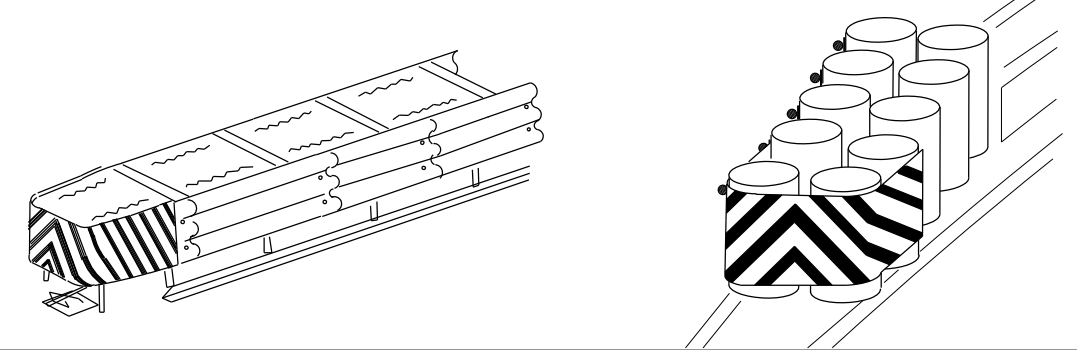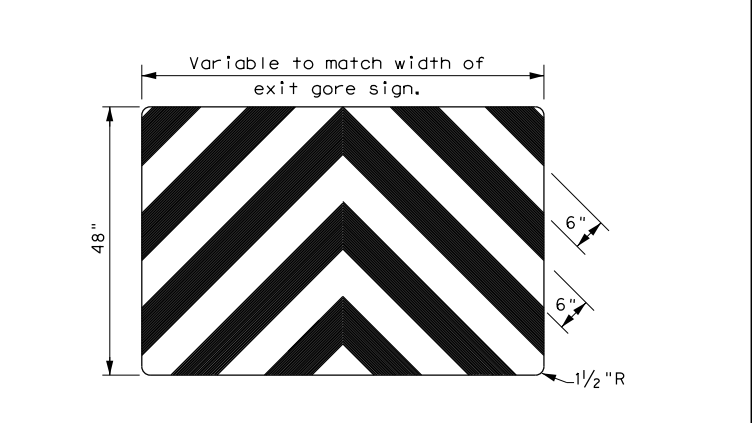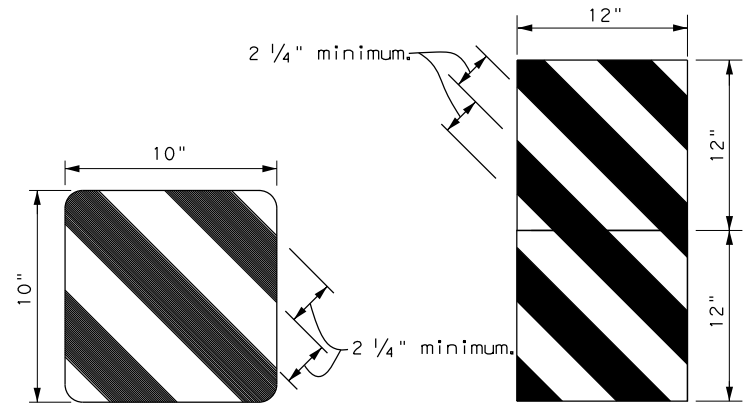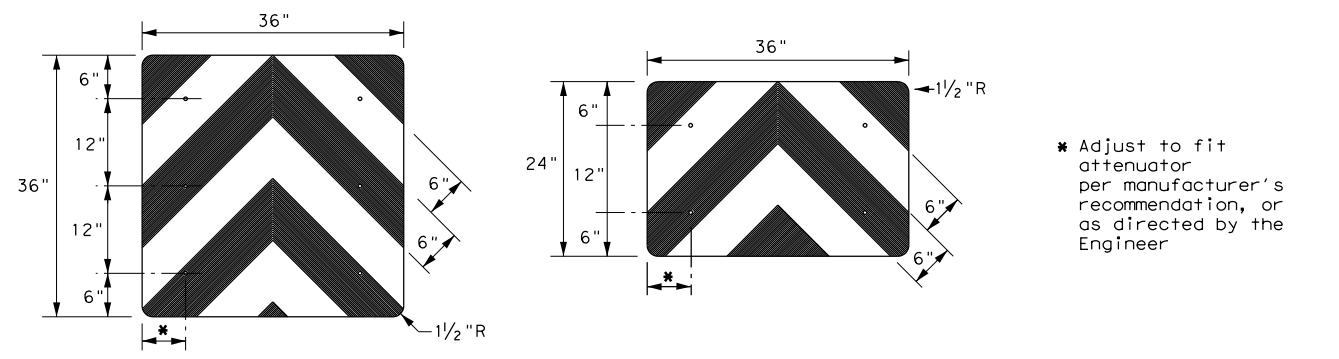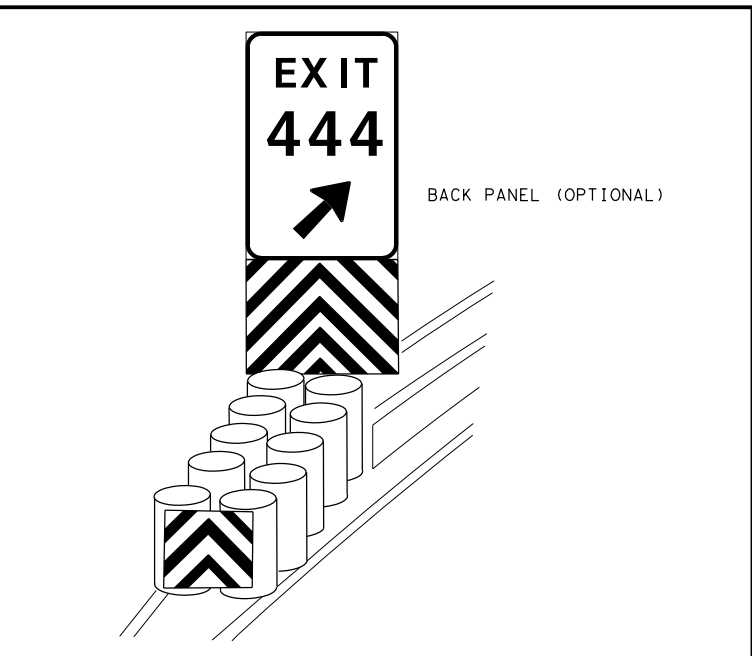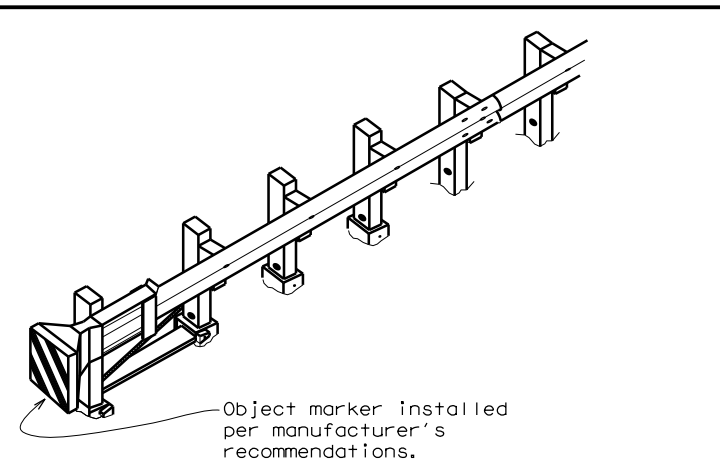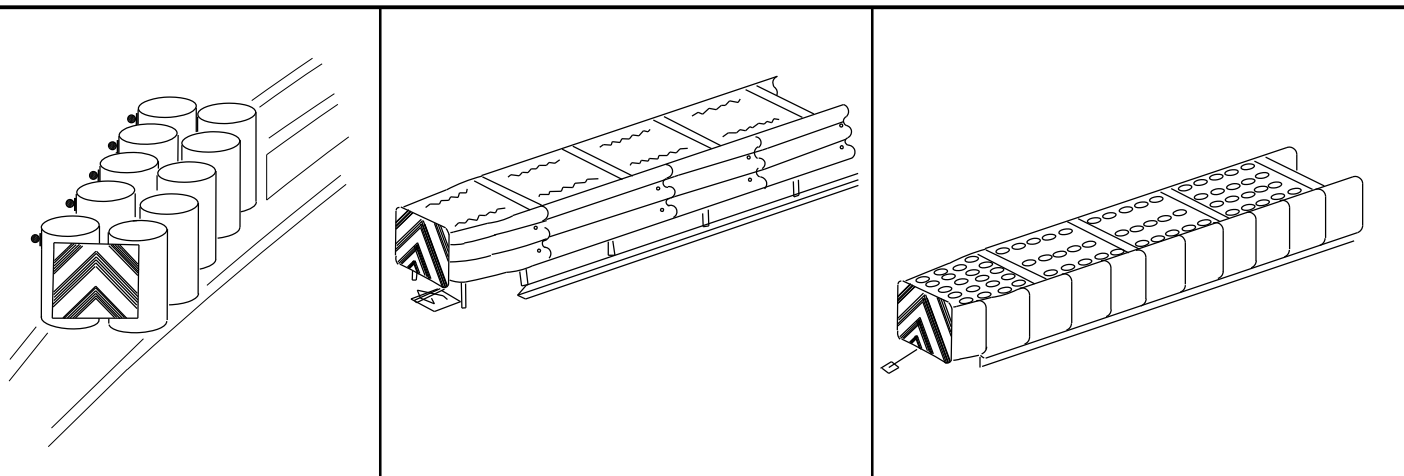

OBJECT MARKERS SMALLER THAN 3 FT²

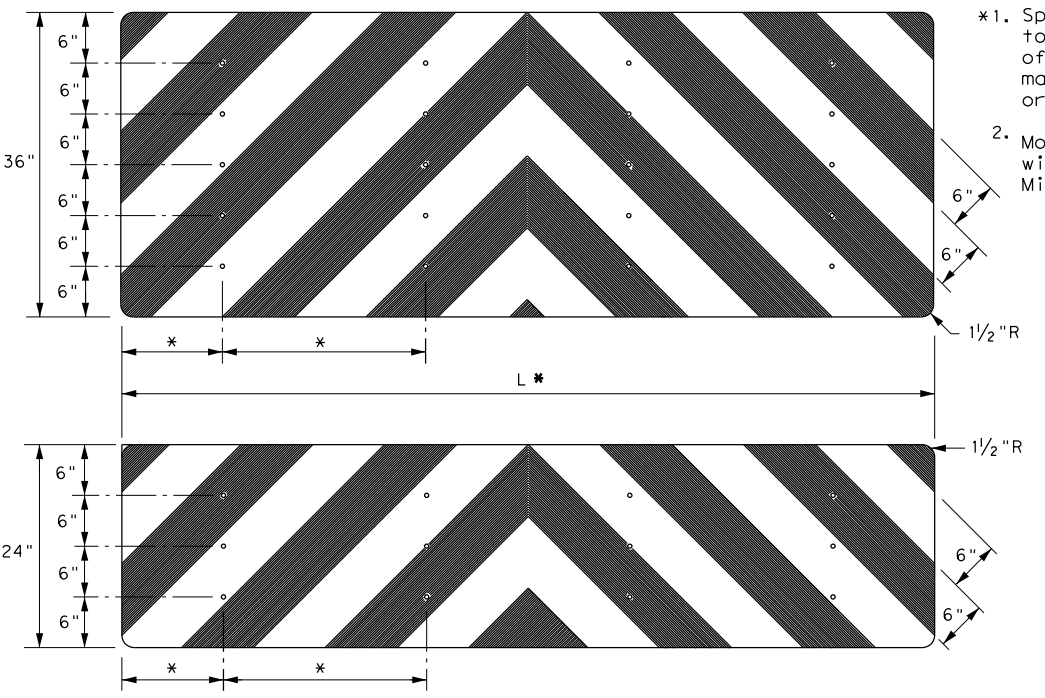

- NOTES**
- Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
 - Mounting should be flush with top of attenuator. Minimum size 96" x 24".


NOTES

- Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
- Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
- Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
- Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
- Object Marker at nose of attenuator is subsidiary to the attenuator.
- See D & OM (1-4) for required barrier reflectors.


DELINEATOR & OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS D & OM(VIA) - 20			
FILE: domvia20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT December 1989	CONT	SECT	JOB
REVISIONS		0904 00	220
4-92 8-04	DIST	COUNTY	SHEET NO.
8-95 3-15	AMA	POTTER	83
4-98 7-20			
20G			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:23:34 PM
 FILE: K:\01509\01509-002T-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\01509-002T-12.dgn

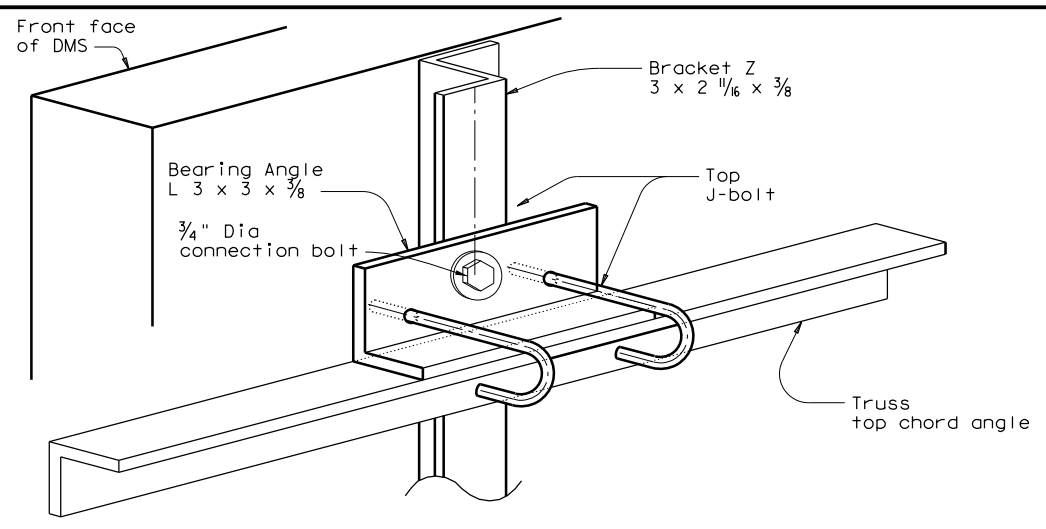


Attachment at Top Chord
 (Showing Chord Angle 3")

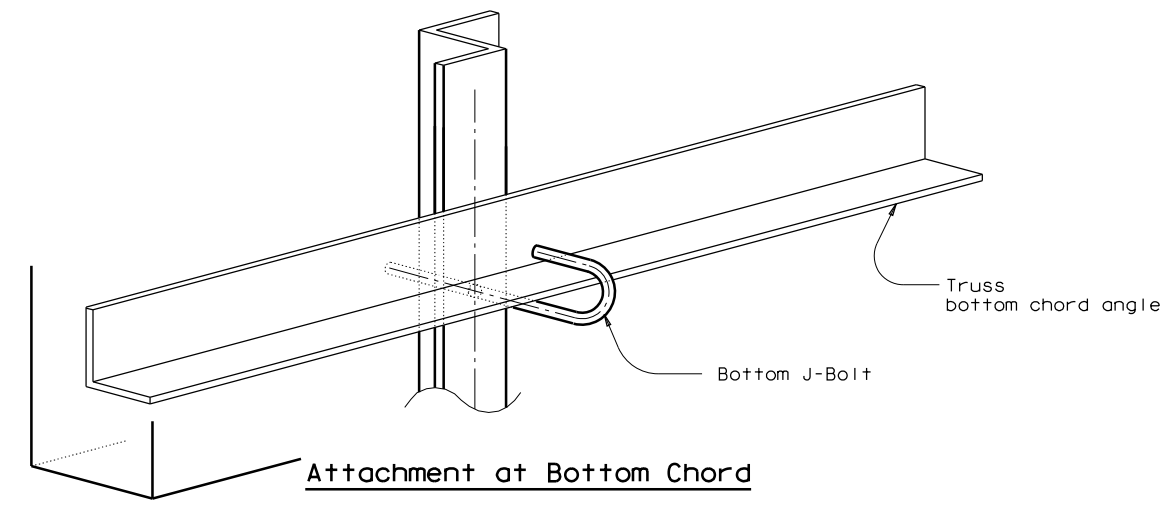

Attachment at Bottom Chord
ISOMETRIC VIEW

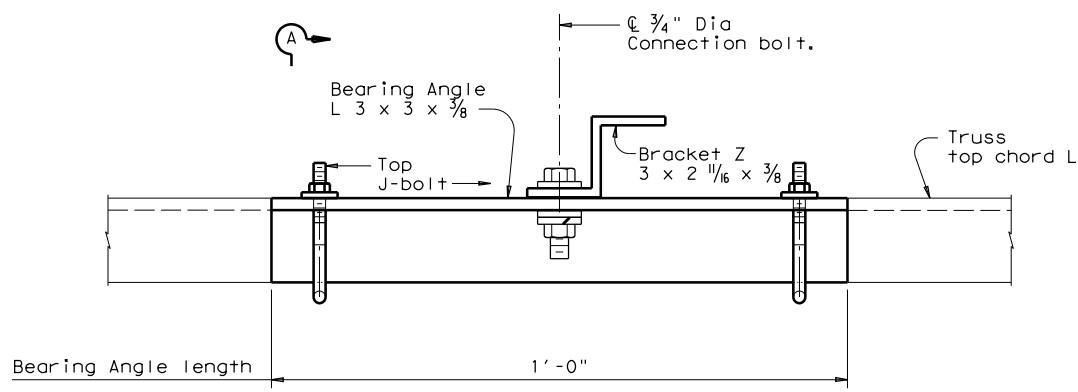


Attachment at Top Chord
 (Showing Chord Angle 3")

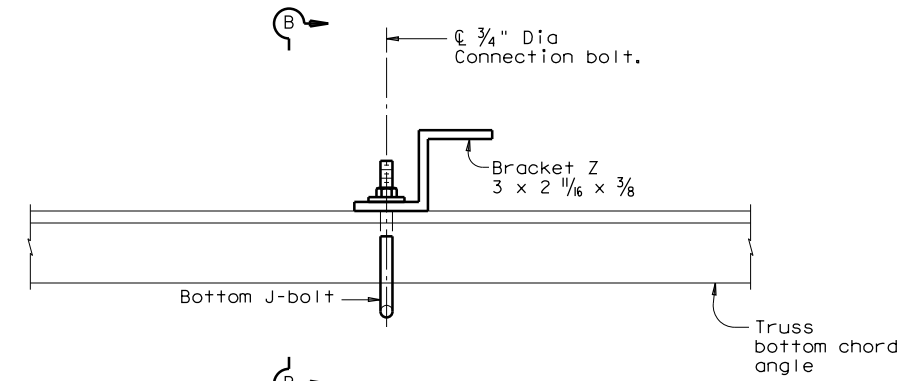

Attachment at Bottom Chord
PLAN VIEW


GENERAL NOTES:

- Application of the mounting detailed on Sheet 1 of 3 is limited to a dynamic message sign (DMS) attachment that is not in conflict with the truss connection bolts at the point(s) of attachment. The overhead sign structure must have adequate capacity to support the DMS. A determination of adequacy shall be made prior to attaching the DMS supports to the truss.
- Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. The Design Sustained Wind Velocity is 100 mph with a gust factor of 1.3. Connections are designed for a DMS weight of 3600 lbs and a design Effective Projected Area (EPA) of 441 sq ft, with the EPA based on a DMS nominal width of 30.5 feet and nominal depth of 8.25 feet plus four top and bottom 1'-8" square flashing beacons. The EPA includes drag coefficients of 1.7 (applied to sign area) and 1.2 (applied to flashing beacon area). A horizontal eccentricity of 1.0 ft from the face of the truss to the center of gravity of the DMS for attachment of DMS is assumed. An even number of Z brackets, spaced at 5 ft max., is assumed to transfer forces through the connection.
- All structural steel shall conform to ASTM A36, A572 Gr 50 or A588. Connection bolts shall conform to ASTM A325 or A449. Each connection bolt shall be provided with 1 heavy hex nut, 2 flat washers, and 1 lock washer. J bolts and washer plate both shall be Type 304 stainless steel, with bolt minimum yield strength of 50 ksi and an elongation of 16 percent in 2 inches. All parts except stainless steel shall be galvanized.
- Contractor shall verify applicable field dimensions before fabrication.

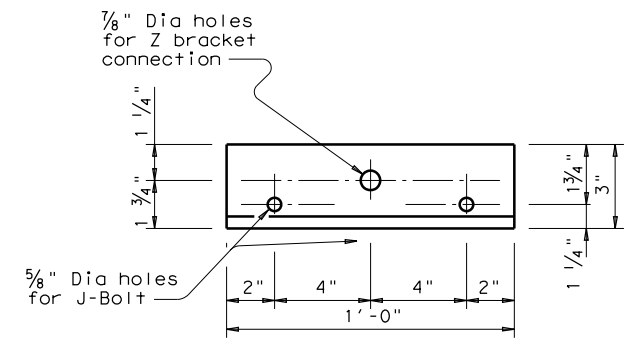


BEARING ANGLE 3 x 3 x 3/8


Chord Angle	J
3", 3 1/2", 4"	5 1/2"
5" and 6"	7 1/2"

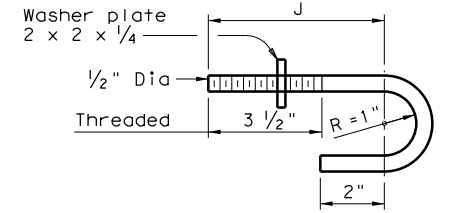

TOP & BOTTOM J-BOLT

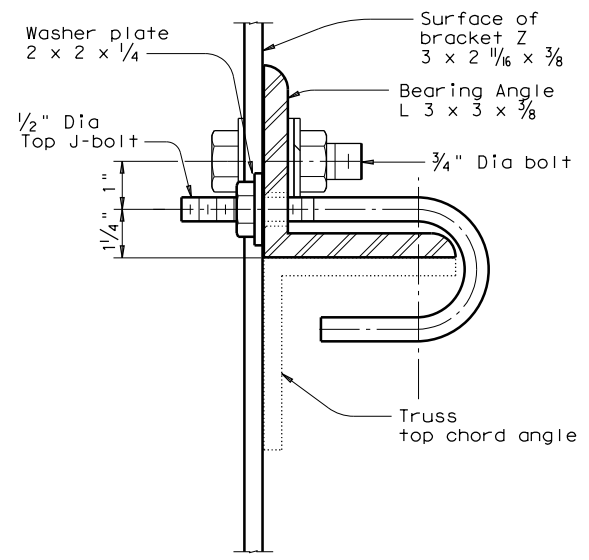

SECTION A-A

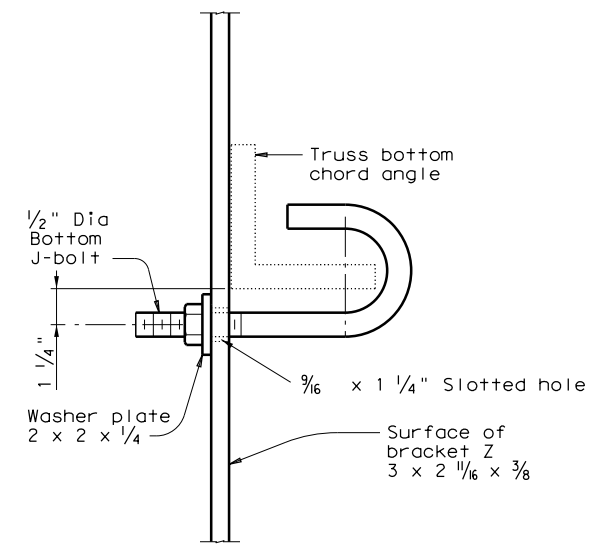

SECTION B-B

SHEET 1 OF 3




DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (NON BUILD-UP) DMS(TM-1)-16

FILE: dms-tm-16.dgn	DN: TxDOT	CK: DW: TxDOT	CK:
© TxDOT June 2016	CONT	SECT	JOB
REVISIONS	0904	00	220
	DIST	COUNTY	SHEET NO.
	AMA	POTTER	84


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:35 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2_Design Phase\ADSS\01509-0027-12.dgn

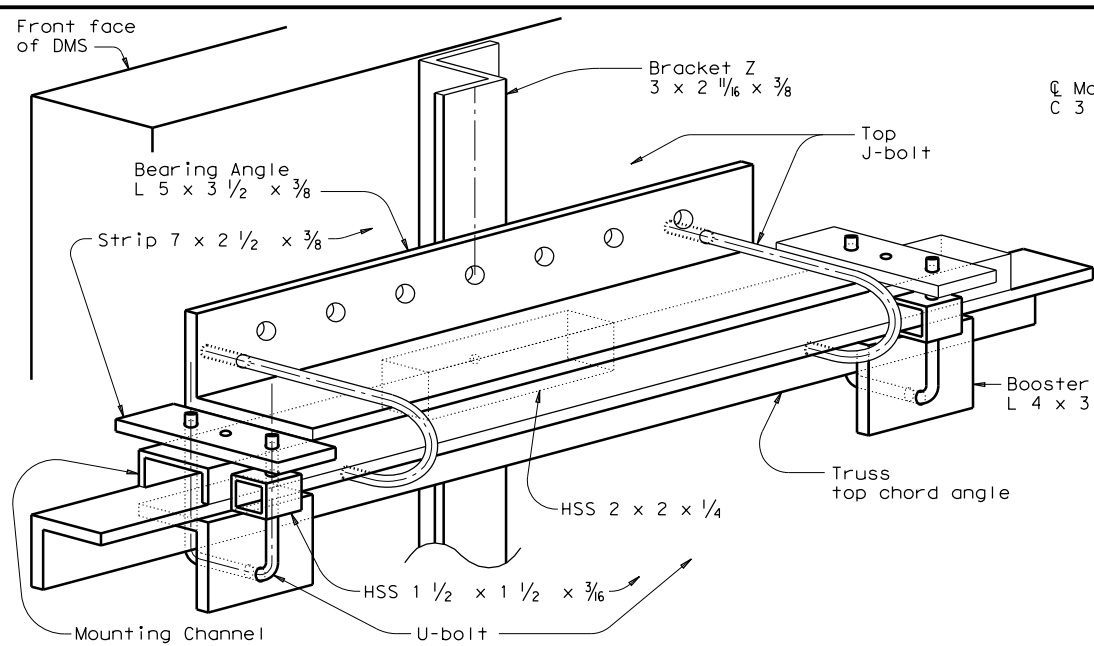


Built-up Attachment at Top Chord
 (Showing Chord Angle 3")


ISOMETRIC VIEW

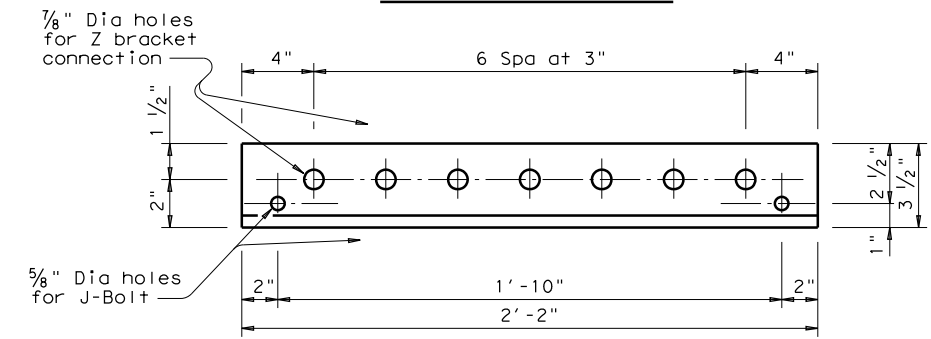


BEARING ANGLE 5 x 3 1/2 x 3/8

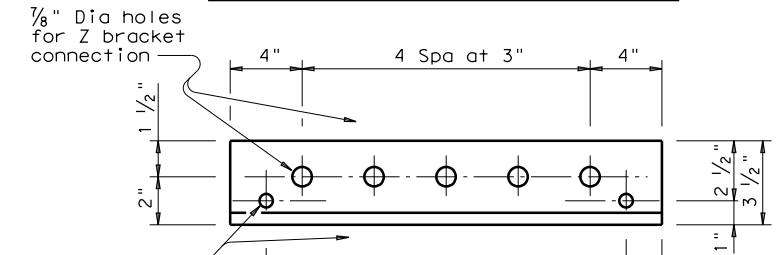


BEARING ANGLE 5 x 3 1/2 x 3/8

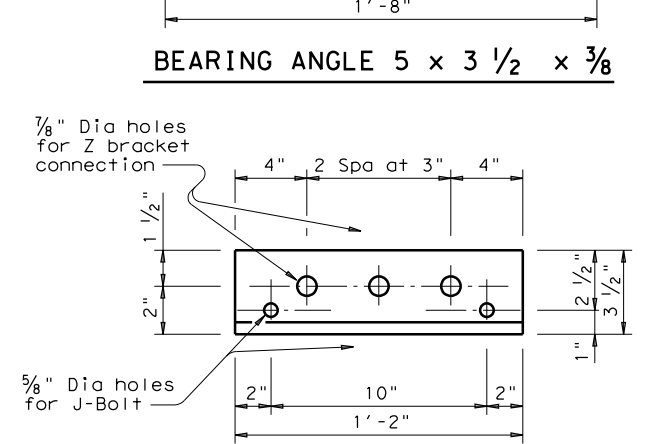

BEARING ANGLE 5 x 3 1/2 x 3/8

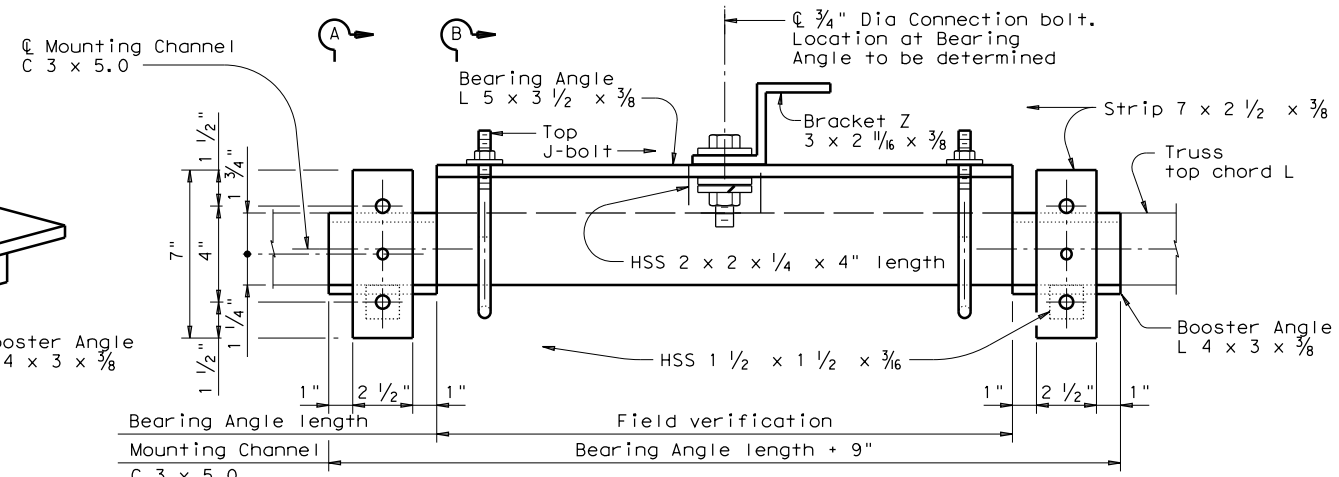


PLAN VIEW (AT TOP CHORD)
 (Showing Chord Angle 3")

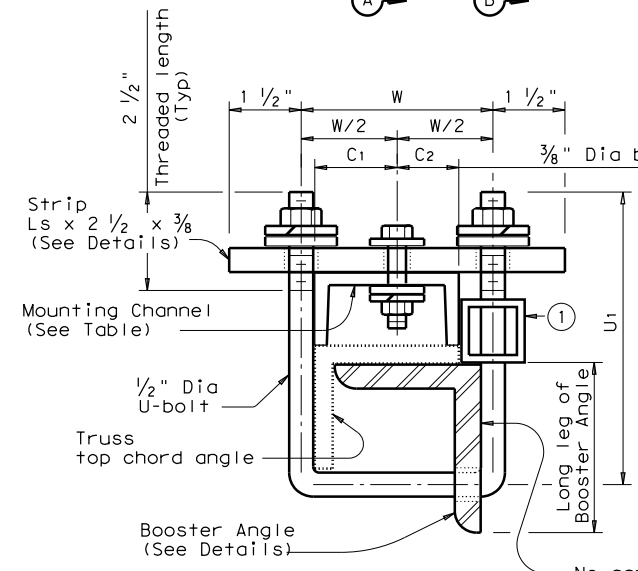


SECTION A-A
 (Showing Chord Angle 3", 4", 5" & 6")

Chord Angle	U1	W	C1	C2	Mounting Channel
3"	7"	4"	1 3/4"	1 1/4"	C3 x 5.0
4"	8"	5"	2 1/4"	1 3/4"	C4 x 7.25
5"	9"	6"	2 3/4"	2 1/4"	C5 x 9.0
6"	10 1/2"	7"	3 1/4"	2 3/4"	C6 x 13

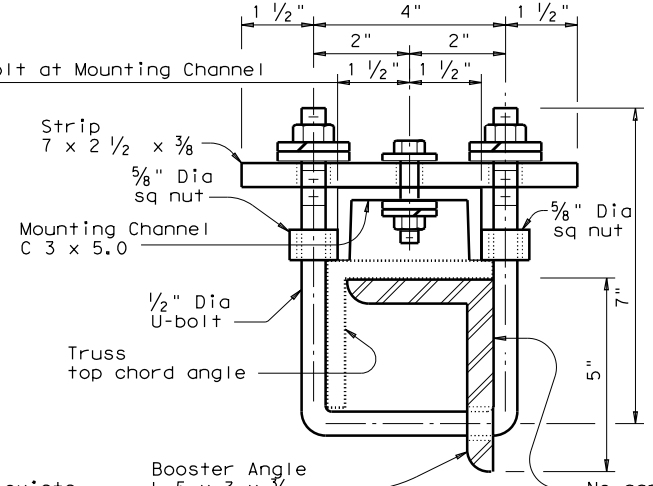


SECTION A-A
 (Showing Chord Angle 3 1/2")

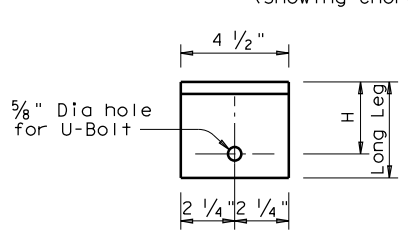


BOOSTER ANGLE
 (For Chord Angle 3", 4", 5" and 6")


Chord Angle	Booster Angle	H
3"	4 x 3 x 3/8	3"
4"	5 x 3 1/2 x 3/8	3 13/16"
5"	6 x 4 x 3/8	4 13/16"
6"	7 x 4 x 3/8	5 5/8"

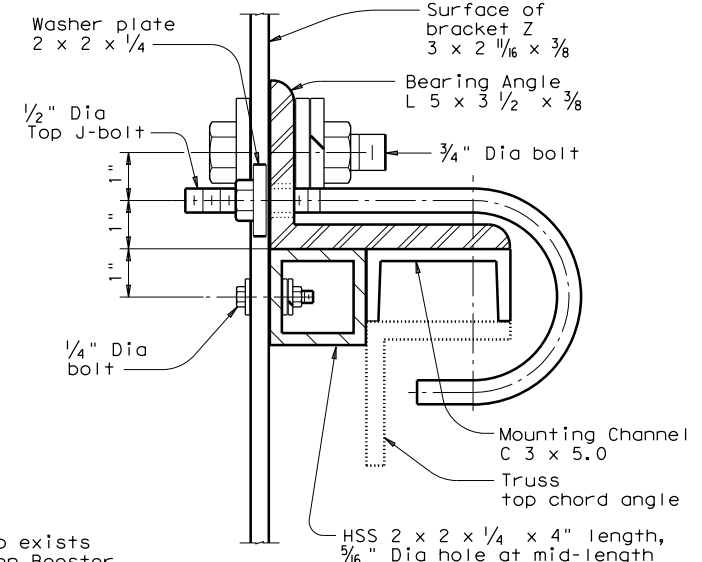

SECTION B-B

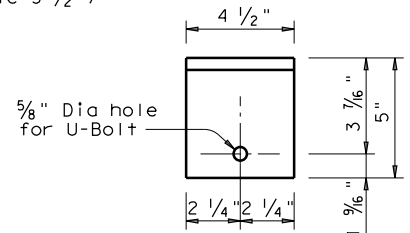


BOOSTER ANGLE 5 x 3 x 3/8
 (For Chord Angle 3 1/2")

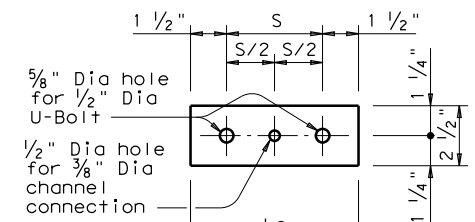


Strip Ls x 2 1/2 x 3/8

Chord Angle	S	Ls
3"	4"	7"
3 1/2"	4"	7"
4"	5"	8"
5"	6"	9"
6"	7"	10"

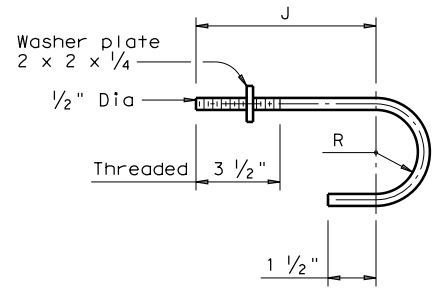

TOP J-BOLT

Chord Angle	J	R
3 & 3 1/2"	7"	1 3/4"
4 & 5"	8"	2"
6"	9"	2 1/4"

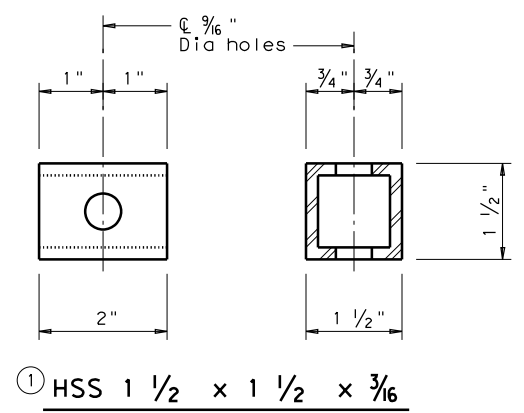

HSS 1 1/2 x 1 1/2 x 3/16

SHEET 2 OF 3

Texas Department of Transportation Traffic Operations Division Standard


DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (WITH BUILD-UP)

DMS (TM-2) - 16


FILE: dms-tm-16.dgn	DN: TxDOT	CK: DW: TxDOT	CK:
© TxDOT JUNE 2016	CONT 0904	SECT 00	JOB 220
REVISIONS			HIGHWAY VARIOUS
	DIST AMA	COUNTY POTTER	SHEET NO. 85

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

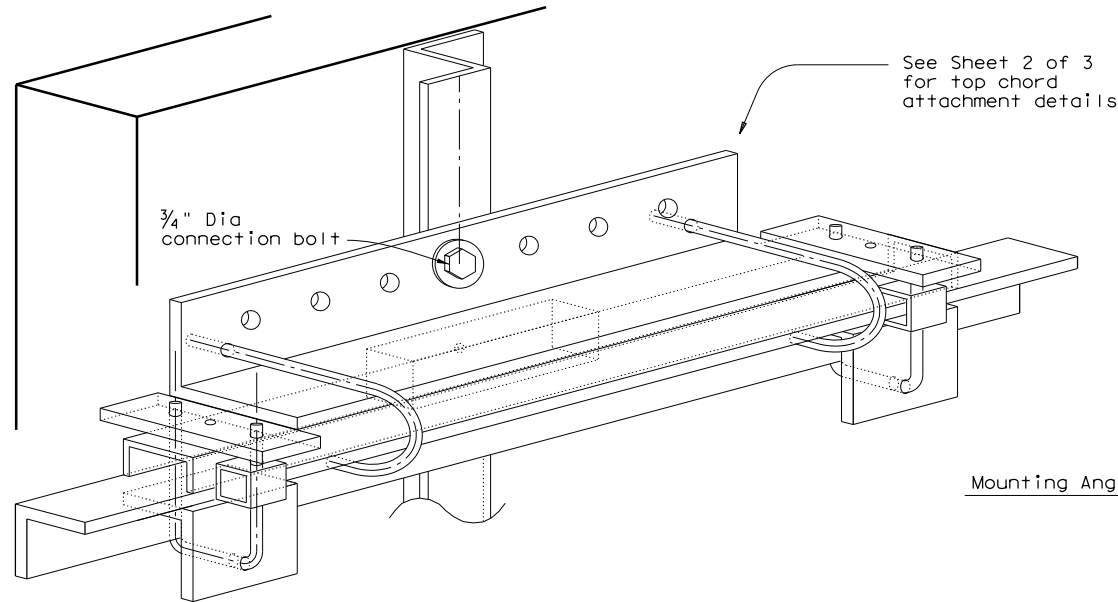

Built-up Attachment at Top Chord

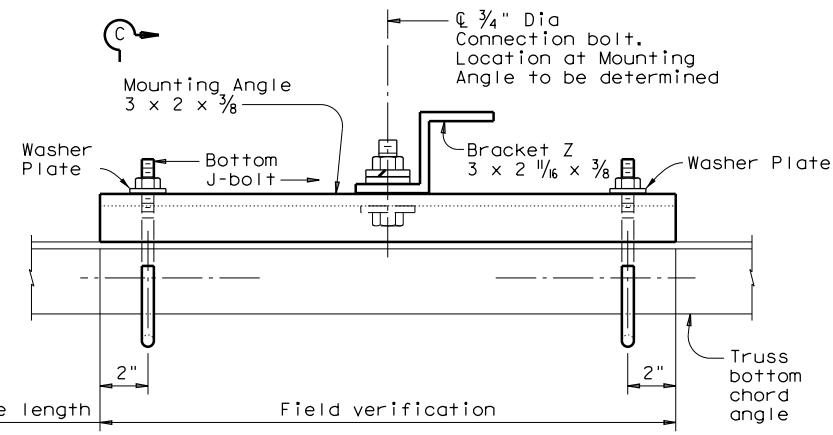


PLAN VIEW (AT BOTTOM CHORD)

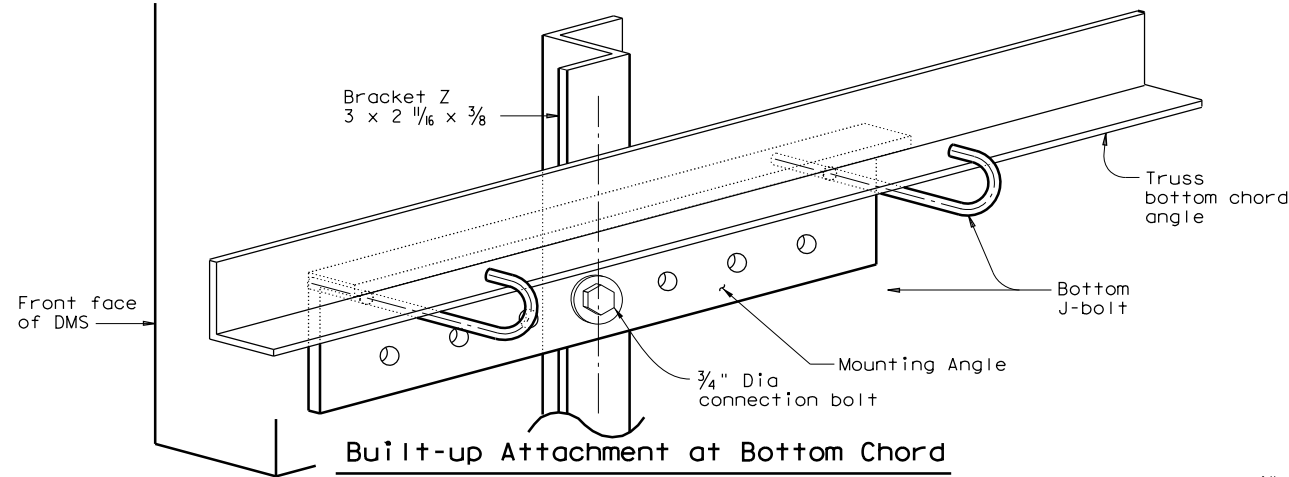


Built-up Attachment at Bottom Chord


ISOMETRIC VIEW

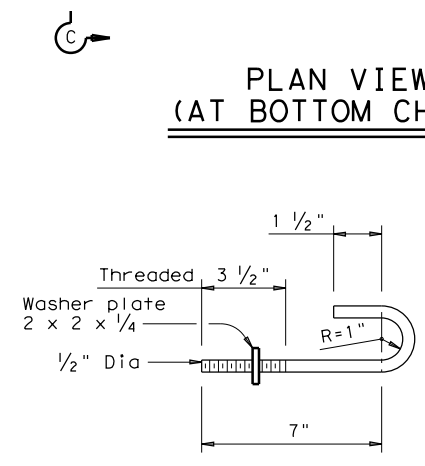


BOTTOM J-BOLT

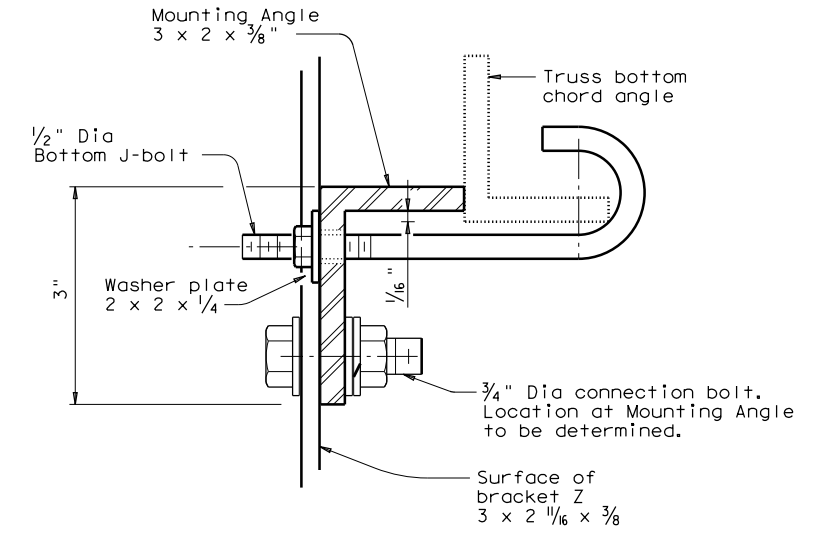


SECTION C-C

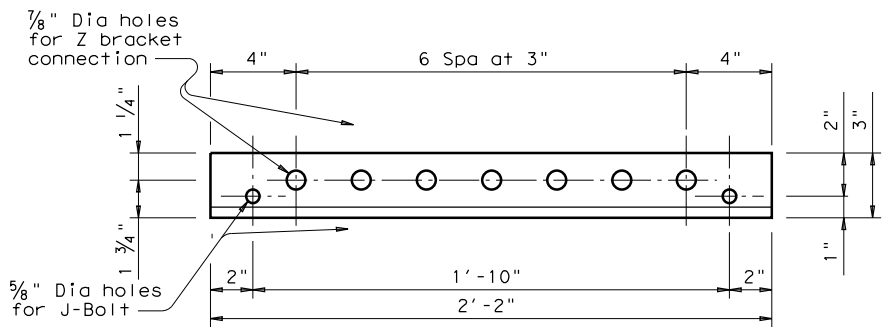

MOUNTING ANGLE 3 x 2 x 3/8

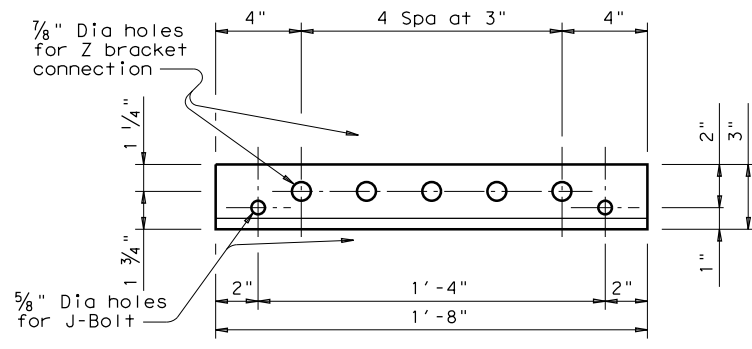

MOUNTING ANGLE 3 x 2 x 3/8

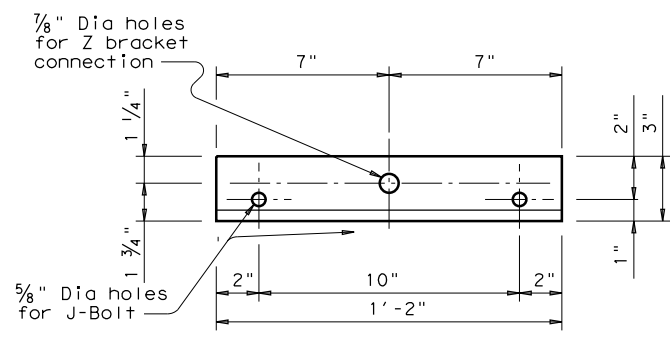

MOUNTING ANGLE 3 x 2 x 3/8

GENERAL NOTES:

1. Application of the built-up detailed on Sheet 2 and 3 of 3 is limited to the dynamic message sign (DMS) attachment which is in conflict with the truss connection bolts at the point(s) of attachment. The overhead sign structure must have adequate capacity to support the DMS. A determination of adequacy shall be made prior to attaching the DMS supports to the truss.
2. Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. The Design Sustained Wind Velocity is 100 mph with a gust factor of 1.3. Connections are designed for a DMS weight of 3600 lbs and a design Effective Projected Area (EPA) of 441 sq ft, with the EPA based on a DMS nominal width of 30.5 feet and nominal depth of 8.25 feet plus four top and bottom 1'-8" square flashing beacons. The EPA includes drag coefficients of 1.7 (applied to sign area) and 1.2 (applied to flashing beacon area). A horizontal eccentricity of 1.0 ft from the face of the truss to the center of gravity of the DMS for attachment of DMS is assumed. An even number of Z brackets, spaced at 5 ft max., is assumed to transfer forces through the connection.
3. All structural steel shall conform to ASTM A36, A572 Gr 50 or A588. Connection bolts shall conform to ASTM A325 or A449. Each connection bolt shall be provided with 1 heavy hex nut, 2 flat washers, and 1 lock washer. U bolts shall conform to ASTM A307 with 2 hex nuts, 2 flat washers and 2 lock washers. Hollow structural section (HSS) shall conform to ASTM A500, A501, or A847. J bolts and washer plate both shall be Type 304 stainless steel, with bolt minimum yield strength of 50 ksi and an elongation of 16 percent in 2 inches. All parts, except stainless steel shall be galvanized.
4. Contractor shall verify applicable field dimensions before fabrication. Various lengths of bearing and mounting angle are provided for suitable mounting. Contractor shall determine the proper bearing and mounting angle length, and the connection along the length at Z bracket to accommodate J-bolt hook. Contractor may substitute HSS for the mounting channel as long as the HSS has equal or greater thickness at the mounting channel. Limit HSS height to achieved mounting clearance.

SHEET 3 OF 3

		Traffic Operations Division Standard	
DMS-TO-TRUSS MOUNTING AT OVERHEAD SIGN SUPPORTS (WITH BUILD-UP)			
DMS (TM-3) - 16			
FILE: dms-tm-16.dgn	DN: TxDOT	CK: DW: TxDOT	CK:
© TxDOT JUNE 2016	CONT	SECT	JOB
REVISIONS	0904	00	220
	DIST	COUNTY	SHEET NO.
	AMA	POTTER	86

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units, or for the use of this standard in any way that may cause injury, damage, or loss. TxDOT does not assume any liability for the conversion of units, or for the use of this standard in any way that may cause injury, damage, or loss.

GENERAL NOTES FOR ALL ELECTRICAL WORK

- 1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
- 2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
- 3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is 1/2 in. or less in diameter.
- 4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
- 5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
- 6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

CONDUIT

A. MATERIALS

- 1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
- 2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
- 3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.


AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" x 16" x 4"
#2	8" x 8" x 4"	10" x 10" x 4"	12" x 12" x 4"
#4	8" x 8" x 4"	10" x 10" x 4"	10" x 10" x 4"
#6	8" x 8" x 4"	8" x 8" x 4"	10" x 10" x 4"
#8	8" x 8" x 4"	8" x 8" x 4"	8" x 8" x 4"

- 4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
- 5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
- 6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
- 7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.

- 8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plans. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the PVC conduit system. When galvanized steel RMC elbows are specifically called for in the plans and any portion of the RMC elbow is buried less than 18 in., ground the RMC elbow by means of a grounding bushing on a rigid metal extension. Grounding of the rigid metal elbow is not required if the entire RMC elbow is encased in a minimum of 2 in. of concrete. PVC extensions are allowed on these concrete encased rigid metal elbows. RMC or PVC elbows are subsidiary to various bid items.
- 9. When required, provide High-Density Polyethylene (HDPE) conduit with factory installed internal conductors according to Item 622 "Duct Cable." At the Contractor's request and with approval by the Engineer, substitute HDPE conduit with no conductors for bored schedule 40 or schedule 80 PVC conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule 40 and of the same size PVC called for in the plans. Ensure the substituted HDPE meets the requirements of Item 622, except that the conduit is supplied without factory-installed conductors. Make the transition of the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide conduit of the size and schedule as shown on the plans. Do not extend substituted conduit into ground boxes or foundations. Provide PVC or galvanized steel RMC elbows as called for at all ground boxes and foundations.
- 10. Use two-hole straps when supporting 2 in. and larger conduits. On electrical service poles, properly sized stainless steel or hot dipped galvanized one-hole standoff straps are allowed on the service riser conduit.

B. CONSTRUCTION METHODS

- 1. Provide and install expansion joint conduit fittings on all structure-mounted conduits at the structure's expansion joints to allow for movement of the conduit. In addition, provide and install expansion joint fittings on all continuous runs of galvanized steel RMC conduit externally exposed on structures such as bridges at maximum intervals of 150 ft. When requested by the project Engineer, supply manufacturer's specification sheet for expansion joint conduit fittings. Repair or replace expansion joint fittings that do not allow for movement at no additional cost to the Department. Provide the method of determining the amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as a substitute for the required expansion conduit fittings.
- 2. Space all conduit supports at maximum intervals of 5 ft. Install conduit spacers when attaching metal conduit to surface of concrete structures. See "Conduit Mounting Options" on ED(2). Install conduit support within 3 ft. of all enclosures and conduit terminations.
- 3. Do not attach conduit supports directly to pre-stressed concrete beams except as shown specifically in the plans or as approved by the Engineer.
- 4. Unless otherwise shown on the plans, jack or bore conduit placed beneath existing roadways, driveways, sidewalks, or after the base or surfacing operation has begun. Backfill and compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tunneling Pipe or Box" prior to installing conduit or duct cable to prevent bending of the connections.
- 5. When placing conduit in the sub-grade of new roadways, backfill all trenches with excavated material unless otherwise noted on the plans. When placing conduit in the sub-base of new roadways, backfill all trenches with cement-stabilized base as per requirements of Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Flowable Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Shoring."
- 6. Provide and place warning tape approximately 10 in. above all trenched conduit as per Item 618.
- 7. During construction, temporarily cap or plug open ends of all conduit and raceways immediately after installation to prevent entry of dirt, debris and animals. Temporary caps constructed of durable duct tape are allowed. Tightly fix the tape to the conduit opening. Clean out the conduit and prove it clear in accordance with Item 618 prior to installing any conductors.
- 8. Ensure conduit entry into the top of any enclosure is waterproof by installing conduit sealing hubs or using boxes with threaded bosses. This includes surface mounted safety switches, meter cans, service enclosures, auxiliary enclosures and junction boxes. Grounding bushings on water tight sealing hubs are not required.
- 9. Fit the ends of all PVC conduit terminations with bushings or bell end fittings. Provide and install a grounding type bushing on all metal conduit terminations.
- 10. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor. Bonding of conduit used as a casing under roadways for duct cable is not required, if the duct extends the full length through the casing.
- 11. At all electrical services, install a 6 AWG solid copper grounding electrode conductor.
- 12. Place conduits entering ground boxes so that the conduit openings are between 3 in. and 6 in. from the bottom of the box. See the ground box detail on sheet ED(4).
- 13. Seal ends of all conduits with duct seal, expandable foam, or by other methods approved by the Engineer. Seal conduit immediately after completion of conductor installation and pull tests. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a conduit sealant.
- 14. File smooth the cut ends of all mounting strut and conduit. Before installing, paint the field cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc rich paint (94% or more zinc content) to alleviate overspray. Use zinc rich paint to touch up galvanized material as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material with a zinc rich paint as an alternative for materials required to be galvanized.

 Texas Department of Transportation				Traffic Operations Division Standard	
<h1>ELECTRICAL DETAILS CONDUITS & NOTES</h1> <h2>ED(1) - 14</h2>					
FILE:	ed1-14.dgn	DN:		CK:	
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		0904	00	220	VARIOUS
	DIST	COUNTY		SHEET NO.	
	AMA	POTTER		87	

ELECTRICAL CONDUCTORS

A. MATERIAL INFORMATION

1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS) 11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 AWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.

2. Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.

3. Where two or more circuits are present in one conduit or enclosure, permanently identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.

4. Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

B. CONSTRUCTION METHODS

1. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.

2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.

3. Make splices only in junction boxes, ground boxes, pole bases, or electrical enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.

4. Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.

5. Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.

6. Support conductors in illumination poles with a J-hook at the top of the pole.

7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.

8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.

9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.

10. Do not terminate more than one conductor under a single connector, unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.

11. Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.

C. TEMPORARY WIRING

1. Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.

2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of the following: molded cord and plug set, receptacle, or circuit breaker type.

3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.

4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.

5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NEC.

GROUND RODS & GROUNDING ELECTRODES

A. MATERIAL INFORMATION

1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

B. CONSTRUCTION METHODS

1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade.

2. Do not place ground rods in the same drilled hole as a timber pole.


3. Install ground rods so the imprinted part number is at the upper end of the rod.

4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.


5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.

6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.


7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

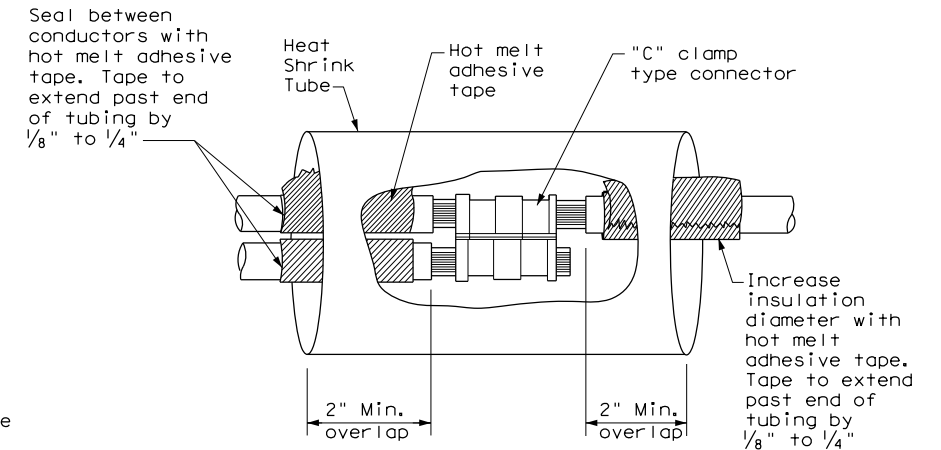

**SPLICE OPTION 1
Compression Type**

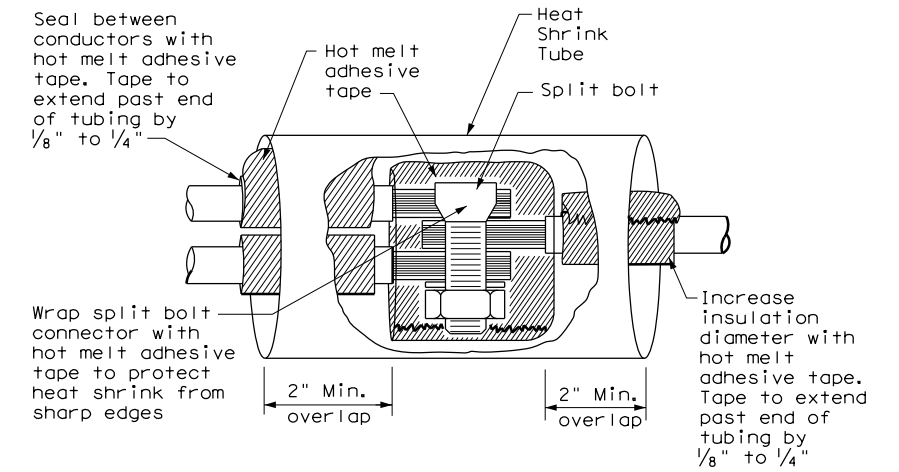

**SPLICE OPTION 2
Split Bolt Type**

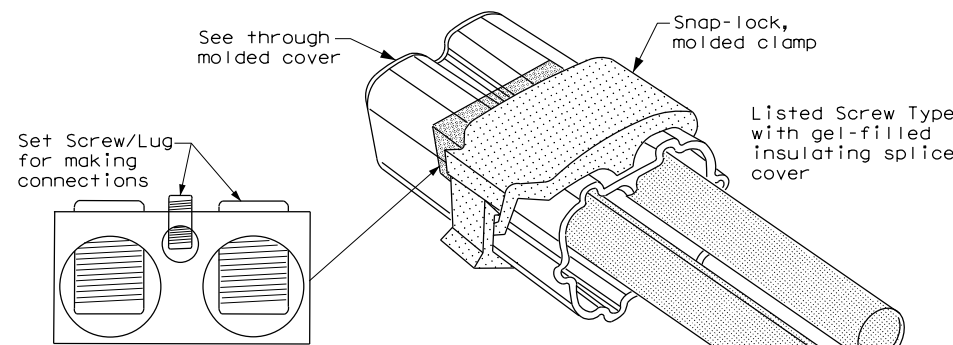

**SPLICE OPTION 3
Listed Screw Type**


The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:23:36 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH 40 ITS\2 Design Phase\Drawings\ED(3)-14.dwg

 Texas Department of Transportation		 Traffic Operations Division Standard	
ELECTRICAL DETAILS CONDUCTORS			
ED(3)-14			
FILE: ed3-14.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2014	CON: 0904	SECT: 00	JOB: 220
REVISIONS	DIST: AMA	COUNTY: POTTER	HIGHWAY: VARIOUS
			SHEET NO.: 88

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:37 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\01509-0027-12.dwg

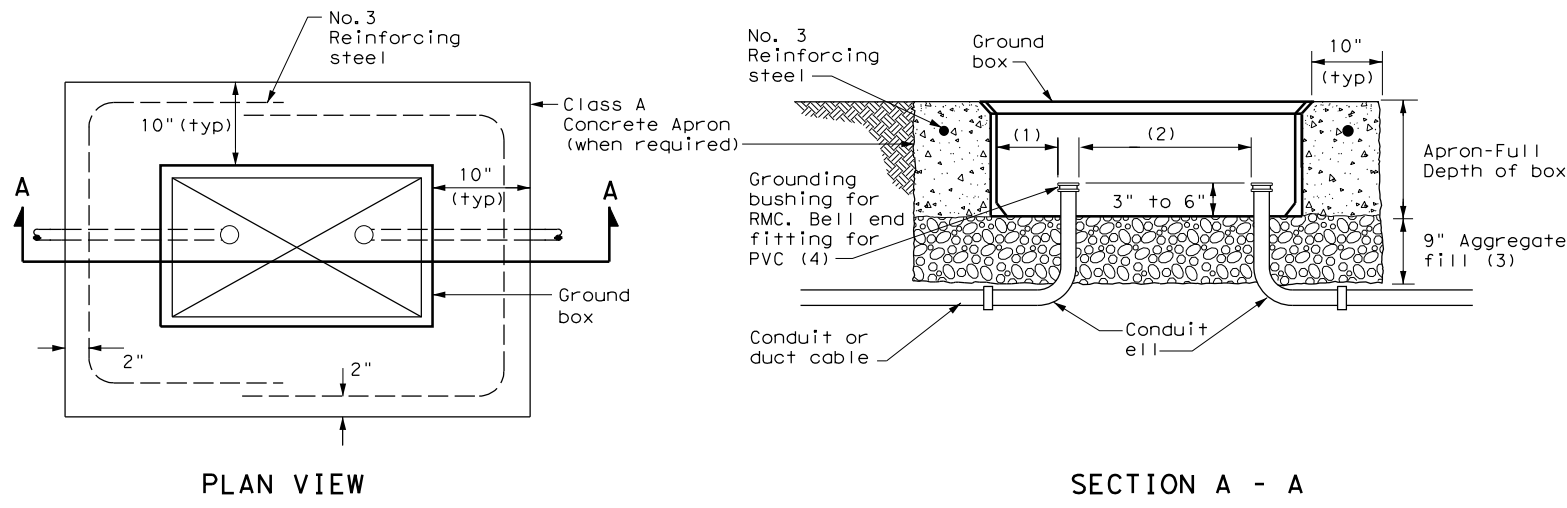


APRON FOR GROUND BOX

- (1) Uniformly space ends of conduits within the ground box. Position ends of conduits so that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushing.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

GROUND BOX DIMENSIONS	
TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
A	12 X 23 X 11
B	12 X 23 X 22
C	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

GROUND BOX COVER DIMENSIONS								
TYPE	DIMENSIONS (INCHES)							
	H	I	J	K	L	M	N	P
A, B & E	23 1/4	23	13 3/4	13 1/2	9 7/8	5 1/8	1 3/8	2
C & D	30 1/2	30 1/4	17 1/2	17 1/4	13 1/4	6 3/4	1 3/8	2

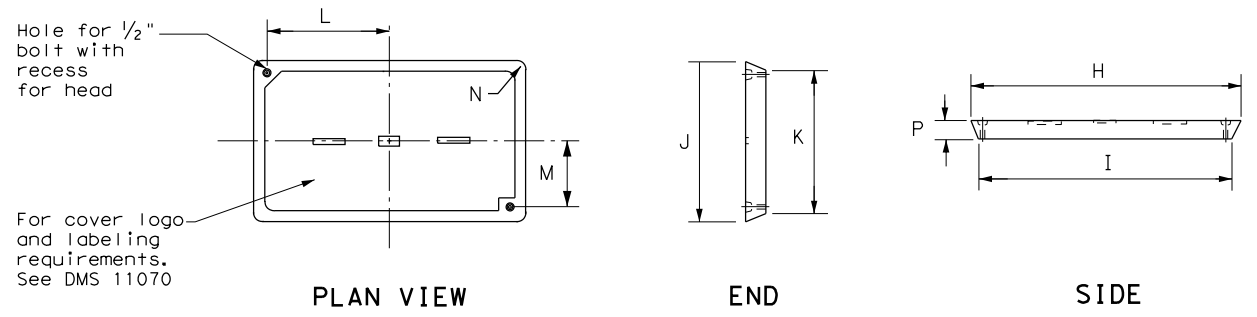

GROUND BOX COVER

GROUND BOXES

A. MATERIALS

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and Item 624 "Ground Boxes."
2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 624.
3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.
4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

B. CONSTRUCTION METHODS

1. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of aggregate.
2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.
3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground boxes.
4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.
5. Temporarily seal all conduits in the ground box until conductors are installed.
6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a sealant.
7. When a ground rod is present in a ground box, bond all equipment grounding conductors together and to the ground rod with listed connectors.
8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches below grade.
9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes fully describing the work required.
10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.
11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.

				Traffic Operations Division Standard	
<h2>ELECTRICAL DETAILS</h2> <h3>GROUND BOXES</h3> <h4>ED(4) - 14</h4>					
FILE:	ed4-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		0904	00	220	VARIOUS
DIST	COUNTY	SHEET NO.			
AMA	POTTER			89	

ELECTRICAL SERVICES NOTES

1. Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State.
2. Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services," DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)", and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans.
3. Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans.
4. Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as approved.
5. The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed.
6. Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC.
7. When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used.
8. Provide wiring and electrical components rated for 75°C. Provide red, black, and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility.
9. All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately.
10. Provide rigid metal conduit (RMC) for all conduits on service, except for the 1/2 in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits a minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure.
11. Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer.
12. Ensure all mounting hardware and installation details of services conform to utility company specifications.
13. For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the laminated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. If the installation differs from the plan sheets, the installing contractor is to redline plan sheets before laminating.
14. When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket.
15. Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

SERVICE ASSEMBLY ENCLOSURE

1. Provide threaded hub for all conduit entries into the top of enclosure.
2. Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photoceII or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
3. Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
4. Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

1. Field drill flange-mounted remote operator handle if needed, to ensure handle is lockable in both the "On" and "Off" positions.
2. When the utility company provides a transformer larger than 50 KVA, verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.



PHOTOELECTRIC CONTROL

1. Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.

* ELECTRICAL SERVICE DATA												
Elec. Service ID	Plan Sheet Number	Electrical Service Description	Service Conduit *xS Size	Service Conductors No./Size	Safety Switch Amps	Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	KVA Load
SB 183	289	ELC SRV TY A 240/480 100(SS)AL(E)SF(U)	2"	3/#2	100	2P/100	100	N/A	Lighting NB	2P/40	26	28.1
									Lighting SB	2P/40	25	
									Underpass	1P/20	15	
NB Access	30	ELC SRV TY D 120/240 060(NS)SS(E)TS(O)	1 1/4"	3/#6	N/A	2P/60		100	Sig. Controller	1P/30	23	5.3
							30		Luminaires	2P/20	9	
									CCTV	1P/20	3	
2nd & Main	58	ELC SRV TY T 120/240 000(NS)GS(N)SP(O)	1 1/4"	3/#6	N/A	N/A	N/A	70	Flashing Beacon 1	1P/20	4	1.0
									Flashing Beacon 2	1P/20	4	

* Example only, not for construction. All new electrical services must have electrical service data chart specific to that service as shown in the plans.
 ** Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National Electrical Code.

EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

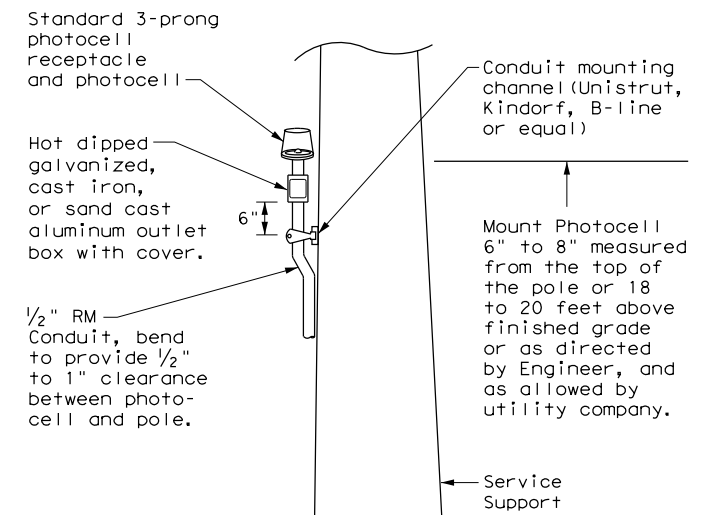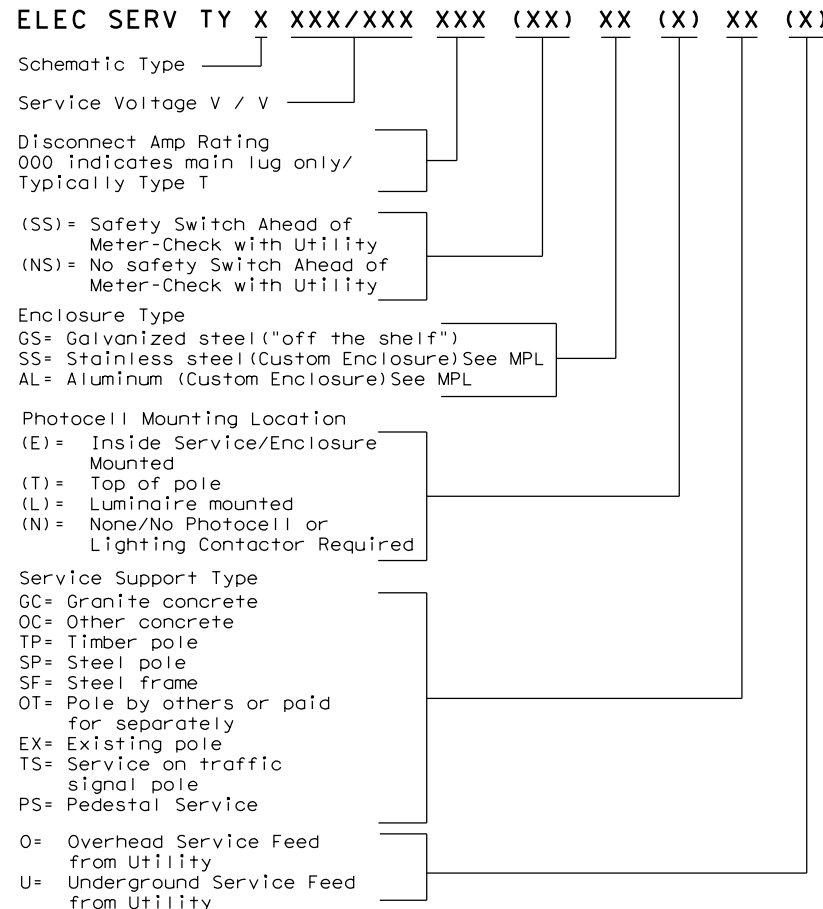

TOP MOUNTED PHOTOCELL

Install conduit strap maximum 3 feet from box. 5 foot maximum spacing between straps supporting conduit.

Texas Department of Transportation **Traffic Operations Division Standard**

ELECTRICAL DETAILS SERVICE NOTES & DATA


ED(5) - 14

FILE: ed5-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
DIST	COUNTY		SHEET NO.	
AMA	POTTER		90	

DATE: 8/11/2023 2:23:38 PM
 FILE: K:\1509\1509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2_Design_Phase_002.dwg
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of electronic files into printed formats or for incorrect results or damages resulting from its use.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:38 PM
 FILE: K:\01509\01509-002T-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase of ADAS

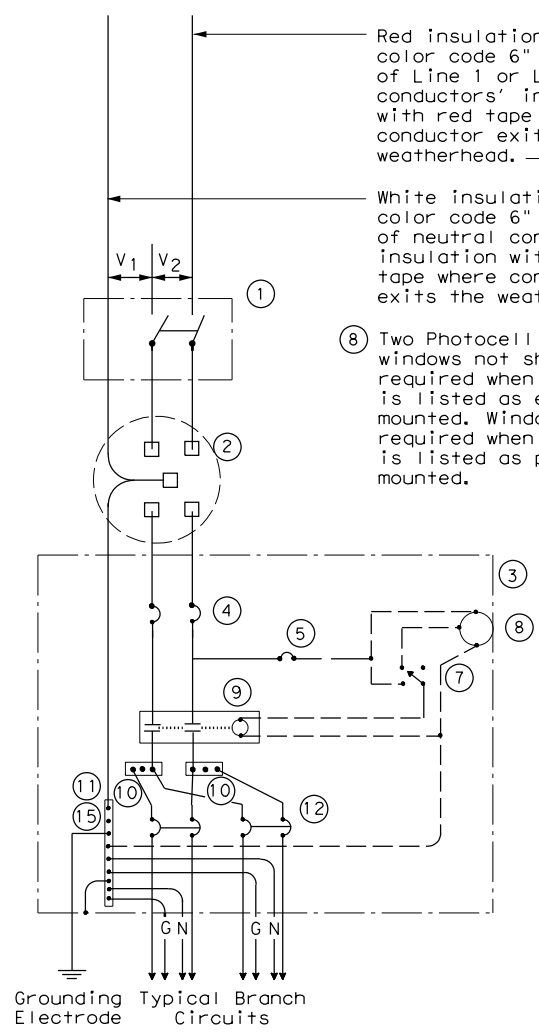


**SCHEMATIC TYPE A
THREE WIRE**


Red insulation or color code 6" length of Line 1 or Line 2 conductors' insulation with red tape where conductor exits the weatherhead.

White insulation or color code 6" length of neutral conductors' insulation with white tape where conductor exits the weatherhead.

⑧ Two Photocell viewing windows not shown but required when photocell is listed as enclosure mounted. Windows not required when photocell is listed as pole top mounted.

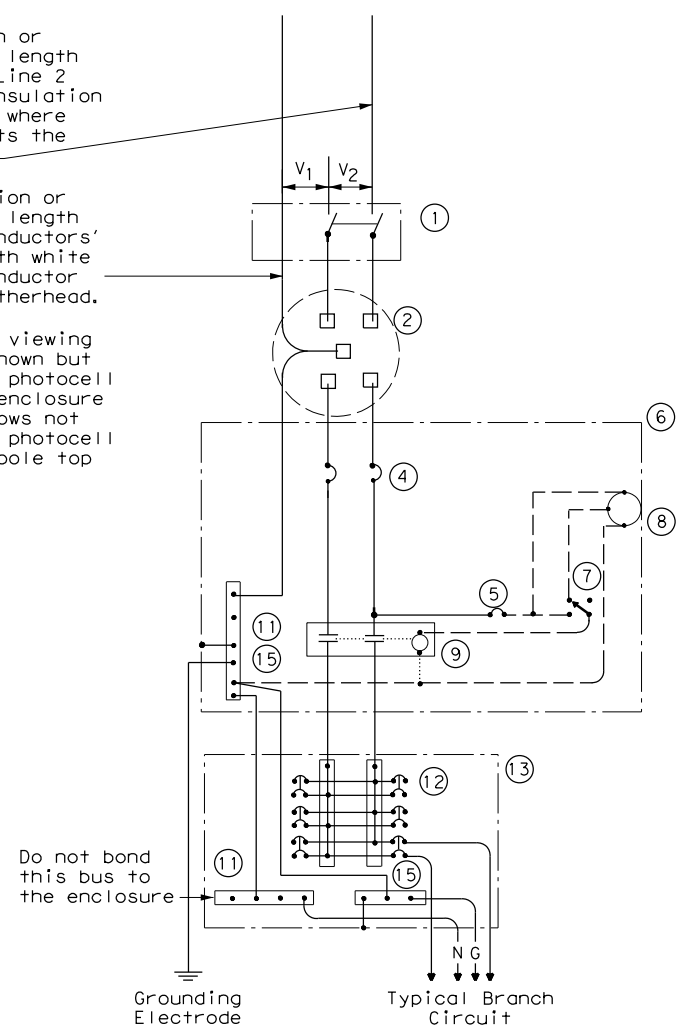


**SCHEMATIC TYPE C
THREE WIRE**

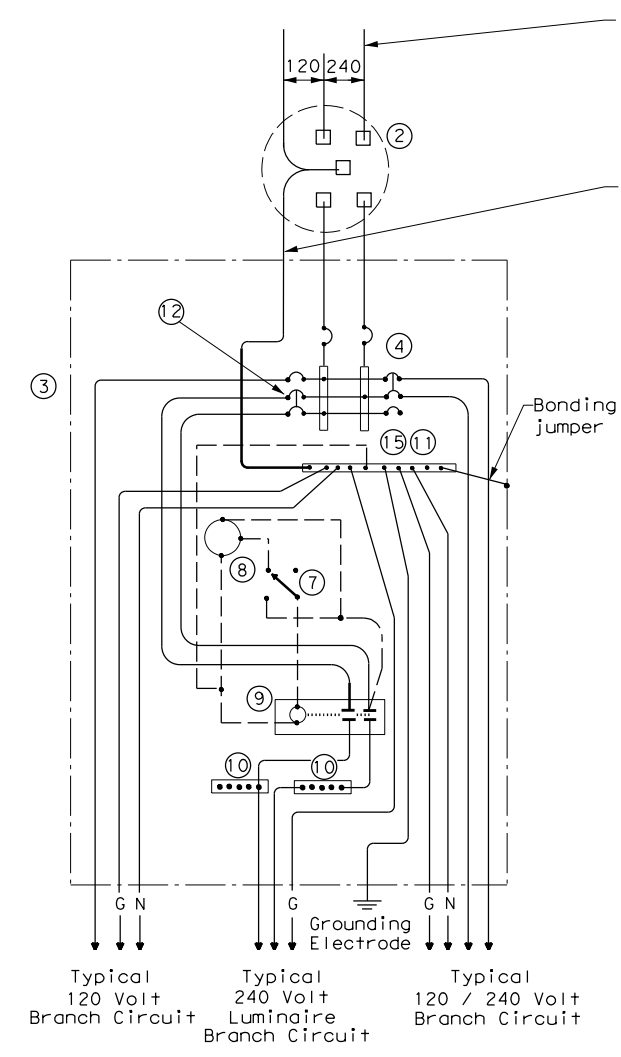

**SCHEMATIC TYPE D - CUSTOM
120/240 VOLTS - THREE WIRE**

Red insulation or color code 6" length of Line 1 or Line 2 conductors' insulation with red tape where conductor exits the weatherhead.

White insulation or color code 6" length of neutral conductors' insulation with white tape where conductor exits the weatherhead.

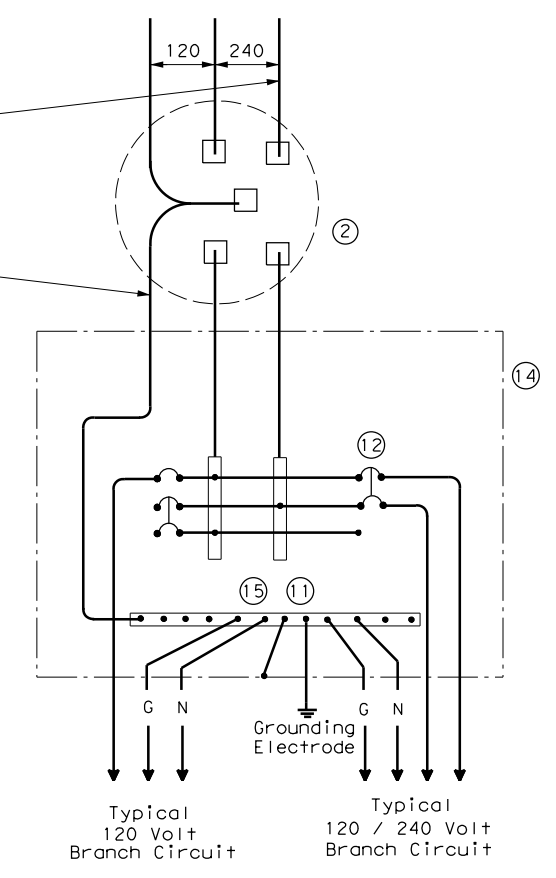

**SCHEMATIC TYPE T
120/240 VOLTS - THREE WIRE**
 Galvanized steel - "Buy Off The Shelf" only. When required install photocell top of the pole or on luminaire only, no lighting contractor will be installed.

WIRING LEGEND	
————	Power Wiring
- - - -	Control Wiring
—N—	Neutral Conductor
—G—	Equipment grounding conductor-always required

SCHEMATIC LEGEND	
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure-mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus

				Traffic Operations Division Standard	
ELECTRICAL DETAILS SERVICE ENCLOSURE AND NOTES					
ED(6) - 14					
FILE:	ed6-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CON:	0904	SECT:	00
REVISIONS		JOB:	220	HIGHWAY:	VARIOUS
DIST:	AMA	COUNTY:	POTTER	SHEET NO.:	91

DATE: 8/1/2023 2:23:39 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2_Design Phase of ADSS of poles and towers for the conversion of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of drawings or for incorrect results or damages resulting from its use.
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of drawings or for incorrect results or damages resulting from its use.

SUPPORT TYPE STEEL POLE (SP) AND STEEL FRAME (SF)

1. Provide steel pole and steel frame supports as per TxDOT Departmental Material Specification (DMS)11080 "Electrical Services." Mount all equipment and conduit on 12 gauge galvanized steel or stainless steel channel strut, 1 1/2 in. or 1 3/8 in. wide by 1 in. up to 3 3/4 in. deep Unistrut, Kindorf, B-line or equal. Bolt or weld all channel and hardware to vertical members as approved. Do not stack channel. File smooth and paint field cut ends of all channel with zinc-rich paint before installing.
2. Provide poles for overhead service with an eyebolt or similar fitting for attachment of the service drop to the pole in conformance with the electric utility provider's specifications.
3. Provide and install galvanized 3/4 in. x 18 in. x 4 in. (dia. x length x hook length) anchor bolts for underground service supports. Provide and install galvanized 3/4 in. x 56 in. x 4 in. anchor bolts for overhead service supports. Ensure anchor bolts have 3 in of thread, with 3 1/4 in. to 3 1/2 in. of the exposed anchor bolt projecting above finished foundation. Provide and install leveling nuts for all anchor bolts.
4. Bond one of the anchor bolts to the rebar cage with 6 AWG bare stranded copper conductor. Use listed mechanical connectors rated for embedment in concrete. See Inset B.
5. Furnish and install rigid metallic ellis in all steel pole and steel frame foundations for all conduits entering the service from underground.
6. Use class C concrete for foundations. Ensure reinforcing steel is Grade 60 with 3" of unobstructed concrete cover.
7. Drill and tap steel poles and frames for 1/2 in. X 13 UNC tank ground fitting. For steel pole service supports, provide and install tank ground fitting 4 in. to 6 in. below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. For steel frame service supports, provide and install tank ground fitting on steel frame post. Install service grounding electrode conductor in a non-metallic conduit or tubing from the enclosure to the steel frame post. Connect electrical service grounding electrode conductor to the tank ground fitting. See steel frame and steel pole details and Inset A for more information. Size service entrance conduit and branch circuit conduit as shown in the plans. For underground conduit runs from the electrical service, extend RMC from the service enclosure to an RMC elbow, and then connect the schedule type and size of conduit shown in the plans. Provide and install grounding bushings where RMC terminates in the enclosure. Grounding bushings are not required when RMC is fitted into a sealing hub or threaded boss.
8. If Steel pole or frame is painted, bond each separate painted piece with a bonding jumper attached to a tapped hole.
9. Provide 1/4" - 20 machine screws for bonding. Do not use sheet metal screws. Remove all non-conductive material at contact points. Terminate bonding jumpers with listed devices. Install minimum size 6 AWG stranded copper bonding jumpers. Make up all threaded bonding connections wrench tight.
10. Avoid contact of the service drop and service entrance conductors with the metal pole to prevent abrasion of the insulated conductors.
11. Shop drawings are not required for service support structure unless specifically stated elsewhere or directed by the Engineer.

White insulation or color code 6" of neutral conductor's insulation with white tape where conductor exits weatherhead.

Red insulation or color code 6" length of Line 1 or Line 2 conductor's insulation with red tape where conductor exits the weatherhead. Conductor slack length, 12" min., 18" max.

2" to 6" 4" (typ.)

RMC

Service Enclosure

Inset A

Channel bracket or other arrangement approved by the Engineer. (Kindorf, Unistrut, B-line or equal.)

Inset A

Inset B

60" TYP.

2"

18" Min.

Class "C" concrete

RMC

PVC

24 Dia. x 60" depth foundation 4-#5 reinforcing bars and #2 spiral (typ.) at 6" pitch

20' measured from grade. Circumstances may require the electrical service support to be taller than the 20" shown, check with utility before installing.

Top of weatherhead to be 2" to 6", 4" typical below the top of pole.

White insulation or color code 6" of neutral conductor's insulation with white tape where conductor exits weatherhead.

Red insulation or color code 6" length of Line 1 or Line 2 conductor's insulation with red tape where conductor exits the weatherhead. Conductor slack length, 12" min., 18" max.

Point of attachment of service drop to be below weatherhead.

Conduit support spacing, 3' max from the ends, and 5' in between unless otherwise called for by the utility.

Service Enclosure

Inset A

Inset B

Meter

24" dia. X 60" foundation 4-#5 reinforcing bars and #2 spiral at 6" pitch (typ.)

Drill, tap, and thread 1/2" X 13 UNC. Install tank ground fitting, connect electrical service grounding electrode conductor. See Note 7.

FRONT VIEW

INSET A

Rebar

Anchor Bolt

See Note 4

INSET B

Service Enclosure

Inset A

Inset B

3' max.

60" (typ.)

2"

18" Min.

RMC to utility

RMC

PVC

24" dia. x 36" depth foundation 4-#5 reinforcing bars and #2 spiral (typ.) at 6" pitch

WITH SAFETY SWITCH


HOOKED ANCHOR DETAIL

Anchor Bolt Length (See Note 3)

Top Thread



3/4" dia.

4" Hook Length

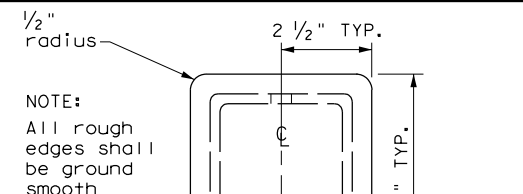


NOTE: All rough edges shall be ground smooth


Drain hole for galv. 2 - places TYP.

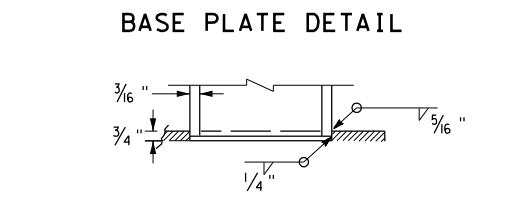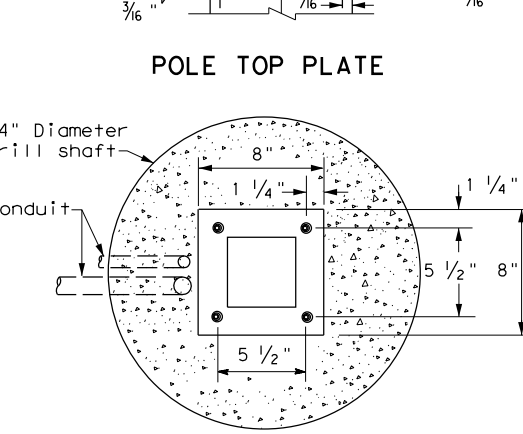


SERVICE SUPPORT TYPE SF & SP

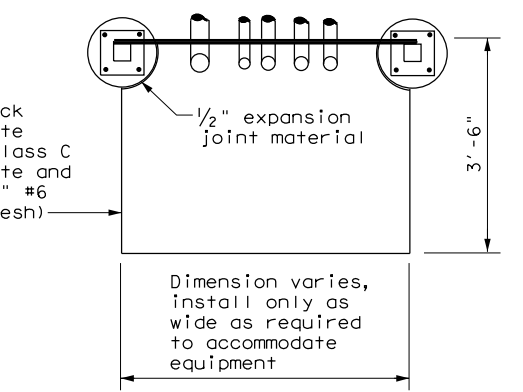

SERVICE SUPPORT TYPE SF (O) & SF (U)


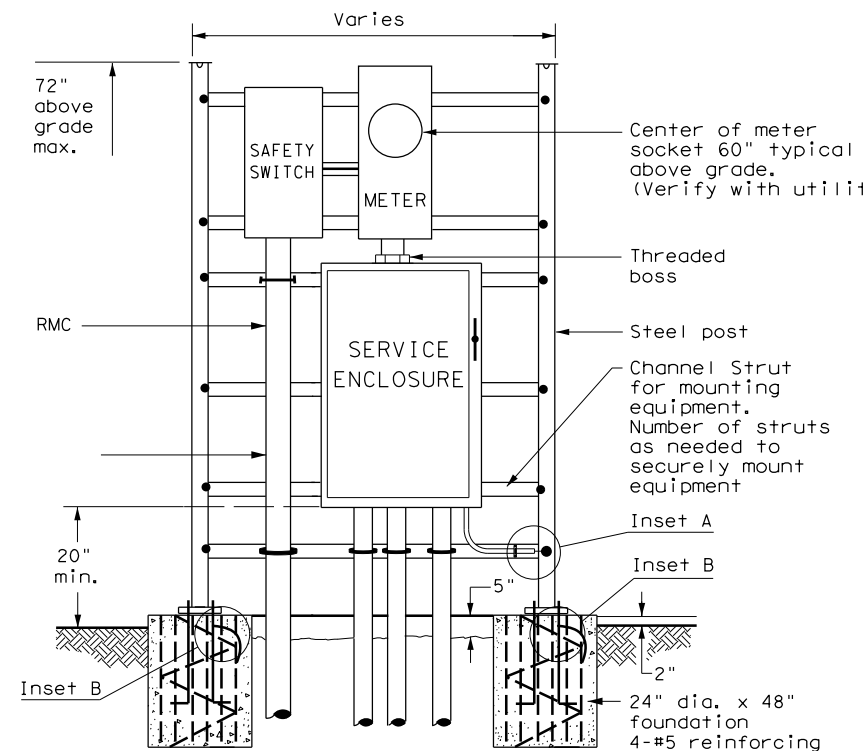


WITH SAFETY SWITCH
FRONT VIEW
SERVICE SUPPORT TYPE SF (U) - UNDERGROUND SERVICE

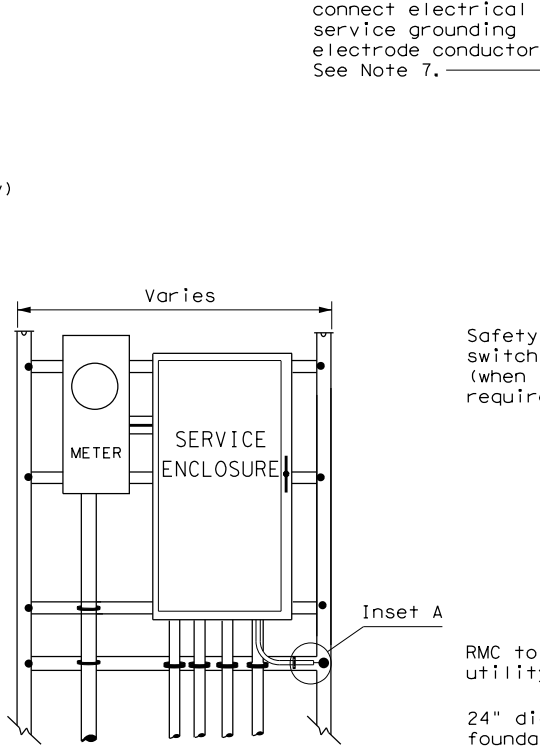

WITHOUT SAFETY SWITCH
FRONT VIEW
SERVICE SUPPORT TYPE SF (U) - UNDERGROUND SERVICE

WITH SAFETY SWITCH
WITHOUT SAFETY SWITCH
SERVICE SUPPORT TYPE SP (O) - OVERHEAD SERVICE

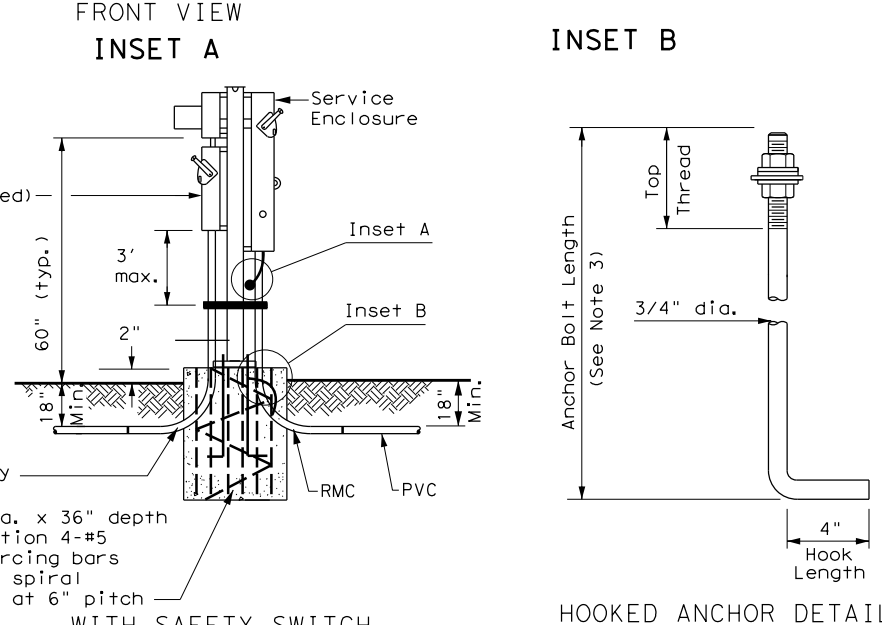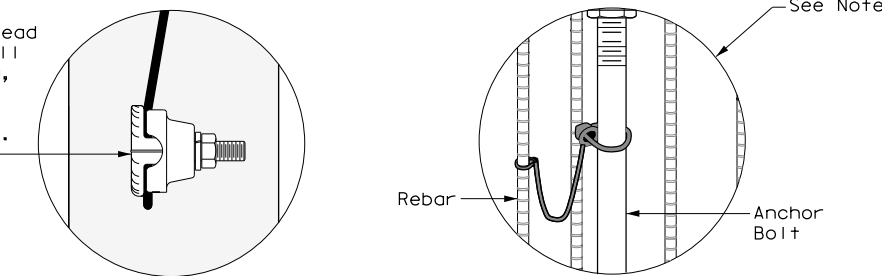

WITH SAFETY SWITCH
WITHOUT SAFETY SWITCH
SERVICE SUPPORT TYPE SP (U) - UNDERGROUND SERVICE


		Traffic Operations Division Standard	
ELECTRICAL DETAILS SERVICE SUPPORT TYPES SF & SP ED(7)-14			
FILE: ed7-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
©TxDOT October 2014	CON: 0904	SECT: 00	JOB: 220
REVISIONS	DIST: AMA	COUNTY: POTTER	SHEET NO.: 92

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:40 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase\01509-0027-12.dgn

TRAFFIC SIGNAL NOTES


1. Do not pass luminaire conductors through the signal controller cabinet.
2. Include an equipment grounding conductor in all conduits throughout the electrical system. Bond all exposed metal parts to the grounding conductor.
3. Provide roadway luminaires, when required, in accordance with the material and construction sections of Item 610, "Roadway Illumination Assemblies," except for performance testing of luminaires. Test installed roadway luminaires for proper operation as a part of the associated traffic signal system test.
4. If internally illuminated street name signs are approved for use, ground the fixture to the pole with a 12 AWG green XHHW conductor.
5. Bond anchor bolts to rebar cage in two locations using #3 bars or 6 AWG stranded copper conductors. Use listed mechanical connectors rated for embedment in concrete. See TxDOT standard TS-FD for further details.
6. Drill and tap signal poles for 1/2 in. X 13 UNC tank ground fitting. Provide and install tank ground fitting 4 in. to 6 in. directly below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Connect the electrical service grounding electrode conductor to the tank ground fitting. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. See Inset A detail for further information. Size service entrance conduit and branch circuit conduit as shown in the plans.
7. Mount electrical service enclosure and meter to signal pole with stainless steel bands. Ensure bands are a minimum width of 3/4 in. Secure enclosures to bands using two-bolt brackets. Install brackets near top and bottom of each enclosure. Install properly sized stainless steel washers on each bolt in the enclosure. Band or drill and tap properly sized stand-off straps to signal pole for attaching conduit.
8. Conduct pull tests and insulation resistance tests on all illumination and power conductors as required in Item 620 "Electrical Conductors" and ED(3). To prevent electronics damage, do not conduct insulation resistance tests on traffic signal cables after termination.
9. Lock all enclosures and bolt down all ground box covers before applying power to the signal installation.
10. Terminate conduits entering the top of enclosures with a conduit-sealing hub or threaded boss such as meter hub. Install a grounding bushing on all metal conduits not connected to conduit-sealing hub or threaded boss. Bond the grounding bushing to the ground bus with a bonding jumper. Seal all conduits entering enclosures with duct seal or expanding foam. Do not use silicone to seal conduit ends.
11. For all conduits, ensure the burial depth is a minimum of 18". Ensure the minimum burial depth for conduit placed under a roadway is 24".

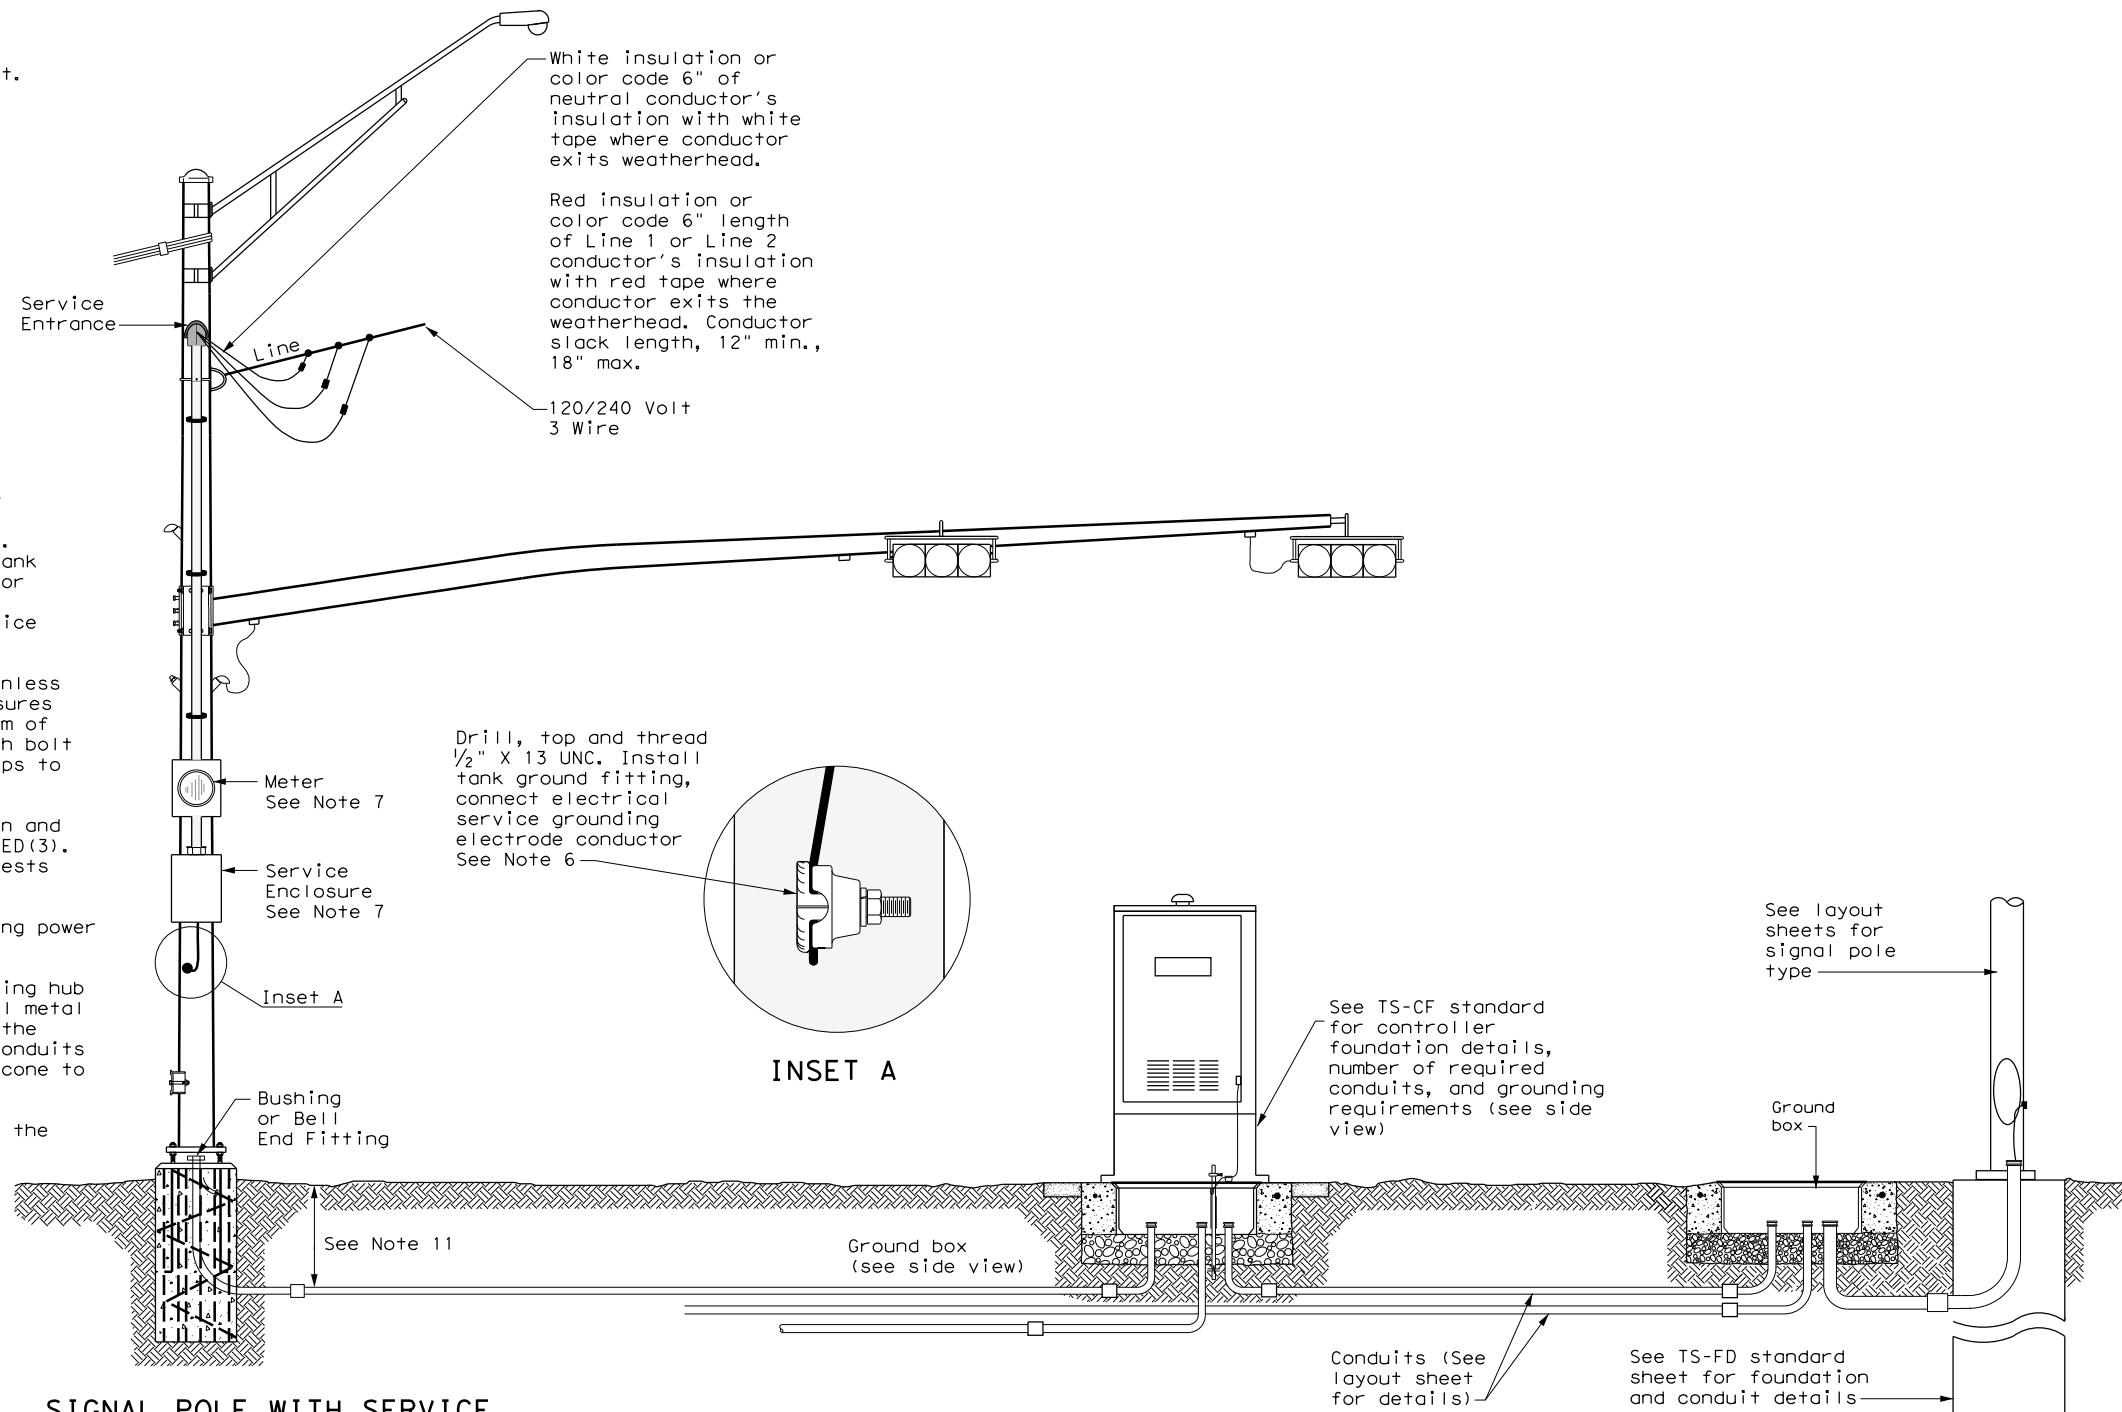

White insulation or color code 6" of neutral conductor's insulation with white tape where conductor exits weatherhead.

Red insulation or color code 6" length of Line 1 or Line 2 conductor's insulation with red tape where conductor exits the weatherhead. Conductor slack length, 12" min., 18" max.

Drill, top and thread 1/2" X 13 UNC. Install tank ground fitting, connect electrical service grounding electrode conductor See Note 6




INSET A

SIGNAL POLE WITH SERVICE

Type T electrical service mounted on signal pole shown as an example. See electrical details, layout sheets, and electrical service data chart for additional details.

SIGNAL CONTROLLER FRONT VIEW

SIGNAL POLE

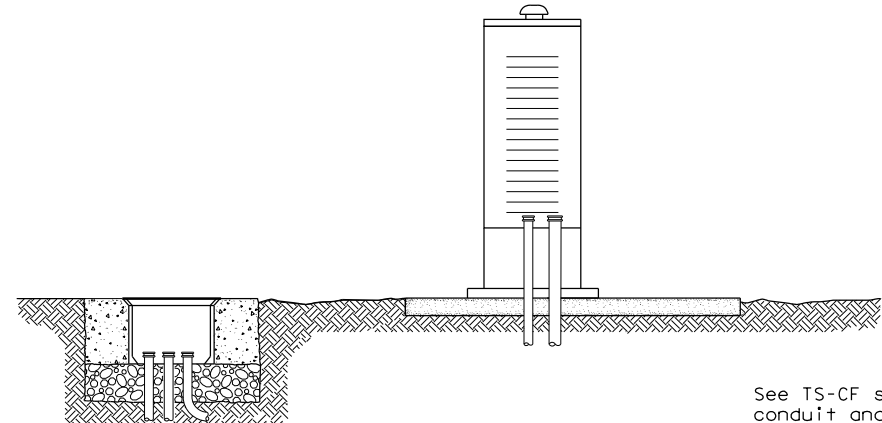

SIGNAL CONTROLLER SIDE VIEW

See TS-CF standard for conduit and grounding requirements. See layout sheets for ground box locations and any additional conduits that are required.

Texas Department of Transportation

 Traffic Operations Division Standard


ELECTRICAL DETAILS				
TYPICAL TRAFFIC SIGNAL				
SYSTEM DETAILS				
ED(8) - 14				
FILE: ed8-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
DIST	COUNTY		SHEET NO.	
AMA	POTTER		93	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another, or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:23:41 PM
 FILE: K:\01509\01509-002T-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\01509-002T-12.dwg


DUCT CABLE & HDPE CONDUIT NOTES

1. Provide duct cable in accordance with Departmental Material Specification (DMS) 11060 "Duct Cable" and Item 622 "Duct Cable." Provide duct cable as listed on the Material Producer List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 622.
2. Provide High-Density Polyethylene (HDPE) conduit in accordance with DMS 11060 and Item 618, "Conduit." Provide HDPE as listed on the MPL on the Department web site under "Roadway Illumination and Electrical Supplies," Item 618.
3. Supply duct cable with a minimum 2 in. diameter, unless otherwise shown in the plans. Provide duct cable and HDPE conduit as shown by descriptive code or on the plans. Bend duct cable and HDPE conduit as recommended by the manufacturer, with a minimum bending radius of 26 in. for 2 in. duct. Follow manufacturers' recommendations when handling duct cable and HDPE conduit reels and during installation of duct cable and HDPE conduit.
4. Do not splice conductors within duct cable or HDPE conduit. Couple duct cable and HDPE entering a ground box or foundation to a PVC elbow. When galvanized steel RMC elbows are called for in the plans and any portion of the RMC elbow is buried less than 18" from possible contact, ground the RMC elbow.
5. Furnish and install duct cable with factory installed conductors, sized as shown in the plans and as required by the National Electrical Code (NEC). The NEC contains specific requirements for duct cable in Article, "Nonmetallic Underground Conduit with Conductors: Type NUCC."
6. When conduit casing is called for in the plans, extend duct cable or HDPE conduit through the conduit casing in one continuous length without connection to the casing.
7. Seal the ends of duct cable or HDPE conduit with duct seal, expandable foam, or other approved method after completing the pull tests required by Item 622.
8. Provide minimum cover of 24 in. under roadways, 18 in. in other locations, or as shown on the plans.
9. Furnish and install listed fittings to couple duct cable or HDPE conduit to other types of conduit. Duct cable and HDPE conduit may be field-threaded and spliced with PVC or RMC threaded couplings; connected with listed tie-wrap fittings; connected using listed coupling made of HDPE with stainless steel external banding clamps and locking rings; connected with approved electrofusion conduit couplings; or connected using an approved chemical fusion method using an epoxy or adhesive specifically designed for HDPE couplings and connectors all installed in accordance with their manufacturer's instructions. Do not use PVC glue on HDPE. Do not use water pipe fittings, or connect conduit with heat shrink tubing.

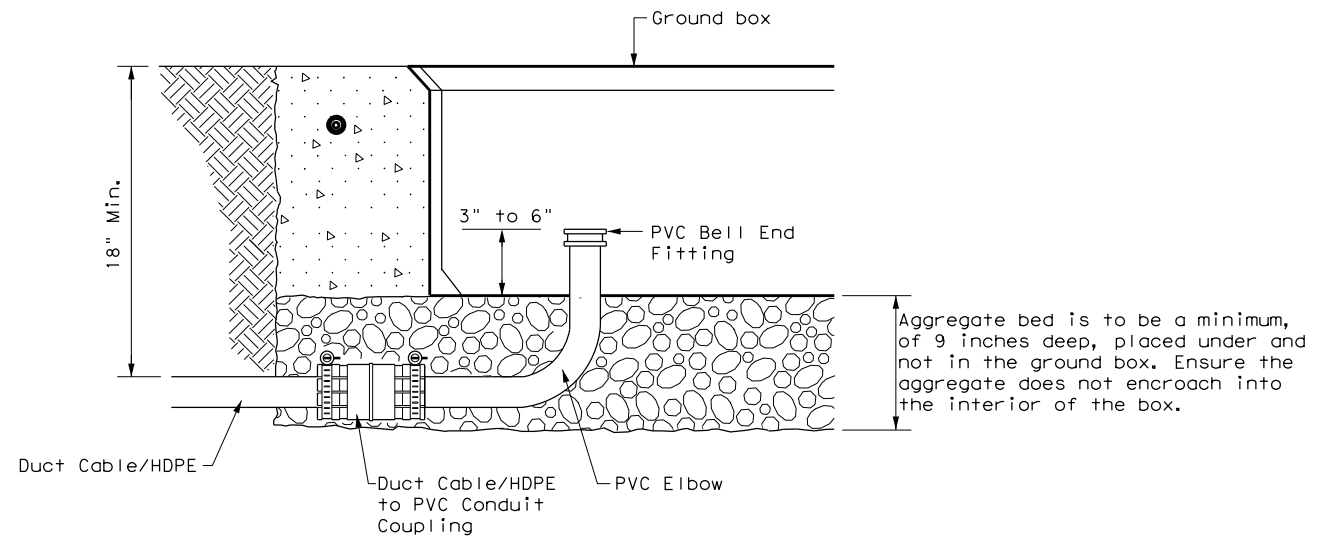


DUCT CABLE/HDPE AT GROUND BOX


When the upper end of an RMC EII does not enter the ground box, it may be extended with a SCH-40 PVC conduit nipple and bell end, provided there is a minimum of 18" of cover over all parts of the elbow. If not, a rigid extension and ground bushing is required.

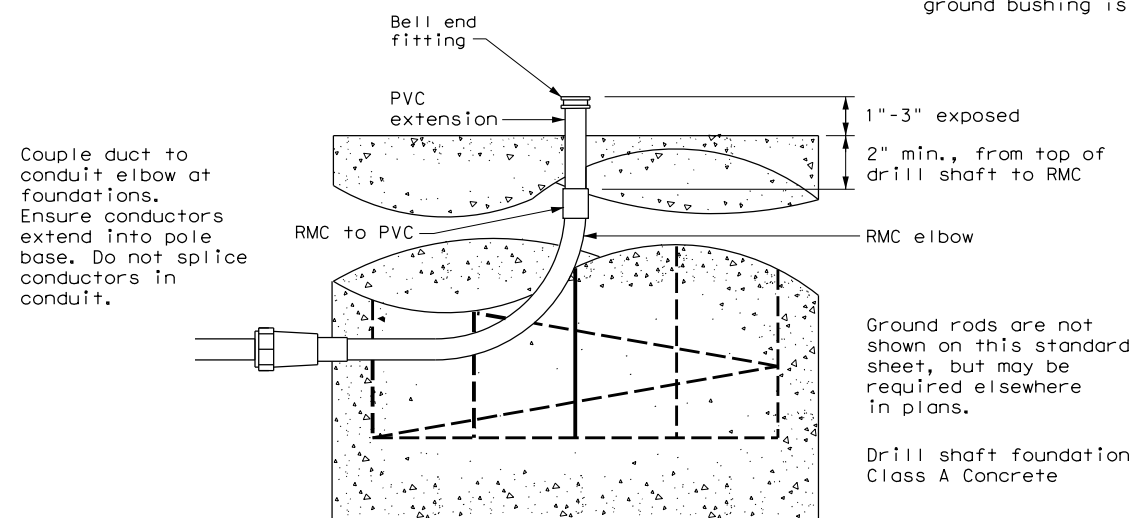


DUCT CABLE / HDPE AT FOUNDATION

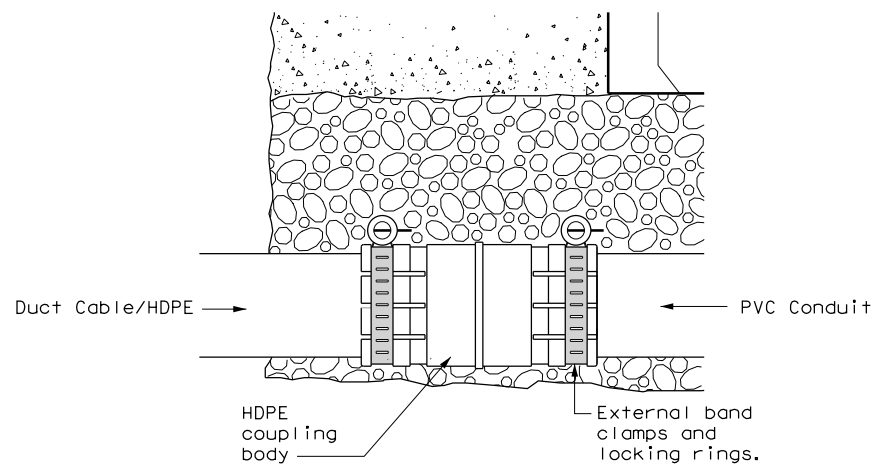

DUCT CABLE/HDPE TO PVC

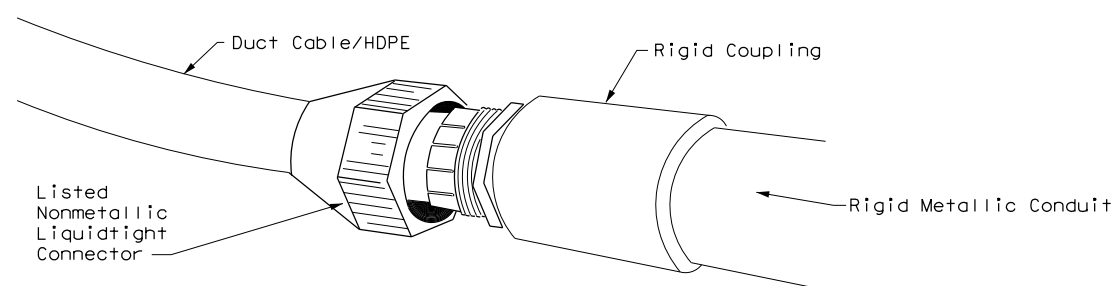







DUCT CABLE/HDPE TO RMC

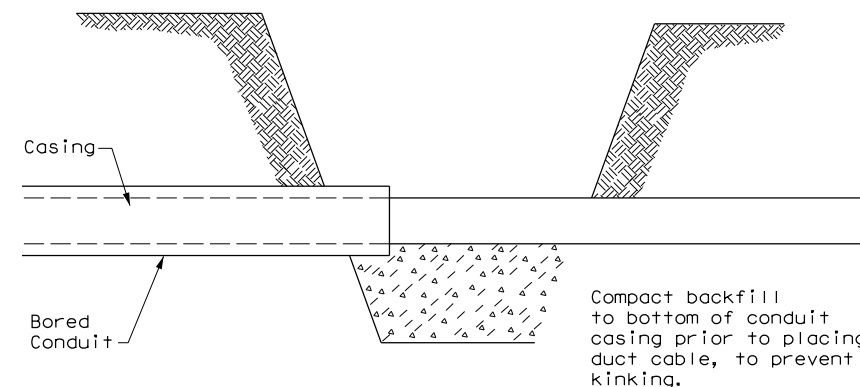

BORE PIT DETAIL

				Traffic Operations Division Standard	
ELECTRICAL DETAILS DUCT CABLE/ HDPE CONDUIT					
ED(11)-14					
FILE:	ed11-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		0904	00	220	VARIOUS
		DIST	COUNTY	SHEET NO.	
		AMA	POTTER	94	

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

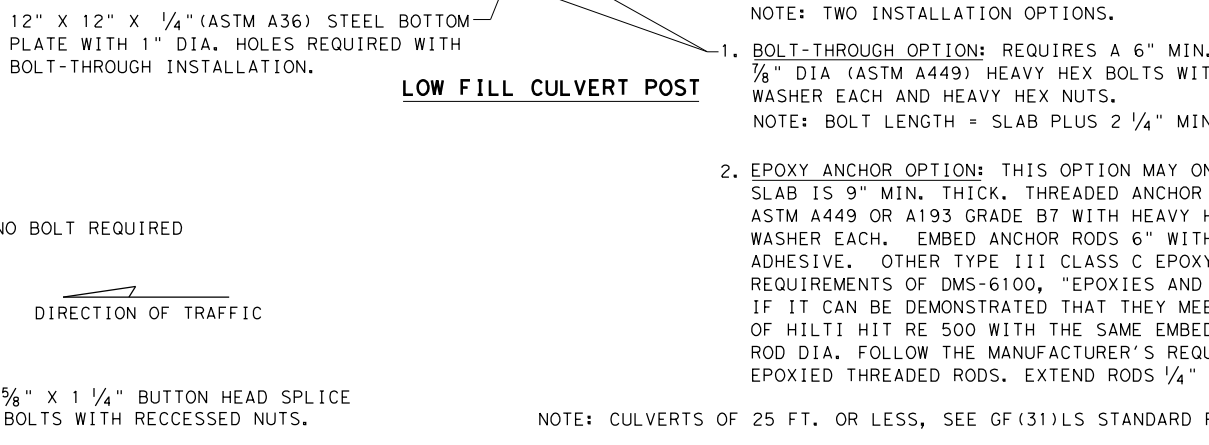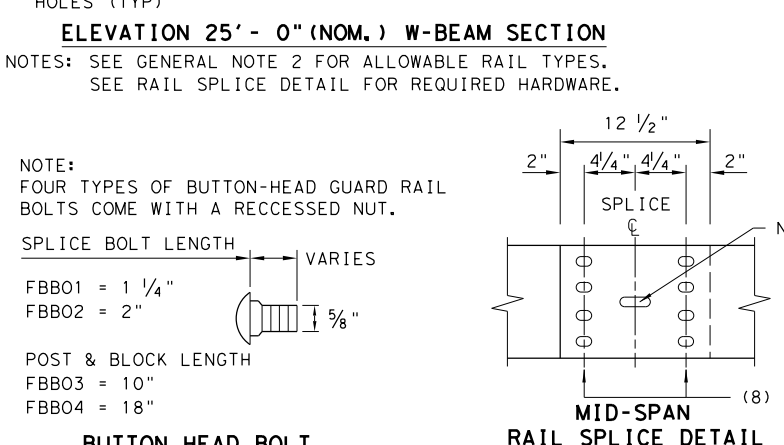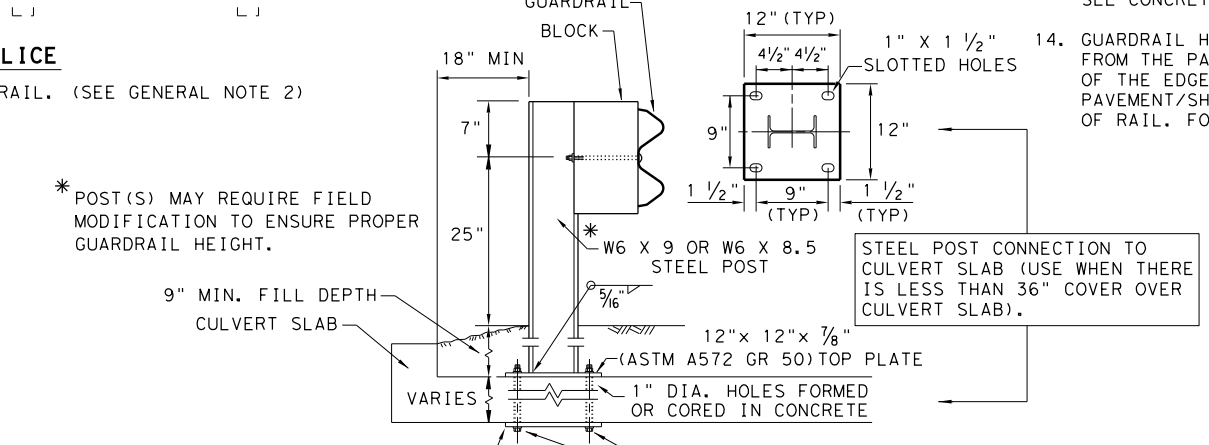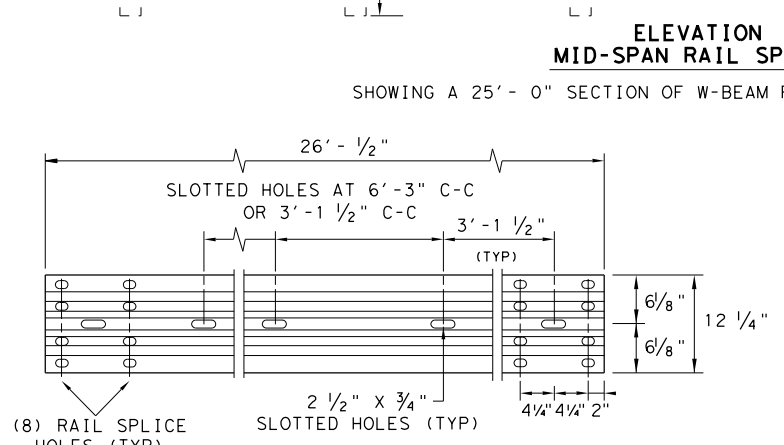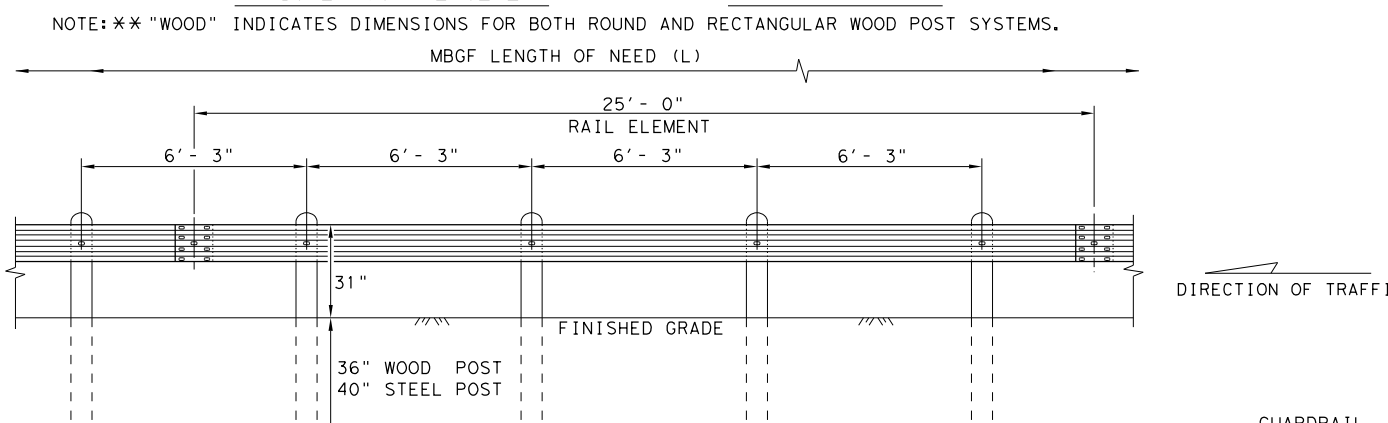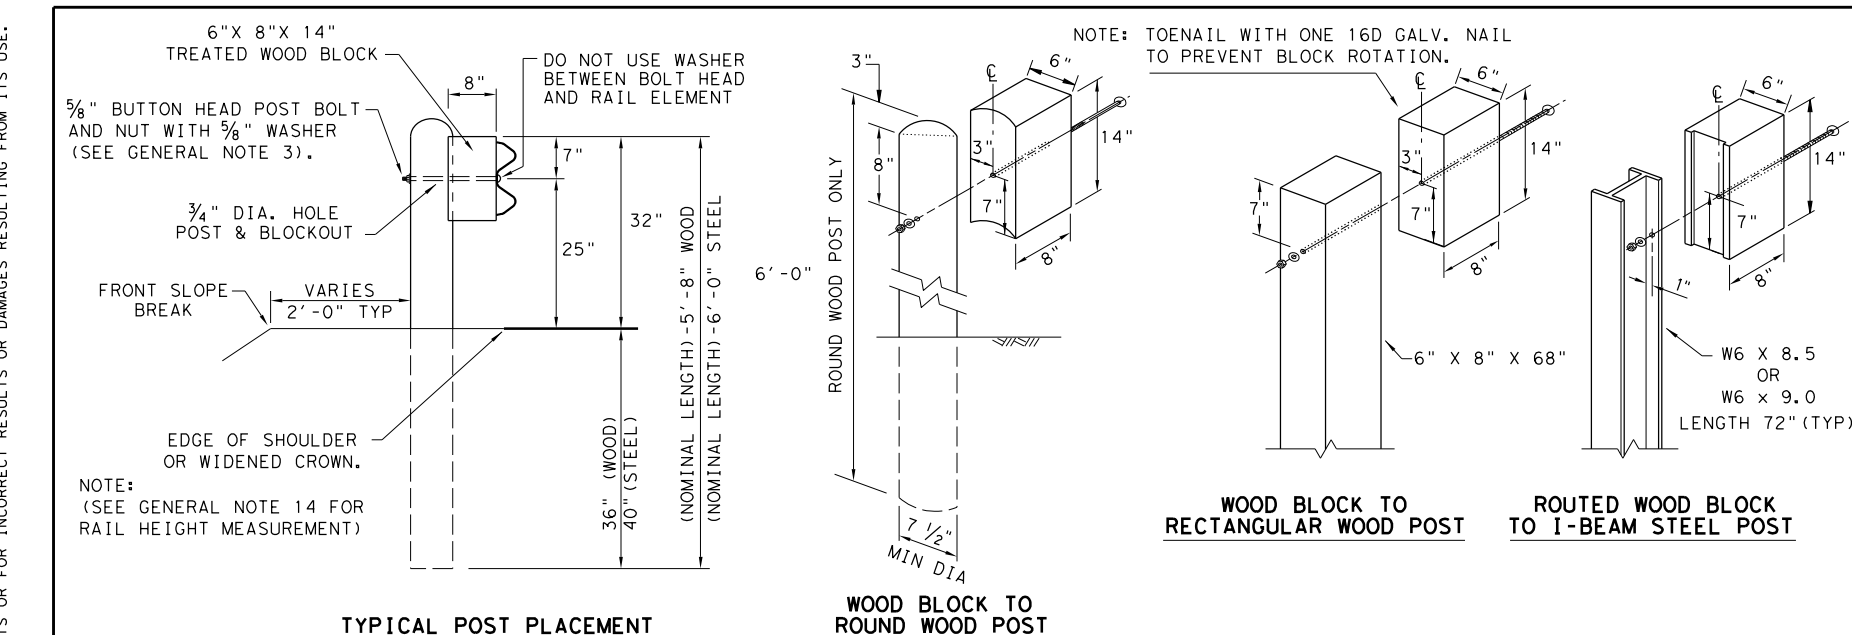

DATE:

FILE:

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.


NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

- GENERAL NOTES**
1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
 2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
 3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC160) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
 4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
 6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
 7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
 8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
 9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
 10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
 11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
 12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
 13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
 14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

		Design Division Standard	
METAL BEAM GUARD FENCE			
TL-3 MASH COMPLIANT			
GF(31)-19			
FILE: gf3119.dgn	DN: TXDOT	CK: KM	DW: VP
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	0904	00	220
	DIST	COUNTY	SHEET NO.
	AMA	POTTER	95

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE:
FILE:

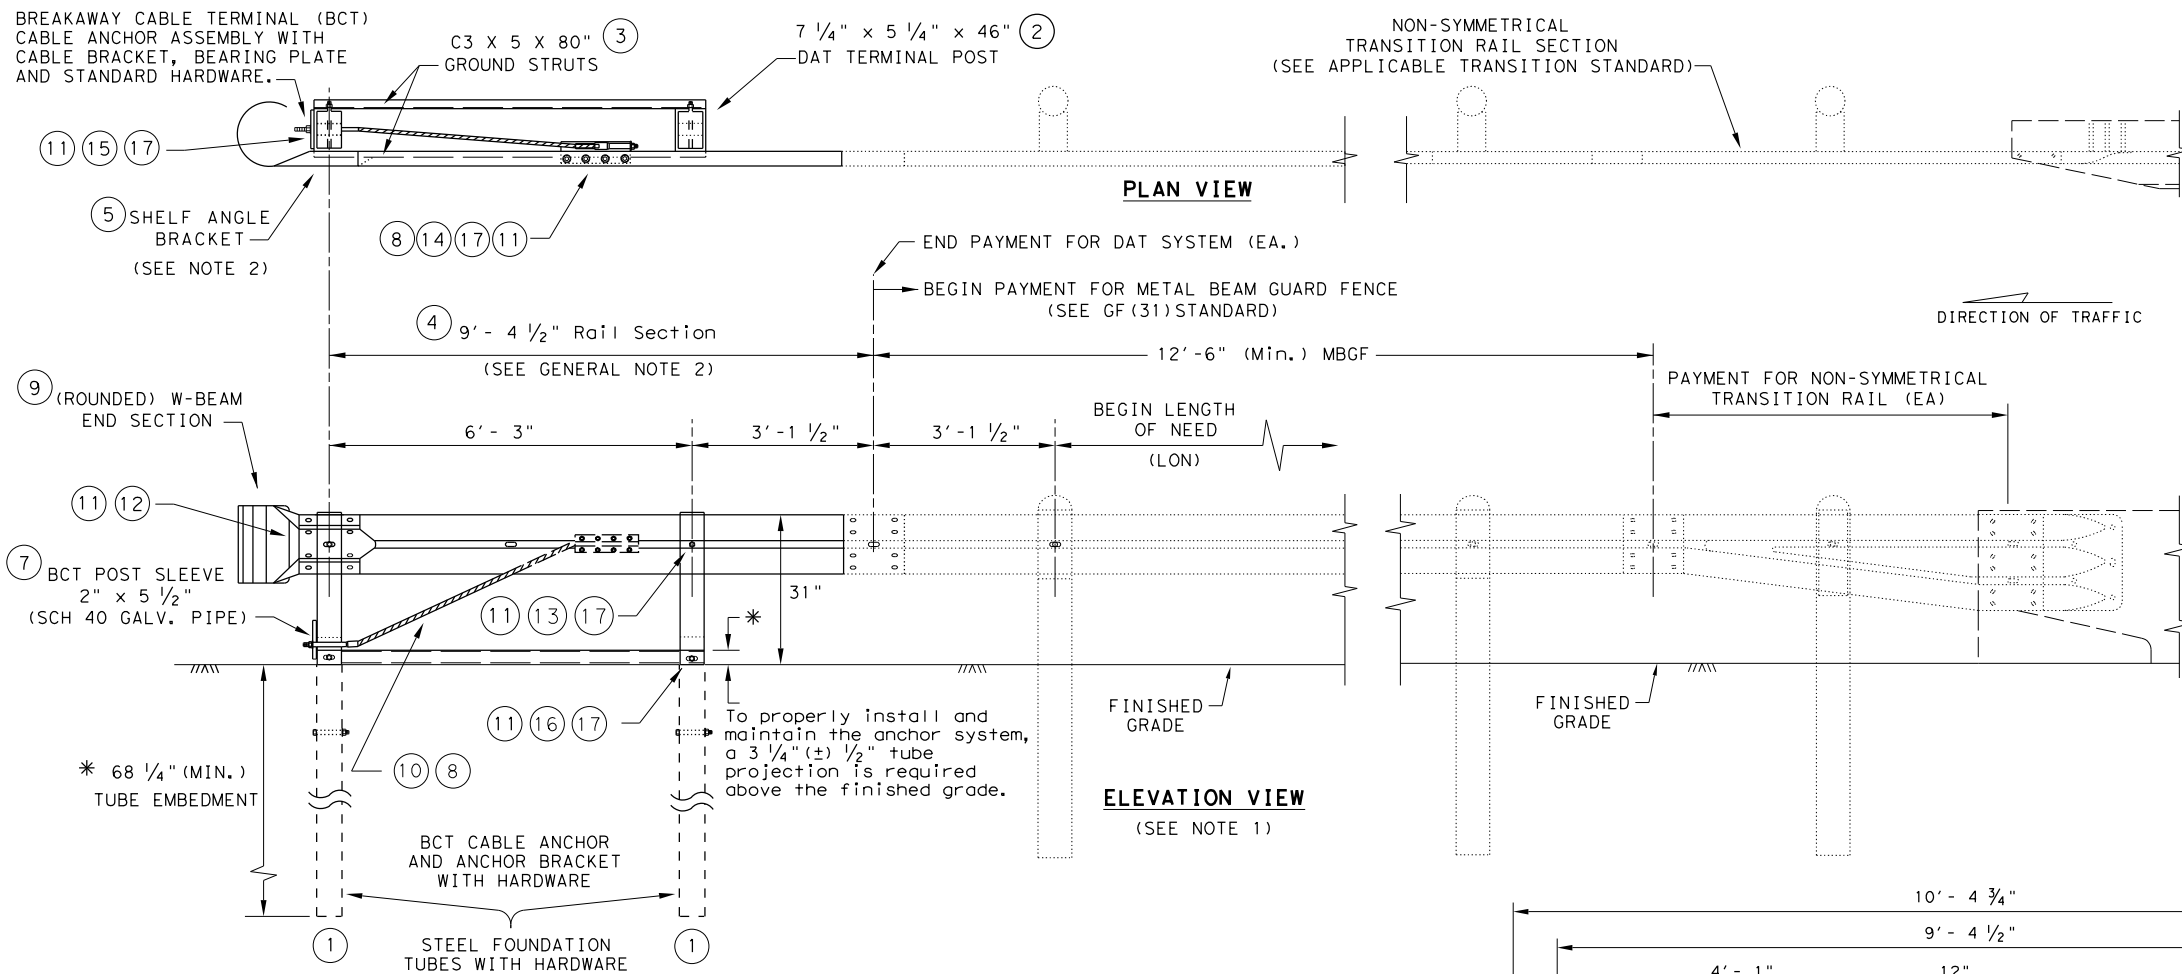

NON-SYMMETRICAL
TRANSITION RAIL SECTION
(SEE APPLICABLE TRANSITION STANDARD)

DIRECTION OF TRAFFIC

DOWNSTREAM ANCHOR TERMINAL (DAT)

NOTE: ONLY FOR DOWNSTREAM USE, WHEN LOCATED OUTSIDE THE HORIZONTAL CLEARANCE AREA OF OPPOSING TRAFFIC.









GENERAL NOTES

1. THE DETAIL SHOWN IS THE MINIMUM LENGTH OF NEED (LON) FOR A DOWNSTREAM ANCHOR TERMINAL (DAT) CONNECTED TO A CONCRETE RAIL.
2. THE RAIL SECTION AT THE END POST IS SUPPORTED BY THE SHELF ANGLE BRACKET. THE RAIL ELEMENT IS NOT ATTACHED TO THE END POST.
3. THE FOUNDATION TUBES SHALL NOT PROJECT MORE THAN 3 3/4" ABOVE THE FINISHED GRADE.
4. ALL HARDWARE FOR DAT SHALL BE ASTM A307 UNLESS OTHERWISE SHOWN.
5. REFER TO GF (31) SHEET FOR TERMINAL CONNECTION DETAILS.

MOW STRIP INSTALLATION

IF A MOW STRIP IS REQUIRED WITH THE DAT INSTALLATION THE LEAVE-OUT AREA AROUND THE STEEL FOUNDATION TUBES AND THE TWO CHANNEL STRUTS MAY BE OMITTED. THIS WILL REQUIRE A FULL POUR AT THE FOUNDATION TUBES.

#	(DAT) PARTS LIST	QTY
1	STEEL FOUNDATION TUBE	2
2	DAT TERMINAL POST	2
3	CHANNEL STRUT	2
4	TERMINAL RAIL ELEMENT	1
5	SHELF ANGLE BRACKET	1
6	BCT BEARING PLATE	1
7	BCT POST SLEEVE	1
8	GUARDRAIL ANCHOR BRACKET	1
9	(ROUNDED) W-BEAM END SECTION	1
10	BCT CABLE ANCHOR	1
11	RECESSED NUT, GUARDRAIL	20
12	1 1/4" BUTTON HEAD BOLT	4
13	10" BUTTON HEAD BOLT	2
14	5/8" X 2" HEX HEAD BOLT	8
15	5/8" X 8" HEX HEAD BOLT	4
16	5/8" X 10" HEX HEAD BOLT	2
17	5/8" FLAT WASHER	18

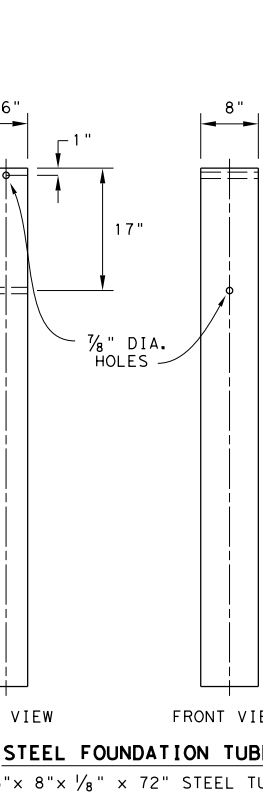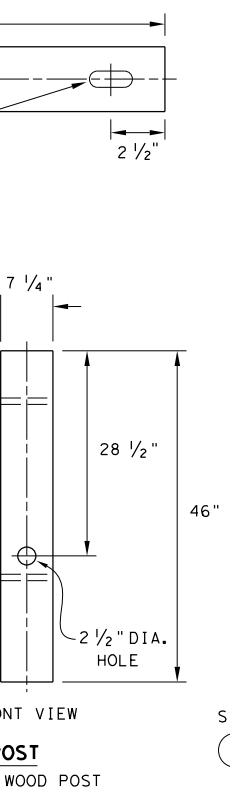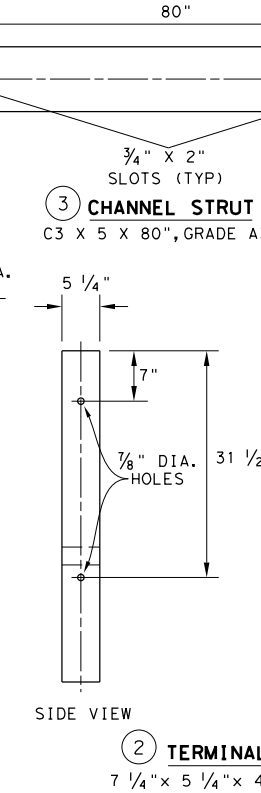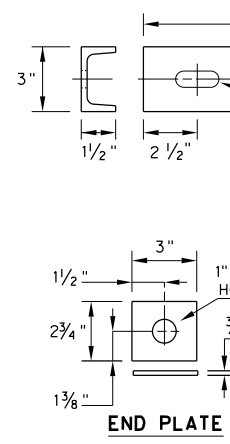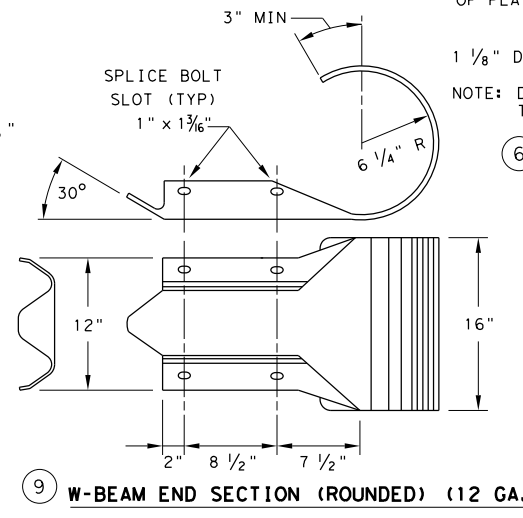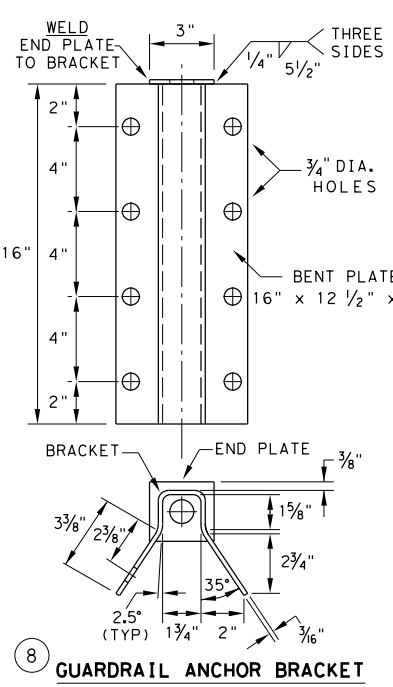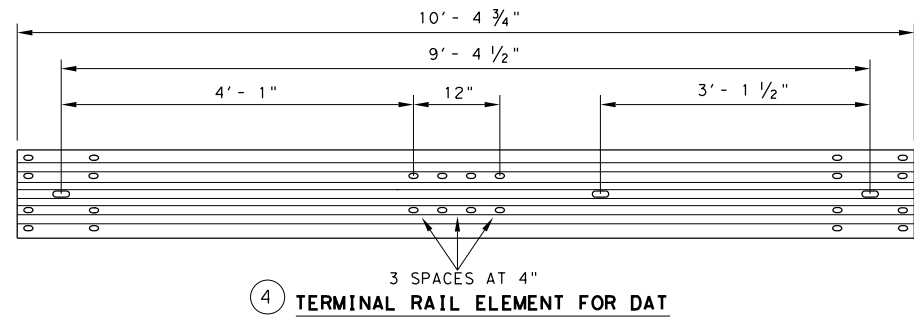


Texas Department of Transportation Design Division Standard

METAL BEAM GUARD FENCE (DOWNSTREAM ANCHOR TERMINAL) TL-3 MASH COMPLIANT GF (31) DAT-19

FILE: gf31dat19.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CGL/AG
© TXDOT: NOVEMBER 2019 REVISIONS	CONT	SECT	JOB	HIGHWAY
	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	96	


DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. THE USE OF THIS STANDARD FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

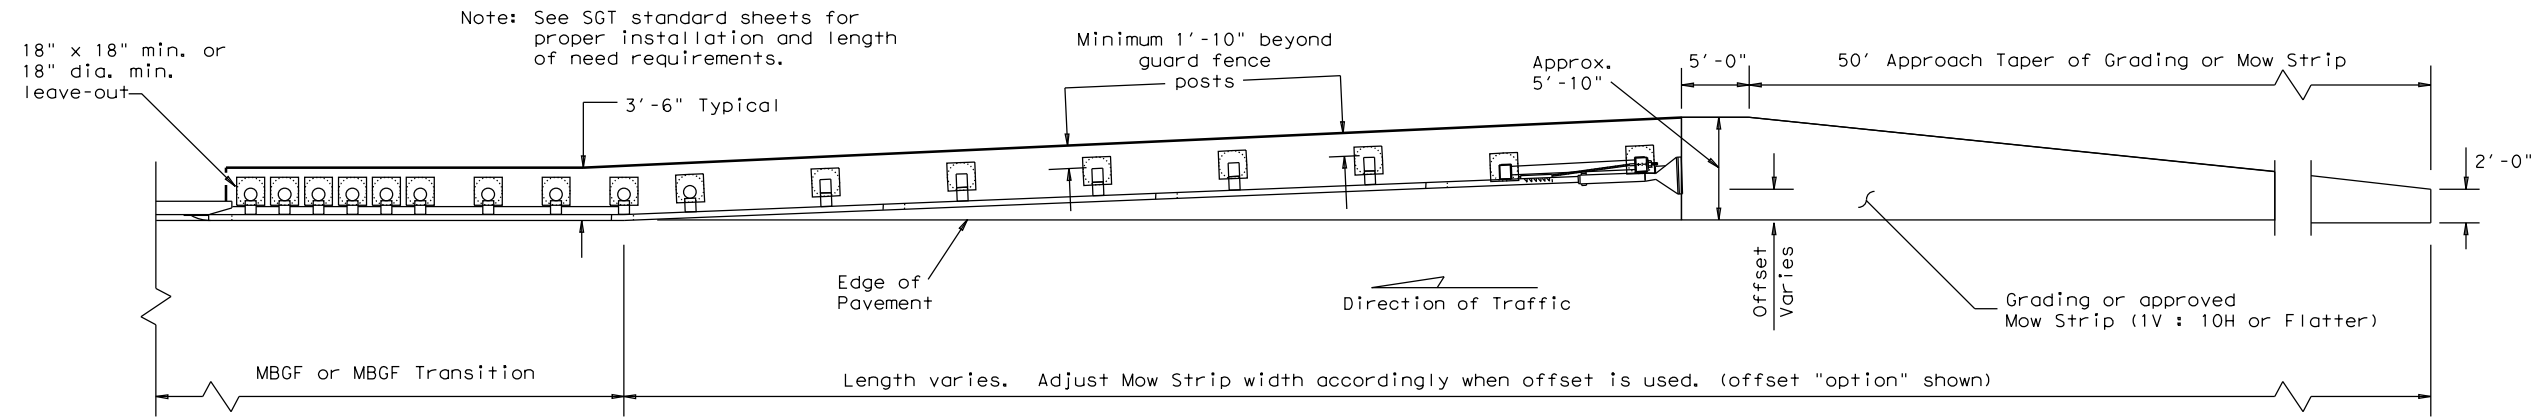

Note: See SGT standard sheets for proper installation and length of need requirements.


GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS

Note: Site Condition(s)
 Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments.
 Approach grading or mow strip may be decreased or eliminated, as directed by the Engineer.

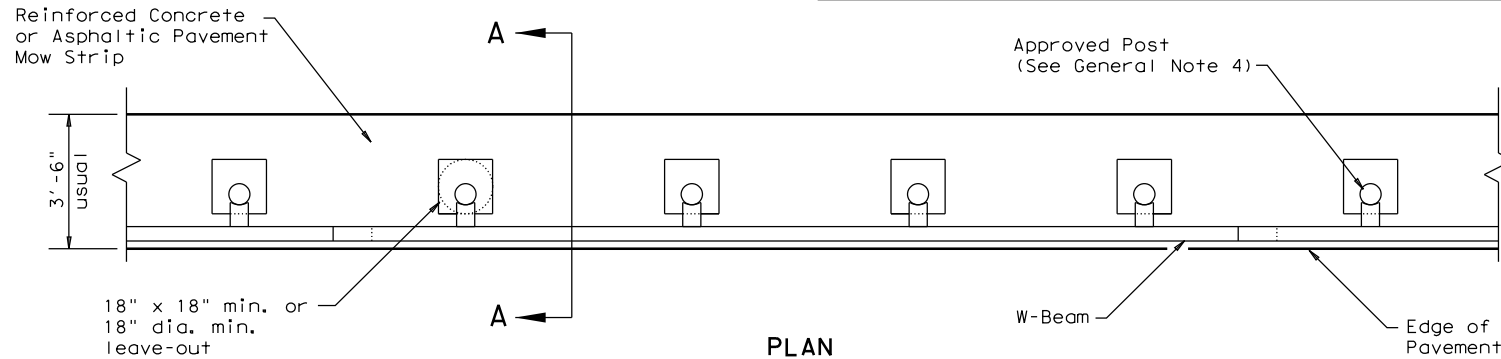


PLAN

GF(31) shown with Mow Strip
 (See GF(31) standard sheet for proper installation)

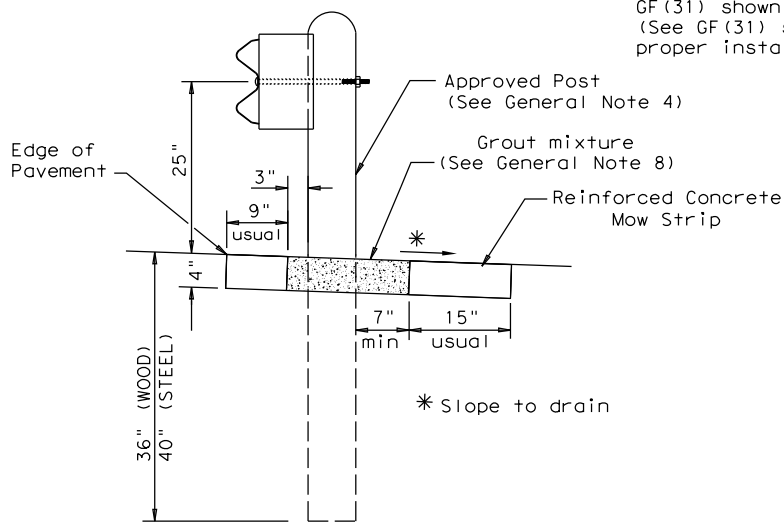

SECTION A-A


Typical

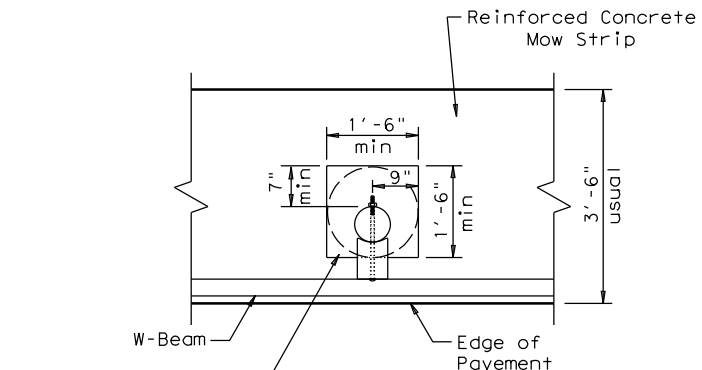

MOW STRIP DETAIL


Reinforced Concrete Mow Strip with 18\"/>

- GENERAL NOTES**
1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments. See applicable GF(31) MBGF or GF(31) Transition Standard sheet for additional information.
 2. Mow strips shall be reinforced concrete with (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
 3. The leave-out behind the post shall be a minimum of 7".
 4. Only steel (W6 x 8.5 or W6 x 9.0), or 7 1/2" Dia. round wood posts are acceptable for use in the mow strip. See GF(31) Standard for additional details.
 5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
 6. Thickness of the mow strip will be 4".
 7. The limits of payment for reinforced concrete will include leave-outs for the posts.
 8. The leave-outs shall be filled with a Grout mixture consisting of: 2719 pounds sand, 188 pounds Type 1 or II cement, and 550 pounds of water per cubic yard, with a 28-day compressive strength of approximately 230 psi or less. Provide grout with a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested Maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of riprap mow strip.

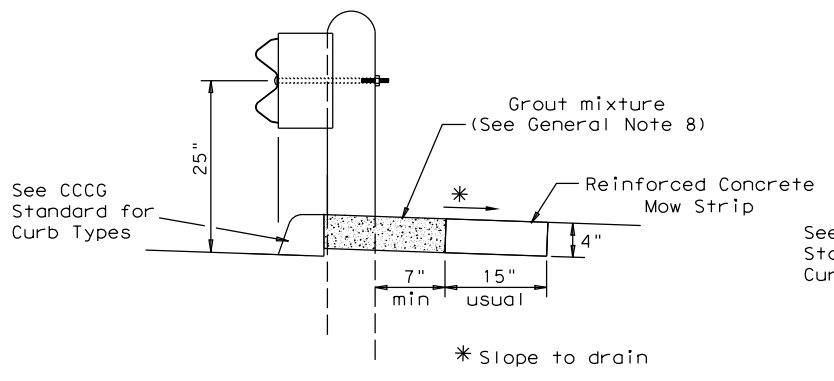


CURB OPTION (1)

This option will increase the post embedment throughout the system.

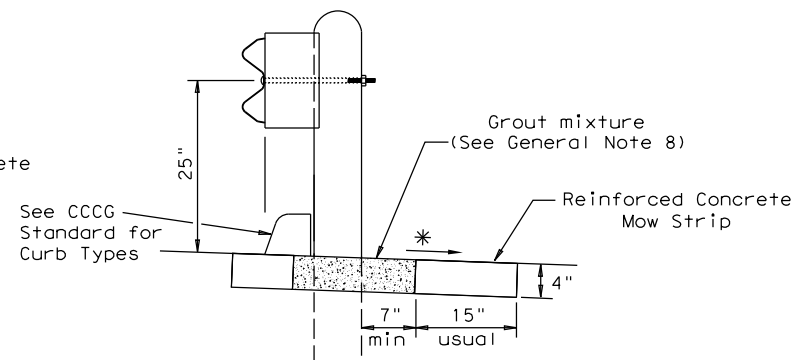

CURB OPTION (2)

Curb shown on top of mow strip

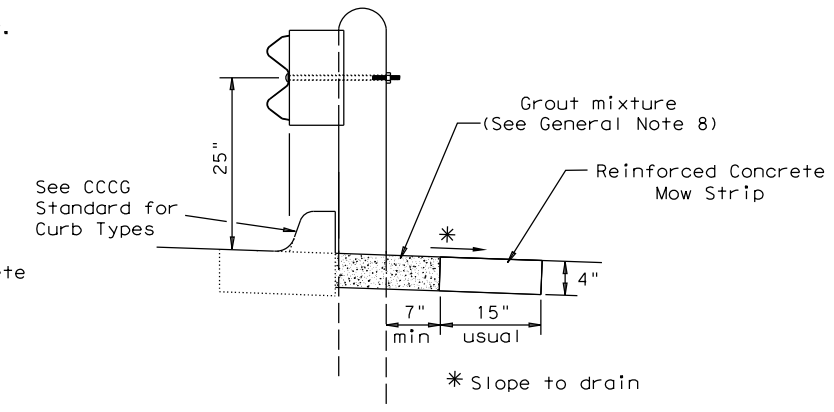


CURB OPTION (3)

		<i>Design Division Standard</i>	
METAL BEAM GUARD FENCE (MOW STRIP)			
TL-3 MASH COMPLIANT			
GF (31) MS-19			
FILE: gf31ms19.dgn	DN: TxDOT	CK: KM	DW: VP
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	0904	00	220
DIST	COUNTY	SHEET NO.	
AMA	POTTER	97	

DATE:
FILE:






DATE: 8/1/2023
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\CAD\standards\gf31tr+1320_.dgn
 DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

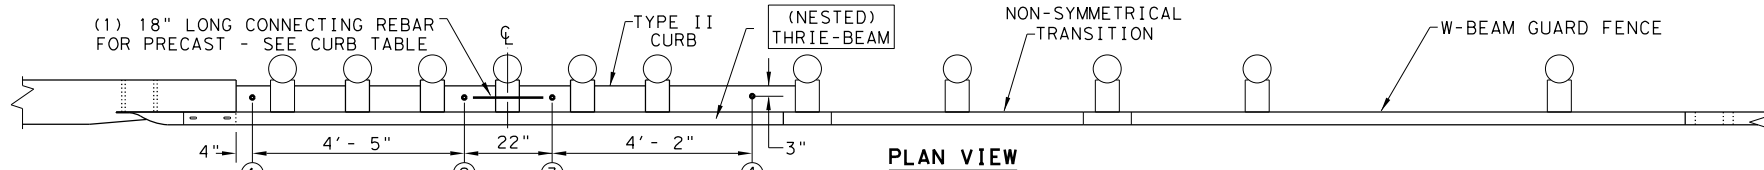

- (5) 1" DIA. HOLES.
- (5) 7/8" DIA. HEAVY HEX HEAD BOLTS (FACING TRAFFIC SIDE) (ASTM F3125 GR A325 OR A449).
- (10) 1 3/4" O.D. WASHER UNDER EACH HEX BOLT HEAD AND NUT.
- (5) 7/8" DIA. HEAVY HEX NUTS (ASTM A194 OR A563).


NOTE: HEAVY HEX BOLT LENGTH WILL VARY DEPENDING ON WIDTH CONCRETE RAIL, LEAVE 1" OF BOLT LENGTH PAST THE 7/8" HEX NUT. TRIM AS REQUIRED.

NOTE: CURB IS A REQUIRED COMPONENT FOR THE TRANSITION TO FUNCTION PROPERLY. SEE GENERAL NOTES: 2-4 AND 16-17.

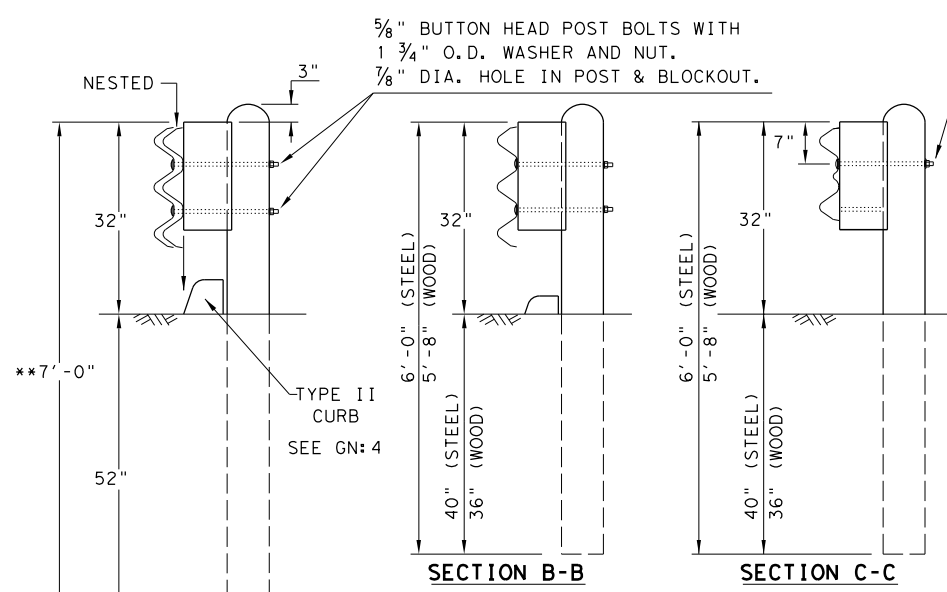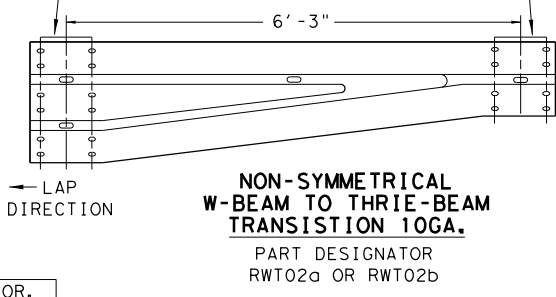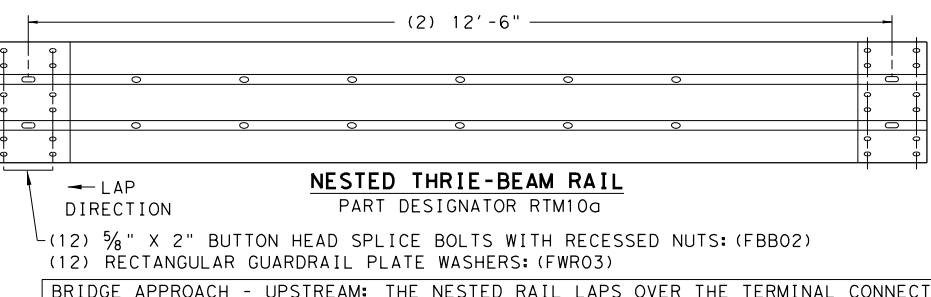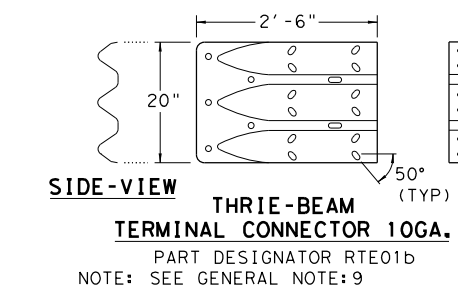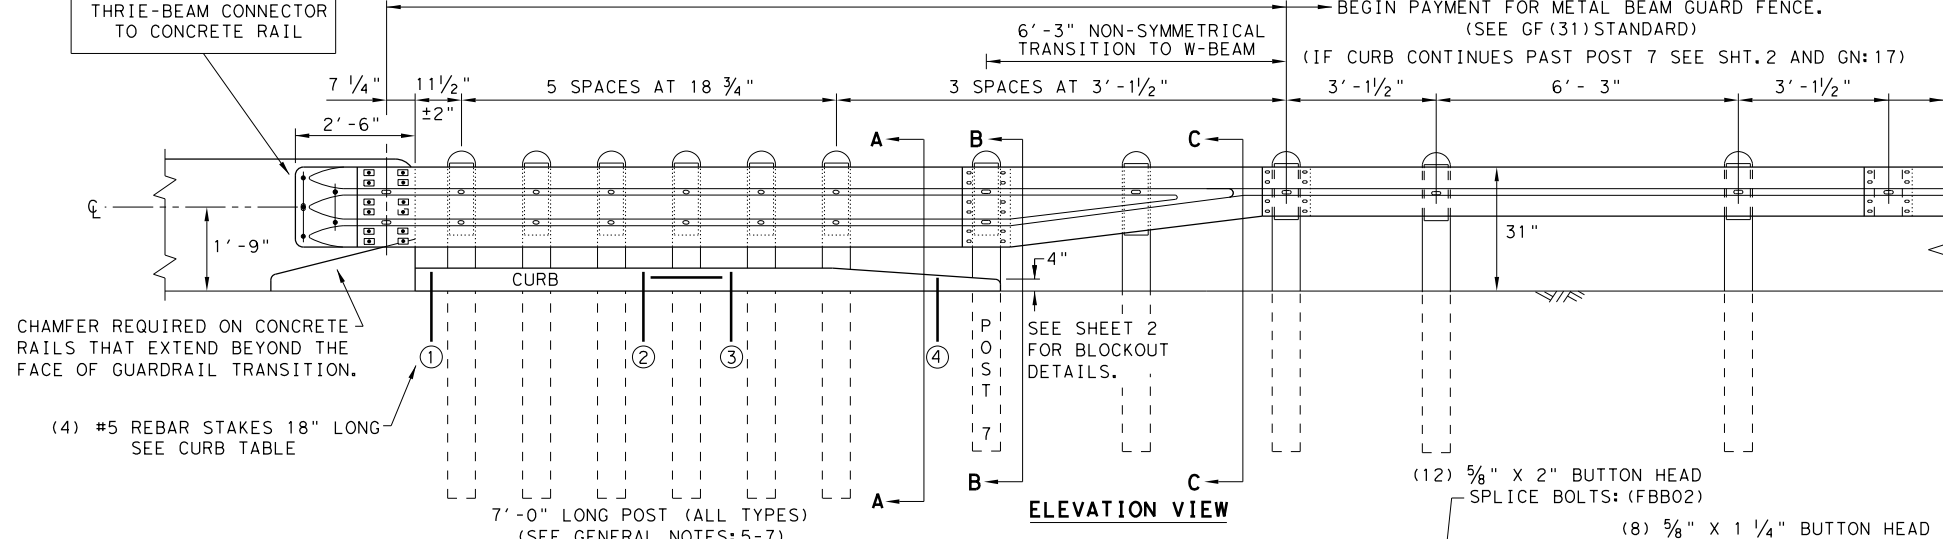

THRIE-BEAM TERMINAL - CURB TABLE	
PRECAST CURB FULL LENGTH EQUALS 12'-2" THE PRECAST CURB MAY BE FORMED INTO TWO SECTIONS.	
CURB (1) LENGTH 5'-8"	CURB (2) LENGTH 6'-6"
TAPER CURB (2) TO A HEIGHT OF 4" AT POST 7	
CONNECTING PRECAST CURB SECTIONS (1) & (2):	
FORM OR CORE 1" DIA. HOLE 9" LONG INTO EACH CURB END. USE (1) #5 GR.60 REBAR 18" LONG TO CONNECT BOTH CURBS.	
SECURING PRECAST OR CAST-IN-PLACE TO FINISHED GRADE *:	
FORM OR CORE (4) 1" DIA. HOLES, SEE PLAN AND ELEVATION VIEWS FOR HOLE LOCATIONS. DRIVE (4) #5 GR.60 REBAR STAKES 18" LONG INTO THE GROUND AND 1/2" BELOW TOP OF CURB.	
FILL HOLES WITH APPROVED GROUT MIXTURE.	

* NOTES: NOT NEEDED FOR CAST-IN-PLACE. SEE TYPE II CURB DETAIL FOR REBAR AND COVER REQUIREMENTS. PERCUSSION DRILLING IS NOT PERMITTED WITH: TYPE II CURB, BRIDGE RAIL OR CONCRETE TRAFFIC RAIL.

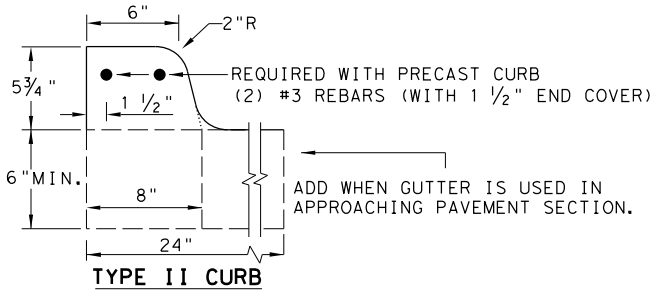

NOTE: OPTIONS FOR TYPE II CURB:
 1. PRECAST
 2. CAST-IN-PLACE

GENERAL NOTES

1. CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
2. CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET. WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5-3/4" HEIGHT); SEE CURRENT CCG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE:17 FOR CIRCUMSTANCES WHERE CURB CONTINUES PAST POST 7.
3. CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
4. UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
5. FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
6. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF (31) STANDARD SHEET.
7. THE POST LENGTH SHALL BE MARKED ON ALL 7'-0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 5/8" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
8. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
9. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
10. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16a) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
11. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
12. CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
13. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
14. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TxDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
15. REFER TO GF (31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
16. THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
17. IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION, (SEE SHT.2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED) (TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED) (STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT.2 FOR ADDITIONAL INFORMATION.

HIGH-SPEED TRANSITION
SHEET 1 OF 2

		Design Division Standard
METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-3 MASH COMPLIANT		
GF (31) TR TL3-20		
FILE: gf31tr+1320.dgn	DN: TxDOT	CK: KM
© TxDOT: NOVEMBER 2020	CONT: 0904	SECT: 00
REVISIONS	JOB: 220	HIGHWAY: VARIOUS
DIST: AMA	COUNTY: POTTER	SHEET NO.: 98


DISCLAIMER:
 THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER.
 TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 8/1/2023
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\CAD\standards\gf31trtl320_.dgn


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

END PAYMENT FOR METAL BEAM GUARD FENCE TRANSITION.
 BEGIN PAYMENT FOR METAL BEAM GUARD FENCE.


(SEE GF (31) STANDARD SHEET)

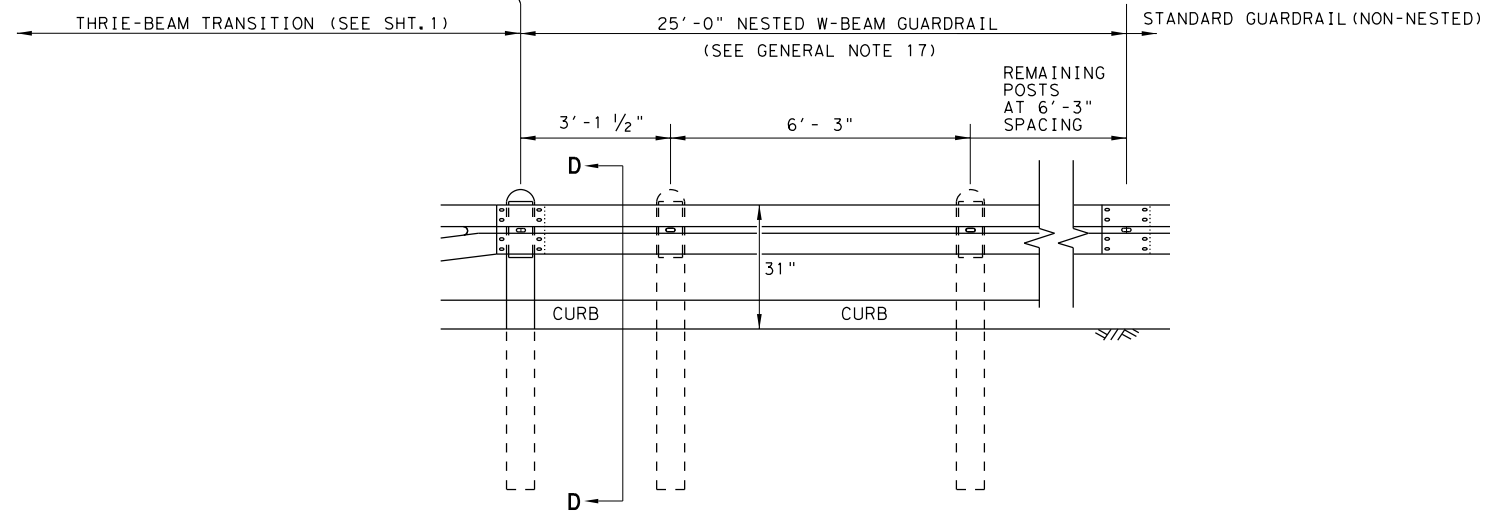

ELEVATION VIEW

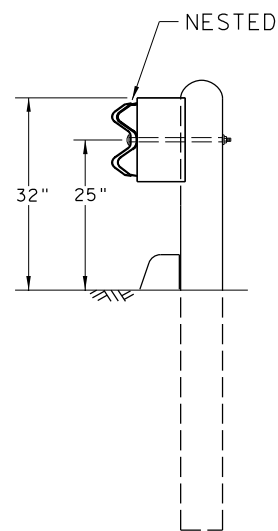

SECTION D-D

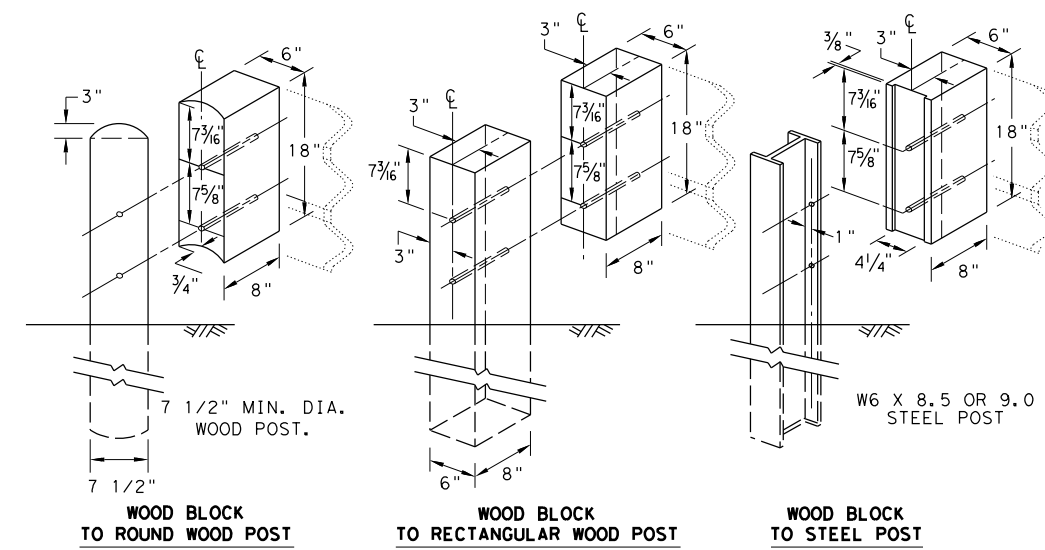

THRIE BEAM TRANSITION BLOCKOUT DETAILS

HIGH-SPEED TRANSITION

SHEET 2 OF 2











METAL BEAM GUARD FENCE
 THRIE-BEAM TRANSITION
 TL-3 MASH COMPLIANT

GF (31) TR TL3-20

FILE: gf31trtl320.dgn	DN: TxDOT	CK: KM	DW: KM	CK: CGL/AG
© TXDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	99	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:44 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS-V2 Design Phase of ADSS and Poles.dwg

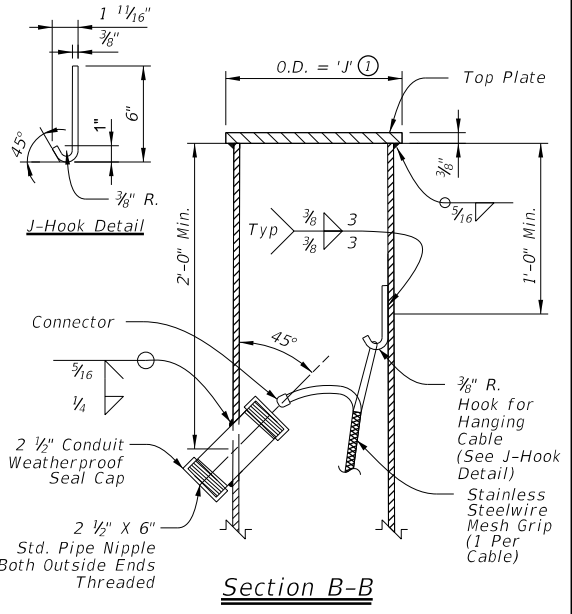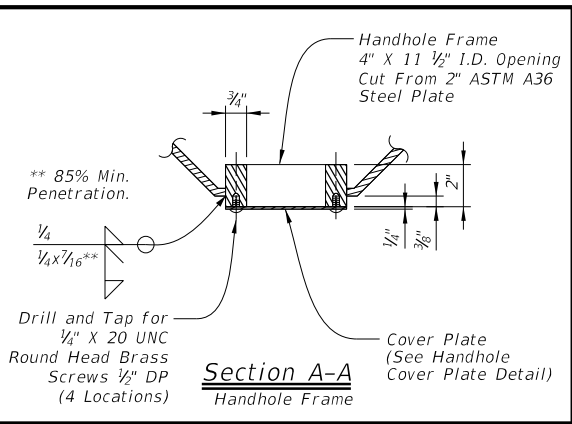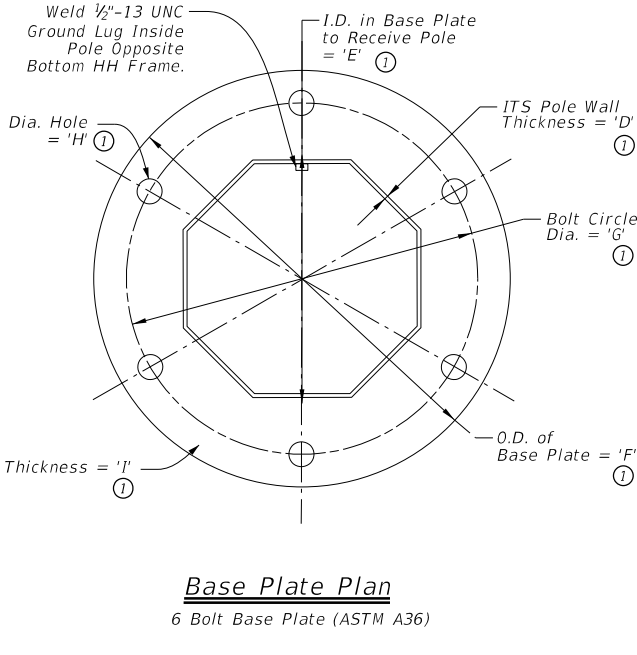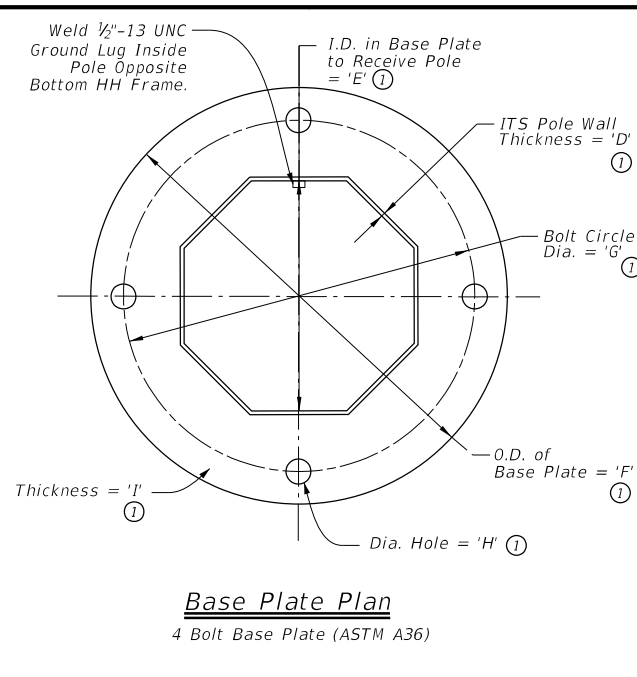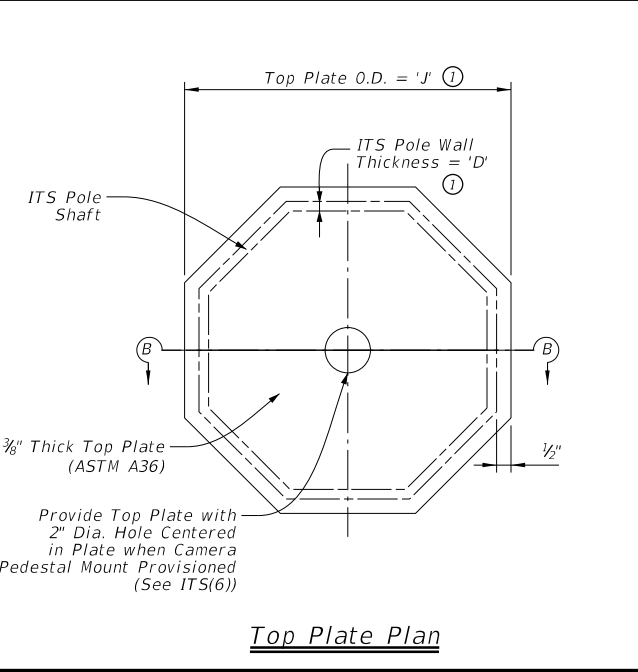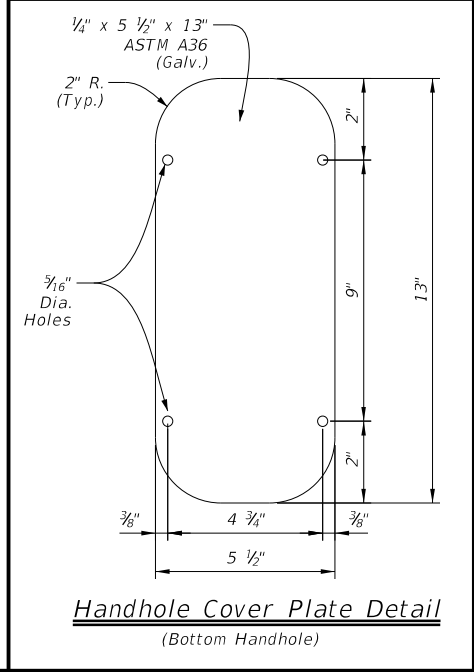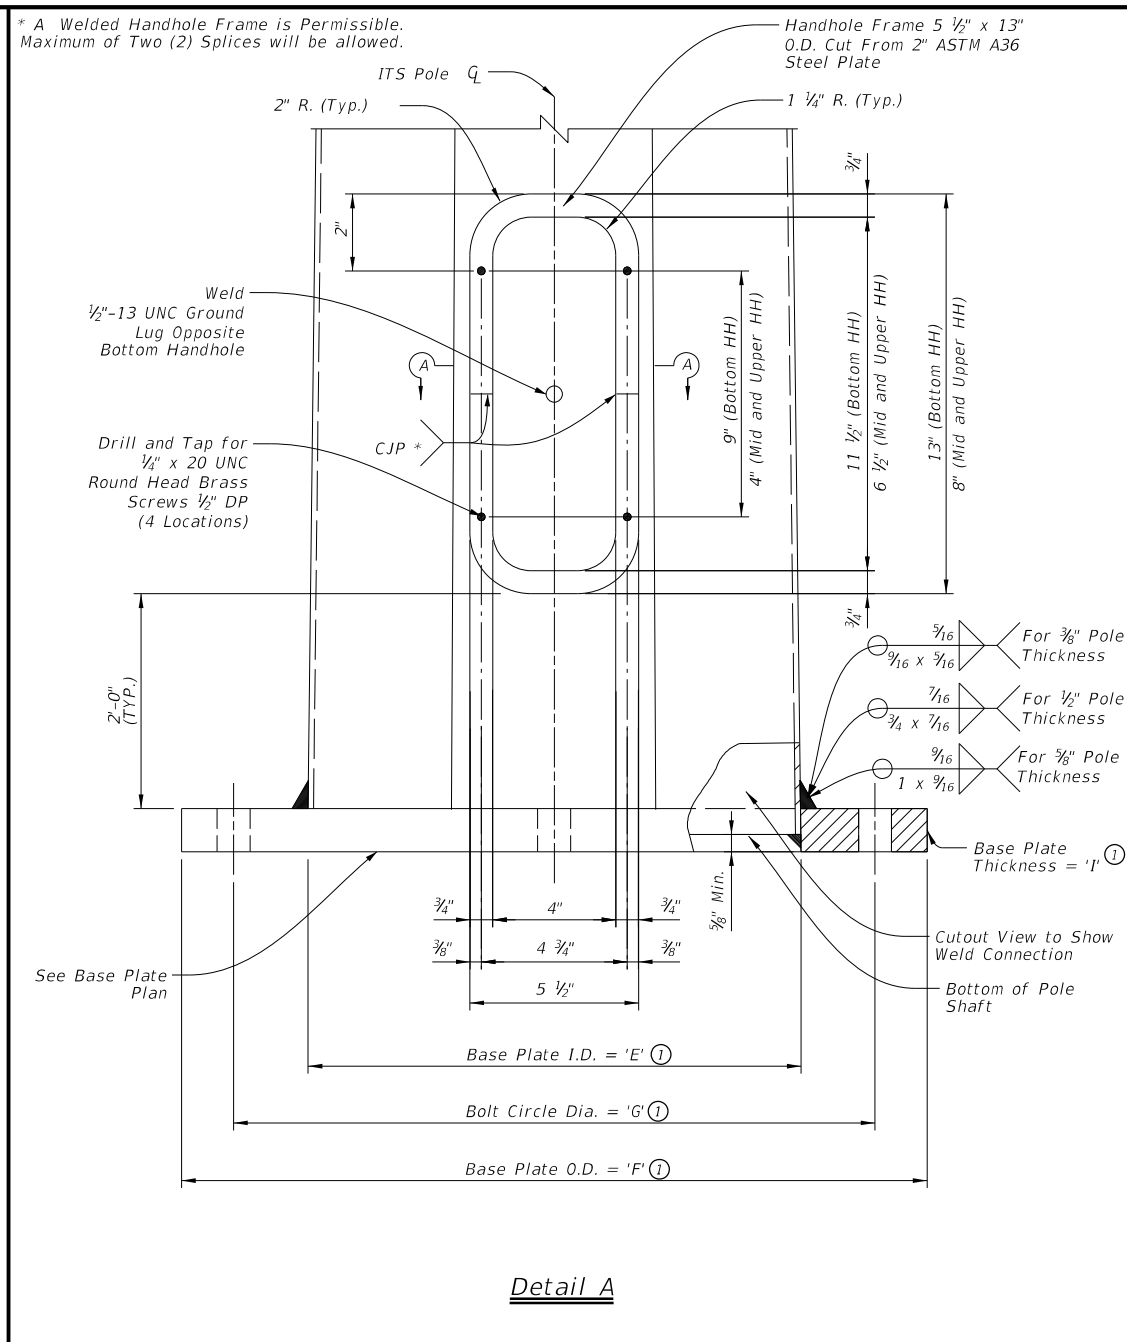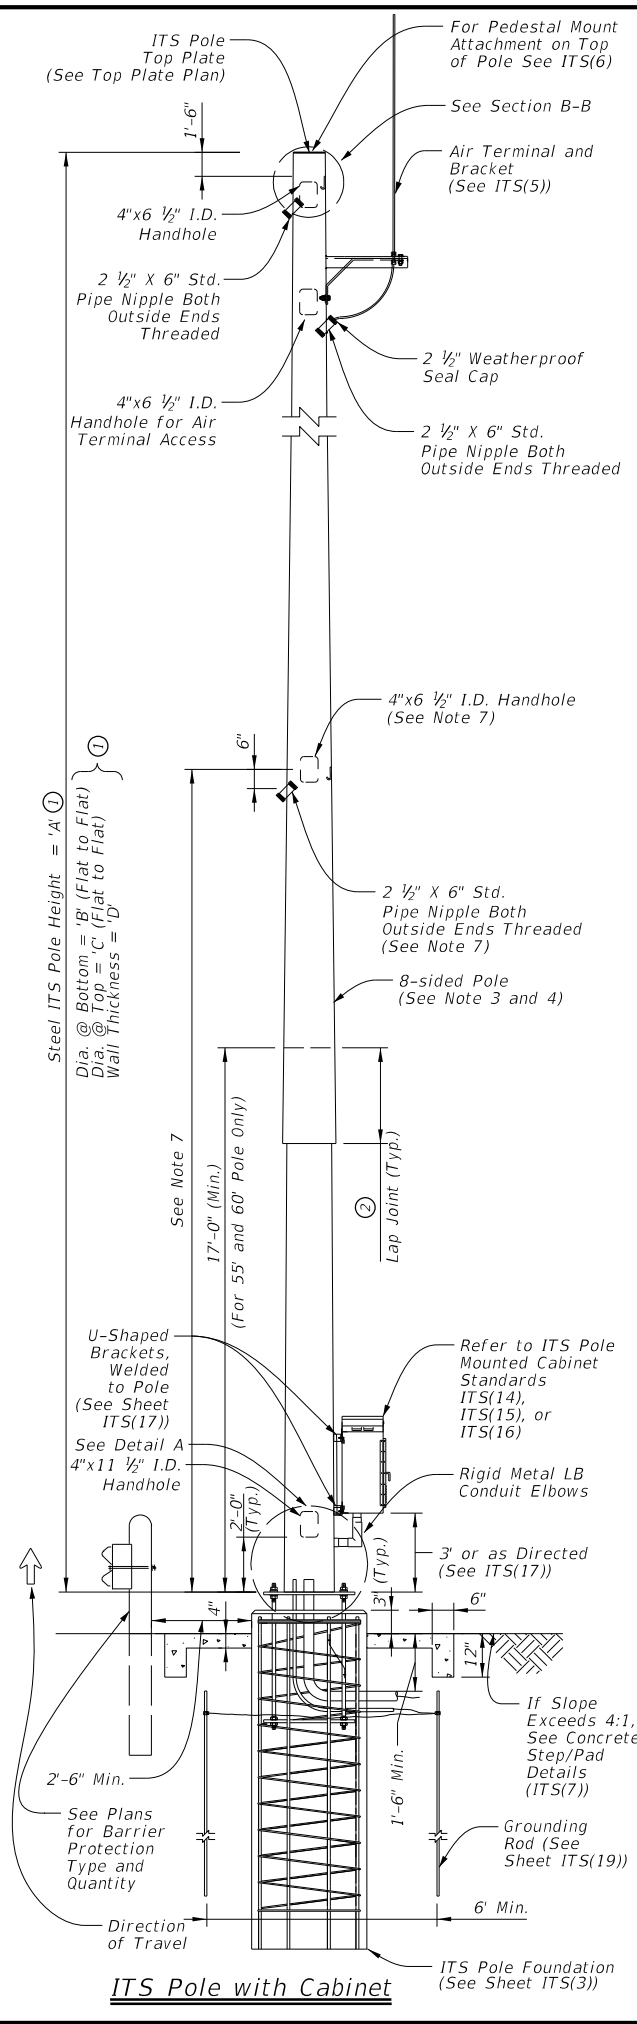

General Notes

- Designed according to Sixth Edition 2013 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications.
- Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."
- Deviation from the design criteria, values, and dimensions shown herein and on ITS(4), constitutes an alternative design and will require submission of shop drawings and calculations for approval, sealed by a Texas Professional Engineer.
- Direct substitution of twelve sided or round poles, matching the design criteria, values, and dimensions shown herein, require submission of shop drawings for approval to confirm design criteria and values on ITS(4) is met.
- Locate handholes opposite of the direction of travel.
- Appropriate number of anchor bolts for base plate determined by height of pole. See 'L' on sheet ITS(4).
- Location for ITS equipment mount may vary by device. Locate mid span handhole and pipe nipple to accommodate location for ITS equipment as identified in the plans or per manufacturer recommendations. Identify location for mid span handhole and pipe nipple on shop drawings for approval.

Reference Notes:

- See tables on Sheet ITS(4) for values of dimension variables.
- See lap joint note for 55' and 60' pole heights on ITS(4) at the bottom of each table.

Texas Department of Transportation
 Traffic Operations Division Standard










ITS POLE DETAILS OCTAGONAL POLE (EIGHT SIDED POLE)

ITS(1)-15

FILE: its(1)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CON: 0904	SECT: 00	JOB: 220	HIGHWAY: VARIOUS
REVISIONS:	DIST: AMA	COUNTY: POTTER	SHEET NO. 100	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:45 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase of ADSS and Poles

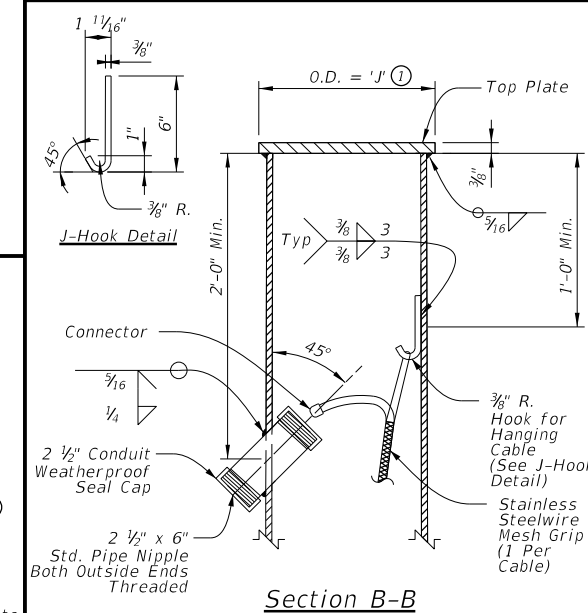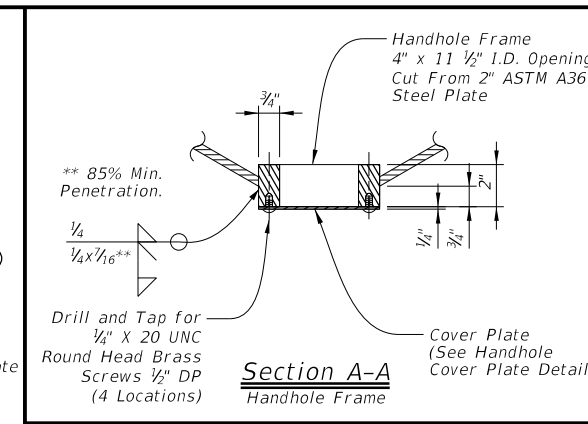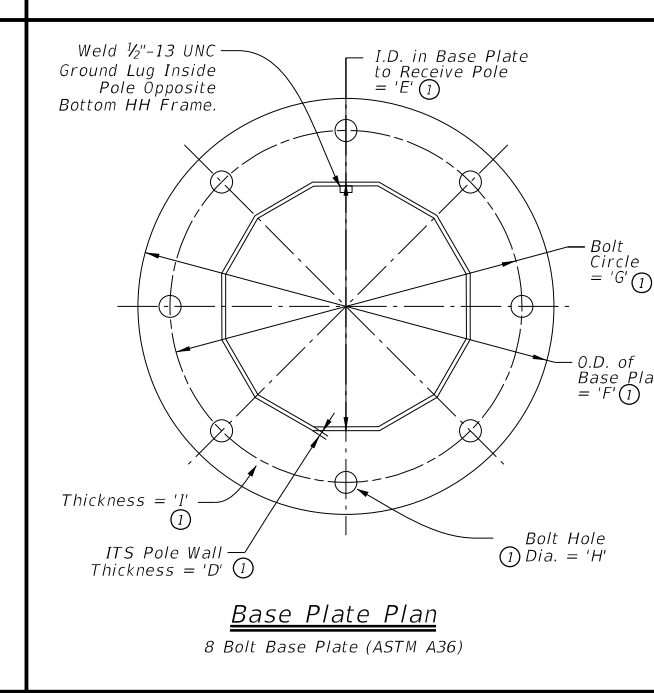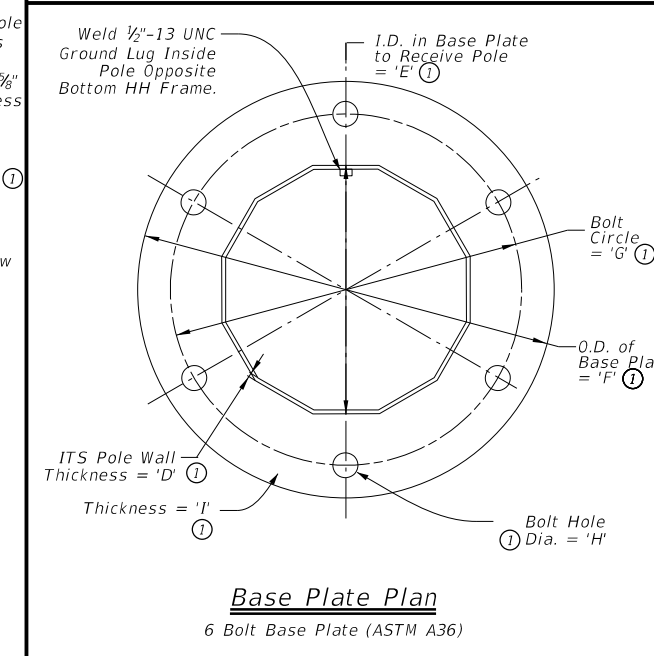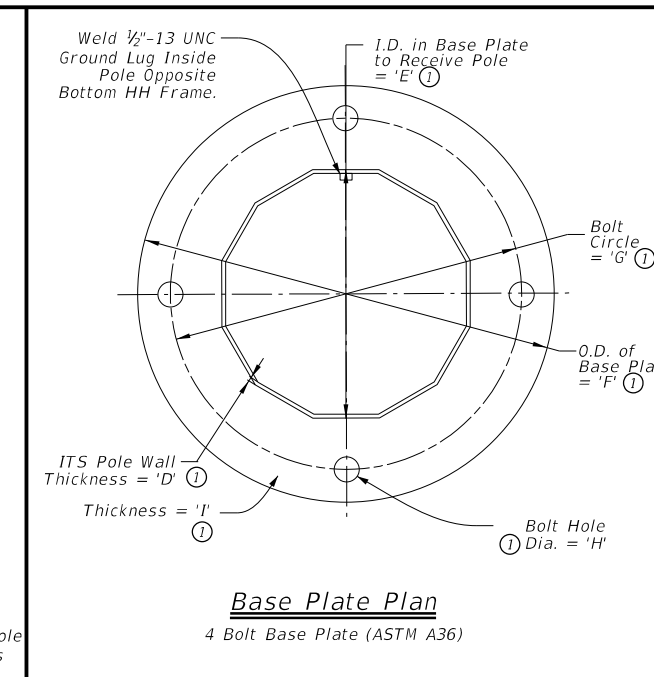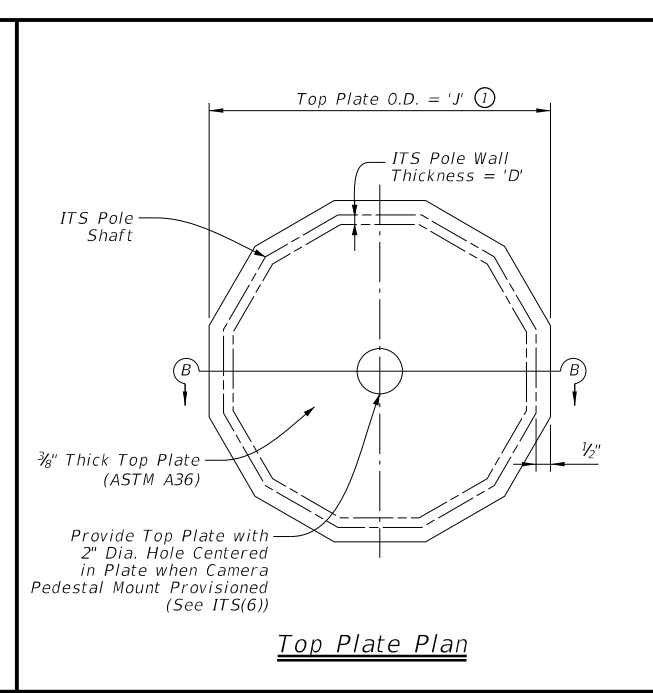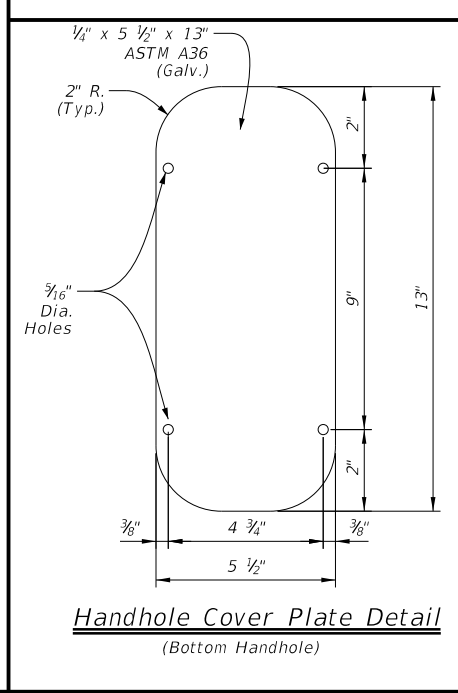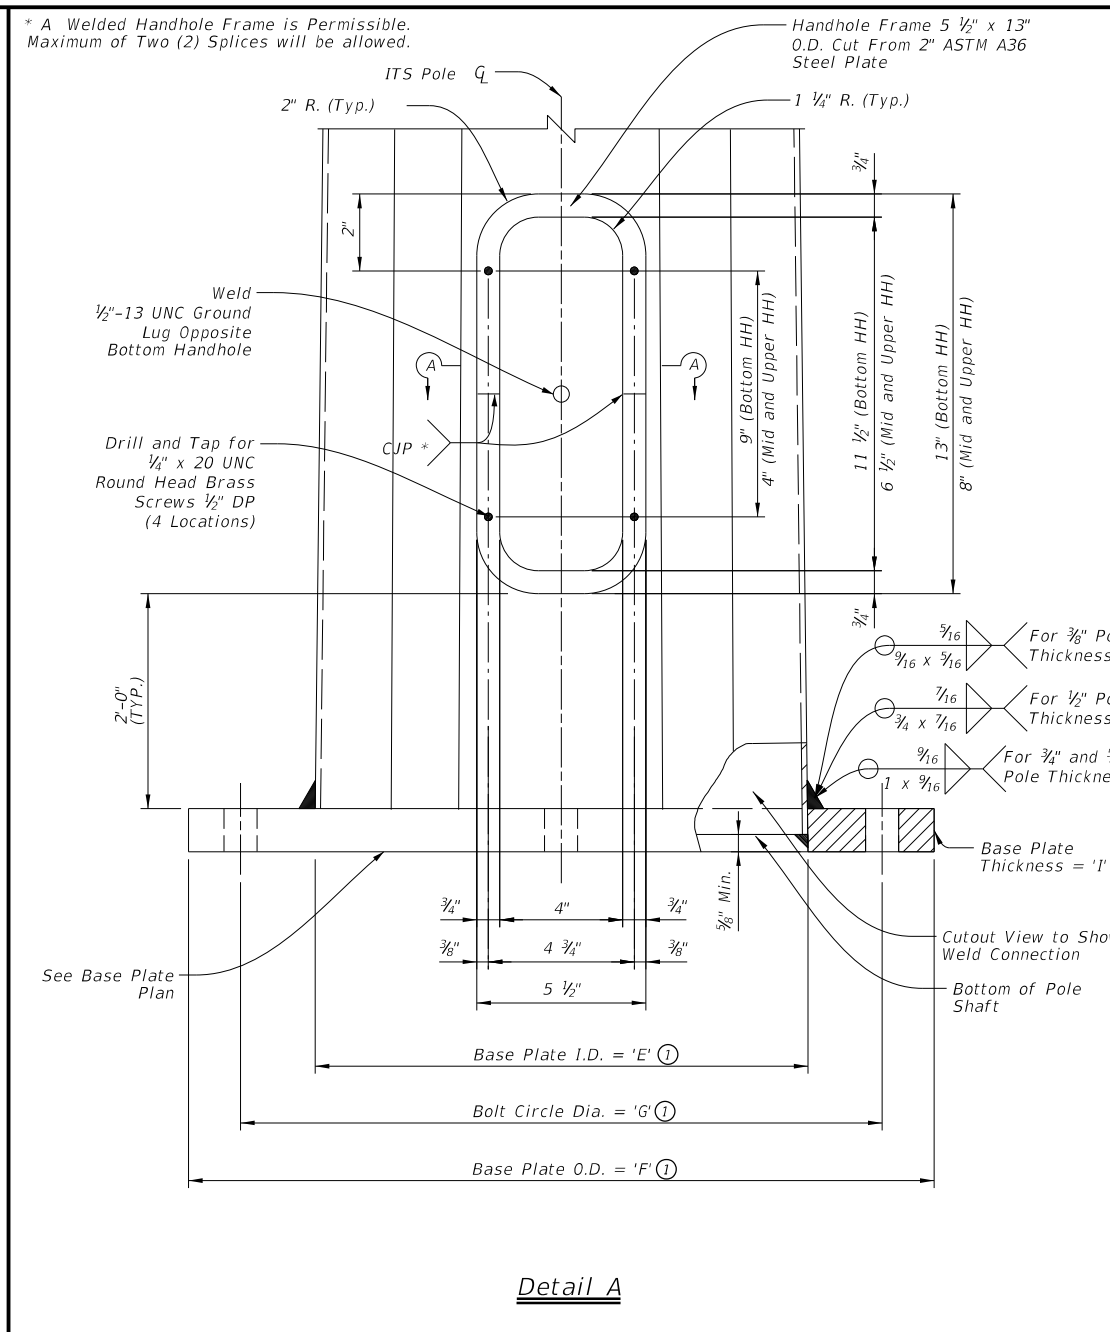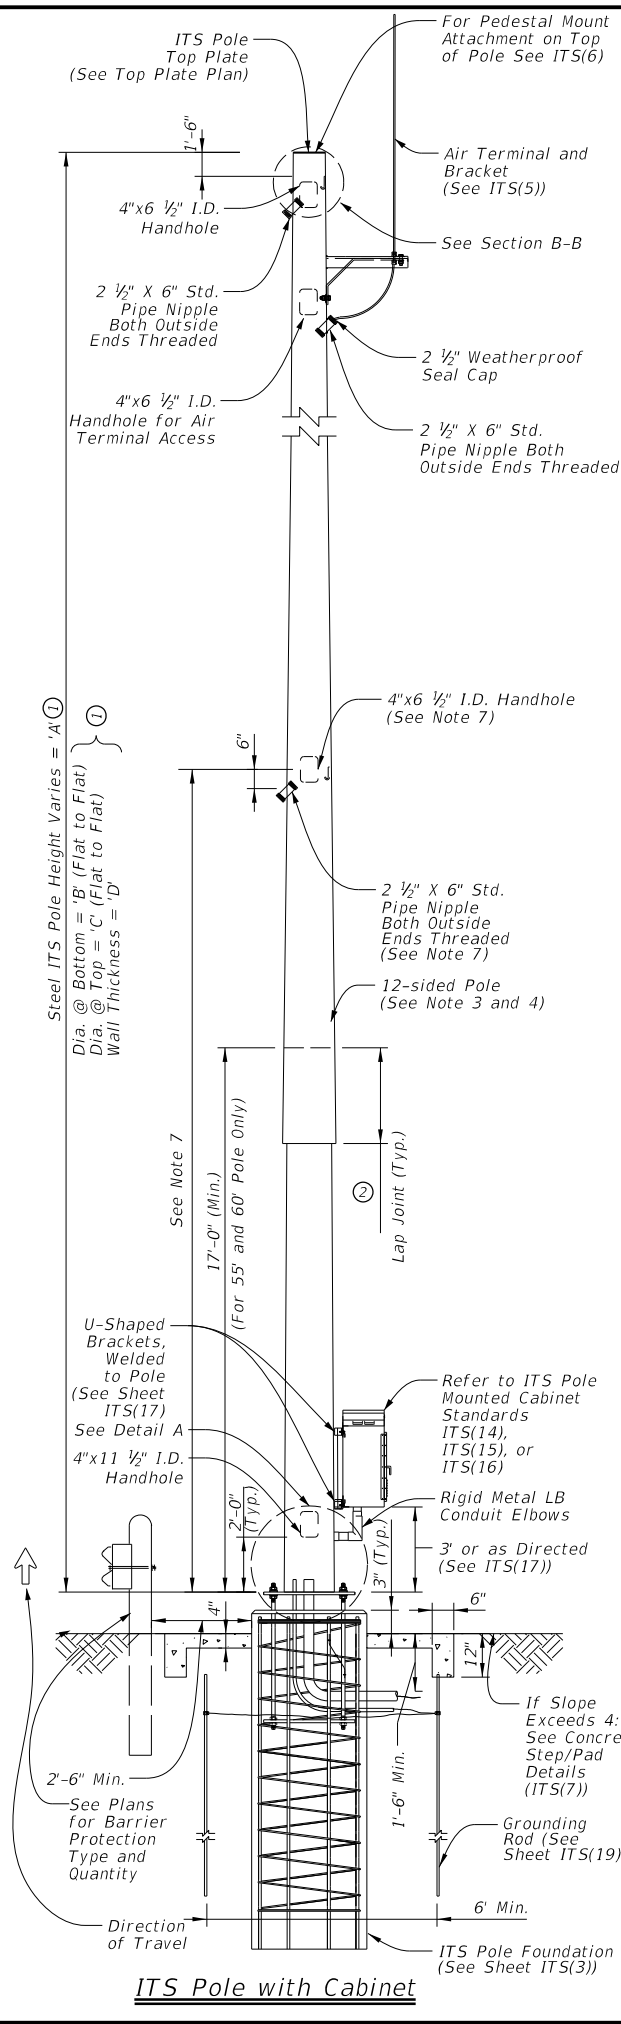

General Notes

- Designed according to Sixth Edition 2013 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications.
- Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."
- Deviation from the design criteria, values, and dimensions shown herein and on ITS(4), constitutes an alternative design and will require submission of shop drawings and calculations for approval, sealed by a Texas Professional Engineer.
- Direct substitution of round poles, matching the design criteria, values, and dimensions shown herein, require submission of shop drawings for approval to confirm design criteria and values on ITS(4) is met.
- Locate handholes opposite the direction of travel.
- Appropriate number of anchor bolts for base plate determined by height of pole. See 'L' on sheet ITS(4).
- Location for ITS equipment mount may vary by device. Locate mid span handhole and pipe nipple to accommodate location for ITS equipment as identified in the plans or per manufacturer recommendations. Identify location for mid span handhole and pipe nipple on shop drawings for approval.

Reference Notes:

- See tables on Sheet ITS(4) for values of dimension variables.
- See lap joint note for 55' and 60' pole heights on ITS(4) at the bottom of each table.

Texas Department of Transportation


Traffic Operations Division Standard

**ITS POLE DETAILS
 DODECAHEDRAL POLE
 (TWELVE SIDED POLE)
 (ALTERNATIVE)
 ITS(2)-15**


FILE: its(2)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CON: 0904	SECT: 00	JOB: 220	HIGHWAY: VARIOUS
REVISIONS	DIST: AMA	COUNTY: POTTER	SHEET NO. 101	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:23:47 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS.v2 Design Phase\AD\1509-0027-12\01509-0027-12.dgn

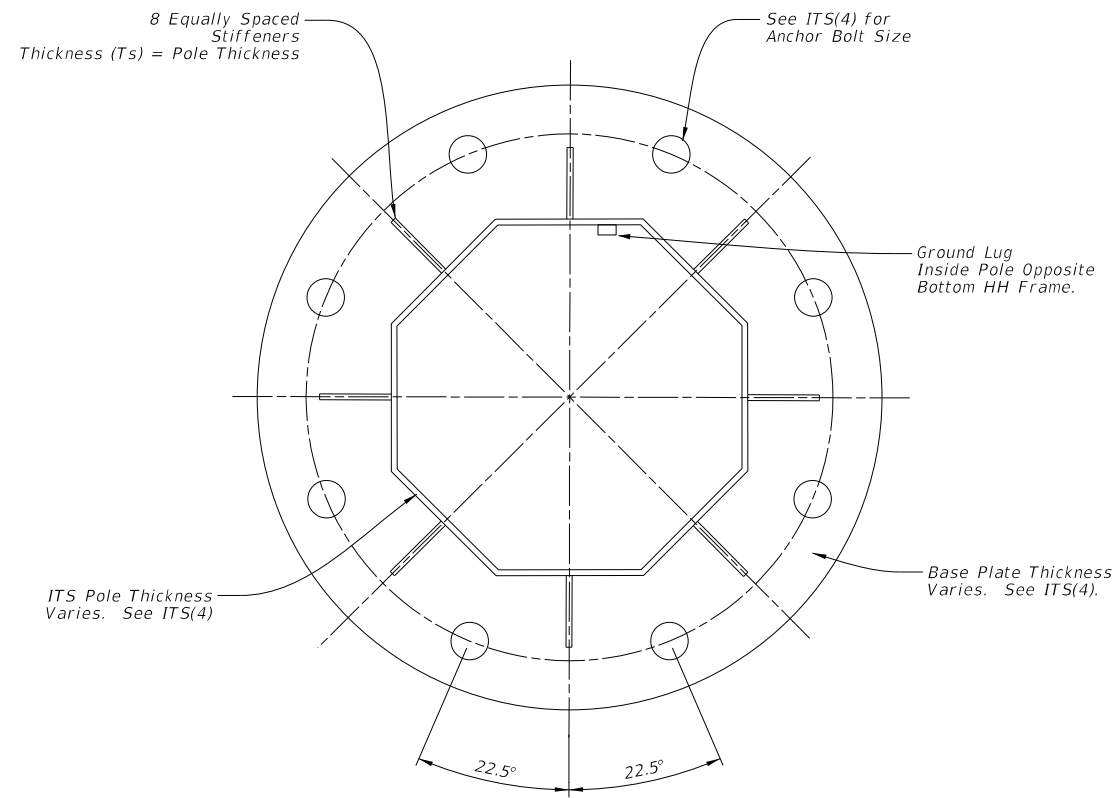

8-sided Pole Base Plate Detail

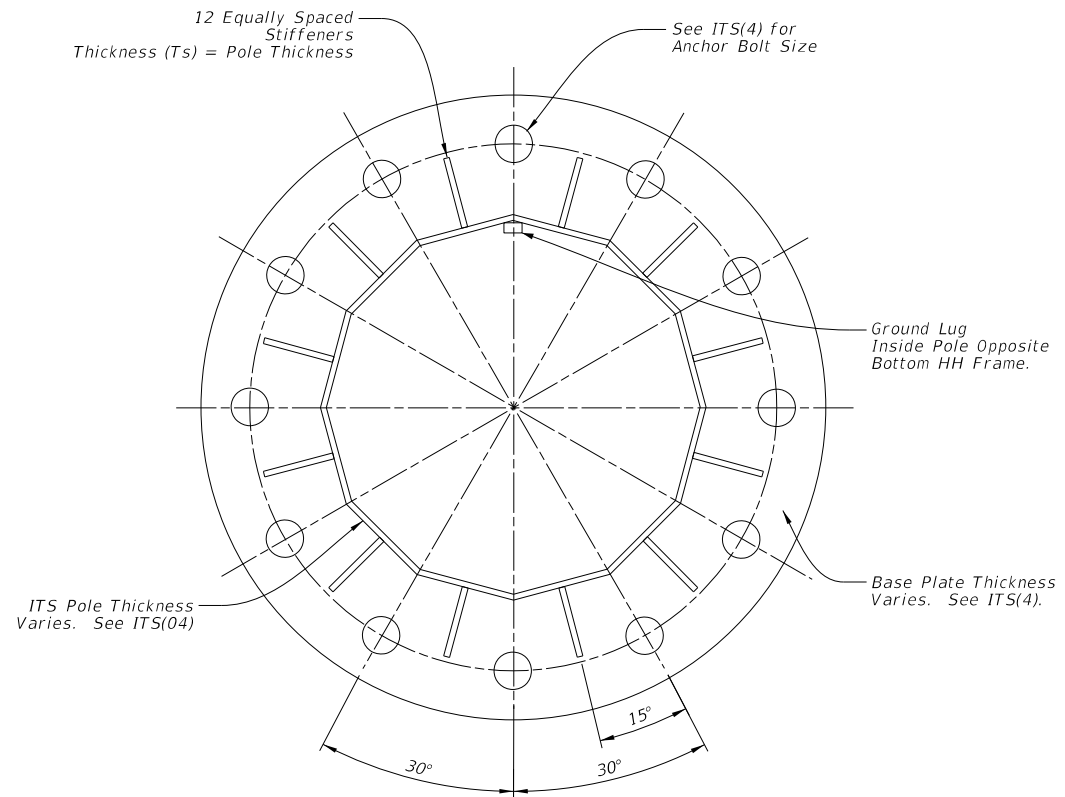


12-sided Pole Base Plate Detail

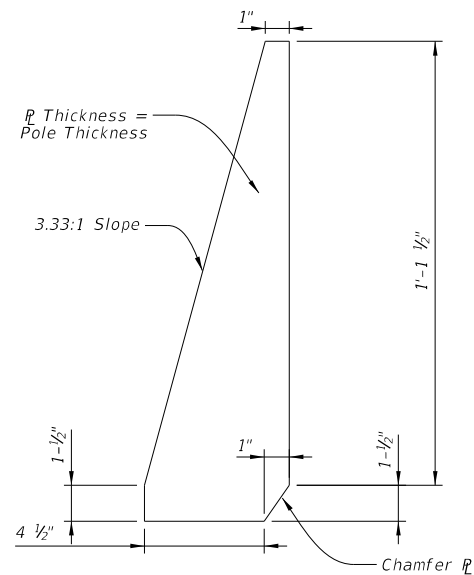


Stiffening Plate Detail

Not to Scale

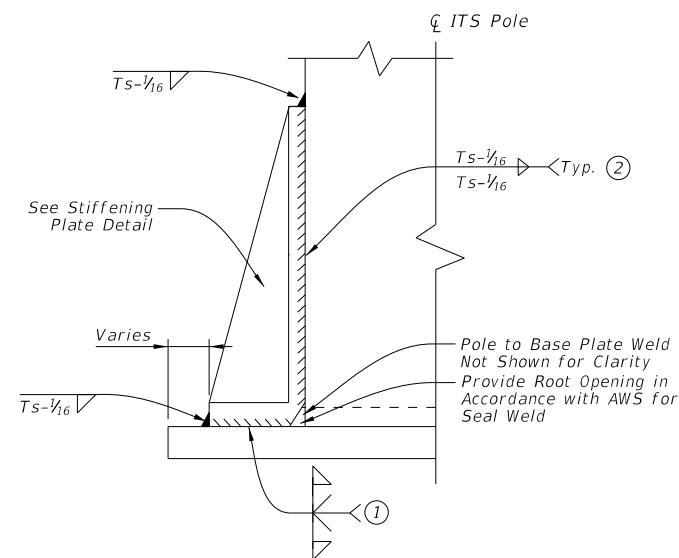

Stiffening Detail - Elevation View

Not to Scale

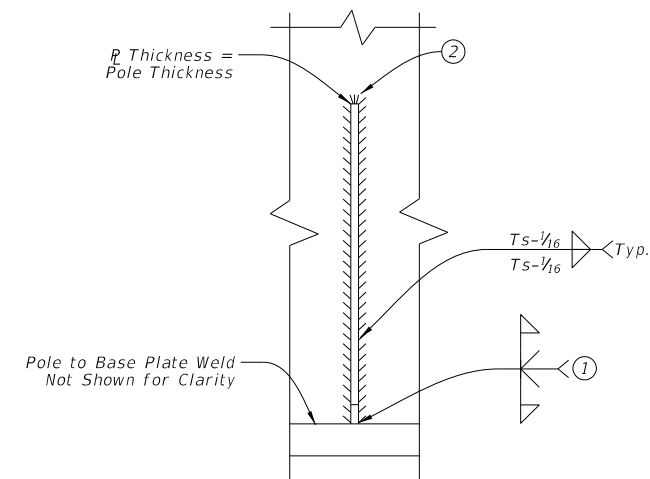

Stiffening Detail - Front View

Not to Scale

General Notes:

1. Steel stiffening plates shall conform to ASTM A36.
2. Make all welds conform to Item 441, "Steel Structures."
3. Galvanize in accordance with Item 445, "Galvanizing" unless otherwise noted.
4. Submit shop drawings detailing stiffening plate orientation along with ITS equipment intended for mounting for review and approval prior to fabrication.
5. HH = Handhole
6. T_s = Thickness

Reference Notes:

- ① Complete Joint Penetration Weld per AWS
- ② Wrap Fillet Weld Around Tip of Stiffener




ITS POLE
 STIFFENER PLATE
 DETAILS

ITS(4A) - 15


FILE: ifs(4A)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	103	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:48 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2_Design Phase\Drawings\ITS Pole\ITS Pole.dwg

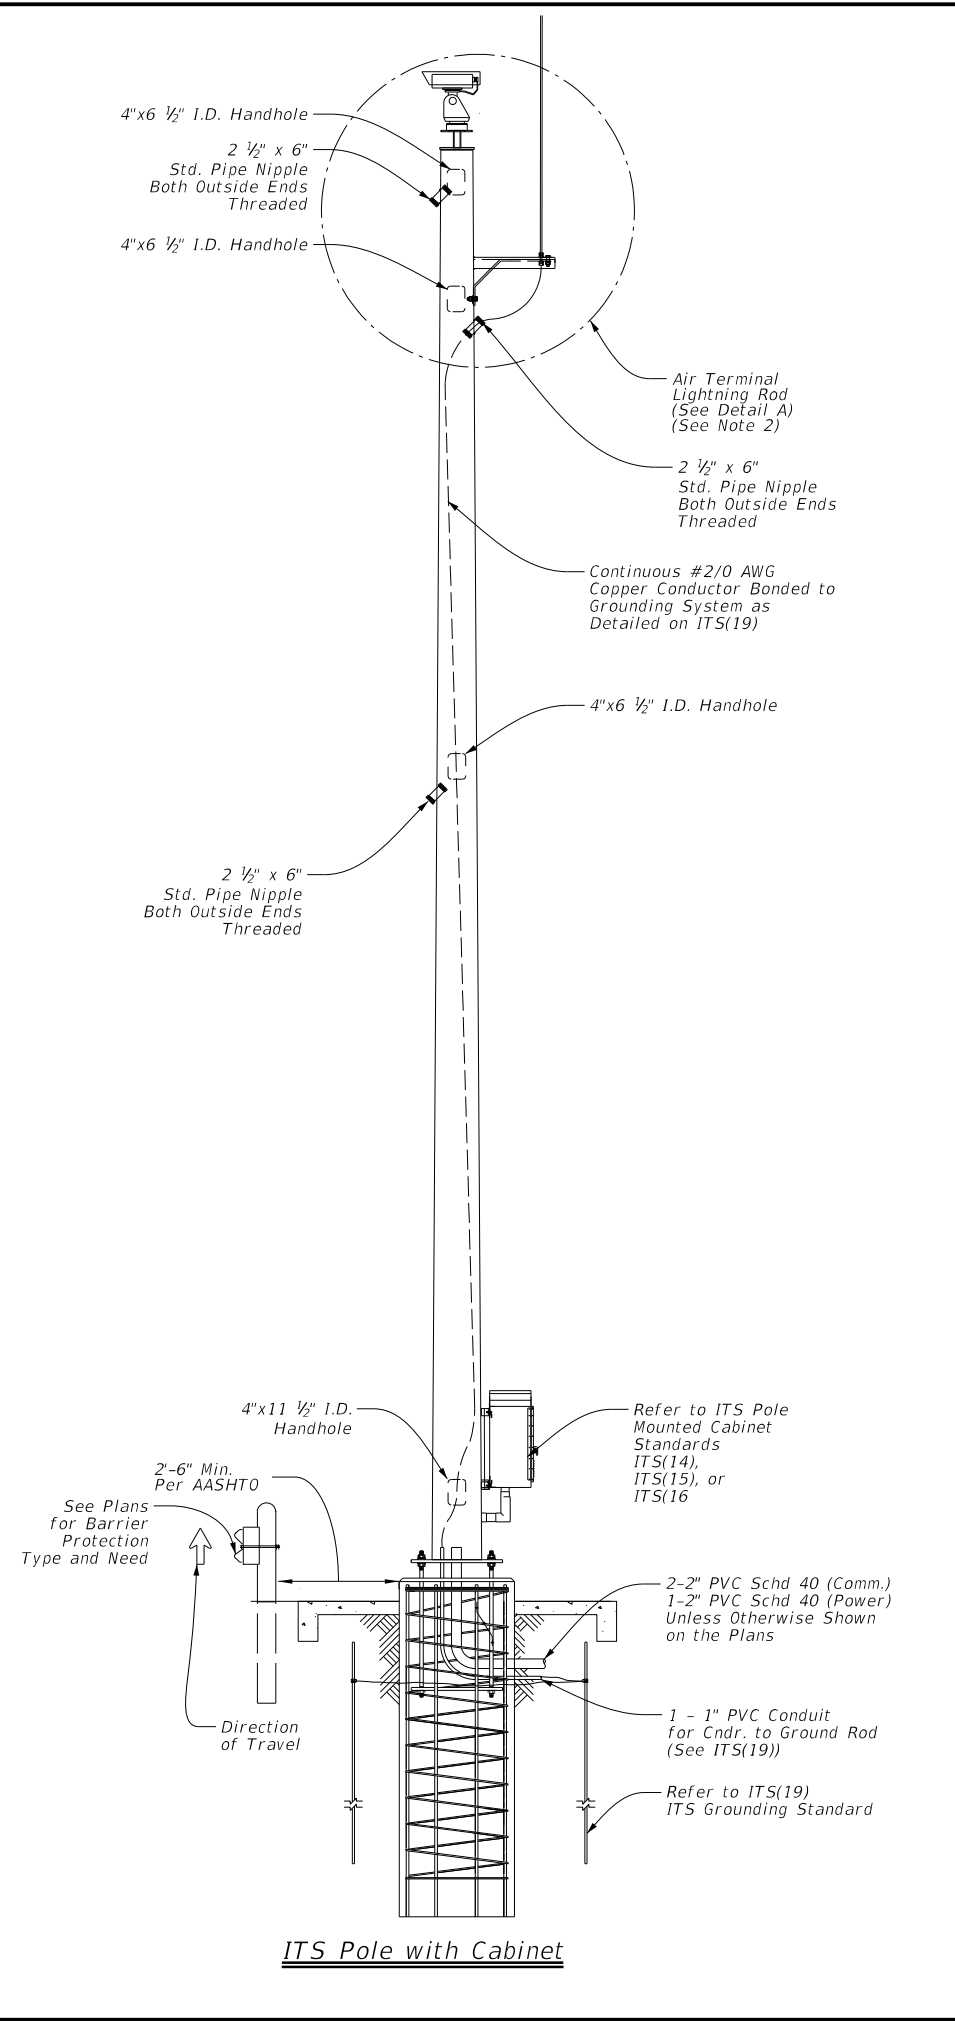


ITS Pole with Cabinet

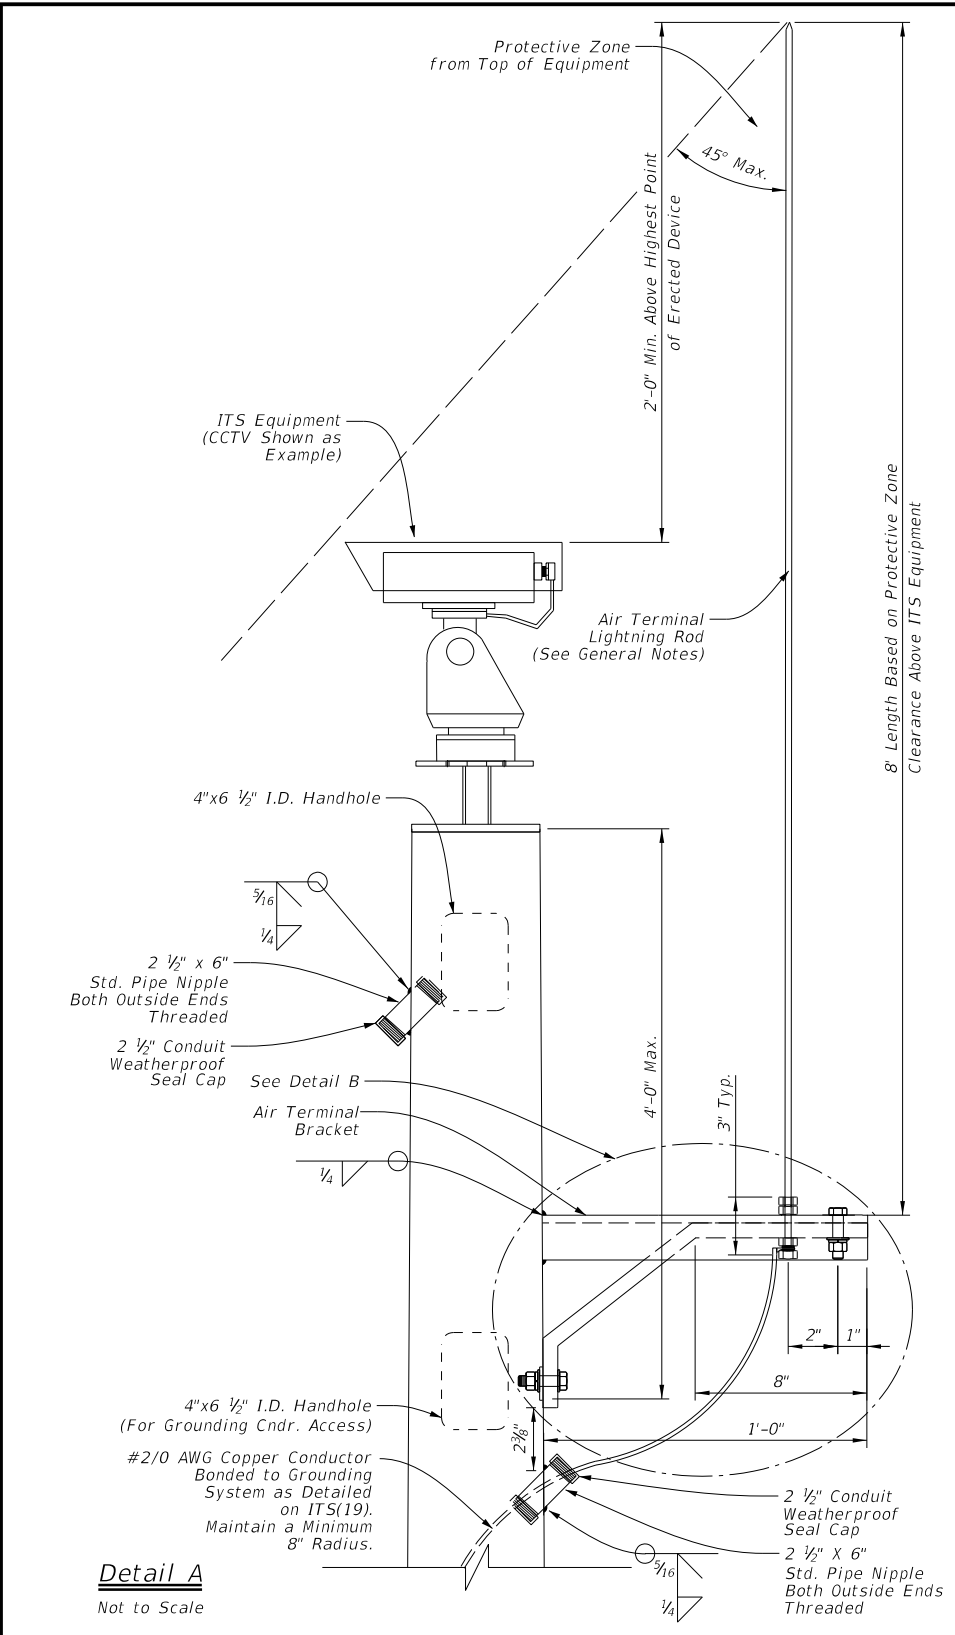


Detail A
Not to Scale

General Notes:

- Provide lightning protection using air terminals on structures utilizing the rolling sphere method. Provide lightning protection system consisting of air terminals, down conductor, and grounding system installed in accordance with NFPA 780 and tested in accordance with IEEE 142. Meet the following requirements:
 - A. Position - in center of least utilized field of view.
 - B. Height - camera equipment to be within 45 degree protective zone of air terminal.
 - C. Material - 1/2" ETP alloy 110 copper air terminal (Class II)
 - D. Clearance - 24" minimum height above highest point of ITS equipment.
 - E. Bonding - attach air terminal to bracket by exothermic weld or with approved clamping.
 - F. Structure wind rating in accordance with TxDOT WV & IZ (LTS2013).
 - G. Galvanize air terminal bracket in accordance with Item 445, "Galvanizing."
- Alternative orientation for air terminal and pole mounted cabinet due to project specific needs to be indicated on the plans and detailed in shop drawing submittal for approval.
- Weld air terminal bracket to ITS pole in accordance with Item 448 "Structural Field Welding." Bracket may be welded by the fabricator in the shop prior to delivery. A bolted connection for the air terminal bracket is acceptable in lieu of a welded connection with approval by the Engineer and detailed in the shop drawings.

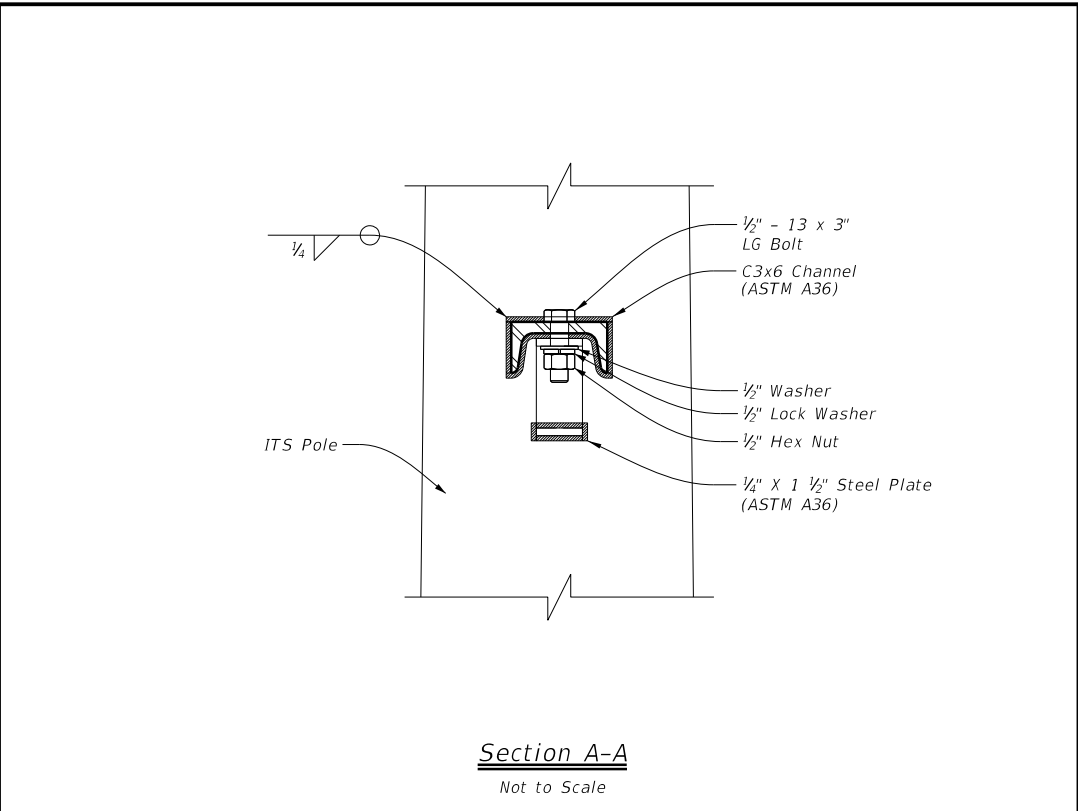

Section A-A
Not to Scale

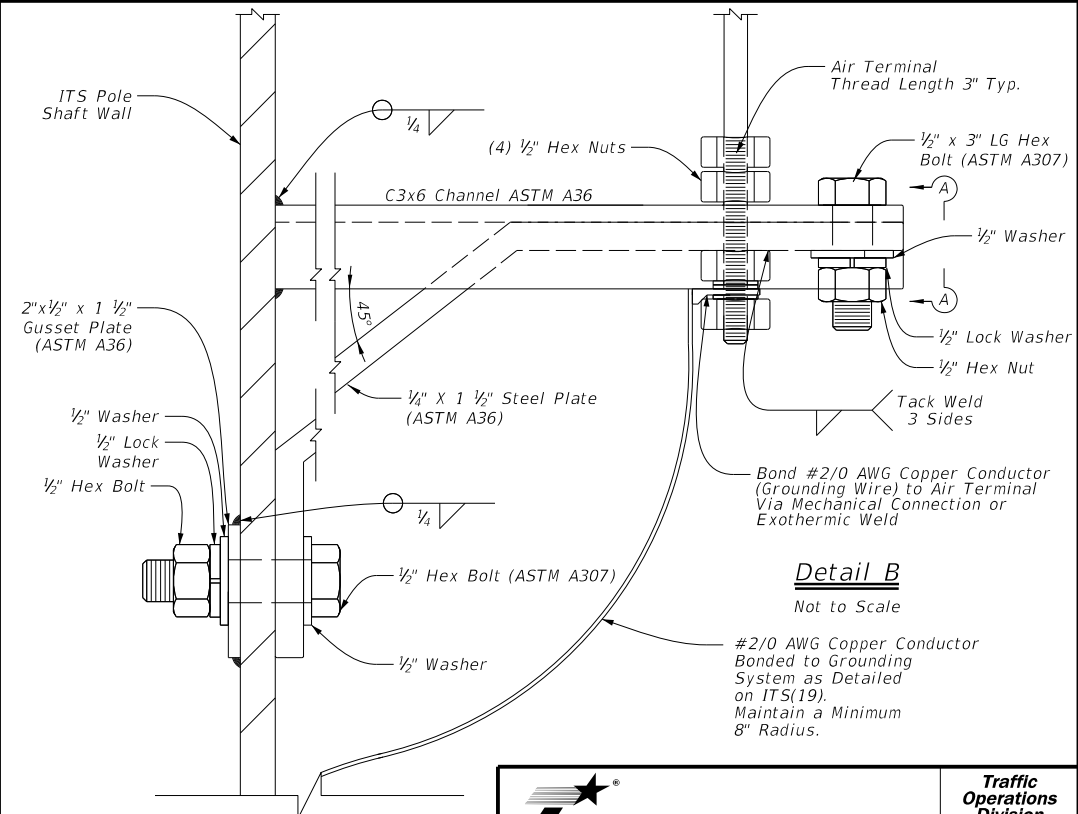

Detail B
Not to Scale


ITS POLE AIR TERMINAL DETAILS

ITS(5) - 15


FILE: its(5)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CON: 0904	SECT: 00	JOB: 220	HIGHWAY: VARIOUS
REVISIONS	DIST: AMA	COUNTY: POTTER	SHEET NO. 104	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind to other formats or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:23:49 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS V2 Design Phase\CAD\standards\ITS\@pangt.gip

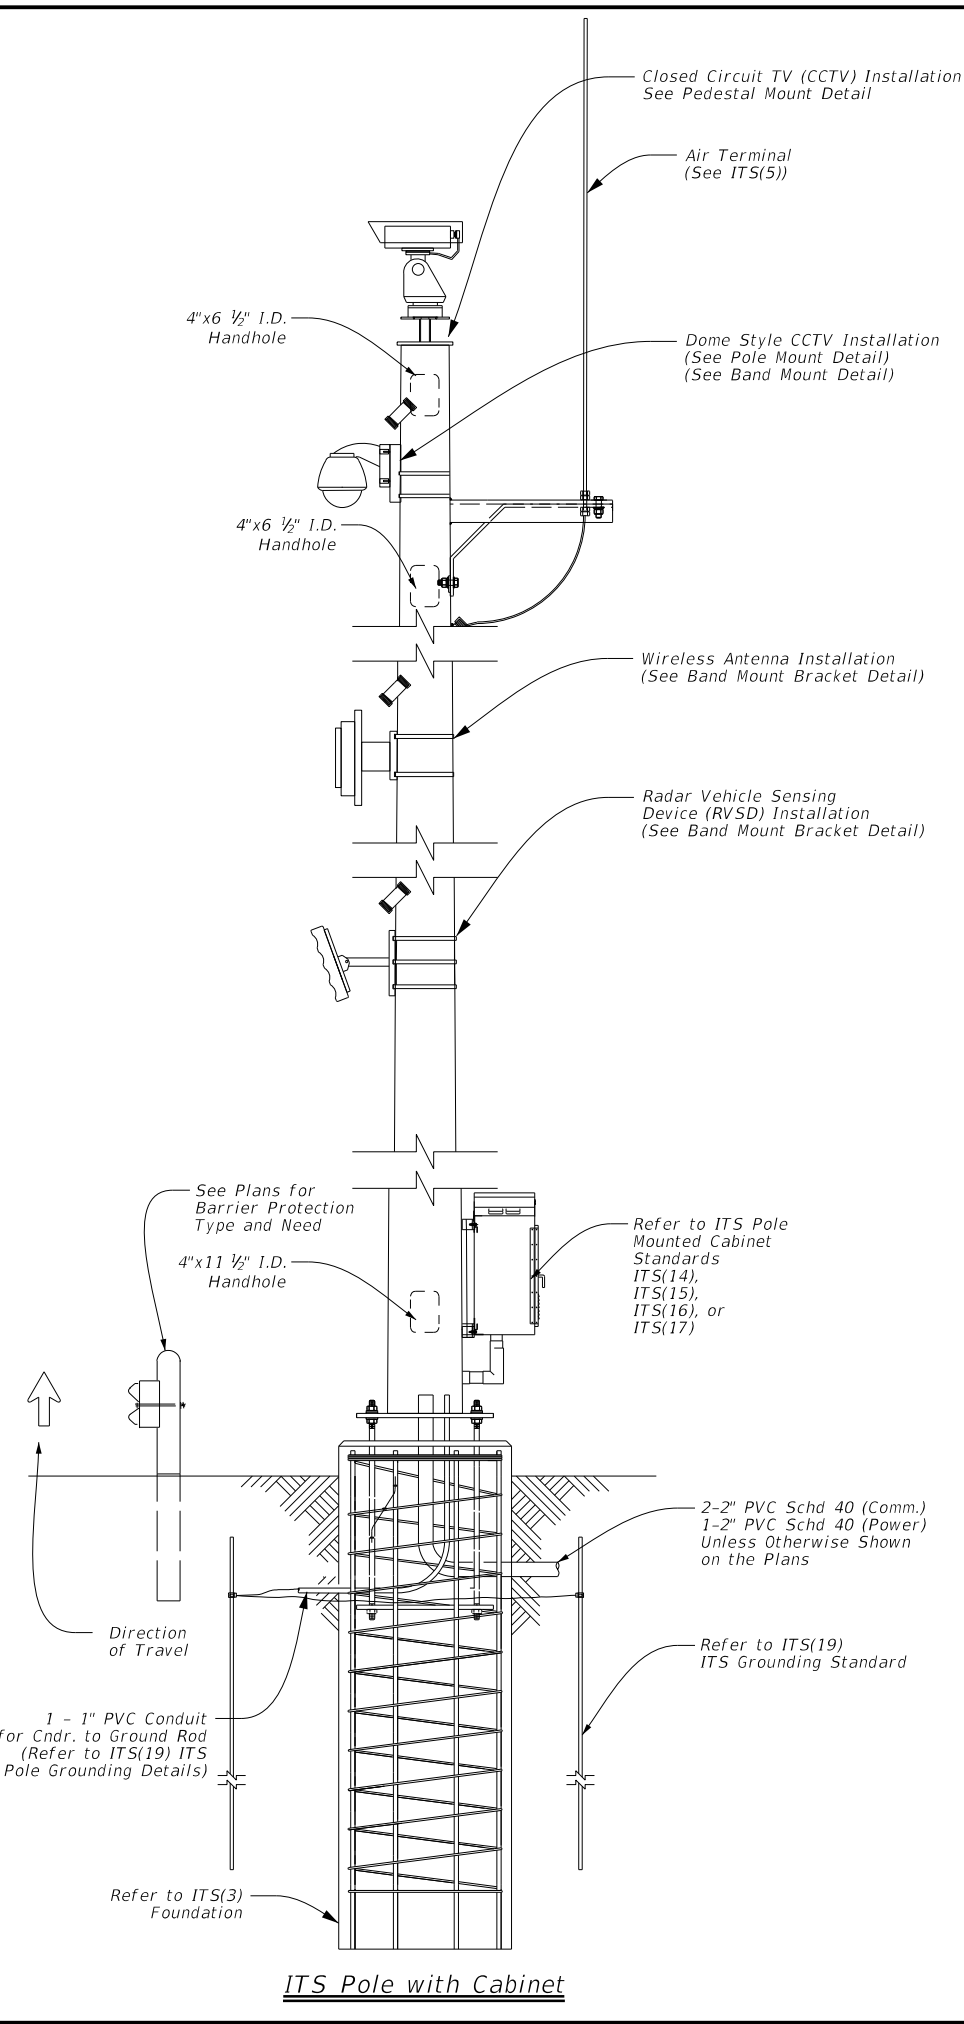

ITS Pole with Cabinet

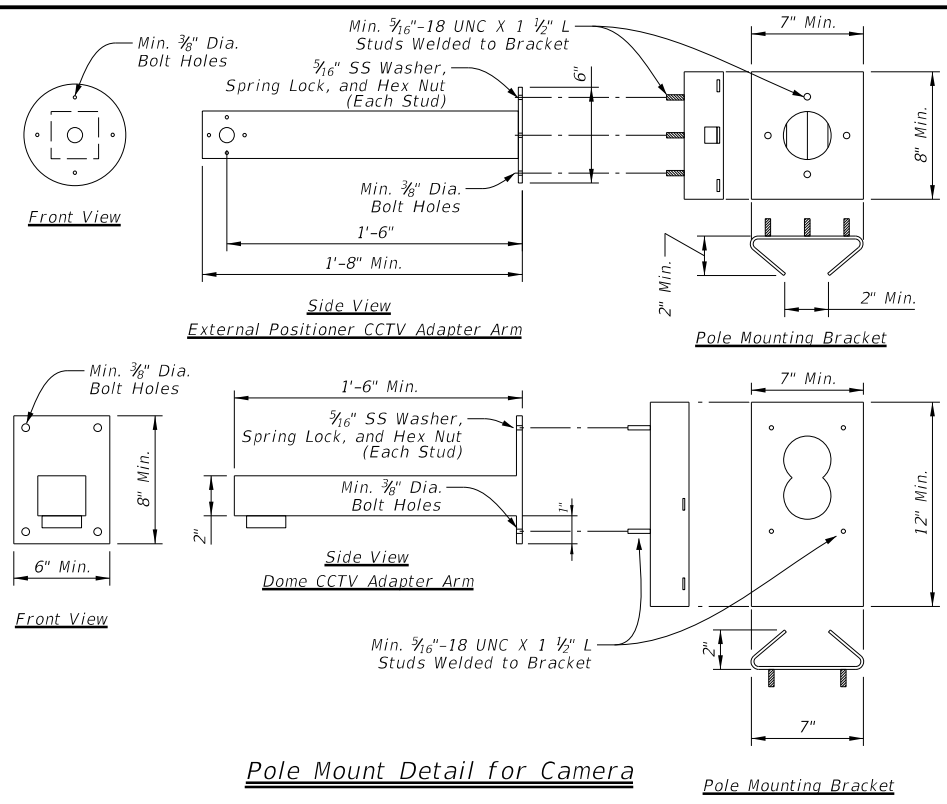


Pole Mount Detail for Camera

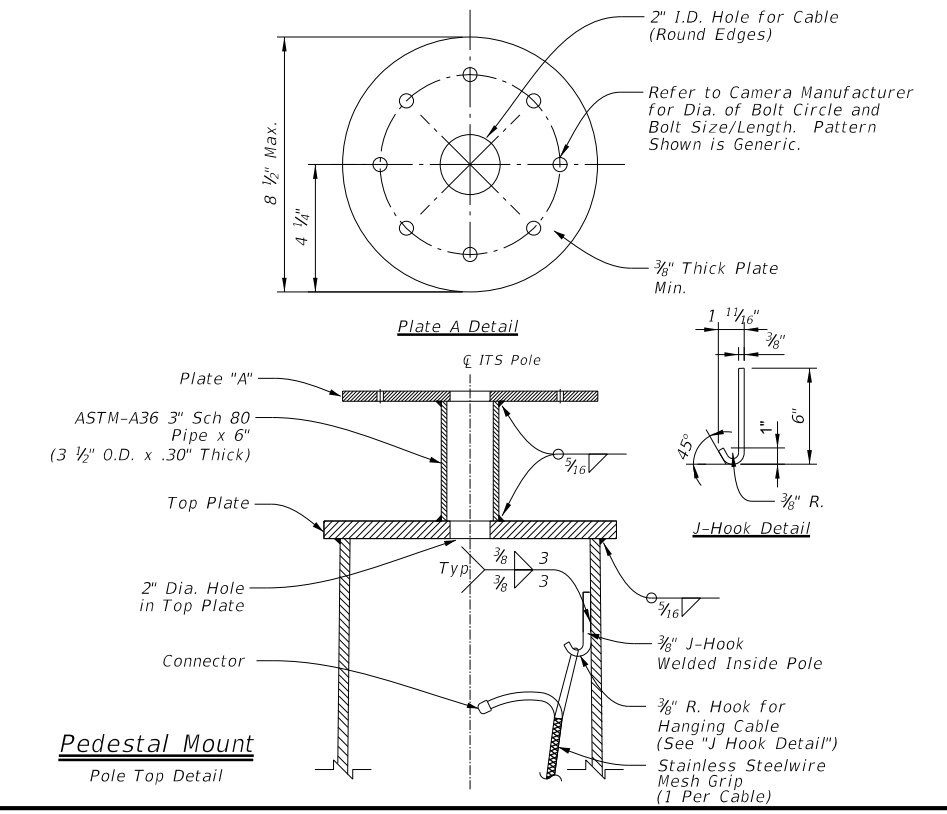


Pedestal Mount Pole Top Detail

- General Notes:**
1. Designed according to Sixth Edition AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications.
 2. Hang all cabling inside ITS pole structure with stainless steel wire mesh grips.
 3. Bolt positioning in the pedestal top plate (Plate "A") for the pan/tilt base must be determined in the field per camera manufacturers recommendations. This will allow positioning of the camera to maximize coverage area. The Engineer will determine the camera's blind zone at each location.
 4. Provide pedestal top plate and Plate "A" that conform to ASTM A36.
 5. Make all welds conform to Item 441 and AWS D1.1 (Structural Welding). Repair damaged galvanized coating per Item 445, "Galvanizing."
 6. Galvanize parts in accordance with Item 445, "Galvanizing" unless otherwise noted.
 7. The type of ITS equipment shown to be mounted to the ITS pole is intended to represent the most common ITS equipment applications and should not be treated as all inclusive. Other ITS equipment applications may exist that are project specific.
 8. Mounting brackets are intended to be diagrammatic and for information only, and are not all inclusive. Contractor responsible for submitting mounting bracket design for approval by the Engineer prior to fabrication. Mounting bracket designed to support a maximum 35 lbs. Off-the-shelf mounting brackets are acceptable and shall be submitted by shop drawing for approval.
 9. Mounting heights to be determined in the field based on manufacturer recommendations.

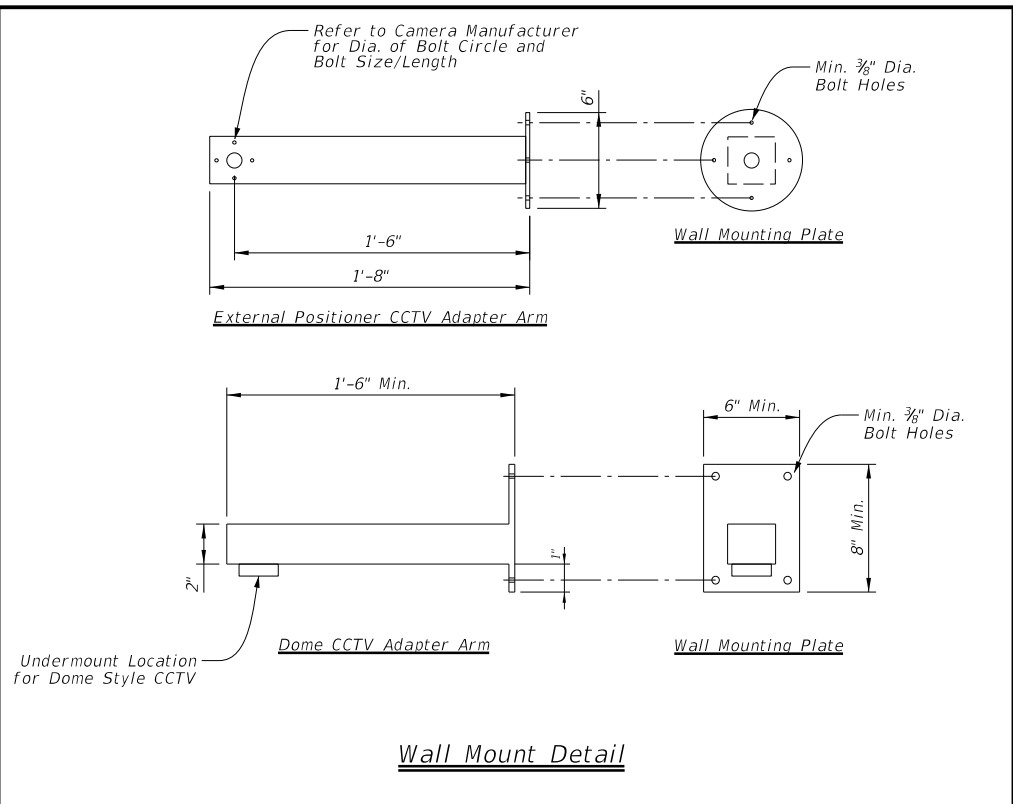

Wall Mount Detail

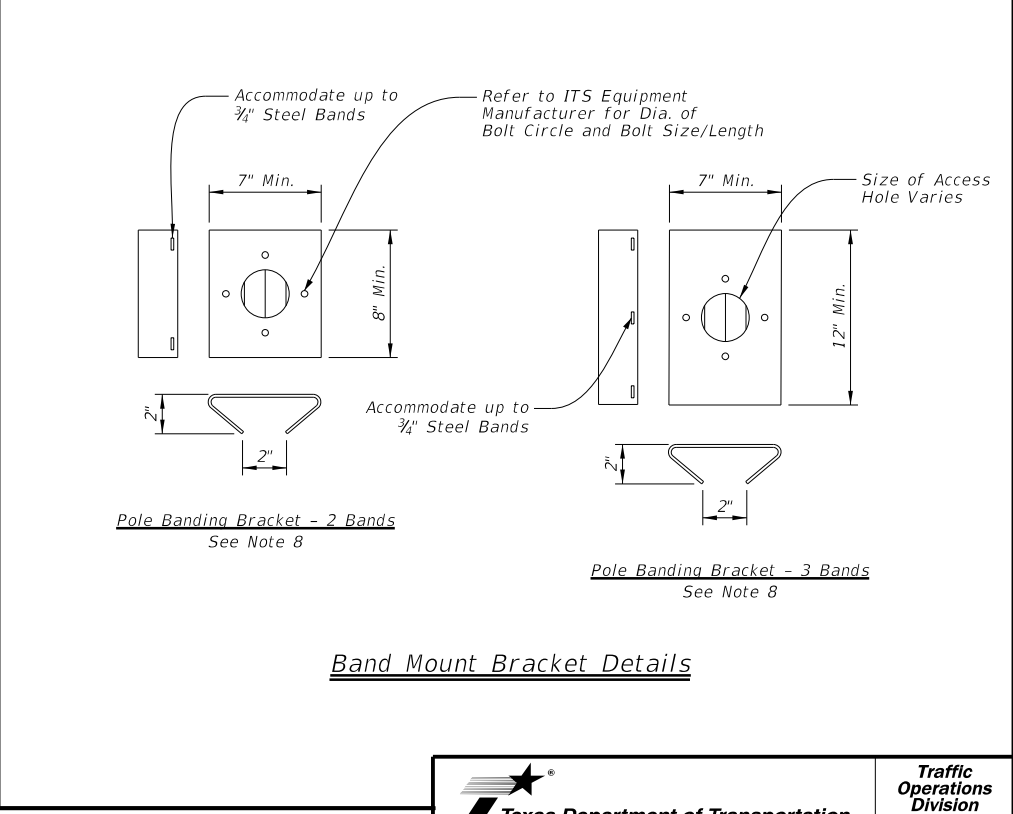


Band Mount Bracket Details


		Traffic Operations Division Standard	
<h2>ITS POLE EQUIPMENT MOUNTING DETAILS</h2>			
<h3>ITS(6) - 15</h3>			
FILE: its(6) -15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT June 2015	CON: 0904	SECT: 00	JOB: 220
DIST: AMA		COUNTY: POTTER	SHEET NO.: 105

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:49 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS V2 Design Phase of ADHS of 08/01/2023

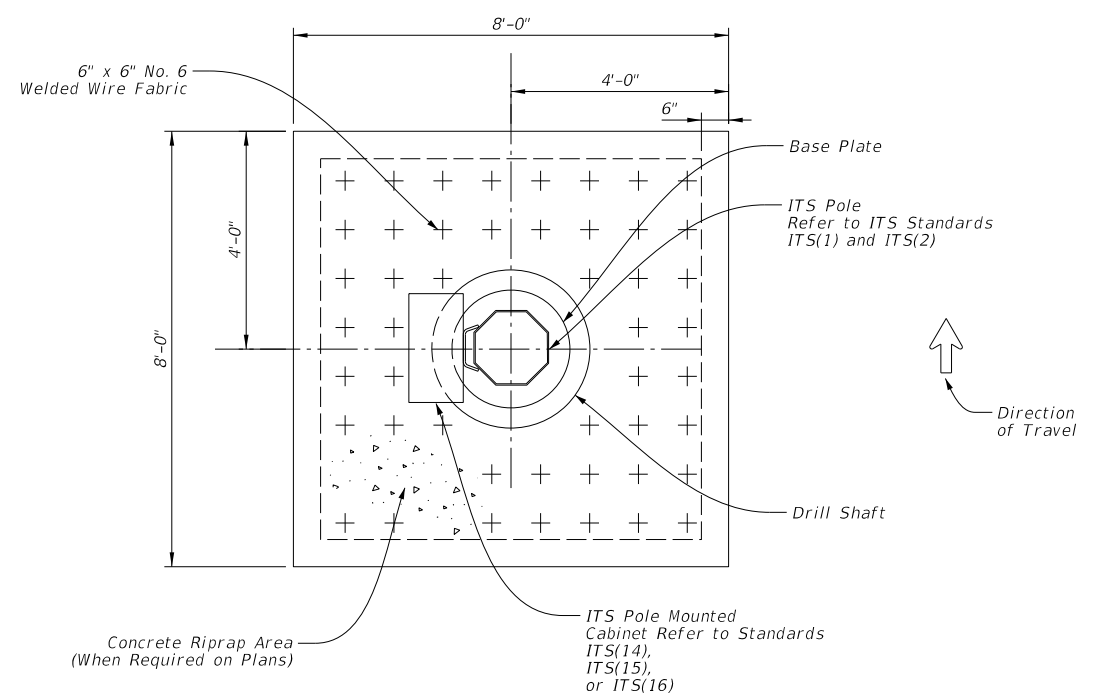


Top View
Riprap - Non-Sloped Conditions

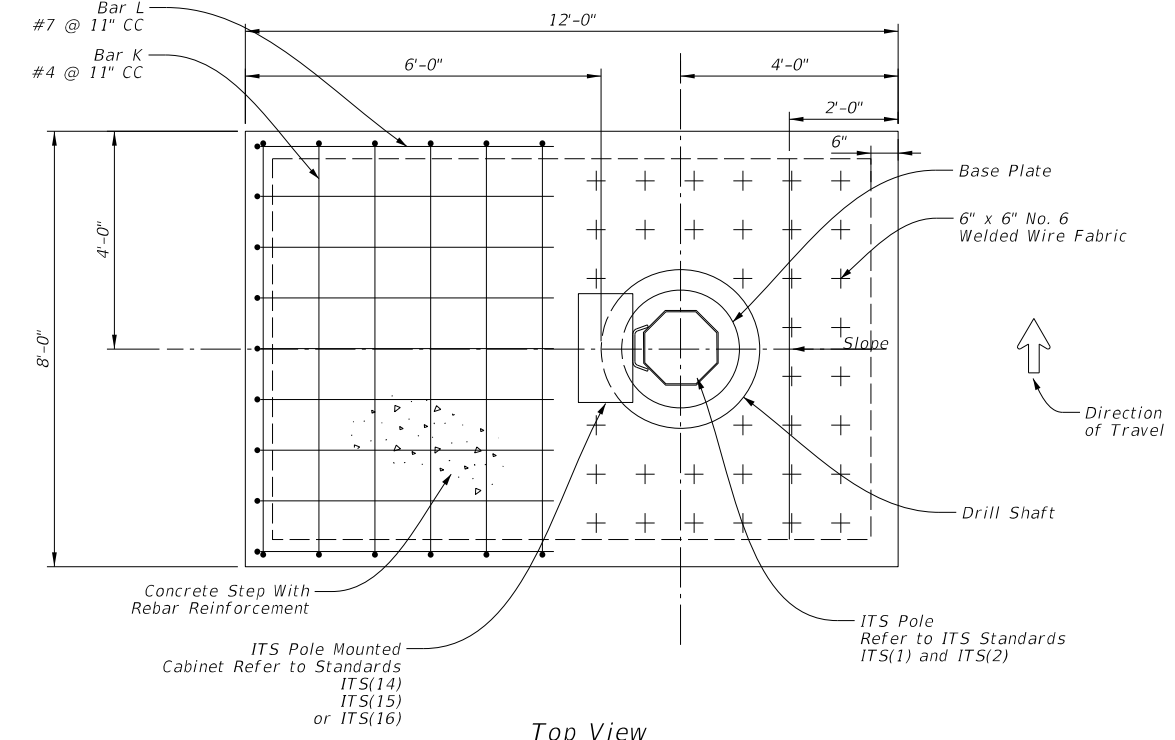


Top View
Step and Riprap - Sloped Conditions

General Notes:

1. For non-sloped grassy areas, an 8' x 8' concrete riprap apron shall be poured around ITS pole foundations (see detail on this sheet), estimated at 1.25 CY per site, paid for under Item 432 "Riprap."
2. For sloped grassy areas, a concrete "step" (for maintenance personnel to access cabinet) shall be poured as part of the riprap apron. The step shall vary in height depending on slope, but shall extend 6' horizontally from ITS pole drilled shaft foundation and be the same width as riprap apron (8'). Step shall be poured at same time as riprap apron (see detail on this sheet). Any additional concrete necessary to fabricate step (over and above the 1.25 CY) shall be considered subsidiary to the various bid items and no direct payment shall be made.
3. For sloped areas where riprap exists, a 6' (horizontal from drilled shaft foundation) x 4' wide step shall be installed (see detail this sheet). Concrete for step shall be considered subsidiary to the various bid items and no direct payment shall be made.
4. Cabinet orientation may vary depending on field conditions or project constraints. Accommodate configuration of platform according to cabinet orientation.
5. Slopes greater than a 2:1 or when 3'-0" Max. step wall height is exceeded, an alternative design with safety railing is required and shall be detailed in the shop drawings for approval.

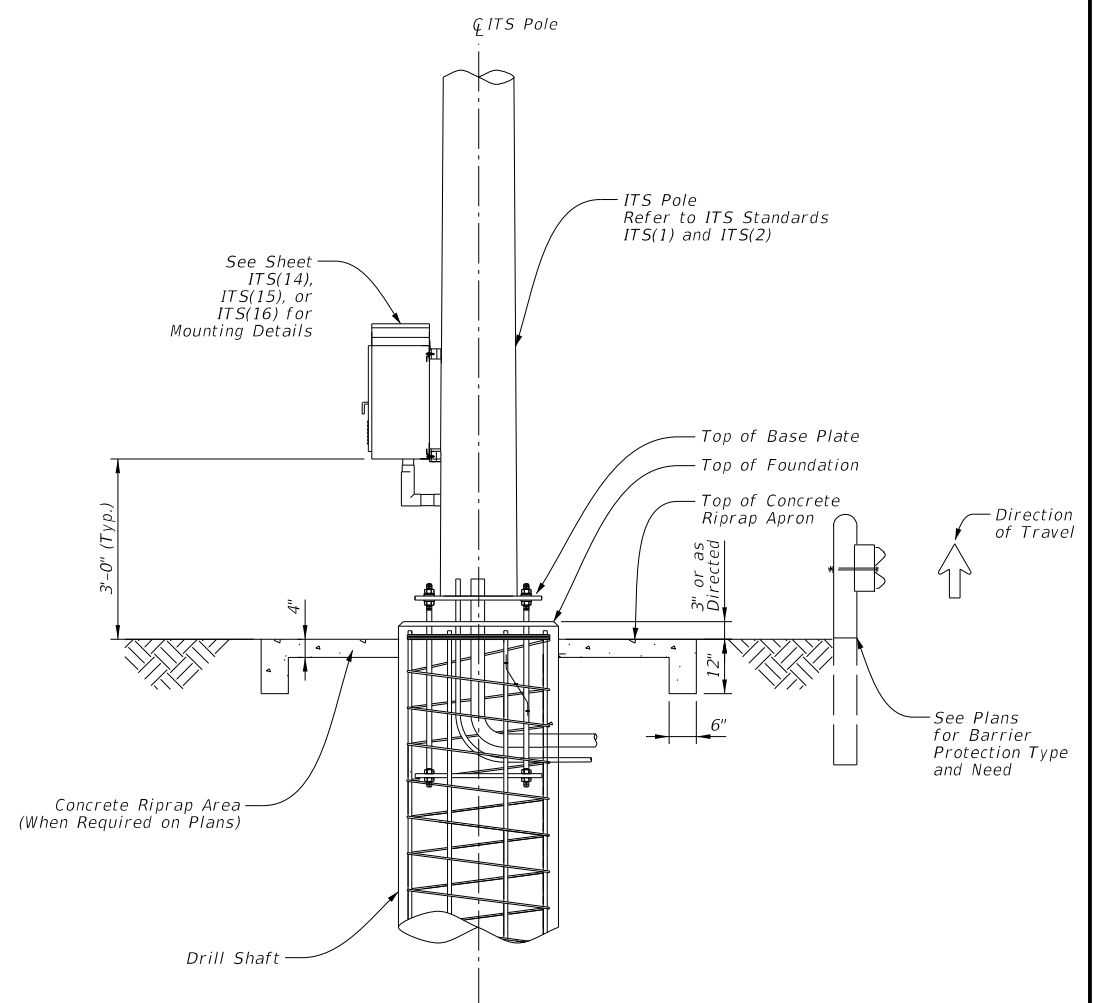

Elevation View
Riprap Apron Detail - Non-Sloped Conditions

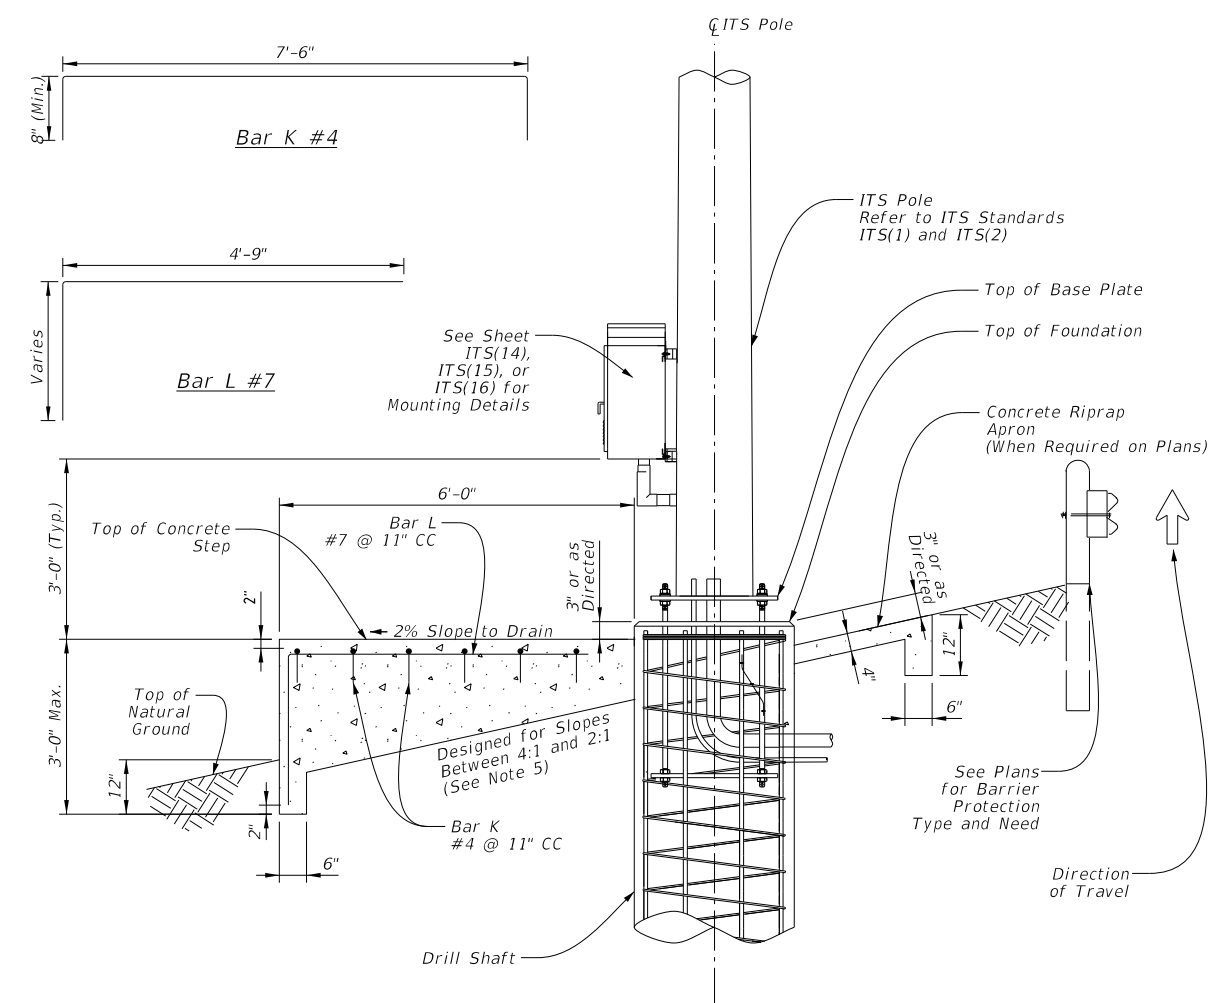

Elevation View
Riprap Apron/Step Detail - Sloped Conditions
 (Slopes Exceeding 4:1)




**ITS POLE
 RIPRAP DETAILS**

ITS(7) - 15


FILE: its(7) - 15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	106	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any drawings or for incorrect results or damages resulting from its use.


DATE: 8/11/2023 2:23:51 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\01509-0027-12.dwg

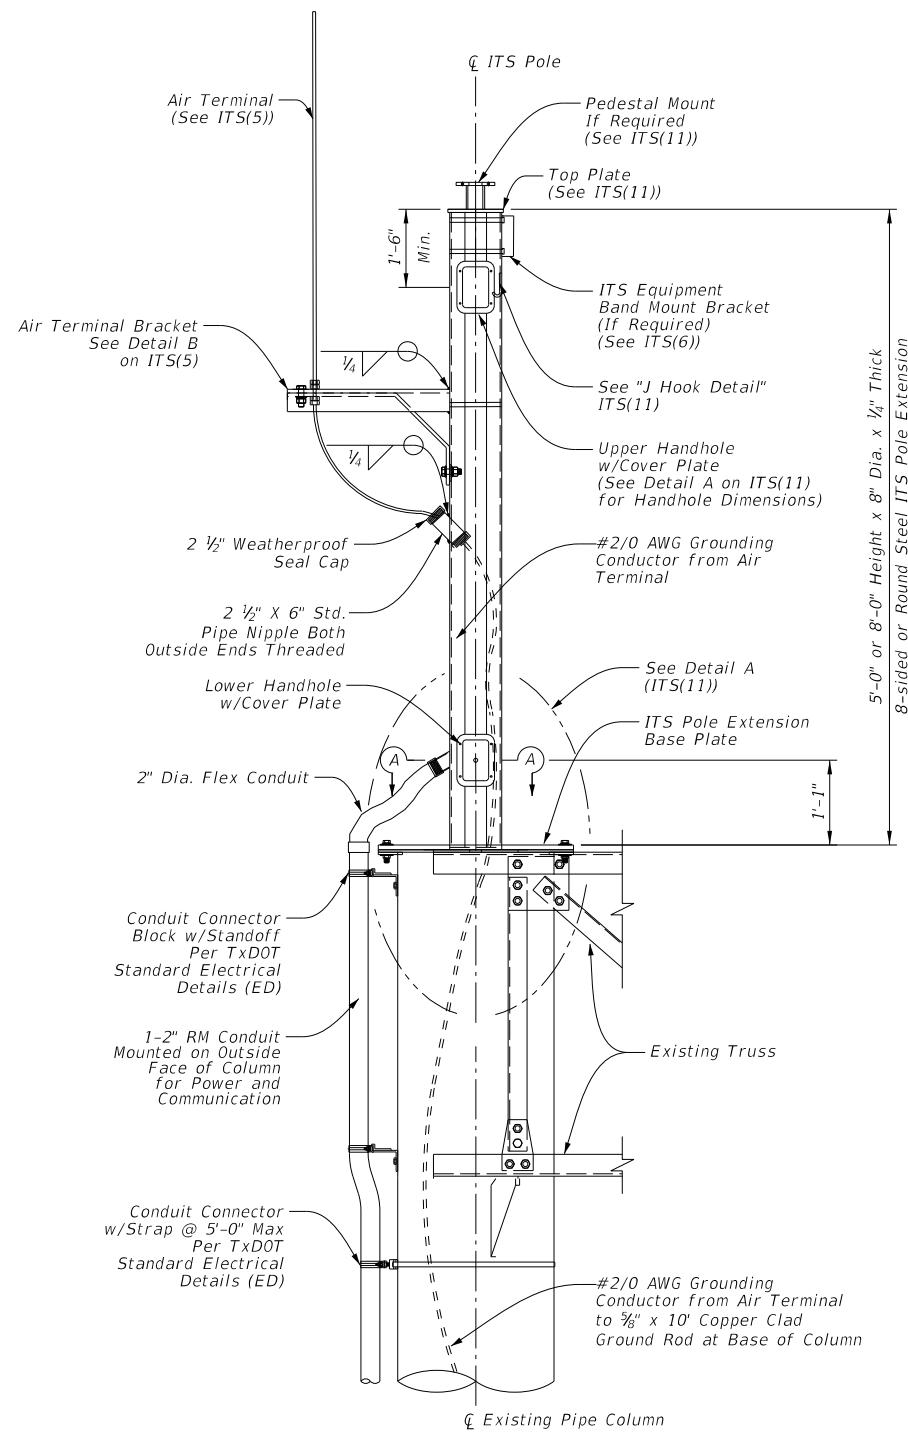

ITS Pole Extension Elevation

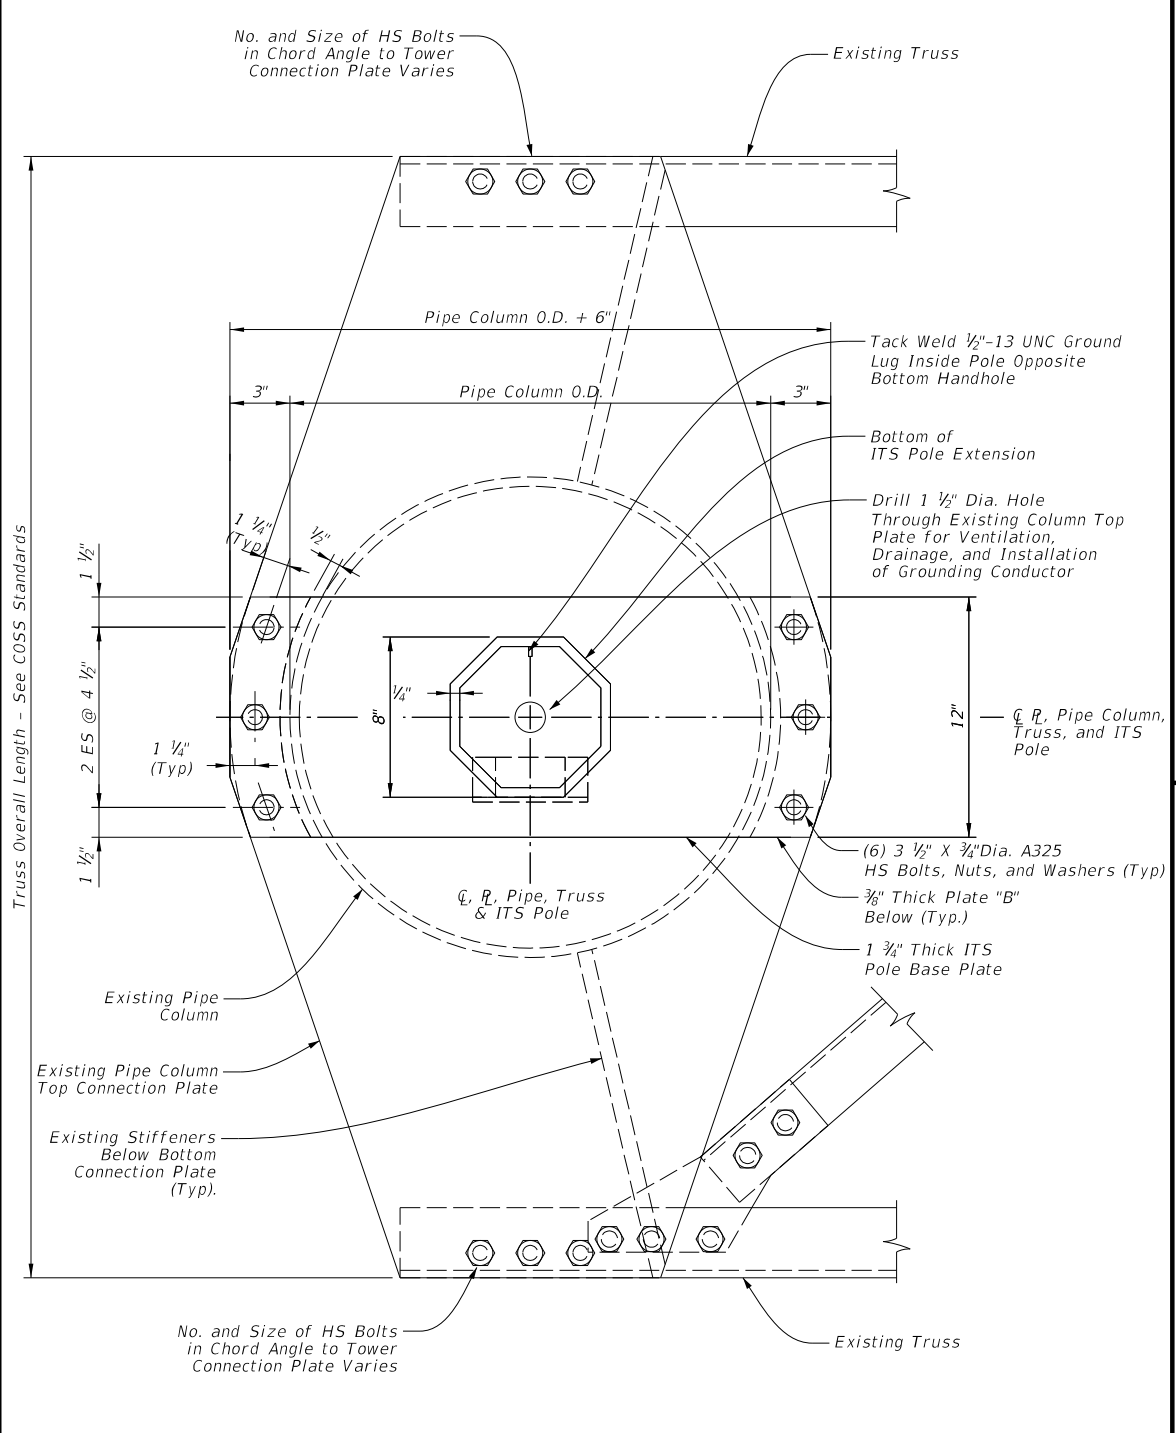

Column Top Plate Plan

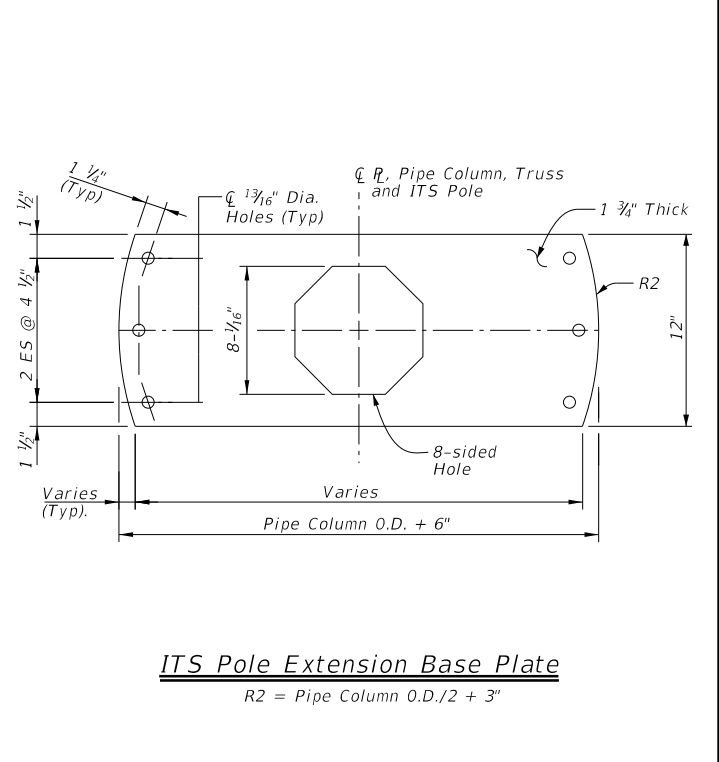

ITS Pole Extension Base Plate
 R2 = Pipe Column O.D./2 + 3"

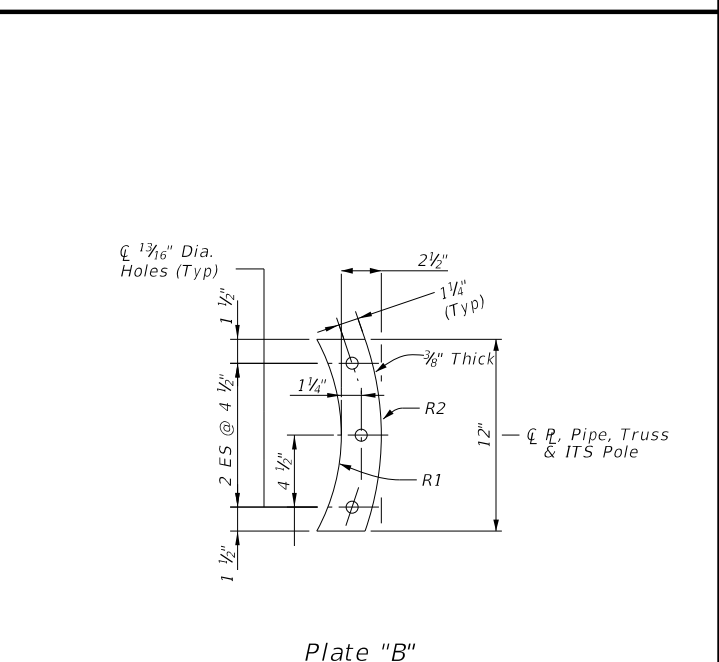


Plate "B"
 R1 = Pipe Column O.D./2 + 1/2"
 R2 = Pipe Column O.D./2 + 3"

General Notes:

- Designed according to Sixth Edition 2013 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications. Standard designed for a maximum dead load of 170 LBS and effective projected area (EPA) of 8 square feet of ITS equipment at the top of the pole. Design wind speed up to 130 MPH (3-Second Wind Gusts) with a 1.14 gust factor. A wind importance factor of 1.00 is applied to adjust the wind speed to a 50 year recurrence interval at 33 FT above the ground for Exposure C category in accordance with TxDOT WV&IZ(LTS2013). Design values listed in the table allow the base of the pole to be elevated above the surrounding ground level no more than 45 FT.
- Refer to TxDOT Cantilever Overhead Sign Support Structure (COSS) standards for pipe column and top plate dimensions for fabricating ITS pole base plate.
- Galvanize ITS pole extensions, base plate, gusset plate, and structural bolts in accordance with Item 445, "Galvanizing".
- Furnish and tighten HS bolts and fasteners in accordance with Item 447, "Structural Bolting."
- The air terminal support bar shall be mounted on the side of the pole away from traffic.
- The furnishing and installation of the 1" conduit, ground rod, #2/0 AWG ground wire, ground clamp and other materials required to ground the ITS pole in accordance with TxDOT Standards and the NEC shall be subsidiary to the various pay items. The grounding electrode conductor shall be protected from damage and be electrically continuous per NEC.
- Field verify all dimensions prior to fabrication of base plate and Plate "B".
- Location of pipe nipple at base of ITS pole may vary depending on which side of the structure the conduit is installed.
- Provide lightning protection using air terminals on structures utilizing the rolling sphere method. Provide lightning protection system consisting of air terminals, down conductor, and grounding system installed in accordance with NFPA 780 and tested in accordance with IEEE 142. Meet the following requirements:
 - Position - in center of least utilized field of view.
 - Height - camera equipment to be within 45 degree protective zone of air terminal.
 - Material - 1/2" ETP alloy 110 copper air terminal (Class II)
 - Clearance - 24" minimum height above highest point of ITS equipment.
 - Bonding - attach air terminal to bracket by exothermic weld or with approved clamping.
 - Structure wind rating in accordance with TxDOT WV & IZ (LTS2013).
 - Galvanize air terminal bracket in accordance with Item 445, "Galvanizing."



**ITS POLE EXTENSION
 OVERHEAD SIGN STRUCTURE
 STEEL PIPE COLUMN**


ITS(10)-15

FILE: ifs(10)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	107	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:51 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS.V2 Design Phase of ADSS and OHS Installation


* A Welded Handhole Frame is Permissible. Maximum of Two (2) Splices will be allowed.

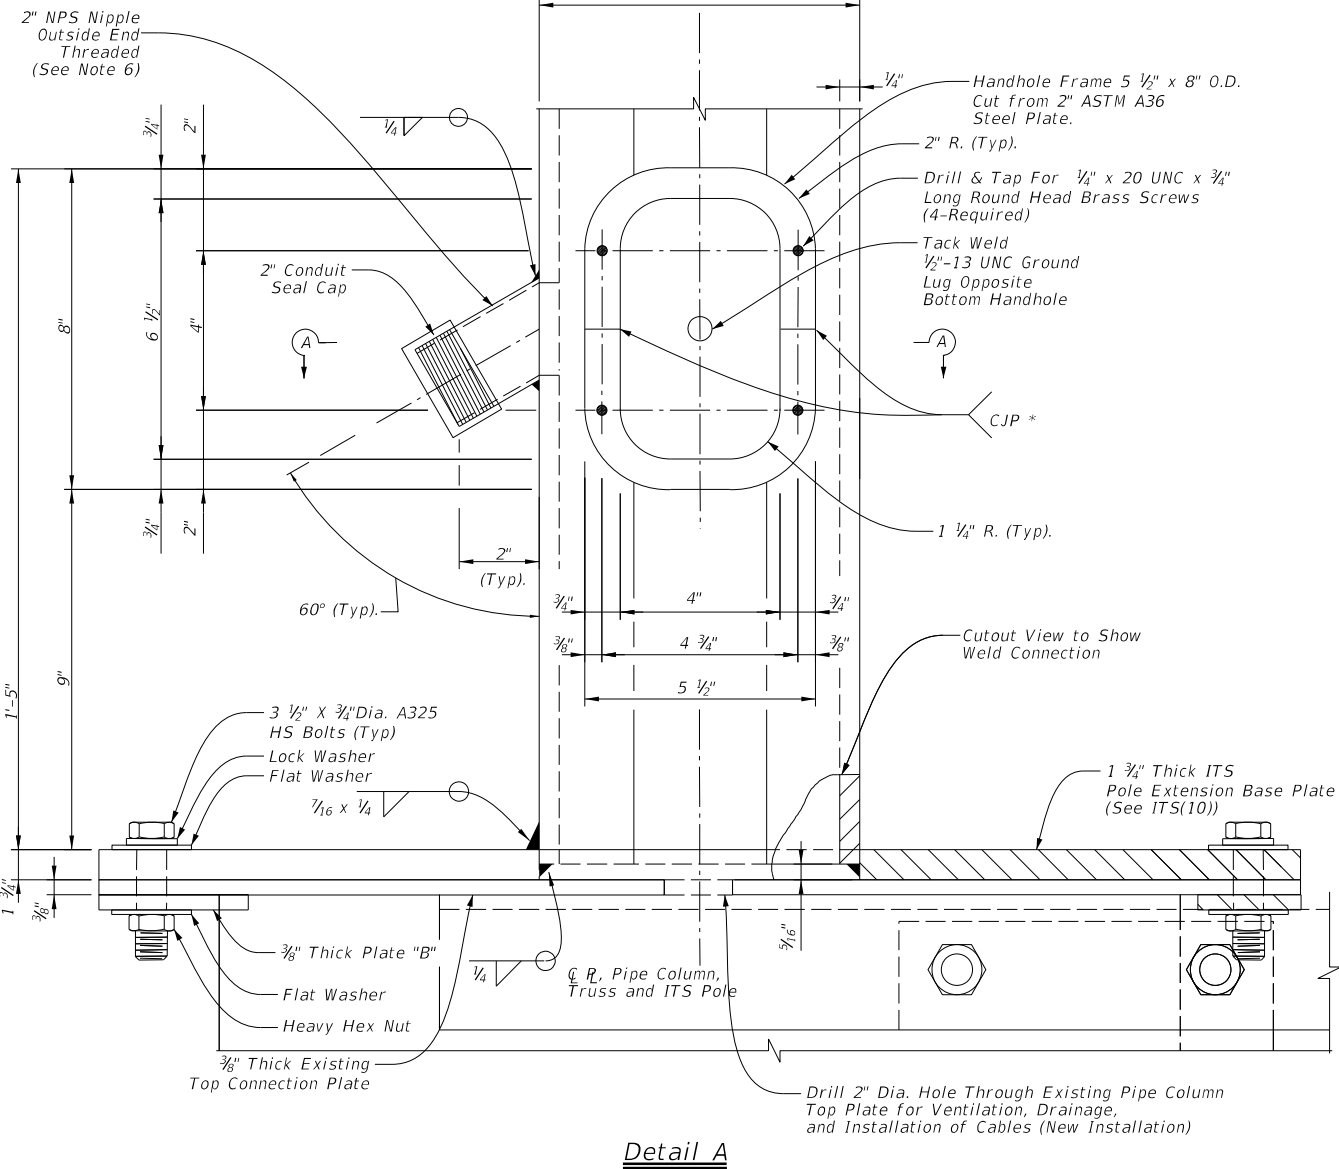

Detail A


General Notes:

1. Hang all cabling inside ITS pole structure with stainless steel wire mesh grips.
2. Bolt positioning in the top plate for the pan/tilt base must be determined in the field per camera manufacturers recommendations. This will allow positioning of the camera to maximize coverage area. The Engineer will determine the camera's blind zone at each location.
3. Make all welds conform to Item 441 and AWS D 1.1 (Structural Welding). Repair damaged galvanized coating per Item 445, "Galvanizing."
4. Galvanize parts in accordance with Item 445, "Galvanizing" unless otherwise noted.
5. Furnish and tighten HS bolts and fasteners in accordance with Item 447, "Structural Bolting."
6. Location of pipe nipple at base of ITS pole may vary depending on which side of the structure the conduit is installed.

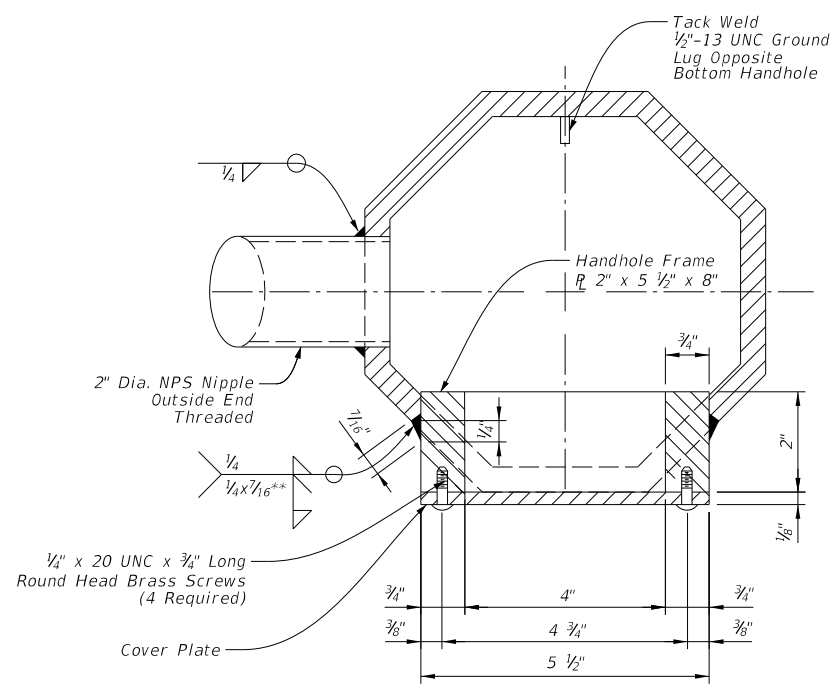

Section A-A

** 85% Min. Penetration.

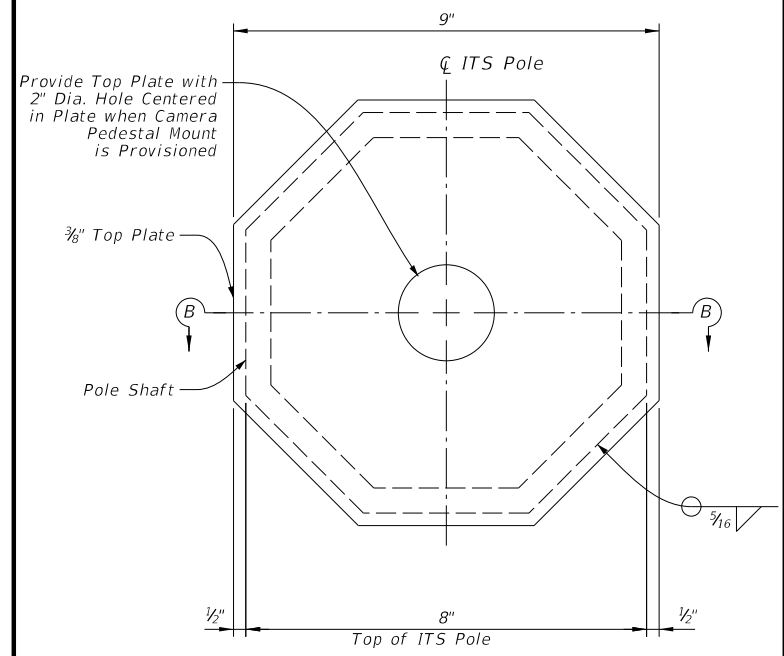

Top Plate Details



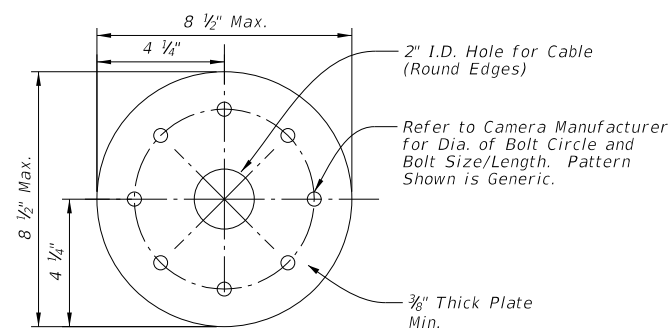


Plate A Detail

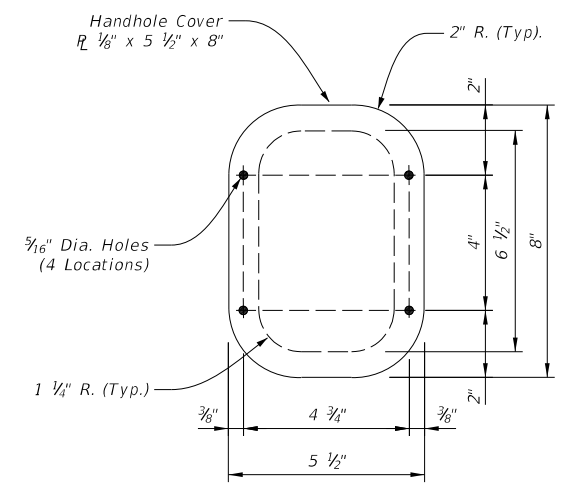


Cover Plate Detail

SHEET 2 OF 2

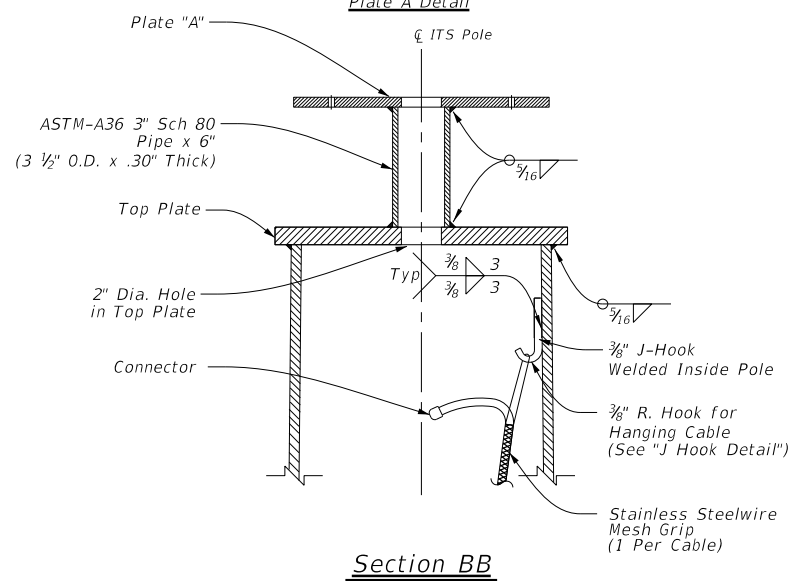

Section BB

Pedestal Mount Detail




J-Hook Detail

ITS POLE EXTENSION OVERHEAD SIGN STRUCTURE STEEL PIPE COLUMN

ITS(11)-15


FILE: ifs(10)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
DIST	COUNTY	SHEET NO.		
AMA	POTTER	108		

DATE: 8/1/2023 2:23:53 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase 01.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of drawings or for incorrect results or damages resulting from its use.

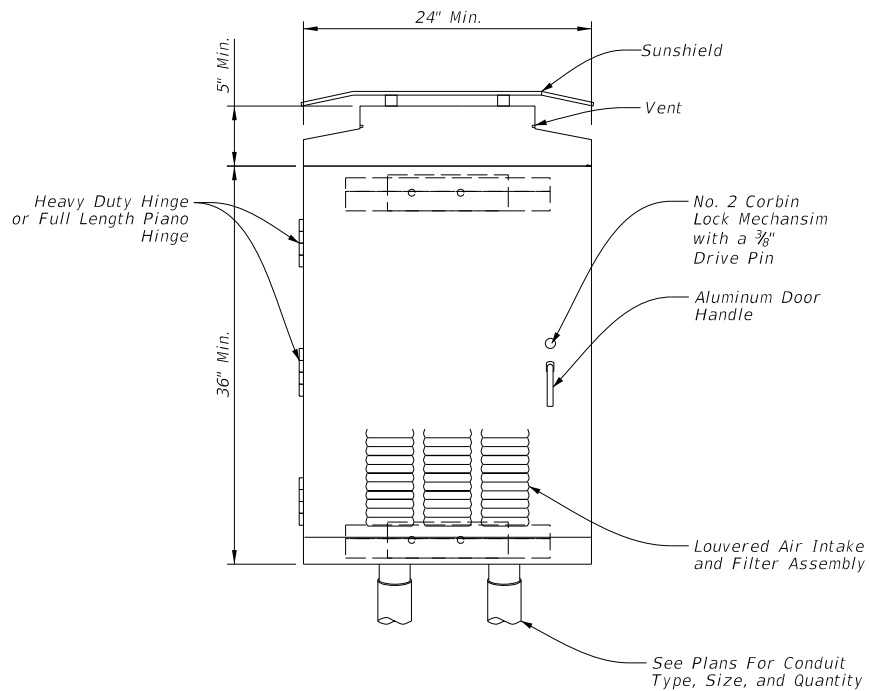


Pole Mounted Cabinet - Type 2 Front View

Not to Scale

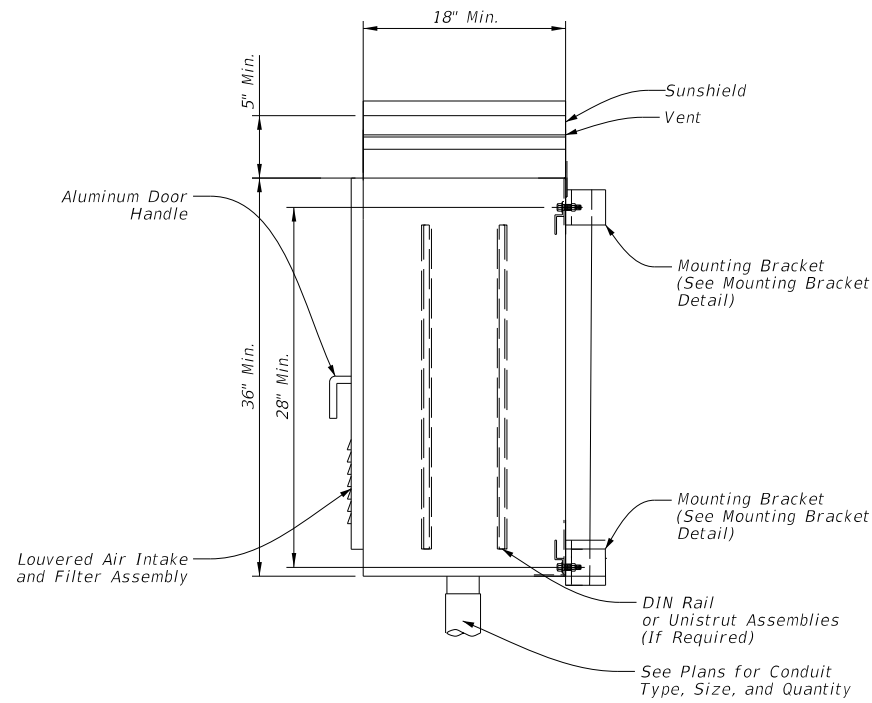

Pole Mounted Cabinet - Type 2 Side View


Not to Scale

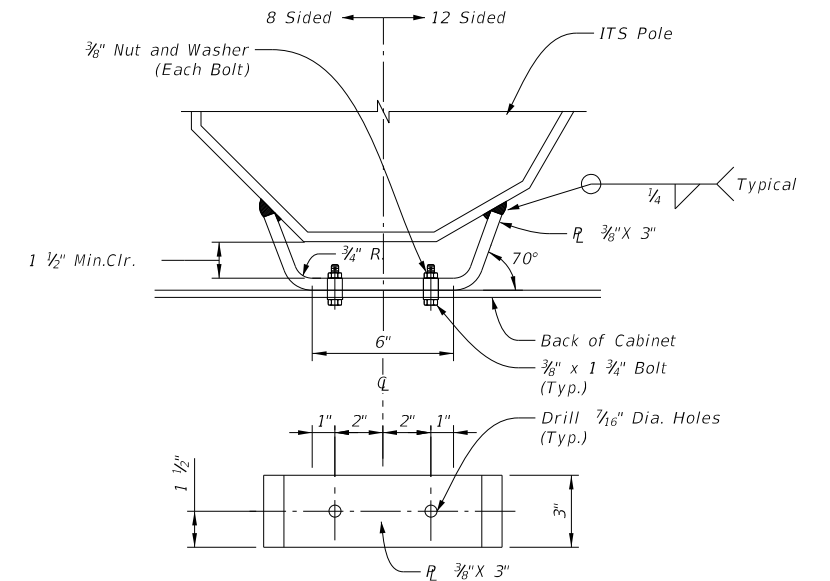

Note:
ITS Pole May be Round, Octagonal (8 Sided), or Dodecahedron (12 Sided).
See ITS(1), and ITS(2) for Details.


Mounting Bracket Detail

Not to Scale

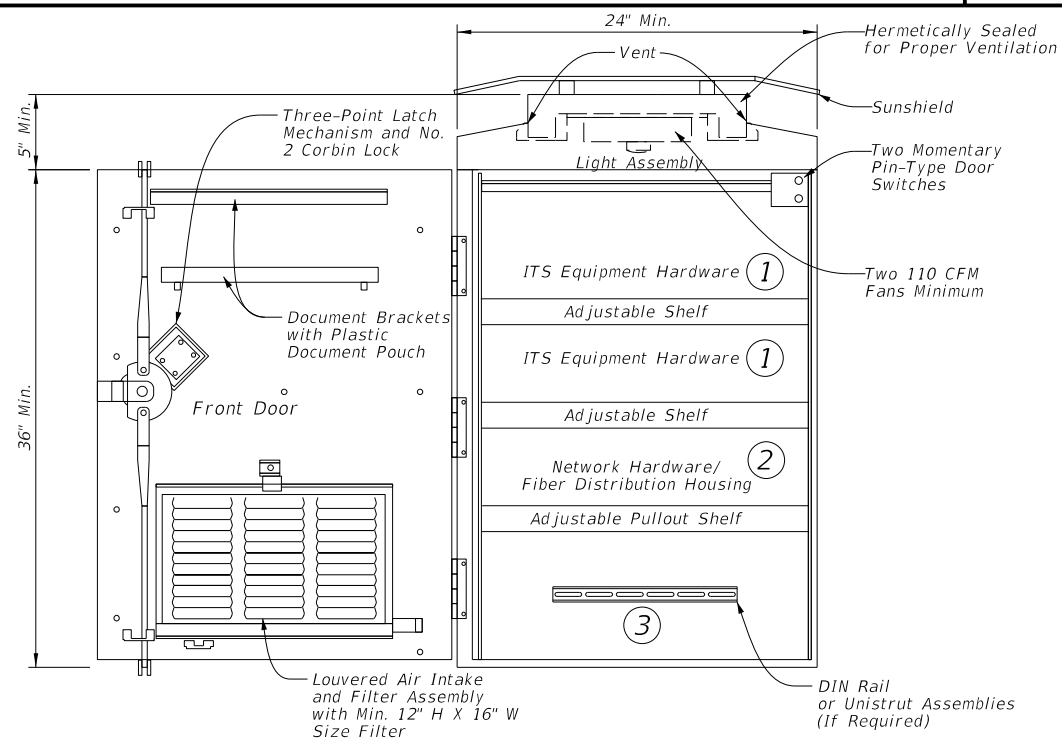

Interior - Type 2 Without 19" EIA Rack - Front View

Not to Scale

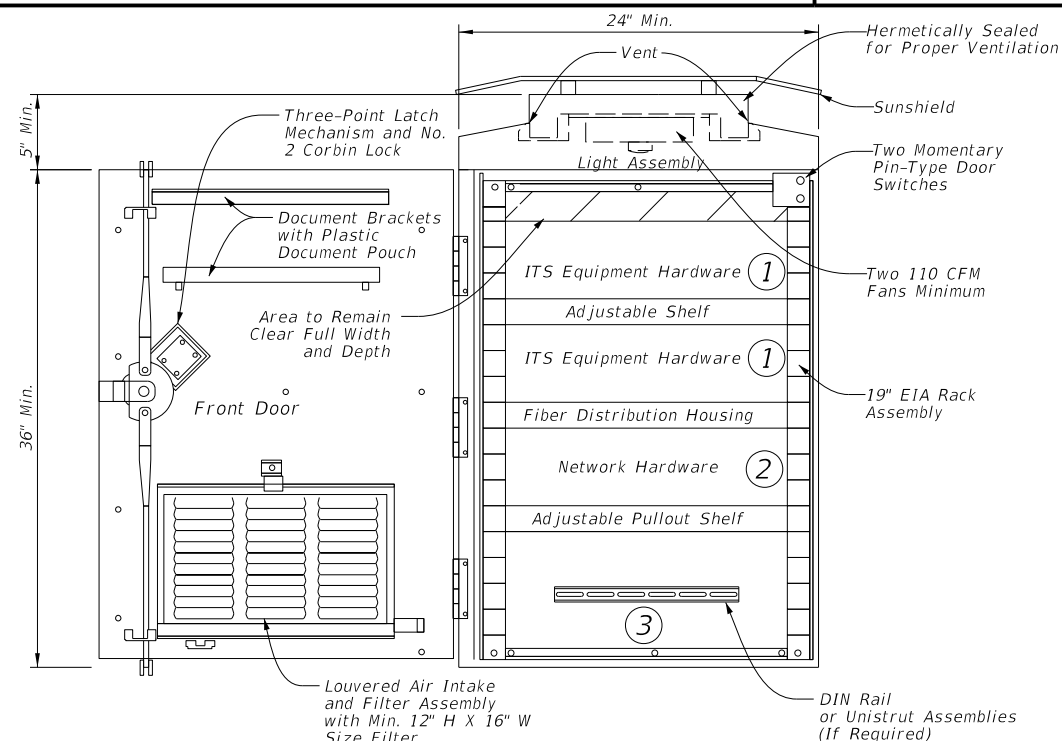



Interior - Type 2 With 19" EIA Rack - Front View

Not to Scale

Typical Equipment Layout Legend	
Example Equipment	
①	CCTV Interface Panel, Radar Vehicle Sensing Device (RVSD) Equipment, DMS/LCS Controller, Environmental Sensor Station (ESS) Equipment, Bluetooth Equipment, or ITS Radio Equipment (See General Note 1)
②	Ethernet Switch, Video Encoder, Terminal Server, Fiber Optic Transceivers, or Media Conversion Equipment (See General Note 1)
③	Power Distribution Assembly, Service Entrance Breakers, Primary AC Power, Auxiliary Power Strip, Ground Bus Bar, Surge Protection Equipment

General Notes:

- Layout of hardware equipment and configuration shown is diagrammatic in nature and intended to represent a preferred Type 2 pole mounted cabinet setup. Hardware needed for each Type 2 cabinet varies and not all cabinet equipment may be shown. The contractor will be responsible for configuring cabinets with all appropriate ITS hardware and power supplies in accordance with the plans and specifications. The contractor may alter the cabinet configuration shown to maximize space and ensure easy access for maintenance.
- Mount cabinet as detailed on ITS(15) or ITS(17). Orientation of cabinet on ITS pole may vary depending on field conditions. Mount the pole mounted cabinet to the backside of the ITS pole, to allow maintenance personnel to access the cabinet while being able to view oncoming traffic.
- For ITS pole sites located on slopes greater than 4H:1V, mount the cabinet to the backside of the ITS pole as detailed on ITS(7). Mounting height to accommodate maintenance pad for easy access.
- All dimensions are approximate and represent minimum cabinet dimensions.
- Provide conduit entrances at the bottom of the cabinet.
- Paid under Special Specification "ITS Pole with Cabinet" (Configuration 1) without 19" EIA rack.
Paid under Special Specification "ITS Pole with Cabinet" (Configuration 2) with 19" EIA rack.

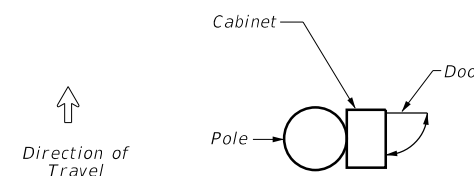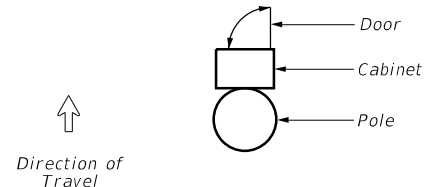

Orientation of Type 2 Cabinet on ITS Pole (Typical)

Not to Scale

Traffic Operations Division Standard







ITS POLE MOUNTED CABINET TYPE 2 DETAILS

ITS(15)-15


FILE: ifs(15)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	109	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of drawings or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:23:54 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS.V2 Design Phase of ADSS of poles and cabinets

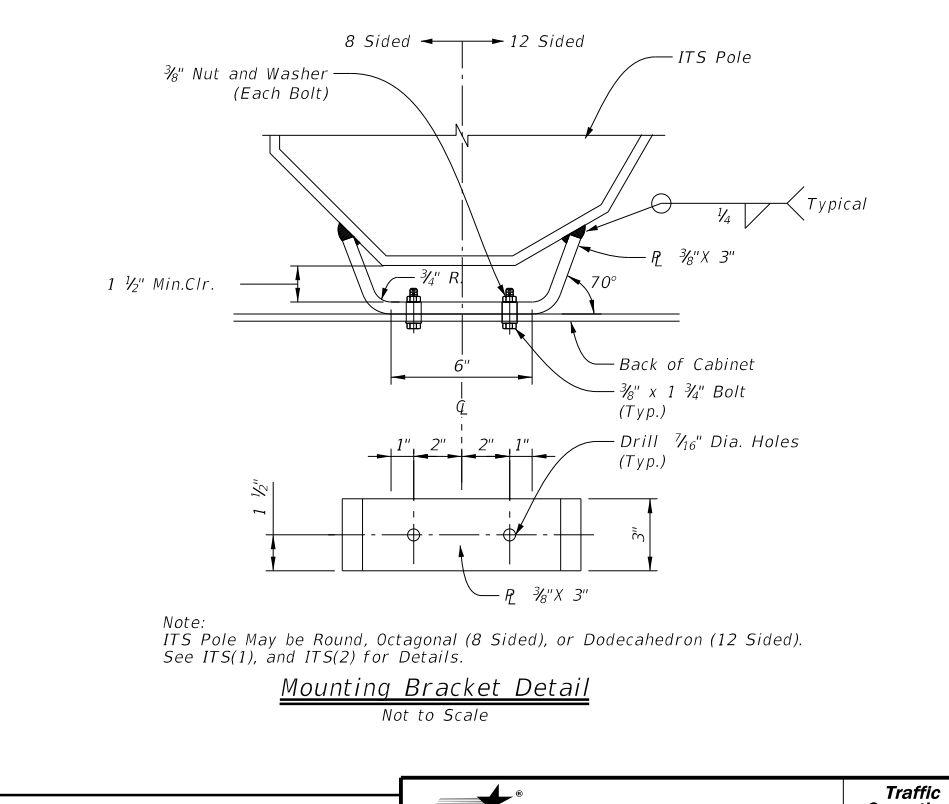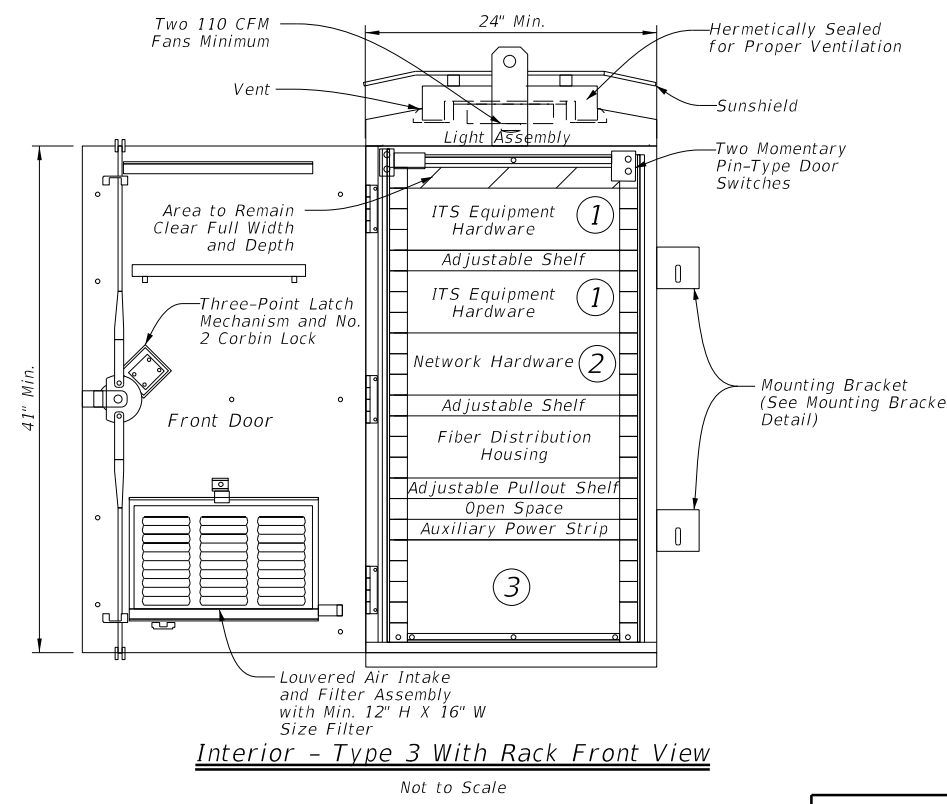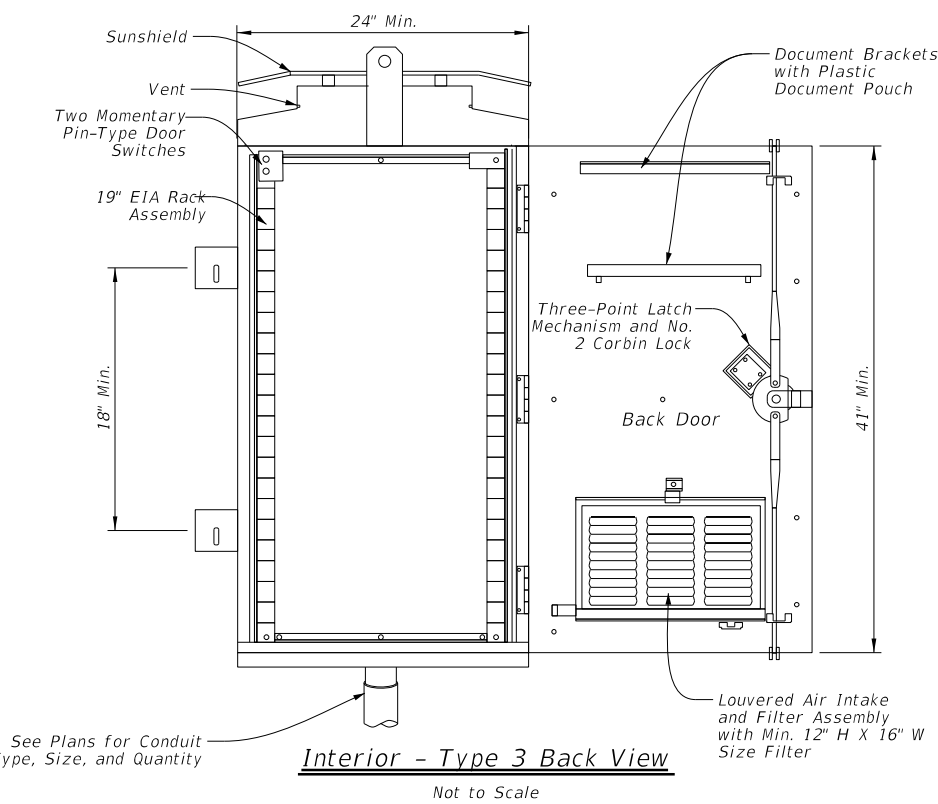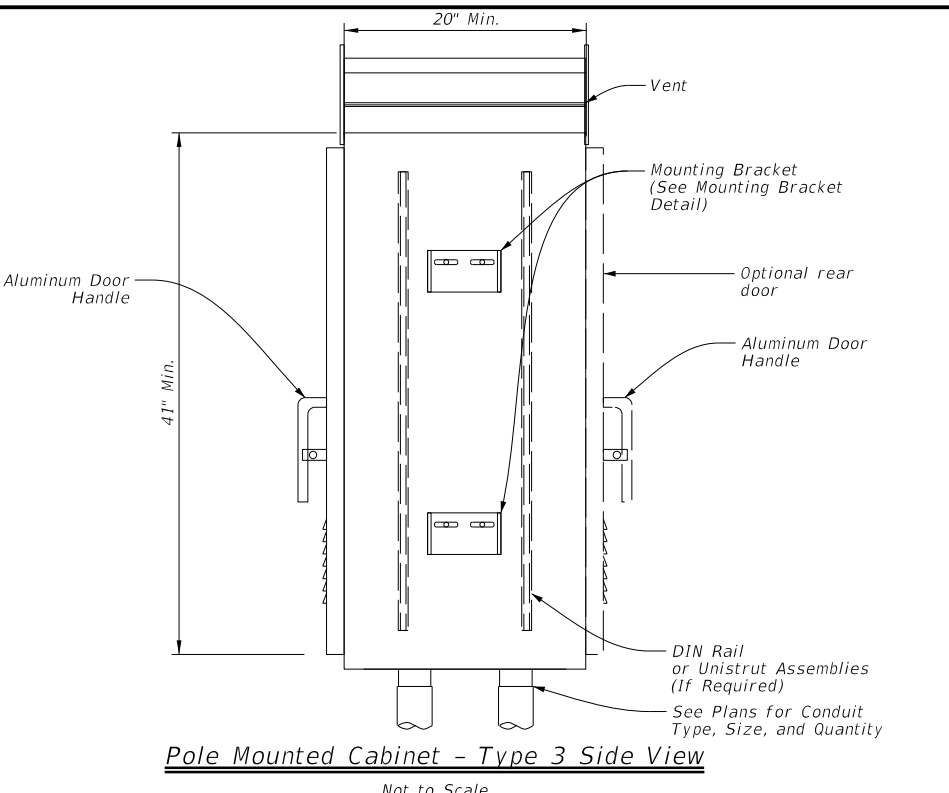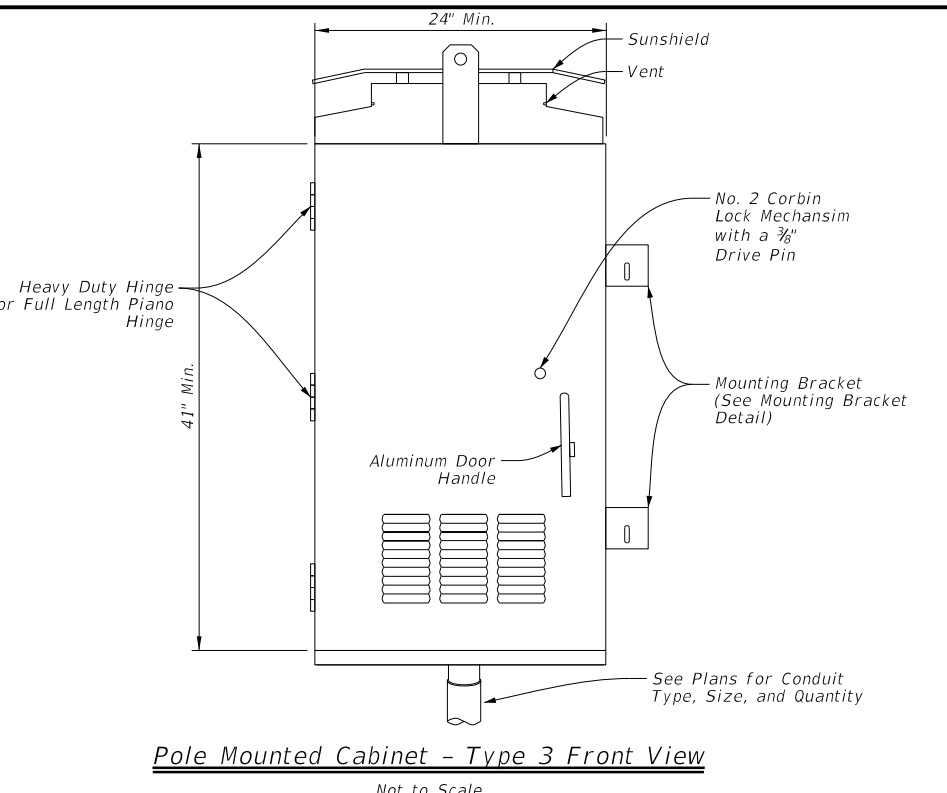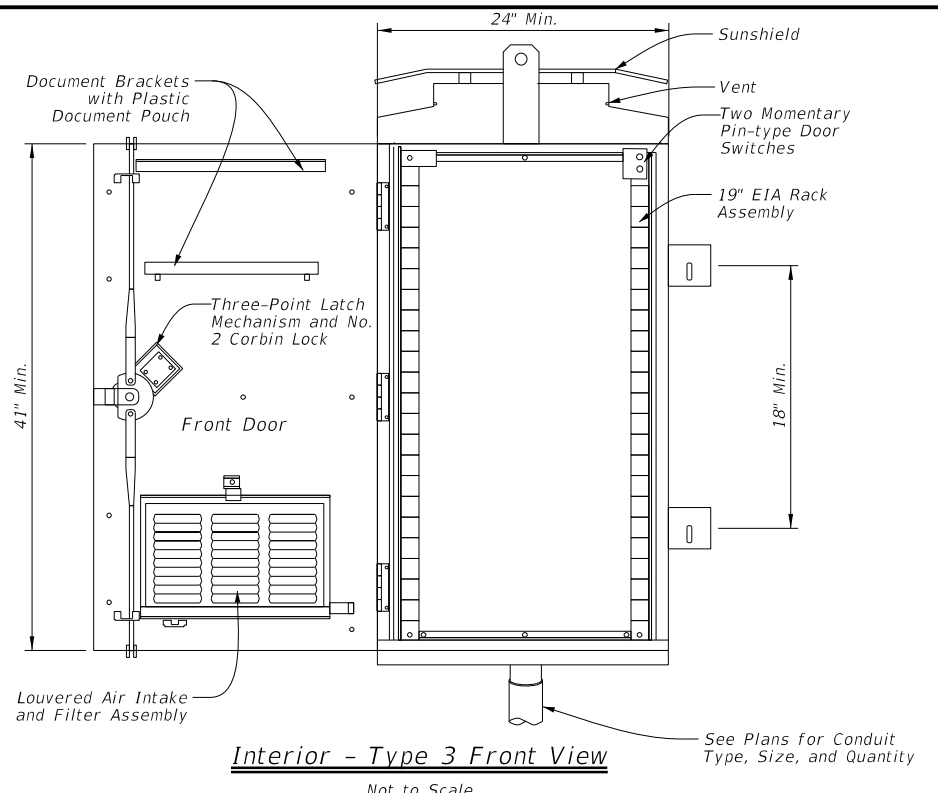

- General Notes:**
- Layout of hardware equipment and configuration shown is diagrammatic in nature and intended to represent a preferred Type 3 pole mounted cabinet setup. Hardware needed for each Type 3 cabinet varies and not all cabinet equipment may be shown. The contractor will be responsible for configuring cabinets with all appropriate ITS hardware and power supplies in accordance with the plans and specifications. The contractor may alter the cabinet configuration shown to maximize space and ensure easy access for maintenance.
 - Mount cabinet as detailed on ITS(16) or ITS(17). Orientation of cabinet on ITS pole may vary depending on field conditions. Mount the pole mounted cabinet to the backside of the ITS pole, to allow maintenance personnel to access the cabinet while being able to view oncoming traffic. A dual door configuration (configuration 2) is detailed above.
 - For ITS pole sites located on slopes greater than 4H:1V, Mount the cabinet to the backside of the ITS pole as detailed on ITS(7). Mounting height to accommodate maintenance pad for easy access.
 - All dimensions are approximate and represent minimum cabinet dimensions.
 - Provide conduit entrances at the bottom of the cabinet.
 - Paid under Special Specification "ITS Pole with Cabinet" (Configuration 1) with single door.
 Paid under Special Specification "ITS Pole with Cabinet" (Configuration 2) with dual door

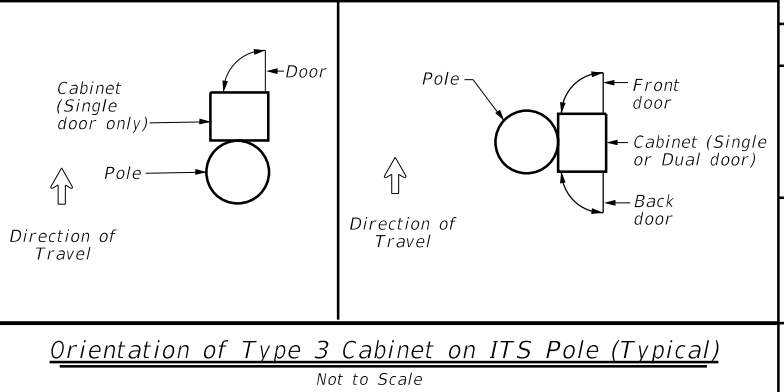

Typical Equipment Layout Legend

Example Equipment	
①	CCTV Interface Panel, Radar Vehicle Sensing Device (RVSD) Equipment, DMS/LCS Controller, Environmental Sensor Station (ESS) Equipment, Bluetooth Equipment, or ITS Radio Equipment (See General Note 1)
②	Ethernet Switch, Video Encoder, Terminal Server, Fiber Optic Transceivers, or Media Conversion Equipment (See General Note 1)
③	Power Distribution Assembly, Service Entrance Breakers, Primary AC Power, Auxiliary Power Strip, Ground Bus Bar, Surge Protection Equipment

Texas Department of Transportation
 Traffic Operations Division Standard


ITS POLE MOUNTED CABINET TYPE 3 DETAILS

ITS(16)-15


FILE: ifs(16)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY		SHEET NO.
	AMA	POTTER		110

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:23:55 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS_V2 Design Phase of ADSS of poles and their 1509

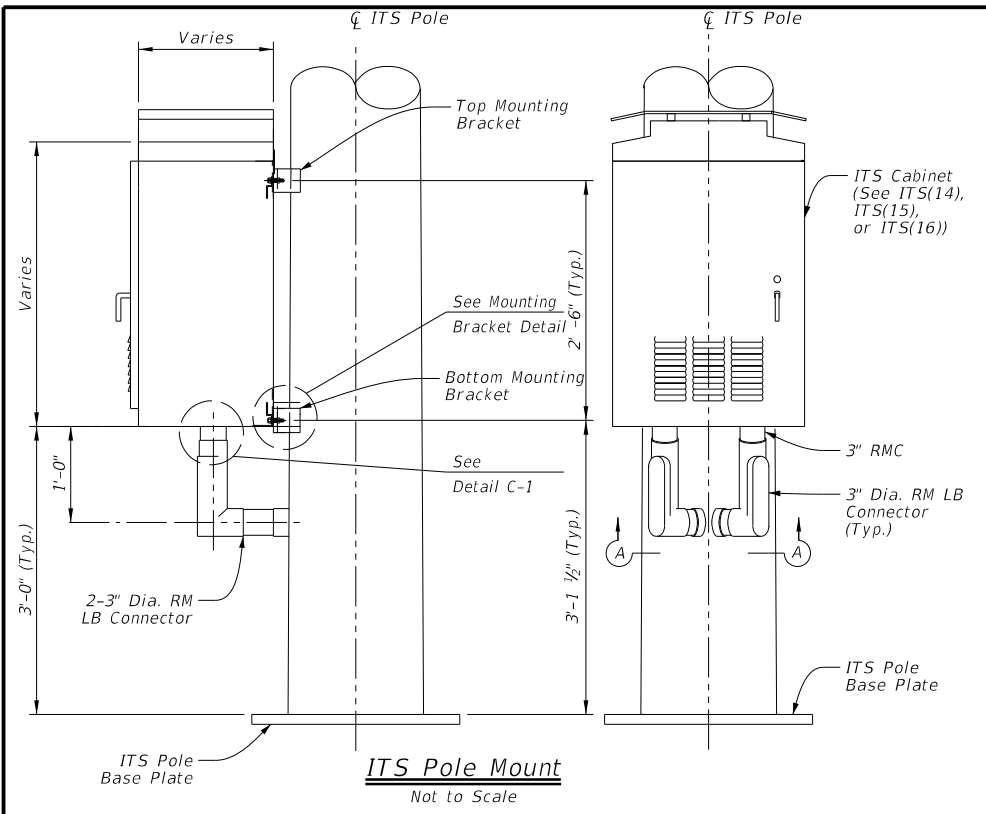


ITS Pole Mount
Not to Scale

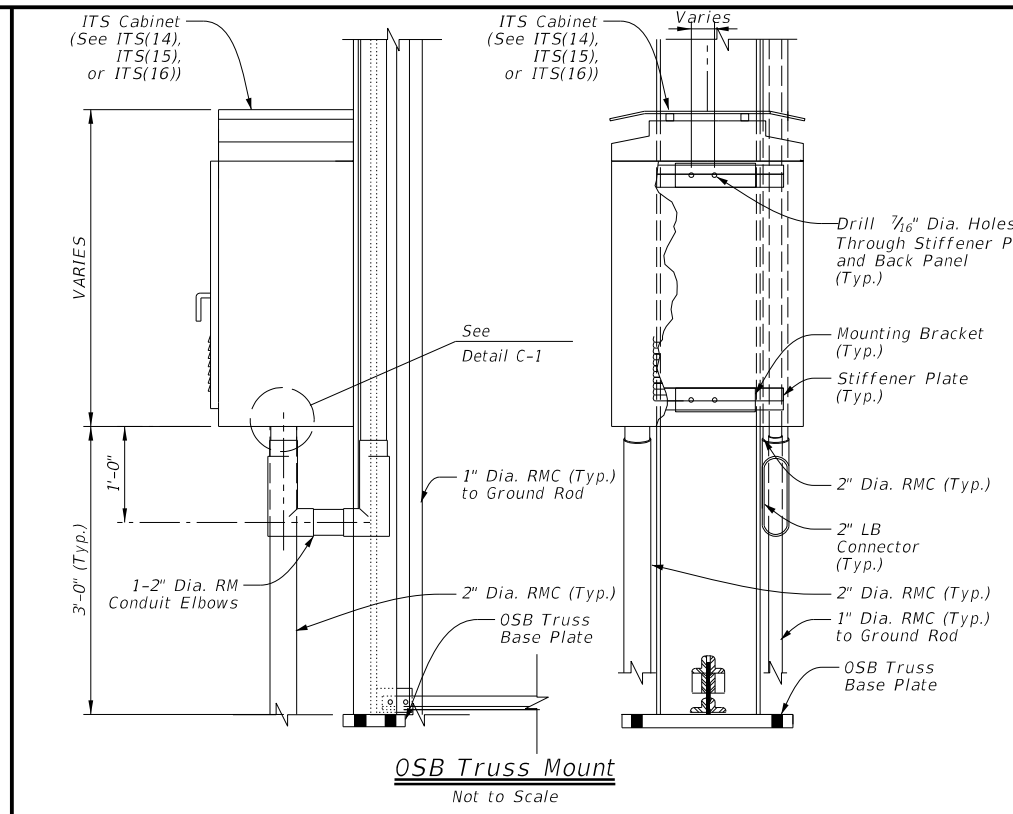


OSB Truss Mount
Not to Scale

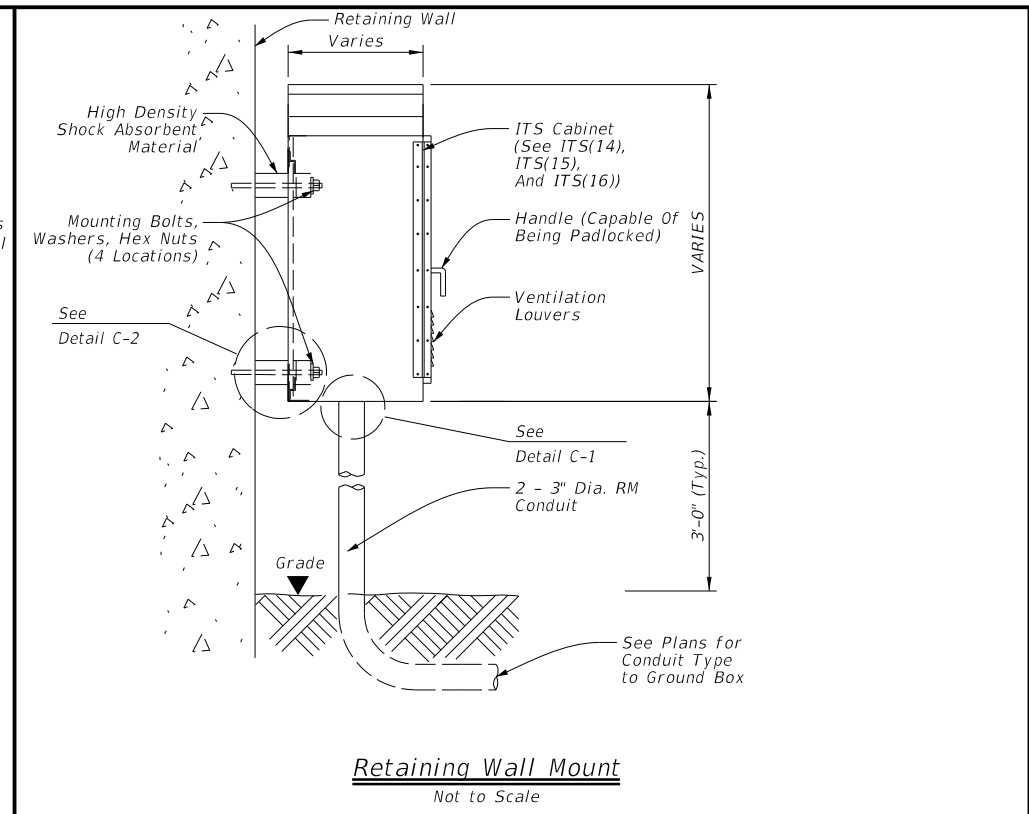


Retaining Wall Mount
Not to Scale

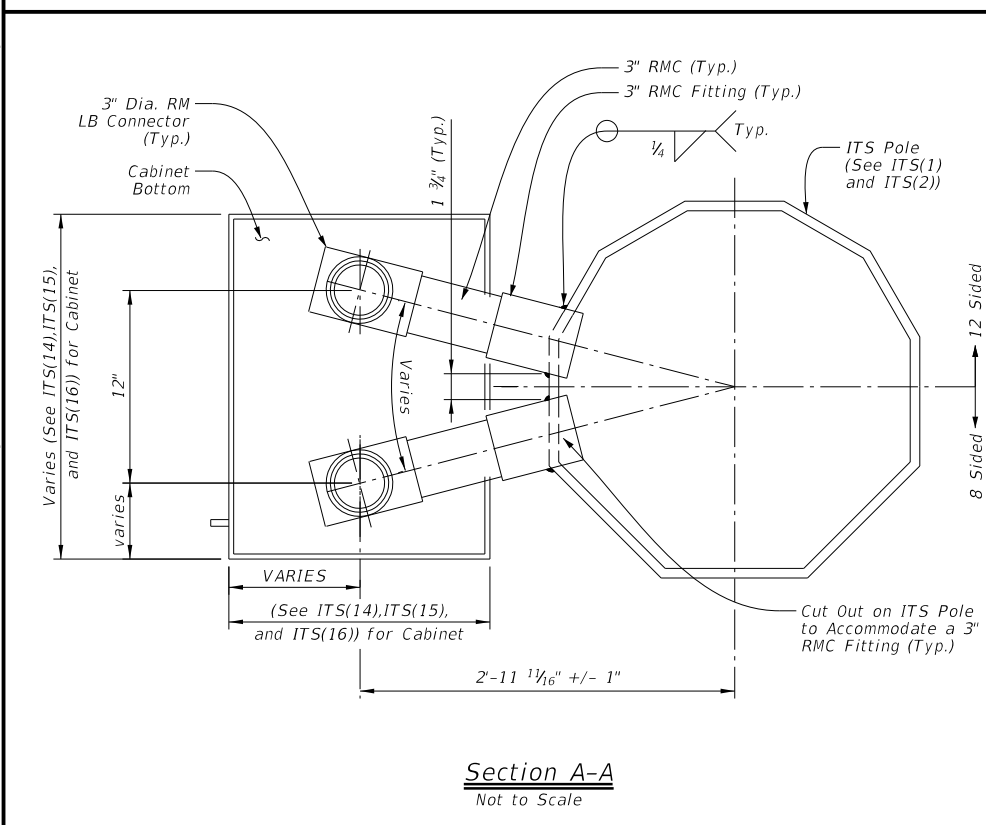

Section A-A
Not to Scale

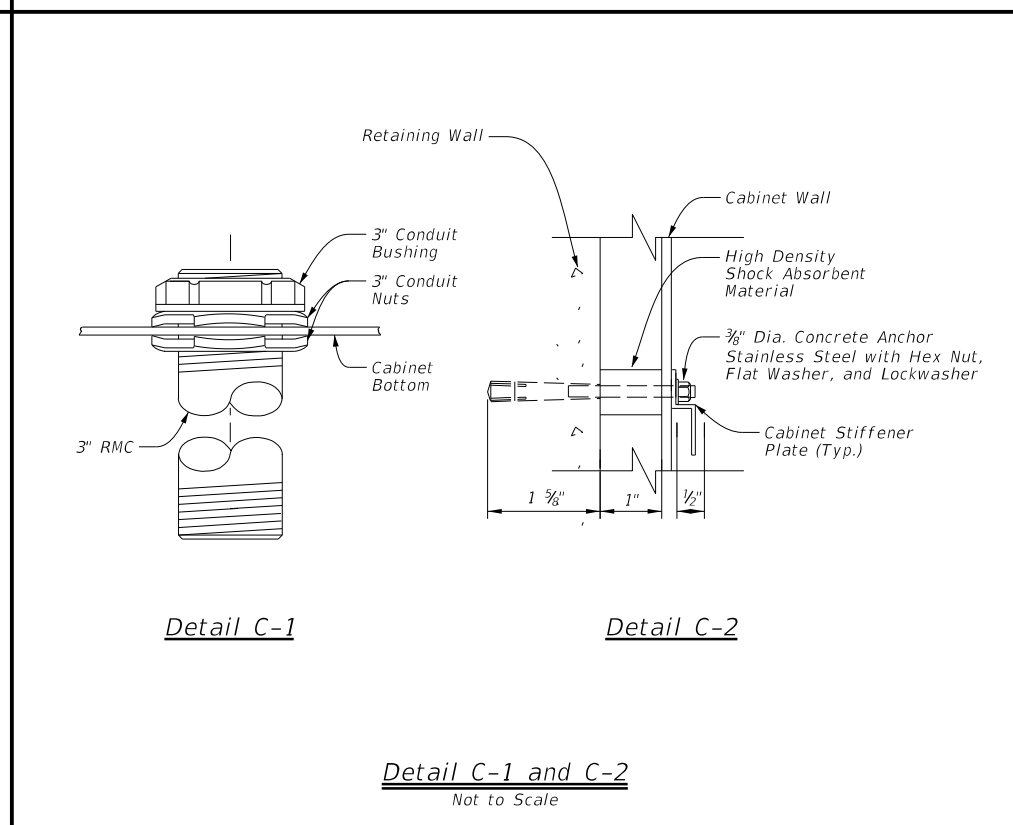

Detail C-1 and C-2
Not to Scale

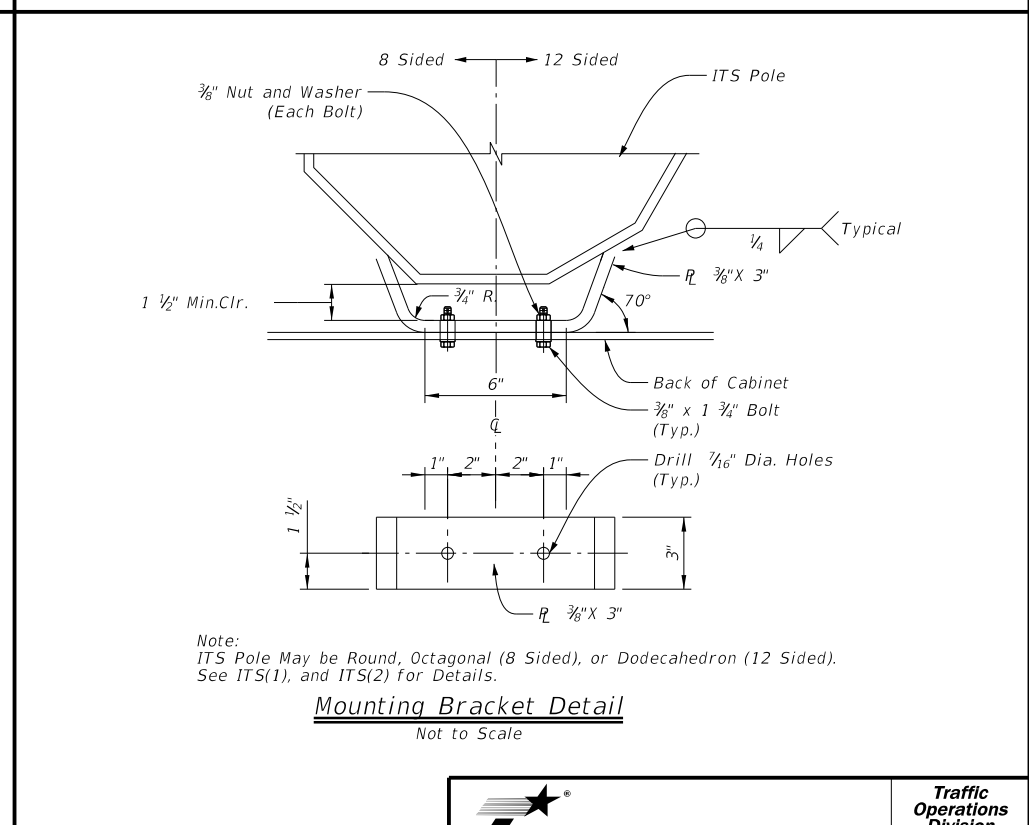

Mounting Bracket Detail
Not to Scale

General Notes:



1. Mount cabinet as detailed on ITS(14), ITS(15), ITS(16), or ITS(17). Orientation of cabinet on ITS pole may vary depending on field conditions. Mount the pole mounted cabinet to the backside of the ITS pole, to allow maintenance personnel to access the cabinet while being able to view oncoming traffic.
2. For ITS pole sites located on slopes greater than 4V:1H, mount the cabinet to the backside of the ITS pole as detailed on ITS(7). Mounting height to accommodate maintenance pad for easy access.
3. All dimensions are approximate and represent minimum dimensions.
4. Provide conduit entrances at the bottom of the cabinet.

		Traffic Operations Division Standard	
<h2>ITS POLE MOUNTED CABINET MISC. MOUNTING DETAILS</h2> <h3>ITS(17)-15</h3>			
FILE: ifs(17)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT June 2015	CON: 0904	SECT: 00	JOB: 220
REVISIONS	COUNTY: POTTER		HIGHWAY: VARIOUS
	DIST: AMA		SHEET NO.: 111

DATE: 8/11/2023 2:24:02 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\AD\01509-0027-12.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

General Notes:


1. Grounding System:
 - A. Description:
 1. Provide ground system consisting of copper wires, ground rods, and concrete-encased grounding electrodes (Ufers), of the configuration shown to minimize potential gradient irregularities, drain leakage, and fault currents to earth.
 - B. Performance:
 1. Provide a grounding system, consisting of a minimum one ground rod, having a resistance not greater than 5 Ohms to ground. Additional ground rods may be added to the system to achieve less than 5 Ohms resistance.
 - C. Design Criteria:
 1. The combined ground resistance of separate systems bonded together below grade may be used to meet the specified ground resistance, but the minimum number of rods indicated shall still be provided.
 2. Measure the resistance of systems requiring separate ground resistance separately before bonding below grade.
 3. Only provide UL-approved materials listed for grounding systems.
 4. Do not combine materials that can form an electrolytic couple that will accelerate corrosion in the presence of moisture, unless moisture is permanently excluded from the junction of such materials.
 5. Submit product data for the materials and products used to perform the work of this section.
 - D. Materials:
 1. Conductors:
 - a. Bare Ground Conductor:
 - 1) For No. 8 AWG or larger bare ground wire sizes, provide soft drawn copper, Class A or Class B, stranded wire meeting the requirements of ASTM B 8.
 2. Ground Compression Connectors:
 - a. Provide molds, thermite packages, and other material for ground compression connectors that are full-rated to carry 100% of the cable rating and which meet IEEE 837.
 - 1) Provide the compression materials from a single manufacturer throughout the project.
 - 2) Provide the items necessary for connecting cable to ground rods.
 3. Ground Rods:
 - a. Provide copper-clad steel ground rods conforming to the requirements specified in UL 467.
 - 1) Diameter: 5/8 in.
 - 2) Length: 10 Ft.
 2. Installation:
 - A. Install grounding components and systems in accordance with the requirements specified in UL 467, IEEE 81, and IEEE 142.
 - B. System Grounding:
 1. Ground Rods:
 - a. Drive ground rods into the ground until the tops of the rods are approximately 18 in. below finished grade.
 - b. If multiple ground rods are needed to meet the minimum resistance of 5 Ohms, space ground rods as evenly as possible, at least 6 feet apart, and so conductors will be connected below grade.
 2. Conductors:
 - a. Provide minimum No. 4 AWG ground wire for system and equipment grounding.
 - b. Using suitable fasteners, securely attach exposed ground wires to structural supports at not more than 2 ft. intervals, where applicable.
 - c. Bends in ground wires greater than 45 degrees are unacceptable.
 3. Cable Connections:
 - a. Use approved exothermic-welded connections for conductor splices and connections between conductors and other components.
 3. Testing:
 - A. Resistance Test:
 1. Test Procedure:
 - a. The ground-resistance measurements of each ground Rod shall be taken.
 - 1) The resistance to ground shall be measured in accordance with the fall-of-potential method specified in IEEE 81 and IEEE 142.
 - 2) Ground-resistance measurements shall be made in normally dry weather, not less than 48 hours after rainfall, and with the ground under test isolated from other grounds.
 - b. Test reports shall be prepared that indicate the location of the ground rod, the grounding system, and the resistance and soil conditions at the time the test was performed.
 2. Acceptance Criteria:
 - a. The grounding system must have a resistance not greater than 5 Ohms.
 - b. Do not energize any part of the electrical distribution system prior to the resistance testing of that system's ground rods and grounding system, and submission of the test results for approval.
 3. Inspections:
 - a. Prepare and submit as-built record drawings of the grounding system as installed and test reports for approval.

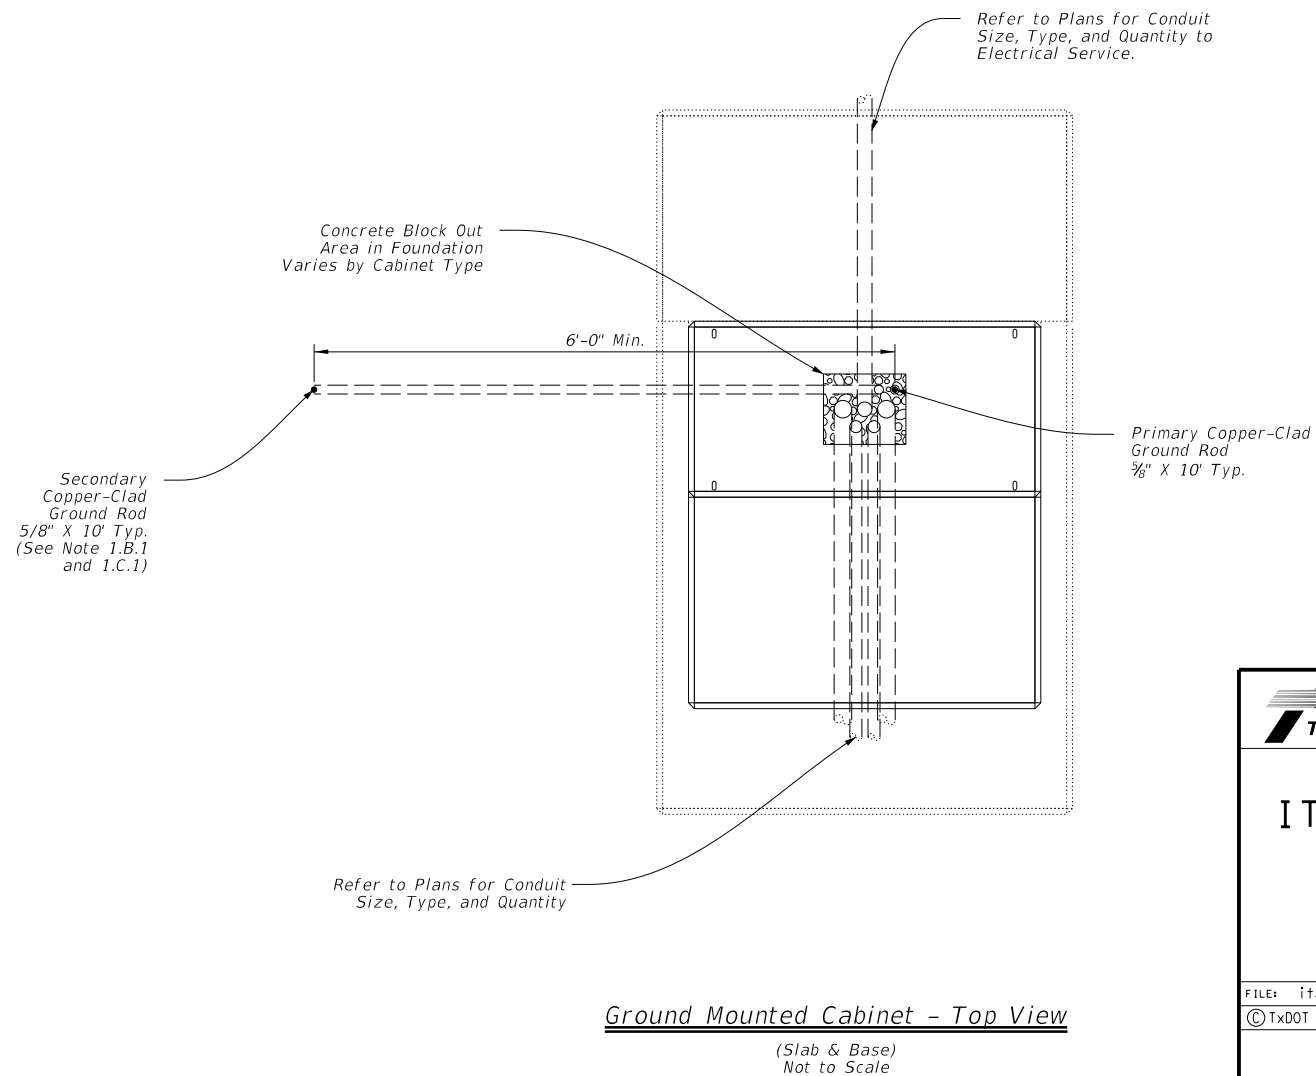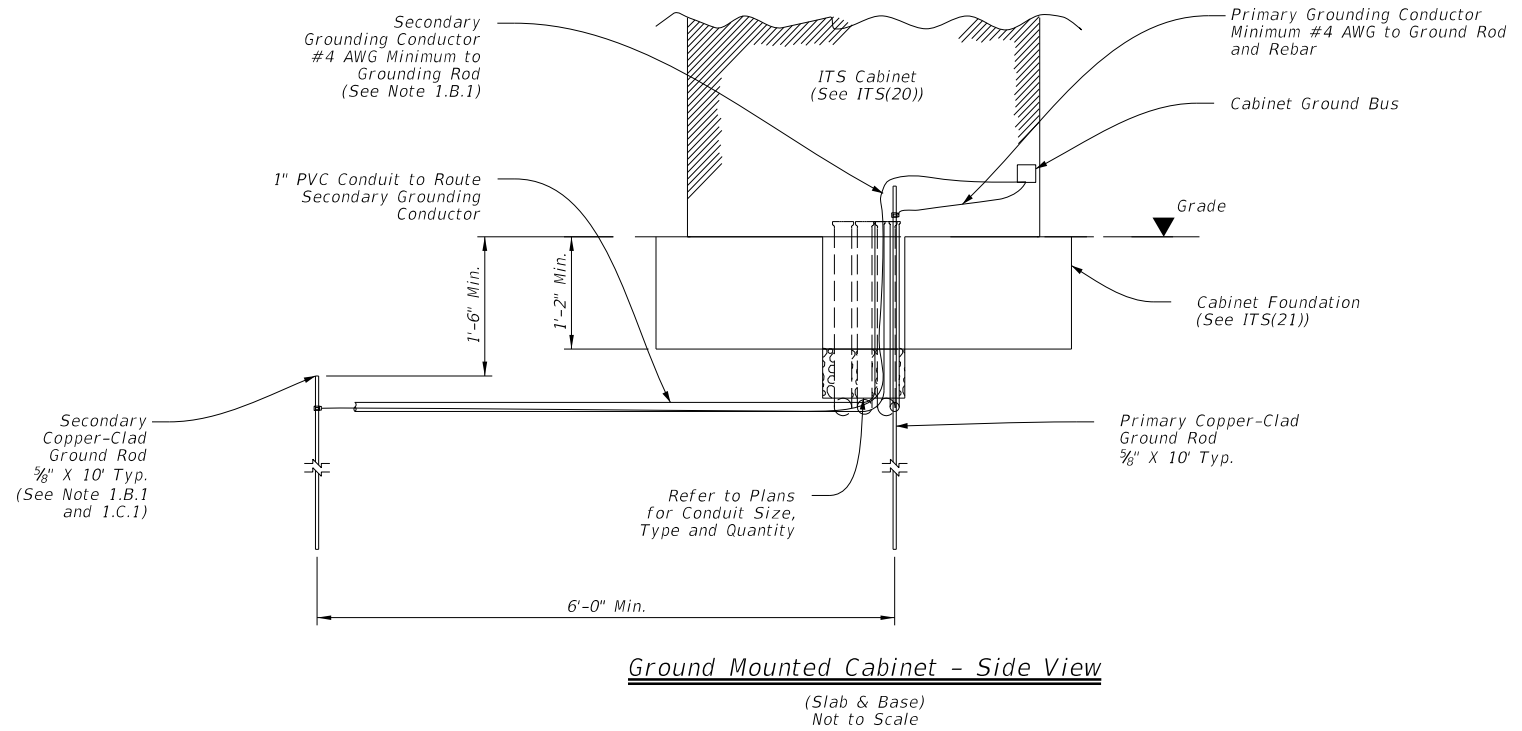


				Traffic Operations Division Standard	
<h2>ITS CABINET GROUNDING DETAILS</h2>					
<h3>ITS(18)-15</h3>					
FILE: ifs(18)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY	
REVISIONS	0904	00	220	VARIOUS	
	DIST	COUNTY		SHEET NO.	
	AMA	POTTER		112	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another or for incorrect results or damages resulting from its use.


DATE: 8/1/2023 2:24:03 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS\2 Design Phase\CAD\standards\ITS\3-16\ITS(3)-16.dgn

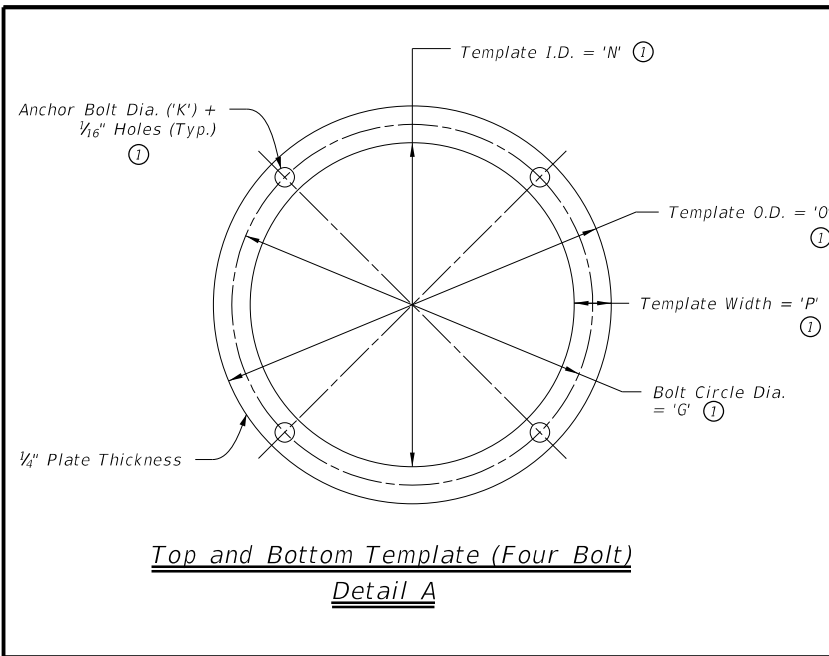


Top and Bottom Template (Four Bolt)
Detail A

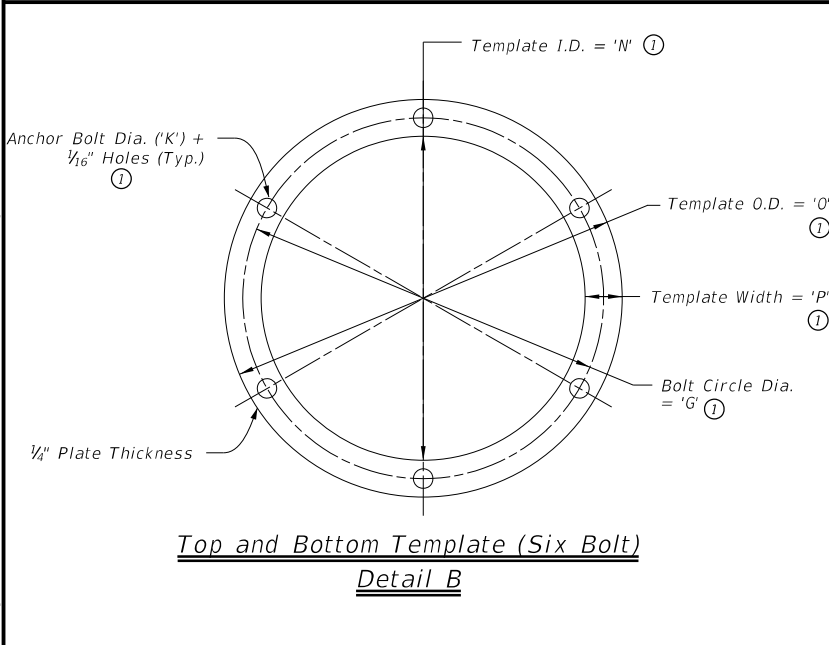


Top and Bottom Template (Six Bolt)
Detail B

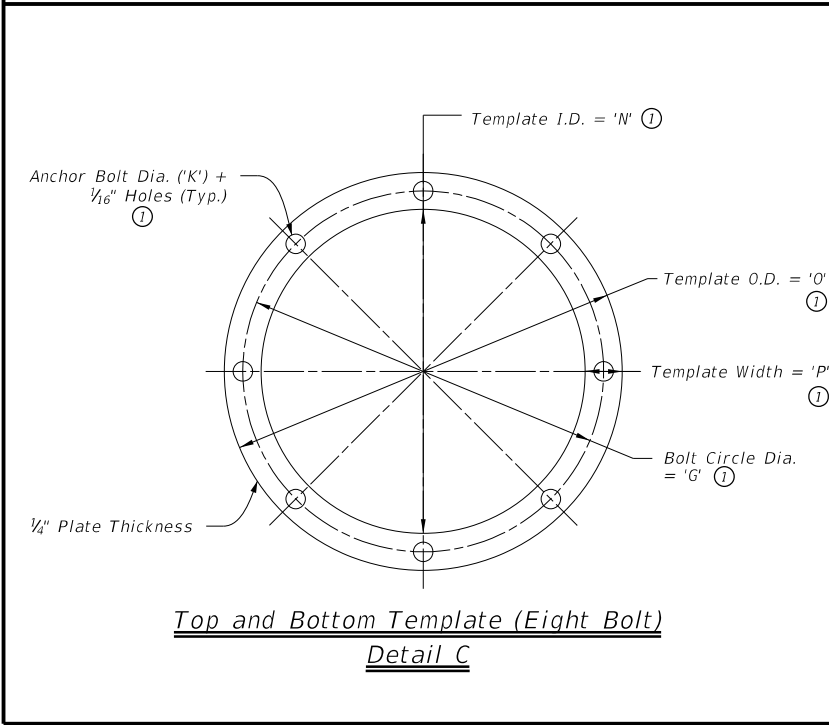


Top and Bottom Template (Eight Bolt)
Detail C

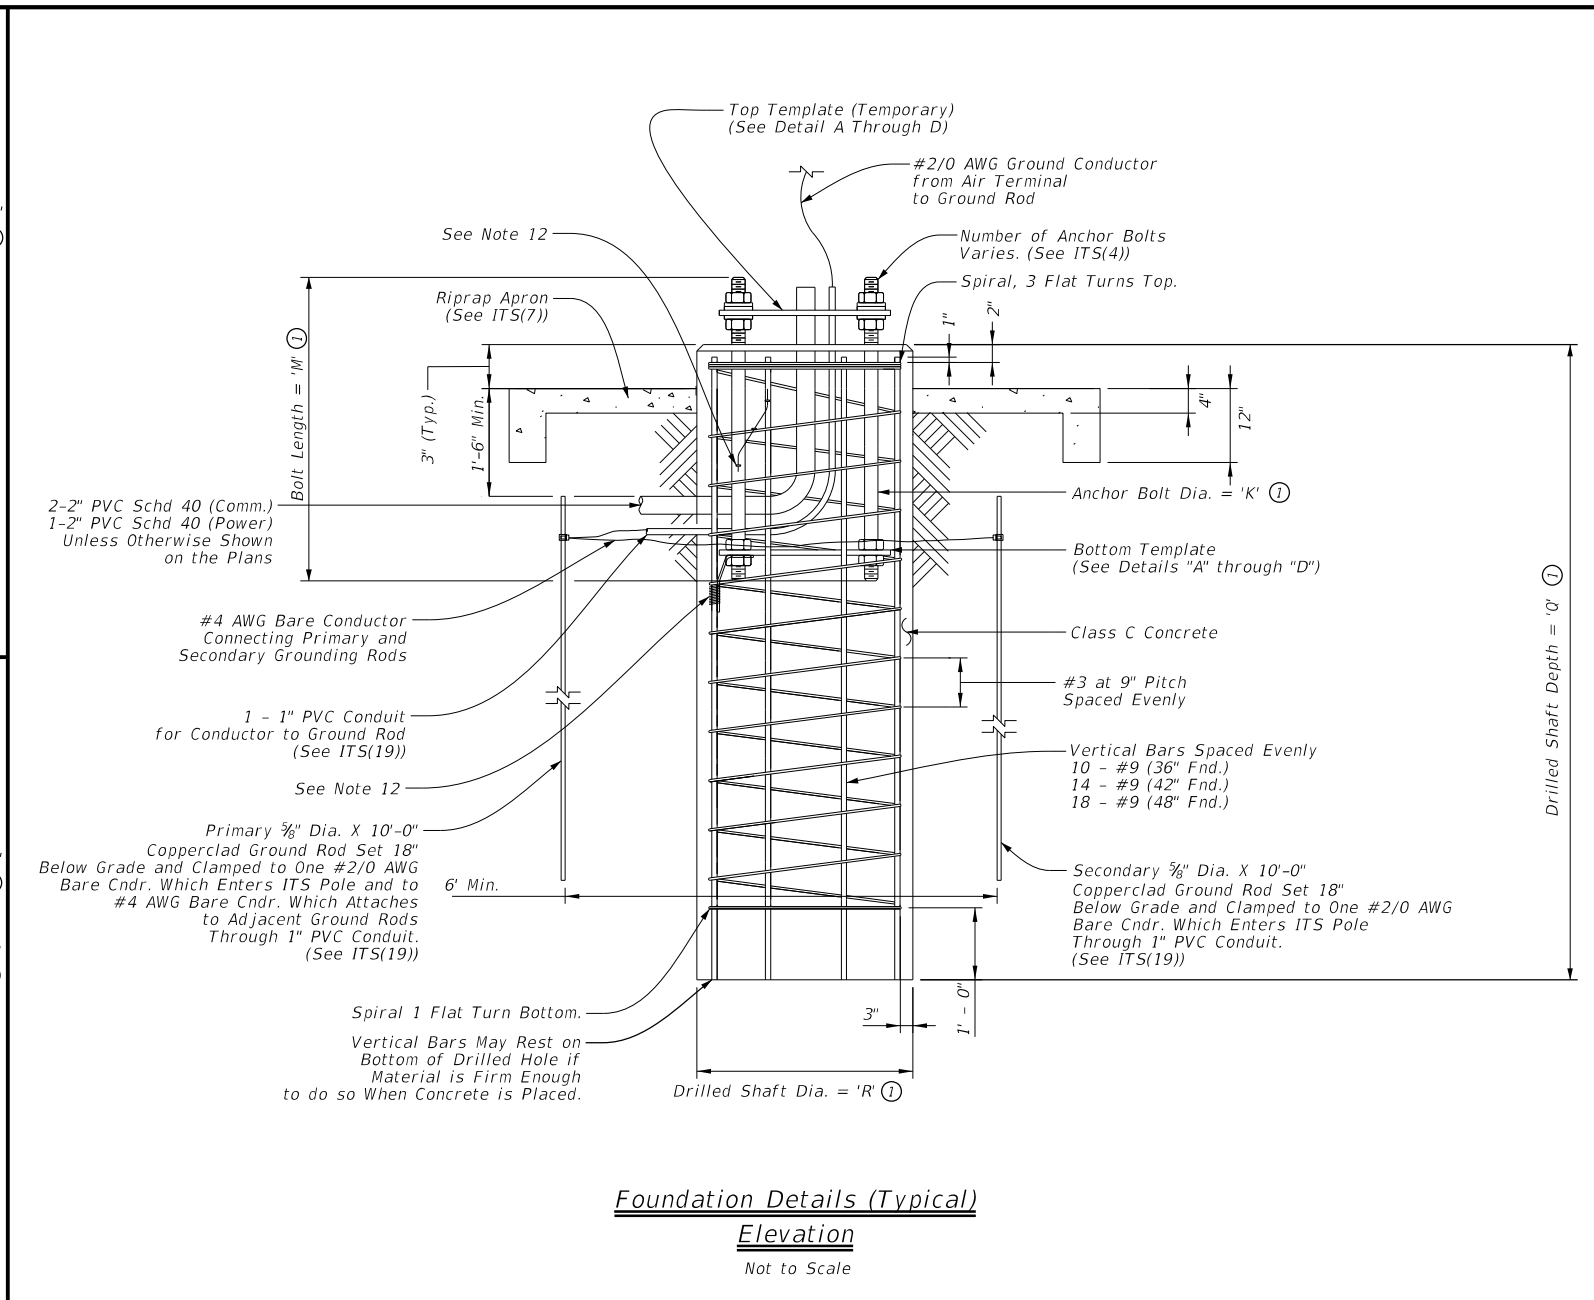

Foundation Details (Typical)
Elevation
 Not to Scale

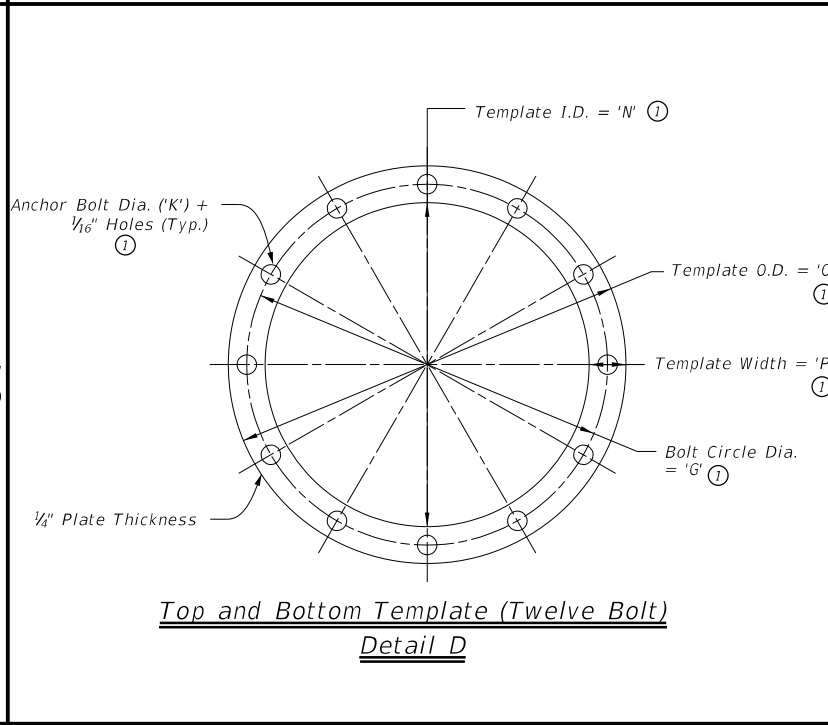

Top and Bottom Template (Twelve Bolt)
Detail D

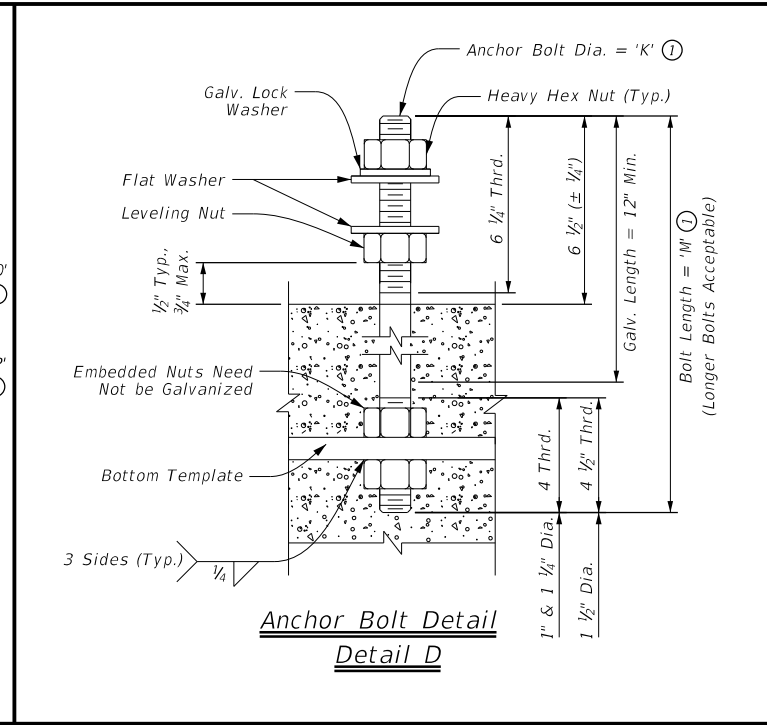

Anchor Bolt Detail
Detail D

- General Notes:**
1. Drilled shaft concrete shall be Class "C" ($f'c = 3,600$ PSI) in accordance with Item 416, "Drilled Shaft Foundations."
 2. Reinforcing bars shall be Grade 60 ($F_y = 60$ KSI) and conform to ASTM A-615. All reinforcing shall conform to Item 440, "Reinforcing Steel."
 3. Provide ASTM A-36 steel for templates. Top and bottom templates need not be galvanized.
 4. Anchor bolts shall be rigidly held in position during concrete placement using steel templates at the top and bottom. Top templates shall remain in place until the concrete has cured in place beyond initial set time.
 5. Lubricate and tighten anchor bolts, when erecting pole, in accordance with Item 449, "Anchor Bolts."
 6. Anchor bolts shall conform to ASTM F1554 Grade 55, or ASTM A193 B7 with ASTM A194 Grade 2H or A563 heavy hex nuts with F436 washers. Galvanize a minimum of the top end thread length plus 6 inches for all anchor bolts unless otherwise noted. Exposed washers and exposed nuts shall be galvanized. All galvanizing shall be in accordance with Item 445, "Galvanizing."
 7. All vertical reinforcement shall be carried to the bottom of the drilled shaft.
 8. Place three flat turns of the spiral bar at the top and one flat turn at the bottom of the drilled shaft.
 9. Drilled shaft shall be measured by the linear foot and paid under Item 416, "Drill Shaft Foundations."
 10. If rock is encountered, the drilled shaft to extend a minimum of two diameters into solid rock.
 11. Location for conduit entering foundation may vary. Orient conduit entering foundation to coincide with location of ground boxes and primary ground rod.
 12. Bond anchor bolts to rebar with #2/0 AWG jumper and two mechanical connectors or by bending No. 3 bar on bottom template as shown and wire tightly with ten turns of No. 10 wire or one mechanical connector. Mechanical connectors shall be UL Listed for concrete encasement.

Reference Notes:

- ① See tables on Sheet ITS(4) for values of dimension variables.

Texas Department of Transportation
 Traffic Operations Division Standard

ITS POLE FOUNDATION DETAILS
 ITS(3) - 16


FILE: its(3)-16.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
April 2016	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	113	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:24:04 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase of ADSS of poles and towers


General Notes:

1. Grounding System:
 - A. Description:
 1. Provide ground system consisting of copper wires, ground rods, and concrete-encased grounding electrodes (Ufers), of the configuration shown to minimize potential gradient irregularities, drain leakage, and fault currents to earth.
 - B. Performance:
 1. Provide a grounding system, consisting of a minimum one ground rod, having a resistance not greater than 5 Ohms to ground. Provide up to 2 additional supplemental ground rods if necessary to achieve a resistance not greater than 5 Ohms to ground. If a total of 3 ground rods is needed then install as as part of a ground ring.
 2. If a ground ring is required, provide a minimum conductor length of 20 ft. placed at a minimum depth of 30 in..
 - C. Design Criteria:
 1. The grounding system of the ITS pole may be bonded below grade to the grounding systems of other nearby equipment to meet the specified grounding resistance. A minimum of one ground rod for the ITS pole is still required.
 2. Separately measure the grounding resistance of each system before bonding together below grade.
 3. Only provide UL-approved materials listed for grounding systems.
 4. Do not combine materials that can form an electrolytic couple that will accelerate corrosion in the presence of moisture, unless moisture is permanently excluded from the junction of such materials.
 5. Submit product data for the materials and products used to perform the work of this section.
 - D. Materials:
 1. Conductors:
 - a. Bare Ground Conductor:
 - 1) Provide prequalified copper conductors appearing on the Material Producers List according to Item 618.
 2. Ground Compression Connectors:
 - a. Provide molds, thermite packages, and other material for exothermic welding of grounding connections.
 - b. Provide listed compression connectors fully rated to carry 100% of the cable rating and that meet IEEE 837. Provide compression materials from a single manufacturer throughout the project.
 3. Ground Rods:
 - a. Provide copper-clad steel ground rods conforming to the requirements specified in DMS 11040.
 - 1) Diameter: 5/8 in.
 - 2) Length: 10 ft.
 2. Installation:
 - A. Install grounding components and systems in accordance with the requirements specified in IEEE 142.
 - B. System Grounding:
 1. Ground Rods:
 - a. Drive ground rods into the ground until the tops of the rods are a minimum of 18 in. below finished grade.
 - b. If multiple ground rods are needed to meet the minimum resistance of 5 Ohms, space ground rods as evenly as possible, at least 6 feet apart, so conductors will be connected below grade.
 2. Conductors:
 - a. Provide minimum No. 2/0 AWG ground wire for lightning protection from air terminal.
 - b. Provide minimum No. 4 AWG ground wire for system and equipment grounding.
 - c. Using suitable fasteners, securely attach exposed ground wires to structural supports at not more than 2 ft. intervals, where applicable.
 - d. Bends in ground wires greater than 45 degrees are unacceptable.
 3. Cable Connections:
 - a. Use exothermic-welded connections or listed compression connectors for conductor splices and connections between conductors and other components.
 3. Testing:
 - A. Resistance Test:
 1. Test Procedure:
 - a. The ground-resistance measurements of each ground Rod shall be taken.
 - 1) The resistance to ground shall be measured in accordance with the fall-of-potential method specified in IEEE 81 and IEEE 142.
 - 2) Ground-resistance measurements shall be made in normally dry weather, not less than 48 hours after rainfall, and with the ground under test isolated from other grounds.
 - b. Test reports shall be prepared that indicate the location of the ground rod, the grounding system, and the resistance and soil conditions at the time the test was performed.
 2. Acceptance Criteria:
 - a. The grounding system must have a resistance not greater than 5 Ohms.
 - b. Do not energize any part of the electrical distribution system prior to the resistance testing of that system's ground rods and grounding system, and submission of the test results for approval.
 3. Inspections:
 - a. Prepare and submit as-built record drawings of the grounding system as installed and test reports for approval.

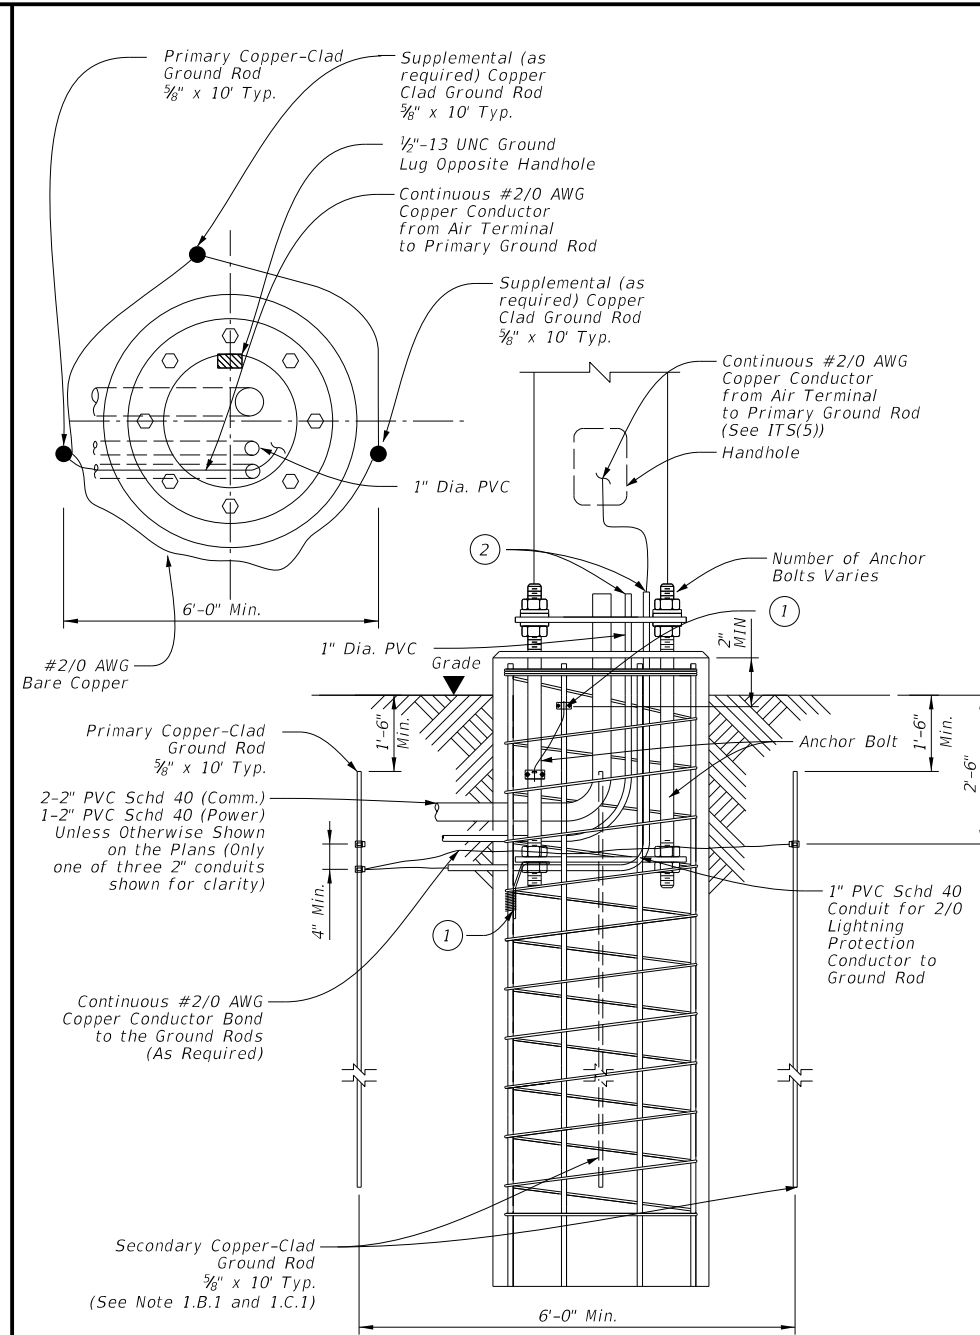

Grounding System

Not to Scale

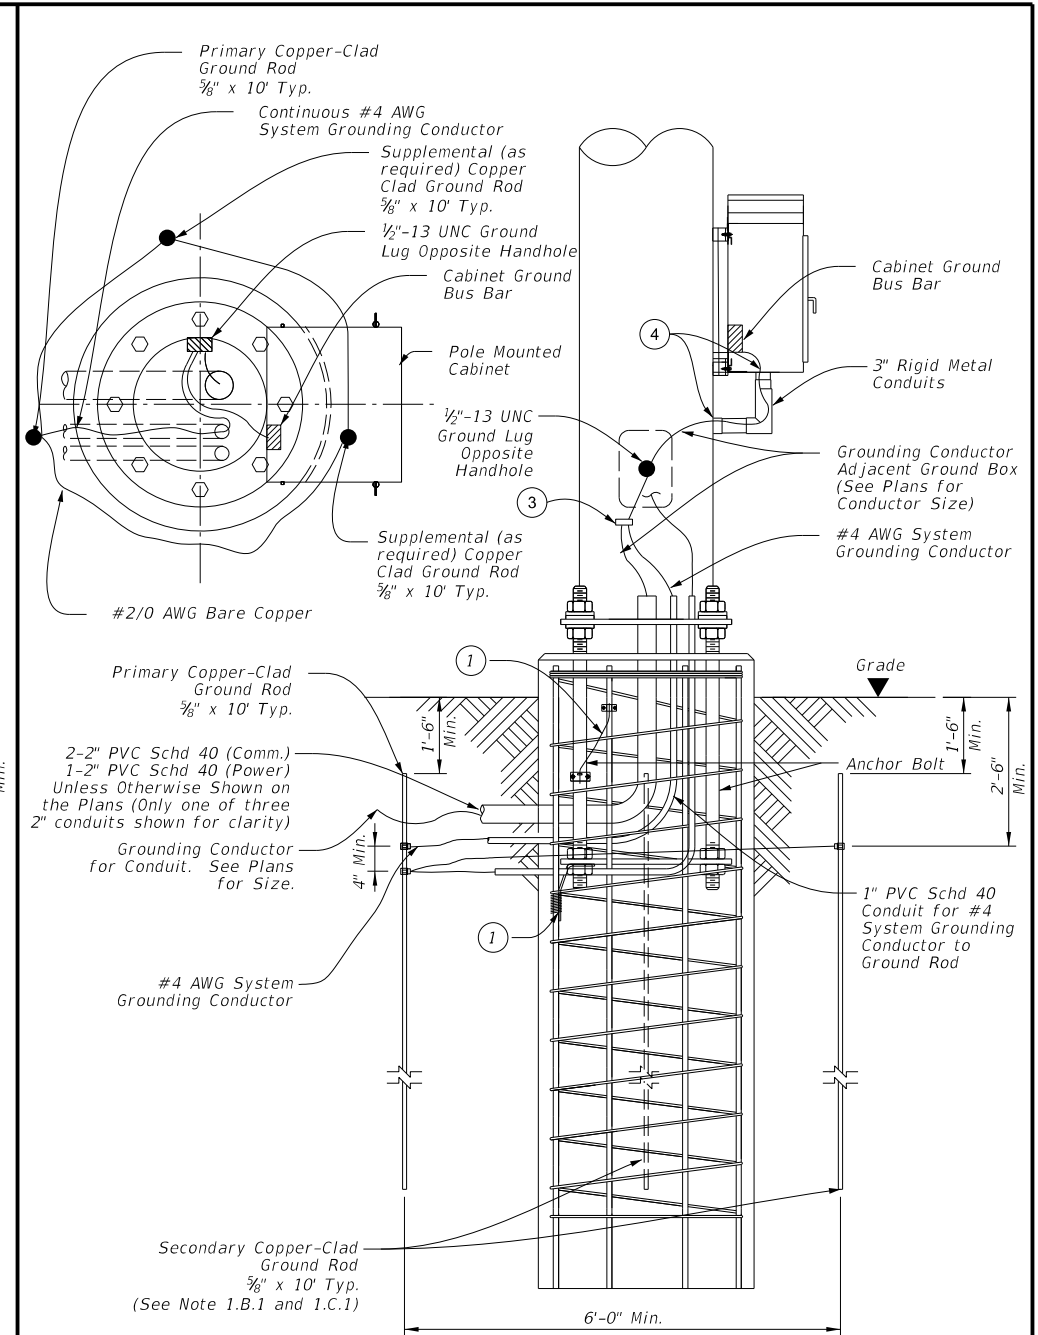

Grounding System with Pole Mounted Cabinet

Not to Scale


Reference Notes:

- ① Bond anchor bolts to rebar with #2/0 AWG jumper and two mechanical connectors or by bending No. 3 bar on bottom template as shown and wire tightly with ten turns of No. 10 wire or one mechanical connector. Mechanical connectors shall be UL Listed for concrete encasement.
- ② Cut PVC approximately 1 in. above concrete and install bell or bushing. Align conduit as close as possible to point of attachment to base plate to minimize bends in #2/0 wire.
- ③ Bond grounding conductors via cadweld or mechanical connector, rated for size and number of conductors.
- ④ Provide and install a grounding type bushing on metal conduit terminations. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor.


		Traffic Operations Division Standard	
<h2 style="margin: 0;">ITS POLE GROUNDING DETAILS</h2>			
<h3 style="margin: 0;">ITS(19)-17</h3>			
FILE: ifs(19)-17.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT June 2015	CONT	SECT	JOB
7-17	0904	00	220
REVISIONS		HIGHWAY	
		VARIOUS	
DIST	COUNTY	SHEET NO.	
AMA	POTTER	114	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into any other format or for incorrect results or damages resulting from its use.


DATE: 8/11/2023 2:24:05 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E IH 40 ITS\2 Design Phase\Drawings\01509-0027-12.dwg

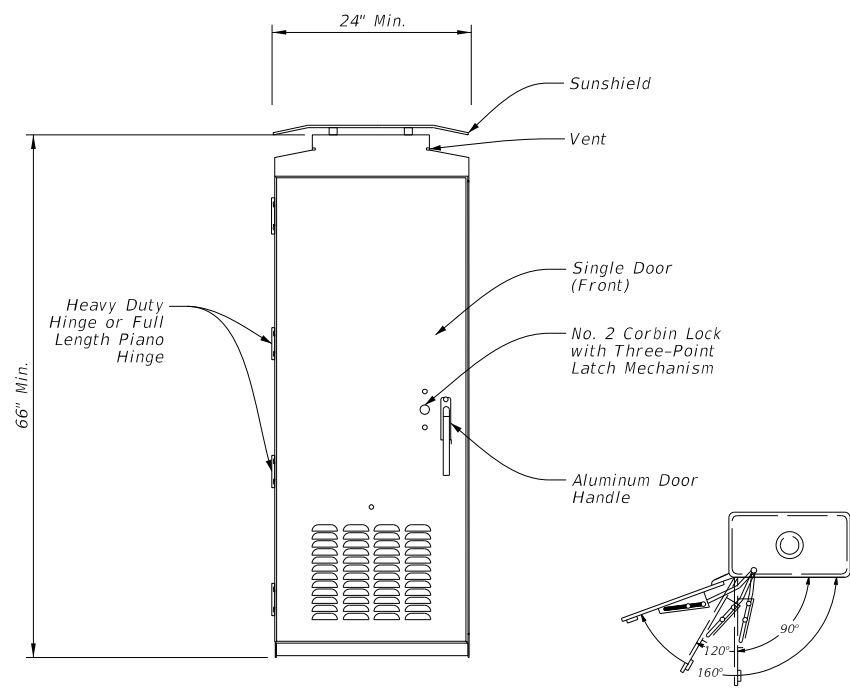


Type 4 (Small) Cabinet
Front View

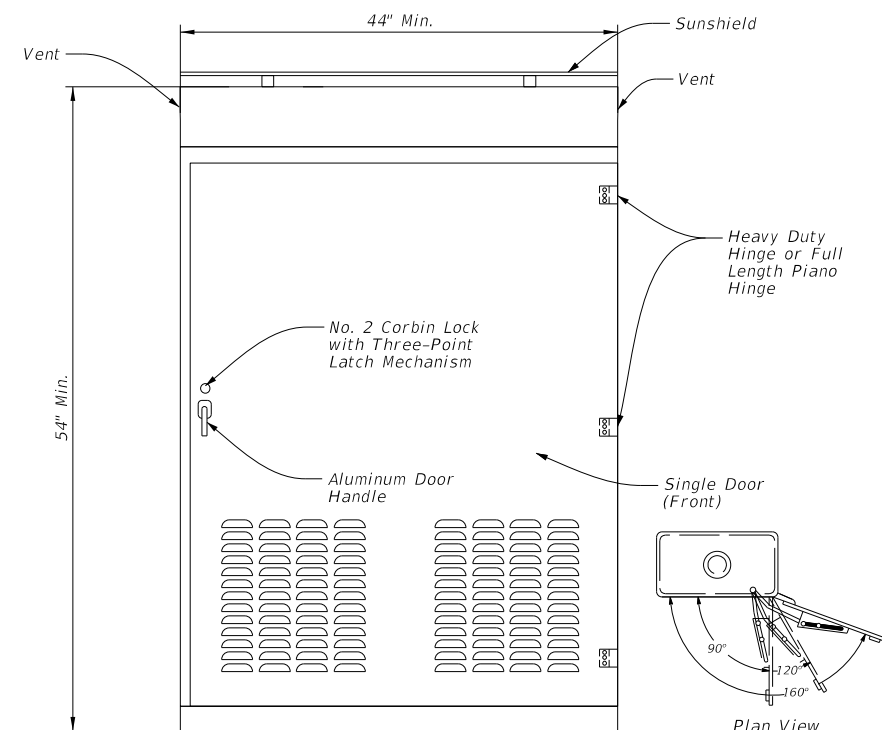


Type 5 (Medium) Cabinet
Front View

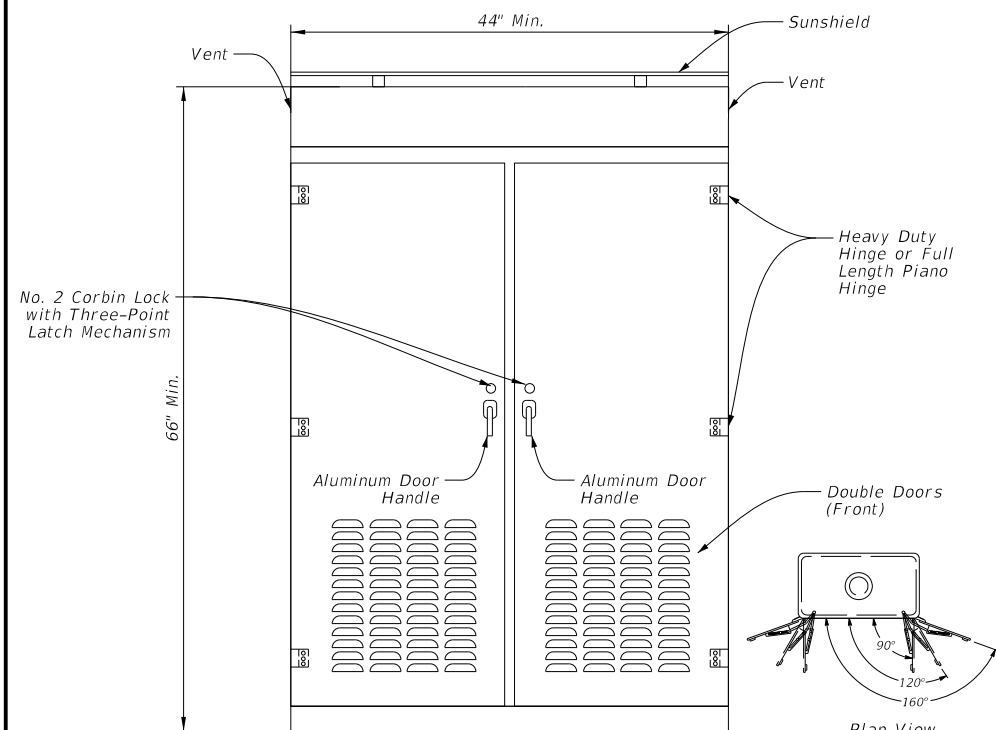


Type 6 (Large) Cabinet
Front View

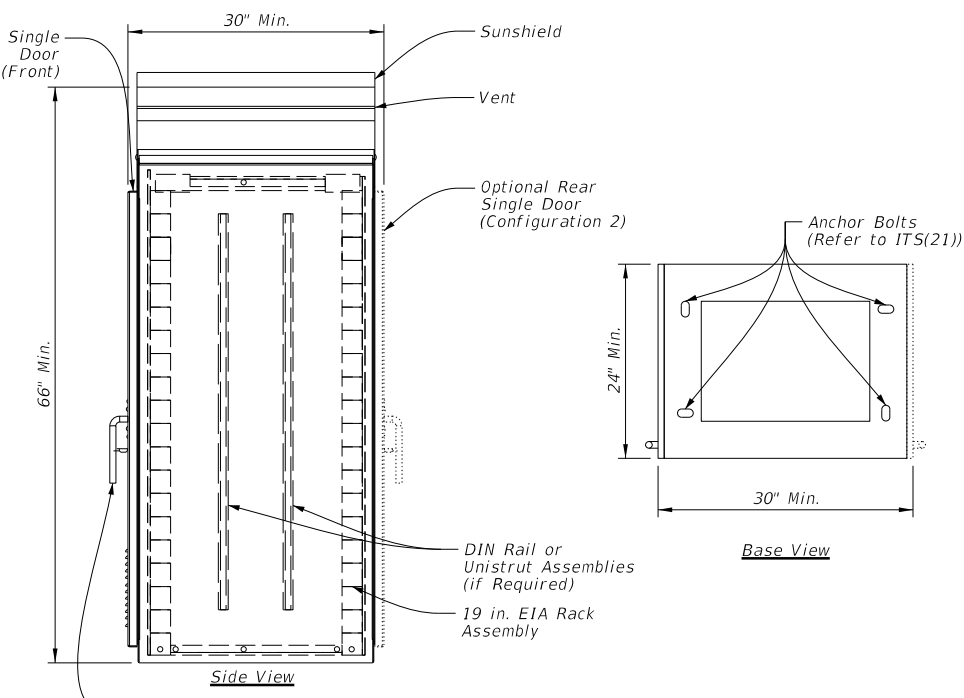

Type 4 (Small) Cabinet
Side View

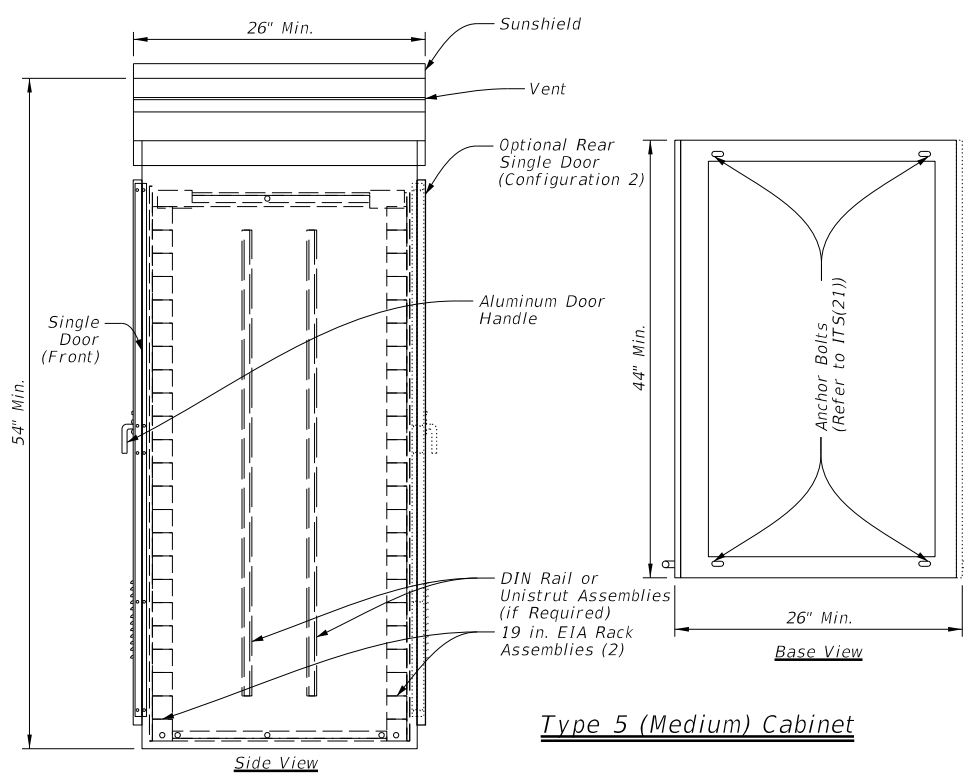

Type 5 (Medium) Cabinet
Side View

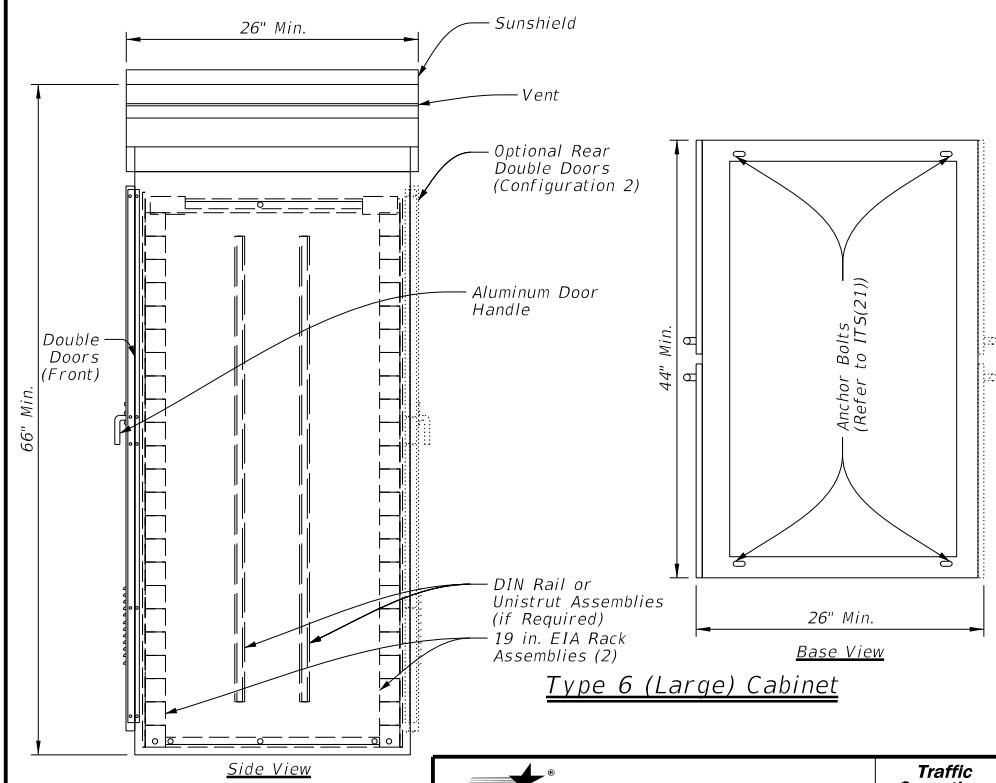

Type 6 (Large) Cabinet
Side View

General Notes:

1. Cabinet hardware equipment and door configuration shown is diagrammatic in nature and intended to represent a preferred ground mounted cabinet setup. Door orientation may vary and will be noted in the plans. The contractor will be responsible for configuring cabinets with all appropriate ITS hardware and power supplies in accordance with the plans and specifications. The contractor may alter the cabinet configuration shown to maximize space and ensure easy access for maintenance.
2. All dimensions are approximate and represent minimum dimensions.
3. Provide conduit entrances at the bottom of the cabinet.
4. Paid under Special Specification "ITS Ground Mounted Cabinet" (Configuration 1) with single door.
Paid under Special Specification "ITS Ground Mounted Cabinet" (Configuration 2) for rear door option.
5. Sunshield to be mounted to cabinet using nuts, bolts, and spacers.
Water proof sealant to be used at cabinet surface/bolt contact points.

Texas Department of Transportation Traffic Operations Division Standard


ITS GROUND MOUNTED CABINET ELEVATION DETAILS

ITS(20)-15


FILE: ifs(20)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	115	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023 2:24:06 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase of Plans.dwg

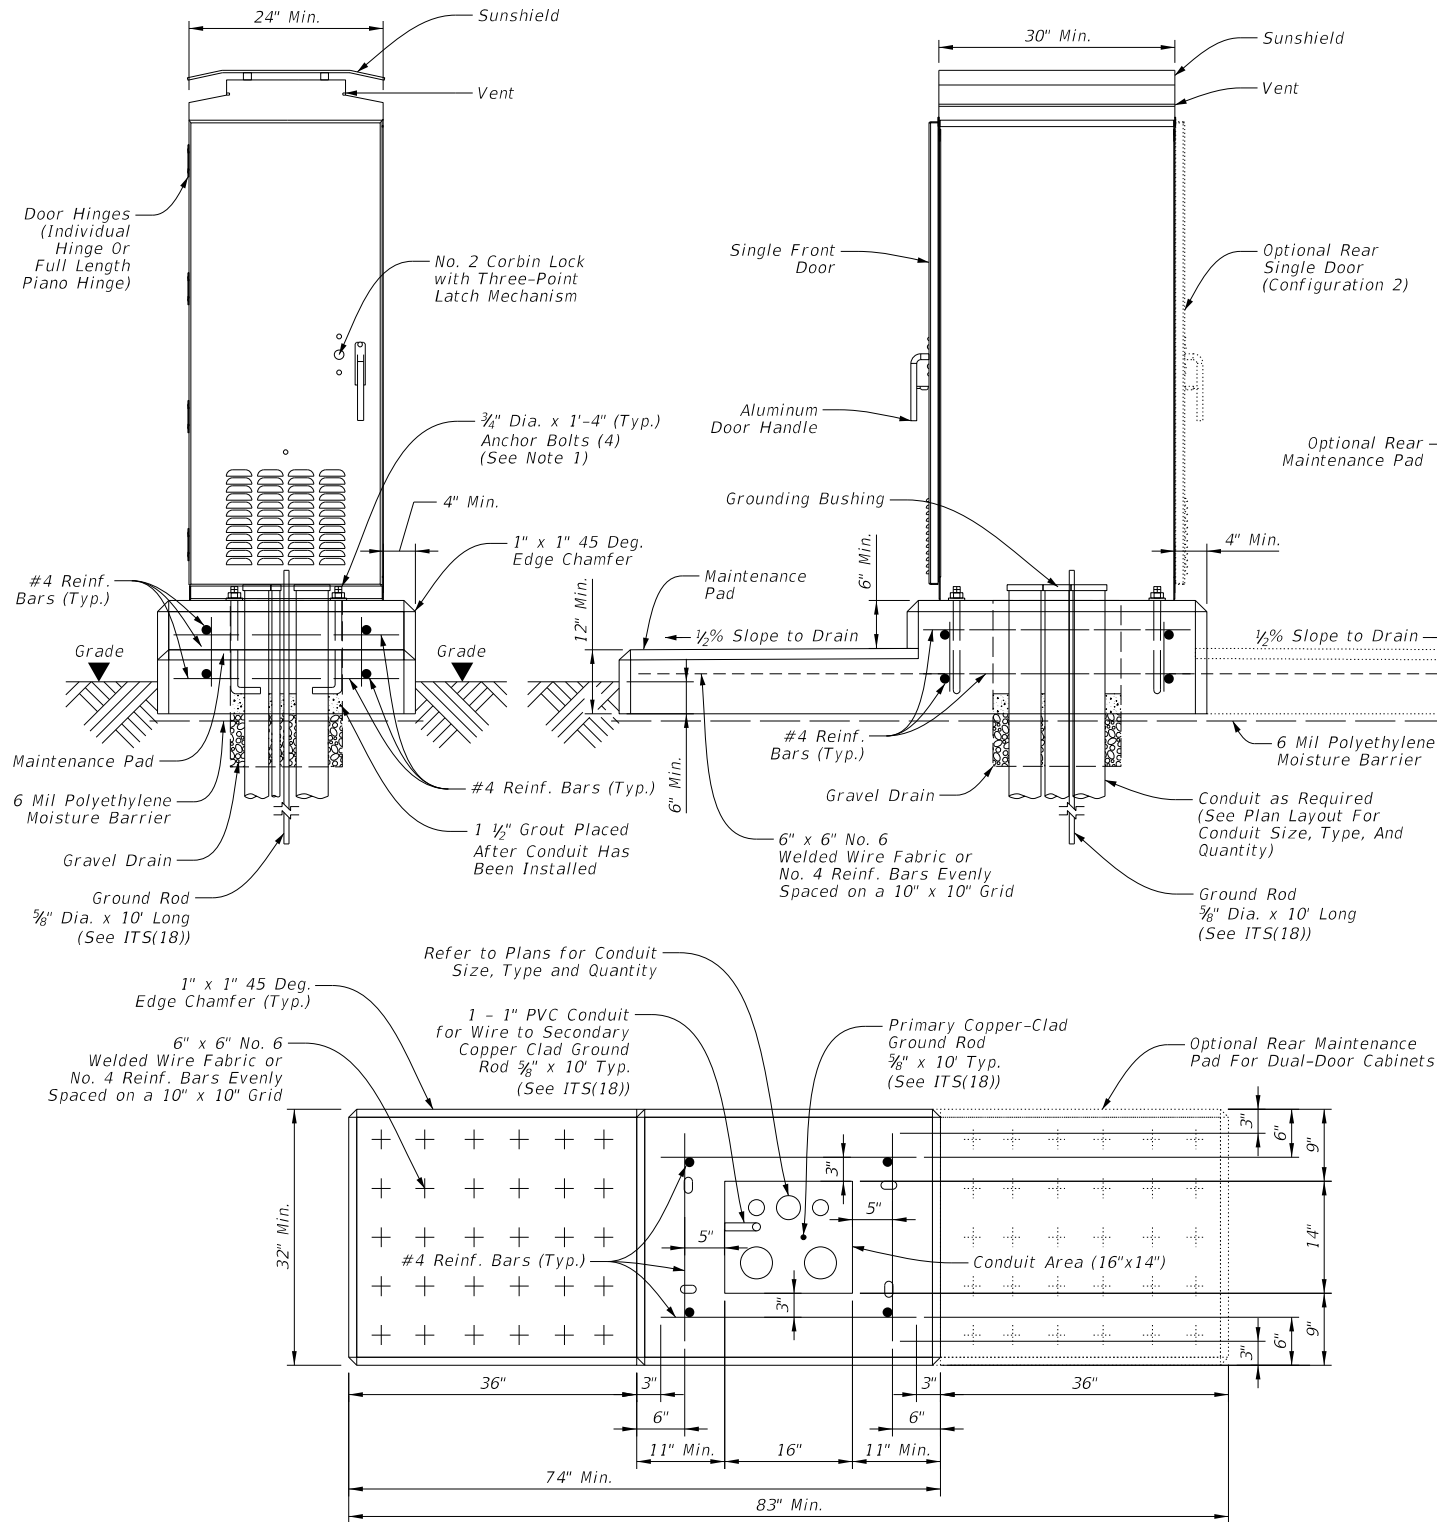

Type 4 (Small) Cabinet

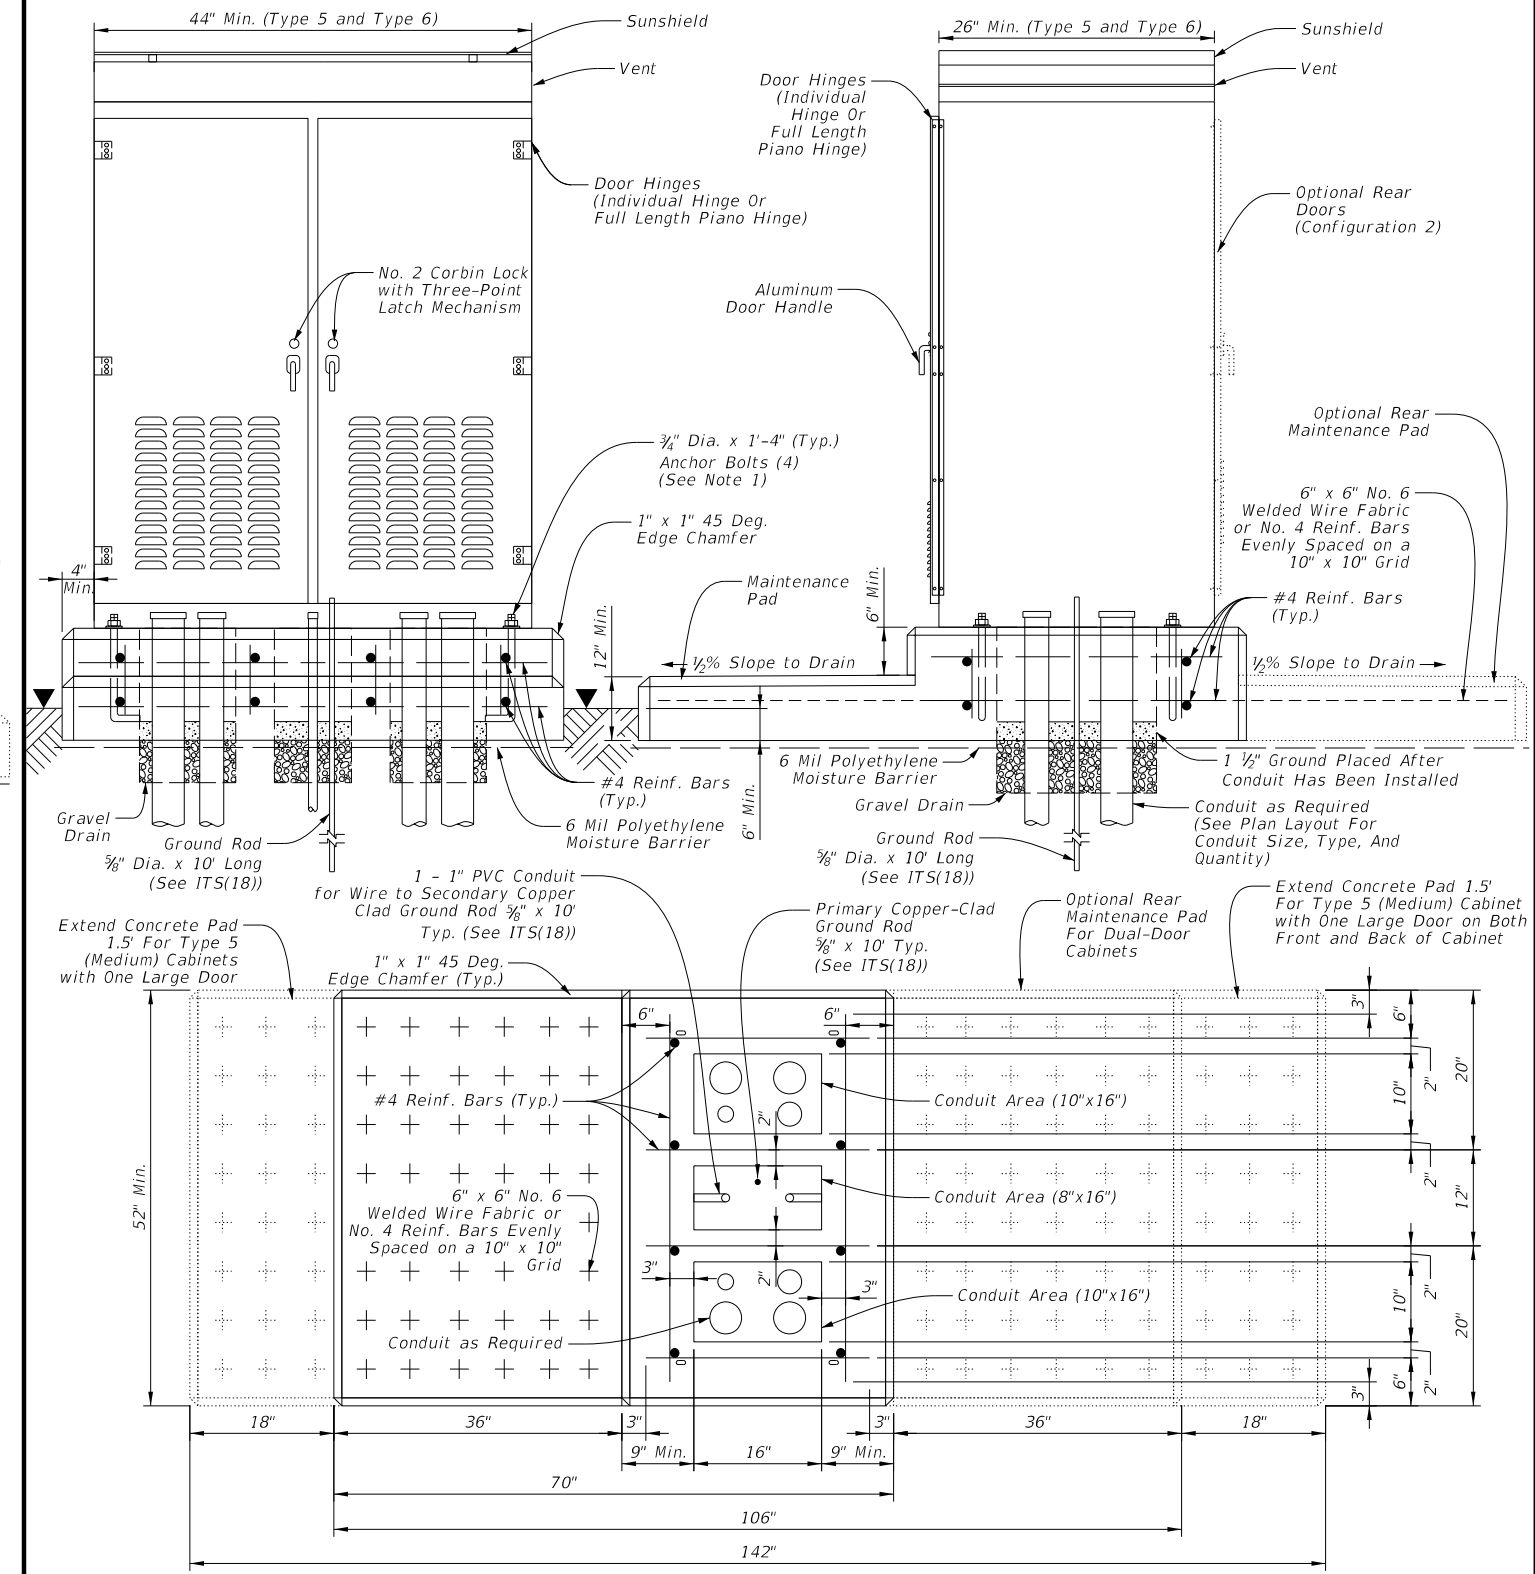

Type 5 (Medium) & Type 6 (Large) Cabinet

General Notes:

1. Details of anchor bolt location to be furnished by the cabinet manufacturer. Size and length of anchor bolts shown in details may vary by manufacturer.
2. Modify concrete base dimensions to fit required cabinet type.
3. Ensure conduit area has gravel drain, 12" depth, coarse aggregate, grade No. 1.
4. All concrete to be Class "A" in accordance with Item 421.
5. Set the cabinet foundation level with the pavement surface, in unpaved area. The foundation shall be a minimum of 4" above surrounding grade, or as approved by the Engineer.
6. Furnish any additional concrete which may be necessary to stabilize foundation at unusual locations.
7. Foundation will be subsidiary to Special Specification "ITS Ground Mounted Cabinet."
8. Ground cabinet as required in cabinet specifications and as detailed in ITS(18) in accordance with the National Electric Code (NEC).
9. Treat cabinet foundation with moisture sealant.
10. Type 5 cabinet foundation will have a slightly larger foundation than Type 6. See foundation notes on details.
11. Drain pipe shall be screened for drainage portion below foundation in gravel.








ITS GROUND MOUNTED CABINET FOUNDATION DETAILS

ITS(21)-15

FILE: ifs(21)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	116	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of units or for incorrect results or damages resulting from its use.

DATE: 8/11/2023 2:24:07 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase\CAD\standards\ITS\ITS22\ITS22.dgn

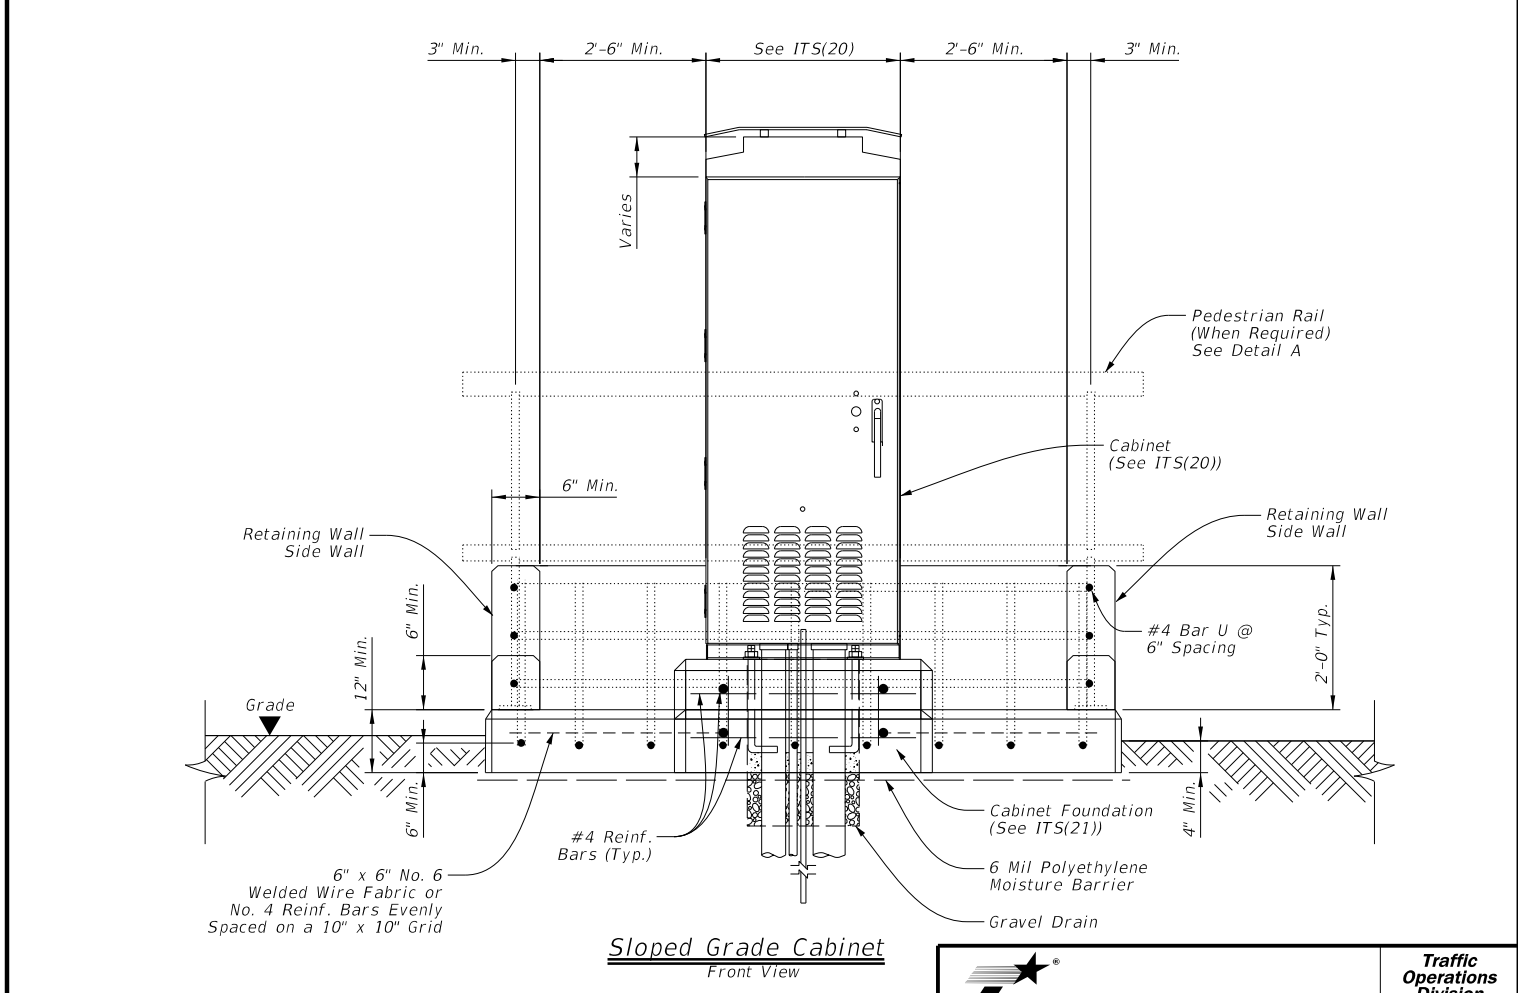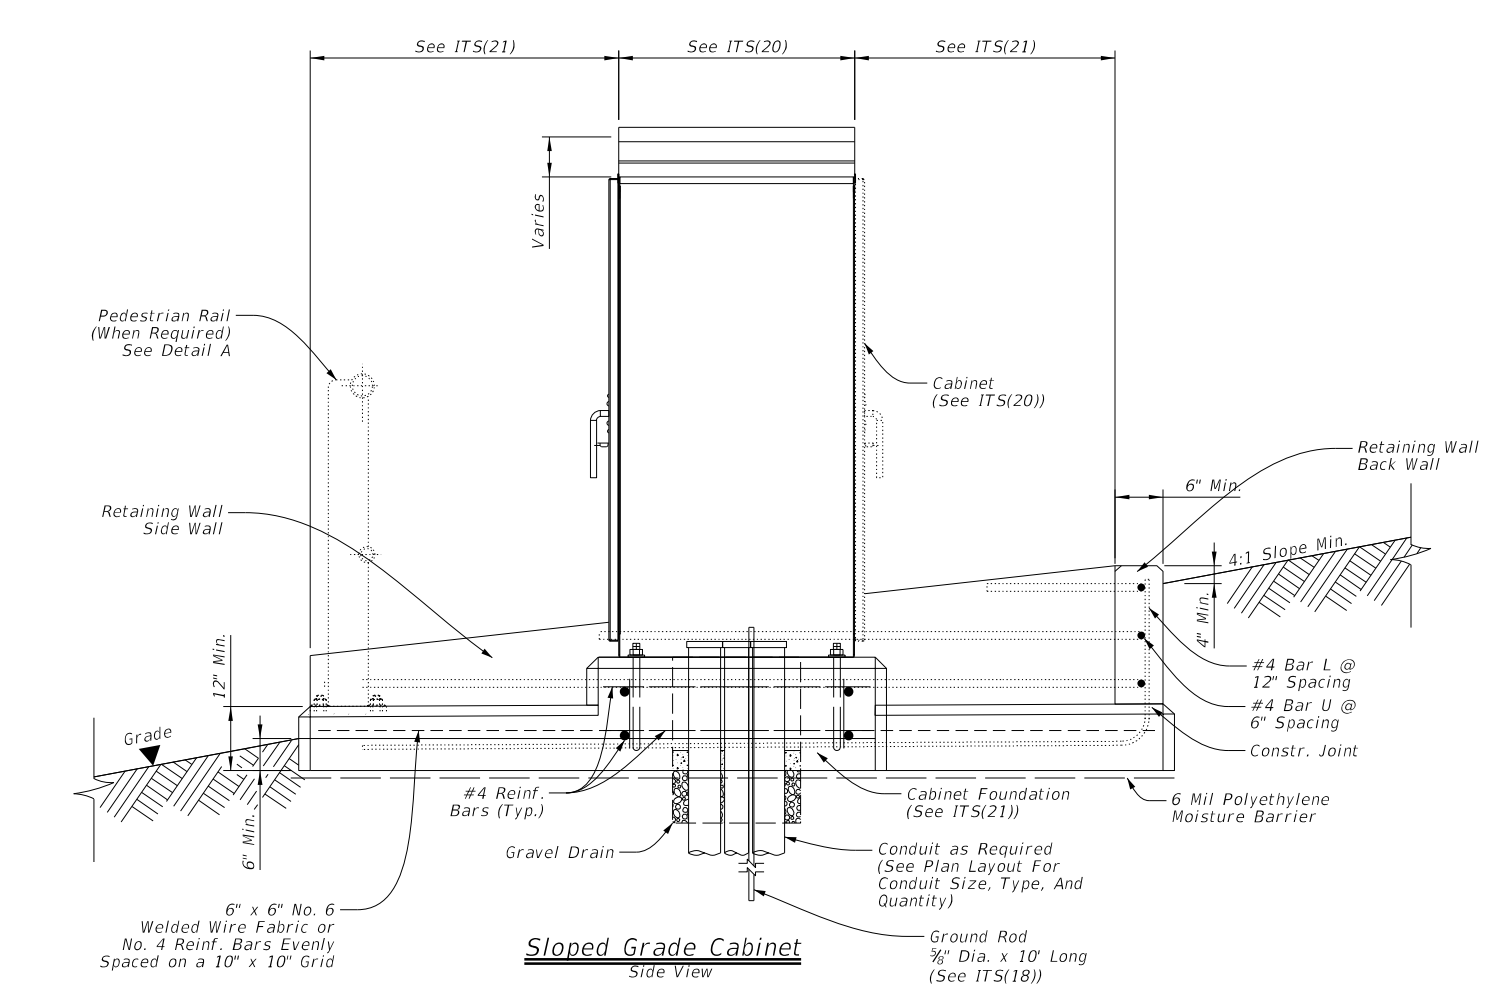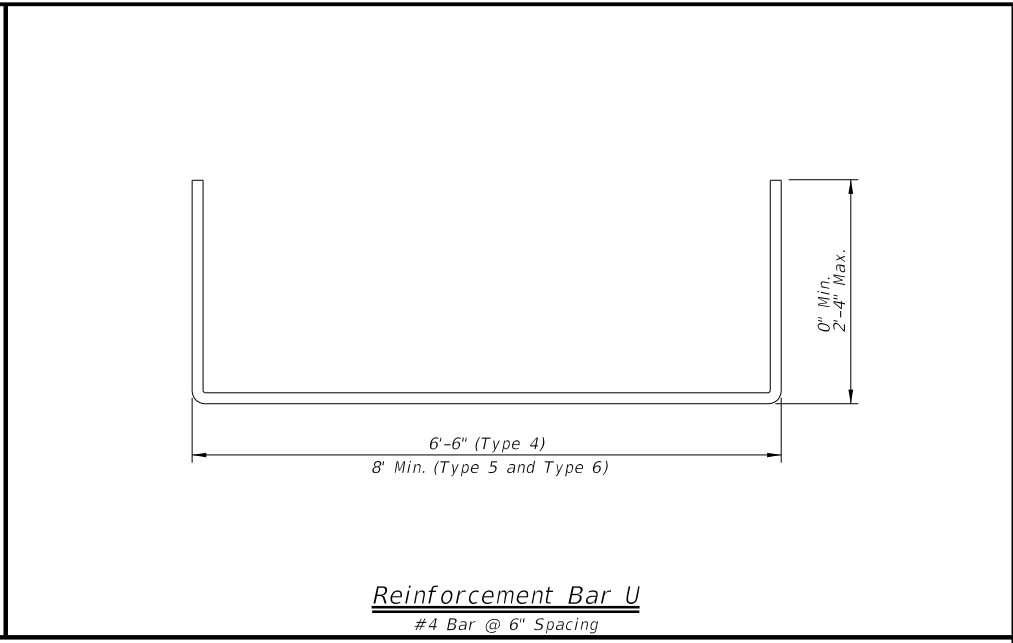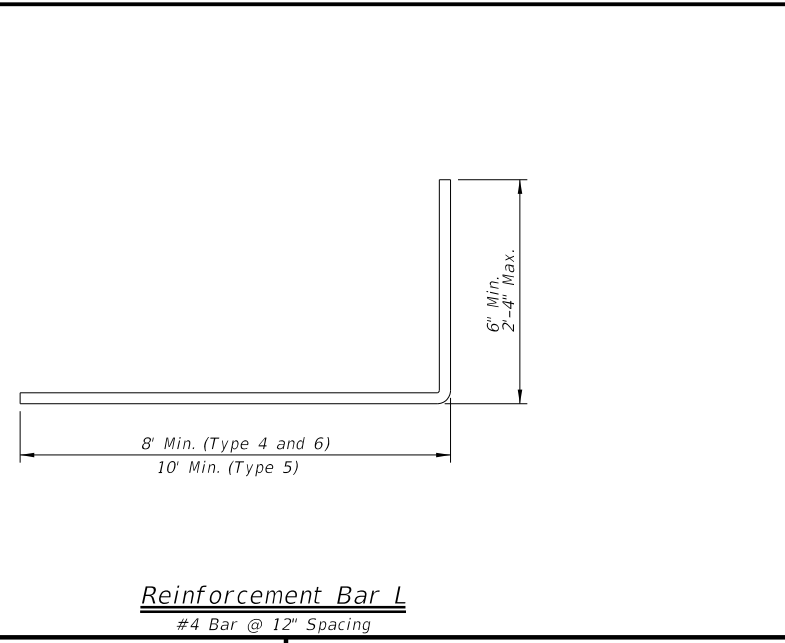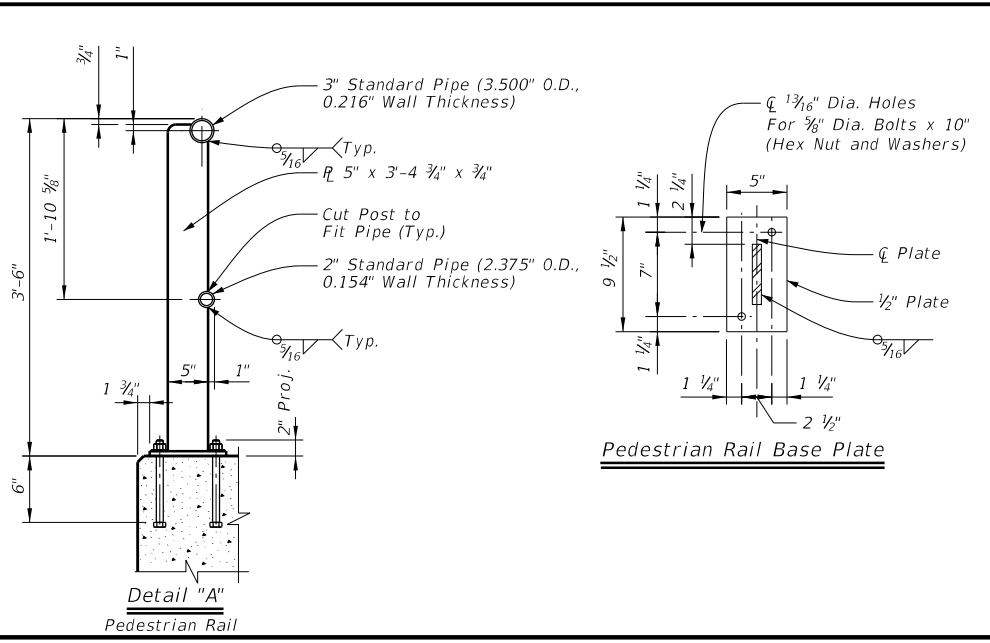

General Notes:

- Details of anchor bolt location to be furnished by the cabinet manufacturer. See ITS(21) for size and type of anchor bolts. May vary by manufacturer.
- Modify concrete base dimensions to fit required cabinet type.
- Ensure conduit area has gravel drain, 12" depth, coarse aggregate, Grade No. 1.
- All concrete to be Class "A" in accordance with Item 421.
- Set the cabinet foundation level with the pavement surface, in unpaved area. The foundation shall be a minimum of 6" above surrounding grade, or as approved by the Engineer.
- Furnish any additional concrete which may be necessary to stabilize foundation at unusual locations.
- Foundation will be considered subsidiary to Special Specification "ITS Ground Mounted Cabinet."
- Ground cabinet as required in cabinet specifications and as per National Electric Code (NEC).
- Treat cabinet foundation with moisture sealant.
- Type 5 cabinet foundation will have a slightly larger foundation than Type 6. See foundation notes on details.
- Drain pipe shall be screened for drainage portion below foundation in gravel.
- Pipe for pipe rail must conform to ASTM A53 GR B, or A500 GR B. Posts and plates must be ASTM A36. All steel components to be galvanized unless otherwise shown in plans.
- Pedestrian rail anchor bolts must be 3/8" diameter ASTM A307 Grade A bolts (or A36 threaded rods with one tack welded hex nut each) with one hex nut and one hardened steel washer at each bolt. Threaded rods may be 0.557" minimum diameter with rolled threads. Nuts must conform to A563 requirements.
- Exposed edges of pipe rail and pipe rail posts must be rounded or chamfered to approximately 1/16" by grinding. Provide an end cap at either end of pipe railing.
- Welded wire mesh not required in maintenance pad area when retaining wall rebar is integrated into maintenance pad.


Texas Department of Transportation
 Traffic Operations Division Standard

ITS GROUND MOUNTED CABINET FOUNDATION ON SLOPE DETAILS

ITS(22)-15

FILE: its(22)-15.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	117	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

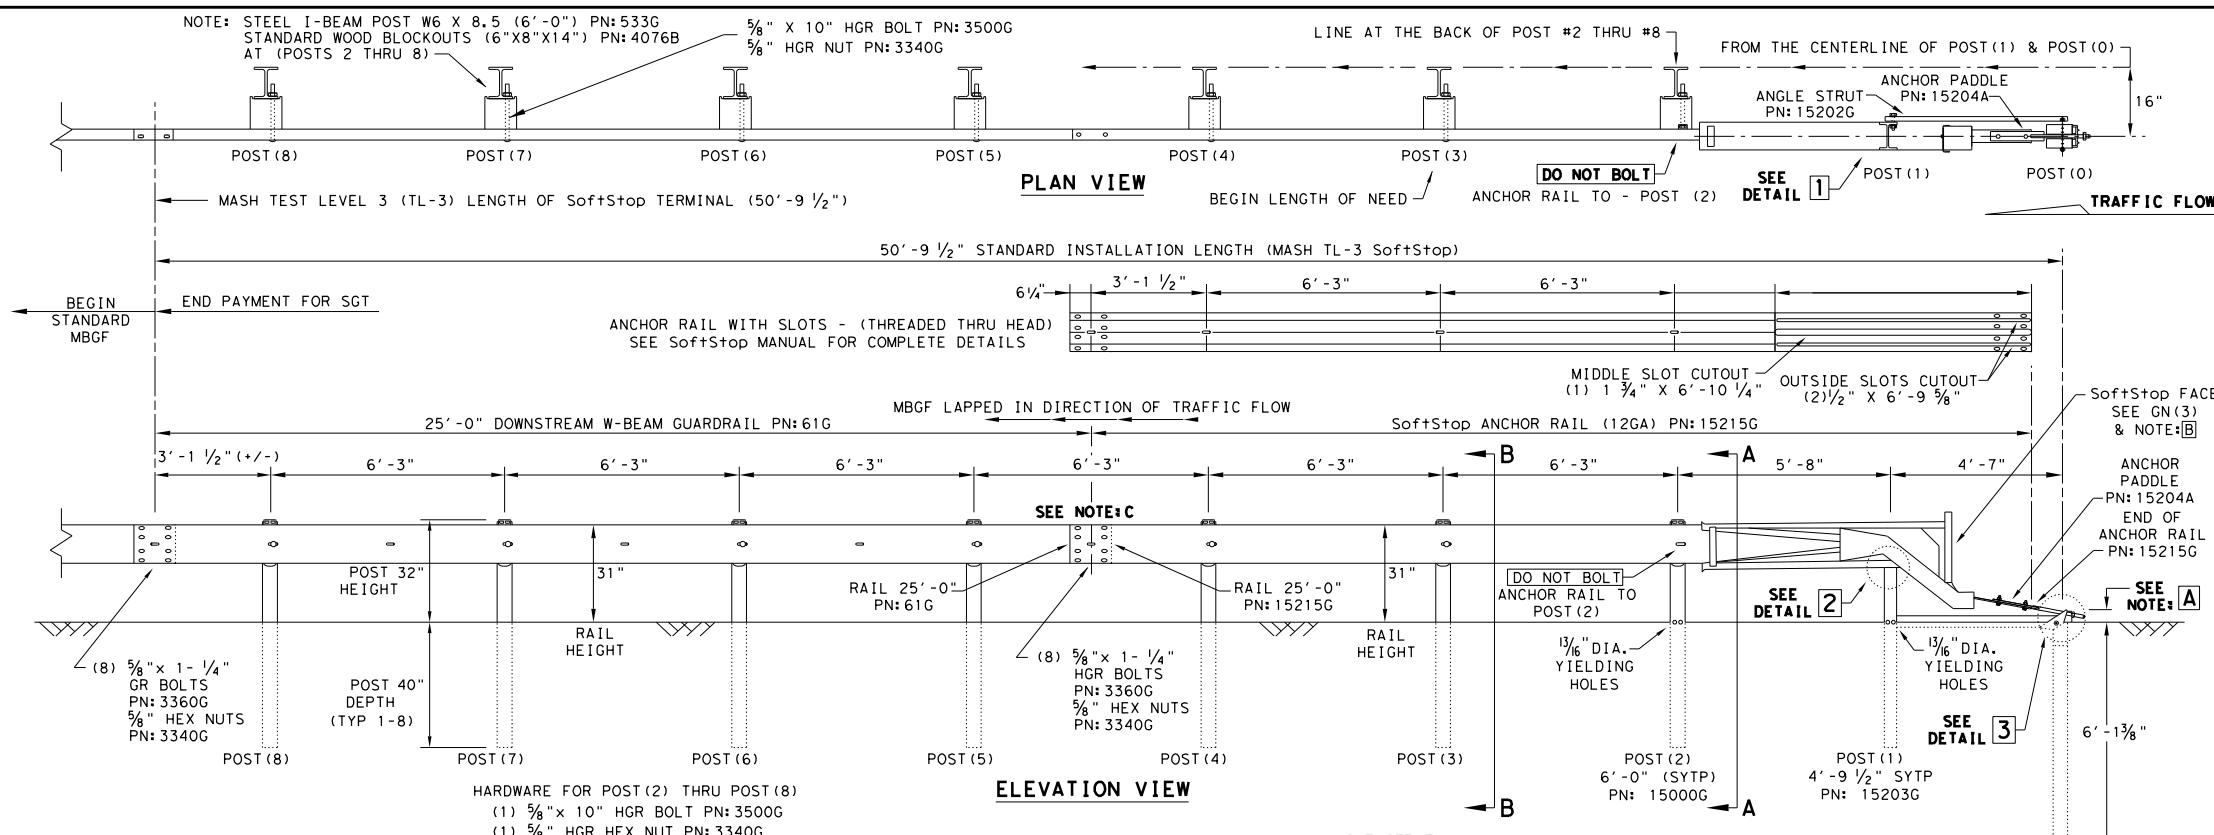


- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: TRINITY HIGHWAY AT 1(888)323-6374, 2525 N. STEMMONS FREEWAY, DALLAS, TX 75207
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE; SoftStop END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL. PN:620237B
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL AND REFER TO THE LATEST ROADWAY MBOFG STANDARD FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - IT IS ACCEPTABLE TO INSTALL THE SoftStop IMPACT HEAD PARALLEL TO THE GRADE LINE OR WITH AN UPWARD TILT.
 - DO NOT ATTACH THE SoftStop SYSTEM DIRECTLY TO A RIGID BARRIER.
 - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE SoftStop SYSTEM BE CURVED.
 - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRoaching ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.


NOTE: A THE INSTALLATION HEIGHT OF FULLY ASSEMBLED ANCHOR POST WILL VARY FROM 3-3/4" MIN. TO 4" MAX. ABOVE FINISHED GRADE.

NOTE: B PART PN:5852B RIGHT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING) PART PN:5851B LEFT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING)

NOTE: C W-BEAM SPLICE LOCATED BETWEEN LINE POST(4) AND LINE POST(5) GUARDRAIL PANEL 25'-0" PN:61G ANCHOR RAIL 25'-0" PN:15215G LAP GUARDRAIL IN DIRECTION OF TRAFFIC FLOW.

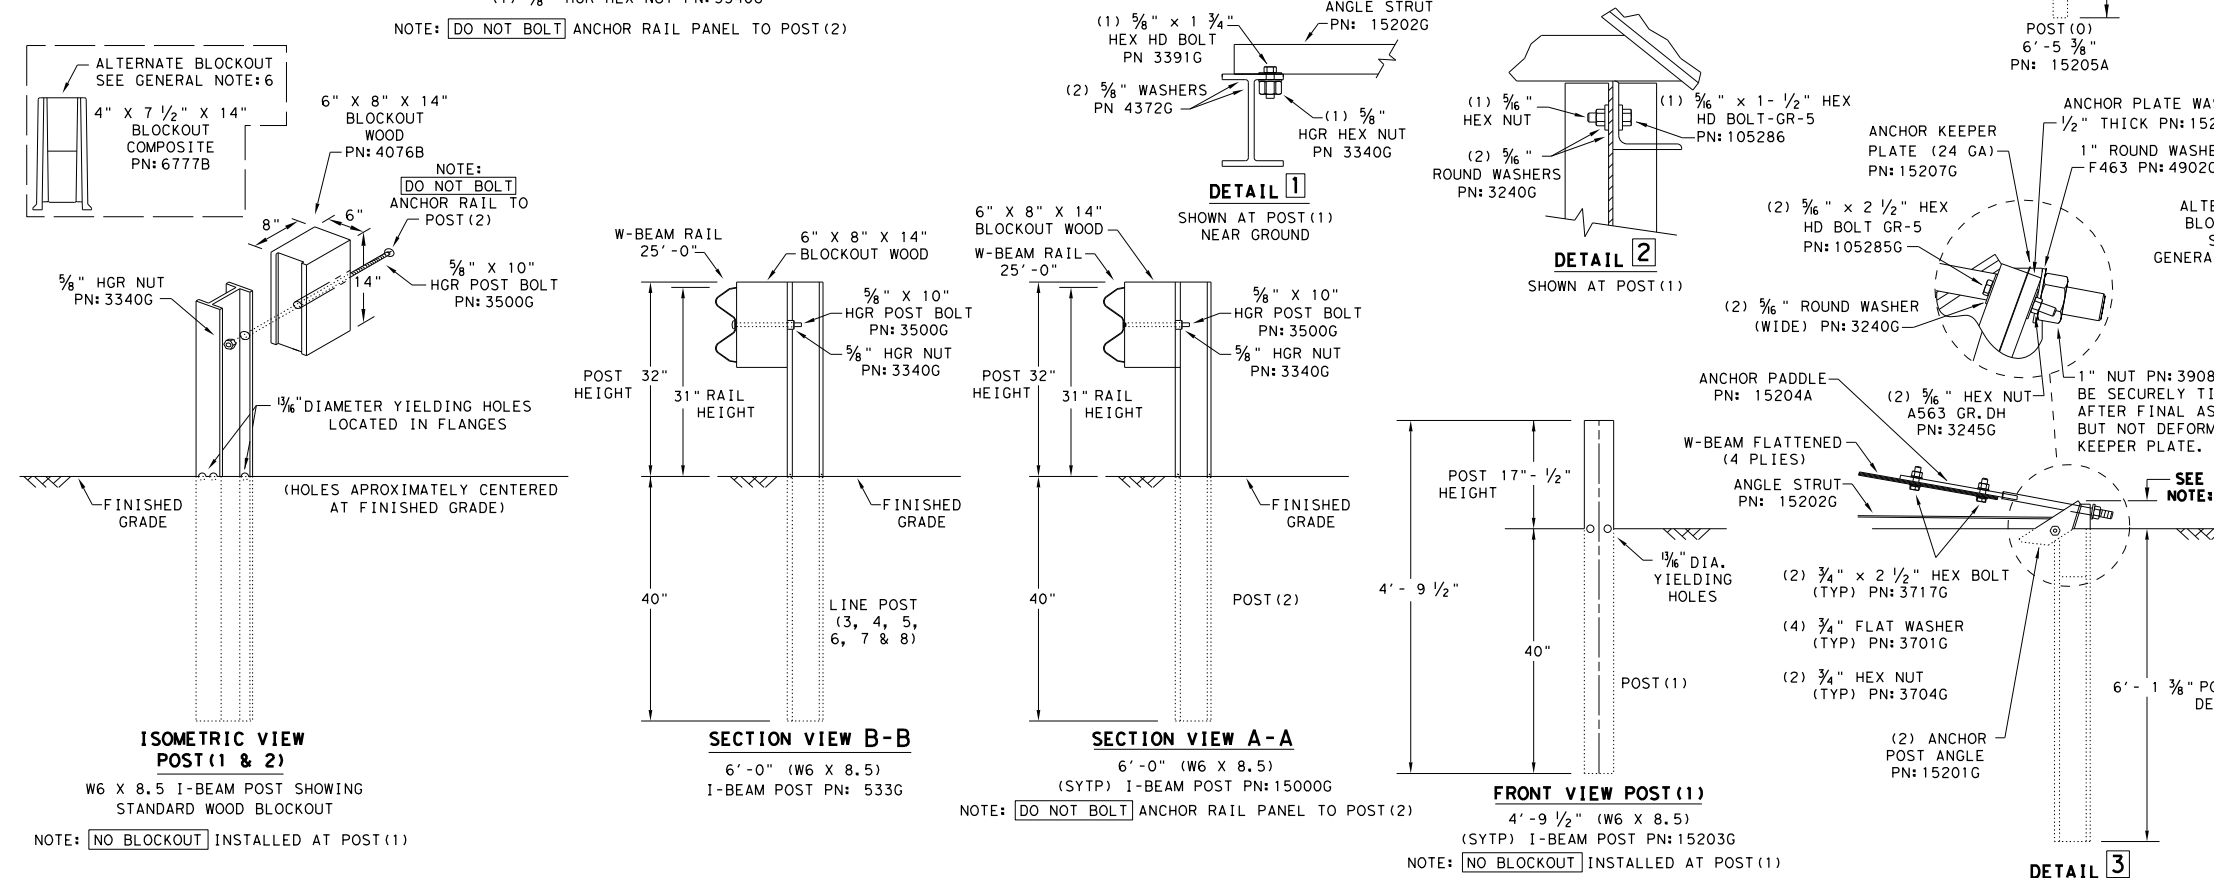

PART	QTY	MAIN SYSTEM COMPONENTS
620237B	1	PRODUCT DESCRIPTION ASSEMBLY MANUAL (LATEST REV.)
15208A	1	SoftStop HEAD (SEE MANUAL FOR RIGHT-LEFT APPROACH)
15215G	1	SoftStop ANCHOR RAIL (12GA) WITH CUTOUT SLOTS
61G	1	SoftStop DOWNSTREAM W-BEAM RAIL (12GA) (25'-0")
15205A	1	POST #0 - ANCHOR POST (6'-5 3/8")
15203G	1	POST #1 - (SYTP) (4'-9 1/2")
15000G	1	POST #2 - (SYTP) (6'-0")
533G	6	POST #3 THRU #8 - I-BEAM (W6 X 8.5) (6'-0")
4076B	7	BLOCKOUT - WOOD (ROUTED) (6" X 8" X 14")
6777B	7	BLOCKOUT - COMPOSITE (4" X 7 1/2" X 14")
15204A	1	ANCHOR PADDLE
15207G	1	ANCHOR KEEPER PLATE (24 GA)
15206G	1	ANCHOR PLATE WASHER (1/2" THICK)
15201G	2	ANCHOR POST ANGLE (10" LONG)
15202G	1	ANGLE STRUT
HARDWARE		
4902G	1	1" ROUND WASHER F436
3908G	1	1" HEAVY HEX NUT A563 GR.DH
3717G	2	3/4" X 2 1/2" HEX BOLT A325
3701G	4	3/4" ROUND WASHER F436
3704G	2	3/4" HEAVY HEX NUT A563 GR.DH
3360G	16	5/8" X 1 1/4" W-BEAM RAIL SPLICE BOLTS HGR
3340G	25	5/8" W-BEAM RAIL SPLICE NUTS HGR
3500G	7	5/8" X 10" HGR POST BOLT A307
3391G	1	5/8" X 1 3/4" HEX HD BOLT A325
4489G	1	5/8" X 9" HEX HD BOLT A325
4372G	4	5/8" WASHER F436
105285G	2	5/8" X 2 1/2" HEX HD BOLT GR-5
105286G	1	5/8" X 1 1/2" HEX HD BOLT GR-5
3240G	6	5/8" ROUND WASHER (WIDE)
3245G	3	5/8" HEX NUT A563 GR.DH
5852B	1	HIGH INTENSITY REFLECTIVE SHEETING - SEE NOTE: B

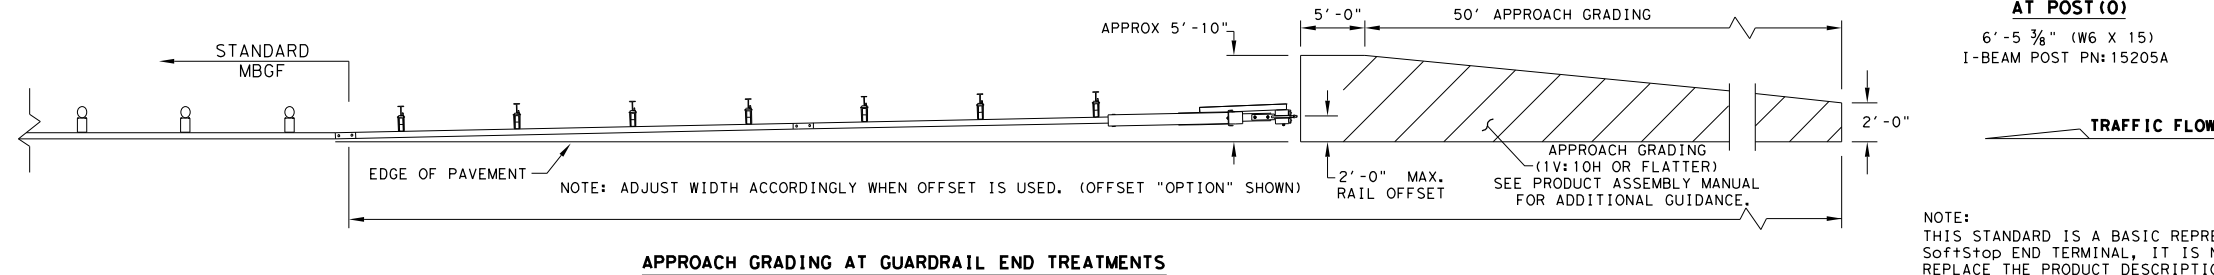

Design Division Standard








TRINITY HIGHWAY SOFTSTOP END TERMINAL MASH - TL-3 SGT (10S) 31-16

FILE: sgt10s3116	DN: TxDOT	CK: KM	DN: VP	CK: MB/VP
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY		SHEET NO.
	AMA	POTTER		118

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SoftStop END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DATE: FILE:

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

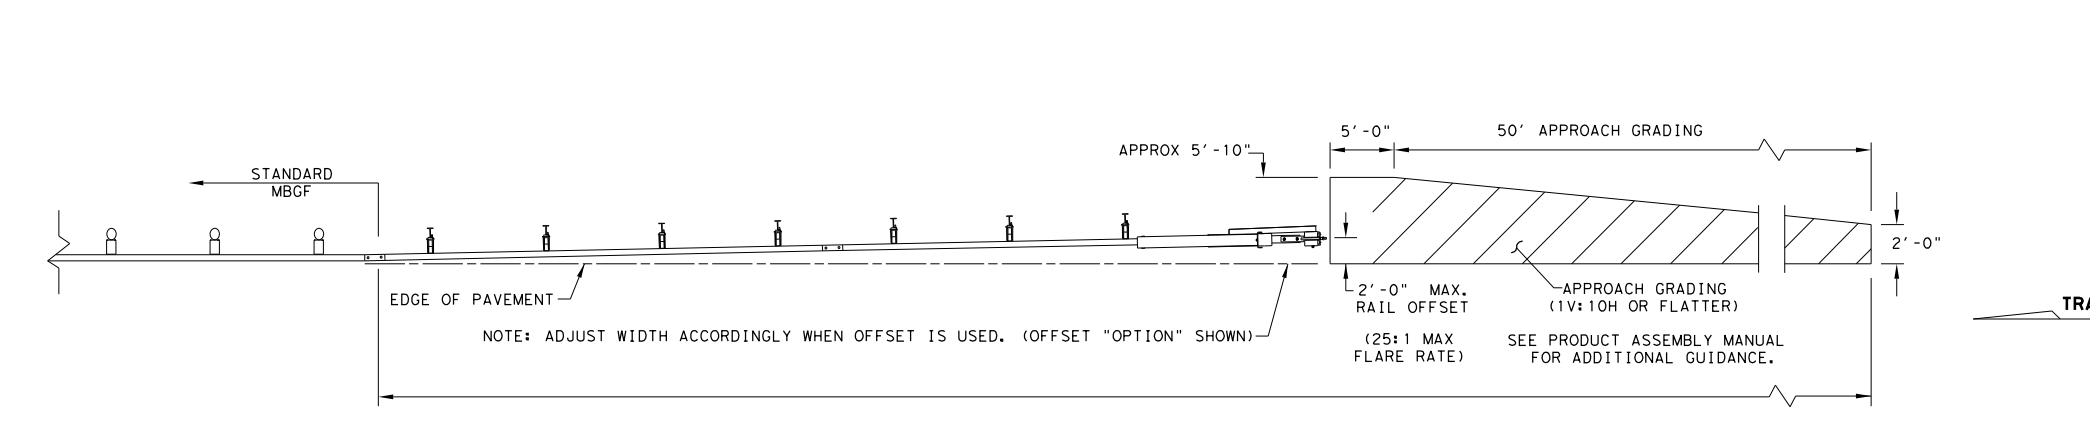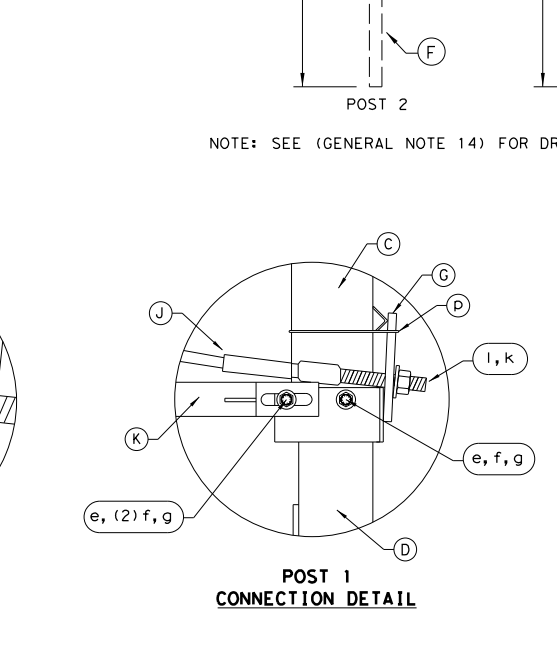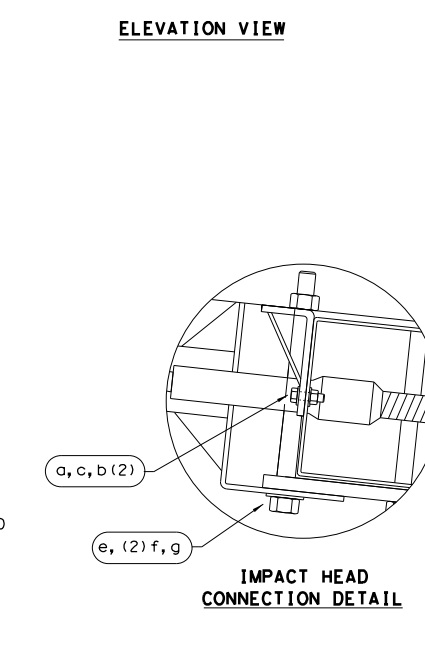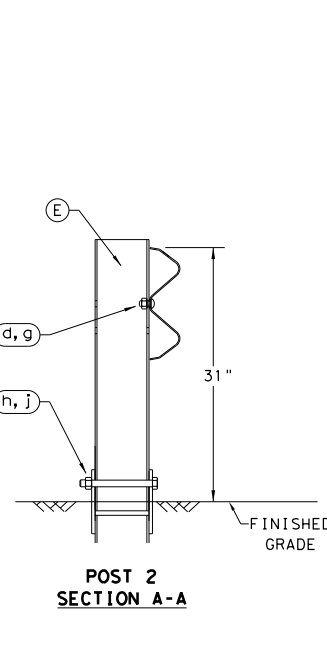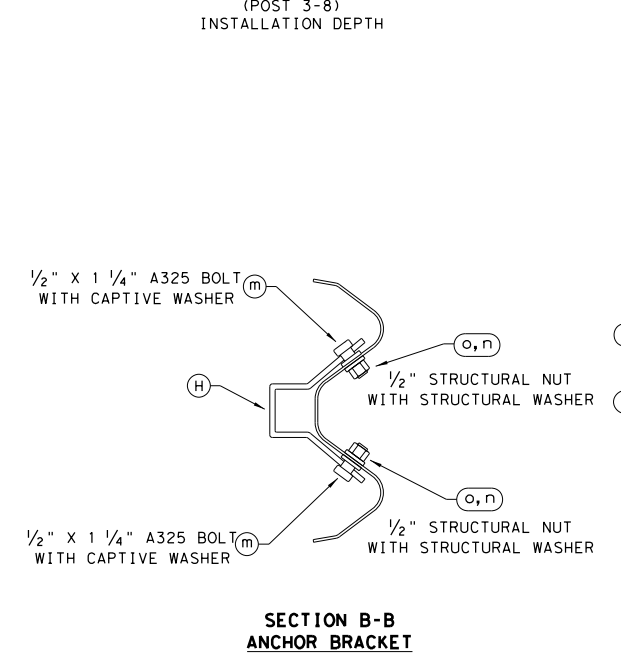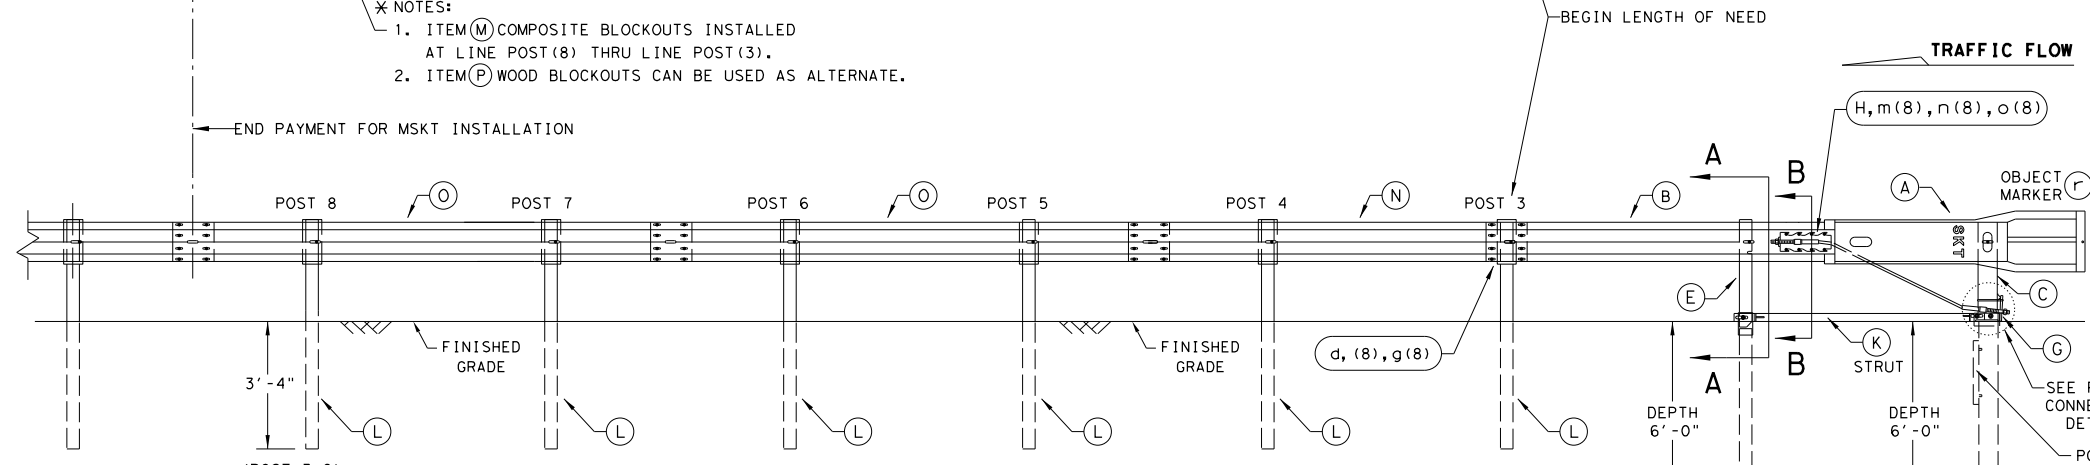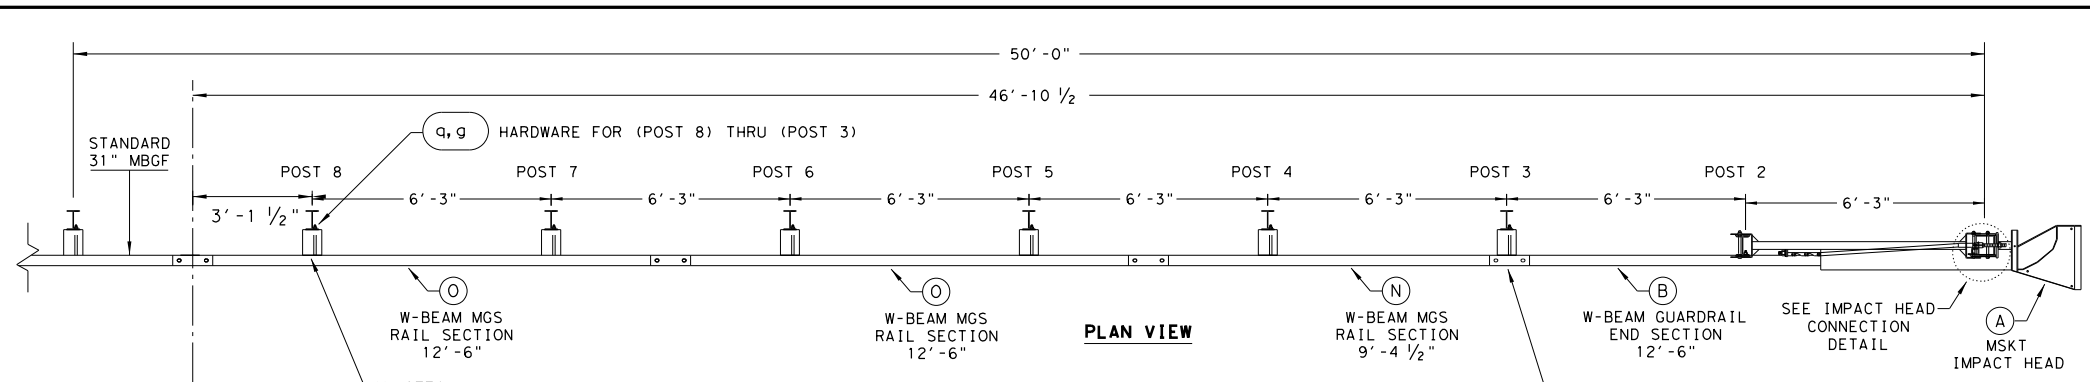

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
 - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBSGF STANDARD FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBSGF.
 - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
 - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRANCHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
 - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBSGF PANELS, ONE 25'-0" MBSGF PANEL IS ALSO ALLOWED IN ITS PLACE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Go.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6X9 OR W6X8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209
SMALL HARDWARE			
a	2	5/8" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	5/8" WASHER	W0516
c	2	5/8" HEX NUT	N0516
d	25	5/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	5/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	5/8" WASHER	W050
g	33	5/8" Dia. H.G.R NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/8" O.D. x 3/8" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	5/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

ALTERNATIVE ITEMS NOT SHOWN. * *
 * ITEM (P) 8" WOOD-BLOCKOUT
 * * ITEM (Q) 25' GUARD FENCE PANEL

SEE NOTES: *

NOTE: SEE (GENERAL NOTE 14) FOR DRIVING CAP INFORMATION.



SINGLE GUARDRAIL TERMINAL
MSKT-MASH-TL-3
SGT (12S) 31-18

FILE: sgt12s3118.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CL
© TxDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	0904 00	220	VARIOUS	
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	119	

DATE: 8/1/2023 2:24:09 PM
 FILE: K:\01509\01509-0027-12 TxDOT WA 12 AMA PS&E_IH_40 ITS_V2 Design Phase of AD&S.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into digital format or for incorrect results or damages resulting from its use.

APPLICABLE STANDARDS SHEETS

OVERHEAD SIGN BRIDGE STANDARDS:

- OSB-SE
- OSB-Z#
- OSB-Z#1
- HOSB-Z#
- HOSB-Z1L
- HOSB-Z#1
- OSBT
- OSBC
- OSBC-SC-Z#
- OSBS-SC
- OSB-FD
- OSB-FD-SC

CANTILEVER OVERHEAD SIGN SUPPORT STANDARDS:

- COSS-SE
- COSS-Z#-10
- HCOSS-Z#-10
- COSS-Z21-10
- COSS-Z#&Z#1-10
- COSSD
- COSSF
- COSS-FD

Note: # = Wind Zone number 1, 2, 3 or 4

HIGH MAST ILLUMINATION POLE STANDARDS:

- HMIP-98
- HMIF-98


WALKWAYS AND BRACKETS STANDARDS:

- SWW
- SB(SWL-1)

TRAFFIC SIGNAL POLE STANDARDS:

- SP-80
- SP-100
- SMA-80
- SMA-100
- DMA-80
- DMA-100
- MA-C
- MAC (ILSN)
- MAD-D
- TS-FD
- LUM-A
- CFA
- LMA
- TS-C
- MA-DPD

NOTE: Structures north of ice line to be designed for ice.

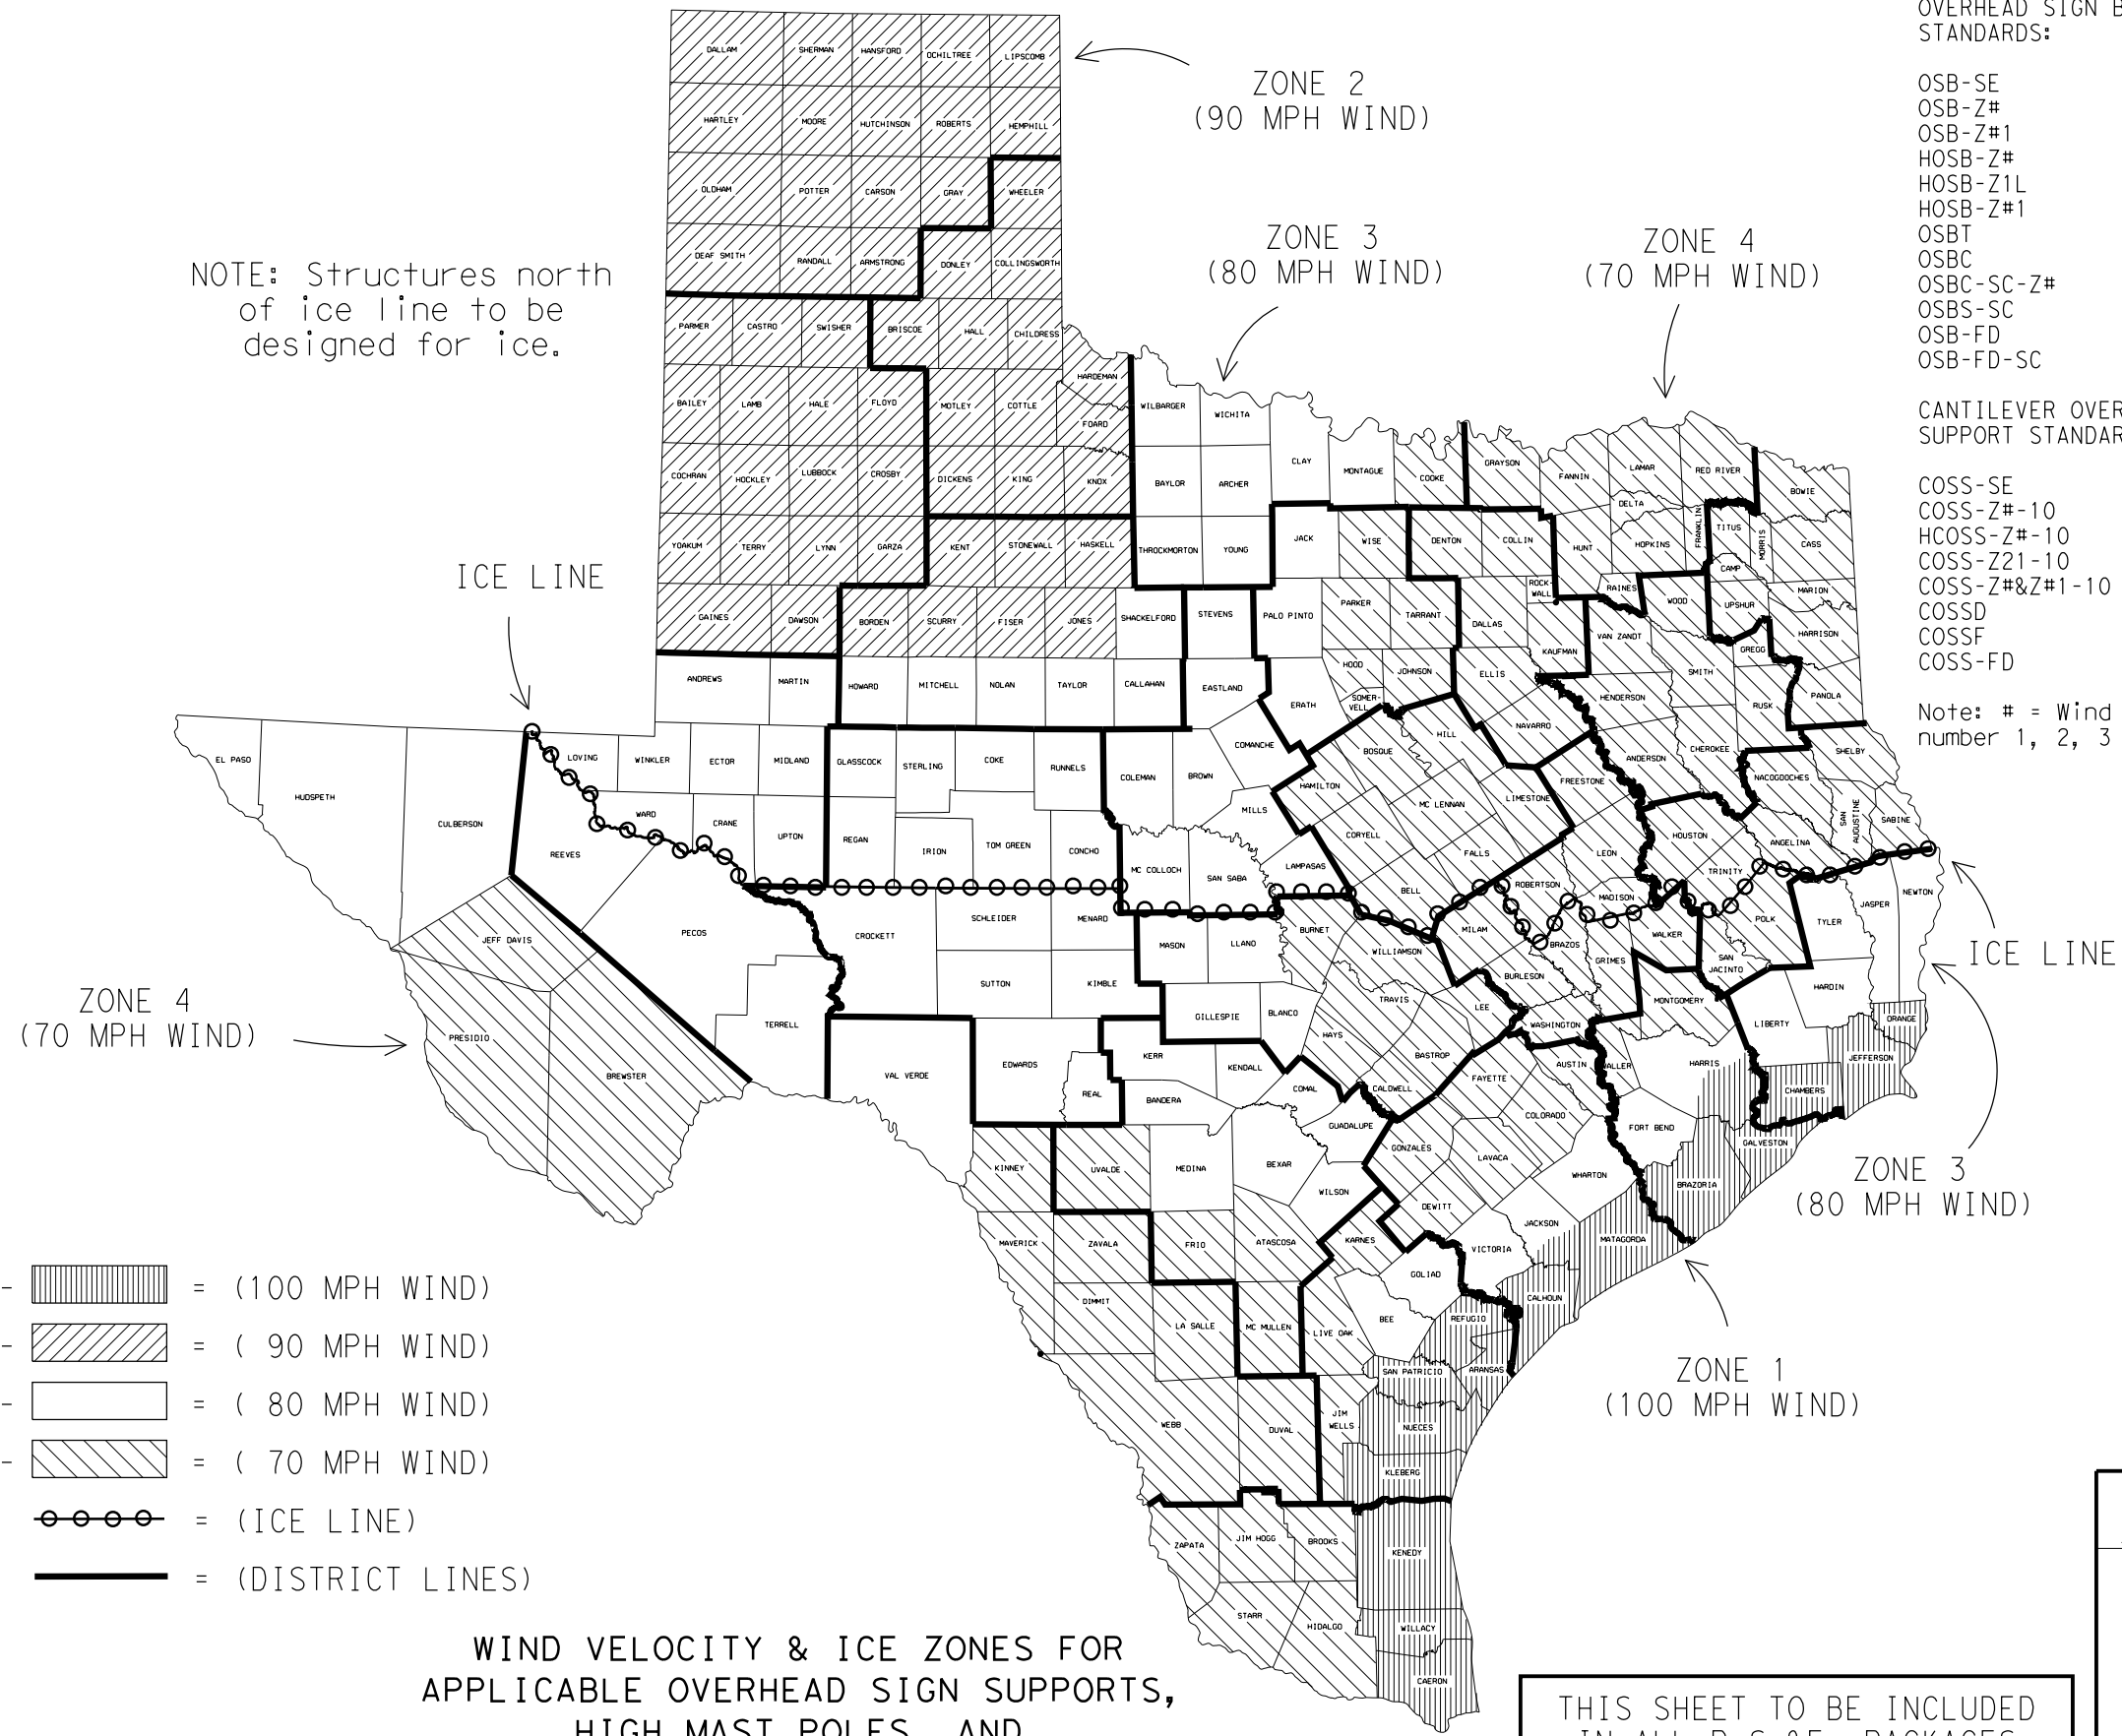

LEGEND

- ZONE 1 - [diagonal lines] = (100 MPH WIND)
- ZONE 2 - [diagonal lines] = (90 MPH WIND)
- ZONE 3 - [white box] = (80 MPH WIND)
- ZONE 4 - [diagonal lines] = (70 MPH WIND)
- [dashed line with circles] = (ICE LINE)
- [solid black line] = (DISTRICT LINES)

WIND VELOCITY & ICE ZONES FOR APPLICABLE OVERHEAD SIGN SUPPORTS, HIGH MAST POLES, AND TRAFFIC SIGNAL POLES

Based on 50 Year Mean Recurrence Interval of Fastest Mile Wind Velocity at 33 feet height.

THIS SHEET TO BE INCLUDED IN ALL P.S.&E. PACKAGES CONTAINING ONE OR MORE OF THE APPLICABLE STANDARD SHEETS LISTED HEREON

FOR HARRIS CO. ONLY
 Zone line is just North of US 90, around on the North, West and South sides of IH 610 and down the West side of SH 288.

FOR JACKSON CO. ONLY
 Zone line is just North of SH 616.

		Traffic Operations Division Standard	
<h2>WIND VELOCITY AND ICE ZONES</h2> <h3>WV & IZ-14</h3>			
FILE:	windice.dgn	DN: TxDOT	CK: TxDOT
© TxDOT	April 1996	CON: 0904	SECT: 00
REVISIONS 8-14-Added list of applicable standards, restricting use to structures designed for Fastest Mile wind speeds.		JOB: 220	VARIOUS
DIST:	AMA	COUNTY:	POTTER
SHEET NO.			120

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023
 FILE: K:\01509\01509-0027-12 AMA PS&E IH 40 ITS\2 Design Phase\CAD\standards\epic..._dgn

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1. None
- 2.
- No Action Required Required Action

Action No.

- Less than one acre of disturbed area including any PSLs within 1 mile needs no posting on the project. Binder needs to be maintained and inspection completed by TxDOT weekly.
- Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
- Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with SW3P and revise when necessary to control pollution as required by the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

-
-
-
-

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

- In the event that unanticipated archeological deposits are encountered during construction, work in the immediate area will cease and TxDOT archeological staff will be contacted to initiate post-review discovery procedures.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

-
-
-
-

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

- If any species on the Hartley, Moore, Oldham, Potter, and Randall County T & E list is sited in the project area during construction in that county, stop construction, and notify the Area Engineer.
- Bird BMP's: a) Do not disturb, destroy, or remove active nests, including ground nesting birds, during the nesting season; b) avoid the removal of unoccupied, inactive nests, as practicable; c) prevent the establishment of active nests during the growing season on TxDOT owned or operated facilities and structures proposed for replacement or repair; d) do not collect, capture, relocate, or transport birds, eggs, young, or active nests without a permit.
- The migratory Bird Treaty Act of 1918 states that it is unlawful to kill, capture, collect, possess, buy, sell, trade, or transport any migratory bird, nest, young, feather, egg in part or in whole, without a Federal permit issued in accordance within the Act's policies and regulations. In the event that migratory birds are encountered on-site during project construction, adverse on protected birds, active nests, eggs, and/or young would be avoided and bridge work would not begin until the young have left the nest. Otherwise, nests would be removed when they are not occupied and preventive measures would be taken to prevent re-colonization underneath the bridge prior to and during construction. No swallow nests have been noted on any of these bridges to date.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

-
-
-

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required Required Action

Action No.

-
-
-



		Design Division Standard		
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC				
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP	CK: AR
©TxDOT: February 2015	CONT	SECT	JOB	HIGHWAY
12-12-2011 IDS REVISIONS	0904	00	220	VARIOUS
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.	
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	AMA	POTTER	121	

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

This SWP3 has been developed in accordance with TxDOT policy for projects disturbing less than 1 acre of soil, and not part of a larger common plan of development.

For projects with less than one acre of soil disturbing activity and that have Environmental, Permits, Issues, and Commitments (EPICs) dependent on stormwater controls and water quality measures TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office, Area Office, or electronically.

This SWP3 is consistent with requirements specified in applicable stormwater plans, and the project's environmental permits, issues, and commitments (EPICs).

1.0 SITE/PROJECT DESCRIPTION

1.1 PROJECT CONTROL SECTION JOB (CSJ):

0904-00-220

1.2 PROJECT LIMITS:

At: IH 40 EB, WEST OF ADRIAN	IH 40 EB, WEST OF ADRIAN
IH 40 EB, WEST OF ADRIAN	IH 40 EB, WEST OF VEGA
IH 40 EB, WEST OF ADRIAN	IH 40 EB, WEST OF WILDERADO
At: IH 40 EB, WEST OF BUSHLAND	IH 40 WB, WEST OF AMARILLO
IH 40 EB, WEST OF AMARILLO	IH 40 EB, NORTH OF CLAUDE
	IH 40 EB, WEST OF GROOM
At: IH 40 EB, EAST OF GROOM	IH 40 EB, WEST OF ALANREED
IH 40 EB, EAST OF GROOM	IH 40 EB, WEST OF ALANREED
	IH 40 EB, EAST OF McLEAN

1.3 PROJECT COORDINATES:

BEGIN: (Lat) _____, (Long) _____

END: (Lat) _____, (Long) _____

1.4 TOTAL PROJECT AREA (Acres): 4.59 Acres

1.5 TOTAL AREA TO BE DISTURBED (Acres): 0.46 Acres

1.6 NATURE OF CONSTRUCTION ACTIVITY:

Install ITS Signs, Cameras Districtwide

1.7 MAJOR SOIL TYPES:

Soil Type	Description
Dallam Co.-Dallam fine sandy loam	0-1% slopes; 0-8' fine sandy loam; 8-32" sandy clay loam.
Moore Co.- Sunray loam	1-3% slopes; 0-10" loam, 10-22" clay loam..
Potter Co.- Pantex silty clay loam	0-1% slopes; 0-7" silty clay loam, 7-34" silty clay.
Randall & Oldham Co. Pullman clay loam	1-3% slopes; 0-4" clay loam 4-32" silty clay loam.

1.8 PROJECT SPECIFIC LOCATIONS (PSLs):

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

- PSLs determined during preconstruction meeting
- PSLs determined during construction
- No PSLs planned for construction

Type	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

1.9 CONSTRUCTION ACTIVITIES:

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.3.)

- Mobilization
- Install sediment and erosion controls
- Blade existing topsoil into windrows, prep ROW, clear and grub
- Remove existing pavement
- Grading operations, excavation, and embankment
- Excavate and prepare subgrade for proposed pavement widening
- Remove existing culverts, safety end treatments (SETs)
- Remove existing metal beam guard fence (MBGF), bridge rail
- Install proposed pavement per plans
- Install culverts, culvert extensions, SETs
- Install mow strip, MBGF, bridge rail
- Place flex base
- Rework slopes, grade ditches
- Blade windrowed material back across slopes
- Revegetation of unpaved areas
- Achieve site stabilization and remove sediment and erosion control measures
- Other: Drilling Foundations, Boring and Trenching Conduit, and Installing Ground Boxes.

Other: _____

Other: _____

1.10 POTENTIAL POLLUTANTS AND SOURCES:

- Sediment laden stormwater from stormwater conveyance over disturbed area
- Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- Solvents, paints, adhesives, etc. from various construction activities
- Transported soils from offsite vehicle tracking
- Construction debris and waste from various construction activities
- Contaminated water from excavation or dewatering pump-out water
- Sanitary waste from onsite restroom facilities
- Trash from various construction activities/receptacles
- Long-term stockpiles of material and waste
- Discharges from concrete washout activities, runoff from concrete cutting activities, and other concrete related activities

Other: _____

Other: _____

Other: _____

1.11 RECEIVING WATERS:

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Tributaries	Classified Waterbody
Rita Blanca Creek	
Big Blue Creek	
Palo Duro Creek	
East Amarillo Creek	
non-jurisdictional playa lakes	

* Add (*) for impaired waterbodies with pollutant in ().

1.12 ROLES AND RESPONSIBILITIES: TxDOT

- Development of plans and specifications
- Perform SWP3 inspections
- Maintain SWP3 records and update to reflect daily operations

Other: _____

Other: _____

1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR

- Day To Day Operational Control
- Maintain schedule of major construction activities
- Install, maintain and modify BMPs

Other: _____

Other: _____



STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)

FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
	(SEE TITLE SHEET)			122
STATE	STATE DIST.	COUNTY		
TEXAS	AMA	POTTER		
CONT.	SECT.	JOB	HIGHWAY NO.	
0904	00	220	VARIOUS	

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:

T / P

- Protection of Existing Vegetation
- Vegetated Buffer Zones
- Soil Retention Blankets
- Geotextiles
- Mulching/ Hydromulching
- Soil Surface Treatments
- Temporary Seeding
- Permanent Planting, Sodding or Seeding
- Biodegradable Erosion Control Logs
- Rock Filter Dams/ Rock Check Dams
- Vertical Tracking
- Interceptor Swale
- Riprap
- Diversion Dike
- Temporary Pipe Slope Drain
- Embankment for Erosion Control
- Paved Flumes
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.2 SEDIMENT CONTROL BMPs:

T / P

- Biodegradable Erosion Control Logs
- Dewatering Controls
- Inlet Protection
- Rock Filter Dams/ Rock Check Dams
- Sandbag Berms
- Sediment Control Fence
- Stabilized Construction Exit
- Floating Turbidity Barrier
- Vegetated Buffer Zones
- Vegetated Filter Strips
- Other: _____
- Other: _____
- Other: _____
- Other: _____

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.3 PERMANENT CONTROLS:

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To
None		

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.4 OFFSITE VEHICLE TRACKING CONTROLS:

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Daily street sweeping
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.5 POLLUTION PREVENTION MEASURES:

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.6 VEGETATED BUFFER ZONES:

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Stationing	
	From	To
None		

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.7 ALLOWABLE NON-STORMWATER DISCHARGES:

- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Uncontaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

2.8 DEWATERING:


Dewatering discharges of accumulated stormwater, groundwater, and surface water including discharges from dewatering of trenches, excavations, foundations, vaults, and other points of accumulation are prohibited unless managed by appropriate controls to prevent and minimize the offsite discharge of sediment and other pollutants.

2.9 INSPECTIONS:

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3 .

2.10 MAINTENANCE:


Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3.




STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)

FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
	(SEE TITLE SHEET)			123
STATE	STATE DIST.	COUNTY		
TEXAS	AMA	POTTER		
CONT.	SECT.	JOB	HIGHWAY NO.	
0904	00	220	VARIOUS	


DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. The use of this standard for the conversion of this standard to other formats or for incorrect results or damages resulting from its use. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

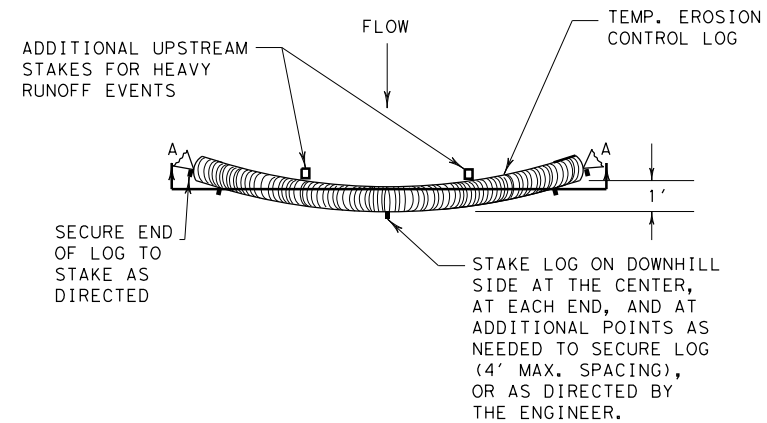


PLAN VIEW

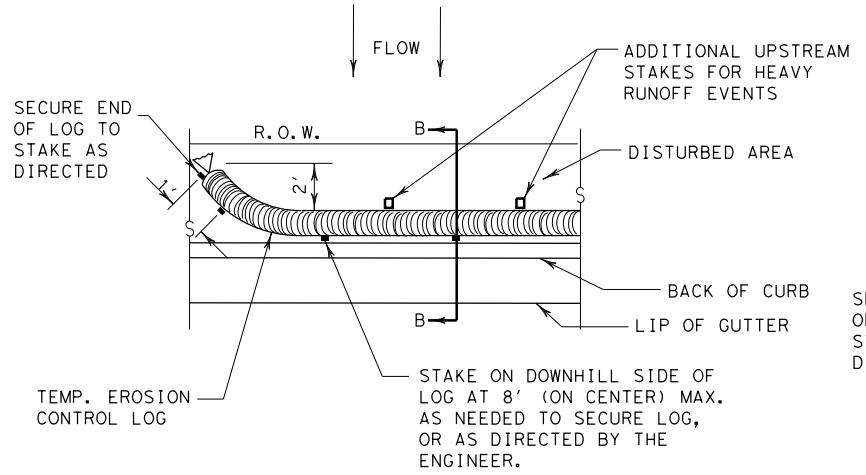

PLAN VIEW

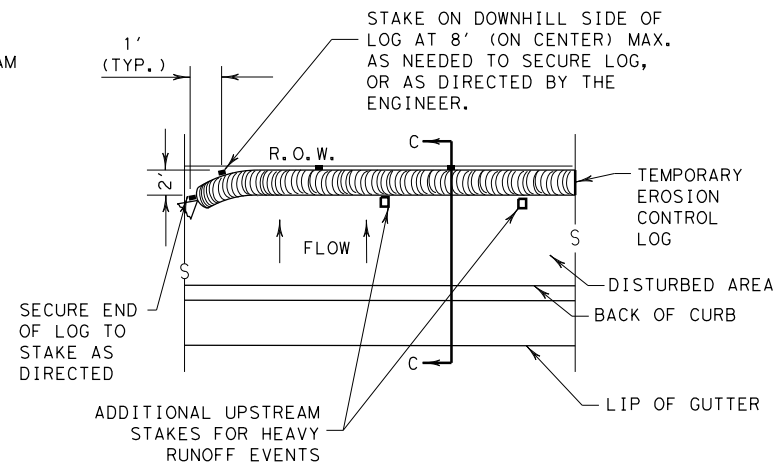


PLAN VIEW

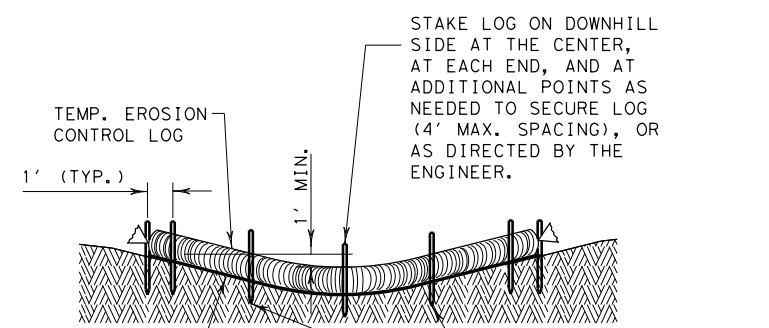

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

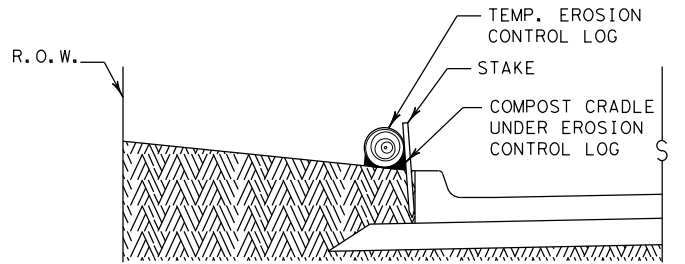

SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC

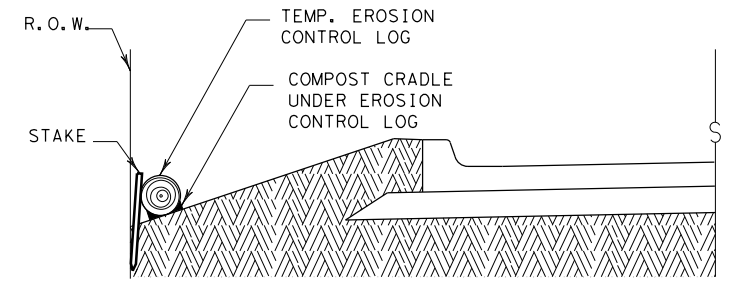

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

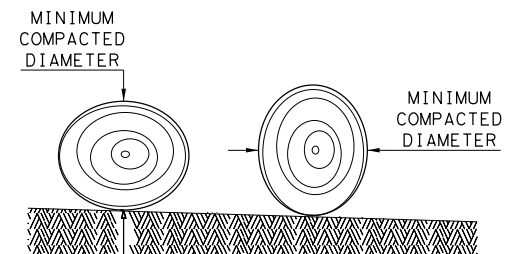

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND**
- CL-D EROSION CONTROL LOG DAM
 - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
 - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
 - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
 - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
 - CL-DI EROSION CONTROL LOG AT DROP INLET
 - CL-CI EROSION CONTROL LOG AT CURB INLET
 - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.


SHEET 1 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES			
EROSION CONTROL LOG			
EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	0904 00	220	VARIOUS
	DIST	COUNTY	SHEET NO.
	AMA	POTTER	124

DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

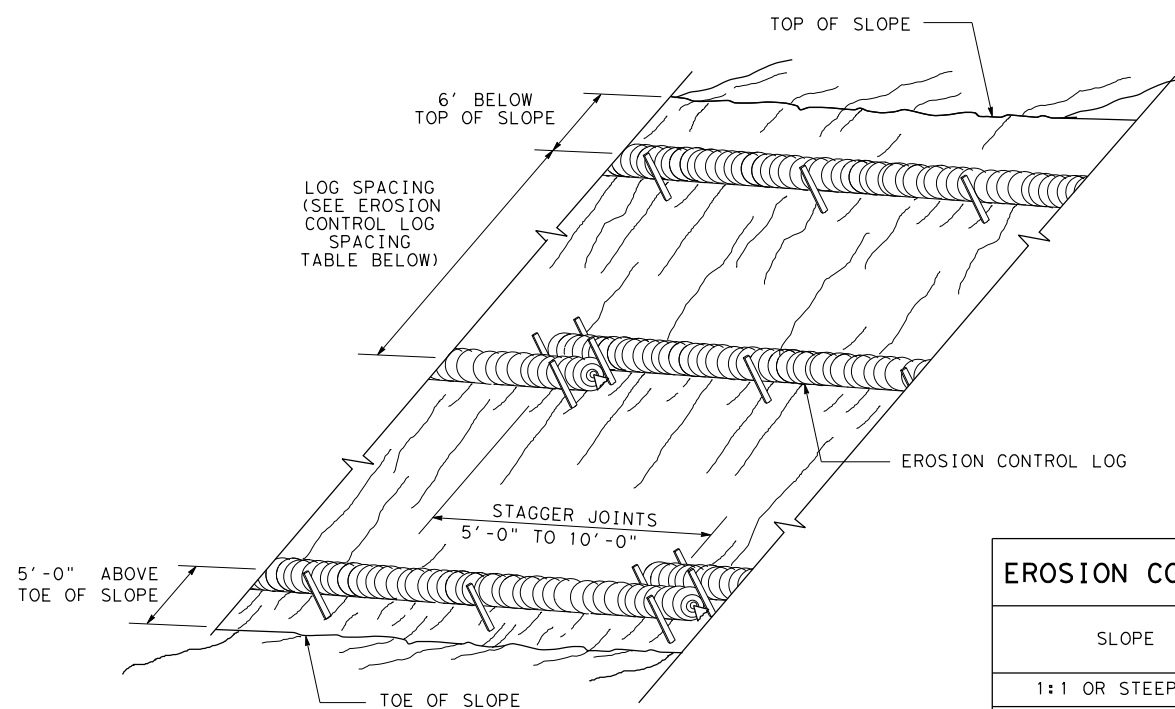


**EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING**

CL-SST

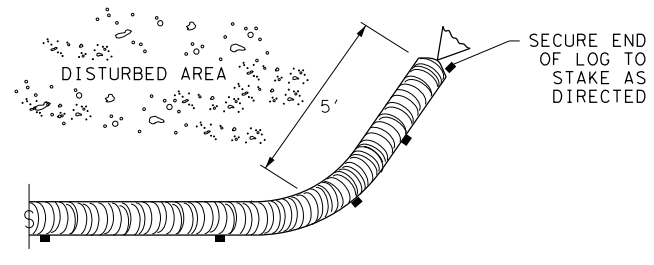

END SECTION RAP DETAIL

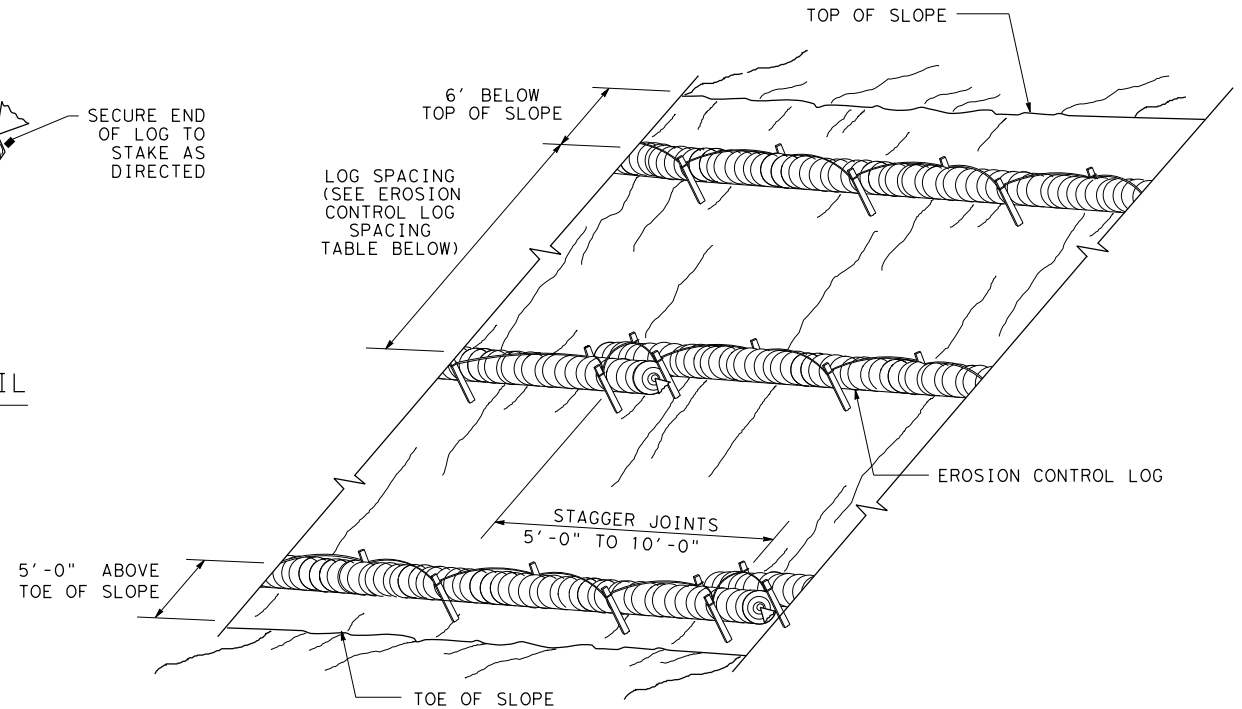


**EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING**

CL-SSL



SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

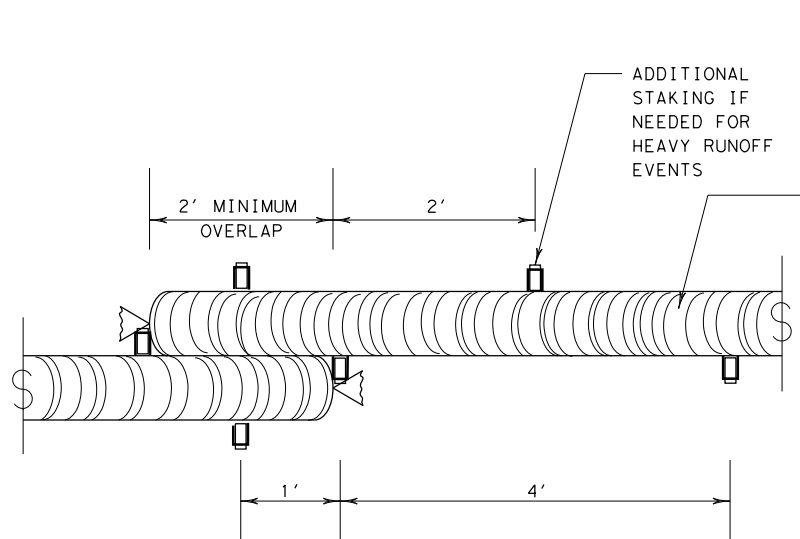


STAKE AND TRENCHING ANCHORING DETAIL

CL-SST

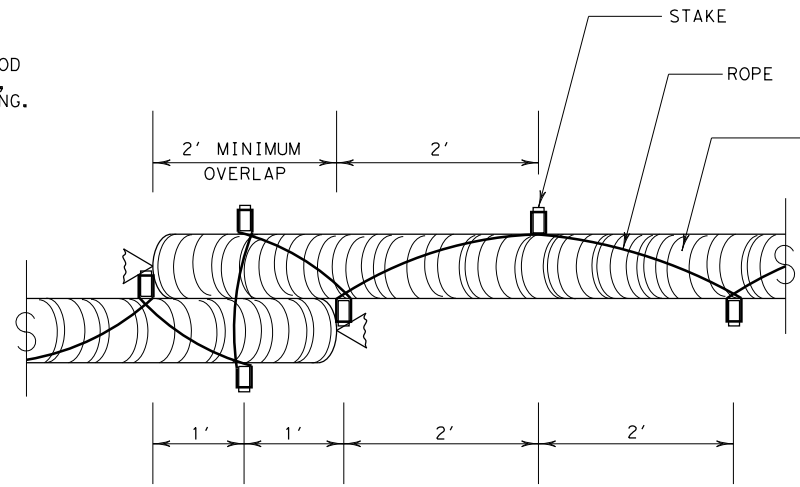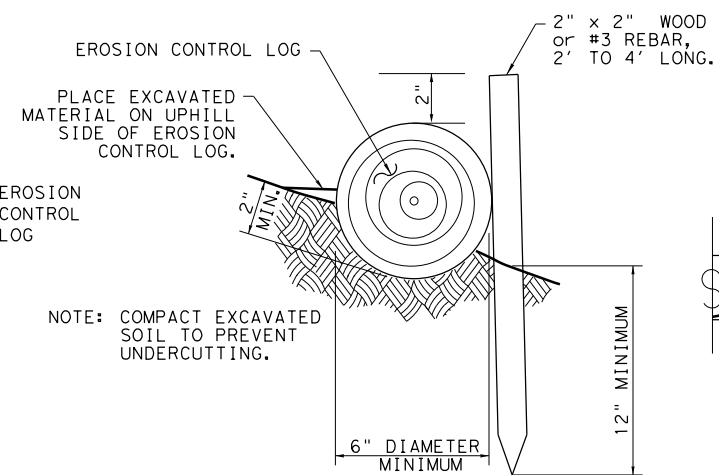


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

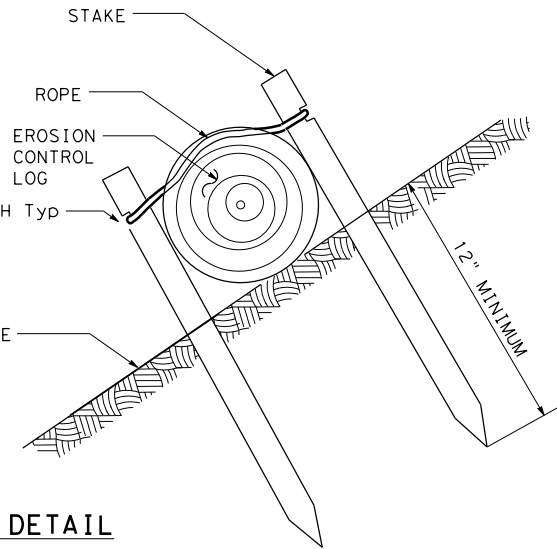

SHEET 2 OF 3


TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"



STAKE NOTCH DETAIL


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CON: 0904	SECT: 00	JOB: 220
REVISIONS	DIST: AMA	COUNTY: POTTER	SHEET NO.: 125

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

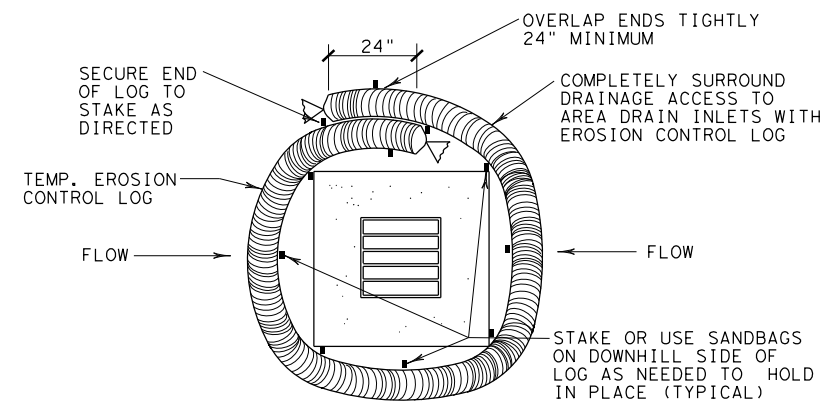


EROSION CONTROL LOG AT DROP INLET

CL-DI

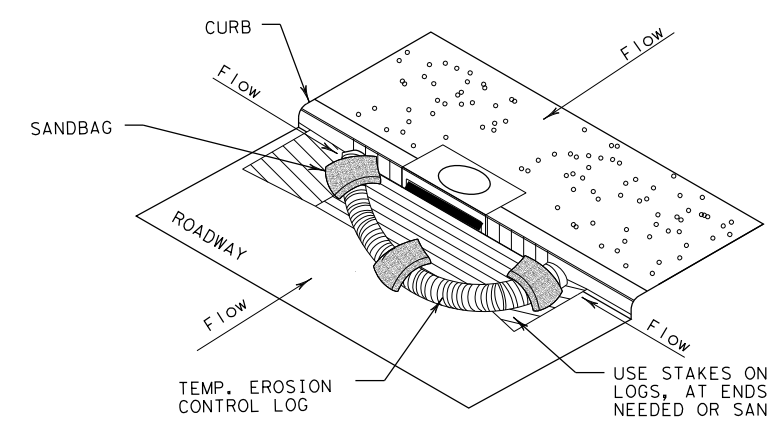

EROSION CONTROL LOG AT CURB INLET


CL-CI

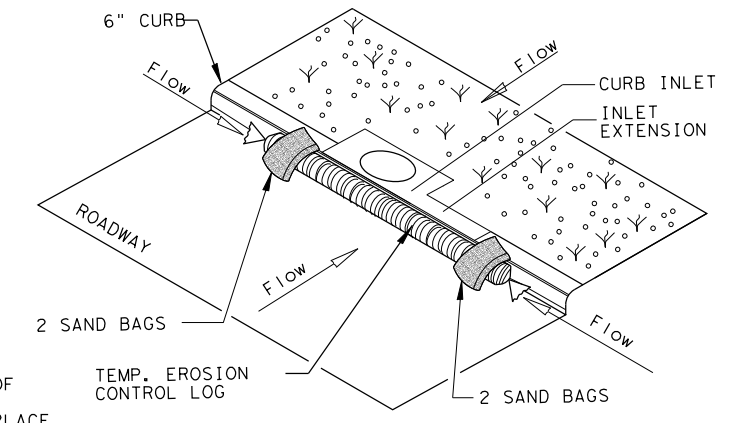

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

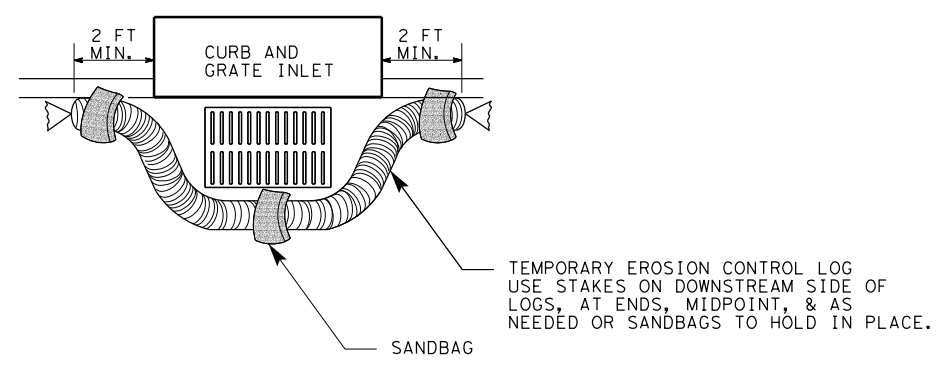

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

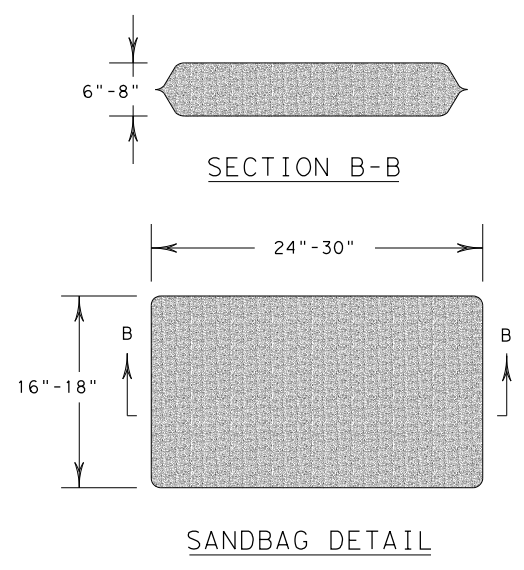

SHEET 3 OF 3

		Design Division Standard		
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16				
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT	CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	0904	00	220	VARIOUS
	DIST	COUNTY	SHEET NO.	
	AMA	POTTER	126	

DATE:
FILE: