

| | |
|---------|-------------------|
| Control | 0050-06-089, ETC. |
| Project | C 50-6-89, ETC. |
| Highway | US 290 |
| County | HARRIS |

ADDENDUM ACKNOWLEDGMENT

Each bidder is required to acknowledge receipt of an addendum issued for a specific project. This page is provided for the purpose of acknowledging an addendum.

FAILURE TO ACKNOWLEDGE RECEIPT OF AN ADDENDUM WILL RESULT IN THE BID NOT BEING READ.

In order to properly acknowledge an addendum place a mark in the box next to the respective addendum.

- ADDENDUM NO. 1
- ADDENDUM NO. 2
- ADDENDUM NO. 3
- ADDENDUM NO. 4
- ADDENDUM NO. 5

In addition, the bidder by affixing their signature to the signature page of the proposal is acknowledging that they have taken the addendum(s) into consideration when preparing their bid and that the information contained in the addendum will be included in the contract, if awarded by the Commission or other designees.

This page intentionally left blank.

| | |
|---------|-------------------|
| Control | 0050-06-089, ETC. |
| Project | C 50-6-89, ETC. |
| Highway | US 290 |
| County | HARRIS |

PROPOSAL TO THE TEXAS TRANSPORTATION COMMISSION

2014 SPECIFICATIONS WORK CONSISTING OF ADVANCED TRAFFIC MANAGEMENT SYSTEM HARRIS COUNTY, TEXAS

The quantities in the proposal are approximate. The quantities of work and materials may be increased or decreased as considered necessary to complete the work as planned and contemplated.

This project is to be completed in 270 working days and will be accepted when fully completed and finished to the satisfaction of the Executive Director or designee.

Provide a proposal guaranty in the form of a Cashier's Check, Teller's Check (including an Official Check) or Bank Money Order on a State or National Bank or Savings and Loan Association, or State or Federally chartered Credit Union made payable to the Texas Transportation Commission in the following amount:

SIXTY-NINE THOUSAND (Dollars) (\$69,000)

A bid bond may be used as the required proposal guaranty. The bond form may be detached from the proposal for completion. The proposal may not be disassembled to remove the bond form. The bond must be in accordance with Item 2 of the specifications.

Any addenda issued amending this proposal and/or the plans that have been acknowledged by the bidder, become part of this proposal.

By signing the proposal the bidder certifies:

1. the only persons or parties interested in this proposal are those named and the bidder has not directly or indirectly participated in collusion, entered into an agreement or otherwise taken any action in restraint of free competitive bidding in connection with the above captioned project.
2. in the event of the award of a contract, the organization represented will secure bonds for the full amount of the contract.
3. the signatory represents and warrants that they are an authorized signatory for the organization for which the bid is submitted and they have full and complete authority to submit this bid on behalf of their firm.
4. that the certifications and representations contained in the proposal are true and accurate and the bidder intends the proposal to be taken as a genuine government record.

• **Signed: ****

(1) _____ (2) _____ (3) _____

Print Name:

(1) _____ (2) _____ (3) _____

Title:

(1) _____ (2) _____ (3) _____

Company:

(1) _____ (2) _____ (3) _____

- Signatures to comply with Item 2 of the specifications.

**Note: Complete (1) for single venture, through (2) for joint venture and through (3) for triple venture.

* **When the working days field contains an asterisk (*) refer to the Special Provisions and General Notes.**

NOTICE TO CONTRACTORS

ANY CONTRACTORS INTENDING TO BID ON ANY WORK TO BE AWARDED BY THIS DEPARTMENT MUST SUBMIT A SATISFACTORY “AUDITED FINANCIAL STATEMENT” AND “EXPERIENCE QUESTIONNAIRE” AT LEAST TEN DAYS PRIOR TO THE LETTING DATE.

UNIT PRICES MUST BE SUBMITTED IN ACCORDANCE WITH ITEM 2 OF THE STANDARD SPECIFICATIONS OR SPECIAL PROVISION TO ITEM 2 FOR EACH ITEM LISTED IN THIS PROPOSAL.

TEXAS DEPARTMENT OF TRANSPORTATION

BID BOND

KNOW ALL PERSONS BY THESE PRESENTS,

That we, (Contractor Name) _____

Hereinafter called the Principal, and (Surety Name) _____

a corporation or firm duly authorized to transact surety business in the State of Texas, hereinafter called the Surety, are held and firmly bound unto the Texas Department of Transportation, hereinafter called the Oblige, in the sum of not less than two percent (2%) of the department's engineer's estimate, rounded to the nearest one thousand dollars, not to exceed one hundred thousand dollars (\$100,000) as a proposal guaranty (amount displayed on the cover of the proposal), the payment of which sum will and truly be made, the said Principal and the said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the principal has submitted a bid for the following project identified as:

| | |
|----------------|--------------------------|
| Control | 0050-06-089, ETC. |
| Project | C 50-6-89, ETC. |
| Highway | US 290 |
| County | HARRIS |

NOW, THEREFORE, if the Oblige shall award the Contract to the Principal and the Principal shall enter into the Contract in writing with the Oblige in accordance with the terms of such bid, then this bond shall be null and void. If in the event of failure of the Principal to execute such Contract in accordance with the terms of such bid, this bond shall become the property of the Oblige, without recourse of the Principal and/or Surety, not as a penalty but as liquidated damages.

Signed this _____ Day of _____ 20_____

By: _____
(Contractor/Principal Name)

(Signature and Title of Authorized Signatory for Contractor/Principal)

*By: _____
(Surety Name)

(Signature of Attorney-in-Fact)

Impressed
Surety Seal
Only

*Attach Power of attorney (Surety) for Attorney-in-Fact

This form may be removed from the proposal.

This page intentionally left blank.

BIDDER'S CHECK RETURN

IMPORTANT

The space provided for the return address must be completed to facilitate the return of your bidder's check. Care must be taken to provide a legible, accurate, and complete return address, including zip code. A copy of this sheet should be used for each different return address.

NOTE

Successful bidders will receive their guaranty checks with the executed contract.

RETURN BIDDERS CHECK TO (PLEASE PRINT):

| |
|--|
| |
| |
| |

| | |
|----------------|--------------------------|
| Control | 0050-06-089, ETC. |
| Project | C 50-6-89, ETC. |
| Highway | US 290 |
| County | HARRIS |

IMPORTANT

PLEASE RETURN THIS SHEET IN ITS ENTIRETY

Please acknowledge receipt of this check(s) at your earliest convenience by signing below in longhand, in ink, and returning this acknowledgement in the enclosed self addressed envelope.

Check Received By: _____ Date: _____

Title: _____

For (Contractor's Name): _____

Project _____ County _____

This page intentionally left blank.

NOTICE TO THE BIDDER

In the space provided below, please enter your total bid amount for this project. Only this figure will be read publicly by the Department at the public bid opening.

It is understood and agreed by the bidder in signing this proposal that the total bid amount entered below is not binding on either the bidder or the Department. It is further agreed that **the official total bid amount for this proposal will be determined by multiplying the unit bid prices for each pay item by the respective estimated quantities shown in this proposal and then totaling all of the extended amounts.**

\$ _____
Total Bid Amount

Control 0001-03-030
 Project STP 2000(938)HES
 Highway SH 20
 County EL PASO

| ALT | ITEM | DESC | SP | Bid Item Description | Unit | Quantity | Bid Price | Amount | Seq |
|-----|------|------|----|----------------------|------|------------------|------------|------------|-----|
| | I04 | 509 | X | REMOV CONC (SDWLK) | MSY | 266.400 | \$10.000 | \$2,664.00 | 1 |
| | | | | | | Total Bid Amount | \$2,664.00 | | |

Signed _____
 Title _____
 Date _____

Additional Signature for Joint Venture:

Signed _____
 Title _____
 Date _____

EXAMPLE OF BID PRICES SUBMITTED BY COMPUTER PRINTOUT

EXAMPLE

EXAMPLE

EXAMPLE

EXAMPLE

EXAMPLES

BID PRICES SUBMITTED BY HAND WRITTEN FORMAT

| ALT | ITEM-CODE | | | UNIT BID PRICE <u>ONLY</u> WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|------------|-------------|--|------|----------------------|---------------------|
| | ITEM NO | DESC NO | S.P. NO. | | | | |
| | 190 | 026 | | RED OAK 1 1/2 - 1 3/4 GAL BB | EA | 9.000 | 1 |
| | | | | | L | E | |

Unit price for each plant in place

| | | | | | | | |
|--|-----|-----|--|--------------------------------------|-----|-----------|----|
| | 249 | 014 | | FLEX BASE(DEL)(DENSOT)(TY A GR4 CL2) | TON | 56,787.00 | 14 |
| | | | | | L | E | |

Unit price for each ton of Flexible Base

| | | | | | | | |
|--|-----|-----|-----|------------------------------|----|--------|----|
| | 430 | 001 | 001 | CL A CONC FOR EXT STR (CULV) | CY | 45.000 | 27 |
| | | | | | L | E | |

Unit price for each cubic yard of Concrete

| | | | | | | | |
|--|-----|-----|-----|---------------------------------------|----|--------|---|
| | 610 | 007 | 001 | RDWY ILL ASSEM(TY ST 50T-8-8)(.4 KW)S | EA | 13.000 | 7 |
| | | | | | L | E | |

Unit price of each Roadway Illumination Assembly

EXAMPLE

EXAMPLE

EXAMPLE

EXAMPLE

This page intentionally left blank.

| ALT | ITEM-CODE | | | UNIT BID PRICE ONLY. WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|--------------|-------------|--|------|----------------------|---------------------|
| | ITEM NO | DESC CODE | S.P. NO. | | | | |
| | 416 | 6005 | | DRILL SHAFT (42 IN) DOLLARS and CENTS | LF | 390.000 | 1 |
| | 416 | 6023 | | DRILL SHAFT (SIGN MTS) (54 IN) DOLLARS and CENTS | LF | 74.000 | 2 |
| | 432 | 6045 | | RIPRAP (MOW STRIP)(4 IN) DOLLARS and CENTS | CY | 24.250 | 3 |
| | 500 | 6001 | | MOBILIZATION DOLLARS and CENTS | LS | 1.000 | 4 |
| | 502 | 6001 | 008 | BARRICADES, SIGNS AND TRAFFIC HAN- DLING DOLLARS and CENTS | MO | 18.000 | 5 |
| | 506 | 6038 | 002 | TEMP SEDMT CONT FENCE (INSTALL) DOLLARS and CENTS | LF | 1,000.000 | 6 |
| | 506 | 6039 | 002 | TEMP SEDMT CONT FENCE (REMOVE) DOLLARS and CENTS | LF | 1,000.000 | 7 |
| | 540 | 6001 | 001 | MTL W-BEAM GD FEN (TIM POST) DOLLARS and CENTS | LF | 175.000 | 8 |
| | 540 | 6016 | 001 | DOWNSTREAM ANCHOR TERMINAL SEC- TION DOLLARS and CENTS | EA | 1.000 | 9 |
| | 544 | 6006 | | GDRAIL END TRT(INST)(WOOD POST)(TY III) DOLLARS and CENTS | EA | 1.000 | 10 |
| | 618 | 6031 | | CONDT (PVC) (SCH 40) (3") (CONC ENCSE) DOLLARS and CENTS | LF | 90.000 | 11 |

| ALT | ITEM-CODE | | | UNIT BID PRICE ONLY. WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|--------------|-------------|--|------|----------------------|---------------------|
| | ITEM NO | DESC CODE | S.P. NO. | | | | |
| | 618 | 6046 | | CONDT (PVC) (SCH 80) (2") DOLLARS and CENTS | LF | 4,870.000 | 12 |
| | 618 | 6047 | | CONDT (PVC) (SCH 80) (2") (BORE) DOLLARS and CENTS | LF | 3,410.000 | 13 |
| | 618 | 6053 | | CONDT (PVC) (SCH 80) (3") DOLLARS and CENTS | LF | 1,070.000 | 14 |
| | 618 | 6054 | | CONDT (PVC) (SCH 80) (3") (BORE) DOLLARS and CENTS | LF | 690.000 | 15 |
| | 618 | 6058 | | CONDT (PVC) (SCH 80) (4") DOLLARS and CENTS | LF | 520.000 | 16 |
| | 620 | 6002 | | ELEC CONDR (NO.14) INSULATED DOLLARS and CENTS | LF | 74,290.000 | 17 |
| | 620 | 6007 | | ELEC CONDR (NO.8) BARE DOLLARS and CENTS | LF | 2,420.000 | 18 |
| | 620 | 6008 | | ELEC CONDR (NO.8) INSULATED DOLLARS and CENTS | LF | 4,610.000 | 19 |
| | 620 | 6009 | | ELEC CONDR (NO.6) BARE DOLLARS and CENTS | LF | 100.000 | 20 |
| | 620 | 6010 | | ELEC CONDR (NO.6) INSULATED DOLLARS and CENTS | LF | 300.000 | 21 |
| | 620 | 6011 | | ELEC CONDR (NO.4) BARE DOLLARS and CENTS | LF | 1,010.000 | 22 |
| | 620 | 6012 | | ELEC CONDR (NO.4) INSULATED DOLLARS and CENTS | LF | 2,320.000 | 23 |

| ALT | ITEM-CODE | | | UNIT BID PRICE ONLY. WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|--------------|-------------|---|------|----------------------|---------------------|
| | ITEM NO | DESC CODE | S.P. NO. | | | | |
| | 620 | 6015 | | ELEC CONDR (NO.2) BARE DOLLARS and CENTS | LF | 80.000 | 24 |
| | 620 | 6016 | | ELEC CONDR (NO.2) INSULATED DOLLARS and CENTS | LF | 240.000 | 25 |
| | 624 | 6002 | | GROUND BOX TY A (122311)W/APRON DOLLARS and CENTS | EA | 44.000 | 26 |
| | 628 | 6250 | | ELC SRV TY D 120/240 100(NS)SS(N)SP(O) DOLLARS and CENTS | EA | 21.000 | 27 |
| | 650 | 6035 | 001 | INS OH SN SUP(35 FT BAL TEE) DOLLARS and CENTS | EA | 2.000 | 28 |
| | 654 | 6004 | 001 | SIGN WALKWAY (36 IN) WITH HNDRL DOLLARS and CENTS | LF | 62.000 | 29 |
| | 6007 | 6010 | | FIBER OPTIC CBL (SNGLE-MODE)(6 FIBER) DOLLARS and CENTS | LF | 75,385.000 | 30 |
| | 6007 | 6011 | | FIBER OPTIC CBL (SNGLE-MODE)(12 FIBER) DOLLARS and CENTS | LF | 29,925.000 | 31 |
| | 6007 | 6017 | | FIBER OPTIC CBL (SNGLE-MODE)(144 FIBER) DOLLARS and CENTS | LF | 76,170.000 | 32 |
| | 6007 | 6023 | | FIBER OPTIC PATCH PANEL (12 POSITION) DOLLARS and CENTS | EA | 11.000 | 33 |
| | 6007 | 6027 | | FIBER OPTIC PATCH PANEL (144 POSITION) DOLLARS and CENTS | EA | 6.000 | 34 |
| | 6007 | 6094 | | FIBER OPTIC FUSION SPLICE DOLLARS and CENTS | EA | 924.000 | 35 |

| ALT | ITEM-CODE | | | UNIT BID PRICE ONLY. WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|--------------|-------------|---|------|----------------------|---------------------|
| | ITEM NO | DESC CODE | S.P. NO. | | | | |
| | 6010 | 6001 | | CCTV FIELD EQUIPMENT (ANALOG) DOLLARS and CENTS | EA | 20.000 | 36 |
| | 6016 | 6008 | | ITS MULTI-DUCT CND (PVC-40)(CONC ENCSE) DOLLARS and CENTS | LF | 250.000 | 37 |
| | 6016 | 6011 | | ITS MULTI-DUCT CND (PVC-80)(BORE) DOLLARS and CENTS | LF | 400.000 | 38 |
| | 6017 | 6001 | | COMMUNICATION HUB BUILDING DOLLARS and CENTS | EA | 4.000 | 39 |
| | 6027 | 6003 | | CONDUIT (PREPARE) DOLLARS and CENTS | LF | 258,509.000 | 40 |
| | 6028 | 6002 | | INSTALL DMS (FOUNDATION MTD CABI- NET) DOLLARS and CENTS | EA | 2.000 | 41 |
| | 6035 | 6001 | | FIBER OPTIC VIDEO DATA TRANSMITTER DOLLARS and CENTS | EA | 20.000 | 42 |
| | 6035 | 6002 | | FIBER OPTIC VIDEO DATA RECEIVER DOLLARS and CENTS | EA | 20.000 | 43 |
| | 6064 | 6047 | 001 | ITS POLE (55 FT)(110 MPH) DOLLARS and CENTS | EA | 20.000 | 44 |
| | 6064 | 6080 | 001 | ITS POLE MNT CAB (TY 2)(CONF 1) DOLLARS and CENTS | EA | 20.000 | 45 |
| | 6185 | 6002 | 002 | TMA (STATIONARY) DOLLARS and CENTS | DAY | 270.000 | 46 |
| | 6186 | 6002 | | ITS GND BOX(PCAST) TY 1 (243636)W/APRN DOLLARS and CENTS | EA | 10.000 | 47 |

PROJECT C 50-6-89 , ETC.
 COUNTY HARRIS

Proposal Sheet
 TxDOT
 FORM 234-B I-61-5M

| ALT | ITEM-CODE | | | UNIT BID PRICE ONLY. WRITTEN IN WORDS | UNIT | APPROX QUANTITIES | DEPT USE ONLY |
|-----|------------|--------------|-------------|--|------|----------------------|---------------------|
| | ITEM NO | DESC CODE | S.P. NO. | | | | |
| | 6304 | 6001 | | ITS RVSD (DATA COLLECT ONLY) SYS DOLLARS and CENTS | EA | 7.000 | 48 |

CERTIFICATION OF INTEREST IN OTHER BID PROPOSALS FOR THIS WORK

By signing this proposal, the bidding firm and the signer certify that the following information, as indicated by checking "Yes" or "No" below, is true, accurate, and complete.

- A. Quotation(s) have been issued in this firm's name to other firm(s) interested in this work for consideration for performing a portion of this work.

_____ YES

_____ NO

- B. If this proposal is the low bid, the bidder agrees to provide the following information prior to award of the contract.

1. Identify firms which bid as a prime contractor and from which the bidder received quotations for work on this project.
2. Identify all the firms which bid as a prime contractor to which the bidder gave quotations for work on this project.

ENGINEER SEAL


Control 0050-06-089, ETC.

Project C 50-6-89, ETC.

Highway US 290

County HARRIS

The enclosed Texas Department of Transportation Specifications, Special Specifications, Special Provisions, General Notes and Specification Data in this document have been selected by me, or under my responsible supervision as being applicable to this project. Alteration of a sealed document without proper notification to the responsible engineer is an offense under the Texas Engineering Practice Act.

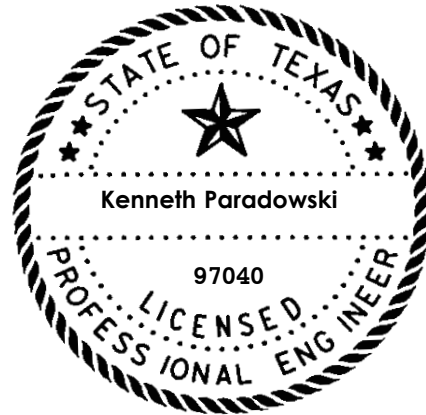

The seal appearing on this document was authorized by
Kenneth Paradowski, P.E.
JUNE 08, 2022

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

General Notes:

General:

Contractor questions on this project are to be addressed to the following individual(s):

Dock S. Gee, P.E. Dock.Gee@txdot.gov

Yannick F. Dwatie, P.E. Yannick.Dwatie@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals. Contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

References to manufacturer's trade name or catalog numbers are for the purpose of identification only. Similar materials from other manufacturers are permitted if they are of equal quality, comply with the specifications for this project, and are approved, except for roadway illumination, electrical, and traffic signal items.

The cost for materials, labor, and incidentals to provide for traffic across the roadway and for ingress and egress to private property in accordance with Section 7.2.4 of the standard specifications is subsidiary to the various bid items. Restore access roadways to their original condition upon completing construction.

Procure permits and licenses, which are to be issued by the City, County, or Municipal Utility District.

Ensure the interconnection of new equipment to the existing system does not interfere with the operation of the remaining system components. Ensure the system remains completely operational between the hours of 6:00 a.m. Monday and 12:00 a.m. (midnight) Saturday.

Do not interrupt system operation without coordinating with the Department's operations personnel at Houston Transtar at (713) 881-3285.

Perform work to be done on cables during weekends only.

General: Site Management

Do not mix or store materials, or store or repair equipment, on top of concrete pavement or bridge decks unless authorized by the Engineer. Permission will be granted to store materials on surfaces if no damage or discoloration will result.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Personal vehicles of employees are not permitted to park within the right of way, including sections closed to public traffic. Employees may park on the right of way at the Contractor's office, equipment, and materials storage yard sites.

Assume ownership of debris and dispose of at an approved location. Do not dispose of debris on private property unless approved in writing by the District Engineer.

General: Utilities

Consider the locations of underground utilities depicted in the plans as approximate and employ responsible care to avoid damaging utility facilities. Depending upon scope and magnitude of planned construction activities, advanced field confirmation by the utility owner or operator may be prudent. Where possible, protect and preserve permanent signs, markers, and designations of underground facilities.

If the Contractor damages or causes damage (breaks, leaks, nicks, dents, gouges, etc.) to the utility, contact the utility facility owner or operator immediately.

Be aware that an operational Computerized Transportation Management System (CTMS) exists within the limits of this project and that the system must remain operational throughout construction. If the Contractor damages or causes damage to this system, repair such damage within 8 hours of occurrence at no cost to the Department. In the event of system damage, notify the Director of Traffic Management Systems at 713-881-3283 within one hour of occurrence. Failure of the Contractor to repair damage to the main fiber optic cable and CCTV cable trunk lines, which convey all corridor information to TranStar, will result in the Contractor being billed for the full cost of emergency repairs.

At least 72 hours before starting work, make arrangements for locating existing Department-owned above ground and underground fiber optic, communications, power, illumination, and traffic signal cabling and conduit. Do this by calling the Department's Houston District Traffic Signal Operations Office at 713-802-5662, or by e-mailing the Department's Houston District Traffic Signal Operations Office at HOU-LocateRequest@txdot.gov, to schedule marking of underground lines on the ground. Use caution if working in these areas to avoid damaging or interfering with existing facilities.

Install or remove poles and luminaires located near overhead or underground electrical lines using established industry and utility safety practices. Consult the appropriate utility company before beginning such work.

If overhead or underground power lines need to be de-energized, contact the electrical service provider to perform this work. Costs associated with de-energizing the power lines or other protective measures required are at no expense to the Department.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

If working near power lines, comply with the appropriate sections of Texas State Law and Federal Regulations relating to the type of work involved.

Perform electrical work in conformance with the National Electrical Code (NEC) and Department's standard sheets.

The Department may test using ultrasonic methods the anchor bolts for overhead sign supports, light standards and traffic signal poles after they are installed. Replace faulty anchor bolts as directed. Do not weld the anchor bolts.

When pulling cables or conductors through conduit, do not exceed manufacturer's recommended pulling tensions. Lubricate the cables or conductors with a lubricant as recommended by the cable manufacturer.

Test each wire of each cable or conductor after installation. Any incomplete circuit or any damage to any wire or any cable will be cause for immediate rejection of the entire cable being tested. Remove and replace the entire cable at no expense to the Department and test the replacement cable after installation.

Consistently color-code and permanently label all power conductors, twisted wire pair cables, shielded cables, signal cables, control cables and fiber optic cables between all connections and splices to ensure immediate identification. Submit a chart or list identifying all cables and conductors in a logical and sequential manner.

All circuits must test clear of faults, grounds and open circuits.

Perform all staking subject to the approval of the Engineer in the field.

Ensure that all conductors are continuous without splices from terminal point to terminal point or as otherwise directed by the Engineer. Do not splice cables in ground boxes.

Pull conductors in PVC conduit using nonmetallic pull rope.

The use of ready mix concrete will be permitted. Equipment and construction methods, satisfactory to the Engineer, which will produce the desired results, may be used in lieu of those specified. Hand finishing will be permitted.

Employ, at no expense to the department, an approved commercial testing laboratory to pour and break concrete beams in lieu of all other tests for determining concrete strength. Submit certified reports of each break to the Engineer.

The Contractor may use membrane curing on concrete work as specified by Item 420, "Concrete Structures".

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

The location of CTMS equipment shown in the plans is approximate and is subject to change at time of installation. Prior to installing drill shafts, building foundations or cabinet foundations, contact the Engineer for field verification and approval of the exact location of each installation. Field verify each location for construction access and utility clearance prior to staking. Stake each foundation prior to the Engineer's field verification. Provide a minimum of 2 weeks notice for Engineer to perform field verification.

Provide each cabinet and building with complete documentation for all conductors contained within the cabinet/building. Completely detail the routing, termination point(s), and color code of each conductor in this documentation. Also identify the origin, destination and function of the signal for each conductor of each cable.

Submit equipment layouts for each type of cabinet and equipment floor plans for each type of building to the Engineer for approval prior to fabrication.

Construct all cabinet foundations in accordance with the details shown in the plans.

Do not use ground fault circuit interrupter (GFCI) outlets to supply power to electronic equipment.

Where new equipment is to be installed in existing cabinets, install all necessary shelves, racks, terminal panels, wiring, cabling, harnesses, etc. Review the layout of each cabinet/building and submit, for approval of the Engineer, a revised layout showing all new equipment and cabling. Include all costs associated with these modifications in the price bid for the equipment; no separate payment will be made.

In cases where conduit is to be mounted on existing structures, review the structure and submit the mounting details to the Engineer for approval.

Verify existing anchor bolt pattern dimensions prior to the fabrication of structures.

The plans show the conduits numbered and specific cables in specific conduits. The purpose of these notes is to instruct the Contractor on how to group the cables in the conduits and not to specify the exact conduit that is to carry the cables i.e., the numbering system is arbitrary and may be set by the Contractor.

Between intersections, restore all areas disturbed due to trenching, boring, drill shaft installation, conduit and ground box installation...etc. to a condition equivalent to the original condition within 14 working days from the time work begins in the area. Include all necessary planting, mulching, seeding, sodding, sidewalk, curb and riprap replacement.

At intersections, restore all areas disturbed due to trenching, boring, drill shaft installation, conduit and ground box installation, etc. to a condition equivalent to the original condition within

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

45 working days from the time work begins in the area. Include in this work all necessary planting, mulching, seeding, sodding, sidewalk, curb and riprap replacement.

In locations where conductors with greater than 50 VAC are routed through ground boxes with other cables, install a section of 2 inch flexible PVC conduit in the ground boxes and route the conductors through this conduit to keep it separate from other cables. The furnishing and installing of this flexible PVC conduit will not be paid for directly, but will be incidental to the various pay items.

At locations where fiber optic cable is to be installed in the same conduit with other cables, enclose the fiber optic cable in an Engineer-approved innerduct. The innerduct will not be paid for directly but is considered incidental to the various bid items.

Maintain the median of the freeway in a serviceable condition, free of obstructions, and acceptable to the Engineer. Eliminate all hazards to the traveling public.

The Contractor may make the electrical grounding connections and permissible splices using the thermal fusion process, Cadweld, Thermaweld or equal, instead of bolted connections and splices.

After satisfactory completion of all tests, place all electronic equipment in operation. Final acceptance will not be made until the electronic equipment has operated satisfactorily for a period of not less than 90 days and in is full compliance with the requirements of the plans and specifications.

Assume full responsibility for the electronic equipment during the test period. Make any adjustments or repairs, which may be required and remedy any defects or damages that may occur at no expense to the Department.

Deliver all equipment removed, as shown in the plans, to a location specified by the Engineer.

Item 5: Control of Work

Submit shop drawings electronically for the fabrication of items as documented in Table 1 or Table 2 below. Information and requirements for electronic submittals can be viewed in the "Guide to Electronic Shop Drawing Submittal" which can be accessed through the following web link, ftp://ftp.dot.state.tx.us/pub/txdot-info/library/pubs/bus/bridge/e_submit_guide.pdf. References to 11 in. x 17 in. sheets in individual specifications for structural items imply electronic CAD sheets.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Table 1

2014 Construction Specification Required Shop/Working Drawing Submittals - TxDOT Generated Plans

| Spec Item No.'s | Product | Submittal Required | Approval Required (Y/N) | Contractor/Fabricator P.E. Seal Required | Reviewing Party | Shop or Working Drawing (Note 1) |
|-----------------|--|--------------------|-------------------------|--|-----------------|----------------------------------|
| 7.16.1&.2 | Construction Load Analyses | Y | Y | Y | B | WD |
| 400 | Excavation and Backfill for Structures (cofferdams) | Y | N | Y | A | WD |
| 403 | Temporary Special Shoring | Y | N | Y | C | WD |
| 420 | Formwork/Falsework | Y | N | Y | A | WD |
| 423 | Retaining Walls, (calcs req'd.) | Y | Y | Y | C | SD |
| 425 | Optional Design Calculations (Prstrs Bms) | Y | Y | Y | B | SD |
| 425 | Prestr Concr Sheet Piling | Y | Y | N | B | SD |
| 425 | Prestr Concr Beams | Y | Y | N | B | SD |
| 425 | Prestr Concr Bent | Y | Y | N | B | SD |
| 426 | Post Tension Details | Y | Y | N | B | SD |
| 434 | Elastomeric Bearing Pads (All) | Y | Y | N | B | SD |
| 441 | Bridge Protective Assembly | Y | Y | N | B | SD |
| 441 | Misc Steel (various steel assemblies) | Y | Y | N | B | SD |
| 441 | Steel Pedestals (bridge raising) | Y | Y | N | B | SD |
| 441 | Steel Bearings | Y | Y | N | B | SD |
| 441 | Steel Bent | Y | Y | N | B | SD |
| 441 | Steel Diaphragms | Y | Y | N | B | SD |
| 441 | Steel Finger Joint | Y | Y | N | B | SD |
| 441 | Steel Plate Girder | Y | Y | N | B | SD |
| 441 | Steel Tub-Girders | Y | Y | N | B | SD |
| 441 | Erection Plans, including Falsework | Y | N | Y | A | WD |
| 449 | Sign Structure Anchor Bolts | Y | Y | N | T | SD |
| 450 | Railing | Y | Y | N | A | SD |
| 462 | Concrete Box Culvert | Y | Y | N | C | SD |
| 462 | Concrete Box Culvert (Alternate Designs Only, calcs reqd.) | Y | Y | Y | B | SD |
| 464 | Reinforced Concrete Pipe (Jack and Bore only; ONLY when requested) | Y | Y | Y | A | SD |
| 465 | Pre-cast Junction Boxes, Grates, and Inlets | Y | Y | N | A | SD |
| 465 | Pre-cast Junction Boxes, Grates, and Inlets (Alternate Designs Only, calcs req'd.) | Y | Y | Y | B | SD |
| 466 | Pre-cast Headwalls and Wingwalls | Y | Y | N | A | SD |
| 467 | Pre-cast Safety End Treatments | Y | Y | N | A | SD |
| 495 | Raising Existing Structure (calcs reqd.) | Y | Y | Y | B | SD |
| 610 | Roadway Illumination Supports (Non-Standard only, calcs reqd.) | Y | Y | Y | BRG | SD |
| 613 | High Mast Illumination Poles (Non-standard only, calcs reqd.) | Y | Y | Y | BRG | SD |
| 627 | Treated Timber Poles | Y | Y | N | T | SD |
| 644 | Special Non-Standard Supports (Bridge Mounts, Barrier Mounts, | Y | Y | Y | T | SD |

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

| | | | | | | |
|-----|---|---|---|---|-----|----|
| | Etc.) | | | | | |
| 647 | Large Roadside Sign Supports | Y | Y | Y | T | SD |
| 650 | Cantilever Sign Structure Supports - Alternate Design Calcs. | Y | Y | Y | T | SD |
| 650 | Sign Structures | Y | Y | N | T | SD |
| 680 | Installation of Highway Traffic Signals | Y | Y | N | T | SD |
| 682 | Vehicle and Pedestrian Signal Heads | Y | Y | N | T | SD |
| 684 | Traffic Signal Cables | Y | Y | N | T | SD |
| 685 | Roadside Flashing Beacon Assemblies | Y | Y | N | T | SD |
| 686 | Traffic Signal Pole Assemblies (Steel) (Non-Standard only) | Y | Y | Y | T | SD |
| 687 | Pedestal Pole Assemblies | Y | Y | N | T | SD |
| 688 | Detectors | Y | Y | N | A | SD |
| 784 | Repairing Steel Bridge Members | Y | Y | Y | B | WD |
| SS | Prestr Concr Crown Span | Y | Y | N | B | SD |
| SS | Sound Barrier Walls | Y | Y | Y | A | SD |
| SS | Camera Poles | Y | Y | Y | TMS | SD |
| SS | Pedestrian Bridge (Calcs req'd.) | Y | Y | Y | B | SD |
| SS | Screw-In Type Anchor Foundations | Y | Y | N | T | SD |
| SS | Fiber Optic/Communication Cable | Y | Y | N | TMS | SD |
| SS | Spread Spectrum Radios for Signals | Y | Y | N | T | SD |
| SS | VIVDS System for Signals | Y | Y | N | T | SD |
| SS | CTMS Equipment | Y | Y | N | TMS | SD |

Notes:

1. Document flow for Working Drawings differs from Shop Drawings in that Working Drawings must be submitted to the Engineer rather than the Engineer of Record and they are for the information of the Engineer only; an approval stamp and distribution to all project offices is not required.

Key to Reviewing Party

| A - Area Office | |
|-------------------------------------|--|
| Area Office | Email Address |
| Brazoria Area Office | HOU-BRZAShpDrwgs@txdot.gov |
| Fort Bend Area Office | HOU-FBAShpDrwgs@txdot.gov |
| Galveston Area Office | HOU-GALVAShpDrwgs@txdot.gov |
| Montgomery Area Office | HOU-MONTAShpDrwgs@txdot.gov |
| North Harris Area Office | HOU-NHAShpDrwgs@txdot.gov |
| Southeast Area Office | HOU-SEHAShpDrwgs@txdot.gov |
| Traffic Systems Construction Office | HOU-TSCShpDrwgs@txdot.gov |
| West/Central Harris Area Office | HOU-WWCHAOShpDrwgs@txdot.gov |
| B - Houston Bridge Engineer | |
| Bridge Design (Houston TxDOT) | HOU-BrgShpDrwgs@txdot.gov |
| BRG - Austin Bridge Division | |
| Bridge Design (Austin TxDOT) | BRG_ShopPlanReview@txdot.gov |
| C - Construction Office | |

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

| | |
|--|--|
| Construction | HOU-ConstrShpDrwgs@txdot.gov |
| Laboratory | HOU-LabShpDrwgs@txdot.gov |
| T - Traffic Engineer | |
| Traffic Operations | HOU-TrfShpDrwgs@txdot.gov |
| TMS – Traffic Management System | |
| Computerized Traffic Management Systems (CTMS) | HOU-CTMSShpDrwgs@txdot.gov |

Key to Reviewing Party

| | |
|--|--|
| D – Consultant: Submit to Engineer of Record at email@host.xxx | |
| TMS – Traffic Management System | |
| Computerized Traffic Management Systems (CTMS) | HOU-CTMSShpDrwgs@txdot.gov |

Item 7: Legal Relations and Responsibilities

Do not initiate activities in a Project Specific Location (PSL), associated with a U.S. Army Corps of Engineers (USACE) permit area, that have not been previously evaluated by the USACE as part of the permit review of this project. Such activities include those pertaining to, but are not limited to, haul roads, equipment staging areas, borrow and disposal sites. Associated defined here means materials are delivered to or from the PSL. The permit area includes the waters of the U.S. or associated wetlands affected by activities associated with this project. Special restrictions may be required for such work. Assume responsibility for consultations with the USACE regarding activities, including PSLs that have not been previously evaluated by the USACE. Provide the Department with a copy of consultations or approvals from the USACE before initiating activities.

No significant traffic generator events have been identified.

Item 8: Prosecution and Progress

Working days will be computed and charged based on a standard workweek in accordance with Section 8.3.1.4.

The Lane Closure Assessment Fee is \$ 1,000. This fee applies to the Contractor for closures or obstructions that overlap into restricted hour traffic for each hour or portion thereof, per lane, regardless of the length of lane closure or obstruction. For Restricted Hours subject to Lane Assessment Fee refer to the Item, “Barricades, Signs, and Traffic Handling.” The time increment for the Lane Closure Assessment fee for this project is one hour.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Item 416: Drilled Shaft Foundations

Include the cost for furnishing and installing anchor bolts mounted in the drilled shafts in the unit bid price for the various diameter drilled shafts.

The Department may test using ultrasonic methods the anchor bolts for overhead sign supports, light standards, and traffic signal poles after they are installed. Replace faulty anchor bolts as directed. Do not weld the anchor bolts.

Item 502: Barricades, Signs, and Traffic Handling

Use a traffic control plan for handling traffic through the various phases of construction. Follow the phasing sequence unless otherwise agreed upon by the Area Engineer and the Project Manager. Ensure this plan conforms to the latest "Texas Manual on Uniform Traffic Control Devices" and the latest Barricade and Construction (BC) Standard Sheets. The latest versions of Work Zone Standard Sheets WZ (BTS-1) and WZ (BTS-2) are the traffic control plan for the signal installations.

Submit changes to the traffic control plan to the Area Engineer. Provide a layout showing the construction phasing, signs, striping, and signalizations for changes to the original traffic control plan.

Furnish and maintain the barricades and warning signs, including the necessary temporary and portable traffic control devices, during the various phases of construction. Place and construct these barricades and warning signs in accordance with the latest "Texas Manual on Uniform Traffic Control Devices" for typical construction layouts.

Cover work zone signs when work related to the signs is not in progress, or when any hazard related to the signs no longer exists.

Keep the delineation devices, signs, and pavement markings clean. This work is subsidiary to the Item, "Barricades, Signs, and Traffic Handling."

Cover or remove the permanent signs and construction signs that are incorrect or that do not apply to the current situation for a particular phase.

Replace the overhead signs, informational signs, and exit signs to be removed, with temporary signs providing the correct information to the traveling public. Size the replacement signs and include them in the traffic control plan.

Do not mount signs on drums or barricades, except those listed in the latest Barricades and Construction standard sheets.

Use traffic cones for daytime work only. Replace the cones with plastic drums during nighttime hours.

County: Harris**Control:** 0050-06-089, ETC.**Highway:** US 290

Place positive barriers to protect drop-off conditions greater than 2 ft. within the clear zone that remain overnight.

Do not reduce the existing number of lanes open to traffic except as shown on the following time schedule:

One Lane Closure

| Day | Daytime work | Nighttime work | Restricted Hours Subject to Lane Assessment Fee |
|------------|---------------------|-----------------------|--|
| Monday | 9:00 AM – 3:00 PM | N/A | 5:00 AM - 9:00 AM 3:00 PM - 7:00 PM |
| Tuesday | 9:00 AM – 3:00 PM | N/A | 5:00 AM - 9:00 AM 3:00 PM - 7:00 PM |
| Wednesday | 9:00 AM – 3:00 PM | N/A | 5:00 AM - 9:00 AM 3:00 PM - 7:00 PM |
| Thursday | 9:00 AM – 3:00 PM | N/A | 5:00 AM - 9:00 AM 3:00 PM - 7:00 PM |
| Friday | 9:00 AM – 3:00 PM | N/A | 5:00 AM - 9:00 AM 3:00 PM - 7:00 PM |
| Saturday | N/A | N/A | N/A |
| Sunday | N/A | N/A | N/A |

The above times are approved for the traffic control conditions listed. The Area Engineer may approve other closure times if traffic counts warrant. The Area Engineer may reduce the above times for special events.

Law enforcement assistance will be required for this project and is expected to be required for major traffic control changes and lane closures. Coordinate with local law enforcement and arrange for law enforcement as directed or agreed by the Engineer. Before payment will be made, complete the “Daily Report on Law Enforcement Force Account Work” (Form 318), provided by the Department and submit daily invoices that agree with this form for any day during the month in which approved services were provided.

Provide full-time, off-duty, uniformed, certified peace officers, as part of traffic control operations. The peace officers must be able to show proof of certification by the Texas Commission on Law Enforcement Officers Standards. The cost of the officers is paid for on a force account basis.

A minimum of 7 days in advance of any total closure, notify the Houston District Public Information Office of which roadways, ramps, intersections, or lanes will be closed, the dates they will remain closed, and when they will be opened again to traffic.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

The Contractor Force Account “Safety Contingency” that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor’s Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Item 506: Temporary Erosion, Sedimentation and Environmental Controls

The use of hay bales is not permitted as Storm Water Pollution Prevention Plan (SWP3) measures.

Due to the nature of the work involved, a Storm Water Pollution Prevention Plan (SWP3) is not required. However, if a SWP3 becomes necessary, it will be paid as extra work.

The Storm Water Pollution Prevention Plan (SWP3) consists of temporary erosion control measures needed and provided for under this Item. The disturbed area is less than one acre and use of erosion control measures is not anticipated. If physical conditions encountered at the job site require necessary controls, BMP installation, maintenance, and removal will be paid as extra work on a force account basis per Articles 4.4 and 9.7. Since the disturbed area is less than 5 acres, a “Notice of Intent” (NOI) is not required.

Use appropriate measures to prevent, minimize, and control the spill of hazardous materials in the construction staging area. Remove and dispose of materials in compliance with State and Federal laws.

Before starting construction, review with the Engineer the SWP3 used for temporary erosion control as outlined on the plans. Before construction, place the temporary erosion and sedimentation control features as shown on the SWP3.

Schedule the seeding or sodding work as soon as possible. The project schedule provides for a vegetation management plan.

After completing earthwork operations, restore and reseed the disturbed areas in accordance with the Department’s specifications for permanent or temporary erosion control.

Implement temporary and permanent erosion control measures to comply with the National Pollution Discharge Elimination System (NPDES) general permit under the Clean Water Act.

Before starting grading operations and during the project duration, place the temporary or permanent erosion control measures to prevent sediment from leaving the right of way.

Item 540: Metal Beam Guard Fence

Painting the timber posts is not required.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Use timber posts for galvanized steel metal beam guard fence, except for anchorage at turned down ends.

Furnish and install wood blocks between the rail elements and the timber posts as detailed on the plans. These block-outs are subsidiary to this bid Item.

The quantity of the metal beam guard fence is subject to change.

Provide a mow strip as shown on the plans, at metal beam guard fence locations, including any guardrail end treatments.

Galvanize the rail elements supplied for this project by using a Type II Zinc Coating.

At locations requiring attachment of Metal Beam Guard Fence (MBGF) to concrete railing or concrete traffic barrier, repair and fill any existing holes in the railing or barrier that are not in the correct location for attaching the new MBGF. Perform this work in accordance with the Item, "Concrete Structure Repair." Existing anchor bolt holes that cannot be utilized must be filled with an epoxy grout before drilling new holes. Then core-drill new holes in the correct locations and repair any resulting spalls at no expense to the Department. This work is considered subsidiary to the MBGF transition section (Item 540).

Item 618: Conduit

When backfilling bore pits, ensure that the conduit is not damaged during installation or due to settling backfill material. Compact select backfill in 3 equal lifts to the bottom of the conduit; or if using sand, place it 2 in. above the conduit. Ensure backfill density is equal to that of the existing soil. Prevent material from entering the conduit.

Construct bore pits a minimum of 5 ft. from the edge of the base or pavement. Close the bore pit holes overnight.

Unless otherwise shown on the plans, install underground conduit a minimum of 24 in. deep. Install the conduit in accordance with the latest National Electrical Code (NEC) and applicable Department standard sheets. Place conduit under driveways or roadways a minimum of 24 in. below the pavement surface.

If using casing to place bored conduit, the casing is subsidiary to the conduit.

If placing the conduit under existing pavement to reach the service poles, bore the conduit in place and extend it a minimum distance of 5 ft. beyond the edge of shoulder or the back of curb.

Where PVC, duct cable, and HDPE conduit 1 in. and larger is allowed and installed per Department standards, provide a PVC elbow in place of the galvanized rigid metal elbow required by the Electrical Details standards. Ensure the PVC elbow is of the same schedule rating as the conduit to which it is connected. Use only a flat, high tensile strength polyester fiber pull tape to pull conductors through the PVC conduit system.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Remove conductor and conduit to be abandoned to 1 ft. below the ground level. This work is subsidiary to the various bid items.

Do not use cast iron junction boxes in concrete traffic barriers and single slope traffic barriers. Use polymer concrete junction boxes in place of the cast iron junction boxes shown on standard sheets CTBI (3), CTBI (4), and SSCB (4). Mount the junction boxes flush (+ 0 in., - 1/2 in.) with the concrete surface of the concrete barrier.

Locate the underground utilities within the project limits. Provide the equipment necessary for locating these utilities, locate, and mark them before starting any excavation work in the area. This work is subsidiary to the various bid items. If the Contractor damages or cause damage to any existing underground utilities, repair such damage at no cost to the Department.

Provide Liquid-Tight Flexible Metal (LTFM) conduit if the plans refer to flexible metal conduit. Do not use flexible metal conduit.

Unless otherwise shown on the plans, place conduit runs behind curbs at locations where curbs exist.

Use schedule 80 PVC conduit to house conductor runs under paved riprap, roadway, or driveways, unless otherwise shown on the plans.

Use Rigid Metal Conduit (RMC) for exposed conduit.

Before backfilling conduit trenches, place a detectable underground metalized mylar marking tape above the conduit and concrete encasement. Imprint the marking tape with, "TxDOT CONDUIT AND FIBER OPTIC CABLE SYSTEM. CALL (713) 802-5909 BEFORE PROCEEDING" every 18 in. Supplying and installing the marking tapes is subsidiary to the various bid items.

Conduit elbows and rigid metal extensions required when installing PVC conduit systems are subsidiary to the various bid items.

Install a continuous bare or green insulated copper wire No. 8 AWG or larger in every conduit throughout the electrical system in accordance with the Electrical Detail Standard Sheets, and the latest edition of the NEC.

Provide a single 1/C #14 insulated wire in conduit runs which have been identified in the plans to carry fiber optic cable. Provide UL-listed solid copper wire with orange color low density polyethylene insulation, suitable for conduit installation, rated for a temperature range of -20 C to +60 C and a voltage rating of 600V. This wire will serve as a tracer, or locate, wire for locating underground conduit containing fiber optic cabling and will be paid for under Item 620, "Electrical Conductors."

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Item 620: Electrical Conductors

Test each wire of each cable or conductor after installation. Incomplete circuits or damage to the wire or the cable are cause for immediate rejection of the entire cable being tested. Remove and replace the entire cable at no expense to the Department. Also test the replacement cable after installation.

Split bolt connectors are allowed only for splices on the grounding conductors.

For Roadside Flashing Beacon Assemblies (Item 685) and Pedestal Pole Assemblies (Item 687) within the project, provide single-pole breakaway disconnects as shown on the Construction Division (CST) material producers list. Check the latest link on the Department's website for this list. The category is "Roadway Illumination and Electrical Supplies." The fuse holder is shown on the list under Item 685. For underground (hot) conductors, install a breakaway connector with a dummy fuse (slug). Provide dummy fuse (slug). For grounded (neutral) conductors, install a breakaway connector with a white colored marking and a permanently installed dummy fuse (slug).

For electrical licensing and electrical certification requirements for this project, see Item 7 of the Standard Specifications and any applicable special provisions to Item 7.

Item 624: Ground Boxes

The ground box locations are approximate. Alternate ground box locations may be used as directed, to avoid placing in sidewalks or driveways.

Ground metal ground box covers. Bond the ground box cover and ground conductors to a ground rod located in the ground box and to the system ground.

Ground the existing metal ground box covers as shown on the latest standard sheet ED (4)-14.

During construction and until project completion, provide personnel and equipment necessary to remove ground box lids for inspection. Provide this assistance within 24 hours of notification.

Construct concrete aprons in accordance with the latest standard sheet ED (4)-14. Make the depth of the concrete apron the same as the depth of the ground box, except for Type 1 and Type 2 ground boxes. For Type 1 or Type 2 ground boxes, construct the concrete apron in accordance with details shown on the "Ground Box Details Installations" standard.

Record Global Positioning System (GPS) location data for each ground box installed on this project and provide the data to the Engineer. Consider the work to be part of this item.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Item 628: Electrical Services

Verify and coordinate the electrical service location with the engineering section of the appropriate utility district or company.

Identify the electrical service pole with an address number assigned by the Utility Service Provider. Provide 2-in. numerals visible from the highway. Provide numbers cut out aluminum figures nailed to wood poles or painted figures on steel poles or service cabinets.

Any and all cost associated with the installation and connection of service to the electrical utility company will be considered incidental to the item, "Electrical Services". This includes conduit, conduit fittings and electrical conductors.

Furnish a UL-listed meter can for all electrical service poles. Furnish a size and style of meter can in accordance with the requirements of the local electrical service provider. Consider this work incidental to the Item, "Electrical Services".

Primary line extensions, connection charges, meter charges, and other charges by the utility company providing power to the location shown, when required, are paid for by force account work. Obtain the Engineer's approval for the costs associated with these charges before engaging the utility company to perform the work.

Provide service enclosures which are lockable and equip each enclosure with a Master # 2195 padlock. Supply each enclosure with two keys.

Equip all CTMS service pole load centers with a 100 amp (minimum) main circuit breaker and equip each service pole with a minimum of twelve single pole circuit breakers.

Provide a concrete drill shaft foundation with a minimum outside diameter of 15 inches for mounting of each service pole. Include the cost of the foundation in the cost for the service pole.

Utilize threaded hubs for all conduit entries into service enclosures.

Item 650: Overhead Sign Supports

Stencil the structure numbers on the new structures for permanent identification.

If sign panels mounted on an overhead sign support face the same direction of traffic, keep the bottoms of the sign panels in the same horizontal plane, unless otherwise shown in the plans.

There is no additional reimbursement for blocking or shims for fits of alignment.

Mill test reports are not required for the walkway, grating, miscellaneous secondary structural items, or hardware.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Use the existing panel supports if removing existing guide signs and if placing new panels of different sizes at the same location. Extend the supports, if needed. If the supports extend over the top of the panel, cut off the supports at the top of the panel or the top of the truss, whichever is higher.

Before fabricating, field check the sign structure elevations, details, and dimensions shown on the plans.

If sign lighting and walkways are not used, trim the sign support brackets flush with the bottoms of the signs.

Assume ownership of removed existing overhead sign supports and other removed materials.

Item 6007: Fiber Optic Cable

Furnish all equipment, material and labor necessary for identification and protection of the utilized fibers.

Provide the fiber optic cable system complete with incidental work, material, and services not expressly called for in the specifications, or not shown on the plans, but which may be necessary for a complete and properly functioning system. Consider this as part of this bid item.

Fully test all fiber optic cable installed on the project in accordance with the testing requirements of the specification.

Fully splice the temporary fiber optic cable at all locations.

Furnish all material and services necessary for connection of new equipment to the existing fiber optic cable.

Repair any damage to the existing fiber optic cable or patch panels during the connection of new equipment at no expense to the Department.

Document all changes in the fiber optic cable utilization and provide detailed fiber optic cable utilization diagrams to the Engineer upon completion of all changes.

Provide fiber optic splice enclosures which are designed and fully equipped to accommodate 144 strand fiber optic cables, splices and connectors unless shown otherwise on the plans.

Where fiber optic cable is to be terminated in a CCTV cabinet, traffic signal cabinet or DMS cabinet as shown on the plans, terminate the cable with the use of a fiber optic fan out kit unless shown otherwise on the plans. Consider the fan out kits to be incidental to this item.

Test all fiber optic cable on this project bi-directionally.

County: Harris**Control:** 0050-06-089, ETC.**Highway:** US 290

Supply all test equipment, cabling and connectors necessary for performing the tests by the Contractor.

Item 6010: CCTV Field Equipment

Supply CCTV equipment on this project which is fully compatible with the existing CCTV control system operated from Houston Transtar. In order to prove compatibility and operability of CCTV systems submitted for use on this project, deliver one complete set of CCTV equipment to Houston Transtar for testing by Houston TranStar Information Technology Personnel as part of the equipment submittal and approval process. Allow a minimum of 30 days for testing by Houston TranStar IT personnel. Submit the CCTV equipment for testing no later than 60 days after completion of TxDOT submittal review. The equipment submitted for testing must be fully assembled and in a fully operational condition. Configure all equipment submitted for testing as is intended for use on the project. Prototype equipment will not be allowed. The equipment will be interconnected to the existing CCTV control system and must be fully operational using that system. No modifications to the existing CCTV control system will be made to accommodate the submitted CCTV equipment. To be considered fully operational, as a minimum, the equipment must correctly respond to the following commands:

| | |
|------------|--------------------------|
| pan left | focus far |
| pan right | iris override |
| tilt up | iris open |
| tilt down | iris close |
| Zoom in | Camera power (latching) |
| Zoom out | pan tilt position preset |
| Focus near | |

The equipment must be fully operational using the existing control system from Transtar. Equipment which in any manner is not fully operational with the control system will be considered as not passing the test. Equipment which does not pass the test will be allowed one chance to be retested. The retest must occur within 30 days after the initial test. All issues of non-compliance and all discrepancies must be resolved for the second test. Equipment which is not able to be retested within 30 days or which does not pass the second test will be rejected and cannot be used on the project. No additional time or compensation will be granted for the testing of the CCTV equipment. Successful testing of the CCTV equipment must be completed prior to any construction activities at the CCTV locations. No camera poles, cabinets or any other CCTV related equipment shall be installed until successful CCTV equipment testing has occurred.

Upon completion of installation, test the communications link installed between the communications hub and the CCTV field equipment locations. Perform the test at all CCTV locations on the project.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Use a test signal generator and a video monitor to demonstrate the ability of the video signal link to transmit a NTSC compliant video signal from the CCTV cabinet to the communications hub. After completion of testing with the signal generator, connect the CCTV camera to the link and use a video monitor at the communications hub to verify the presence of an NTSC compliant video signal. Degradation of the video signal must not be discernible using the video monitor.

Connect a laptop computer containing TxDOT-supplied CCTV control software on the link and use it to control the CCTV movement and control functions from the communications hub utilizing the data link. Demonstrate the ability to control all CCTV functions outlined in the specifications.

Supply all test equipment, cabling and connectors necessary for performing the tests.

Record Global Positioning System (GPS) location data for each CCTV installed on this project and provide the data to the Engineer. Consider the work to be part of this item.

Item 6017: Communication Hub Building

Provide surge protection devices (SPDs) to protect electronics from lightning, transient voltage surges, and induced current. Install SPDs on all power, data, video, and any other conductive circuit.

Install an SPD at the closet termination or disconnection point where the supply circuit enters the building. Location the SPD on the load side of the power distribution panel breakers and ahead of any and all electronic devices. Connect the SPD ground lead directly to the ground bus. Use of wire nuts is prohibited. Install in accordance with manufacturers recommendations.

Provide UL Listed Type 1 or Type 2 SPD and labeled to UL1449 Third Edition, posted at UL.com, under Certifications UL Category Code VZCA, and have a 20kA I-nominal rating. Provide SPD rated as NEMA 4. SPD with integral EMI/RFI line filtering may be required if shown on the plans.

Do not exceed 700 V on the Voltage Protection Rating (VPR) on any mode (L-N, L-G, and N-G).

Do not exceed 150 V on the Maximum Continuous Operating Voltage (MCOV). Equal or exceed 40kA the SPD surge current rating per mode (L-N), (L-G), (N-G).

Equal or exceed 50 kA or the available short circuit current, whichever is higher for the SPD Short Circuit Current Rating (SCCR).

Provide SPD with directly connected Metal Oxide Varistors (MOV) exceeding 32 mm in diameter with thermal safety disconnectors. Gas tube and spark gap SPD are not permitted. Ensure each MOV's operational status can be monitored via visual indicator, including N-G mode.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Provide SPD with one set of Normally Open (NO), Normally Closed (NC) Form C contacts for remote monitoring.

Ensure the SPD utilized for AC power does not dissipate any energy and does not provide any series impedance during standby operation. Return the unit to its non-shunting mode after the passage of any surge and do not allow the shunting of AC power.

Install an SPD inside of the building on the power distribution to the equipment. Keep leads as short as possible with all conductor bends formed to the maximum possible radius. Connect the SPD ground lead directly to the ground bus. Use of wire nuts is prohibited. Install in accordance with manufacturers recommendations.

Provide UL Listed Type 1 or Type 2 SPD labeled to UL1449 Third Edition, posted at UL.com, under Certifications UL Category Code VZCA, and have a 20kA I-nominal rating. Provide SPD rated as NEMA 4.

Do not exceed 700 V on the Voltage Protection Rating (VPR) on any mode (L-N and N-G).

Do not exceed 150 V on the Maximum Continuous Operating Voltage (MCOV).

Equal or exceed 40 kA the SPD surge current rating per mode (L-N) and (N-G).

Equal or exceed 50 kA or the available short circuit current, whichever is higher for the SPD Short Circuit Current Rating (SCCR).

Provide SPD with directly connected Metal Oxide Varistors (MOV) exceeding 32 mm in diameter with thermal safety disconnectors. Gas tube and spark gap SPD are not be permitted. Ensure each MOV's operational status can be monitored via visual indicator, including N-G mode.

Provide SPD with one set of Normally Open (NO), Normally Closed (NC) Form C contacts for remote monitoring.

Install a specialized SPD on all conductive circuits including, but not limited to, data communication cables, coaxial video cables, and low-voltage power cables. Ensure that these devices comply with the functional requirements shown in Table 2 for all available modes (i.e., power L-N, N-G; data and signal center pin-to-shield, L-L, L-G, and shield-G where appropriate).

These specialized SPD must have an operating voltage matching the characteristics of the circuit. Ensure that these specialized SPD are UL 497B or UL 497C Listed, as applicable.

Provide the SPD with 3 stages of surge suppression in a Pi (π) configuration. The first stage (primary side) consists of parallel-connected Gas Discharge Tubes (GDTs). The

County: Harris**Control:** 0050-06-089, ETC.**Highway:** US 290

second stage consists of a series connected resistor or inductor. The third stage (secondary side) consists of parallel-connected transorbs or silicone avalanche diodes (SADs).

Ground the SPD to the DIN rail and a wire terminal connection point. (Grounding solely through the DIN rail connection is not adequate and does not meet the performance or intent of this specification.)

Install coaxial SPDs in a manner that prevents ground loops and resulting signal deterioration. This is usually caused where the cable has different references to ground at either end and connecting SPDs at both ends that have only Pin to Shield protection completes a ground loop circuit through the Shield. SPDs having Pin to Shield protection, and separate Shield to Ground protection are acceptable to eliminate ground loops.

| Circuit Description | Maximum Continuous Operating Voltage (MCOV) | Frequency/Bandwidth/Data Rate | Surge Capacity | Maximum Let Through Voltage |
|----------------------------|--|--------------------------------------|------------------------------------|------------------------------------|
| 12 VDC | 15-20 V | N/A | 5k A per mode (8x20 μ s) | <150 Vpk |
| 24 VAC | 30-55 V | N/A | 5k A per mode (8x20 μ s) | <175 Vpk |
| 48 VDC | 60-85 V | N/A | 5k A per mode (8x20 μ s) | <200 Vpk |
| Coaxial Composite Video | 4-8 V | Up to 1.5 GHz | 10k A per mode (8x20 μ s) | <100 Vpk |
| RS422/RS485 | 8-15 V | Up to 10 Mbps | 10k A per mode (8x20 μ s) | <30 Vpk |
| T1 | 13-30 V | Up to 10 Mbps | 10k A per mode (8x20 μ s) | <30 Vpk |
| Ethernet Data | 7-12 V | Up to 100 Mbps | 3k A per mode (10x1000 μ s) | <30 Vpk |

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Provide Square D QO series, GE THQ series, or equivalent distribution panel.

Equip all communication hub buildings supplied on this project with #2 Corbin locks.

Record Global Positioning System (GPS) location data for each hub building installed on this project and provide the data to the Engineer. Consider the work to be part of this item.

Item 6028: Installation of Dynamic Message System

Record Global Positioning System (GPS) location data for each Dynamic Message Sign (DMS) installed on this project and provide the data to the Engineer. Consider the work to be part of this item.

Item 6029: Radar Vehicle Sensing Device

Record Global Positioning System (GPS) location data for each sensing device installed on this project and provide the data to the Engineer. Consider the work to be part of this item.

Item 6185: Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)

A shadow vehicle with Truck Mounted Attenuators (TMAs) or Trailer Attenuators (TAs) is required as shown on the appropriate Traffic Control Plan (TCP) sheets. TMAs/TAs must meet the requirements of the Compliant Work Zone Traffic Control Device List.

Level 3 Compliant TMAs/TAs are required for this project.

A total of one (1) shadow vehicle with a TMA/TA is required for the work with the exception of Pavement Marking Operations. The Contractor is responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMAs/TAs needed on the project.

A total of three (3) shadow vehicles with a TMA/TA are required for Pavement Marking Operations. The Contractor is responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMAs/TAs needed on the project.

Item 6186: Intelligent Transportation System (ITS) Ground Box

The ground box locations are approximate. Alternate ground box locations may be used as directed. Avoid placing in sidewalks or driveways.

Ground metal ground box covers. Bond the ground box cover and ground conductors to a ground rod located in the ground box and to the system ground.

County: Harris

Control: 0050-06-089, ETC.

Highway: US 290

Ground existing metal ground box covers as shown on the latest standard sheet ED (4)-14. During construction and until project completion, provide personnel and equipment necessary to remove ground box lids for inspection. Provide this assistance within 24 hours of notification.

Record Global Positioning System (GPS) location data for each ground box installed on this project and provide the data to the Engineer. Consider the work to be a part of this item.

CONTROL : 0050-06-089, ETC
PROJECT : C 50-6-89, ETC
HIGHWAY : US 290
COUNTY : HARRIS

TEXAS DEPARTMENT OF TRANSPORTATION

GOVERNING SPECIFICATIONS AND SPECIAL PROVISIONS

ALL SPECIFICATIONS AND SPECIAL PROVISIONS APPLICABLE TO THIS PROJECT ARE IDENTIFIED AS FOLLOWS:

STANDARD SPECIFICATIONS: ADOPTED BY THE TEXAS DEPARTMENT OF
----- TRANSPORTATION NOVEMBER 1, 2014.
STANDARD SPECIFICATIONS ARE INCORPORATED
INTO THE CONTRACT BY REFERENCE.

ITEMS 1 TO 9 INCL., GENERAL REQUIREMENTS AND COVENANTS
ITEM 416 DRILLED SHAFT FOUNDATIONS (405) (420) (421) (423) (440) (448)
ITEM 432 RIPRAP (247) (420) (421) (431) (440)
ITEM 500 MOBILIZATION
ITEM 502 BARRICADES, SIGNS, AND TRAFFIC HANDLING
ITEM 506 TEMPORARY EROSION, SEDIMENTATION, AND ENVIRONMENTAL
CONTROLS
ITEM 540 METAL BEAM GUARD FENCE (421) (441) (445) (529)
ITEM 544 GUARDRAIL END TREATMENTS
ITEM 618 CONDUIT (400) (476)
ITEM 620 ELECTRICAL CONDUCTORS (610) (628)
ITEM 624 GROUND BOXES (420) (421) (432) (440) (618) (620)
ITEM 628 ELECTRICAL SERVICES (441) (445) (449) (618) (620) (627) (656)
ITEM 650 OVERHEAD SIGN SUPPORTS (416) (420) (421) (441) (442) (445)
(449) (618) (636) (654)
ITEM 654 SIGN WALKWAYS (441) (445)

SPECIAL PROVISIONS: SPECIAL PROVISIONS WILL GOVERN AND TAKE
----- PRECEDENCE OVER THE SPECIFICATIONS ENUMERATED
HEREON WHEREVER IN CONFLICT THEREWITH.

SPECIAL LABOR PROVISIONS FOR STATE PROJECTS (000---008)
WAGE RATES
SPECIAL PROVISION "NONDISCRIMINATION" (000---002)
SPECIAL PROVISION "SMALL BUSINESS ENTERPRISE IN STATE FUNDED PROJECTS
" (000---009)
SPECIAL PROVISION "CERTIFICATE OF INTERESTED PARTIES (FORM 1295)"
(000--1019)

SPECIAL PROVISION "DESCRIPTION OF PROJECT SCOPE OF CONTRACT AND SEQUENCE OF WORK" (000--1234)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---385)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---386)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---387)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---389)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---390)

SPECIAL PROVISION "IMPORTANT NOTICE TO CONTRACTORS" (000---392)

SPECIAL PROVISION "SCHEDULE OF LIQUIDATED DAMAGES" (000---658)

SPECIAL PROVISION "NOTICE OF CONTRACTOR PERFORMANCE EVALUATIONS" (000---659)

SPECIAL PROVISIONS TO ITEM 2 (002---007) (002---011) (002---013)

SPECIAL PROVISIONS TO ITEM 3 (003---011) (003---013)

SPECIAL PROVISIONS TO ITEM 5 (005---002) (005---003)

SPECIAL PROVISIONS TO ITEM 6 (006---001) (006---012)

SPECIAL PROVISIONS TO ITEM 7 (007---004) (007---008) (007---010) (007---011)

SPECIAL PROVISIONS TO ITEM 8 (008---030) (008---033) (008---045)

SPECIAL PROVISIONS TO ITEM 9 (009---010) (009---011)

SPECIAL PROVISION TO ITEM 247 (247---003)

SPECIAL PROVISION TO ITEM 420 (420---001)

SPECIAL PROVISION TO ITEM 421 (421---010)

SPECIAL PROVISION TO ITEM 440 (440---004)

SPECIAL PROVISION TO ITEM 441 (441---004)

SPECIAL PROVISION TO ITEM 442 (442---001)

SPECIAL PROVISION TO ITEM 448 (448---001)

SPECIAL PROVISION TO ITEM 449 (449---002)

SPECIAL PROVISION TO ITEM 465 (465---001)

SPECIAL PROVISION TO ITEM 502 (502---008)

SPECIAL PROVISION TO ITEM 506 (506---002)

SPECIAL PROVISION TO ITEM 540 (540---001)

SPECIAL PROVISION TO ITEM 636 (636---001)

SPECIAL PROVISION TO ITEM 650 (650---001)

SPECIAL PROVISION TO ITEM 654 (654---001)

SPECIAL PROVISION TO ITEM 656 (656---001)

SPECIAL PROVISION TO SPECIAL SPECIFICATION ITEM 6064 (6064--001)

SPECIAL PROVISION TO SPECIAL SPECIFICATION ITEM 6185 (6185--002)

SPECIAL SPECIFICATIONS:

ITEM 6005 TESTING, TRAINING, DOCUMENTATION, FINAL ACCEPTANCE, AND WARRANTY

ITEM 6006 ELECTRONIC COMPONENTS

ITEM 6007 FIBER OPTIC CABLE (618) (620) (625) (6016)

ITEM 6010 CCTV FIELD EQUIPMENT (6005) (6006)

ITEM 6016 MULTI-DUCT CONDUIT SYSTEM (400) (401) (402) (421) (445) (476) (618) (620)

ITEM 6017 COMMUNICATIONS HUB BUILDING (6005) (6006)

ITEM 6027 PREPARATION OF EXISTING CONDUITS, GROUND BOXES, OR MANHOLES (465) (618) (624)

ITEM 6028 INSTALLATION OF DYNAMIC MESSAGE SIGN SYSTEM (432) (441) (445) (449) (618) (620) <656>

ITEM 6035 FIBER OPTIC VIDEO DATA TRANSMISSION EQUIPMENT (6005)
(6006)
ITEM 6064 INTELLIGENT TRANSPORTATION SY STEM (ITS) POLE WITH CABINET
(416) (421) (440) (441) (442) (445) (449) (496) (618) (620) (740)
ITEM 6185 TRUCK MOUNTED ATTENUATOR (TMA) AND TRAILER ATTENUATOR (TA)
ITEM 6186 INTELLIGENT TRANSPORTATION SYSTEM(ITS) GROUND BOX <400>
(420) (421) (432) (440) (471) (618) (620) <6016>
ITEM 6304 INTELLIGENT TRANSPORTATION SYSTEM (ITS) RADAR VEHICLE
SENSING DEVICE

GENERAL: THE ABOVE-LISTED SPECIFICATION ITEMS ARE THOSE UNDER WHICH
----- PAYMENT IS TO BE MADE. THESE, TOGETHER WITH SUCH OTHER
PERTINENT ITEMS, IF ANY, AS MAY BE REFERRED TO IN THE ABOVE-
LISTED SPECIFICATION ITEMS, AND INCLUDING THE SPECIAL
PROVISIONS LISTED ABOVE, CONSTITUTE THE COMPLETE SPECIFI-
CATIONS FOR THIS PROJECT.

Control 0050-06-089, ETC.

Project C 50-6-89, ETC.

Highway US 290

County HARRIS

SMALL BUSINESS ENTERPRISE REQUIREMENTS

The following goal for small business enterprises is established:

SBE
0.0%

CHILD SUPPORT STATEMENT

Under Section 231.006, Family Code, the vendor or applicant certifies that the individual or business entity named in this contract, bid, or application is not ineligible to receive the specified grant, loan, or payment and acknowledges that this contract may be terminated and payment may be withheld if this certification is inaccurate.

CONFLICT OF INTEREST CERTIFICATION

Pursuant to Texas Government Code Section 2261.252(b), the Department is prohibited from entering into contracts in which Department officers and employees have a financial interest.

By signing the Contract, the Contractor certifies that it is not prohibited from entering into a Contract with the Department as a result of a financial interest as defined under Texas Government Code Section 2261.252(b), and that it will exercise reasonable care and diligence to prevent any actions or conditions that could result in a conflict of interest with the Department.

The Contractor also certifies that none of the following individuals, nor any of their family members within the second degree of affinity or consanguinity, owns 1% or more interest or has a financial interest as defined under Texas Government Code Section 2261.252(b) in the Contractor:

- Any member of the Texas Transportation Commission; and
- The Department's Executive Director, General Counsel, Chief of Procurement and Field Support Operations, Director of Procurement, and Director of Contract Services.

Violation of this certification may result in action by the Department.

E-VERIFY CERTIFICATION

Pursuant to Texas Transportation Code §223.051, all TxDOT contracts for construction, maintenance, or improvement of a highway must include a provision requiring Contractors and subcontractors to use the U.S. Department of Homeland Security's E-Verify system to determine employment eligibility. By signing the contract, the Contractor certifies that prior to the award of the Contract:

- the Contractor has registered with and will, to the extent permitted by law, utilize the United States Department of Homeland Security's E-Verify system during the term of the Contract to determine the eligibility of all persons hired to perform duties within Texas during the term of the agreement; and
- the Contractor will require that all subcontractors also register with and, to the extent permitted by law, utilize the United States Department of Homeland Security's E-Verify system during the term of the subcontract to determine the eligibility of all persons hired to perform duties within Texas during the term of the agreement.

Violation of this requirement constitutes a material breach of the Contract, subjects a subcontractor to removal from the Contract, and subjects the Contractor or subcontractors to possible sanctions in accordance with Title 43, Texas Administrative Code, Chapter 10, Subchapter F, "Sanctions and Suspension for Ethical Violations by Entities Doing Business with the Department."

Certification Regarding Disclosure of Public Information

Pursuant to Subchapter J, Chapter 552, Texas Government Code, contractors executing a contract with a governmental body that results in the expenditure of at least \$1 million in public funds must:

- 1) preserve all contracting information* as provided by the records retention requirements applicable to Texas Department of Transportation (TxDOT) for the duration of the contract,
- 2) on request of TxDOT, promptly provide any contracting information related to the contract that is in the custody or possession of the entity, and
- 3) on completion of the contract, either:
 - A. provide, at no cost to TxDOT, all contracting information related to the contract that is in the custody or possession of the entity, or
 - B. preserve the contracting information related to the contract as provided by the records retention requirements applicable to TxDOT

The requirements of Subchapter J, Chapter 552, Government Code, may apply to this contract, and the contractor or vendor agrees that the contract can be terminated if the contractor or vendor knowingly or intentionally fails to comply with a requirement of that subchapter.

By entering into Contract, the Contractor agrees to:

- provide, or make available, to TxDOT and any authorized governmental investigating or auditing agency all records, including electronic and payment records related to the contract, for the same period provided by the records retention schedule applicable to TxDOT, and
- ensure that all subcontracts include a clause requiring the same.

* As defined in Government Code §552.003, “Contracting information” means the following information maintained by a governmental body or sent between a governmental body and a vendor, contractor, potential vendor, or potential contractor:

- 1) information in a voucher or contract relating to the receipt or expenditure of public funds by a governmental body;
- 2) solicitation or bid documents relating to a contract with a governmental body;
- 3) communications sent between a governmental body and a vendor, contractor, potential vendor, or potential contractor during the solicitation, evaluation, or negotiation of a contract;
- 4) documents, including bid tabulations, showing the criteria by which a governmental body evaluates each vendor, contractor, potential vendor, or potential contractor responding to a solicitation and, if applicable, an explanation of why the vendor or contractor was selected; and
- 5) communications and other information sent between a governmental body and a vendor or contractor related to the performance of a final contract with the governmental body or work performed on behalf of the governmental body.

CERTIFICATION TO NOT BOYCOTT ISRAEL

Pursuant to Texas Government Code §2271.002, the Department must include a provision requiring a written verification affirming that the Contractor does not boycott Israel, as defined in Government Code §808.001, and will not boycott Israel during the term of the contract. This provision applies to a contract that:

- 1) is with a Contractor that is not a sole proprietorship,
- 2) is with a Contractor with 10 or more full-time employees, and
- 3) has a value of \$100,000 or more.

By signing the contract, the Contractor certifies that it does not boycott Israel and will not boycott Israel during the term of this contract. "Boycott" means refusing to deal with, terminating business activities with, or otherwise taking any action that is intended to penalize, inflict economic harm on, or limit commercial relations specifically with Israel, or with a person or entity doing business in Israel or in an Israeli-controlled territory, but does not include an action made for ordinary business purposes.

Violation of this certification may result in action by the Department.

CERTIFICATION TO NOT BOYCOTT ENERGY COMPANIES

Pursuant to Texas Government Code §2274.002, the Department must include a provision requiring a written verification affirming that the Contractor does not boycott energy companies, as defined in Government Code §809.001, and will not boycott energy companies during the term of the contract. This provision applies to a contract that:

- 1) is with a Contractor that is not a sole proprietorship,
- 2) is with a Contractor with 10 or more full-time employees, and
- 3) has a value of \$100,000 or more.

By signing the contract, the Contractor certifies that it does not boycott energy companies and will not boycott energy companies during the term of this contract. "Boycott" means taking any action that is intended to penalize, inflict economic harm on, or limit commercial relations with a company because the company: (1) engages in the exploration, production, utilization, transportation, sale, or manufacturing of fossil fuel-based energy and does not commit or pledge to meet environmental standards beyond applicable federal and state law; or (2) does business with a company described by (1).

Violation of this certification may result in action by the Department.

CERTIFICATION TO NOT DISCRIMINATE AGAINST FIREARM ENTITIES OR FIREARM TRADE ASSOCIATIONS

Pursuant to Texas Government Code §2274.002, the Department must include a provision requiring a written verification affirming that the Contractor:

- 1) does not have a practice, policy, guidance, or directive that discriminates against a firearm entity or firearm trade association, as defined in Government Code §2274.001, and
- 2) will not discriminate against a firearm entity or firearm trade association during the term of the contract.

This provision applies to a contract that:

- 1) is with a Contractor that is not a sole proprietorship,
- 2) is with a Contractor with 10 or more full-time employees, and
- 3) has a value of \$100,000 or more.

By signing the contract, the Contractor certifies that it does not discriminate against a firearm entity or firearm trade association as described and will not do so during the term of this contract. "Discriminate against a firearm entity or firearm trade association" means, with respect to the entity or association, to: (1) refuse to engage in the trade of any goods or services with the entity or association based solely on its status as a firearm entity or firearm trade association; (2) refrain from continuing an existing business relationship with the entity or association based solely on its status as a firearm entity or firearm trade association; or (3) terminate an existing business relationship with the entity or association based solely on its status as a firearm entity or firearm trade association. "Discriminate against a firearm entity or firearm trade association" does not include: (1) the established policies of a merchant, retail seller, or platform that restrict or prohibit the listing or selling of ammunition, firearms, or firearm accessories; (2) a company's refusal to engage in the trade of any goods or services, decision to refrain from continuing an existing business relationship, or decision to terminate an existing business relationship to comply with federal, state, or local law, policy, or regulations or a directive by a regulatory agency, or for any traditional business reason that is specific to the customer or potential customer and not based solely on an entity's or association's status as a firearm entity or firearm trade association.

Violation of this certification may result in action by the Department.

PROHIBITION ON CERTAIN TELECOMMUNICATIONS EQUIPMENT OR SERVICES

The Federal Register Notice issued the Final Rule and states that the amendment to 2 CFR 200.216 is effective on August 13, 2020. The new 2 CFR 200.471 regulation provides clarity that the telecommunications and video surveillance costs associated with 2 CFR 200.216 are unallowable for services and equipment from these specific providers. OMB's Federal Register Notice includes the new 2 CFR 200.216 and 2 CFR 200.471 regulations.

<https://www.federalregister.gov/documents/2020/08/13/2020-17468/guidance-for-grants-and-agreements>

Per the Federal Law referenced above, use of services, systems, or services or systems that contain components produced by any of the following manufacturers is strictly prohibited for use on this project. Therefore, for any telecommunications, CCTV, or video surveillance equipment, services or systems cannot be manufactured by, or have components manufactured by:

- Huawei Technologies Company,
- ZTE Corporation (any subsidiary and affiliate of such entities),
- Hytera Communications Corporation,
- Hangzhou Hikvision Digital Technology Company,
- Dahua Technology Company (any subsidiary and affiliate of such entities).

Violation of this prohibition will require replacement of the equipment at the contractor's expense.

Special Provision to Item 000

Special Labor Provisions for State Projects



1. GENERAL

This is a "Public Works" Project, as provided under Government Code Title 10, Chapter 2258, "Prevailing Wage Rates," and is subject to the provisions of the Statute. No provisions in the Contract are intended to be in conflict with the provisions of the Statute.

The Texas Transportation Commission has ascertained and indicated in the special provisions the regular rate of per diem wages prevailing in each locality for each craft or type of worker. Apply the wage rates contained in the specifications as minimum wage rates for the Contract.

2. MINIMUM WAGES, HOURS AND CONDITIONS OF EMPLOYMENT

All workers necessary for the satisfactory completion of the work are within the purview of the Contract.

Whenever and wherever practical, give local citizens preference in the selection of labor.

Do not require any worker to lodge, board or trade at a particular place, or with a particular person as a condition of employment.

Do not charge or accept a fee of any from any person who obtains work on the project. Do not require any person who obtains work on the project to pay any fee to any other person or agency obtaining employment for the person on the project.

Do not charge for tools or equipment used in connection with the duties performed, except for loss or damage of property. Do not charge for necessary camp water.

Do not charge for any transportation furnished to any person employed on the project.

The provisions apply where work is performed by piece work, station work, etc. The minimum wage paid will be exclusive of equipment rental on any shipment which the worker or subcontractor may furnish in connection with his work.

Take responsibility for carrying out the requirements of this specification and ensure that each subcontractor working on the project complies with its provisions.

Any form of subterfuge, coercion or deduction designed to evade, reduce or discount the established minimum wage scales will be considered a violation of the Contract.

The Fair Labor Standards Acts (FLSA) established one and one-half (1-1/2) pay for overtime in excess of 40 hours worked in 1 week. Do not consider time consumed by the worker in going to and returning from the place of work as part of the hours of work. Do not require or permit any worker to work in excess of 40 hours in 1 week, unless the worker receives compensation at a rate not less than 1-1/2 times the basic rate of pay for all hours worked in excess of 40 hours in the workweek.

The general rates of per diem wages prevailing in this locality for each class and type of workers whose services are considered necessary to fulfill the Contract are indicated in the special provisions, and these rates govern as minimum wage rates on this Contract. A penalty of \$60.00 per calendar day or portion of a calendar day for each worker that is paid less than the stipulated general rates of per diem wages for any work done under the Contract will be deducted. The Department, upon receipt of a complaint by a worker,

will determine within 30 days whether good cause exists to believe that the Contractor or a subcontractor has violated wage rate requirements and notify the parties involved of the findings. Make every effort to resolve the alleged violation within 14 days after notification. The next alternative is submittal to binding arbitration in accordance with the provisions of the Texas General Arbitration Act (Art. 224 et seq., Revised Statutes).

Notwithstanding any other provision of the Contract, covenant and agree that the Contractor and its subcontractors will pay each of their employees and contract labor engaged in any way in work under the Contract, a wage not less than what is generally known as the "federal minimum wage" as set out in 29 U.S.C. 206 as that Statute may be amended from time to time.

Pay any worker employed whose position is not listed in the Contract, a wage not less than the per diem wage rate established in the Contract for a worker whose duties are most nearly comparable.

3. RECORD AND INSPECTIONS

Keep copies of weekly payrolls for review. Require subcontractors to keep copies of weekly payrolls for review. Show the name, occupation, number of hours worked each day and per diem wage paid each worker together with a complete record of all deductions made from such wages. Keep records for a period of 3 years from the date of completion of the Contract.

Where the piece-work method is used, indicate on the payroll for each person involved:

- Quantity of piece work performed.
- Price paid per piece-work unit.
- Total hours employed.

The Engineer may require the Contractor to file an affidavit for each payroll certifying that payroll is a true and accurate report of the full wages due and paid to each person employed.

Post or make available to employees the prevailing wage rates from the Contract. Require subcontractors to post or make available to employees the prevailing wage rates from the Contract.

The wage rates listed herein are those predetermined by the Secretary of Labor and State Statute and listed in the United States Department of Labor's (USDOL) General Decisions dated **02-24-2022** and are the minimum wages to be paid accordingly for each specified classification. To determine the applicable wage rate zone, a list entitled "TEXAS COUNTIES IDENTIFIED BY WAGE RATE ZONES" is provided in the contract. Any wage rate that is not listed herein and not in the USDOL's general decision, must be submitted to the Engineer for approval. **IMPORTANT NOTICE FOR STATE PROJECTS:** only the controlling wage rate zone applies to the contract. Effective 02-24-2022.

| CLASS. # | CLASSIFICATION DESCRIPTION | ZONE TX02 *(TX20220002) | ZONE TX03 *(TX20220003) | ZONE TX04 *(TX20220004) | ZONE TX05 *(TX20220005) | ZONE TX06 *(TX20220006) | ZONE TX07 *(TX20220007) | ZONE TX08 *(TX20220008) | ZONE TX24 *(TX20220024) | ZONE TX25 *(TX20220025) | ZONE TX27 *(TX20220027) | ZONE TX28 *(TX20220028) | ZONE TX29 *(TX20220029) | ZONE TX30 *(TX20220030) | ZONE TX37 *(TX20220037) | ZONE TX38 *(TX20220038) | ZONE TX42 *(TX20220042) |
|----------|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 1428 | Agricultural Tractor Operator | | | | | | \$12.69 | | | | | \$12.35 | | | \$11.75 | | |
| 1300 | Asphalt Distributor Operator | \$14.87 | \$13.48 | \$13.88 | \$15.72 | \$15.58 | \$15.55 | \$15.72 | \$13.28 | \$15.32 | \$15.62 | \$14.36 | \$14.25 | \$14.03 | \$13.75 | \$14.06 | \$14.40 |
| 1303 | Asphalt Paving Machine Operator | \$13.40 | \$12.25 | \$12.35 | \$13.87 | \$14.05 | \$14.36 | \$14.20 | \$13.26 | \$13.99 | \$14.68 | \$12.92 | \$13.44 | \$12.53 | \$14.00 | \$14.32 | \$12.99 |
| 1106 | Asphalt Raker | \$12.28 | \$10.61 | \$12.02 | \$14.21 | \$11.65 | \$12.12 | \$11.64 | \$11.44 | \$12.69 | \$12.05 | \$11.34 | \$11.67 | \$11.40 | \$12.59 | \$12.36 | \$11.78 |
| 1112 | Batching Plant Operator, Asphalt | | | | | | | | | | | | | | | | |
| 1115 | Batching Plant Operator, Concrete | | | | | | | | | | | | | | | | |
| 1214 | Blaster | | | | | | | | | | | | | | | | |
| 1615 | Boom Truck Operator | | | | | | \$18.36 | | | | | | | | | | |
| 1444 | Boring Machine Operator | | | | | | | | | | | | | | | | |
| 1305 | Broom or Sweeper Operator | \$11.21 | \$10.33 | \$10.08 | \$11.99 | | \$11.04 | \$11.62 | | \$11.74 | \$11.41 | \$10.30 | | \$10.23 | \$10.60 | \$12.68 | \$11.05 |
| 1144 | Communications Cable Installer | | | | | | | | | | | | | | | | |
| 1124 | Concrete Finisher, Paving and Structures | \$13.55 | \$12.46 | \$13.16 | \$12.85 | \$12.64 | \$12.56 | \$12.77 | \$12.44 | \$14.12 | \$13.04 | \$13.38 | \$12.64 | \$12.80 | \$12.79 | \$12.98 | \$13.32 |
| 1318 | Concrete Pavement Finishing Machine Operator | | | | \$16.05 | | \$15.48 | | | \$16.05 | | \$19.31 | | | | \$13.07 | |
| 1315 | Concrete Paving, Curing, Float, Texturing Machine Operator | | | | | | | | | | | \$16.34 | | | | | \$11.71 |
| 1333 | Concrete Saw Operator | | | | \$14.67 | | | | | \$14.48 | \$17.33 | | | | | | \$13.99 |
| 1399 | Concrete/Gunite Pump Operator | | | | | | | | | | | | | | | | |
| 1344 | Crane Operator, Hydraulic 80 tons or less | | | | \$18.22 | | \$18.36 | | | \$18.12 | \$18.04 | \$20.21 | | | \$18.63 | \$13.86 | |
| 1345 | Crane Operator, Hydraulic Over 80 Tons | | | | | | | | | | | | | | | | |
| 1342 | Crane Operator, Lattice Boom 80 Tons or Less | \$16.82 | \$14.39 | \$13.85 | \$17.27 | | \$15.87 | | | \$17.27 | | \$14.67 | | | \$16.42 | \$14.97 | \$13.87 |
| 1343 | Crane Operator, Lattice Boom Over 80 Tons | | | | \$20.52 | | \$19.38 | | | \$20.52 | | \$17.49 | | | \$25.13 | \$15.80 | |
| 1306 | Crawler Tractor Operator | \$13.96 | \$16.63 | \$13.62 | \$14.26 | | \$15.67 | | | \$14.07 | \$13.15 | \$13.38 | | | \$14.60 | \$13.68 | \$13.50 |
| 1351 | Crusher or Screen Plant Operator | | | | | | | | | | | | | | | | |
| 1446 | Directional Drilling Locator | | | | | | \$11.67 | | | | | | | | | | |
| 1445 | Directional Drilling Operator | | | | \$20.32 | | \$17.24 | | | | | | | | | | |
| 1139 | Electrician | \$20.96 | | \$19.87 | \$19.80 | | \$26.35 | | \$20.27 | \$19.80 | | \$20.92 | | | | \$27.11 | \$19.87 |
| 1347 | Excavator Operator, 50,000 pounds or less | \$13.46 | \$12.56 | \$13.67 | \$17.19 | | \$12.88 | \$14.38 | \$13.49 | \$17.19 | | \$13.88 | | | \$14.09 | \$12.71 | \$14.42 |
| 1348 | Excavator Operator, Over 50,000 pounds | | \$15.23 | \$13.52 | \$17.04 | | \$17.71 | | | \$16.99 | \$18.80 | \$16.22 | | | | \$14.53 | \$13.52 |
| 1150 | Flagger | \$9.30 | \$9.10 | \$8.50 | \$10.28 | \$8.81 | \$9.45 | \$8.70 | | \$10.06 | \$9.71 | \$9.03 | \$8.81 | \$9.08 | \$9.90 | \$10.33 | \$8.10 |
| 1151 | Form Builder/Setter, Structures | \$13.52 | \$12.30 | \$13.38 | \$12.91 | \$12.71 | \$12.87 | \$12.38 | \$12.26 | \$13.84 | \$12.98 | \$13.07 | \$13.61 | \$12.82 | \$14.73 | \$12.23 | \$12.25 |
| 1160 | Form Setter, Paving & Curb | \$12.36 | \$12.16 | \$13.93 | \$11.83 | \$10.71 | \$12.94 | | | \$13.16 | \$12.54 | \$11.33 | \$10.69 | | \$13.33 | \$12.34 | \$13.93 |
| 1360 | Foundation Drill Operator, Crawler Mounted | | | | \$17.99 | | | | | \$17.99 | | | | | | \$17.43 | |
| 1363 | Foundation Drill Operator, Truck Mounted | | \$16.86 | \$22.05 | \$21.51 | | \$16.93 | | | \$21.07 | \$20.20 | \$20.76 | | \$17.54 | \$21.39 | \$15.89 | \$22.05 |
| 1369 | Front End Loader Operator, 3 CY or Less | \$12.28 | \$13.49 | \$13.40 | \$13.85 | | \$13.04 | \$13.15 | \$13.29 | \$13.69 | \$12.64 | \$12.89 | | | \$13.51 | \$13.32 | \$12.17 |
| 1372 | Front End Loader Operator, Over 3 CY | \$12.77 | \$13.69 | \$12.33 | \$14.96 | | \$13.21 | \$12.86 | \$13.57 | \$14.72 | \$13.75 | \$12.32 | | | \$13.19 | \$13.17 | \$13.02 |
| 1329 | Joint Sealer | | | | | | | | | | | | | | | | |
| 1172 | Laborer, Common | \$10.30 | \$9.86 | \$10.08 | \$10.51 | \$10.71 | \$10.50 | \$10.24 | \$10.58 | \$10.72 | \$10.45 | \$10.30 | \$10.25 | \$10.03 | \$10.54 | \$11.02 | \$10.15 |
| 1175 | Laborer, Utility | \$11.80 | \$11.53 | \$12.70 | \$12.17 | \$11.81 | \$12.27 | \$12.11 | \$11.33 | \$12.32 | \$11.80 | \$11.53 | \$11.23 | \$11.50 | \$11.95 | \$11.73 | \$12.37 |

| CLASS. # | CLASSIFICATION DESCRIPTION | ZONE TX02 *(TX20220002) | ZONE TX03 *(TX20220003) | ZONE TX04 *(TX20220004) | ZONE TX05 *(TX20220005) | ZONE TX06 *(TX20220006) | ZONE TX07 *(TX20220007) | ZONE TX08 *(TX20220008) | ZONE TX24 *(TX20220024) | ZONE TX25 *(TX20220025) | ZONE TX27 *(TX20220027) | ZONE TX28 *(TX20220028) | ZONE TX29 *(TX20220029) | ZONE TX30 *(TX20220030) | ZONE TX37 *(TX20220037) | ZONE TX38 *(TX20220038) | ZONE TX42 *(TX20220042) |
|----------|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 1346 | Loader/Backhoe Operator | \$14.18 | \$12.77 | \$12.97 | \$15.68 | | \$14.12 | | | \$15.18 | \$13.58 | \$12.87 | | \$13.21 | \$14.13 | \$14.29 | \$12.90 |
| 1187 | Mechanic | \$20.14 | \$15.47 | \$17.47 | \$17.74 | \$17.00 | \$17.10 | | | \$17.68 | \$18.94 | \$18.58 | \$17.00 | \$16.61 | \$18.46 | \$16.96 | \$17.47 |
| 1380 | Milling Machine Operator | \$15.54 | \$14.64 | \$12.22 | \$14.29 | | \$14.18 | | | \$14.32 | \$14.35 | \$12.86 | | | \$14.75 | \$13.53 | \$12.80 |
| 1390 | Motor Grader Operator, Fine Grade | \$17.49 | \$16.52 | \$16.88 | \$17.12 | \$18.37 | \$18.51 | \$16.69 | \$16.13 | \$17.19 | \$18.35 | \$17.07 | \$17.74 | \$17.47 | \$17.08 | \$15.69 | \$20.01 |
| 1393 | Motor Grader Operator, Rough | \$16.15 | \$14.62 | \$15.83 | \$16.20 | \$17.07 | \$14.63 | \$18.50 | | \$16.02 | \$16.44 | \$15.12 | \$16.85 | \$14.47 | \$17.39 | \$14.23 | \$15.53 |
| 1413 | Off Road Hauler | | | \$10.08 | \$12.26 | | \$11.88 | | | \$12.25 | | \$12.23 | | | \$13.00 | \$14.60 | |
| 1196 | Painter, Structures | | | | | \$21.29 | \$18.34 | | | | | | \$21.29 | | | \$18.62 | |
| 1396 | Pavement Marking Machine Operator | \$16.42 | | \$13.10 | \$13.55 | | \$19.17 | \$12.01 | | \$13.63 | \$14.60 | \$13.17 | | \$16.65 | \$10.54 | \$11.18 | \$13.10 |
| 1443 | Percussion or Rotary Drill Operator | | | | | | | | | | | | | | | | |
| 1202 | Piledriver | | | | | | | | | | | | | | | | \$14.95 |
| 1205 | Pipelayer | | \$11.87 | \$14.64 | \$13.17 | \$11.17 | \$12.79 | | \$11.37 | \$13.24 | \$12.66 | \$13.24 | \$11.17 | \$11.67 | | \$12.12 | \$14.64 |
| 1384 | Reclaimer/Pulverizer Operator | \$12.85 | | | \$11.90 | | \$12.88 | | | \$11.01 | | \$10.46 | | | | | |
| 1500 | Reinforcing Steel Worker | \$13.50 | \$14.07 | \$17.53 | \$16.17 | | \$14.00 | | | \$16.18 | \$12.74 | \$15.83 | | \$17.10 | | \$15.15 | \$17.72 |
| 1402 | Roller Operator, Asphalt | \$10.95 | | \$11.96 | \$13.29 | | \$12.78 | \$11.61 | | \$13.08 | \$12.36 | \$11.68 | | \$11.71 | \$11.95 | \$11.50 | |
| 1405 | Roller Operator, Other | \$10.36 | | \$10.44 | \$11.82 | | \$10.50 | \$11.64 | | \$11.51 | \$10.59 | \$10.30 | | \$12.04 | \$12.85 | \$11.57 | \$10.66 |
| 1411 | Scraper Operator | \$10.61 | \$11.07 | \$10.85 | \$12.88 | | \$12.27 | | \$11.12 | \$12.96 | \$11.88 | \$12.43 | | \$11.22 | \$13.95 | \$13.47 | \$10.89 |
| 1417 | Self-Propelled Hammer Operator | | | | | | | | | | | | | | | | |
| 1194 | Servicer | \$13.98 | \$12.34 | \$14.11 | \$14.74 | | \$14.51 | \$15.56 | \$13.44 | \$14.58 | \$14.31 | \$13.83 | | \$12.43 | \$13.72 | \$13.97 | \$14.11 |
| 1513 | Sign Erector | | | | | | | | | | | | | | | | |
| 1708 | Slurry Seal or Micro-Surfacing Machine Operator | | | | | | | | | | | | | | | | |
| 1341 | Small Slipform Machine Operator | | | | | | | | | \$15.96 | | | | | | | |
| 1515 | Spreader Box Operator | \$12.60 | | \$13.12 | \$14.71 | | \$14.04 | | | \$14.73 | \$13.84 | \$13.68 | | \$13.45 | \$11.83 | \$13.58 | \$14.05 |
| 1705 | Structural Steel Welder | | | | | | | | | | | | | | | \$12.85 | |
| 1509 | Structural Steel Worker | | | | | | \$19.29 | | | | | | | | | \$14.39 | |
| 1339 | Subgrade Trimmer | | | | | | | | | | | | | | | | |
| 1143 | Telecommunication Technician | | | | | | | | | | | | | | | | |
| 1145 | Traffic Signal/Light Pole Worker | | | | | | \$16.00 | | | | | | | | | | |
| 1440 | Trenching Machine Operator, Heavy | | | | | | \$18.48 | | | | | | | | | | |
| 1437 | Trenching Machine Operator, Light | | | | | | | | | | | | | | | | |
| 1609 | Truck Driver Lowboy-Float | \$14.46 | \$13.63 | \$13.41 | \$15.00 | \$15.93 | \$15.66 | | | \$16.24 | \$16.39 | \$14.30 | \$16.62 | \$15.63 | \$14.28 | \$16.03 | \$13.41 |
| 1612 | Truck Driver Transit-Mix | | | | \$14.14 | | | | | \$14.14 | | | | | | | |
| 1600 | Truck Driver, Single Axle | \$12.74 | \$10.82 | \$10.75 | \$13.04 | \$11.61 | \$11.79 | \$13.53 | \$13.16 | \$12.31 | \$13.40 | \$10.30 | \$11.61 | | \$11.97 | \$11.46 | \$10.75 |
| 1606 | Truck Driver, Single or Tandem Axle Dump Truck | \$11.33 | \$14.53 | \$11.95 | \$12.95 | | \$11.68 | | \$14.06 | \$12.62 | \$11.45 | \$12.28 | | \$13.08 | \$11.68 | \$11.48 | \$11.10 |
| 1607 | Truck Driver, Tandem Axle Tractor with Semi Trailer | \$12.49 | \$12.12 | \$12.50 | \$13.42 | | \$12.81 | \$13.16 | | \$12.86 | \$16.22 | \$12.50 | | | \$13.80 | \$12.27 | \$12.50 |
| 1441 | Tunneling Machine Operator, Heavy | | | | | | | | | | | | | | | | |
| 1442 | Tunneling Machine Operator, Light | | | | | | | | | | | | | | | | |
| 1706 | Welder | | \$14.02 | | \$14.86 | | \$15.97 | | \$13.74 | \$14.84 | | | | | \$13.78 | | |
| 1520 | Work Zone Barricade Servicer | \$10.30 | \$12.88 | \$11.46 | \$11.70 | \$11.57 | \$11.85 | \$10.77 | | \$11.68 | \$12.20 | \$11.22 | \$11.51 | \$12.96 | \$10.54 | \$11.67 | \$11.76 |

Notes:

*Represents the USDOL wage decision.

Any worker employed on this project shall be paid at the rate of one and one half (1-1/2) times the regular rate for every hour worked in excess of forty (40) hours per week.

For reference, the titles and descriptions for the classifications listed here are detailed further in the AGC of Texas' *Standard Job Classifications and Descriptions for Highway, Heavy, Utilities, and Industrial Construction in Texas* posted on the AGC's Web site for any contractor.

**TEXAS COUNTIES IDENTIFIED BY
WAGE RATE ZONES: 2, 3, 4, 5, 6, 7, 8, 24, 25, 27, 28, 29, 30, 37, 38, 42**

| County Name | Zone | County Name | Zone | County Name | Zone | County Name | Zone |
|---------------|------|-------------|------|-------------|------|---------------|------|
| Anderson | 28 | Donley | 37 | Karnes | 27 | Reagan | 37 |
| Andrews | 37 | Duval | 30 | Kaufman | 25 | Real | 37 |
| Angelina | 28 | Eastland | 37 | Kendall | 7 | Red River | 28 |
| Aransas | 29 | Ector | 2 | Kenedy | 30 | Reeves | 8 |
| Archer | 25 | Edwards | 8 | Kent | 37 | Refugio | 27 |
| Armstrong | 2 | El Paso | 24 | Kerr | 27 | Roberts | 37 |
| Atascosa | 7 | Ellis | 25 | Kimble | 37 | Robertson | 7 |
| Austin | 38 | Erath | 28 | King | 37 | Rockwall | 25 |
| Bailey | 37 | Falls | 28 | Kinney | 8 | Runnels | 37 |
| Bandera | 7 | Fannin | 28 | Kleberg | 27 | Rusk | 4 |
| Bastrop | 7 | Fayette | 27 | Knox | 37 | Sabine | 28 |
| Baylor | 37 | Fisher | 37 | Lamar | 28 | San Augustine | 28 |
| Bee | 27 | Floyd | 37 | Lamb | 37 | San Jacinto | 38 |
| Bell | 7 | Foard | 37 | Lampasas | 7 | San Patricio | 29 |
| Bexar | 7 | Fort Bend | 38 | LaSalle | 30 | San Saba | 37 |
| Blanco | 27 | Franklin | 28 | Lavaca | 27 | Schleicher | 37 |
| Borden | 37 | Freestone | 28 | Lee | 27 | Scurry | 37 |
| Bosque | 28 | Frio | 27 | Leon | 28 | Shackelford | 37 |
| Bowie | 4 | Gaines | 37 | Liberty | 38 | Shelby | 28 |
| Brazoria | 38 | Galveston | 38 | Limestone | 28 | Sherman | 37 |
| Brazos | 7 | Garza | 37 | Lipscomb | 37 | Smith | 4 |
| Brewster | 8 | Gillespie | 27 | Live Oak | 27 | Somervell | 28 |
| Briscoe | 37 | Glasscock | 37 | Llano | 27 | Starr | 30 |
| Brooks | 30 | Goliad | 29 | Loving | 37 | Stephens | 37 |
| Brown | 37 | Gonzales | 27 | Lubbock | 2 | Sterling | 37 |
| Burleson | 7 | Gray | 37 | Lynn | 37 | Stonewall | 37 |
| Burnet | 27 | Grayson | 25 | Madison | 28 | Sutton | 8 |
| Caldwell | 7 | Gregg | 4 | Marion | 28 | Swisher | 37 |
| Calhoun | 29 | Grimes | 28 | Martin | 37 | Tarrant | 25 |
| Callahan | 25 | Guadalupe | 7 | Mason | 27 | Taylor | 2 |
| Cameron | 3 | Hale | 37 | Matagorda | 27 | Terrell | 8 |
| Camp | 28 | Hall | 37 | Maverick | 30 | Terry | 37 |
| Carson | 2 | Hamilton | 28 | McCulloch | 37 | Throckmorton | 37 |
| Cass | 28 | Hansford | 37 | McLennan | 7 | Titus | 28 |
| Castro | 37 | Hardeman | 37 | McMullen | 30 | Tom Green | 2 |
| Chambers | 38 | Hardin | 38 | Medina | 7 | Travis | 7 |
| Cherokee | 28 | Harris | 38 | Menard | 37 | Trinity | 28 |
| Childress | 37 | Harrison | 42 | Midland | 2 | Tyler | 28 |
| Clay | 25 | Hartley | 37 | Milam | 28 | Upshur | 4 |
| Cochran | 37 | Haskell | 37 | Mills | 37 | Upton | 37 |
| Coke | 37 | Hays | 7 | Mitchell | 37 | Uvalde | 30 |
| Coleman | 37 | Hemphill | 37 | Montague | 37 | Val Verde | 8 |
| Collin | 25 | Henderson | 28 | Montgomery | 38 | Van Zandt | 28 |
| Collingsworth | 37 | Hidalgo | 3 | Moore | 37 | Victoria | 6 |
| Colorado | 27 | Hill | 28 | Morris | 28 | Walker | 28 |
| Comal | 7 | Hockley | 37 | Motley | 37 | Waller | 38 |
| Comanche | 37 | Hood | 28 | Nacogdoches | 28 | Ward | 37 |
| Concho | 37 | Hopkins | 28 | Navarro | 28 | Washington | 28 |
| Cooke | 37 | Houston | 28 | Newton | 28 | Webb | 3 |
| Coryell | 7 | Howard | 37 | Nolan | 37 | Wharton | 27 |
| Cottle | 37 | Hudspeth | 8 | Nueces | 29 | Wheeler | 37 |
| Crane | 37 | Hunt | 25 | Ochiltree | 37 | Wichita | 5 |
| Crockett | 8 | Hutchinson | 37 | Oldham | 37 | Wilbarger | 37 |
| Crosby | 2 | Irion | 2 | Orange | 38 | Willacy | 30 |
| Culberson | 8 | Jack | 28 | Palo Pinto | 28 | Williamson | 7 |
| Dallam | 37 | Jackson | 27 | Panola | 28 | Wilson | 7 |
| Dallas | 25 | Jasper | 28 | Parker | 25 | Winkler | 37 |
| Dawson | 37 | Jeff Davis | 8 | Parmer | 37 | Wise | 25 |
| Deaf Smith | 37 | Jefferson | 38 | Pecos | 8 | Wood | 28 |
| Delta | 25 | Jim Hogg | 30 | Polk | 28 | Yoakum | 37 |
| Denton | 25 | Jim Wells | 27 | Potter | 2 | Young | 37 |
| DeWitt | 27 | Johnson | 25 | Presidio | 8 | Zapata | 30 |
| Dickens | 37 | Jones | 25 | Rains | 28 | Zavala | 30 |
| Dimmit | 30 | | | Randall | 2 | | |

Special Provision to Item 000

Nondiscrimination



1. DESCRIPTION

All recipients of federal financial assistance are required to comply with various nondiscrimination laws including Title VI of the Civil Rights Act of 1964, as amended, (Title VI). Title VI forbids discrimination against anyone in the United States on the grounds of race, color, or national origin by any agency receiving federal funds.

Texas Department of Transportation, as a recipient of Federal financial assistance, and under Title VI and related statutes, ensures that no person shall on the grounds of race, religion (where the primary objective of the financial assistance is to provide employment per 42 U.S.C. § 2000d-3), color, national origin, sex, age or disability be excluded from participation in, be denied the benefits of, or otherwise be subjected to discrimination under any Department programs or activities.

2. DEFINITION OF TERMS

Where the term “contractor” appears in the following six nondiscrimination clauses, the term “contractor” is understood to include all parties to contracts or agreements with the Texas Department of Transportation.

3. NONDISCRIMINATION PROVISIONS

During the performance of this contract, the contractor agrees as follows:

- 3.1. **Compliance with Regulations.** The Contractor shall comply with the Regulations relative to nondiscrimination in Federally-assisted programs of the Department of Transportation (hereinafter, “DOT”) Title 49, Code of Federal Regulations, Part 21, as they may be amended from time to time, (hereinafter referred to as the Regulations), which are herein incorporated by reference and made a part of this contract.
- 3.2. **Nondiscrimination.** The contractor, with regard to the work performed by it during the contract, shall not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor shall not participate either directly or indirectly in the discrimination prohibited by section 21.5 of the Regulations, including employment practices when the contract covers a program set forth in Appendix B of the Regulations.
- 3.3. **Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations either by competitive bidding or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials or leases of equipment, each potential subcontractor or supplier shall be notified by the contractor of the contractor's obligations under this contract and the Regulations relative to nondiscrimination on the grounds of race, color, or national origin.
- 3.4. **Information and Reports:** The contractor shall provide all information and reports required by the Regulations or directives issued pursuant thereto, and shall permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Texas Department of Transportation to be pertinent to ascertain compliance with such Regulations, orders and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish this information the contractor shall so certify to the Recipient, or the Texas Department of Transportation as appropriate, and shall set forth what efforts it has made to obtain the information.

- 3.5. **Sanctions for Noncompliance.** In the event of the contractor's noncompliance with the nondiscrimination provisions of this contract, the Recipient shall impose such contract sanctions as it or the Texas Department of Transportation may determine to be appropriate, including, but not limited to:
- withholding of payments to the contractor under the contract until the contractor complies, and/or
 - cancellation, termination or suspension of the contract, in whole or in part.
- 3.6. **Incorporation of Provisions.** The contractor shall include the provisions of paragraphs (1) through (6) in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Regulations, or directives issued pursuant thereto. The contractor shall take such action with respect to any subcontract or procurement as the Recipient or the Texas Department of Transportation may direct as a means of enforcing such provisions including sanctions for non-compliance: Provided, however, that, in the event a contractor becomes involved in, or is threatened with, litigation with a subcontractor or supplier as a result of such direction, the contractor may request the Recipient to enter into such litigation to protect the interests of the Recipient, and, in addition, the contractor may request the United States to enter into such litigation to protect the interests of the United States.

Special Provision to Item 000

Small Business Enterprise in State Funded Projects



1. DESCRIPTION

The purpose of this Special Provision is to carry out the Texas Department of Transportation's policy of ensuring that Small Business Enterprise (SBE) has an opportunity to participate in the performance of contracts. If the SBE goal is greater than zero, Article A of this Special Provision shall apply to this Contract; otherwise, Article B of this Special Provision applies. The percentage goal for SBE participation in the work to be performed under this contract will be shown in the proposal.

2. DEFINITIONS

Small Business Enterprise (SBE) is a firm (including affiliates) certified by the Department whose annual gross receipts do not exceed the U.S. Small Business Administration's size standards for 4 consecutive years. Firms certified as Historically Underutilized Businesses (HUBs) by the Texas Comptroller of Public Accounts and as Disadvantaged Business Enterprises (DBEs) by the Texas Uniform Certification Program automatically qualify as SBEs.

2.1. Article A - SBE Goal is Greater than Zero.

2.1.1. **Policy.** The Department is committed to providing contracting opportunities for small businesses. In this regard, it is the Department's policy to develop and maintain a program in order to facilitate contracting opportunities for small businesses. Consequently, the requirements of the Department's Small Business Enterprise Program apply to this contract as follows:

2.1.1.1. The Contractor shall make a good faith effort to meet the SBE goal for this contract.

2.1.1.2. The Contractor and any Subcontractors shall not discriminate on the basis of race, color, national origin, age, disability or sex in the award and performance of this contract. These nondiscrimination requirements shall be incorporated into any subcontract and purchase order.

2.1.1.3. After a conditional award is made to the low bidder, the Department will determine the adequacy of a Contractor's efforts to meet the contract goal, as is outlined under Section 2, "Contractor's Responsibilities." If the requirements of Section 2 are met, the contract will be forwarded to the Contractor for execution.

The Contractor's performance, during the construction period of the contract in meeting the SBE goal, will be monitored by the Department.

2.1.2. **Contractor's Responsibilities.** These requirements must be satisfied by the Contractor. A SBE Contractor may satisfy the SBE requirements by performing at least 25% of the contract work with its own organization as defined elsewhere in the contract.

2.1.2.1. The Contractor shall submit a completed SBE Commitment Agreement Form for each SBE they intend to use to satisfy the SBE goal so as to arrive in the Department's Office of Civil Rights (OCR) in Austin, Texas not later than 5:00 p.m. on the 10th business day, excluding national holidays, after the conditional award of the contract. When requested, additional time, not to exceed 7 business days, excluding national holidays, may be granted based on documentation submitted by the Contractor.

2.1.2.2. A Contractor who cannot meet the contract goal, in whole or in part, shall document the good faith efforts taken to meet the SBE goal. The Department will consider as good faith efforts all documented explanations

that are submitted and that describe a Contractor's failure to meet a SBE goal or obtain SBE participation, including:

- 2.1.2.2.1. Advertising in general circulation, trade association, and/or minority/women focus media concerning subcontracting opportunities,
- 2.1.2.2.2. Dividing the contract work into reasonable portions in accordance with standard industry practices,
- 2.1.2.2.3. Documenting reasons for rejection or meeting with the rejected SBE to discuss the rejection,
- 2.1.2.2.4. Providing qualified SBEs with adequate information about bonding, insurance, plans, specifications, scope of work, and the requirements of the contract,
- 2.1.2.2.5. Negotiating in good faith with qualified SBEs, not rejecting qualified SBEs who are also the lowest responsive bidder, and;
- 2.1.2.2.6. Using the services of available minorities and women, community organizations, contractor groups, local, state and federal business assistance offices, and other organizations that provide support services to SBEs.
- 2.1.2.3. The good faith effort documentation is due at the time and place specified in Subarticle 2.(a). of this Special Provision. The Director of the DBE & SBE Programs Section will evaluate the Contractor's documentation. If it is determined that the Contractor has failed to meet the good faith effort requirements, the Contractor will be given an opportunity for reconsideration by the Department.
- 2.1.2.4. Should the bidder to whom the contract is conditionally awarded refuse, neglect or fail to meet the SBE goal and/or demonstrate to the Department's satisfaction sufficient efforts to obtain SBE participation, the proposal guaranty filed with the bid shall become the property of the State, not as a penalty, but as liquidated damages to the Department.
- 2.1.2.5. The Contractor must not terminate a SBE subcontractor submitted on a commitment agreement for a contract with an assigned goal without the prior written consent of the Department.
- 2.1.2.6. The Contractor shall designate a SBE contact person who will administer the Contractor's SBE program and who will be responsible for submitting reports, maintaining records, and documenting good faith efforts to use SBEs.
- 2.1.2.7. The Contractor must inform the Department of the representative's name, title and telephone number within 10 days of beginning work.
- 2.1.3. **Eligibility of SBEs.**
- 2.1.3.1. The Department certifies the eligibility of SBEs.
- 2.1.3.2. The Department maintains and makes available to interested parties a directory of certified SBEs.
- 2.1.3.3. Only firms certified at the time of letting or at the time the commitments are submitted are eligible to be used in the information furnished by the Contractor required under Section 2.(a) above.
- 2.1.3.4. Certified HUBs and DBEs are eligible as SBEs.
- 2.1.3.5. Small Business Size Regulations and Eligibility is referenced on e-CFR (Code of Federal Regulations), Title 13 – Business Credit and Assistance, Chapter 1 – Small Business Administration, Part 121 – Small Business Size Regulations, Subpart A – Size Eligibility Provisions and Standards.
- 2.1.4. **Determination of SBE Participation.** SBE participation shall be counted toward meeting the SBE goal in this contract in accordance with the following:

- 2.1.4.1. A Contractor will receive credit for all payments actually made to a SBE for work performed and costs incurred in accordance with the contract, including all subcontracted work.
- 2.1.4.2. A SBE Contractor or subcontractor may not subcontract more than 75% of a contract. The SBE shall perform not less than 25% of the value of the contract work with its own organization.
- 2.1.4.3. A SBE may lease equipment consistent with standard industry practice. A SBE may lease equipment from the prime contractor if a rental agreement, separate from the subcontract specifying the terms of the lease arrangement, is approved by the Department prior to the SBE starting the work in accordance with the following:
- 2.1.4.3.1. If the equipment is of a specialized nature, the lease may include the operator. If the practice is generally acceptable with the industry, the operator may remain on the lessor's payroll. The operator of the equipment shall be subject to the full control of the SBE, for a short term, and involve a specialized piece of heavy equipment readily available at the job site.
- 2.1.4.3.2. For equipment that is not specialized, the SBE shall provide the operator and be responsible for all payroll and labor compliance requirements.
- 2.1.5. **Records and Reports.**
- 2.1.5.1. The Contractor shall submit monthly reports, after work begins, on SBE payments, (including payments to HUBs and DBEs). The monthly reports are to be sent to the Area Engineer's office. These reports will be due within 15 days after the end of a calendar month.
- These reports will be required until all SBE subcontracting or supply activity is completed. The "SBE Progress Report" is to be used for monthly reporting. Upon completion of the contract and prior to receiving the final payment, the Contractor shall submit the "SBE Final Report" to the Office of Civil Rights and a copy to the Area Engineer. These forms may be obtained from the Office of Civil Rights and reproduced as necessary. The Department may verify the amounts being reported as paid to SBEs by requesting, on a random basis, copies of invoices and cancelled checks paid to SBEs. When the SBE goal requirement is not met, documentation supporting Good Faith Efforts, as outlined in Section 2.(b) of this Special Provision, must be submitted with the Final Report.
- 2.1.5.2. SBE subcontractors and/or suppliers should be identified on the monthly report by SBE certification number, name and the amount of actual payment made to each during the monthly period. **These reports are required regardless of whether or not SBE activity has occurred in the monthly reporting period.**
- 2.1.5.3. All such records must be retained for a period of 3 years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the Department.
- 2.1.6. **Compliance of Contractor.** To ensure that SBE requirements of this contract are complied with, the Department will monitor the Contractor's efforts to involve SBEs during the performance of this contract. This will be accomplished by a review of monthly reports submitted by the Contractor indicating his progress in achieving the SBE contract goal and by compliance reviews conducted by the Department.
- A Contractor's failure to comply with the requirements of this Special Provision shall constitute a material breach of this contract. In such a case, the Department reserves the right to employ remedies as the Department deems appropriate in the terms of the contract.
- 2.2. **Article B - No SBE Goal.**
- 2.2.1. **Policy.** It is the policy of the Department that SBEs shall have an opportunity to participate in the performance of contracts. Consequently, the requirements of the Department's Small Business Enterprise Program apply to this contract as specified in Section 2-5 of this Article.

- 2.2.2. **Contractor's Responsibilities.** If there is no SBE goal, the Contractor will offer SBEs an opportunity to participate in the performance of contracts and subcontracts.
- 2.2.3. **Prohibit Discrimination.** The Contractor and any subcontractor shall not discriminate on the basis of race, color, national origin, religion, age, disability or sex in the award and performance of contracts. These nondiscrimination requirements shall be incorporated into any subcontract and purchase order.
- 2.2.4. **Records and Reports.**
- 2.2.4.1. The Contractor shall submit reports on SBE (including HUB and DBE) payments. The reports are to be sent to the Area Engineer's office. These reports will be due annually by the 31st of August or at project completion, whichever comes first.
- These reports will be required until all SBE subcontracting or supply activity is completed. The "SBE Progress Report" is to be used for reporting. Upon completion of the contract and prior to receiving the final payment, the Contractor shall submit the "SBE Final Report" to the Office of Civil Rights and a copy to the Area Engineer. These forms may be obtained from the Office of Civil Rights and reproduced as necessary. The Department may verify the amounts being reported as paid to SBEs by requesting copies of invoices and cancelled checks paid to SBEs on a random basis.
- 2.2.4.2. SBE subcontractors and/or suppliers should be identified on the report by SBE Certification Number, name and the amount of actual payment made.
- 2.2.4.3. All such records must be retained for a period of 3 years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the Department.

Special Provision 000

Certificate of Interested Parties (Form 1295)



Submit a notarized Form 1295, "Certificate of Interested Parties," in the following instances:

- at Contract execution for Contracts awarded by the Commission;
- at Contract execution for Contracts awarded by the District Engineer or Chief Engineer with an award amount of \$1,000,000 or more; at any time an existing Contract awarded by the District Engineer or Chief Engineer increases in value to \$1,000,000 or more due to changes in the Contract; at any time there is an increase of \$1,000,000 or more to an existing Contract (change orders, extensions, and renewals); or
- at any time there is a change to the information in Form 1295, when the form was filed for an existing Contract.

Form 1295 and instructions on completing and filing the form are available on the Texas Ethics Commission website.

Special Provision to Item 000

Description of Project, Scope of Contract, and Sequence of Work



1. DESCRIPTION OF PROJECT

General. The work to be performed on this project consists of furnishing, installing, testing, and interconnecting a Computerized Transportation Management System. This project covers US 290 from Mueschke Rd to Waller County Line. The Components of the system include Dynamic Message Signs, CCTV Surveillance, Communications System, and Radar Vehicle Sensing Devices.

Control of the systems will be via computers located in the satellite control center and at Houston Transtar. Communications to the equipment will be via fiber optic cable.

- 1.1. **Dynamic Message Sign System.** The Dynamic Message Signs (DMS) will be located along the roadway and will be used to provide motorists with traffic condition information and other pertinent messages from Houston Transtar. DMS to be installed on this project will be provided by the Department. The existing DMS control system at Houston Transtar will be used to control the DMS.
- 1.2. **Closed Circuit Television (CCTV).** The CCTV surveillance system consists of CCTV cameras to be located at strategic locations along the roadway. These cameras will furnish visual surveillance of the roadway and provide visual confirmation of free-flow conditions, or congestion along the roadway. The CCTV cameras will be mounted on structures dedicated to the CCTV cameras and on existing traffic signal poles. Personnel operating the CCTV system from Houston Transtar will have remote control functions for each CCTV locations such as pan, tilt, zoom, focus, iris control, and camera power. Communications and video data between each CCTV location and Houston Transtar will use fiber optic cable.
- 1.3. **Communications System.** This project will use an Ethernet based communications system. The communications system will be used to interconnect the equipment in the field and to provide control and monitoring of field devices from Houston Transtar. Command data from equipment at Houston Transtar will be transmitted to the communication hub locations via the network for distribution to the various field devices. Data from the field devices will also be collected in the communications hubs for transmission to Houston Transtar. Use fiber optic cable for interconnection of the field equipment to the communications hub locations and for interconnection of the communications hubs to the Satellite Control Center and Houston Transtar.
- 1.4. **Radar Vehicle Sensing Device (RVSD).** Install radar-based vehicle sensing devices on this project to monitor traffic flow conditions on the corridor. Data from this system will be transmitted to Houston Transtar via the fiber optic communication network.

2. SCOPE OF CONTRACT

- 2.1. **Dynamic Message Sign (DMS) System.** Dynamic message signs using Light Emitting Diode (LED) technology will be supplied by the Department for installation on this project by the Contractor. Completely install the DMS, sign support structures, foundations, fiber optic cable, transceivers, and field controllers as shown on the plans, and make them fully operational.

Test the DMS installed on this project in conformance with plans and specifications. Provide work, material, and services not expressly called for in the specifications, or not shown on the plans, which may be necessary for a complete and properly functioning system.

- 2.2. **CCTV Surveillance System.** Furnish and install, as shown on the plans, CCTV equipment and associated components and accessories which are fully compliant with the requirements of the plans and specifications.

Completely install the CCTV equipment as shown on the plans and make it fully operational.

Test the CCTV equipment installed on this project in conformance with the plans and specifications. Provide work, material, and services not expressly called for in the specifications, or not shown on the plans, which may be necessary for a complete and properly functioning system.

- 2.3. **Communications System.** Furnish, install, splice, and test the fiber optic cable as shown on the plans. Provide work, material, and services not expressly called for in the specifications, or not shown on the plans, which may be necessary for a complete and properly functioning system. Test the fiber optic cables installed on this project in full compliance with the requirements of the plans and specifications. Provide the test results to the Engineer.

Perform the necessary splicing on every fiber strand and provide the fiber optic jumper cables and other materials necessary for complete and operating systems.

This project will interconnect with portions of the existing fiber optic cable at the Mueschke Rd communication hub. Perform the necessary splicing on the existing cable to provide connectivity for equipment installed on this project.

Ethernet communications equipment for this project will be supplied by the Department, through the Engineer, for installation by the Contractor. This equipment includes Ethernet switches, video encoders, and terminal servers. Install equipment at locations shown on the plans. The terminal servers will be used for transmission of serial data. The encoders will be used to encode the video signals and serial data from the CCTV cameras for interconnection with the Ethernet switches. The Department will configure and program the Ethernet equipment.

- 2.4. **Radar Vehicle Sensing Device (RVSD).** The Contractor is responsible for providing continuous communication from the Radar Vehicle Sensing Device to the hub building. This work is subsidiary to the various bid items.

Provide the necessary terminals and make the necessary connections to ensure a completely operational communications circuit between the Radar Vehicle Sensing Device and the cabinet or hub building to which it is being connected.

Mount and install the Radar Vehicle Sensing Device according to manufacturer's recommendation to achieve the specified accuracy and reliability.

Completely replace any cable in which any portion fails to pass the tests at no cost to the Department.

- 2.5. **Trade Name Reference.** Reference made to any manufacturer's trade name or catalog number for any item of equipment or material necessary to meet the requirements of this Specification and the plans, is intended to be descriptive but not restrictive and indicate the type of acceptable equipment or materials.

- 2.6. **Approval of Equipment, Materials, and Details.** Within 30 days after time charges begin, submit descriptive manuals and brochures for each type of electronic equipment and apparatus proposed for this project. Also submit for approval, detailed equipment submittals and shop drawings for each fabricated item proposed for use on this project. Make submission for these materials electronically in accordance with pertinent portions of Item 5, "Control of the Work," and the Guide to Electronic Shop Drawing Submittal. Ensure these documents completely identify the equipment manufacturer's name and model number for each submitted item and contain enough technical data for complete evaluation. Provide drawings which contain the information required for complete fabrication in conformance with the plans and specifications and which fully describe the quality, function, and capability of each deliverable item in complete detail.

The specifications for this project contain component lists defining the minimum requirements for submittal contents on various bid items. Review and prepare submittals in conformance with these requirements. Provide submittals which, as a minimum, completely address the stated requirements. Include in the submittal package, information not specifically contained in the lists but required for clarification of submittal information. Provide submittals on items necessary for completion of the project but not specifically identified elsewhere in the project documents to the Engineer, a minimum of 60 days before the time needed for use on the project. Submittal packages, which do not completely address required information or are incomplete in any manner, will be subject to rejection.

Review the submittals for completeness before submitting them to the Department. At the time of submission, certify in writing that the submittal has been reviewed for completeness, that the submittal completely addresses the requirements of the specification, and that the equipment is appropriate for intended use.

In addition to the submittals and shop drawings, the Engineer may also require the Contractor to provide equipment samples for evaluation and may also require complete demonstration of the equipment as part of the submittal review process. Additional requirements for equipment demonstrations and testing are located elsewhere in the project documents.

The Engineer, upon receipt of the complete submittal packages, has a minimum of 60 days to indicate and authorize any correction to the details in the submittals.

The Engineer, upon approval of the submittals, will indicate and authorize any correction to the details in the submittals.

No change will be permitted in the list of equipment or shop drawings once approved, unless authorized by the Engineer in writing.

Equipment will not be accepted for delivery, nor any payment made until the equipment, materials lists, and shop drawings are approved. Approval by the Engineer does not relieve the Contractor of the responsibility to meet the requirements of the specifications and plans.

2.7. **Inspection and Tests.** The Department, through its authorized representative, retains the right to rigidly inspect structures, equipment, and materials used in the project before, during, and after installation, also the right to inspect the work during the process of fabrication or manufacture for the purpose of determining if the plans and specifications are being complied with and being satisfied as to quality of the material and workmanship. Such inspection will not release the manufacturer from strict compliance with specifications when the work is completed and offered for acceptance.

2.8. **Utilities.** Cooperate with the public utility companies in placing and connecting meters and other required service equipment. The Contractor will not be required to furnish meters for same. The Contractor will not be responsible for payment for utilities during the testing of the systems.

Be aware that while working near power lines, a minimum clearance of 10 ft. from power lines must be maintained between personnel and equipment. Do not install any structure within 10 ft. of a power line.

When the required clearance of 10 ft. cannot be maintained during construction, contact the Power Company to arrange for de-energization of the line. Notify the Power Company at least one week before the time de-energization of the lines will be needed.

2.9. **Right of Way.** Cooperate in the use of the right of way with other Contractors, utility companies, and other entities when such parties are engaged in work through the same general area. The Engineer will permit temporary closures subject to the provisions of Item 7, "Legal Relations and Responsibilities," of the Standard Specifications.

No extra compensation will be made for any delays occasioned by work of other Contractors; however, time suspension may be granted if justified and authorized by the Engineer in writing.

- 2.10. **Traveling Public.** Regard the safety and convenience of the traveling public passing through and adjacent to this project as an important feature of this project.

Keep any section of roadway now open to traffic or that may be open to traffic during the duration of this project continuously open to traffic except for temporary closure when erecting overhead structures and related appurtenances, or when moving heavy equipment. The traffic lane adjacent to the freeway median may be blocked during the temporary closure period when the space provided by these lanes is needed to pursue construction work in the freeway median.

Furnish one or more, as needed, mobile advance warning signs of a design and size approved by the Engineer. Locate the warning signs in advance of any construction work within the crown width of any roadway when such roadway is under traffic. The use of the warning signs does not relieve the Contractor of the responsibility of furnishing other warning devices or flagging as necessary to accommodate the traveling public.

The Engineer has the authority to suspend the work on this project if the Contractor conducts operations in such a manner as to cause unwarranted hazards that affect the traveling public.

Provide signs, detours, and other traffic control devices in conformance with the Traffic Control Plan shown on the plans and with the current revision of the "Texas Manual on Uniform Traffic Control Devices."

- 2.11. **Documentation.** Provide documentation as specified in the Special Specifications. Submit three draft copies of documentation to the Engineer for approval at least 30 days before delivery of the final documentation.

Provide each field cabinet with three copies of the final cabinet wiring diagrams. Also deliver to the Engineer, an electronic copy, in PDF format, of the cabinet wiring diagrams showing any field changes incorporated.

- 2.12. **Support.** Provide support during the entire project including any required design reviews, maintenance during construction, and operational support during system integration, manufacturer's normal warranties, and guarantees.

- 2.13. **Design Reviews.** Conduct design reviews as required, at no additional cost to the Department.

- 2.14. **Maintenance during Construction.** Assume responsibility for the new materials and equipment furnished and installed, as well as existing equipment modified as part of this Contract, until final acceptance of the systems. Replace, at no cost to the Department, equipment that fails due to any cause including vandalism and knockdowns.

- 2.15. **Operational Support.** Provide a project manager who is responsible for the project and who will be on-site from the beginning of construction until final system acceptance to serve as the Contractor's official contact for communications with the Engineer. Supplement the project manager's support with the services of qualified Engineers and the services of vendor technical representatives for the duration of the project.

Include the cost of this operational support in the price bid for the individual equipment.

- 2.16. **Warranties and Guarantees.** Before acceptance of the project, obtain the manufacturer's normal warranties or guarantees on electronic, electrical, and mechanical equipment, materials, technical data, and products purchased for use on the project which are consistent with those provided as customary trade practice. Assign to the Department, the manufacturer's normal warranties or guarantees on such electronic, electrical, and mechanical equipment, materials, technical data, and products furnished for and installed on the project.

Technical data, as used in this section, means recorded information, regardless of form or characteristics, of a scientific or technical nature. Assume full responsibility for the technical data delivered under this Contract. If any revisions are required in the technical data due to errors, deficiencies, or omissions, deliver the revisions to the Engineer.

- 2.17. **Training.** Provide training materials and services on the equipment furnished and installed on this project.
- Training includes basic theory of the equipment operation, trouble-shooting procedures including the use of test equipment, and scheduled maintenance requirements. Provide hands-on training for each type of equipment.
- Provide a minimum of 40 hr. of training for up to 15 persons over a period not less than 10 working days. Submit an outline of the proposed training material to the Engineer for approval at least 60 days before the training is to begin. The Engineer will review this material and approve it or request changes to the outline.
- Conduct training in Houston after the completion of the subsystem acceptance tests. Establish the schedule of the training sessions with the approval of the Engineer.
- Include the cost of training in the price bid for the individual equipment.
- Record on video the training sessions, in DVD format, and deliver the media to the Engineer upon completion of training.
- 2.18. **Testing.** Conduct Design Approval Tests, Factory Demonstration Tests, Stand-Alone Tests, and Subsystem Tests as described in the Special Specification for each type of equipment.
- Follow approved test procedures in conducting the tests and provide completed approved data forms for each test. Submit these completed data forms to the Engineer.
- 2.19. **Final System Acceptance Test.**
- 2.20. **Testing Procedures.** Prepare the test procedure and data forms for each of the types of tests required which include a step-by-step sequence for conducting the tests. Provide a data form which is designed to record the results of each step of the tests.
- Submit a copy of the proposed test procedures and data forms to the Engineer electronically in PDF format, at least 60 days before initiating each type of test. Obtain the Engineer's approval for the test procedures and data forms before submitting equipment for tests.
- Fully complete the inspection and testing requirements before submission for the Engineer's inspection and witness of the tests. Provide a minimum of 25 working days' notice for the tests to permit the Engineer's representative to observe each test.
- Failure to satisfy the requirements of any test is counted as a defect and the equipment is subject to rejection by the Engineer. The rejected equipment may be offered again for retest provided the non-compliances have been corrected.
- Provide test fixtures and test instruments for the tests.
- Furnish completed data forms containing the data taken including quantitative results for the tests. Ensure the data forms for the Design Approval Tests are signed by an authorized representative (company official) of the equipment manufacturer or by an authorized representative of an independent testing facility. Ensure the data forms for the Factory Demonstration Tests are signed by an authorized representative (company official) of the equipment manufacturer. The data forms for the other tests must be signed by an authorized representative (company official) of the Contractor. Submit three copies of the completed forms to the Engineer.
- 2.21. **Installation Summary.** Compile and furnish an installation summary for each field installation. Include in this summary the equipment complement and cable lists for each location.

- 2.22. **As Built Plans.** Upon final system acceptance, furnish a set of “As-Built” plans which show the actual equipment and construction of the various systems. Prepare these plans using the current version of Micro station and deliver the plans to the Engineer in a file format specified by the Engineer. Also deliver to the Engineer one printed paper copy of the as-built plans, 11 in. by 17 in. in size.

Collect data pertaining to as-built documentation for use by the Department for entry into software databases. Collect this data on forms supplied by the Engineer and in a format specified by the Engineer.

- 2.23. **Standard Specifications.** In addition to the requirements of these Specifications, ensure the equipment, materials, and work in accordance with the requirements of the following standard specifications:

- Federal Communications Regulations Part 68 & 76 as applicable to this project,
- The Standards of the National Electrical Manufacturer’s Association (NEMA),
- The National Electrical Code (NEC),
- The American National Standards Institute (ANSI),
- The Specifications of the International Municipal Signal Association, Inc. (IMSA),
- American Association of State Highway and Transportation Officials (AASHTO),
- The American Institute of Steel Construction (AISC),
- Texas Manual of Uniform Traffic Control Devices (Texas MUTCD),
- National Manual of Uniform Traffic Control Devices (National MUTCD),
- The National Fire Protection Association (NFPA),
- The Joint Electronic Device Engineering Council (JEDEC),
- The Institute of Electrical and Electronic Engineers (IEEE),
- The American Society of Testing and Materials (ASTM),
- The American Concrete Institute (ACI), and
- The applicable ordinances of the County, City, and State.

Where reference is made in these specifications to the code or standards mentioned above, the reference means the code or standard that is in effect on the date of advertising of these specifications. If there is a conflict between the Special Specifications and the general specification list above, the Special Specifications take precedence.

3. SEQUENCE OF WORK

- 3.1. **Project Schedule.** Within 30 days after the Authorization to Begin Work, and before beginning any construction on the project, provide of a proposed sequence of construction of the entire project and project schedule (CPM, PERT, Primavera, or equivalent) covering every item of work. Clearly indicate the interrelation of individual tasks in the schedule. Divide the schedule into logical stages with scheduling of equipment, design, Design Approval Tests, Factory Demonstration Tests, delivery of equipment, installation dates, and completion dates of work items clearly indicated. Also include in this schedule, the procurement of the materials and equipment for the installation and testing of the fiber optic cable system. Show enough detail to permit monitoring of progress in monthly intervals.

4. PAYMENT

The requirements necessary to satisfy the “Scope of Contract” and “Sequence of Work” described in this special provision are subsidiary to the unit prices for the various items in the proposal.

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category A. Pulling Fiber Optic Cable**.

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category B. Splicing and Testing of Fiber Optic Cable.**

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category C. System Integration**.

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category D. Dynamic Message Sign (DMS) Installation**.

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category E. Closed Circuit Television (CCTV) Equipment Installation**.

Special Provision 000

Important Notice to Contractors



The Contractor's attention is directed to the fact that an intelligent transportation system (ITS) technical qualification is required of all prospective bidders. Refer to Special Provision to Item 2 included in the proposal or contact the Traffic Operations Division at ITS_Tech_Qual@txdot.gov or (512) 416-3118 for more information. The ITS technical qualification is in addition to financial prequalification as required by the Construction Division. The ITS technical qualification does not relieve the Contractor of any requirements found in the Specifications. Categories of work applicable to this project and defined in the special provision to Item 2 include **Category G. Radar Detection Systems**.

Special Provision to Item 000

Schedule of Liquidated Damages



Table 1
Schedule of Liquidated Damages

| For Dollar Amount of Original Contract | | Dollar Amount of Daily Contract Administration Liquidated Damages per Working Day |
|--|------------------|---|
| From More Than | To and Including | |
| 0 | 100,000 | 570 |
| 100,000 | 500,000 | 590 |
| 500,000 | 1,000,000 | 610 |
| 1,000,000 | 1,500,000 | 685 |
| 1,500,000 | 3,000,000 | 785 |
| 3,000,000 | 5,000,000 | 970 |
| 5,000,000 | 10,000,000 | 1,125 |
| 10,000,000 | 20,000,000 | 1,285 |
| 20,000,000 | Over 20,000,000 | 2,590 |

In addition to the amount shown in Table 1, the Liquidated Damages will be increased by the amount shown in Item 8 of the General Notes for Road User Cost (RUC), when applicable.

Special Provision 000

Notice of Contractor Performance Evaluations



1. GENERAL

In accordance with Texas Transportation Code §223.012, the Engineer will evaluate Contractor performance based on quality, safety, and timeliness of the project.

2. DEFINITIONS

- 2.1. **Project Recovery Plan (PRP)**—a formal, enforceable plan developed by the Contractor, in consultation with the District, that documents the cause of noted quality, safety, and timeliness issues and specifies how the Contractor proposes to correct project-specific performance deficiencies.

In accordance with Title 43, Texas Administrative Code (TAC), §9.23, the District will request a PRP if the Contractor's performance on a project is below the Department's acceptable standards and will monitor the Contractor's compliance with the established plan.

- 2.2. **Corrective Action Plan (CAP)**—a formal, enforceable plan developed by the Contractor, and proposed for adoption by the Construction or Maintenance Division, that documents the cause of noted quality, safety, and timeliness issues and specifies how the Contractor proposes to correct statewide performance deficiencies.

In accordance with 43 TAC §9.23, the Division will request a CAP if the average of the Contractor's statewide final evaluation scores falls below the Department's acceptable standards for the review period and will monitor the Contractor's compliance with the established plan.

3. CONTRACTOR EVALUATIONS

In accordance with Title 43, Texas Administrative Code (TAC) §9.23, the Engineer will schedule evaluations at the following intervals, at minimum:

- Interim evaluations—at or within 30 days after the anniversary of the notice to proceed, for Contracts extending beyond 1 yr., and
- Final evaluation—upon project closeout.

In case of a takeover agreement, neither the Surety nor its performing Contractor will be evaluated.

In addition to regularly scheduled evaluations, the Engineer may schedule an interim evaluation at any time to formally communicate issues with quality, safety, or timeliness. Upon request, work with the Engineer to develop a PRP to document expectations for correcting deficiencies.

Comply with the PRP as directed. Failure to comply with the PRP may result in additional remedial actions available to the Engineer under Item 5, "Control of the Work." Failure to meet a PRP to the Engineer's satisfaction may result in immediate referral to the Performance Review Committee for consideration of further action against the Contractor.

The Engineer will consider and document any events outside the Contractor's control that contributed to the failure to meet performance standards or comply with a PRP, including consideration of sufficient time.

Follow the escalation ladder if there is a disagreement regarding an evaluation or disposition of a PRP. The Contractor may submit additional documentation pertaining to the dispute. The District Engineer's decision

on a Contractor's evaluation score and recommendation of action required in a PRP or follow up for non-compliance is final.

4. DIVISION OVERSIGHT

Upon request of the Construction or Maintenance Division, develop and submit for Division approval a proposed CAP to document expectations for correcting deficiencies in the performance of projects statewide.

Comply with the CAP as directed. The CAP may be modified at any time up to completion or resolution after written approval of the premise of change from the Division. Failure to meet an adopted or revised adopted CAP to the Division's satisfaction within 120 days will result in immediate referral to the Performance Review Committee for consideration of further action against the Contractor.

The Division will consider and document any events outside the Contractor's control that contributed to the failure to meet performance standards or comply with a CAP, including consideration of sufficient time and associated costs as appropriate.

5. PERFORMANCE REVIEW COMMITTEE

The Performance Review Committee, in accordance with 43 TAC §9.24, will review at minimum all final evaluations, history of compliance with PRPs, any adopted CAPs including agreed modifications, any information about events outside a Contractor's control contributing to the Contractor's performance, and any documentation submitted by the Contractor and may recommend one or more of the following actions:

- take no action,
- reduce the Contractor's bidding capacity,
- prohibit the Contractor from bidding on one or more projects,
- immediately suspend the Contractor from bidding for a specified period of time, by reducing the Contractor's bidding capacity to zero, or
- prohibit the Contractor from being awarded a Contract on which they are the apparent low bidder.

The Deputy Executive Director will determine any further action against the Contractor.

6. APPEALS PROCESS

In accordance with 43 TAC §9.25, the Contractor may appeal remedial actions determined by the Deputy Executive Director.

Special Provision to Item 2

Instructions to Bidders



Item 2, "Instructions to Bidders," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 2.2., "Eligibility of Bidders," is supplemented by the following:

- 2.3. **Technical Qualification.** The Department will not accept bids from Bidders that have not met the technical qualifications established by the Traffic Operations Division. Technical qualification is required for certain categories of Intelligent Transportation Systems (ITS) work. This technical qualification is in addition to all other Bidder qualifications required by the Department.

Electronically submit ITS Technical Qualification Forms and supporting documentation demonstrating the capability of the Bidder or the Bidder's proposed subcontractors to successfully perform the categories of work described in Articles 2.3.1. through 2.3.7. Utilize the ITS Technical Qualification Form applicable to each work category. Submit the forms and supporting documentation by 12:00 P.M. (CST), 10 calendar days prior to bid opening to ITS_Tech_Qual@txdot.gov. Incomplete submittals or submittals that do not meet the technical qualifications will be rejected and additional information will be required. Failure to submit the qualification forms and supporting documentation by the deadline will be sufficient reason for declaring the bid nonresponsive in accordance with Article 2.7., "Nonresponsive Bid." The categories of work that apply to this contract are listed in "Important Notice to Contractors" Special Provisions in the contract.

ITS Technical Qualification Forms and additional information on becoming a qualified Bidder may be found on the Department's website or by contacting the Traffic Operations Division by email at ITS_Tech_Qual@txdot.gov or by calling 512/416-3118.

Once a Bidder or the Bidder's proposed subcontractor has been approved as having met the requirements of this provision, any substitutions or replacement contractors must be submitted to the Traffic Operations Division for approval prior to performing work on the applicable work category.

A Bidder or the Bidder's proposed subcontractor must have the level of expertise needed to successfully complete the work. The experience requirements for each work category listed below include 3 completed projects, 1 of which must have been completed within the past 5 years. Vendor reference statements for equipment experience are required under certain work categories, but may be waived if the Bidder has acceptable documentation from a vendor demonstrating their experience installing the particular equipment without on-site assistance.

- 2.3.1. **Category A. Pulling Fiber Optic Cable.** Meet the following experience requirements:
- **Minimum Experience.** Three years continuous existence offering services in the installation of fiber optic cable through an outdoor conduit system and terminating in ground boxes, field cabinets or enclosures, or buildings; and
 - **Completed Projects.** Three completed projects where the personnel pulled fiber optic cable, minimum 5-mile in length, through an outdoor conduit system for each project. The completed fiber optic cable systems must have been in continuous satisfactory operation for a minimum of 1 year.
- 2.3.2. **Category B. Splicing and Testing of Fiber Optic Cable.** Meet the following experience requirements:

- Minimum Experience. Three years continuous existence offering services in the fields of fusion splicing and testing of fiber optic cable installed through a conduit system and terminating in ground boxes, field cabinets or enclosures, or buildings. Experience must include the following:
 - termination of a minimum of 48 fibers within a fiber distribution frame,
 - optical time-domain reflectometer (OTDR) testing and measurement of end to end attenuation of single mode and multimode fibers,
 - system troubleshooting and maintenance,
 - training of personnel in system maintenance,
 - use of water-tight splice enclosures, and
 - fusion splicing of fiber optic cable which meet the tolerable dB losses listed in Table 1 below; and

Table 1
Sample Table

| Mode | dB Loss Range |
|-------------|---------------|
| Single mode | 0.05–0.10 |
| Multimode | 0.20–0.30 |

- Completed Projects. Three completed projects where the personnel performed fiber optic cable splicing and terminations, system testing, system troubleshooting and maintenance during the course of the project and provided training on system maintenance. Each project must have consisted of a minimum 5-mile length of fiber optic cable. The completed fiber optic cable systems must have been in continuous satisfactory operation for a minimum of 1 year.

2.3.3. **Category C. System Integration.** Meet the following experience requirements:

- Minimum Experience. Three years of providing system integration on wire line and wireless projects including, but not limited to, programming of layer-2 Ethernet switches, integrating into existing systems and coordination with traffic management centers; and
- Completed Projects. Three completed projects requiring system integration and configuration of hardware including but not limited to Ethernet switches, video encoders and decoders, and radios.

2.3.4. **Category D. Dynamic Message Sign (DMS) Installation.** Meet the following experience requirements:

- Minimum Experience. Three years continuous existence offering services in the installation of DMS signs; and
- Completed Projects. Three completed projects consisting of a minimum of 2 signs in each project where the personnel installed, integrated, and tested DMS on outdoor, permanently mounted overhead structure(s) and related sign control equipment. The completed sign system installations must have been in continuous satisfactory operation for a minimum of 1 year; and
- Equipment Experience. One project (may be 1 of the 3 projects in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of the equipment supplier to perform the installation, integration, or acceptance testing of the work. The Contractor will not be required to furnish equipment on this project from the same supplier who was referenced in the qualification documentation.

2.3.5. **Category E. Closed Circuit Television (CCTV) Equipment Installation.** Meet the following experience requirements:

- Minimum Experience. Three years continuous existence offering services in the installation of CCTV camera systems;
- Completed Projects. Three completed projects consisting of a minimum of 5 cameras in each project where the personnel installed, tested, and integrated CCTV cameras on outdoor, permanently mounted

structure(s) and related camera control and transmission equipment. The completed CCTV camera system installations must have been in continuous satisfactory operation for a minimum of 1 year; and

- Equipment Experience. One project (may be 1 of the 3 projects in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of the equipment supplier to perform installation, integration, or acceptance testing of the work. The Contractor will not be required to furnish equipment on this project from the same supplier who was referenced in the qualification documentation.

2.3.6.

Category F. Wireless Communications. Meet the following experience requirements:

- Minimum Experience. Three years continuous existence offering services in the installation of wireless communications. Experience must include the following:
 - Conducting radio installation studies, which include signal noise studies, spectrum analysis, antenna gain and radio power calculations, system attenuation, and measurement of standing wave ratios;
 - Installation, troubleshooting, and repair of broadband radio systems, which include equipment installation, configuration of radios, antenna calibration, and cabling; and
 - Installation, troubleshooting, and repair of interconnected Ethernet networks (LAN and WAN), which include cabling, switch or router configuration, and network analysis; and
- Completed Projects. Three projects consisting of wireless communications installation, troubleshooting, and repair. Each project must include transmitting signals over a minimum of 1-mile distance and installation of a minimum of 3 devices; and
- Equipment Experience. One project (may be 1 of the 3 projects in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of the equipment supplier to perform installation, integration, or acceptance testing of the work. The Contractor will not be required to furnish equipment on this project from the same supplier who was referenced in the qualification documentation.

2.3.7.

Category G. Radar Detection Systems. Meet the following experience requirements:

- Minimum Experience. Three years continuous existence offering services in the installation of radar detection systems. Experience must include the following:
 - freeway and arterial management,
 - forward fire and side fire applications,
 - single zone and dual beam detection, and
 - equipment setup, testing, and troubleshooting; and
- Completed Projects. Three projects consisting of installation, configuration, and setup of radar detection systems; and
- Equipment Experience. One project (may be 1 of the 3 projects in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of the equipment supplier to perform installation, integration, or acceptance testing of the work. The Contractor will not be required to furnish equipment on this project from the same supplier who was referenced in the qualification documentation.

Special Provision to Item 2

Instructions to Bidders



Item 2, "Instructions to Bidders," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 2.3., "Issuing Proposal Forms," is supplemented by the following:

- the Bidder or affiliate of the Bidder that was originally determined as the apparent low Bidder on a project, but was deemed nonresponsive for failure to register or participate in the Department of Homeland Security's (DHS) E-Verify system as specified in Article 2.15., "Department of Homeland Security (DHS) E-Verify System," is prohibited from rebidding that specific project.

Article 2.7., "Nonresponsive Bid," is supplemented by the following:

- the Bidder failed to participate in the Department of Homeland Security's (DHS) as specified in Article 2.15., "Department of Homeland Security (DHS) E-Verify System."

Article 2.15., "Department of Homeland Security (DHS) E-Verify System," is added.

The Department will not award a Contract to a Contractor that is not registered in the DHS E-Verify system. Remain active in E-Verify throughout the life of the contract. In addition, in accordance with paragraph six of Article 8.2, "Subcontracting," include this requirement in all subcontracts and require that subcontractors remain active in E-Verify until their work is completed.

If the apparent low Bidder does not appear on the DHS E-Verify system prior to award, the Department will notify the Contractor that they must submit documentation showing that they are compliant within 5-business days after the date the notification was sent. A Contractor who fails to comply or respond within the deadline will be declared non-responsive and the Department will execute the proposal guaranty. The proposal guaranty will become the property of the State, not as a penalty, but as liquidated damages. The Bidder forfeiting the proposal guaranty will not be considered in future proposals for the same work unless there has been a substantial change in the scope of the work.

The Department may recommend that the Commission:

- reject all bids, or
- award the Contract to the new apparent low Bidder, if the Department is able to verify the Bidder's participation in the DHS E-verify system. For the Bidder who is not registered in E-Verify, the Department will allow for one business day after notification to provide proof of registration.

If the Department is unable to verify the new apparent low Bidder's participation in the DHS E-Verify system within one calendar day:

- the new apparent low Bidder will not be deemed nonresponsive,
- the new apparent low Bidder's guaranty will not be forfeited,
- the Department will reject all bids, and
- the new apparent low Bidder will remain eligible to receive future proposals for the same project.

Special Provision to Item 2

Instructions to Bidders



Item 2, "Instructions to Bidders" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 3., "Issuing Proposal Forms," is supplemented by the following:

The Electronic State Business Daily (ESBD), the Integrated Contractor Exchange (iCX) system, and the project proposal are the official sources of advertisement and bidding information for the State and Local Lettings. Bidders should bid the project using the information found therein, including any addenda. These sources take precedence over information from other sources, including TxDOT webpages, which are unofficial and intended for informational purposes only.

Special Provision to Item 3 Award and Execution Contract



Item 3, Award and Execution of Contract," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 4.3, "Insurance." The first sentence is voided and replaced by the following:

For construction and building Contracts, submit a certificate of insurance showing coverages in accordance with Contract requirements. For routine maintenance Contracts, refer to Article 8, "Beginning of Work."

Article 8, "Beginning of Work." The first sentence is supplemented by the following:

For a routine maintenance Contract, do not begin work until a certificate of insurance showing coverages in accordance with the Contract requirements is provided and accepted.

Special Provision to Item 3

Award and Execution of Contract



Item 3, "Award and Execution of Contract" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 4.3 "Insurance" is being amended by the following:

Table 2
Insurance Requirements

| Type of Insurance | Amount of Coverage |
|---|---|
| Commercial General Liability Insurance | Not Less Than: \$600,000 each occurrence |
| Business Automobile Policy | Not Less Than: \$600,000 combined single limit |
| Workers' Compensation | Not Less Than: Statutory |
| All Risk Builder's Risk Insurance (For building-facilities contracts only) | 100% of Contract Price |

Special Provision to Item 5

Control of the Work



Item 5, "Control of the Work," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 5.1, "Authority of Engineer," is voided and replaced by the following.

The Engineer has the authority to observe, test, inspect, approve, and accept the work. The Engineer decides all questions about the quality and acceptability of materials, work performed, work progress, Contract interpretations, and acceptable Contract fulfillment. The Engineer has the authority to enforce and make effective these decisions.

The Engineer acts as a referee in all questions arising under the terms of the Contract. The Engineer's decisions will be final and binding.

The Engineer will pursue and document actions against the Contractor as warranted to address Contract performance issues. Contract remedies include, but are not limited to, the following:

- conducting interim performance evaluations requiring a Project Recovery Plan, in accordance with Title 43, Texas Administrative Code (TAC) §9.23,
- requiring the Contractor to remove and replace defective work, or reducing payment for defective work,
- removing an individual from the project,
- suspending the work without suspending working day charges,
- assessing standard liquidated damages to recover the Department's administrative costs, including additional project-specific liquidated damages when specified in the Contract in accordance with 43 TAC §9.22,
- withholding estimates,
- declaring the Contractor to be in default of the Contract, and
- in case of a Contractor's failure to meet a Project Recovery Plan, referring the issue directly to the Performance Review Committee for consideration of further action against the Contractor in accordance with 43 TAC §9.24.

The Engineer will consider and document any events outside the Contractor's control that contributed to the failure to meet performance standards, including consideration of sufficient time.

Follow the issue escalation ladder if there is disagreement regarding the application of Contract remedies.

Special Provision to Item 5

Control of the Work



Item 5, "Control of the Work" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 5.4, "Coordination of Plans, Specifications, and Special Provisions," the last sentence of the last paragraph is replaced by the following:

Failure to promptly notify the Engineer will constitute a waiver of all contract claims against the Department for misunderstandings or ambiguities that result from the errors, omissions, or discrepancies.

Special Provision to Item 6

Control of Materials



For this project, Item 6, "Control of Materials," of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Article 4., "Sampling, Testing, and Inspection," is supplemented by the following:

Meet with the Engineer and choose either the Department or a Department-selected Commercial Lab (CL) for conducting the subset of project-level sampling and testing shown in Table 1, "Select Guide Schedule Sampling and Testing." Selection may be made on a test by test basis. CLs will meet the testing turnaround times shown (includes test time and time for travel/sampling and reporting) and in all cases issue test reports as soon as possible.

If the Contractor chooses a Department-selected CL for any Table 1 sampling and testing:

- notify the Engineer, District Lab, and the CL of project scheduling that may require CL testing;
- provide the Engineer, District Lab, and CL at least 24 hours' notice by phone and e-mail;
- reimburse the Department for CL Table 1 testing using the contract fee schedule for the CL (including mileage and travel/standby time) at the minimum guide schedule testing frequencies;
- reimburse the Department for CL Table 1 testing above the minimum guide schedule frequencies for retesting when minimum frequency testing results in failures to meet specification limits;
- agree with the Engineer and CL upon a policy regarding notification for testing services;
- give any cancellation notice to the Engineer, District Lab, and CL by phone and e-mail;
- reimburse the Department a \$150 cancellation fee to cover technician time and mileage charges for previously scheduled work cancelled without adequate notice, which resulted in mobilization of technician and/or equipment by the CL; and
- all CL charges will be reimbursed to the Department by a deduction from the Contractor's monthly pay estimate.

If the CL does not meet the Table 1 turnaround times, testing charge to the Contractor will be reduced by 50% for the first late day and an additional 5% for each succeeding late day.

Approved CL project testing above the minimum testing frequencies in the Guide Schedule of Sampling and Testing, and not as the result of failing tests, will be paid by the Department.

Other project-level Guide Schedule sampling and testing not shown on Table 1 will be the responsibility of the Department.

Table 1
Select Guide Schedule Sampling and Testing (Note 1)

| TxDOT Test | Test Description | Turn-Around Time (Calendar days) |
|---|---|---|
| SOILS/BASE | | |
| Tex-101-E | Preparation of Soil and Flexible Base Materials for Testing (included in other tests) | |
| Tex-104-E | Liquid Limit of Soils (included in 106-E) | |
| Tex-105-E | Plastic Limit of Soils (included in 106-E) | |
| Tex-106-E | Calculating the Plasticity Index of Soils | 7 |
| Tex-110-E | Particle Size Analysis of Soils | 6 |
| Tex-113-E | Moisture-Density Relationship of Base Materials | 7 |
| Tex-114-E | Moisture-Density Relationship of Subgrade and Embankment Soil | 7 |
| Tex-115-E | Field Method for In-Place Density of Soils and Base Materials | 2 |
| Tex-116-E | Ball Mill Method for the Disintegration of Flexible Base Material | 5 |
| Tex-117-E, Part II | Triaxial Compression Tests For Disturbed Soils and Base Materials (Part II) | 6 |
| Tex-113-E w/ Tex-117-E | Moisture-Density Relationship of Base Materials with Triaxial Compression Tests For Disturbed Soils and Base Materials (Part II) | 10 |
| Tex-140-E | Measuring Thickness of Pavement Layer | 2 |
| Tex-145-E | Determining Sulfate Content in Soils - Colorimetric Method | 4 |
| HOT MIX ASPHALT | | |
| Tex-200-F | Sieve Analysis of Fine and Coarse Aggregate (dry, from ignition oven with known correction factors) | 1 (Note 2) |
| Tex-203-F | Sand Equivalent Test | 3 |
| Tex-206-F, w/ Tex-207-F, Part I, w/ Tex-227-F | (Lab-Molded Density of Production Mixture – Texas Gyrotory) Method of Compacting Test Specimens of Bituminous Mixtures with Density of Compacted Bituminous Mixtures, Part I - Bulk Specific Gravity of Compacted Bituminous Mixtures, with Theoretical Maximum Specific Gravity of Bituminous Mixtures | 1 (Note 2) |
| Tex-207-F, Part I &/or Part VI | (In-Place Air Voids of Roadway Cores) Density of Compacted Bituminous Mixtures, Part I- Bulk Specific Gravity of Compacted Bituminous Mixtures &/or Part VI - Bulk Specific Gravity of Compacted Bituminous Mixtures Using the Vacuum Method | 1 (Note 2) |
| Tex-207-F, Part V | Density of Compacted Bituminous Mixtures, Part V- Determining Mat Segregation using a Density-Testing Gauge | 3 |
| Tex-207-F, Part VII | Density of Compacted Bituminous Mixtures, Part VII - Determining Longitudinal Joint Density using a Density-Testing Gauge | 4 |
| Tex-212-F | Moisture Content of Bituminous Mixtures | 3 |
| Tex-217-F | Deleterious Material and Decantation Test for Coarse Aggregate | 4 |
| Tex-221-F | Sampling Aggregate for Bituminous Mixtures, Surface Treatments, and LRA (included in other tests) | |
| Tex-222-F | Sampling Bituminous Mixtures (included in other tests) | |
| Tex-224-F | Determination of Flakiness Index | 3 |
| Tex-226-F | Indirect Tensile Strength Test (production mix) | 4 |
| Tex-235-F | Determining Draindown Characteristics in Bituminous Materials | 3 |
| Tex-236-F (Correction Factors) | Asphalt Content from Asphalt Paving Mixtures by the Ignition Method (Determining Correction Factors) | 4 |
| Tex-236-F | Asphalt Content from Asphalt Paving Mixtures by the Ignition Method (Production Mixture) | 1 (Note 2) |
| Tex-241-F w/ Tex-207-F, Part I, w/ Tex-227-F | (Lab-Molded Density of Production Mixture – Superpave Gyrotory) Superpave Gyrotory Compacting of Specimens of Bituminous Mixtures (production mixture) with Density of Compacted Bituminous Mixtures, Part I- Part I - Bulk Specific Gravity of Compacted Bituminous Mixtures, with Theoretical Maximum Specific Gravity of Bituminous Mixtures | 1 (Note 2) |
| Tex-242-F | Hamburg Wheel-Tracking Test (production mix, molded samples) | 3 |
| Tex-244-F | Thermal Profile of Hot Mix Asphalt | 1 |
| Tex-246-F | Permeability of Water Flow of Hot Mix Asphalt | 3 |
| Tex-280-F | Flat and Elongated Particles | 3 |
| Tex-530-C | Effect of Water on Bituminous Paving Mixtures (production mix) | 4 |

| AGGREGATES | | |
|--|--|----|
| Tex-400-A | Sampling Flexible Base, Stone, Gravel, Sand, and Mineral Aggregates | 3 |
| Tex-410-A | Abrasion of Coarse Aggregate Using the Los Angeles Machine | 5 |
| Tex-411-A | Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate | 12 |
| Tex-461-A | Degradation of Coarse Aggregate by Micro-Deval Abrasion | 5 |
| CHEMICAL | | |
| Tex-612-J | Acid Insoluble Residue for Fine Aggregate | 4 |
| GENERAL | | |
| HMA Production Specialist [TxAPA – Level 1-A] (\$/hr) | | |
| HMA Roadway Specialist [TxAPA – Level 1-B] (\$/hr) | | |
| Technician Travel/Standby Time (\$/hr) | | |
| Per Diem (\$/day – meals and lodging) | | |
| Mileage Rate (\$/mile from closest CL location) | | |
| Note 1– Turn-Around Time includes test time and time for travel/sampling and reporting. Note 2 – These tests require turn-around times meeting the governing specifications. Provide test results within the stated turn-around time. CL is allowed one additional day to provide the signed and sealed report. | | |

Special Provision to Item 6

Control of Materials



Item 6, "Control of Materials" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 6.10., "Hazardous Materials," is voided and replaced by the following:

Comply with the requirements of Article 7.12., "Responsibility for Hazardous Materials."

Notify the Engineer immediately when a visual observation or odor indicates that materials on sites owned or controlled by the Department may contain hazardous materials. Except as noted herein, the Department is responsible for testing, removing, and disposing of hazardous materials not introduced by the Contractor. The Engineer may suspend work wholly or in part during the testing, removing, or disposing of hazardous materials, except in the case where hazardous materials are introduced by the Contractor.

Use materials that are free of hazardous materials. Notify the Engineer immediately if materials are suspected to contain hazardous materials. If materials delivered to the project by the Contractor are suspected to contain hazardous materials, have an approved commercial laboratory test the materials for the presence of hazardous materials as approved. Remove, remediate, and dispose of any of these materials found to contain hazardous materials. The work required to comply with this section will be at the Contractor's expense if materials are found to contain hazardous materials. Working day charges will not be suspended and extensions of working days will not be granted for activities related to handling hazardous material introduced by the Contractor. If suspected materials are not found to contain hazardous materials, the Department will reimburse the Contractor for hazardous materials testing and will adjust working day charges if the Contractor can show that this work impacted the critical path.

10.1. Painted Steel Requirements. Coatings on existing steel contain hazardous materials unless otherwise shown on the plans. Remove paint and dispose of steel coated with paint containing hazardous materials in accordance with the following:

10.1.1. Removing Paint From Steel For contracts that are specifically for painting steel, Item 446, "Field Cleaning and Painting Steel" will be included as a pay item. Perform work in accordance with that item.

For projects where paint must be removed to allow for the dismantling of steel or to perform other work, the Department will provide for a separate contractor (third party) to remove paint containing hazardous materials prior to or during the Contract. Remove paint covering existing steel shown not to contain hazardous materials in accordance with Item 446, "Field Cleaning and Painting Steel."

10.1.2. Removal and Disposal of Painted Steel. For steel able to be dismantled by unbolting, paint removal will not be performed by the Department. The Department will remove paint, at locations shown on the plans or as agreed, for the Contractor's cutting and dismantling purposes. Utilize Department cleaned locations for dismantling when provided or provide own means of dismantling at other locations.

Painted steel to be retained by the Department will be shown on the plans. For painted steel that contains hazardous materials, dispose of the painted steel at a steel recycling or smelting facility unless otherwise shown on the plans. Maintain and make available to the Engineer invoices and other records obtained from the facility showing the received weight of the steel and the facility name. Dispose of steel that does not contain hazardous material coatings in accordance with federal, state and local regulations.

10.2. Asbestos Requirements. The plans will indicate locations or elements where asbestos containing materials (ACM) are known to be present. Where ACM is known to exist or where previously unknown ACM has been found, the Department will arrange for abatement by a separate contractor prior to or during the Contract. Notify the Engineer of proposed dates of demolition or removal of structural elements with ACM at least 60 days before beginning work to allow the Department sufficient time for abatement.

The Department of State Health Services (DSHS), Asbestos Programs Branch, is responsible for administering the requirements of the National Emissions Standards for Hazardous Air Pollutants, 40 CFR Part 61, Subpart M and the Texas Asbestos Health Protection Rules (TAHPR). Based on EPA guidance and regulatory background information, bridges are considered to be a regulated "facility" under NESHAP. Therefore, federal standards for demolition and renovation apply.

The Department is required to notify the DSHS at least 10 working days (by postmarked date) before initiating demolition or renovation of each structure or load bearing member shown on the plans. If the actual demolition or renovation date is changed or delayed, notify the Engineer in writing of the revised dates in sufficient time to allow for the Department's notification to DSHS to be postmarked at least 10 days in advance of the actual work.

Failure to provide the above information may require the temporary suspension of work under Article 8.4., "Temporary Suspension of Work or Working Day Charges," due to reasons under the control of the Contractor. The Department retains the right to determine the actual advance notice needed for the change in date to address post office business days and staff availability.

10.3. Lead Abatement. Provide traffic control as shown on the plans, and coordinate and cooperate with the third party and the Department for managing or removing hazardous materials. Work for the traffic control shown on the plans and coordination work will not be paid for directly but will be subsidiary to pertinent Items.

Special Provision to Item 7

Legal Relations and Responsibilities



Item 7, "Legal Relations and Responsibilities," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 7.7.2., "Texas Pollutant Discharge Elimination System (TPDES) Permits and Storm Water Pollution Prevention Plans (SWP3)," is voided and replaced by the following:

7.2. Texas Pollution Discharge Elimination System (TPDES) Permits and Storm Water Pollution Prevention Plans (SWP3).

7.2.1. Projects with less than one acre of soil disturbance including required associated project specific locations (PSL's) per TPDES GP TXR 150000.

No posting or filing will be required for soil disturbances within the right of way. Adhere to the requirements of the SWP3.

7.2.2. Projects with one acre but less than five acres of soil disturbance including required associated PSL's per TPDES GP TXR 150000.

The Department will be considered a primary operator for Operational Control Over Plans and Specifications as defined in TPDES GP TXR 150000 for construction activity in the right of way. The Department will post a small site notice along with other requirements as defined in TPDES GP TXR 150000 as the entity of having operational control over plans and specifications for work shown on the plans in the right of way.

The Contractor will be considered a Primary Operator for Day-to-Day Operational Control as defined in TPDES GP TXR 150000 for construction activity in the right of way. In addition to the Department's actions, the Contractor will post a small site notice along with other requirements as defined in TPDES GP TXR 150000 as the entity of having day-to-day operational control of the work shown on the plans in the right of way. This is in addition to the Contractor being responsible for TPDES GP TXR 150000 requirements for on- right of way and off- right of way PSL's. Adhere to all requirements of the SWP3 as shown on the plans. The Contractor will be responsible for Implement the SWP3 for the project site in accordance with the plans and specifications, TPDES General Permit TXR150000, and as directed.

7.2.3. Projects with 5 acres or more of soil disturbance including required associated PSL's per TPDES GP TXR 150000.

The Department will be considered a primary operator for Operational Control Over Plans and Specifications as defined in TPDES GP TXR 150000 for construction activities in the right of way. The Department will post a large site notice, file a notice of intent (NOI), notice of change (NOC), if applicable, and a notice of termination (NOT) along with other requirements per TPDES GP TXR 150000 as the entity having operational control over plans and specifications for work shown on the plans in the right of way.

The Contractor will be considered a primary operator for Day-to-Day Operational Control as defined in TPDES GP TXR 150000 for construction activities in the right of way. In addition to the Department's actions, the Contractor shall file a NOI, NOC, if applicable, and NOT and post a large site notice along with other requirements as the entity of having day-to-day operational control of the work shown on the plans in the right of way. This is in addition to the Contractor

being responsible for TPDES GP TXR 150000 requirements for on- right of way and off- right of way PSL's. Adhere to all requirements of the SWP3 as shown on the plans.

Special Provision to Item 7

Legal Relations and Responsibilities



Item 7, "Legal Relations and Responsibilities" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 19.1., Minimum Wage Requirements for Federally Funded Contracts. The second paragraph is voided and replaced by the following:

Submit electronic payroll records to the Engineer using the Department's payroll system.

Section 19.2., Minimum Wage Requirements for State Funded Contracts. The second paragraph is voided and replaced by the following:

Submit electronic payroll records to the Engineer using the Department's payroll system.

Special Provision to Item 7

Legal Relations and Responsibilities



Item 7, "Legal Relations and Responsibilities," of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 7.2.4., "Public Safety and Convenience." The first paragraph is deleted and replaced by the following.

Ensure the safety and convenience of the public and property as provided in the Contract and as directed. Keep existing roadways open to traffic or construct and maintain detours and temporary structures for safe public travel. Manage construction to minimize disruption to traffic. Maintain the roadway in a good and passable condition, including proper drainage and provide for ingress and egress to adjacent property.

If the construction of the project requires the closing of a highway, as directed, coordinate the closure with the Engineer and work to ensure all lanes and ramps possible are available during peak traffic periods before, during, and after significant traffic generator events to avoid any adverse economic impact on the municipalities during:

- dates or events as shown on the plans, and
- other dates as directed.

Special Provision to Item 007

Legal Relations and Responsibilities



Item 7, "Legal Relations and Responsibilities," of the Standard Specifications is amended with respect to the clauses cited below.

Section 2.6., "Barricades, Signs, and Traffic Handling," the first paragraph is voided and replaced by the following:

- 2.6. **Barricades, Signs, and Traffic Handling.** Comply with the requirements of Item 502 "Barricades, Signs, and Traffic Handling," and as directed. Provide traffic control devices that conform to the details shown on the plans, the TMUTCD, and the Department's Compliant Work Zone Traffic Control Device List maintained by the Traffic Safety Division. When authorized or directed, provide additional signs or traffic control devices not required by the plans.

Section 2.6.1., "Contractor Responsible Person and Alternative," is voided and replaced by the following:

- 2.6.1. **Contractor Responsible Person and Alternative.** Designate in writing, a Contractor's Responsible Person (CRP) and an alternate to be the representative of the Contractor who is responsible for taking or directing corrective measures regarding the traffic control. The CRP or alternate must be accessible by phone 24 hr. per day and able to respond when notified. The CRP and alternate must comply with the requirements of Section 2.6.5., "Training."

Section 2.6.2, "Flaggers," the first paragraph is voided and replaced by the following:

- 2.6.2. **Flaggers.** Designate in writing, a flagger instructor who will serve as a flagging supervisor and is responsible for training and assuring that all flaggers are qualified to perform flagging duties. Certify to the Engineer that all flaggers will be trained and make available upon request a list of flaggers trained to perform flagging duties.

Section 2.6.5, "Training," is voided and replaced by the following:

- 2.6.5. **Training.** Train workers involved with the traffic control using Department-approved training as shown on the "Traffic Control Training" Material Producer List.

Coordinate enrollment, pay associated fees, and successfully complete Department-approved training or Contractor-developed training. Training is valid for the period prescribed by the provider. Except for law enforcement personnel training, refresher training is required every 4 yr. from the date of completion unless otherwise specified by the course provider. The Engineer may require training at a frequency instead of the period prescribed based on the Department's needs. Training and associated fees will not be measured or paid for directly but are considered subsidiary to pertinent Items.

Certify to the Engineer that workers involved in traffic control and other work zone personnel have been trained and make available upon request a copy of the certification of completion to the Engineer. Ensure the following is included in the certification of completion:

- name of provider and course title,
- name of participant,
- date of completion, and
- date of expiration.

Where Contractor-developed training or a Department-approved training course does not produce a certification, maintain a log of attendees. Make the log available upon request. Ensure the log is legible and includes the following:

- printed name and signature of participant,
- name and title of trainer, and
- date of training.

2.6.5.1. **Contractor-developed Training.** Develop and deliver Contractor-developed training meeting the minimum requirements established by the Department. The outline for this training must be submitted to the Engineer for approval at the preconstruction meeting. The CRP or designated alternate may deliver the training instead of the Department-approved training. The work performed and materials furnished to develop and deliver the training will not be measured or paid for directly but will be considered subsidiary to pertinent Items.

2.6.5.1.1. **Flagger Training Minimum Requirements.** A Contractor's certified flagging instructor is permitted to train other flaggers.

2.6.5.1.2. **Optional Contractor-developed Training for Other Work Zone Personnel.** For other work zone personnel, the Contractor may provide training meeting the curriculum shown below instead of Department-approved training.

Minimum curriculum for Contractor-provided training is as follows:

Contractor-developed training must provide information on the use of personnel protection equipment, occupational hazards and health risks, and other pertinent topics related to traffic management. The type and amount of training will depend on the job duties and responsibilities. Develop training applicable to the work being performed. Develop training to include the following topics.

- The Life You Save May Be Your Own (or other similar company safety motto).
- Purpose of the training.
 - It's the Law.
 - To make work zones safer for workers and motorist.
 - To understand what is needed for traffic control.
 - To save lives including your own.
- Personal and Co-Worker Safety.
 - **High Visibility Safety Apparel.** Discuss compliant requirements; inspect regularly for fading and reduced reflective properties; if night operations are required, discuss the additional and appropriate required apparel in addition to special night work risks; if moving operations are underway, discuss appropriate safety measures specific to the situation and traffic control plan.
 - **Blind Areas.** A blind area is the area around a vehicle or piece of construction equipment not visible to the operators, either by line of sight or indirectly by mirrors. Discuss the "Circle of Safety" around equipment and vehicles; use of spotters; maintain eye contact with equipment operators; and use of hand signals.
 - **Runovers and Backovers.** Remain alert at all times; keep a safe distance from traffic; avoid turning your back to traffic and if you must then use a spotter; and stay behind protective barriers, whenever possible. Note: It is not safe to sit on or lean against a concrete barrier, these barriers can deflect four plus feet when struck by a vehicle.
 - Look out for each other, warn co-workers.
 - Be courteous to motorists.
 - Do not run across active roadways.
 - Workers must obey traffic laws and drive courteously while operating vehicles in the work zones.
 - Workers must be made aware of company distracted driving policies.
- **Night Time Operations.** Focus should be placed on projects with a nighttime element.

- **Traffic Control Training.** Basics of Traffic Control.
 - Identify work zone traffic control supervisor and other appropriate persons to report issues to when they arise.
 - Emphasize that work zone traffic control devices must be in clean and in undamaged condition. If devices have been hit but not damaged, put back in their correct place and report to traffic control supervisor. If devices have been damaged, replace with new one and report to traffic control supervisor. If devices are dirty, faded or have missing or damaged reflective tape clean or replace and report to traffic control supervisor. Show examples of non-acceptable device conditions. Discuss various types of traffic control devices to be used and where spacing requirements can be found.
 - **Channelizing Devices and Barricades with Slanted Stripes.** Stripes are to slant in the direction you want traffic to stay or move to; demonstrate this with a device.
 - **Traffic Queuing.** Workers must be made aware of traffic queuing and the dangers created by it. Workers must be instructed to immediately notify the traffic control supervisor and other supervisory personnel if traffic is queuing beyond advance warning sign and devices or construction limits.
 - **Signs.** Signs must be straight and not leaning. Report problems to the traffic control supervisor or other as designated for immediate repair. Covered signs must be fully covered. If covers are damaged or out of place, report to traffic control supervisor or other as designated.

Special Provision to Item 8 Prosecution and Progress



Item 8, "Prosecution and Progress" of the Standard Specification is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 8.2., "Subcontracting," is supplemented by the following paragraph, which is added as paragraph six to this article:

The Contractor certifies by signing the Contract that the Contractor will not enter into any subcontract with a subcontractor that is not registered in the Department of Homeland Security's (DHS) E-Verify system. Require that all subcontractors working on the project register and require that all subcontractors remain active in the DHS E-Verify system until their work is complete on the project.

Special Provision to Item 8 Prosecution and Progress



Item 8, "Prosecution and Progress" of the Standard Specifications is amended with respect to the clause cited below. No other clauses or requirements of this Item are waived or changed.

Article 8.7.2., "Wrongful Default," is revised and replaced by the following:

If it is determined after the Contractor is declared in default, that the Contractor was not in default, the rights and obligations of all parties will be the same as if termination had been issued for the convenience of the public as provided in Article 8.8 "Termination of Contract."

Special Provision to Item 8

Prosecution and Progress



Item 8, "Prosecution and Progress," of the Standard Specifications, is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 8.6., "Failure to Complete Work on Time," is supplemented by the following:

8.6.1. Lane Closure Assessment Fees.

Monetary assessment, as shown on the plans, will be made against the Contractor for any lane closure or obstruction that overlaps into the peak hour traffic for each time increment defined on the plans or portion thereof, per lane, regardless of the length of lane closure or obstruction.

8.6.1.1. Definition of Terms. For this Contract, the following definitions apply:

8.6.1.1.1. Time increment. Any continuous defined increment of time period or portion thereof for a period beginning at that point when lanes are closed or obstructed by the Contractor's operations.

8.6.1.1.2. Assessment Fee. The amount shown on the proposal for each defined time increment, representing the average cost of interference and inconvenience to the road user for each lane closed or obstructed during peak hour traffic. The Engineer may allow a proportional fee assessment for closures that do not involve an entire defined time increment.

8.6.1.1.3. Closure or Obstruction. When the Contractor's operations result in a reduced lane width of the travel way or shoulder less than that specified on the plan documents.

8.6.1.1.4. Peak Hour Traffic Times. Schedule of days and times described in the General Notes, when lane closures or obstructions are not allowed.

8.6.1.2. Fee Calculation and Collection. The assessment fee will be deducted from the amount due to the Contractor on the monthly construction estimate, and thus retained by the Department. The Engineer will determine the time of overlap of lane closures or obstructions for calculating the assessment fee. The assessment fee is based on road user costs and is assessed not as a penalty, but for added expense incurred by the traveling public.

Special Provision to Item 009

Measurement and Payment



Item 009 "Measurement and Payment" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 9.5., "PROGRESS PAYMENTS" is supplemented with the following:

It is the Department's desire to pay a Contractor for work through the last working day of the month; however, the use of early cut-off dates for monthly estimates and MOH is a project management practice to manage workload at the Area Office level. Approval for using early cut-off dates is at the District's discretion. The earliest cut-off date for estimates is the 25th of the month.

Article 9.6., "PAYMENT FOR MATERIAL ON HAND (MOH)" first paragraph is amended as follows:

If payment for MOH is desired, request compensation for the invoice cost of acceptable nonperishable materials that have not been used in the work before the request, and that have been delivered to the work location or are in acceptable storage places. Nonperishable materials are those that do not have a shelf life or whose characteristics do not materially change when exposed to the elements. Include only materials that have been sampled, tested, approved, or certified, and are ready for incorporation into the work. Only materials which are completely constructed or fabricated on the Contractor's order for a specific Contract and are so marked and on which an approved test report has been issued are eligible. Payment for MOH may include the following types of items: concrete traffic barrier, precast concrete box culverts, concrete piling, reinforced concrete pipe, and illumination poles. Any repairs required after fabricated materials have been approved for storage will require approval of the Engineer before being made and will be made at the Contractor's expense. Include only those materials and products, when cumulated under an individual item or similar bid items, that have an invoice cost of at least \$1,000 in the request for MOH payment (e.g. For MOH eligibility, various sizes of conductor are considered similar bid items and may be cumulated to meet the threshold; for small roadside signs, the sign supports, mounting bolts, and the sign face is considered one bid item or similar bid items for more than one pay item for sign supports.) Requests for MOH are to be submitted at least two days before but not later than the estimate cutoff date unless otherwise agreed. If there is a need to request MOH after the established cut-off date, the district can make accommodation as the need arises. This needed accommodation is to be the exception, though, and not the rule.

Special Provision to Item 9

Measurement and Payment



Item 9, "Measurement and Payment" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 9.7.1.4.3., "Standby Equipment Costs," is voided and replaced by the following:

7.1.4.3. **Standby Equipment Costs.** Payment for standby equipment will be made in accordance with Section 9.7.1.4., "Equipment," except that the 15% markup will not be allowed and that:

Section 7.1.4.3.1., "Contractor-Owned Equipment," is voided and replaced by the following:

7.1.4.3.1. **Contractor-Owned Equipment.** For Contractor-owned equipment:

- Standby will be paid at 50% of the monthly Equipment Watch rate after the regional and age adjustment factors have been applied. Operating costs will not be allowed. Calculate the standby rate as follows.

$$\text{Standby rate} = (\text{FHWA hourly rate} - \text{operating costs}) \times 50\%$$

- If an hourly rate is needed, divide the monthly *Equipment Watch* rate by 176.
- No more than 8 hr. of standby will be paid during a 24-hr. day period, nor more than 40 hr. per week.
- Standby costs will not be allowed during periods when the equipment would have otherwise been idle.

Special Provision to Item 247

Flexible Base



Item 247, "Flexible Base" of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Section 2.4., "Certification." This section is added.

Personnel certified by the Department-approved soils and base certification program must conduct all sampling, field testing, and laboratory testing required by the following:

- Section 2.1, "Aggregate,"
- Section 2.1.3.2, "Recycled Material (Including Crushed Concrete) Requirements,"
- Section 4.3, "Compaction," for measuring flexible base depth, and
- Section 4.3.2, "Density Control," for determining the roadway density and moisture content.

Supply the Engineer with a list of certified personnel and copies of their current certificates before laboratory and field testing is performed and when personnel changes are made. At any time during the project, the Engineer may perform production tests as deemed necessary in accordance with Item 5, "Control of the Work."

Section 2.5., "Reporting and Responsibilities." This section is added.

Use Department-provided templates to record and calculate all test data. Obtain the current version of the templates at <http://www.txdot.gov/inside-txdot/forms-publications/consultants-contractors/forms/site-manager.html> or from the Engineer. The Engineer and the Contractor will provide any available test results to the other party when requested. Record and electronically submit all test results and pertinent information on Department-provided templates.

Section 2.6., "Sampling." This section is added.

The Engineer will sample flexible base from stockpiles located at the production site or at the project location in accordance with [Tex-400-A](#), Section 5.3. The Engineer will label the sample containers as "Engineer," "Contractor" or "Supplier," and "CST/M&P." Witness the sampling and take immediate possession of the sample containers labeled "Contractor" or "Supplier." The Engineer will maintain custody of the samples labeled "CST/M&P" until testing and reporting is completed.

Section 2.7., "Referee Testing." This section is added.

CST/M&P is the referee laboratory. The Contractor may request referee testing when the Engineer's test results fail to meet any of the material requirements listed in Table 1. Make the request via email within 5 working days after receiving test results from the Engineer. Submit test reports signed and sealed by a licensed professional engineer from a commercial laboratory listed on the Department's Material Producer List (MPL) of laboratories approved to perform compaction and triaxial compression testing located at <http://ftp.dot.state.tx.us/pub/txdot-info/cmd/mpl/complabs.pdf>. Submit completed test reports electronically on Department-provided templates in their original format. The referee laboratory will report test results to the Engineer within the allowable number of working days listed in Table 2 from the time the referee laboratory receives the samples. It is at the discretion of the Engineer or the referee laboratory to deny a referee request upon review of the test reports provided by the Contractor.

Table 2
Number of Allowable Working Days to Report Referee Test Results

| Material Property | Test Method | Working Days |
|---|------------------------------|--------------|
| Gradation | Tex-110-E, Part I | 5 |
| Liquid Limit (Multi-Point Method) | Tex-104-E, Part I | 5 |
| Plasticity Index | Tex-106-E | 5 |
| Wet Ball Mill Value | Tex-116-E, Parts I and II | 5 |
| Wet Ball Mill, % Increase passing #40 sieve | | |
| Compressive Strength ¹ | Tex-117-E, Part II | 6 |
| Compressive Strength ² | Tex-117-E | 12 |

1. Moisture-Density curve provided by the District
2. Moisture-Density curve determined by the referee laboratory

Section 4.6., "Ride Quality." This section is voided and replaced by the following.

Measurement of ride quality only applies to the final travel lanes that receive a 1- or 2-course surface treatment for the final riding surface, unless otherwise shown on the plans. Measure the ride quality of the base course either before or after the application of the prime coat, as directed, and before placement of the surface treatment. Use a certified profiler operator from the Department's MPL. When requested, furnish the Engineer documentation for the person certified to operate the profiler.

Provide all profile data to the Engineer in electronic data files within 3 days of measuring the ride quality using the format specified in [Tex-1001-S](#). The Engineer will use Department software to evaluate longitudinal profiles to determine areas requiring corrective action. Correct 0.1-mi.sections for each wheel path having an average international roughness index (IRI) value greater than 100 in. per mile to an IRI value of 100 in. per mile or less, unless otherwise shown on the plans.

Re-profile and correct sections that fail to maintain ride quality, as directed. Correct re-profiled sections until specification requirements are met, as approved. Perform this work at no additional expense to the Department.

Special Provision to Item 420

Concrete Substructure



Item 420, "Concrete Substructures" of the Standard Specifications is amended with respect to the clause cited below. No other clauses or requirements of this Item are waived or changed.

Article 420.6., "Payment." The first paragraph is replaced by the following:

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for the class of concrete and element identified and by the special designation when appropriate. This price is full compensation for furnishing, hauling, and mixing concrete materials; furnishing, bending, fabricating, splicing, welding and placing the required reinforcement; clips, blocks, metal spacers, ties, wire, or other materials used for fastening reinforcement in place; placing, finishing, and curing concrete; mass placement controls; applying ordinary surface finish; furnishing and placing drains, metal flashing strips, and expansion-joint material; excavation, subgrade preparation; and forms and falsework, equipment, labor, tools, and incidentals.

Special Provision to Item 421

Hydraulic Cement Concrete



Item 421, "Hydraulic Cement Concrete" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 421.2., "Materials," the second sentence of the first paragraph is voided and replaced by the following.

Provide aggregates from sources listed in the Department's Concrete Rated Source Quality Catalog (CRSQC).

Article 421.2.2., Supplementary Cementing Materials (SCM), is voided and replaced with the following.

Supplementary Cementing Materials (SCM).

- **Fly Ash.** Furnish fly ash, Modified fly ash (MFA), and Ground Bottom Ash (GBA) conforming to [DMS-4610](#), "Fly Ash."
- **Slag Cement.** Furnish Slag Cement conforming to [DMS-4620](#), "Slag Cement."
- **Silica Fume.** Furnish silica fume conforming to [DMS-4630](#), "Silica Fume."
- **Metakaolin.** Furnish metakaolin conforming to [DMS-4635](#), "Metakaolin."

Article 421.3.1.3., "Agitators and Truck and Stationary Mixers," the first paragraph is voided and replaced by the following.

Provide stationary and truck mixers capable of combining the ingredients of the concrete into a thoroughly mixed and uniform mass and capable of discharging the concrete so that the requirements of [Tex-472-A](#) are met.

Article 421.3.1.3., "Agitators and Truck and Stationary Mixers," is supplemented with the following.

Truck mixers with automated water and chemical admixture measurement and slump and slump flow monitoring equipment meeting the requirement of ASTM C 94 will be allowed. Provide data every 6 mo. substantiating the accuracy of slump, slump flow, temperature, water, and chemical admixture measurements. The slump measured by the automated system must be within 1 in. of the slump measured in accordance with [Tex-415-A](#). The concrete temperature measured by the automated system must be within 1°F of concrete temperature measured in accordance with [Tex-422-A](#). The Engineer will not use the automated measurements for acceptance.

Article 421.4.2, "Mix Design Proportioning," Table 8 is voided and replaced by the following.

Table 8
Concrete Classes

| Class of Concrete | Design Strength, ¹ Min f'_c (psi) | Max w/cm Ratio | Coarse Aggregate Grades ^{2,3,4} | Cement Types | Mix Design Options | Exceptions to Mix Design Options | General Usage ⁵ |
|-------------------|---|----------------|--|-------------------------------------|--------------------|---|--|
| A | 3,000 | 0.60 | 1-4, 8 | I, II, I/II, IL, IP, IS, IT, V | 1, 2, 4, & 7 | When the cementitious material content does not exceed 520 lb./cu. yd., any fly ash listed in the MPL may be used at a cement replacement of 20% to 50%. | Curb, gutter, curb & gutter, conc. retards, sidewalks, driveways, back-up walls, anchors, non-reinforced drilled shafts |
| B | 2,000 | 0.60 | 2-7 | | | | Riprap, traffic signal controller foundations, small roadside signs, and anchors |
| C ⁶ | 3,600 | 0.45 | 1-6 | I, II, I/II, IP, IL, IS, IT, V | 1-8 | | Drilled shafts, bridge substructure, traffic rail, culverts except top slab of direct traffic culverts, headwalls, wing walls, inlets, manholes, traffic barrier |
| E | 3,000 | 0.50 | 2-5 | I, II, I/II, IL, IP, IS, IT, V | 1-8 | When the cementitious material content does not exceed 520 lb./cu. yd., any fly ash listed in the MPL may be used at a cement replacement of 20% to 50%. | Seal concrete |
| F ⁶ | Note ⁷ | 0.45 | 2-5 | I, II, I/II, IP, IL, IS, IT, V | | | Railroad structures; occasionally for bridge piers, columns, bents, post-tension members |
| H ⁶ | Note ⁷ | 0.45 | 3-6 | I, II, I/II, III, IP, IL, IS, IT, V | 1-4, 8 | Mix design options 1-8 allowed for cast-in-place concrete and the following precast elements unless otherwise stated in the plans: <ul style="list-style-type: none"> ■ Bridge Deck Panels, ■ Retaining Wall Systems, ■ Coping, ■ Sound Walls, ■ Wall Columns, ■ Traffic Rail, ■ Traffic Barrier, ■ Long/Arch Span Culverts, and ■ precast concrete products included in Items 462, 464, and 465. Do not use Type III cement in mass placement concrete. Up to 20% of blended cement may be replaced with listed SCMs when Option 4 is used for precast concrete. Options 6, & 7 allowed for cast-in-place Class H concrete. | Precast concrete, post-tension members |
| S ⁶ | 4,000 | 0.45 | 2-5 | I, II, I/II, IP, IL, IS, IT, V | 1-8 | | Bridge slabs, top slabs of direct traffic culverts, approach slabs |
| P | See Item 360, "Concrete Pavement." | 0.50 | 2-3 | I, II, I/II, IL, IP, IS, IT, V | 1-8 | When the cementitious material content does not exceed 520 lb./cu. yd., any fly ash listed in the MPL may be used at a cement replacement of 20% to 50%. | Concrete pavement |

| Class of Concrete | Design Strength, ¹ Min f_c (psi) | Max w/cm Ratio | Coarse Aggregate Grades ^{2,3,4} | Cement Types | Mix Design Options | Exceptions to Mix Design Options | General Usage ⁵ |
|----------------------------------|--|----------------|--|-------------------------------------|--------------------|---|---|
| CO ⁶ | 4,600 | 0.40 | 6 | | 1-8 | | Bridge deck concrete overlay |
| LMC ⁶ | 4,000 | 0.40 | 6-8 | | | | Latex-modified concrete overlay |
| SS ⁶ | 3,600 | 0.45 | 4-6 | I, II, I/II, IP, IL, IS, IT, V | 1-8 | Use a minimum cementitious material content of 658 lb./cu. yd. of concrete. Limit the alkali loading to 4.0 lbs./cu. yd. or less when using option 7. | Slurry displacement shafts, underwater drilled shafts |
| K ⁶ | Note ⁷ | 0.40 | Note ⁷ | I, II, I/II, III, IP, IL, IS, IT, V | 1-8 | | Note ⁷ |
| HES | Note ⁷ | 0.45 | Note ⁷ | I, IL, II, I/II, III | | Mix design options do not apply. 700 lb. of cementitious material per cubic yard limit does not apply. | Concrete pavement, concrete pavement repair |
| "X" (HPC) _{6,8,9} | Note ¹⁰ | 0.45 | Note ¹⁰ | I, II, I/II, III, IP, IL, IS, IT, V | 1-4, & 8 | Maximum fly ash replacement for Option 3 may be increased to 50%. Up to 20% of a blended cement may be replaced with listed SCMs for Option 4. Do not use Option 8 for precast concrete. | |
| "X" (SRC) _{6,8,9} | Note ¹⁰ | 0.45 | Note ¹⁰ | I/II, II, IP, IL, IS, IT, V | 1-4, & 7 | When using fly ash, only use fly ashes allowed for SRC as listed in the Fly Ash MPL. Type III-MS may be used where allowed. Type I and Type III cements may be use when fly ashes allowed for SRC as listed in the Fly Ash MPL are used, and with a maximum w/cm of 0.40. Up to 20% of blended cement may be replaced with listed SCMs when Option 4 is used for precast concrete. Use Option 7 for precast concrete where allowed. | |

- Design strength must be attained within 56 days.
- Do not use Grade 1 coarse aggregate except in massive foundations with 4 in. minimum clear spacing between reinforcing steel bars, unless otherwise permitted. Do not use Grade 1 aggregate in drilled shafts.
- Use Grade 8 aggregate in extruded curbs unless otherwise approved.
- Other grades of coarse aggregate maybe used in non-structural concrete classes when allowed by the Engineer.
- For information only.
- Structural concrete classes.
- As shown on the plans or specified.
- "X" denotes class of concrete shown on the plans or specified.
- (HPC): High Performance Concrete, (SRC): Sulfate Resistant Concrete.
- Same as class of concrete shown on the plans.

Article 421.4.2.2., "Aggregates," is supplemented by the following.

Use the following equation to determine if the aggregate combination meets the sand equivalency requirement when blending fine aggregate or using an intermediate aggregate:

$$\frac{(SE_1 \times P_1) + (SE_2 \times P_2) + (SE_{ia} \times P_{ia})}{100} \geq 80\%$$

where:

SE_1 = sand equivalency (%) of fine aggregate 1

SE_2 = sand equivalency (%) of fine aggregate 2

SE_{ia} = sand equivalency (%) of intermediate aggregate passing the 3/8 in. sieve

P_1 = percent by weight of fine aggregate 1 of the fine aggregate blend

P_2 = percent by weight of fine aggregate 2 of the fine aggregate blend

P_{ia} = percent by weight of intermediate aggregate passing the 3/8 in. sieve

Article 421.4.2.3., “Chemical Admixtures,” the second paragraph is voided and replaced with the following.

Use a 30% calcium nitrite solution when a corrosion-inhibiting admixture is required. Dose the admixture at the rate of gallons of admixture per cubic yard of concrete shown on the plans. Use set retarding admixtures, as needed, to control setting time to ensure concrete containing corrosion inhibiting admixtures remain workable for the entire duration of the concrete placement. Perform setting time testing and slump loss testing during trial batch testing.

Article 421.4.2.5., “Slump,” the second paragraph is voided and not replaced. Table 9 is voided and replaced with below:

Table 9
Placement Slump Requirements

| General Usage | Placement Slump Range, ^{1,2} in. |
|--|--|
| Walls (over 9 in. thick), caps, columns, piers | 3 to 7 |
| Bridge slabs, top slabs of direct traffic culverts, approach slabs, concrete overlays, latex-modified concrete for bridge deck overlays | 3 to 6 |
| Inlets, manholes, walls (less than 9 in. thick), bridge railing, culverts, concrete traffic barrier, concrete pavement (formed) | 4 to 6 |
| Precast concrete | 4 to 9 |
| Underwater concrete placements | 6 to 8-1/2 |
| Drilled shafts, slurry displaced and underwater drilled shafts | See Item 416, “Drilled Shaft Foundations.” |
| Curb, gutter, curb and gutter, concrete retards, sidewalk, driveways, seal concrete, anchors, riprap, small roadside sign foundations, concrete pavement repair, concrete repair | As approved |

1. Maximum slump values may be increase above these values shown using chemical admixtures, provided the admixture treated concrete has the same or lower water-to-cementitious ratio and does not exhibit segregation or excessive bleeding. Request approval to increase slump limits in advance for proper evaluation by the Engineer.
2. For fiber reinforced concrete, perform slump before addition of fibers.

Article 421.4.2.6., “Mix Design Options”, is voided and replaced with the following.

Option 1. Replace cement with at least the minimum dosage listed in the Fly Ash MPL for the fly ash used in the mixture. Do not replace more than 50% of the cement with fly ash.

Option 2. Replace 35% to 50% of the cement with slag cement.

Option 3. Replace 35% to 50% of the cement with a combination of fly ash, slag cement, MFA, metakaolin, or at least 3% silica fume; however, no more than 35% may be fly ash, and no more than 10% may be silica fume.

Option 4. Use Type IP, Type IS, or Type IT cement as allowed in Table 8 for each class of concrete. Up to 10% of a Type IP, Type IS, or Type IT cement may be replaced with fly ash, slag cement, or silica fume. Use no more than 10% silica fume in the final cementitious material mixture if the Type IT cement contains silica fume, and silica fume is used to replace the cement.

Option 5. Option 5 is left intentionally blank.

Option 6. Use a lithium nitrate admixture at a minimum dosage determined by testing conducted in accordance with Tex-471-A. Before use of the mix, provide an annual certified test report signed and sealed by a licensed professional engineer, from a laboratory on the Department's MPL, certified by the Construction Division as being capable of testing according to Tex-471-A.

Option 7. Ensure the total alkali contribution from the cement in the concrete does not exceed 3.5 lb. per cubic yard of concrete when using hydraulic cement not containing SCMs calculated as follows:

$$\text{lb. alkali per cu. yd.} = \frac{(\text{lb. cement per cu. yd.}) \times (\% \text{ Na}_2\text{O equivalent in cement})}{100}$$

In the above calculation, use the maximum cement alkali content reported on the cement mill certificate.

Option 8. Use Table 10 when deviating from Options 1–3 or when required by the Fly Ash MPL. Perform required testing annually and submit results to the Engineer. Laboratories performing ASTM C1260, ASTM C1567, and ASTM C1293 testing must be listed on the Department's MPL. Before use of the mix, provide a certified test report signed and sealed by a licensed professional engineer demonstrating the proposed mixture conforms to the requirements of Table 10.

Provide a certified test report signed and sealed by a licensed professional engineer, when HPC is required, and less than 20% of the cement is replaced with SCMs, demonstrating ASTM C1202 test results indicate the permeability of the concrete is less than 1,500 coulombs tested immediately after either of the following curing schedules:

- Moisture cure specimens 56 days at 73°F.
- Moisture cure specimens 7 days at 73°F followed by 21 days at 100°F.

Table 10
Option 8 Testing and Mix Design Requirements

| Scenario | ASTM C1260 Result | | Testing Requirements for Mix Design Materials or Prescriptive Mix Design Options |
|----------|---------------------------|---------------------------------------|--|
| | Mix Design Fine Aggregate | Mix Design Coarse Aggregate | |
| A | > 0.10% | > 0.10% | Determine the dosage of SCMs needed to limit the 14-day expansion of each aggregate ¹ to 0.10% when tested individually in accordance with ASTM C1567. |
| B | ≤ 0.10% | ≤ 0.10% | Use the minimum replacement listed in the Fly Ash MPL, or When Option 8 is listed on the MPL, use a minimum of 40% fly ash with a maximum CaO ² content of 25%, or Use any ternary combination which replaces 35% to 50% of cement. |
| | ≤ 0.10% | ASTM C1293 1 yr. Expansion ≤ 0.04% | Use a minimum of 20% of any fly ash; or Use any ternary combination which replaces 20% to 50% of cement. |
| C | ≤ 0.10% | > 0.10% | Determine the dosage of SCMs needed to limit the 14-day expansion of coarse and intermediate ¹ aggregate to 0.10% when tested individually in accordance with ASTM C1567. |
| D | > 0.10% | ≤ 0.10% | Use the minimum replacement listed in the Fly Ash MPL, or When Option 8 is listed on the MPL, use a minimum of 40% fly ash with a maximum CaO ² content of 25%, or Use any ternary combination which replaces 35% to 50% of cement. |
| | > 0.10% | ASTM C1293 1 yr. Expansion ≤ 0.04% | Determine the dosage of SCMs needed to limit the 14-day expansion of each fine aggregate to 0.10% when individually tested in accordance with ASTM C1567. |

1. Intermediate size aggregates will fall under the requirements of mix design coarse aggregate.
2. Average the CaO content from the previous ten values as listed on the test certificate.

Article 421.4.2.7., "Optimized Aggregate Gradation (OAG) Concrete," the first sentence of the first paragraph is voided and replaced by the following.

The gradations requirements in Table 4 and Table 6 do not apply when OAG concrete is specified or used by the Contractor unless otherwise shown on the plans.

The fineness modulus for fine aggregate listed in Table 5, does not apply when OAG Concrete is used,

Article 421.4.6.2., “Delivering Concrete,” the third paragraph is supplemented by the following.

When truck mixers are equipped with automated water or chemical admixture measurement and slump or slump flow monitoring equipment, the addition of water or chemical admixtures during transit is allowed. Reports generated by this equipment must be submitted to the Engineer daily.

Article 421.4.6.2., “Delivering Concrete,” the fifth paragraph is voided and replaced with the following. Begin the discharge of concrete delivered in truck mixers within the times listed in Table 14. Concrete delivered after these times, and concrete that has not begun to discharge within these times will be rejected

Article 421.4.8.3., “Testing of Fresh Concrete,” is voided and replaced with the following.

Testing Concrete. The Engineer, unless specified in other Items or shown on the plans, will test the fresh and hardened concrete in accordance with the following methods:

- Slump. [Tex-415-A](#);
- Air Content. [Tex-414-A](#) or [Tex-416-A](#);
- Temperature. [Tex-422-A](#);
- Making and Curing Strength Specimens. [Tex-447-A](#);
- Compressive Strength. [Tex-418-A](#);
- Flexural Strength. [Tex-448-A](#); and
- Maturity. [Tex-426-A](#).

Flexural strength and maturity specimens will not be made unless specified in other items or shown on the plans.

Concrete with slump less than minimum required after all addition of water withheld will be rejected, unless otherwise allowed by the Engineer. Concrete with slump exceeding maximum allowed may be used at the contractor’s option. If used, Engineer will make, test, and evaluate strength specimens as specified in Article 421.5., “Acceptance of Concrete.” Acceptance of concrete not meeting air content or temperature requirements will be determined by Engineer. Fresh concrete exhibiting segregation and excessive bleeding will be rejected.

Article 421.4.8.3.1. “Job-Control Testing,” is voided and not replaced.

Special Provision to Item 440

Reinforcement for Concrete



Item 440, "Standard Specification Title" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 440.2., "Materials" is supplemented with the following:

- 2.14. Provide zinc-coated, hot-dip galvanized Class I or II steel reinforcement conforming to ASTM A767, Grades 60 or 75 when shown on the plans and as allowed.
- 2.15. Provide continuously hot-dip galvanized reinforcement (CGR) conforming to ASTM A1094 steel reinforcement, Grades 60 or 75 when shown on the plans and as allowed.

Article 440.2.5., "Weldable Reinforcing Steel" is supplemented with the following:

All welding operations must be performed prior to hot-dip galvanizing.

Article 440.2.8., "Mechanical Couplers" is supplemented with the following:

Provide hot-dipped or mechanically galvanized couplers when splicing galvanized reinforcing or continuously galvanized reinforcing.

Article 440.2.11., "Low-Carbon, Chromium Reinforcing Steel." The first sentence is voided and replaced by the following:

Provide deformed steel bars conforming to ASTM A1035, Grade 100, Type CS when low-carbon, chromium reinforcing steel is required on the plans. Type CM will only be permitted if specified on the plans.

Article 440.3.1., "Bending" is supplemented with the following:

Do not bend hot-dip galvanized reinforcement. Only minor positioning adjustments are permitted.

Bending of continuously galvanized reinforcement is permitted after galvanizing.

Article 440.3.5, "Placing" the following will be added to paragraph four.

Use Class 1 or 1A supports with continuously galvanized reinforcing. Provide epoxy or plastic-coated tie wires and clips for use with epoxy coated reinforcing steel.

Article 440.3.6.3., "Repairing Coating" is supplemented with the following:

Repair damaged galvanized surfaces in accordance with Article 445.3.5.2. "Repair Processes."

Special Provision to Item 441

Steel Structures



Item 441, "Steel Structures" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 441.2.2., "Approved Electrodes and Flux-Electrode Combinations," is voided and replaced with the following:

Use only electrodes and flux-electrode combinations conforming to AWS A5 specifications, and pertinent classifications for the applicable welding processes. When requested, submit a current Certificate of Conformance (COC) containing all test results as required by the applicable AWS A5 specification and welding code. Provide proof of Buy America compliance for welding consumables when requested. For bridge main member fabrication, submit the COC annually.

Section 441.2.3., "High-Strength Bolts," is revised and replaced by the following:

Use fasteners that meet Item 447, "Structural Bolting." Use galvanized fasteners on field connections of bridge members when ASTM F3125-Grade A325 bolts are specified, and steel is painted.

Section 441.3.1.5.1., "Plants," The second and third paragraphs are voided and replaced with the following:

Fabrication plants that produce the following non-bridge steel members must be approved in accordance with DMS-7380, "Steel Non-Bridge Member Fabrication Plant Qualification."

- Item 610, "Roadway Illumination Poles"
- Item 613, "High Mast Illumination Poles"
- Item 614, "High Mast Rings and Support Assemblies"
- Item 650, "Overhead Sign Support Structures"
- Item 654, "Sign Walkways"
- Item 686, "Traffic Signal Poles"
- Special Specification 6064, "Intelligent Transportation System (ITS) Poles."

The Materials and Tests Division (MTD) maintains a list of approved non-bridge fabrication plants on the Department MPL that produce these members.

Section 441.3.1.6.1., "Erection Drawings," the third paragraph is voided and replaced with the following:

Perform erection engineering evaluation of the structural adequacy and stability of constructing the bridge system for each step of the steel erection.

Section 441.3.1.5.3., "Nondestructive Testing (NDT)," is voided and replaced with the following:

Personnel performing NDT must be qualified in accordance with the applicable AWS code and the employer's Written Practice. Level III personnel who qualifies Level I and Level II technicians must be certified by ASNT for which the NDT Level III is qualified. In addition, NDT technicians must pass hands-on tests that MTD administers. This will remain current provided they continue to perform testing on Department materials as evidenced by test reports requiring their signature. A technician who fails any of the hands-on tests must wait 3 mo. or as approved otherwise before retesting. Qualification to perform NDT will be revoked when the technician's employment is terminated or when the technician goes 6 mo. without performing a test on a Department project. The technician must pass a new hands-on test to be re-certified. Testing of similar weld joints for non-Department projects may be considered by the Engineer instead of re-testing provided enough documentation is submitted with the signature of the project's Engineer. These requirements also apply to testing agencies, and individual third-party contractors.

Section 441.3.1.5.4., “Welding Procedure Specification Qualification Testing,” is voided and replaced by the following:

For Fabricators qualified in accordance with DMS-7370, DMS-7380, or DMS-7395, laboratories performing procedure qualification testing for welding procedure specifications (WPSs) must be accredited by a nationally recognized agency that performs testing in accordance with ISO/International Electrotechnical Commission (IEC) 17025 in the mechanical field of testing.

Section 441.3.1.9., “Material Identification,” is amended to include the following paragraph:

Low-stress stencil marks must have a radius instead of a sharp point. Acceptable stencils include dot, vibration, and rounded-V stencils. Label these stencils so that they are easily distinguishable from other stencils that are not low-stress.

Section 441.3.2.4.1., “Flange Tilt,” the last sentence is voided and replaced with the following:

Minor jacking that does not deform the material will be permitted.

Section 441.3.2.5.3., “Magnetic Particle Testing,” is voided and replaced with the following:

Use alternating current (AC) when using the yoke method unless otherwise approved. Welds may be further evaluated with half-wave rectified DC for subsurface indications. Centerline cracking may be detected with aluminum prod method when approved.

Section 441.3.5.8., “Hammering,” is added to state the following:

Do not perform hammering on any portion of the member that causes the material to permanently deform. Avoid damage to the material by measures such as use of brass or aluminum hammers or by padding the area to be hammered.

Section 441.3.8.1., “Shop Painting,” is amended to include with the following paragraph:

Measure the anchor profile after blast cleaning at random locations along the thermal cut surfaces. If specified anchor profile is not achieved over the entire flame cut surface, grind the edges and re-blast to achieve the required anchor pattern.

Section 441.3.9., “Handling and Storage of Materials,” The second sentence of the second paragraph is replaced by the following:

Keep materials clean and avoid damaging of the applied coating.

Special Provision to Item 442

Metal for Structures



Item 442, "Metal for Structures" of the Standard Specifications is amended with respect to the clause cited below. No other clauses or requirements of this Item are waived or changed.

Section 442.2.1.3.3., "Fasteners." The first sentence of the first paragraph is replaced by the following:

Fasteners. Provide high-strength bolts that meet ASTM F3125-Grade A325 unless otherwise shown on the plans.

Section 442.2.1.3.3., "Fasteners." The third paragraph is deleted and not replaced.

Special Provision to Item 448

Structural Field Welding



Item 448, "Structural Field Welding" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 448.2., "Materials," the third paragraph is voided and replaced with the following:

Use only electrodes and flux-electrode combinations conforming to AWS A5 specifications and pertinent classifications for the applicable welding processes. When requested, submit a current Certificate of Conformance (COC) containing acceptable wording indicating Buy America compliance and all tests required by the applicable AWS specifications and welding codes. Tests must be conducted on electrodes of the same class, size, and brand; and manufactured by the same process and with the same materials as the electrodes to be furnished.

Special Provision to Item 449

Anchor Bolts



Item 449, "Anchor Bolts" of the Standard Specifications is amended with respect to the clause cited below. No other clauses or requirements of this Item are waived or changed.

Section 449.2.1., "Bolts and Nuts." Table 1 is replaced by the following:

Table 1
Bolt and Nut Standards

| Specified Anchor Bolt Category | Bolt Standards | Nut Standards |
|--------------------------------|---|--|
| Mild steel | ASTM A307 Gr. A, F1554 Gr. 36, or A36 | ASTM A563 |
| Medium-strength, mild steel | ASTM F1554 Gr. 55 with supplementary requirement S1 | ASTM A194 Gr. 2 or A563 Gr. D or better |
| High-strength steel | ASTM F3125-Grade A325 or ASTM A449 ¹ | ASTM A194 or A563, heavy hex |
| Alloy steel | ASTM A193 Gr. B7 or F1554 Gr. 105 | ASTM A194 Gr. 2H or A563 Gr. DH, heavy hex |

1. If headed bolts are specified, ASTM A449 bolts must be heavy hex head.

Section 449.3.3.1, "Anchor Bolt Thread Lubricant Coating," The first sentence of the first paragraph is voided and replaced by the following.

Coat anchor bolt threads before installing nuts with an electrically conducting lubricant compound described in Section 449.3.3.2.1., "Definitions," for traffic signal poles, roadway illumination poles, high mast illumination poles, intelligent transportation system poles, overhead sign support structures, and steel electrical service supports.

Section 449.3.3.2, "Anchor Bolt Tightening Procedure," The first sentence of the first paragraph is voided and replaced by the following.

Tighten anchor bolts for traffic signal poles, shoe base and concrete traffic barrier base roadway illumination poles, high mast illumination poles, intelligent transportation system poles, and overhead sign support structures in accordance with this Section.

Special Provision to Item 465

Junction Boxes, Manholes, and Inlets



Item 465, "Junction Boxes, Manholes, and Inlets," of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Section 2.1., "Concrete," The section is voided and replaced with the following.

Furnish concrete per DMS-7305 for formed and machine-made precast junction boxes, manholes, and inlets. Furnish Class C concrete for cast-in-place junction boxes, manholes, and inlets unless otherwise shown on the plans.

Section 3.1., "Precast Junction Boxes, Manholes, and Inlets," The section is voided and replaced with the following.

Construct formed and machine-made precast junction boxes, manholes, and inlets in accordance with DMS-7305, "Fabrication and Qualification Procedure for Multi-Project Fabrication Plants of Precast Concrete Drainage Structures" and the Contract Plans, except as otherwise noted in this Item.

Multi-project fabrication plants as defined in Item 424 "Precast Concrete Structural Members (Fabrication)," that produce junction boxes, manholes, and inlets will be approved by the Materials and Tests Division in accordance with DMS-7305, "Fabrication and Qualification Procedure for Multi-Project Fabrication Plants of Precast Concrete Drainage Structures." The Department's MPL has a list of approved multi-project fabrication plants.

Section 3.1.1., "Lifting Holes," The section is voided and not replaced.

Section 3.1.2., "Marking," The section is voided and replaced with the following.

Marking. Clearly mark each precast junction box, manhole, and inlet unit with the following information:

- name or trademark of fabricator and plant location;
- product designation;
- ASTM designation (if applicable);
- date of manufacture;
- designation "TX" for precast units fabricated per DMS-7305;
- designated fabricator's approval stamp for each approved unit; and
- designation "SR" for product meeting sulfate-resistant concrete plan requirements (when applicable).

Special Provision to Item 502

Barricades, Signs and Traffic Handling



Item 502, "Barricades, Signs and Traffic Handling" of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Article 502.1., "Description," is supplemented by the following:

Temporary work-zone (TWZ) traffic control devices manufactured after December 31, 2019, must have been successfully tested to the crashworthiness requirements of the 2016 edition of the Manual for Assessing Safety Hardware (MASH). Such devices manufactured on or before this date and successfully tested to NCHRP Report 350 or the 2009 edition of MASH may continue to be used throughout their normal service lives. An exception to the manufacture date applies when, based on the project's date of letting, a category of MASH-2016 compliant TWZ traffic control devices are not approved, or are not self-certified after the December 31, 2019, date. In such case, devices that meet NCHRP-350 or MASH-2009 may be used regardless of the manufacture date.

Such TWZ traffic control devices include: portable sign supports, barricades, portable traffic barriers designated exclusively for use in temporary work zones, crash cushions designated exclusively for use in temporary work zones, longitudinal channelizers, truck and trailer mounted attenuators. Category I Devices (i.e., lightweight devices) such as cones, tubular markers and drums without lights or signs attached however, may be self-certified by the vendor or provider, with documentation provided to Department or as are shown on Department's Compliant Work Zone Traffic Control Device List.

Article 502.4., "Payment," is supplemented by the following:

Truck mounted attenuators and trailer attenuators will be paid for under Special Specification, "Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)." Portable Changeable Message Signs will be paid for under Special Specification, "Portable Changeable Message Sign." Portable Traffic Signals will be paid for under Special Specification, "Portable Traffic Signals."

Special Provision to Item 506

Temporary Erosion, Sedimentation, and Environmental Controls



For this project, Item 506, "Temporary Erosion, Sedimentation, and Environmental Controls," of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Article 506.1., "Description," is voided and replaced by the following:

Install, maintain, and remove erosion, sedimentation, and environmental control measures to prevent or reduce the discharge of pollutants in accordance with the Storm Water Pollution Prevention Plan (SWP3) or as directed. Ensure the installation and maintenance of control measures is performed in accordance with the manufacturer's or designer's specifications. Erosion and sediment control devices must be selected from the "Erosion Control Approved Products" or "Sediment Control Approved Products" lists. Perform work in a manner to prevent degradation of receiving waters, facilitate project construction, and comply with applicable federal, state, and local regulations.

Article 506.3., "Qualifications, Training, and Employee Requirements," is voided and not replaced.

Section 506.4.1., "Contractor Responsibilities," Section 506.4.2., "Implementation," and Section 506.4.3., "General," are voided and replaced by the following:

4.1. **Contractor Responsibilities.** Implement the SWP3 for the project site in accordance with the plans and specifications, and as directed. Coordinate storm water management with all other work on the project. Develop and implement an SWP3 for project-specific material supply plants within and outside of the Department's right of way in accordance with the specific or general storm water permit requirements. Prevent water pollution from storm water associated with construction activity from entering any surface water or private property on or adjacent to the project site.

4.2. **Implementation.**

4.2.1. **Commencement.** Implement the SWP3 as shown and as directed. Contractor proposed recommendations for changes will be allowed as approved. Do not implement changes until approval has been received and changes have been incorporated into the plans by the Engineer. Minor adjustments to meet field conditions are allowed and will be recorded by the Engineer in the SWP3.

Implement control measures before the commencement of activities that result in soil disturbance. Phase and minimize the soil disturbance to the areas shown on the plans. Coordinate temporary control measures with permanent control measures and all other work activities on the project to assure economical, effective, safe, continuous water pollution prevention. Provide control measures that are appropriate to the construction means, methods, and sequencing allowed by the Contract.

Do not prolong final grading and shaping. Preserve vegetation where possible throughout the project and minimize clearing, grubbing, and excavation within stream banks, bed, and approach sections.

4.3. **General.**

4.3.1. **Temporary Alterations or Control Measure Removal.** Altering or removal of control measures is allowed when control measures are restored within the same working day.

- 4.3.2. **Stabilization.** Initiate stabilization for disturbed areas no more than 14 days after the construction activities in that portion of the site has temporarily or permanently ceased. Establish a uniform vegetative cover or use another stabilization practice as approved.
- 4.3.3. **Finished Work.** Upon the Engineer's acceptance of vegetative cover or other stabilization practice, remove and dispose of all temporary control measures unless otherwise directed. Complete soil disturbing activities and establish a uniform perennial vegetative cover. A project will not be considered for acceptance until a vegetative cover of 70% density of existing adjacent undisturbed areas is obtained or equivalent permanent stabilization is obtained as approved.
- 4.3.4. **Restricted Activities and Required Precautions.** Do not discharge onto the ground or surface waters any pollutants such as chemicals, raw sewage, fuels, lubricants, coolants, hydraulic fluids, bitumens, or any other petroleum product. Operate and maintain equipment on site in a manner as to prevent actual or potential water pollution. Manage, control, and dispose of litter on site such that no adverse impacts to water quality occur. Prevent dust from creating a potential or actual unsafe condition, public nuisance, or condition endangering the value, utility, or appearance of any property. Wash out concrete trucks only in approved contained areas. Use appropriate controls to minimize the offsite transport of suspended sediments and other pollutants if it is necessary to pump or channel standing water (i.e. dewatering). Prevent discharges that would contribute to a violation of Edwards Aquifer Rules, water quality standards, the impairment of a listed water body, or other state or federal law.

Section 506.4.4., "Installation, Maintenance, and Removal Work." The first paragraph is voided and replaced by the following.

Perform work in accordance with the SWP3, and according to the manufacturers' guidelines. Install and maintain the integrity of temporary erosion and sedimentation control devices to accumulate silt and debris until soil disturbing activities are completed and permanent erosion control features are in place or the disturbed area has been adequately stabilized as determined by the Engineer.

Section 506.4.5., "Monitoring and Documentation," is voided and not replaced.

Section 506.6.5.2., "Maintenance Earthwork for Erosion and Sediment Control for Cleaning and/or Restoring Control Measures," is voided and replaced by the following:

Earthwork needed to remove and obliterate of erosion-control features will not be paid for directly but is subsidiary to pertinent Items unless otherwise shown on the plans.

Sprinkling and rolling required by this Item will not be paid for directly but will be subsidiary to this Item.

Special Provision to Item 540 Metal Beam Guard Fence



Item 540, "Metal Beam Guard Fence" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 540.4.7, "Measurement," is voided and replaced with the following:

Long Span System. Measurement will be by each long span system, complete in place. Each long span system will be from the first CRT to the last CRT in the system.

Special Provision to Item 636 Signs



Item 636, "Signs" of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Section 636.3.1, "Fabrication." is deleted.

Section 636.3.1.2, "Sheeting Application." The last sentence of the fourth paragraph is voided and replaced by the following.

Do not splice sheeting or overlay films for signs fabricated with ink or with colored transparent films.

Special Provision to Item 650

Overhead Sign Supports



Item 650, "Overhead Sign Supports" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 650.3.3., "Fabrication," is voided and replaced with the following:

Fabrication. Fabricate and weld in accordance with Item 441, "Steel Structures," AWS D1.1, *Structural Welding Code—Steel*, and the requirements of this Item.

Fabrication plants that produce overhead sign support structures must be approved in accordance with [DMS-7380](#), "Steel Non-Bridge Member Fabrication Plant Qualification." The Materials and Tests Division maintains a [Material Producer List \(MPL\)](#) of approved overhead sign support structure fabrication plants.

For monotube type overhead sign supports fabricated with seam-welded pipe, locate the longitudinal seam weld at the neutral axis during the bending process of the post.

For cantilevered-truss type overhead sign support columns with diameters exceeding 30 in., one circumferential complete joint penetration weld splice is permitted per column. Locate the splice at a minimum height of half the column length. Provide mounting channels for the installation of traffic control devices unless otherwise shown on the plans.

Provide 100% ultrasonic testing (UT) in accordance with the AWS D1.1, *Structural Welding Code - Steel*, on all circumferential butt joint weld splices of:

- monotube type posts, and
- cantilevered-truss type columns.

UT acceptance and rejection criteria must be in accordance with AWS D1.1, for cyclically loaded nontubular connections in tension.

For alternate design cantilevered-truss type overhead sign support columns, perform at least 10% UT on longitudinal seam welds with a Department approved procedure to ensure minimum specified penetration. Perform testing at a minimum of three locations on each column (top, middle, and bottom). The minimum length of each test area must be 10 in. If minimum specified penetration is not achieved in any of the tested areas, test an additional 24 in. beyond the originally selected test areas requiring the specified minimum penetration. Test the entire column seam weld if any locations within the additional 24 in. test areas does not achieve the specified minimum penetration. Repair the deficient areas with a Department approved repair procedure and retest.

Measure required dimensions of truss type overhead sign support structures including the following:

- camber of overhead sign bridge trusses (in vertical position), and
- rise of cantilever overhead sign support trusses (in horizontal position).

Shop assemble monotube type overhead sign supports in the horizontal position to ensure specification compliance for all required dimensions, alignment, geometry, and fit.

Permanently mark sign support base plates with the fabrication plant's insignia. For monotube type supports, place the mark on the base plate adjacent to the hand hole access compartment.

Conformance to plans and other approved drawings does not relieve the Contractor of responsibility for proper fit of components.

Section 650.34., "Galvanizing," is voided and replaced with the following:

Galvanizing. Provide punched, drilled, or mechanically guided thermal-cut holes in steel parts or members, when allowed, before galvanizing. Mechanically guided thermal-cut hole quality should be per Item 445, "Galvanizing." Hot-dip galvanize all fabricated parts in accordance with Item 445, "Galvanizing."

Special Provision to Item 654

Sign Walkways



Item 654, "Sign Walkways" of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Section 654.3.2, "Fabrication." The following language is added after the first paragraph.

Fabrication plants that produce sign walkways must be approved in accordance with DMS-7380, "Steel Non-Bridge Member Fabrication Plant Qualification." The Construction Division maintains a list of approved sign walkway fabrication plants on the Department's Material Producers List.

Special Provision to Item 656

Foundations for Traffic Control Devices



Item 656, "Foundations for Traffic Control Devices" of the Standard Specifications is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Article 3. "Construction," the first paragraph is supplemented by the following:

Ensure the top of the foundation and anchor bolts meet specified requirements in relation to the final grade.

Special Provision to Special Specification 6064 Intelligent Transportation System (ITS) Pole with Cabinet



Special Specification 6064, "Intelligent Transportation System (ITS) Pole with Cabinet" is amended with respect to the clauses cited below. No other clauses or requirements of this Item are waived or changed.

Section 6064.3.1., "Anchor Bolts." The second sentence is voided and replaced with the following:

Galvanize these items in accordance with Item 445, "Galvanizing."

Section 6064.3.2., "ITS Poles." Voided and replaced with the following:

ITS Poles. Fabricate ITS poles in accordance with the details shown on the plans, this Item, and Item 441, "Steel Structures." Alternate designs are not acceptable unless approved by the Department.

Provide properly fitting components. Provide round, octagonal (8-sided), or dodecagonal (12-sided) pole shafts tapered to the heights shown on the plans.

Permanently mark, at a visible location when erected, ITS pole base plates with the design wind speed. Locate the handholes, as shown on the plans, opposite of the direction of traffic flow.

Permanently mark, at a visible location when erected, ITS pole base plates with the fabrication plant's insignia. Place the mark on the pole base plate adjacent to the handhole access compartment.

Provide circumferential welds only at the ends of the shaft. Provide no more than two longitudinal seam welds in shaft sections. Provide 100% penetration within 6 in. of circumferential base welds and 60% minimum penetration at other locations along the longitudinal seam welds, unless otherwise specified. Use a welding technique that minimizes acid entrapment during later galvanizing. Hot-dip galvanize all fabricated parts in accordance with Item 445, "Galvanizing."

Perform at least 10% ultrasonic testing (UT) of longitudinal seam welds on the pole shafts. Use a Department approved UT procedure to ensure 60% or 85% minimum penetration where specified. Perform testing at a minimum of three locations on each shaft section (at both ends and middle). The minimum length of each test area must be 10 in. If minimum penetration is not achieved in any of the tested areas, test an additional 24 in. beyond the originally selected test areas requiring 60% or 85% penetration. Test the entire shaft seam weld if any locations within the additional 24 in. test areas does not achieve 60% or 85% penetration. Repair the deficient areas with a Department approved repair procedure and retest.

Fabricate air terminal and bracket assembly to serve as a lightning arrester in accordance with ITS pole air terminal details and IEEE standards for lightning protection. Bond air terminal with air terminal bracket via clad weld or other approved bolted connection.

Special Provision to Special Specification 6185 Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)



Item 6185, "Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)" of the Standard Specifications, is hereby amended with respect to the clauses cited below, and no other clauses or requirements of this Item are waived or changed hereby.

Article 4. "Measurement", is voided and replaced by the following:

- 4.1. **Truck Mounted Attenuator/Trailer Attenuator (Stationary).** This Item will be measured by the day. TMA/TAs must be set up in a work area and operational before a calendar day can be considered measurable. A day will be measured for each TMA/TA set up and operational on the worksite.
- 4.2. **Truck Mounted Attenuator/Trailer Attenuator (Mobile Operation).** This Item will be measured by the hour or by the day. The time begins once the TMA/TA is ready for operation at the predetermined site and stops when notified by the Engineer. When measurement by the hour is specified, a minimum of 4 hr. will be paid each day for each operating TMA/TA used in a mobile operation. When measurement by the day is specified, a day will be measured for each TMA/TA set up and operational on the worksite.

Special Specification 6005

Testing, Training, Documentation, Final Acceptance, and Warranty



1. DESCRIPTION

Perform or furnish testing, training, documentation, final acceptance, and warranty on the applicable equipment or systems.

2. TESTING

Unless otherwise shown on the plans, perform the following tests on the applicable equipment or systems.

- 2.1. **Test Procedures Documentation.** Provide 5 copies of the test procedures and blank data forms 60 days prior to testing for each test required on this project. Include the sequence of the tests in the procedures. The Engineer will approve test procedures prior to submission of equipment for tests. Conduct all tests in accordance with the approved test procedures.

Record test data on the data forms, as well as quantitative results. Ensure the data forms are signed by an authorized representative (company official) of the equipment manufacturer. Submit 1 copy of the completed and signed data forms for acceptance or rejection of the test or equipment.

- 2.2. **Design Approval Test.** Conduct a Design Approval Test on randomly selected units from the prototype design manufacturing run. If only 1 design prototype is manufactured, perform this test on that unit. If supplying multiple types of the equipment, provide and test a sample of each type.

Certification from an independent testing laboratory of a successfully completed Design Approval Test is acceptable. Ensure that the testing by this laboratory is performed in accordance with the requirements of this specification. Failure of independent tests to comply with the requirements of this specification will be grounds for rejection of any certification.

Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests. Perform the following tests:

- 2.2.1. **Power Service Transients.** The equipment must meet the performance requirements, specified in the parent specification, when subjected to the power service transients as specified in Section 2.2.7.2, "Transient Tests (Power Service)" of the NEMA TS 2 standard, latest edition.

- 2.2.2. **Temperature and Condensation.** The equipment must meet the performance requirements, specified in the parent specification, when subjected to the following conditions in the order specified below:

- Stabilize the equipment at -30°F and test as specified in Sections 2.2.7.3., "Low-Temperature Low-Voltage Tests" and 2.2.7.4., "Low-Temperature High-Voltage Tests" of the NEMA TS 2 standard, latest edition.
- Allow the equipment to warm up to room temperature in an atmosphere having relative humidity of at least 40%. Operate the equipment for 2 hr., while wet, without degradation or failure.
- Stabilize the equipment at 165°F and test as specified in Sections 2.2.7.5., "High-Temperature High Voltage Tests" and 2.2.7.6, "High-Temperature Low-Voltage Tests" of the NEMA TS 2 standard, latest edition.

- 2.2.3. **Relative Humidity.** The equipment must meet the performance requirements, specified in the parent specification, within 30 min. of being subjected to a temperature of 165°F and a relative humidity of 18% for 48 hr.
- 2.2.4. **Vibration.** The equipment must show no degradation of mechanical structure, soldered components, or plug-in components and must operate in accordance with the manufacturer's equipment specifications after being subjected to the vibration tests as described in Section 2.2.8, "Vibration Test," of the NEMA TS 2 standard, latest edition.
- 2.2.5. **Power Interruption.** The equipment must meet the performance requirements, specified in the parent specification, when subjected to nominal input voltage variations as specified in Section 2.2.10, "Power Interruption Test," of the NEMA TS 2 standard, latest edition.
- 2.3. **Demonstration Test.** Conduct a Demonstration Test on applicable equipment at an approved Contractor facility. Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests. Perform the following tests:
- 2.3.1. **Examination of Product.** Examine each unit carefully to verify that the materials, design, construction, markings and workmanship comply with the requirements of the parent specification.
- 2.3.2. **Continuity Tests.** Check the wiring to determine conformance with the requirements of the appropriate paragraphs in the parent specification.
- 2.3.3. **Operational Test.** Operate each unit for at least 15 min. to permit equipment temperature stabilization and an adequate number of performance characteristics to ensure compliance with the requirements of the parent specification.
- 2.4. **Stand-Alone Tests.** Conduct a Stand-Alone Test for each unit after installation. The test must exercise all stand-alone (non-network) functional operations. Notify the Engineer 5 working days before conducting this test. The Department may witness all the tests.
- 2.5. **System Integration Test.** Conduct a System Integration Test on the complete functional system. Demonstrate all control and monitor functions for each system component for 72 hr. Supply 2 copies of the System Operations manual before the System Integration Test. Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests.
- 2.6. **Final Acceptance Test.** Conduct a Final Acceptance Test on the complete functional system. Demonstrate all control, monitor, and communication requirements for 90 days. The Engineer will furnish a Letter of Approval stating the first day of the Final Acceptance Test. The completion of the Final Acceptance Test occurs when system downtime due to mechanical, electrical, or other malfunctions to equipment furnished or installed does not exceed 72 hr. and any individual points of failure identified during the test period have operated free of defects as required in Section 2.7.5., "Consequences of Final Acceptance Test Failure."
- 2.7. **Consequences of Test Failure.** If a unit fails a test, submit a report describing the nature of the failure and the actions taken to remedy the situation prior to modification or replacement of the unit. If a unit requires modification, correct the fault and then repeat the test until successfully completed. Correct minor discrepancies within 30 days of written notice to the Engineer. If a unit requires replacement, provide a new unit and then repeat the test until successfully completed. Major discrepancies that will substantially delay receipt and acceptance of the unit will be sufficient cause for rejection of the unit.
- If a failure pattern develops in similar units within the system, implement corrective measures, including modification or replacement of units, to all similar units within the system as directed. Perform the corrective measures without additional cost or extension of the contract period.
- 2.7.1. **Consequences of Design Approval Test Failure.** If the equipment fails the Design Approval Test, correct the fault and then repeat the Design Approval Test until successfully completed.

- 2.7.2. **Consequences of Demonstration Test Failure.** If the equipment fails the Demonstration Test, correct the fault and then repeat the Demonstration Test until successfully completed.
- 2.7.3. **Consequences of Stand-Alone Test Failure.** If the equipment fails the Stand-Alone Test, correct the fault and then repeat the Demonstration Test until successfully completed.
- 2.7.4. **Consequence of System Integration Test Failure.** If the equipment fails the System Integration Test, correct the fault and then repeat the Systems Integration Test until successfully completed.
- 2.7.5. **Consequences of Final Acceptance Test Failure.** If a defect within the system is detected during the Final Acceptance Test, document and correct the source of failure. Once corrective measures are taken, monitor the point of failure until a consecutive 30 day period free of defects is achieved.

If after completion of the initial test period, the system downtime exceeds 72 hr. or individual points of failure have not operated for 30 consecutive days free of defects, extend the test period by an amount of time equal to the greater of the downtime in excess of 72 hr. or the number of days required to complete the performance requirement of the individual point of failure.

3. TRAINING

When required on the plans, provide a minimum of 24 hr. of instruction to 10 designated personnel in the operation and maintenance procedures of equipment or systems installed. Provide the training during installation, testing, and integration. Provide the training through practical demonstrations, seminars, and other related technical procedures.

Furnish a training session agenda, a complete set of training material (manuals and schematics), and the names and qualifications of proposed instructors for approval 60 days before the training. Provide a training location. Provide 1 copy of the course material for each person. Provide training in the following areas of interest and as shown on the plans:

- The "Hands-on" operation for each type of equipment.
- Explanation of all system commands, their function and usage.
- Required preventative maintenance procedures.
- All equipment servicing procedures.
- System "troubleshooting"/problem identification procedures.

4. DOCUMENTATION

Provide "as-built" documentation for the entire system and all of its individual components. Supply one (1) 11 in. x 17 in. reproducible copy of the wiring diagrams. Supply three (3) copies of the following in a manual for each equipment component:

- Complete and accurate schematic diagrams.
- Complete and accurate cabinet, enclosure, and building wiring diagrams.
- Complete installation procedures.
- Complete performance specifications (functional, electrical, mechanical and environmental) on the unit.
- Complete parts list including names of vendors for parts not identified by universal part numbers such as JEDEC, RETMA, or EIA.
- Pictorial of component layout on circuit board.
- Complete maintenance and trouble-shooting procedures.
- Complete stage-by-stage explanation of circuit theory and operation.
- Complete and detailed system operations manuals.

Furnish additional information as shown on the plans.

5. FINAL ACCEPTANCE

Final acceptance is made when all work is complete, the system has successfully completed all test requirements, and the Engineer, in writing, accepts all work for the work locations in the Contract in accordance with Article 5.12., "Final Acceptance." Final acceptance relieves the Contractor from further Contract responsibilities.

6. WARRANTY

Guarantee equipment furnished and installed to perform according to the manufacturer's published specifications. Warrant equipment against defects or failure in design, materials, and workmanship in accordance with the manufacturer's standard warranty. Supply equipment with no less than 95% of the manufacturer's warranty remaining on the date that equipment invoices are submitted for final payment. Any equipment with less than 95% warranty remaining will be rejected.

The Contractor will warrant or guarantee all such electronic, electrical, and mechanical equipment, materials, technical data, and products furnished and installed for a period of 1 yr. after final acceptance of the project by the Department. The Contractor's warranty or guarantee must provide for the "on-site" repair or replacement, at the Contractor's option, within 2 working days and at no cost to the Department.

Once the Contractor's warranty or guarantee expires, assign to the Department any manufacturer's standard warranty or guarantee coverage still remaining on all such electronic, electrical, and mechanical equipment, materials, technical data, and products furnished for and installed on the project. Repair or replace defective equipment, at the manufacturer's option, at no cost to the Department.

7. MEASUREMENT AND PAYMENT

The work performed, materials furnished, equipment, labor, tools, and incidentals will not be measured or paid for directly but will be considered subsidiary to bid items of the Contract.

Special Specification 6006

Electronic Components



1. DESCRIPTION

Use electronic components to manufacture electronic equipment.

2. MATERIALS AND CONSTRUCTION METHODS

Use electronic components that comply with Electronic Industries Association (EIA) and Joint Electronic Device Engineering Council (JEDEC) Specifications. Provide industry standard electronic components available from several manufacturers. When special monolithic integrated circuits are necessary for cost-effective designs, waiving the multi-source requirements will be as directed.

Design the electronic circuitry to ensure an adjustment range from normal adjustment settings of variable components. Provide a range of adjustment to compensate for composite variations in the associated circuitry due to changes in part values during the normal or specified life of the device. Ensure the range of adjustment can compensate for variations in replacement parts within the specified tolerances. Unless otherwise shown on the plans, design the components to be under operating conditions 24 hr. a day for 10 yr. Derate electronic components by 20% with regard to ambient temperature, applied voltage, and power dissipation.

On electronic components weighing more than 2 oz., use supports other than the component's pins or electrical connectors. Solder electronic components of 2 or more leads in place. Mark the circuit reference symbol next to the component.

Meet the above requirements and satisfy the following specific requirements for the different components:

- 2.1. **Capacitors.** Provide industrial grade capacitors. Insulate the capacitors. Mark capacitors with their capacitance value, working voltage, and polarity.

Provide capacitor encasements resistant to cracking, peeling, and discoloration due to humidity and changes in temperature. Provide electrolytic capacitors capable of operating at least 185°F. Do not use electrolytic capacitors of less than 1.0 microfarad.

Use a clamp or fastener to support a capacitor to avoid damage by shock or vibration. Use a capacitor with a specific ripple or AC voltage rating, if possibly subjected to a ripple voltage in excess of 10% of the actual DC voltage across the capacitor. Use an aluminum electrolytic capacitor only when continually energized.

- 2.2. **Diodes.** If low forward drop is required in logic circuit applications, furnish justification for use of Germanium diodes prior to incorporation in the design. Mark diodes with the JEDEC part number, using an industry approved color code or clearly legible printing. Indicate the diode polarity on the diode case by the use of the diode symbol, by the 360° band on the cathode end, or by the shape of case.

- 2.3. **Indicators.** Use solid-state (LED) indicators with a useful life at least 25,000 hr.

- 2.4. **Integrated Circuits.** Print the manufacturer's part number and any information required to install the integrated circuit assembly upon the package. Test integrated circuits with at least 1 test from each group below:

- 2.4.1. **Group 1:**
- Stabilization Bake
 - Temperature Cycling
 - Power Burn-in
- 2.4.2. **Group 2:**
- Functional test with the device at the manufacturer's maximum specified temperature
 - Static and dynamic test per manufacturer's data sheet
- 2.5. **Potentiometers and Rheostats.** Use industrial grade potentiometers. Use potentiometers with a power rating at least 100% greater than the maximum power requirements of the circuit.
- 2.6. **Printed Circuit Boards.**
- 2.6.1. **Design, Fabrication and Mounting.** Use NEMA Grade G-10 glass epoxy or equivalent for printed circuit boards (refer to NEMA Publications No. L1 1-1982, Industrial Laminated Thermosetting Products). Provide a nominal thickness of 1/32 in. for circuit boards not exceeding 2 in. in any dimension. Provide a nominal thickness of 1/16 in. for circuit boards exceeding 2 in. in any dimension.
- Coat the printed circuit board assembly with a protective coating to combat mildew, moisture, and fungus. Plate the through holes that carry electrical connections from one side of the board to the other. Use 1 oz. per square foot of copper to plate through holes. Use non-corrosive material for electrical mating surfaces.
- Design and fabricate printed circuit boards and the mounting of parts and assemblies in accordance with MIL-STD-275 (latest revision) except as follows:
- Mount semiconductor devices on spacers or transipads if the device dissipates more than 250 mW or if the case temperature will rise 20°F above ambient.
 - Remove residual flux from the printed circuit board.
 - Provide a resistance between any 2 isolated, independent conductor paths of at least 100 megohms when a 500 VDC potential is applied.
- Mark operating circuit components mounted on the circuit boards. Reference the identifying characters to their respective components in the schematic diagram and in the parts list.
- 2.6.2. **Soldering.** Hand solder in accordance with MIL-STD-55110. Use of automatic flow soldering is acceptable.
- 2.7. **Relays.** Install diodes across the coils for transient suppression in DC relays. Provide replaceable relays that do not require special tools for replacement.
- 2.8. **Resistors.** Use fixed composition insulated resistors in accordance with the performance requirements of MIL-R-11. Provide industrial grade resistors with a 15-yr. design life. Mark with their resistance value, using EIA color codes or industry approved marking technique.
- Use resistors with a 10% tolerance or better and a resistance variation of no more than 5% over the temperature range 0°F to 165°F. Do not use resistors with a power rating greater than 2 W unless special ventilation or heat sinking is provided. Insulate these resistors from the printed circuit board.
- 2.9. **Transistors.** Use JEDEC registered transistors. Mark the JEDEC part number on the case. Designate the emitter or collector by use of an industry approved marking technique.
- 2.10. **Transformers.** Mark transformers with the manufacturer's part number on the case or frame, using a Radio-Electronics-Television Manufacturers Association (RETMA) color code or numbered in a manner to facilitate proper installation.

2.11. **Switches.** Derate switch contacts 50% from their maximum current ratings.

3. MEASUREMENT AND PAYMENT

The work performed, materials furnished, equipment, labor, tools, and incidentals will not be measured or paid for directly, but will be subsidiary to the bid items of the Contract.

Special Specification 6007

Intelligent Transportation System (ITS) Fiber Optic Cable



1. DESCRIPTION

Furnish, install, relocate and remove Intelligent Transportation System (ITS) fiber optic cable, fiber patch panels and splice enclosures as shown on the plans.

2. MATERIALS

- 2.1. **General Requirements.** Provide, assemble, fabricate and install materials that are new, corrosion resistant, and in accordance with the details shown on the plans and in these Specifications.

Furnish, install, splice, and test all new fiber optic cable. Provide all splicing kits, fiber optic cable caps, connectors, moisture or water sealants, terminators, splice trays, fiber optic jumpers, pig tails, fiber patch panels, fiber interconnect housing, and accessories necessary to complete the fiber optic network. Provide all equipment necessary for installation, splicing, and testing.

- 2.2. **Cable Requirements.** Furnish all-dielectric, dry-filled, gel-free, loose tube fiber optic cable, with low water peak, suitable for underground conduit environments or aerial applications.

Furnish self-supporting, all-dielectric, dry-filled, gel-free, loose tube fiber optic cable, with low water peak suitable for aerial applications when not lashing to strand cable.

All fiber optic cable furnished must have a design life of 20 yr. when installed to the manufacturer's specifications.

Splice fiber optic cables in ground boxes, field cabinets, or buildings. Terminate fiber optic cables in field cabinets and buildings that comply with the details shown on the plans and in this Specification.

Provide all fiber optic cable from the same manufacturer and the manufacturer is International Organization for Standardization (ISO) 9001 certified. Ensure the cables meet or exceed United States Department of Agriculture Rural Utilities Service (RUS) CFR 1755.900, American National Standards Institute/Insulated Cable Engineers Association (ANSI/ICEA) S-87-640, and Telecommunications Industry Association/Electronic Industries Alliance (TIA/EIA)-492-CAAB standard.

- 2.3. **Optical Requirements.**

- 2.3.1. **Optical Fiber.** Provide ITU G.652 single mode fiber optic cable with a core diameter of 8.3 ± 0.7 microns and a cladding diameter of 125 ± 0.7 microns. Provide optical fiber made of glass consisting of a silica core surrounded by concentric silica cladding, free of imperfections and inclusions.

- 2.3.2. **Core/Clad Concentricity.** Provide an offset between the center of the core and cladding less than 0.5 microns.

- 2.3.3. **Mode Field Diameter.** Provide single mode fiber optic cable with the effective area or Mode Field Diameter of the fiber must be $9.2 \pm 0.4 \mu\text{m}$ at 1310 nm and $10.5 \pm 1.0 \mu\text{m}$ at 1550 nm.

- 2.3.4. **Primary Coating.** Provide fiber with a coating diameter of 250 ± 15 microns.

- 2.3.5. **Attenuation.** Provide single mode fiber optic cable with nominal attenuation of 0.35 dB/km maximum at a wavelength of 1310 nm and nominal attenuation of 0.25 dB/km maximum at a wavelength of 1550 nm.
- Attenuation at water peak must be less than 0.35 dB/km at 1383 nm.
- 2.3.6. **Bandwidth and Dispersion.** Provide single mode fiber optic cable with a maximum dispersion of:
- 3.2 ps/nm-km at a wavelength of 1310 nm, and
 - 18 ps/nm-km at a wavelength of 1550 nm.
- Zero dispersion wavelength must be between 1300 nm and 1324 nm and the zero dispersion slope at the zero dispersion wavelength must be less than 0.092 ps/(nm² · km).
- The cutoff wavelength must be less than 1260 nm for single mode fibers specified to operate at 1310 nm. The cutoff wavelength must be less than 1480 for single mode fibers specified to operate only at 1550 nm or higher.
- The macrobend attenuation per 100 turns must not exceed 0.05 dB at 1310 nm and 1550 nm.
- 2.3.7. **Mechanical Requirements(Tensile Strength).** Provide a cable withstanding a pulling tension of 600 lbf without increasing attenuation by more than 0.8 dB/mi when installing in underground conduit systems in accordance with EIA-455-33A. Conduct an impact test in accordance with TIA/EIA-455-25C (FOTP-25) and a compression load test in accordance with TIA/EIA-455-41A (FOTP-41).
- For all-dielectric self-supporting cable (ADSS) and other self-supporting cables, meet tensile strength requirements in accordance with Section 25, Loading of Grades B and C, of National Electric Safety Code (NESC), for the maximum span and sag information as shown in the plans for aerial construction.
- 2.3.8. **Bend Radius.** Provide a cable withstanding a minimum bending radius of 10 times its outer diameter during operation, and 20 times its outer diameter during installation, removal and reinstallation without changing optical fiber characteristics. Test the cable in accordance with EIA-455-33A.
- 2.3.9. **Buffering.** Use a buffering tube or jacket with an outer diameter of 1.0 to 3.0 mm containing 12 individual fiber strands. The fibers must not adhere to the inside of the buffer tube.
- 2.3.10. **Color Coding.** Provide fiber and buffer tubes with a color coating applied to it by the manufacturer. Coating must not affect the optical characteristics of the fiber. Provide color configuration in accordance with TIA/EIA-598 as follows:
- | | | |
|-------------|------------|--------------|
| ■ 1. Blue | ■ 5. Slate | ■ 9. Yellow |
| ■ 2. Orange | ■ 6. White | ■ 10. Violet |
| ■ 3. Green | ■ 7. Red | ■ 11. Rose |
| ■ 4. Brown | ■ 8. Black | ■ 12. Aqua |

3. EQUIPMENT

- 3.1. **Cable Type.** Provide cables with a reverse oscillation or planetary stranding structure.

Jacket construction and group configuration should separate at splice points to cut and splice 1 set of fibers while the others remain continuous. All cable jackets must have a ripcord to aid in the removal of the outer jacket. Submit cable designs for approval.

Strand loose buffer tubes around a dielectric central anti-buckling strength member. Provide dielectric aramid or fiber glass strength members with specified strength for the cable. Provide cable with a water-blocking material, which is non-hygroscopic, non-nutritive to fungus, non-conductive, non-toxic, and homogeneous. The water blocking material must comply with TIA/EIA-455-81B and 455-82B as well as TIA/EIA-455-98.

Ensure a polyethylene inner jacket is applied over the cable core, and that the entire cable is enclosed with a polyethylene outer jacket. Ensure the outer jacket contains black carbon to provide UV protection for the cable. Ensure each cable is marked with the manufacturer's name, the date of manufacture (month/year), the fiber count (example 48F SM), and sequential length markings at maximum 2 ft. increments, measured in U.S. units.

For aerial installation, provide standard fiber optic cable lashed to steel messenger cable or ADSS in accordance with the Institute of Electrical and Electronics Engineers (IEEE) 1222 Standard for Testing and Performance for All-Dielectric Self-Supporting (ADSS) Fiber Optic Cable for Use on Electric Utility Power Lines, or most current version. Provide ADSS cable in accordance with the maximum span distance, weather load rating, and allowable sag as shown on the plans. "Figure 8" self-supporting cable with integrated messenger cable within the outer jacket for aerial installation is acceptable.

3.1.1. **Cable Size.** Furnish cables with a maximum diameter not exceeding 19 mm.

3.1.2. **Environmental Requirements.** Provide cable that functions in a temperature range from -40°F to 158°F.

3.2. **Fiber Optic Accessories.**

3.2.1. **Splice Enclosures.** Furnish and install 1 of 3 types of underground splice enclosures at locations shown on the plans to accommodate the cables being spliced at that point. The types are as follows:

- Type 1: 4 cable entry ports total – 2 ports to accommodate backbone fiber of up to 144 fibers and 2 ports for drop cables of up to 48 fibers,
- Type 2: 6 cable entry ports total – 4 to accommodate backbone or arterial cables of up to 144 fibers and 2 ports for drop cables of up to 48 fibers, and
- Type 3: 8 cable entry ports total – 4 to accommodate backbone or arterial cables of up to 144 fibers and 4 ports for drop cables of up to 48 fibers.

Provide the end cap of the canister splice closure with re-enterable quick-seal cable entry ports to accommodate additional branch cables or backbone cables. Provide fiber optic splice enclosures with strain relief, splice organizers, and splice trays from the same manufacturer as the splice enclosure. Select the appropriate splice enclosure type based on the number of splices called for in the plans. Suspend all splice closures off floor of the ground box and secure to cable rack assembly on side wall of ground box.

For end of reel splicing, use a fiber optic splice enclosure sized to accommodate full cable splice in one enclosure. Fiber optic splice enclosure must be of the same manufacturer as other supplied on a project. Splice enclosure and fusion splicing required for end of reel will be incidental to the fiber optic cable.

Comply with the Telcordia Technologies' GR-711-CORE standard and all applicable NEC requirements.

Contain all optical fiber splices within a splice enclosure, providing storage for fiber splices, nonspliced fiber, and buffer tubes. Provide sufficient space inside the enclosure to prevent microbending of buffer tubes when coiled.

Ensure that the splice enclosure maintains the mechanical and environmental integrity of the fiber optic cable, encases the sheath opening in the cable, and organizes and stores optical fiber. Ensure all hinges and latching devices are stainless steel or of a non-corrosive material designed for harsh environments. Ensure that the enclosure is airtight and prevents water intrusion. Ensure that splice enclosures allow re-entry and are hermetically sealed to protect internal components from environmental hazards and foreign material such as moisture, dust, insects, and UV light.

3.2.2. **Field Rack Mount Splice Enclosures.** Provide a 19 in. EIA rack mounted splice enclosure module to hold spliced fibers as shown in the plans inside field equipment cabinets or buildings.

Splice or terminate fibers inside rack mounted fiber optic splice enclosures. Provide an enclosed unit designed to house a minimum of 4 cables, sized to accommodate at a minimum the cables shown on the plans plus future expansion.

Provide splice enclosures containing mounting brackets with a minimum of 4 cable clamps. Install cable according to manufacturer recommendations for the cable distribution panel.

3.2.3. **Fiber Patch Panels.** Provide fiber patch panels that are compatible with the fiber optic cable being terminated and color coded to match the optical fiber color scheme. Coil and protect a maintenance loop of at least 5 ft. of buffer tube inside the rack mount enclosure, patch panel, or splice tray. Allow for future splices in the event of a damaged splice or pigtail.

3.2.3.1. **Cabinet.** Terminate or splice fibers inside the compact and modular fiber patch panel in the cabinet. Provide fiber patch panel for installation inside a 19 in. EIA rack and sized appropriately to accommodate the fiber terminations shown on the plans or as directed by the Engineer. Provide each patch panel housing with pre-assembled compact modular snap-in simplex connector panel modules, each module having a minimum of 6 fiber termination/connection capabilities. Provide modules with a removable cover having 6 pre-connectorized fiber pigtails, interconnection sleeves, and dust caps installed by the manufacturer. Provide a 12 fiber or greater fusion splice tray capability housing, each tray holding 12 fusion splices as shown in the plans. Stack splice trays on a rack to permit access to individual trays without disturbing other trays. Locate splice trays in a rack within a pull-out shelf. Protect the housing with doors capable of pivoting up or down. Document the function of each terminated/spliced fiber, along with the designation of each connector on labels or charts located either on the inside or outside of the housing door. Provide labels or charts that are UV resistant design for harsh environments and used inside field equipment cabinets. Use permanent marker or method of identification that will withstand harsh environments. Provide each housing with strain relief. Terminate single mode fiber optic cable with SC connectors to the patch panels, unless otherwise shown on the plans.

Install the fiber patch panel as an integral unit as shown on the plans.

3.2.3.2. **Building.** Provide a fiber patch panel with a modular design allowing interchangeability of connector panel module housing and splice housing within the rack, as shown on the plans.

Provide the number of single mode fibers, connector panel module housings, and splice housings for the patch panel unit in the building as shown on the plans.

Provide a fiber patch panel unit, installed at a height less than 7 ft., capable of housing 8 connector panel module housings or 8 splice housings. Protect the housing with doors capable of pivoting up or down and sliding into the unit.

Provide 12 snap-in simplex connector panel modules with each connector panel module housing, each module having 6 fiber termination/connector capabilities. Use a pre-assembled compact modular unit with a removable cover for the snap-in simplex connector panel module having 6 pre-connectorized fiber pigtails, interconnection sleeves, and dust caps installed by the manufacturer. Provide each connector panel module housing with a jumper routing shelf, storing up to 5 ft. (minimum) of cable slack for each termination within the housing. Provide the fiber distribution unit with strain relief.

Provide splice enclosure with 24 fusion splice tray capabilities, each splice tray holding 12 or more fusion splices. Stack splice trays on a rack to permit access to individual trays without disturbing other trays. Locate the rack on a pull-out shelf.

Document the function of each terminated/spliced fiber, along with the designation of each connector on labels or charts located either on the inside or outside of the housing door. Provide labels or charts that are UV resistant design for harsh environments and used inside field equipment cabinets. Use permanent marker or method of identification that will withstand harsh environments. Also provide documentation of the function of each terminated or spliced fiber along with the designation of each connector on charts or

diagrams matching the fiber patch panel configuration and locate inside cabinet document drawer. Provide documentation at the conclusion of fiber terminations and splicing.

Allow terminations only in the fiber interconnect housings placed in the cabinets as shown on the plans or as directed.

3.2.4. **Splice Trays.** Use splice tray and fan-out tubing kit for handling each fiber. Provide a splice tray and 12 fiber fan-out tubing with each housing for use with the 250 microns coated fiber. The fan-out will occur within the splice tray (no splicing of the fiber required). Allow each tube to fan out each fiber for ease of connectorization. Label all fibers in splice tray on a log sheet securing it to the inside or outside of the splice tray. Provide UV resistant log sheet suitable for harsh environments, located inside field cabinets or splice enclosures. Provide fan-out tubing with 3 layers of protection consisting of fluoropolymer inner tube, a dielectric strength member, and a 2.9 mm minimum outer protective PVC orange jacketing.

3.2.5. **Jumpers.** Provide fiber optic jumper cables to cross connect the fiber patch panel to the fiber optic transmission equipment as shown on the plans or as directed. Match the core size, type, and attenuation from the cable to the simplex jumper. Use yellow jumpers and provide strain relief on the connectors. Provide fiber with a 900 micron polymer buffer, Kevlar strength member, and a PVC jacket with a maximum outer jacket of 2.4 mm in diameter.

Provide 5 ft. long jumpers, unless otherwise shown on the plans. On the patch panel end of each jumper, provide an SC connector. On the opposite end of the jumper, provide a connector that is suitable to be connected to the fiber optic transmission equipment selected. When providing jumpers for existing equipment, provide connectors suitable to be connected to patch panels and fiber optic transmission equipment in use. All jumpers must have factory terminated connectors. Field terminations of connectors is prohibited.

3.2.6. **Fiber Optic Cable Storage Device.** Furnish fiber optic cable storage device designed to store slack fiber optic cable by means of looping back from device to device on an aerial run. Furnish storage devices that are non-conductive and resistant to fading when exposed to UV sources and changes in weather. Ensure storage devices have a captive design such that fiber-optic cable will be supported when installed in the aerial rack apparatus and the minimum bending radius will not be violated. Provide stainless steel attachment hardware for securing storage devices to messenger cable and black UV resistant tie-wraps for securing fiber-optic cable to storage device. Provide tie-wraps that do not damage fiber when securing to storage device. Ensure storage devices are stackable so multiple cable configurations are possible. Ensure cable storage devices furnished are compatible with the type of aerial cable furnished and installed. Aerial cable storage devices will be considered incidental to the installation of the fiber optic cable.

4. CONSTRUCTION

Install fiber optic cable in accordance with United States Department of Agriculture Rural Utilities Service CFR 1755.900 specifications for underground and aerial plant construction without changing the optical and mechanical characteristics of the cables.

Utilize available machinery, jacking equipment, cable pulling machinery with appropriate tension monitors, splicing and testing equipment, and other miscellaneous tools to install cable, splice fibers, attach connectors and mount hardware in cabinets employed with the above "Mechanical Requirements." Do not jerk the cable during installation. Adhere to the maximum pulling tensions of 600 lbf and bending radius of 20 times the cable diameter or as specified by the manufacturer, whichever is greater.

Use installation techniques and fixtures that provide for ease of maintenance and easy access to all components for testing and measurements. Take all precautions necessary to ensure the cable is not damaged during transport, storage, or installation. Protect as necessary the cables to prevent damage if being pulled over or around obstructions along the ground.

Where plans call for removal of existing cable to salvage or reuse elsewhere, take care to prevent damaging the existing cable during removal adhering to all of the requirements for installation that pertain to removal.

- 4.1. **Packaging, Shipping, and Receiving.** Ensure the completed cable is packaged for shipment on reels. Ensure the cable is wrapped in weather and temperature resistant covering. Ensure both ends of the cable are sealed to prevent the ingress of moisture.

Securely fasten each end of the cable to the reel to prevent the cable from coming loose during transit. Provide 6 ft. of accessible cable length on each end of the cable for testing. Ensure that the complete outer jacket marking is visible on these 6 ft. of cable length. Provide each cable reel with a durable weatherproof label or tag showing the Manufacturer's name, the cable type, the actual length of cable on the reel, the Contractor's name, the contract number, and the reel number. Include a shipping record in a weatherproof envelope showing the above information and also include the date of manufacture, cable characteristics (size, attenuation, bandwidth, etc.), factory test results, cable identification number and any other pertinent information. Ensure that all cable delivered has been manufactured within 6 mo. of the delivery date. Ensure that the minimum hub diameter of the reel is at least 30 times the diameter of the cable. Provide the cable in one continuous length per reel with no factory splices in the fiber. Provide a copy of the transmission loss test results as required by the TIA/EIA-455-61 standard, as well as results from factory tests performed prior to shipping.

- 4.2. **Installation in Conduit.** Install fiber optic cable in conduits in a method that does not alter the optical properties of the cable. If required, relocate existing cable to allow new fiber optic cable routing in conduits.

When pulling the cable, do not exceed the installation bending radius. Use rollers, wheels, or guides that have radii greater than the bending radius. Use a lubricating compound to minimize friction. Use fuse links and breaks to ensure that the cable tensile strength is not exceeded. Measure the pulling tension with a mechanical device and mechanism to ensure the maximum allowable pulling tension of 600 lbf is not exceeded at any time during installation.

Provide a single 1/C #14 XHHW insulated tracer wire in conduit runs where fiber optic cable is installed. Provide cable that is UL listed solid copper wire with orange color low density polyethylene insulation suitable for conduit installation and with a voltage rating of 600V. When more than one fiber optic cable is installed through a conduit run, only one tracer wire is required. Fuse or join tracer wires used in backbone, arterial, and drop runs, so that you have one continuous tracer wire. Terminate tracer wire at fiber optic test markers or equipment cabinets as identified in the plans for access to conduct a continuity test. Tracer wire will be paid for under Item 620, "Electrical Conductors."

Provide flat pull cord with a minimum tensile strength of 1,250 lb. in each conduit containing fiber optic cable. A traceable pull cord, with a metallic conducting material integral to the pull cord, may be substituted for a 1/C #14 tracer wire only with approval from the Department.

Seal conduit ends with a 2 part urethane after installation of fiber optic cable.

- 4.3. **Cable Installation between Pull Boxes and Cabinets or Buildings.** Do not break or splice a second fiber optic cable to complete a run when pulling the cable from the nearest ground box to a cabinet or building. Pull sufficient length of cable in the ground box to reach the designated cabinet or building. Pull the cable through the cabinet to coil, splice, or terminate the cable in the cabinet or building. Do not bend the cable beyond its minimum bend radius of 20 times the diameter.

Coil and tie cable inside cabinet, building, or boxes for future splicing or termination as shown in the plans. Cut off and remove the first 10 ft. of pulled or blown fiber stored. This work is incidental to this Item. Coat the open end of the coiled cable with protective coating and provide a dust cap.

- 4.4. **Aerial Installation.** Use pole attachment hardware and roller guides with safety clips to install aerial run cable. Maintain maximum allowable pulling tension of 600 lb. ft. during the pulling process for aerial run cable by using a mechanical device. Do not allow cable to contact the ground or other obstructions between poles during installation. Do not use a motorized vehicle to generate cable pulling forces. Use a cable suspension

clamp when attaching cable tangent to a pole. Select and place cable blocks and corner blocks so as not to exceed the cable's minimum bending radius. Do not pull cable across cable hangers. Store 100 ft. of fiber-optic cable slack, for future use, on all cable runs that are continuous without splices or where specified on the plans. Store spare fiber optic cable on fiber-optic cable storage racks of the type compatible with the aerial cable furnished. Locate spare cable storage in the middle of spans between termination points. Do not store spare fiber-optic cable over roadways, driveways or railroads.

Install standard cable on timber poles by lashing to steel messenger cable. Provide steel messenger cable in accordance with Item 625, "Zinc Coated Steel Wire Strand." Install all-dielectric self-supporting cable (ADSS) cable on timber poles using clinching clamp with cable hanger. Install aerial run cable in accordance with these specifications and as shown on the plans.

Locate aerial fiber in accordance with the NESC, Section 23, with respect to vertical clearances over the ground, between conductors carried on different supporting structures, and required separation distance of the cable from bridges, buildings, and other structures.

- 4.5. **Blowing Fiber Installation.** Use either the high-air speed blowing (HASB) method or the piston method. When using the HASB method, ensure that the volume of air passing through the conduit does not exceed 600 cu. ft. per min. or the conduit manufacturer's recommended air volume, whichever is more restrictive. When using the piston method, ensure that the volume of air passing through the conduit does not exceed 300 cu. ft. per min. or the conduit manufacturer's recommended air volume, whichever is more restrictive.

- 4.6. **Slack Cable.** Pull and store excess cable slack inside ITS ground boxes as shown on the plans. The following are minimum required lengths of slack cable, unless otherwise directed:

- ground boxes (No Splice) - 25 ft.,
- ground boxes (With Splice) - 100 ft.,
- future splice point - 100 ft., and
- cabinets - 25 ft.

Note that the slack is to be equally distributed on either side of the splice enclosure and secured to cable storage racks within the ground boxes.

Provide proper storage of slack cable, both long term and short term. Neatly bind cables to be spliced together from conduit to splice enclosure with tape. Do not over bind by pinching cable or fiber. Ground and bond the armor when installing armored fiber optic cable. Meet NEC and NESC requirements for grounding and bonding when using armored cable.

- 4.7. **Removal, Relocation and Reinstallation of Fiber Optic Cable.** Remove fiber optic cable from conduit as shown on plans. Use care in removing existing fiber optic cables so as not to damage them. Provide cable removal and reinstallation procedures that meet the minimum bending radius and tensile loading requirements during removal and reinstallation so that optical and mechanical characteristics of the existing cables are not degraded. Use entry guide chutes to guide the cable out of and in to existing or proposed conduit, utilizing lubricating compound where possible to minimize cable-to-conduit friction. Use corner rollers (wheels) with a radius not less than the minimum installation bending radius of cable. Dispose of removed fiber optic cable unless plans show for it to be re-used (relocated/re-installed) or salvaged and delivered to the Department. See plans for details. Test each optical fiber in the cable for performance and for loss at existing terminations or splices prior to cutting and removal. Retest following removal and following re-installation to ensure the removal and reinstallation has not affected the optical properties of the cable. Any fiber optic cable damaged by the contractor that is to be re-used shall be replaced by the contractor at no cost to the Department with new fiber optic cable meeting the approval of the Engineer. The Engineer reserves the right to reject the fiber based on the test results.

Maintain the integrity of existing cables, conduit, junction boxes and ground boxes contiguous to the section of cables to be removed. Replace or repair any cables, conduit, junction boxes or ground boxes damaged during work at the Contractor's expense. The replacement or repair method must be approved by the Engineer, prior to implementation.

- 4.8. **Splicing Requirements.** Fusion splice fibers as shown on the plans, in accordance with TIA/EIA-568 and TIA/EIA-758.

Use fusion splicing equipment recommended by the cable manufacturer. Clean, calibrate, and adjust the fusion splicing equipment at the start of each shift. Use splice enclosures, organizers, cable end preparation tools, and procedures compatible with the cable furnished. Employ local injection and detection techniques and auto fusion time control power monitoring to ensure proper alignment during fusion splicing.

When approaching end of shift or end of day, complete all splicing at the location. Package each spliced fiber in a protective sleeve or housing. Re-coat bare fiber with a protective 8 RTV, gel or similar substance, prior to application of the sleeve or housing.

Perform splices with losses no greater than 0.10 dB. Use an Optical Time Domain Reflectometer (OTDR) to test splices in accordance with Section 4.13.1.1. Record splice losses on a tabular form and submit for approval.

- 4.9. **Termination Requirements.** Provide matching connectors with 900 micron buffer fiber pigtails of sufficient length and splice the corresponding optical fibers in cabinets where the optical fibers are to be connected to terminal equipment. Buffer, strengthen, and protect pre-terminated fiber assemblies (pigtails) with dielectric aramid yarn and outer PVC jacket to reduce mishandling that can damage the fiber or connection. Pigtails must be duplex stranding with a yellow PVC outer jacket. Fiber optic pigtails must be factory terminated with SC connectors, unless otherwise shown on the plans. When providing pigtails for existing equipment, provide connectors suitable to be connected to patch panels and fiber optic transmission equipment in use.

Connectors must meet the TIA/EIA-568 and TIA/EIA-758 standards and be tested in accordance to the Telcordia/Bellcore GR-326-CORE standard. When tested according to TIA/EIA-455-171 (FOTP-171), ensure that the connectors test to an average insertion loss of less than or equal to 0.4 dB and a maximum loss of less than or equal to 0.75 dB for any mated connector. Maintain this loss characteristic for a minimum of 500 disconnections and reconnections with periodic cleanings per EIA-455-21A (FOTP-21). Qualify and accept connectors by the connector-to-connector mating using similar fibers. Ensure that the connector operating range is -40°F to 167°F. Provide connectors with a yellow color body or boot.

Test connections at the patch panel and splices made between cables to pigtails with the OTDR to verify acceptable losses.

Remove 5 ft. of unused optical fibers at the ends of the system from the buffer tube(s) and place coiled fibers into a splice tray. Clean the water blocking compound from all optical fibers destined for splice tray usage.

Install cable tags at all splice points identifying key features of each cable such as cable name or origin and destination and fiber count. Ensure tags are self-laminating or water resistant. Print the information onto the tags electronically or write neatly using a permanent marker. Locate tags just prior to entrance into splice enclosure.

- 4.10. **Mechanical Components.** Provide stainless steel external screws, nuts and locking washers. Do not use self-tapping screws unless approved. Provide corrosion resistant material parts and materials resistant to fungus growth and moisture deterioration.

- 4.11. **Experience Requirements.**

- 4.11.1. **Installing Fiber Optic Cable.** The Contractor or designated subcontractor involved in the installation of the fiber optic cable must meet the experience requirements in accordance with the following:

- minimum of 3 yr. of continuous existence offering services in the installation of fiber optic cable through an outdoor conduit system or aerial and terminating in ground boxes, field cabinets or enclosures or buildings, and

- completed a minimum of 3 projects where the personnel pulled a minimum of 5 mi. in length of fiber optic cable through an outdoor conduit system of aerial for each project. The completed fiber optic cable systems must have been in continuous satisfactory operation for a minimum of 1 yr.

4.11.2. **Splicing and Testing of Fiber Optic Cable.** The Contractor or designated subcontractor involved in the splicing and testing of fiber optic cable must meet the experience requirements in accordance with the following:

4.11.2.1. **Minimum Experience.** 3 yr. continuous existence offering services in the fields of fusion splicing and testing of fiber optic cable installed through a conduit system and terminating in ground boxes, field cabinets or enclosures or buildings. Experience must include all of the following:

- termination of a minimum of 48 fibers within a fiber distribution frame,
- OTDR testing and measurement of end to end attenuation of single mode and multimode fibers,
- system troubleshooting and maintenance,
- training of personnel in system maintenance,
- use of water-tight splice enclosures, and
- fusion splicing of fiber optic cable which meet the tolerable decibel (dB) losses within the range of 0.05 dB – 0.10 dB for single mode.

4.11.2.2. **Completed Projects.** A minimum of 3 completed projects where the personnel performed fiber optic cable splicing and terminations, system testing, system troubleshooting and maintenance during the course of the project and provided training on system maintenance. Each project must have consisted of a minimum 5 mi. of fiber optic cable installed, measured by project length not linear feet of fiber installed. The completed fiber optic cable systems must have been in continuous satisfactory operation for a minimum of 1 yr.

4.12. **Documentation Requirements.** Provide a minimum of 2 complete sets of fiber optic equipment submittal literature documenting compliance with the requirements of this Item including operation and maintenance manuals in hard copy format, bound, as well as an electronic version in Adobe PDF format on a CD/DVD or removable flash drive that includes the following:

- fiber optic cable literature consisting of manufacturer specification and cut sheets,
- fiber optic equipment literature consisting of manufacturer specification and cut sheets for splice enclosures, patch panels, splice trays, jumpers, cable storage devices, and fiber optic labeling devices,
- complete factory performance data documenting conformance with the performance and testing standards referenced in this Item, including pre-installation test results of the cable system,
- installation, splicing, terminating and testing plan and procedures,
- documentation of final terminated or spliced fibers, function, and equipment designation,
- OTDR calibration certificate,
- post-installation, post termination, subsystem, and final end-to-end test results,
- loss budget calculation and documentation,
- complete parts list including names of vendors,
- complete maintenance and trouble-shooting procedures, and
- proof of minimum experience and completed projects.

4.12.1. **Installation Practice.** Submit for approval electronic copy of the Contractors Installation Practices 30 working days prior to installation. Submit installation practices and procedures and a list of installation, splicing and test equipment used. Provide detailed field quality control procedures and corrective action procedures.

4.12.2. **Manufacturer's Certification.** Accompany each reel of fiber optic cable with the manufacturer's test data showing the conformance to the requirements in this Item.

4.12.3. **Test Procedures.** Submit test procedures and data forms for the pre-installation, post-installation, subsystem, final end to end test, and loss budget calculations for approval. Test procedures will require

approval before performing tests. Submit 1 copy data forms containing data and quantitative results, as well as an authorized signature. Submit a copy of the OTDR results as a hard copy or electronic copy in PDF format including all OTDR traces and clearly identifying each event (fusion splice, jumper, connector, etc.) with the measured loss identified.

- 4.13. **Testing.** Perform tests in accordance with testing requirements in this Item, USDA RUS CFR 1755.900, and TIA/EIA-455-61 test specifications. For all tests, provide test forms to be used that compare measured results with threshold values.

4.13.1. **Test Methods.**

- 4.13.1.1. **Optical Time Domain Reflectometer (OTDR) Tests.** Use the OTDR to measure fiber optic cable for overall attenuation (signal loss dB/km), fiber cable length, and identify fiber optic cable anomalies such as breaks. Perform the following 4 OTDR tests:

- pre-Installation test (Acceptance test),
- post installation test,
- post termination test, and
- final end to end test.

OTDR Settings:

- generate a file name for each OTDR scan. The file name must indicate the location or direction the test was run from, as well as the fiber number being tested,
- set the "A" cursor at the beginning of the fiber trace and set the "B" cursor at the end of the fiber trace. The distance to cursor "B" indicates the length of the fiber cable segment being measured,
- match the index of refraction to the index of the factory report,
- set the loss indicator to dB/km for the acceptance test,
- the reflectance is automatically set internally by the OTDR,
- set the pulse width at a medium range. Change the pulse width to a slow pulse width when an anomaly occurs on the fiber trace so that it can be examined closely,
- set the average at medium speed. Change the average to slow when an anomaly appears on the fiber trace to allow for closer examination of the anomaly, and
- set wavelength at 2 windows for single mode cable: 1310 nm and 1550 nm.

Provide the current OTDR calibration certificate for the device used, showing the unit has been calibrated within the last year. Show all settings on test result fiber scans.

- 4.13.1.2. **Pre-installation Tests.** Test and record the fiber optic cable at the site storage area prior to installation.

Conduct bi-directional OTDR tests for each fiber strand. Test each optical fiber in the cable from one end with an OTDR compatible with wavelength and fiber type. Check testing for length, point discontinuity, and approximate attenuation. Record each measurement by color, location, and type of fiber measured. Perform a measurement from the opposite end of that fiber in case a measurement cannot be made from one end. Wait for notification if loss per kilometer exceeds manufacturer's test data by more than 0.5 dB/km or point discontinuity greater than 0.05 dB.

Perform this test within 5 days from receipt of the fiber optic cable. Test overall attenuation (dB/km), total cable length, anomalies, and cable problems. Test cable at both wavelengths (1310 nm and 1550 nm for single mode cable). Verify that the cable markings on the outer jacket are within 1% of the total cable length.

Compare factory test results with test results and return to manufacturer if test results are not identical to factory test results. If identical, document the test results. Deliver documentation for future reference.

- 4.13.1.3. **Post-installation Tests.** Re-test and re-record each optical fiber in the cable after installation, before termination, for loss characteristics. Test both directions of operations of the fiber.

Immediately perform the post installation test after the fiber optic cable has been installed. Test cable for overall attenuation, cable segment length, and evidence of damage or microbend with the OTDR. Replace any cable segment that is damaged during the test and document test results. Submit test results for approval.

Use the same OTDR settings for Post-Installation Tests as the Pre-Installation Tests.

4.13.1.4. **Post Termination Tests.** Perform the post termination test after the cable is terminated or spliced, including termination of fiber cable to fiber cable or fiber cable to fiber pigtail and fiber cable to patch panels. Check attenuation, fusion or termination point problems, and overall fiber cable segment. Determine if the attenuation and quality of the termination complies with these Specifications; if not, re-terminate the fiber and re-test until the Specification requirements are met. Test the fiber segment for attenuation and anomalies after termination acceptance. Document and submit test results after fiber segment acceptance.

4.13.1.5. **Subsystem Tests.** Perform network subsystem tests after integration to the fiber optic network. Test the capability of the fiber optic cable to transmit video and digital information from node to node. A node is defined as a communication cabinet, hub cabinet, surveillance cabinet, or hub building where network hub switches are located. Complete and submit approved data forms for approval.

Correct and substitute components in the subsystem if the subsystem tests fail and repeat the tests. Components may include: cable, jumper, patch panel module, or connector.

Prepare and submit a report if a component was modified as result of the subsystem test failure. Describe in the report the failure and action taken to remedy the situation.

4.13.1.6. **Final End-to-End Test.** Perform final end to end Test after fiber cable segments of the system are terminated using the OTDR and an optical Power Meter and Light Source (PMLS).

Perform the Part 1 of the final end to end test using OTDR:

- measure the overall fiber cable system length,
- measure the overall system attenuation, and
- check for anomalies.

Perform the Part 2 of the final end to end test using a PMLS:

- measure the absolute power of the fiber optic signal across all links, and
- check for anomalies.

Document and submit results after test acceptance.

4.13.2. **Loss Budget Calculation and Documentation.** Calculate the total loss budget of the system according to the following calculations and compare the actual loss in each segment of the system to the calculated budget. Submit the results for each section of fiber optic cable in tabular format reporting if the total loss is within the limits of these Specifications by noting "pass" or "fail" for each segment of fiber. A segment of fiber is defined as one that terminates at each end. Use the following calculations to determine the loss budget for each segment:

- splice loss budget = number of splices x 0.1 dB/splice,
- connector loss budget = number of connectors x 0.75 dB/connector,
- length loss budget = length of fiber optic cable (measured by OTDR) x 0.35 dB/km for 1310 nm wavelength or 0.25 dB/km for 1550 nm wavelength, and
- total Loss Budget = splice loss budget + connector loss budget + length loss budget.

Provide loss budget calculation equations on test form to be submitted as part of the documentation requirements. Provide threshold calculations described above along with measured results.

- 4.14. **Training.** Conduct a BISC or IMSA certified training class (minimum of 16 hr.) for up to 10 representatives designated by the Department on procedures of installation, operations, testing, maintenance and repair of all equipment specified within this specification. Submit to the Engineer for approval, 10 copies of the training material at least 30 days before the training begins. Conduct training within the local area unless otherwise authorized by the Engineer Include the following training material:
- NESC, NEC, and ANSI/TIA 590 code compliance,
 - fiber optic cable pulling and installation techniques,
 - use of installation tools,
 - splicing and terminating equipment and test instruments,
 - trouble shooting procedures, and
 - methods of recording installation and test data.
- 4.15. **Warranty.** Provide a warranty for all materials furnished in this Item. Ensure that the fiber optic cable, the splice enclosures, splice centers, and cable markers have a minimum of a 2 yr. manufacturer's warranty and that 95% of that warranty remains at the date of final acceptance by the Engineer. If the manufacturer's warranties for the components are for a longer period, those longer period warranties will apply. Guarantee that the materials and equipment furnished and installed for this project performs according to the manufacturer's specifications.

Ensure that the manufacturer's warranties for off-the-shelf equipment consisting of splice enclosures, splice trays, connectors, fiber jumper cables, and fiber patch panels are fully transferable from the Contractor to the Department. Ensure that these warranties require the manufacturer to furnish replacements for any off-the-shelf part or equipment found to be defective during the warranty period at no cost to the Department within 10 calendar days of notification by the Department.

Ensure that the manufacturer's warranty for fiber optic cable is fully transferable from the Contractor to the Department. Ensure that the warranty requires the manufacturer to furnish replacement fiber optic cable found to be defective during the warranty period at no cost to the Department within 45 calendar days of notification by the Department.

5. MEASUREMENT

Fiber optic cable installed, relocated and removed will be measured by the linear foot. Fiber optic splice enclosures, rack mounted splice enclosures and fiber optic patch panels will be measured by each unit installed. Splicing of Fiber Optic Cables will be measured by each fusion splice performed.

6. PAYMENT

6.1. Furnish and Install.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Fiber Optic Cable" of the various types, and number of fibers specified. This price is full compensation for furnishing and installing all cable; for pulling through conduit or duct; aerial installation; terminating; testing; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Fiber Optic Splice Enclosure" of the various types and "Rack Mounted Splice Enclosure." This price is full compensation for furnishing and installing all enclosures whether aerial, underground, in cabinet or in building; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Fiber Optic Fusion Splice" for each fusion splice

shown on the plans and performed. This price is full compensation for splicing; testing; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Fiber Patch Panel" of the various types and sizes specified. This price is full compensation for furnishing and installing all patch panels and terminating fibers on the panel as shown on the plans; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

Conduit will be paid for under Item 618, "Conduit" and Special Specification 6016, "ITS Multi-Duct Conduit."

Electrical conductors will be paid for under Item 620, "Electrical Conductors."

- 6.2. **Install Only.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit bid price for "Fiber Optic Cable (Install Only)" of the various types, and number of fibers specified. This price is full compensation for installing fiber optic cable furnished by the Department; for pulling through conduit or duct; aerial installation; terminating; testing; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

Conduit will be paid for under Item 618, "Conduit" and Special Specification 6016, "ITS Multi-Duct Conduit."

Electrical conductors will be paid for under Item 620, "Electrical Conductors."

- 6.3. **Relocate.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Relocate Fiber Optic Cable." This price is full compensation for relocating all cable, regardless of cable size; for pulling through conduit or duct; aerial installation; terminating; testing; and for materials, equipment, labor, tools, documentation, and incidentals.

- 6.4. **Remove.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Remove Fiber Optic Cable". This price is full compensation for removing all cable for salvage, regardless of cable size; testing; returning to the Department; and for materials, equipment, labor, tools, documentation, and incidentals.

Special Specification 6010

Closed Circuit Television (CCTV) Field Equipment



1. DESCRIPTION

Furnish, install, relocate, or remove closed circuit television (CCTV) field equipment at locations shown on the plans, or as directed.

2. MATERIALS

2.1. **General Requirements.** Fabricate, provide, assemble, and install materials that are new, corrosion resistant and in strict accordance with the details shown on the plans and in the specifications.

Provide CCTV field equipment that is compatible with software currently in operation in order to interface with the existing equipment and software located in the Department's Traffic Management Control (TMC) Centers across the state.

CCTV field equipment to include the following:

- color video camera units,
- camera lenses, filters, control circuits and accessories,
- camera housing,
- medium duty pan and tilt units with click and drag position control,
- camera control receivers,
- local field control unit (if required for operation),
- video and camera control and power cable connectors and assemblies,
- video, data, and power surge suppression, and
- built-in ID generator.

2.2. **Functional Requirements for Analog CCTV.** Provide color video cameras that are solid state design and that meet the following functional requirements:

2.2.1. **General.**

2.2.1.1. **Digital Signal Processing (DSP):**

- digital zoom with manual override functionality,
- auto and manual iris control,
- auto and manual exposure control with built in frame buffer,
- auto and manual focus control, and
- built-in ID generator, with white letters on black outline minimum or approved equivalent.

2.2.1.2. **Image Pickup Device.** Single chip interline transfer solid state color matrix charge-coupled device (CCD) or complementary metal-oxide semiconductor (CMOS) sensor. Provide a sensor having a minimum of 752 (H) X 480 (V) effective pixels.

2.2.1.3. **Resolution.** Greater than 350 lines vertical and greater than 460 lines horizontal, interlaced 2:1, measured per EIA-170A Standard. No discernible interlace jitter or line pairing on the viewing monitor. System limiting resolution that conforms to FCC regulations for broadcast signals.

2.2.1.4. **Frame Rate.** Adjustable frame rate frequency up to 30 frames per second.

- 2.2.1.5. **Encoded NTSC Video Signal Format.** Conformance to the National Television Standards Committee (NTSC) specification and produce NTSC compatible video in accordance with EIA-170A Standard, governed by the Electronic Components Association (ECA), for video output 1 V p-p composite also known as 140 IRE units per Institute of Radio Engineers (IRE). Provide up to 16 dB automatic gain control (AGC).
- 2.2.1.6. **Output Impedance.** 75 ohms \pm 5%.
- 2.2.1.7. **Aspect Ratio.** Width to height aspect ratio of 4:3.
- 2.2.1.8. **Image Quality.** Ability to produce clear, free from distortion, usable video images of the areas, vehicles, objects, and other subjects visible from a roadside CCTV site. Ensure that video produced by the camera is true, accurate, distortion free, and free from transfer smear, oversaturation, and any other image defect that negatively impacts image quality under all lighting and weather conditions in both color and monochromatic modes.
- 2.2.1.9. **Over Exposure Protection.** Minimize glare and incur no permanent damage to the camera when pointed directly at strong light sources, including the sun, for brief periods of time.
- 2.2.1.10. **Geometric Distortion.** Zero.
- 2.2.1.11. **Signal to Noise Ratio (AGC Off).** 50 dB Minimum (weighted at 4.5 MHz).
- 2.2.1.12. **Electronic Shutter Speed.** Automatic shutter that is user selectable down to at least 1/10,000 sec.
- 2.2.1.13. **Electronic Image Stabilization.** User selectable on or off electronic image stabilization at 5 Hz and 10 Hz minimum.
- 2.2.1.14. **Day (Color) and Night (Mono).** Auto and manual switchover and iris control with user selectable modes for auto and manual control capabilities.
- 2.2.1.15. **Auto White Balance.** Color quality that is maintained by a continuous through the lens automatic white balance for color temperatures from 2850 K to greater than 5100 K with less than 10 IRE units unbalance.
- 2.2.1.16. **Inverted Operation.** Automatic or manual activation image inversion or "flip" operation when rotating through 0° or 180° vertical tilt positions.
- 2.2.1.17. **Mean Time Before Failure.** A minimum of 43,800 hr. or 5 yr. without mechanical malfunction or failure. Act of God failures are exempt.
- 2.2.2. **Lens.** Provide an integral lens assembly for each camera with the following features:
- an f/1.6 or better glass multi-coated zoom lens with variable focal lengths with a minimum 30X zoom range,
 - 10X auto and manual digital zoom minimum, and
 - automatic and manual focus and iris control.
- Provide lenses with capabilities for remote control of the zoom, focus, and iris operations. Mechanical or electrical means provided to protect the motors from overrunning in extreme positions. Lens and controller system capable of both auto iris and remote manual iris operation. Capabilities of lens for auto and manual zoom and focus control. Motorized iris as opposed to auto iris type, for system control capability.
- 2.2.3. **Network Interface Requirements.** Provide equipment that is compatible with the Department's Lonestar™ software and can be integrated into the Department's TMC CCTV control sub-systems through NTCIP 1205 Version 1.08 or latest Department approved version, Open Network Video Interface Forum (ONVIF), or approved equal. Support CoHu, Pelco D, Pelco P protocols, or approved equal for control.

Provide equipment that is compatible with other devices using Telecommunications Industry Association/Electronic Industries Alliance (TIA/EIA)-232 or EIA-422/485 at a rate of 9600 bps.

Provide camera equipment that supports local and remote configuration and management. Configuration and management functions must include access to all user-programmed features, including but not limited to, network configuration, video settings, device monitoring, control setting, and security functions. Configuration and management is achieved through serial login, telnet login, web-based interface, or manufacturer software. Provide manufacturer software with camera for local configuration, system maintenance and management control.

- 2.3. **Functional Requirements for Digital CCTV.** Provide color video cameras that produce digital video in standard definition or high definition that meet the following functional requirements:
- 2.3.1. **General.**
- 2.3.1.1. **Digital Signal Processing (DSP):**
- digital zoom,
 - auto and manual iris control,
 - auto and manual exposure control with built in frame buffer,
 - auto and manual focus control, and
 - built-in ID generator, with white letters on black outline minimum or approved equivalent.
- 2.3.1.2. **Image Pickup Device.** 1.2 megapixel (1,200,000 pixels), or better, progressive scan digital CCD or CMOS sensor.
- 2.3.1.3. **Resolution.** Support the following resolutions:
- 720p (1280 x 720 pixel array),
 - D1 (720 x 480 pixel array),
 - CIF (352 x 240 pixel array), and
 - VGA (640 x 480 pixel array) at a minimum dependent on video stream configuration.
- 2.3.1.4. **Frame Rate.** Allow user selectable frame rates at 30, 15, 7, 4, 2, and 1 frames per second.
- 2.3.1.5. **Data Rate.** Scalable from 64 kbps to 8 Mbps
- 2.3.1.6. **Video Stream Format.** Allow simultaneous encoding and transmission, of a minimum, two configurable digital video streams in conformance with the Moving Picture Experts Group's MPEG-4 part 10 (H.264) and Motion JPEG (MJPEG) video compression technology in accordance with the ISO and IEC requirements detailed in the ISO/IEC 14496-10 standard or most current version. Support configuration of the following at a minimum:
- H.264,
 - MJPEG,
 - H.264 + H.264, and
 - H.264 + MJPEG.
- 2.3.1.7. **Video Stream.** Support both uni-cast (one-to-one) and multi-cast (one-to-many).
- 2.3.1.8. **Aspect Ratio.** Support width to height aspect ratio of 4:3 or 16:9 dependent on TMC monitor video format functionality.
- 2.3.1.9. **Image Quality.** Ensure that video produced by the camera is true, accurate, distortion free, and free from transfer smear, oversaturation, and any other image defect that negatively impacts image quality under all lighting and weather conditions in both color and monochromatic modes.

- 2.3.1.10. **Wide Dynamic Range (WDR).** Operation with manual override option.
- 2.3.1.11. **Over Exposure Protection.** Minimize glare and incur no permanent damage to the camera when pointed directly at strong light sources, including the sun, for brief periods of time.
- 2.3.1.12. **Geometric Distortion.** Zero.
- 2.3.1.13. **Signal to Noise Ratio (AGC Off).** 50 dB minimum (weighted at 4.5 MHz).
- 2.3.1.14. **Electronic Shutter Speed.** Automatic shutter that is user selectable down to at least 1/10,000 sec.
- 2.3.1.15. **Electronic Image Stabilization.** User selectable on or off electronic image stabilization at 5 Hz and 10 Hz minimum.
- 2.3.1.16. **Day (Color) and Night (Mono).** Auto and manual switchover and iris control with user selectable modes for auto and manual control capabilities.
- 2.3.1.17. **Auto White Balance.** Color quality that is maintained by a continuous through the lens automatic white balance for color temperatures from 2850 K to greater than 5100 K with less than 10 IRE units unbalance.
- 2.3.1.18. **Inverted Operation.** Automatic image inversion or "flip" when rotating through 0° or 180° vertical tilt positions when not an integrated unit.
- 2.3.1.19. **Mean Time Before Failure.** A minimum of 43,800 hr. or 5 yr. without mechanical malfunction or failure. Act of God failures are exempt.

2.3.2. **Lens.** Provide an integral lens assembly for each camera with the following features:

- an f/1.6 or better glass multi-coated zoom lens with variable focal lengths with a minimum 18X zoom range,
- 10X auto and manual digital zoom minimum, and
- automatic and manual focus and iris control.

Provide lenses with capabilities for remote control of the zoom, focus, and iris operations. Mechanical or electrical means provided to protect the motors from overrunning in extreme positions. Lens and controller system capable of both auto iris and remote manual iris operation. Capabilities of lens for auto and manual zoom and focus control. Motorized iris as opposed to auto iris type, for system control capability.

2.3.3. **Network Interface Requirements.**

Provide CCTV field equipment that can integrate with the Department's Lonestar™ software and can be integrated into the Department's TMC CCTV control sub-systems through NTCIP 1205 Version 1.08 or higher, Open Network Video Interface Forum (ONVIF), or approved equal. Support CoVu, Pelco D or Pelco P protocols, or approved equal for control.

Provide camera equipment with a Local Area Network (LAN) connection that supports the requirements detailed in the IEEE 802.3 Standard for 10/100 Ethernet connections for half-duplex or full-duplex and provide auto negotiation. Provide equipment with a minimum of 1 Ethernet port, which has a 10/100 Base-TX connection. Provide connectors that conform to EIA and TIA requirements.

Support, at a minimum, RTP, RTSP, UDP/IP, TCP/IP, IPv4, HTTP, IGMPv2, DHCP, NTP, IEEE 802.1x, Ethernet 802.3u, and Telnet.

Provide camera equipment that supports local and remote configuration and management. Configuration and management functions must include access to all user-programmed features, including but not limited to, network configuration, video settings, device monitoring, control setting, and security functions. Configuration

and management is achieved through serial login, telnet login, web-based interface, or manufacturer software. Provide manufacturer software with camera for local configuration, system maintenance and management control.

- 2.4. **Cable Assembly.** Provide camera power and communication cable assembly equipped with cables used for video feed, camera control including PTZ function, communications signaling, and power supply. Camera power and communication cable can be configured as a composite cable or series of isolated cables. The following cable functions may be required depending on the data and video communication interface requirements, as shown on the plans.
- 2.4.1. **Serial.** Provide shielded twisted pair serial based communication cable rated for outdoor use in conformance to EIA RS-232/422/485 Standards, governed by the Electronic Components Association (ECA). Provide serial based conversion hardware, if necessary, to achieve this function.
- 2.4.2. **Video.** Provide coaxial cable, rated for outdoor use, between the camera and the communications equipment interface that is a mid-range RG-59/U type with a solid center conductor with 100% shield coverage, with a cellular polyethylene dielectric, or a cable as recommended by the manufacturer of the CCTV field equipment.
- 2.4.3. **Ethernet.** Provide a shielded twisted pair (STP) Category 5E (or equivalent) at a minimum rated for outdoor use in conformance to TIA/EIA 568B Standard. Cable must not exceed an attenuation of 30 dB per 300 ft. of cable at 100 MHz.
- 2.4.4. **Power.** Provide 3-wire, insulated for 300 V minimum, 115 VAC or 24 VAC power cabling between the camera and the power supply. If 24 VAC power is required, provide needed power supply conversion equipment.

Power may be achieved through Power over Ethernet (PoE) through a power supply or mid-span PoE injector, to be subsidiary to the camera unit, and must conform to the IEEE 802.3af or IEEE 802.3at standard or latest revision.

Provide power and communication cable assembly the entire length of the camera support structure from the camera to the cabinet with an additional 25 ft. of slack in the cabinet. Determine the appropriate length required for each site. The cable assembly is subsidiary to the camera unit.

Provide any necessary data, video, or power conversion hardware necessary to successfully integrate the camera unit into the field equipment cabinet hardware components and onto the communications backbone.

- 2.5. **Video Encoding Interoperability.** Digital video encoders and decoders are necessary to convert the analog signal to digital, transport digital packets via UDP/IP over fiber optic, copper Ethernet, wireless, or leased line networks and convert the digital packets back to an analog signal for viewing on a display monitor. Video encoding and decoding equipment may be achieved through software or hardware means. Ensure camera's encoded video is interoperable with hardware and software decoders from other manufacturers. Ensure the camera's encoded video can be decoded by a minimum of two other manufacturer's software or hardware decoders that are currently in use by the Department. Contact the Department for decoders supported prior to procurement of camera unit.

- 2.6. **Camera Housing.** Provide camera housing assembly and hardware material that reflects sunlight.

Provide camera housing with a sunshield to reduce the solar heating of the camera. The total weight of the camera (including housing, sunshield, and all internal components) must not exceed 35 lb.

Construct viewing window in such a way that unrestricted camera views can be obtained at all camera and lens positions.

Provide gaskets at cable entry point to the camera housing to prevent moisture or dust entry.

When shown on the plans or identified in the general notes, provide heating or cooling functionality with temperature sensors to maintain internal temperatures within the manufacturer required operating temperature range.

- 2.7. **Pan-Tilt Unit.** Furnish and install a medium duty anodized aluminum weatherproof pan-tilt-unit at each camera site, conforming to National Electrical Manufacturer's Association (NEMA) 4X and IP-66 rating or better, when not integral to the camera unit and housing. Provide mounting adapter and required attachment hardware to install the pan-tilt-unit to the pole or mounting bracket. Identify the type of mounting bracket and bolt pattern on shop drawings.

Provide a unit capable of a minimum of 180° vertical range of movement and horizontal movement of 360°, full, continuous rotation movement.

Provide a unit that has a pan and tilt speed of 20° per second minimum and is user adjustable through the full speed range. Unit must be capable of simultaneous pan-tilt movements with variable pan-tilt positioning control allowing variable speeds that are proportional through the zoom range.

Provide pan-tilt unit with a drive accuracy and drive repeatability of less than 1° and has an automatic pre-position speed of 120° per second minimum to a user defined preset position that is user adjustable.

Provide a pan-tilt unit, when not integral to the camera housing, capable of maintaining static position and does not move by more than 1.0° in any direction in speeds greater than 35 mph.

Ensure that the pan-tilt unit has seals and gaskets to protect the motors, gears, and cables and that the seals and gaskets are resistant to ozone, ultraviolet radiation, and other pollutants inherent to all local environmental conditions.

When shown on the plans or identified in the general notes, provide pan-tilt unit with heater that conforms to NEMA 4X standard when not integral to the camera unit and housing.

- 2.8. **Preset Functions.** Provide a camera unit capable of storing a minimum 62 presets for pan, tilt, zoom, and focus settings.

Provide a camera unit capable of user programmable tours with a minimum of 4 tours of up to 32 presets per tour. Any tours may be programmed for panning tours.

Provide a camera unit capable of user programmable sector zones with a minimum of 8 zones allowing right and left pan limitations.

Provide a camera unit capable of user programmable privacy zones with a minimum of 8 zones. Capable of click and drag position control through software.

- 2.9. **Control Receivers.** Provide a camera unit with an integrated camera control receiver, unless otherwise directed, that will execute all camera and lens functions as well as forward communication of commands for the pan-tilt functions to the pan-tilt control receiver. Mount the pan-tilt control receiver inside the pan-tilt unit.

The control receiver receives the data from the camera controller, it decodes the digital command data signals transmitted through the communication transmission interface, checks for errors, and acts on valid data to drive the pan-tilt unit and the camera controls.

Local field control is achieved through compatible control software on a laptop or through local control unit hardware located inside the field cabinet that can be EIA 19 in. rack or shelf mountable. Document that the camera control receiver and pan-tilt control receiver will execute all camera, lens, and pan-tilt functions through a laptop interface or through use of the local control unit hardware. Provide local control unit hardware only when shown on the plans or identified in the general notes.

- 2.10. **Connectors.** Provide and install connectors that are compatible with the communications equipment interfaces identified in Article 2.3.3 and Article 2.4. Supply all mating connectors. Provide all connector pins and mating connectors that are plated to achieve good electrical connection and resistance to corrosion.
- 2.11. **Source ID Generator.** Use a built-in ID Generator to insert camera ID over each of the camera-generated videos.
- Provide a minimum of 2 lines of alpha numeric, case specific, text supporting a minimum of 20 ASCII characters per line, with a minimum character height of 20 pixels, that is user programmable for displaying any combination of ID information consisting of camera, preset, privacy mask, low pressure warning, compass, and time and date at a minimum.
- Allow user selectable location of text to be displayed on the video image at the extreme top or bottom. Text display on the side of the image display prohibited .
- Automatically display the programmed ID with its associated video signal that can be turned on or off by user command.
- In the event of loss of signal or video signal failure, ID Generator automatically passes through failure message to display over video.
- Submit list of available text displays to the Department as part of documentation requirements.
- 2.12. **Cabinet Installation.** Install video communication equipment in a pole mounted equipment cabinet or in a ground mounted equipment cabinet as shown on the plans. Meet the following criteria:
- Contains all the lightning protection devices for data and video.
- Grounded to earth ground.
- Provide connectors for all inputs and outputs for data and video and additional ports for testing video and communications. Use the external connectors for testing and for connections to communication devices.
- 2.13. **Surge Protection.** Provide surge protection for the camera meeting the following requirements:
- mounting adapter – Electrically bonded to mounting structure,
 - pan-tilt mechanism – Electrically bonded to mounting adapter,
 - camera housing – Electrically bonded to pan-tilt mechanism, and
 - power and control cable surge protector – Integrated into cabinet surge protection system.
- 2.14. **Power Requirements.** Provide CCTV field equipment meeting all of its specified requirements when the input power is 115 VAC \pm 20%, 60 Hz \pm 3 Hz, and that maximum power required does not exceed 200 W including optional equipment.
- Provide appropriate voltage conversion, power injectors, or other power supply hardware if the camera equipment or any camera-related ancillary devices requires operating voltages other than 115 VAC \pm 20%, such as 24 VAC, 12 VDC from solar power systems, or rely on PoE. Appropriate voltage converters or injectors must accept an input voltage of 115 VAC or 12 VDC from solar power systems as shown on the plans.
- 2.15. **Primary Input Power Interruption.** Provide CCTV field equipment that meets all the requirements in Section 2.1.4., "Power Interruption" of the NEMA Standard TS2 for Traffic Control System, or most current version.
- 2.16. **Power Service Transients.** Provide CCTV Field Equipment that meets the requirements for Section 2.1.6., "Transients, Power Service" of the NEMA Standard TS2, or most current version.

- 2.17. **Power Service Protection.** Provide equipment that contains readily accessible, manually resettable or replaceable circuit protection devices (such as circuit breakers or fuses) for equipment and power source protection. Provide circuit breakers or fuses sized appropriately such that no wire, component, connector, PC board or assembly is subjected to current loads in excess of their respective design limits upon failure of any single circuit element or wiring.
- 2.18. **Modular Design.** Provide CCTV field equipment hardware installed inside the cabinet that is modular in design that can be either shelf mountable or EIA 19 in. rack mountable. Clearly identify modules and assemblies with name, model number, serial number and any other pertinent information required to facilitate equipment maintenance.
- 2.19. **Connectors and Harnesses.** Make all external connections by means of connectors that are uniquely keyed to preclude improper hookups. Color-code and appropriately label with UV resistant material all wires to and from the connectors. Provide connecting harnesses of appropriate length and terminated with matching connectors for interconnection with the communications system equipment. Provide plated pins and mating connectors to improve conductivity and are corrosion resistant. All connectors utilizing solder type connections must have each soldered connection covered by a piece of heat shrink tubing securely shrunk to protect the connection for short circuiting.
- Provide a wiring diagram detailing wire function and connector pin-out.
- 2.20. **Environmental Design Requirements.** Provide equipment that conforms to NEMA TS2-2003 (R2008), International Electrotechnical Commission (IEC) 60529, and NEMA 250-2008, or most current version, for the following categories:
- 2.20.1. **Temperature.** Provide equipment that conforms to NEMA TS2 Section 2.1.5.1, or latest revision, and meets all the specified requirements during and after being subjected to any combination of the following conditions:
- ambient temperature range of -30 to 165°F,
 - temperature shock not exceeding 30°F per hour,
 - relative humidity of 0 to 100%,
 - moisture condensation on all exterior surfaces caused by temperature changes, and
 - provisions for a heater and blower function will be required to maintain internal temperatures within the manufacturer's operating temperatures for temperature ranges internal to the camera unit not conforming to NEMA TS2 Standard 2.1.5.1.
- 2.20.2. **Vibration.** Provide equipment that conforms to NEMA TS2 Section 2.1.9 and Section 2.2.3, or most current version, and meets all the specified requirements during and after being subjected to a vibration of 5 to 30 Hz up to 0.5 g applied in each of three mutually perpendicular planes for 30 min.
- 2.20.3. **Shock.** Provide equipment that conforms to NEMA TS2 Section 2.1.10 and Section 2.2.4, or most current version, and does not yield permanent mechanical deformation or any damage that renders the unit inoperable when subjected to a shock of 10 g applied in each of three mutually perpendicular planes for 30 min.
- 2.20.4. **Environmental Contaminants.** Provide equipment that conforms to IEC 60529 Section 14.2.6, or most current version, for IP 66 or greater rating when providing a pressurized unit.
- Provide equipment that conforms to IEC 60529 Section 14.2.7, or most current version, for IP 67 or greater rating when providing a non-pressurized unit.
- 2.20.5. **External Icing.** Provide equipment that is tested to conform to NEMA 250-2003 Section 5.6, or latest revision.

- 2.20.6. **Corrosion.** Provide equipment that is tested to conform to NEMA 250-2003 Section 5.10, or latest revision, when located in coastal Districts. Coastal Districts are Beaumont (BMT), Corpus Christi (CRP), Houston (HOU), Pharr (PHR), and Yoakum (YKM).
- 2.20.7. **Wind Rating.** Operational in adverse weather conditions and able to withstand wind loads in accordance with Department's basic wind velocity zone map standard as shown on the plans without permanent damage to mechanical and electrical equipment.

3. CONSTRUCTION

- 3.1. **General.** Maximize standardization and consistency by utilizing industry standard techniques in equipment design and construction, with the minimum number of parts, subassemblies, circuits, cards, and modules. Design equipment for ease of maintenance.

Provide mounting bracket assemblies or apparatus to mount equipment on the following structures as detailed in the plans or on the ITS standards:

- ITS Pole,
- overhead sign bridge or cantilever overhead sign structure ,
- retaining wall, and
- concrete column or parapet.

Provide mounting bracket design with documentation submittal for approval prior to fabrication. Include all mounting plates, screws, bolts, nuts, washers, and ancillary hardware needed to fabricate the entire mounting bracket.

- 3.2. **Mechanical Components.** Provide stainless steel external screws, nuts and locking washers. Self-tapping screws are not acceptable.

Provide parts that are made of corrosion resistant material; examples include: plastic, stainless steel, anodized aluminum, or brass.

Protect all materials used in construction from fungus growth and deterioration due to sustained moisture.

Separate dissimilar metals by an inert dielectric material.

- 3.3. **Wiring.** Provide wiring that meets the requirements of the National Electrical Code (NEC) most current version. Provide wires that are cut to proper length before assembly. It is not acceptable to "double-back" wires to take up slack inside the cabinet. Lace wires neatly with nylon lacing or plastic straps. Organize cables neatly inside the cabinet and secure cables with clamps. Provide service loops at connection points when connecting to hardware inside the cabinet. No splicing of cables or exposed wiring is allowed. Clearly label all wiring.

- 3.4. **Relocation of CCTV Field Equipment.** Perform the relocation in strict conformance with the requirements herein and as shown on the plans. Completion of the work will present a neat, workmanlike, and finished appearance. Maintain safe construction practices during relocation.

Inspect the existing CCTV field equipment, with a representative from the Department, and document any evidence of damage prior to removal. Conduct a pre-removal test in accordance with the testing requirements contained in this Item to document operational functionality. Remove and deliver to the Department, existing CCTV field equipment that fail inspection.

Prior to removal of existing CCTV field equipment, disconnect and isolate the power cables from the electric power supply and disconnect all communication cabling from the equipment located inside the cabinet. Coil and store power and communication cabling inside the cabinet until such time that it can be relocated.

Remove existing CCTV field equipment as shown on the plans only at such time as authorized by the Engineer.

Use care to prevent damage to any support structures. Any portion of CCTV field equipment or camera pole structure damaged or lost will be replaced by the Contractor at his expense. Contractor to document and report to the Department any existing damage to equipment prior to removal.

Make all arrangements for connection to the power supply and communication source including any permits required for the work to be done under the Contract. Provide wire for the power connection at least the minimum size indicated on the plans and insulated for 600 V. Meet the requirements of the NEC most current version.

- 3.5. **Removal of CCTV Field Equipment.** Disconnect and isolate any existing electrical power supply prior to removal of existing CCTV field equipment,

Perform removal in strict conformance with the requirements of this Specification, and the lines, grades, details and dimensions shown on the plans. Completion of the work will present a neat, workmanlike, and finished appearance.

Any portion of the CCTV field equipment or cabinet internal components damaged or lost will be replaced by the Contractor (with items requiring the approval of the Engineer) at no cost to the Department.

All materials not designated for reuse or retention by the Department will become the property of the Contractor and be removed from the project site at the Contractor's expense. Deliver items to be retained by the Department to a location shown on the plans or general notes. The Contractor is fully responsible for any removed equipment until released by the Engineer.

- 3.6. **Contractor Experience Requirements.** Contractor or designated subcontractor must meet the following experience requirements:

- 3.6.1. **Minimum Experience.** Three years of continuous existence offering services in the installation of CCTV camera systems.

- 3.6.2. **Completed Projects.** Three completed projects consisting of a minimum of 5 cameras in each project where the personnel installed, tested and integrated CCTV cameras on outdoor, permanently mounted structure(s) and related camera control and transmission equipment. The completed CCTV camera system installations must have been in continuous satisfactory operation for a minimum of 1 yr.

- 3.6.3. **Equipment Experience.** Three projects (may be the three in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of equipment suppliers to perform specific stages of work. The Contractor will not be required to furnish equipment on this project from the supplier who furnished documentation demonstrating this experience.

Submit the names, addresses and telephone numbers of the references that can be contacted to verify the experience requirements given above.

- 3.7. **Documentation Requirements.** Provide a minimum of 2 complete sets of operation and maintenance manuals in bound hard copy format, as well as an electronic copy in Adobe PDF format on a CD/DVD or removable flash drive that include the following:

- complete and accurate wiring schematic diagrams,
- complete installation procedures,
- compliance matrix documenting conformance to this specification,
- complete performance specifications (Functional, electrical, mechanical and environmental) on the unit,
- complete parts list including names of vendors for parts not identified by universal part number such as JEDEC, RETMA, or EIA,

- pictorial of component layout on circuit board,
- ID Generator list of text display options,
- complete maintenance and trouble-shooting procedures,
- complete stage-by-stage explanation of circuit theory and operation,
- testing procedures and blank test forms,
- recovery procedures for malfunction,
- instructions for gathering maintenance assistance from manufacturer, and
- provide the Department with certification documentation verifying conformance with environmental and testing requirements contained in the special specification. Certifications may be provided by the manufacturer or through independent labs.

Identify material which is copyrighted or proprietary in nature as part of the documentation submittal. The Department will comply with sensitive material and secure submittal documentation and not distribute without written approval.

3.8. **Testing.**

3.8.1. **New Installations.** Unless otherwise shown on the plans, perform the following tests on the applicable equipment or systems.

3.8.1.1. **Test Procedures Documentation.** Provide 5 copies of the test procedures to include tests identified in Article 5.1.2 through Article 5.1.7 inclusive and blank data forms to the Engineer for review and comment as part of material documentation requirements for each test required on this project. Include the sequence of the tests in the procedures. The Engineer will comment, approve, or reject test procedures within 30 days after Contractor submittal of test procedures. Contractor to resubmit if necessary rejected test procedures for final approval within 10 days. Review time is calendar days. Conduct all tests in accordance with the approved test procedures.

Record test data on the data forms, as well as quantitative results. No bid item measurement or payment will be made until the Engineer has verified the test results meet the minimum requirements of the specification. The data forms for all tests, except design approval tests, must be signed by an authorized representative of the Contractor.

Provide written notice to the Engineer within 48 hr. of discovery of any testing discrepancy identified during testing by the Contractor. Furnish data forms containing the acceptable range of expected results as well as the measured values.

3.8.1.2. **Design Approval Test.** Conduct a design approval test on one randomly selected unit from the prototype design manufacturing run. If only 1 design prototype is manufactured, perform this test on that unit. If supplying multiple types of the equipment, provide and test a sample of each type.

Certification from an independent testing laboratory of a successfully completed design approval test is acceptable. Ensure that the testing by this laboratory is performed in accordance with the requirements of this specification. Failure of independent tests to comply with the requirements of this specification will be grounds for rejection of any certification.

Provide a copy of the certification to the District in which this contract is executed. The data forms for the design approval tests must be signed by an authorized representative (company official) of the equipment manufacturer or by an authorized representative of an independent testing facility.

Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests. Perform the following tests:

- 3.8.1.2.1. **Power Service Transients.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to the power service transients as specified in Section 2.2.7.2, "Transient Tests (Power Service)" of the NEMA TS2 standard, most current version.
- 3.8.1.2.2. **Temperature and Condensation.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to the following conditions in the order specified below:
- stabilize the equipment at -30°F and test as specified in Sections 2.2.7.3, "Low-Temperature Low-Voltage Tests" and 2.2.7.4, "Low-Temperature High-Voltage Tests" of the NEMA TS2 standard, most current version
 - allow the equipment to warm up to room temperature in an atmosphere having relative humidity of at least 40%. Operate the equipment for 2 hr., while wet, without degradation or failure, and
 - stabilize the equipment at 165°F and test as specified in Sections 2.2.7.5, "High-Temperature High Voltage Tests" and 2.2.7.6, "High-Temperature Low-Voltage Tests" of the NEMA TS2 standard, most current version.
- 3.8.1.2.3. **Relative Humidity.** Provide equipment that meets the performance requirements, specified in this Item, within 30 min. of being subjected to a temperature of 165°F and a relative humidity of 18% for 48 hr.
- 3.8.1.2.4. **Vibration.** Provide equipment that shows no degradation of mechanical structure, soldered components, or plug-in components and operates in accordance with the manufacturer's equipment specifications after being subjected to the vibration tests as described in Section 2.2.8, "Vibration Test" of the NEMA TS2 standard, most current version.
- 3.8.1.2.5. **Power Interruption.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to nominal input voltage variations as specified in Section 2.2.10 "Power Interruption Test" of the NEMA TS2 standard, most current version.
- 3.8.1.3. **Demonstration Test.** Conduct a demonstration test on applicable equipment at an approved Contractor facility. The Contractor may submit procedures and results from previous contracts in the same District as this Contract provided the materials and equipment are identical, provided results are less than 5 yr. old. Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests. Perform the following tests:
- 3.8.1.3.1. **Examination of Product.** Examine each unit carefully and document that the materials, design, construction, markings and workmanship comply with the requirements of this Item.
- 3.8.1.3.2. **Continuity Tests.** Check the wiring to determine conformance with the requirements of the appropriate paragraphs in this Item.
- 3.8.1.3.3. **Operational Test.** Operate each unit for at least 15 min. to permit equipment temperature stabilization and an adequate number of performance characteristics to ensure compliance with the requirements of this Item.
- 3.8.1.4. **Field Acceptance (Stand-Alone) Test.** Conduct a field acceptance test for each unit after installation as required by the Engineer in order to demonstrate compliance with the functional requirements with this Item. Exercise all stand-alone (non-network) functional operations. Notify the Engineer 5 working days before conducting this test. The field acceptance test may consist of the following:
- 3.8.1.4.1. **Physical Construction.** Document physical construction is completed in accordance with the plans and specification.
- 3.8.1.4.2. **Electrical and Communication.** Document that all connectors for grounding, surge suppression, and electrical distribution are tightened correctly. Document all power supplies and circuits are operating under the proper voltages. Document all power and communications cables are terminated correctly, secured inside the cabinet, and fitted with appropriate connectors.

- 3.8.1.4.3. **Video Signal.** For analog signal format, conduct an impedance test, through a short 75 ohm coaxial cable, to an oscilloscope waveform monitor to ensure 75 ohm output impedance to conform with NTSC standards.
- Through use of a digital, hand-held, battery operated meter, conduct a test and measure the following video signal characteristics, if applicable:
- 3.8.1.4.3.1. **Sync.** Document the amplitude of the video synchronizing pulse and check for correct video level, coaxial cable continuity, and correct termination level is 40 IRE.
- 3.8.1.4.3.2. **Luminance.** Document the white level and correct brightness setting is 100 IRE.
- 3.8.1.4.3.3. **Composite.** Document the overall amplitude of the video signal is at 140 IRE or 1 V peak to peak.
- 3.8.1.4.3.4. **Color Burst.** Document color burst amplitude at 40 IRE.
- 3.8.1.4.3.5. **Ground-loop.** Document that no ground loop exists in the video picture. Ground loop voltages in the video signal causes bars to be present on the video picture.
- Document video image is present and free from over-saturation and any other image defect in both color and monochrome modes.
- Document video support of unicast and multicast video transmission modes.
- Document the video signal from the camera is present and of consistent quality at all connection points between the camera, the cabinet, and any video conversion hardware.
- 3.8.1.4.4. **Communication.** For digital camera models, document network connection to the camera through ping or telnet session from a remote PC. For analog camera models, document serial data transmission to execute control through serial ports.
- 3.8.1.4.5. **Pan-Tilt Mechanism.** Exercise pan, tilt, zoom, and focus in all directions and execute a minimum of 3 other unique programming commands, specified by the Department, to ensure that the communication link between the cabinet and the camera is functioning properly.
- 3.8.1.5. **System Integration Test.** Conduct a system integration test on the complete functional system. Demonstrate all control and monitor functions for each system component for 72 hr. Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests.
- Provide systems integration test procedures for proper adjustment and calibration of subsystem components. Proper adjustment and calibration involves documenting settings used to meet functional requirements while providing a margin for adjustment when future conditions change. Utilize the Department control software (when available) to perform subsystem testing. At a minimum, utilize this software to verify commands and confirms, as well as, detector actuations and occupancy dwell time. The Contractor is responsible for being familiar with any existing Department equipment and software.
- The failure of any one component material or equipment item in a system integration test is justification for rejecting the entire subsystem. Each subsystem component must function as a complete integrated subsystem for a minimal continuous 72 hr. period during the system integration test.
- 3.8.1.6. **Final Acceptance Test.** Following completion of the demonstration test, standalone test, and system integration test for all subsystems, provide completed data forms containing all of the data taken, including quantitative results for all tests, a set of "as built" working drawings, and a written request to begin a data communication and final acceptance test. Provide "as built" working drawings indicating the actual material, equipment, and construction of the various subsystem components, including established and calculated XY coordinates based on project control points provided by the Engineer, when shown on the plans. Perform field surveying and calculations under the supervision of and sealed by a licensed land surveyor.

Within 10 calendar days of the request, execute a data communications test using a Department supplied software program or Contractor supplied software approved by the Department. The data communications test may be executed by the Engineer or the Contractor with the prior approval of the Engineer. The purpose of this test is to verify that the communications plant will operate with application software provided by the State.

Perform the data communications test for a period of 72 hr. If a message error or component failure occurs anywhere in the network, resume the test once repairs are completed. All components of the communications network must operate as an integral system for the duration of the test.

A message error is defined as the occurrence of a parity error, framing error, or data error in any component of the message. The error free message rate is defined as the ratio of the number of messages in which no message error occurs to the number of messages transmitted. The error free message rate must exceed 99.99% for acceptable transmission quality, both for the system as a whole, and for each component of the network.

Provide all additional test results to the Engineer for review once a successful data communications test has been completed. If all the requirements of this specification have been satisfied, contract time will stop and all subsystems will be placed into operation and operate as a complete system for a period of 90 days.

Notify the Engineer of any defects suspected in integration or function of material or equipment. Investigate any suspected defects and correct if necessary. Provide a report of finding within 2 calendar days of notice of any suspected defects. Describe the nature of the any defects reported and any corrective action taken in the report. The integrated subsystems must operate defect free as a single complete system for a minimum of 72 continuous hours during a 30 calendar day review period. If the number of defects or frequency of failures prevents any subsystems from operating as described above, the Engineer may reject the entire subsystem(s) integration test results and resume contract time. Provide any necessary corrections and resubmit subsystem(s) integration test results and a request to begin a final acceptance test which may include "as built" plans and a data communications test.

The CCTV field equipment under this Item will not be accepted until the system, inclusive of all subsystems, has operated satisfactorily for a period of 90 days and in full compliance with the plans and specifications after approval of all submitted test results and reports.

- 3.8.1.7. **Consequences of Test Failure.** If a unit fails a test, submit a report describing the nature of the failure and the actions taken to remedy the situation prior to modification or replacement of the unit. If a unit requires modification, correct the fault and then repeat the test until successfully completed. Correct minor discrepancies within 30 days of written notice to the Engineer. If a unit requires replacement, provide a new unit and then repeat the test until successfully completed. Major discrepancies that will substantially delay receipt and acceptance of the unit will be sufficient cause for rejection of the unit.

Failure to satisfy the requirements of any test is considered a defect and the equipment is subject to rejection by the Engineer. The rejected equipment may be offered again for retest provided all noncompliance has been corrected.

If a failure pattern develops in similar units within the system, implement corrective measures, including modification or replacement of units, to all similar units within the system as directed. Perform the corrective measures without additional cost or extension of the contract period.

- 3.8.1.7.1. **Consequences of Design Approval Test Failure.** If the equipment fails the design approval test, correct the fault within 30 days and then repeat the design approval test until successfully completed.
- 3.8.1.7.2. **Consequences of Demonstration Test Failure.** If the equipment fails the demonstration test, correct the fault within 30 days and then repeat the demonstration test until successfully completed.
- 3.8.1.7.3. **Consequences of Field Acceptance (Stand-Alone) Test Failure.** If the equipment fails the stand-alone test, correct the fault within 30 days and then repeat the stand-alone test until successfully completed.

3.8.1.7.4. **Consequence of System Integration Test Failure.** If the equipment fails the system integration test, correct the fault within 30 days and then repeat the systems integration test until successfully completed.

3.8.1.7.5. **Consequences of Final Acceptance Test Failure.** If a defect within the system is detected during the final acceptance test, document and correct the source of failure. Once corrective measures are taken, monitor the point of failure until a 30 consecutive day period free of defects is achieved.

If after completion of the initial test period, the system downtime exceeds 72 hr. or individual points of failure have not operated for 30 consecutive days free of defects, extend the test period by an amount of time equal to the greater of the downtime in excess of 72 hr. or the number of days required to complete the performance requirement of the individual point of failure.

3.8.2. **Relocation and Removal.**

3.8.2.1. **Pre-Test.** Provide 5 copies of the test procedures to include tests of the basic functionality of the unit and blank data forms to the Engineer for review and comment as part of material documentation requirements. Functionality tests may include, but are not limited to, physical inspection of the unit and cable assemblies, lens iris and zoom control, video signal, and pan-tilt mechanism. Include the sequence of the tests in the procedures along with acceptance thresholds. The Engineer will comment, approve, or reject test procedures within 30 days after Contractor submittal of test procedures. Contractor to resubmit if necessary rejected test procedures for final approval within 10 days. Review time is calendar days. Conduct all tests in accordance with the approved test procedures.

Conduct basic functionality testing prior to removal of CCTV field equipment. Test all functional operations of the equipment in the presence of representatives of the Contractor and the Department. Ensure that both representatives sign the test report indicating that the equipment has passed or failed each function. Once removed, the equipment becomes the responsibility of the Contractor until accepted by the Department. Compare test data prior to removal and test data after installation. The performance test results after relocation must be equal to or better than the test results prior to removal. Repair or replace those components within the system which failed after relocation but which passed prior to removal.

3.8.2.2. **Post Test.** Testing of the CCTV field equipment is for the purpose of relieving the Contractor of maintenance of the system. The Contractor will be relieved of the responsibility for maintenance of the system in accordance with Item 7, "Legal Relations and Responsibilities", after a successful test period. The Contractor will not be required to pay for electrical energy consumed by the system.

After all existing CCTV field equipment has been installed, conduct approved continuity, stand alone, and equipment system tests. Furnish test data forms containing the sequence of tests including all of the data taken as well as quantitative results for all tests. Submit the test data forms to the Engineer at least 30 days prior to the day the tests are to begin. Obtain Engineer's approval of test procedures prior to submission of equipment for tests. Send at least 1 copy of the data forms to the Engineer.

Conduct an approved stand-alone test of the equipment installation at the field site(s). At a minimum, exercise all stand-alone (non-network) functional operations of the field equipment with all of the equipment installed per the plans as directed by the Engineer. Complete the approved data forms with test results and turn over to the Engineer for review and either acceptance or rejection of equipment. Give at least 30 working days notice prior to all tests to permit the Engineer or his representative to observe each test.

The Department will conduct approved CCTV field equipment system tests on the field equipment with the central equipment. The tests will, as a minimum, exercise all remote control functions and display the return status codes from the controller.

If any unit fails to pass a test, prepare a report and deliver it to the Engineer. Describe in the report the nature of the failure and the corrective action needed. If the failure is the result of improper installation or damage during reinstallation, reinstall or replace the unit and repeat the test until the unit passes successfully, at no additional cost to the Department or extension of the Contract period.

- 3.9. **Warranty.** Warrant the equipment against defects or failure in design, materials, and workmanship for a minimum of 3 yr. or in accordance with the manufacturer's standard warranty if that warranty period is greater. The start date of the manufacturer's standard warranty will begin after the equipment has successfully passed all tests contained in the final acceptance test plan. Any CCTV field equipment with less than 90% of its warranty remaining after the final acceptance test is completed will not be accepted by the Department. Guarantee that equipment furnished and installed for this project performs according to the manufacturer's published specifications. Assign, to the Department, all manufacturer's normal warranties or guarantees on all electronic, electrical, and mechanical equipment, materials, technical data, and products furnished for and installed on the project.

CCTV field equipment will be repaired or replaced at the Contractor's expense prior to completion of the final acceptance test plan in the event of a malfunction or failure. Furnish replacement parts for all equipment within 10 days of notification of failure by the Department.

- 3.10. **Training.** Conduct a training class for a minimum of 24 hr., unless otherwise directed, for up to 10 representatives designated by the Department on procedures of installation, operations, programming hardware settings, IP programming, port settings, testing, maintenance, troubleshooting, and repair of all equipment specified within this specification. Submit to the Engineer for approval, 10 copies of the training material at least 30 days before the training begins. Conduct training within the local area unless otherwise authorized by the Engineer. Consider operations through Department's Lonestar software when developing training modules.

4. MEASUREMENT

This Item will be measured by each CCTV field equipment unit and mounting apparatus furnished, installed, relocated, or removed, of the types specified as shown on the plans, or as directed.

5. PAYMENT

- 5.1. **Furnish and Install.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit bid price for "CCTV Field Equipment (Analog)", "CCTV Field Equipment (Digital)", and "CCTV Field Controller". This price is full compensation for making fully operational CCTV field equipment including any voltage converters or injectors, cables and connectors as shown on the plans; and all documentation, testing, training, software, equipment, labor, materials, tools, and incidentals.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" for CCTV field equipment mounting assemblies will be paid for at the unit bid price for "CCTV Mount (Pole)", "CCTV Mount (Post)", "CCTV Mount (Wall)", "CCTV Mount (Parapet)", "CCTV Mount (Pendant)", and "CCTV Mount (Mast)". This price is full compensation for furnishing and installing mounting bracket assemblies, mounting bracket hardware; and all equipment, labor, materials, tools, equipment, and incidentals necessary to mount CCTV field equipment to mounting structures as shown on the plans.

- 5.2. **Install Only.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit bid price for "CCTV Field Equipment (Analog) (Install Only)" and "CCTV Field Equipment (Digital) (Install Only)." This price is full compensation for making fully operational CCTV field equipment including any voltage converters or injectors, furnishing and installing additional cables and connectors as shown on the plans; and all documentation, testing, training, software, equipment, labor, materials, tools, and incidentals.
- 5.3. **Relocate.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" for relocation of CCTV field equipment will be paid for at the unit bid price for "Relocate CCTV Field Equipment." This price is full compensation for relocating and making fully operational existing CCTV field equipment as shown on the plans; furnishing and installing additional cables or connectors as shown on the plans; for testing, delivery and storage of components designated for salvage or reuse; and all testing, training, software, equipment, labor, materials, tools, and incidentals.

- 5.4. **Remove.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" for removal of CCTV field equipment will be paid for at the unit bid price for "Remove CCTV Field Equipment." This price is full compensation for removing existing CCTV field equipment as shown on the plans; removal of cables and connectors; for testing, delivery and storage of components designated for salvage; and all testing training, software, equipment, labor, materials, tools, and incidentals.

Special Specification 6016

Intelligent Transportation System (ITS) Multi-Duct Conduit



1. DESCRIPTION

Furnish and install Intelligent Transportation System (ITS) multi-duct conduit identified for fiber optic communication use of the type and size specified. Provide conduit suitable for installation in an outdoor underground environment including constant immersion in water, mounted to retaining walls, and mounted above ground on the underside of a bridge without any degradation to the conduit.

2. MATERIALS

Provide new materials that comply with the details shown on the plans, the requirements of this Item, and the requirements of the following Items:

- Item 400, "Excavation and Backfill for Structures,"
- Item 401, "Flowable Fill,"
- Item 402, "Trench Excavation Protection,"
- Item 421, "Hydraulic Cement Concrete,"
- Item 445, "Galvanizing,"
- Item 476, "Jacking, Boring, or Tunneling Pipe or Box,"
- Item 618, "Conduit," and
- Item 620, "Electrical Conductors".

In addition, provide ITS multi-duct conduit meeting the requirements of the following Items:

- Underwriters Laboratories (UL) 651,2420, and 2515,
- National Electrical Manufacturers Association (NEMA) Standard TC-2,
- NEMA TC-7,
- NEMA TC-14B,
- National Electrical Code (NEC), and
- Departmental Materials Specification DMS 11030, "Conduit".

Provide underground ITS multi-duct conduit materials that have been tested and listed as defined in the NEC for the specific use to meet the following industry standards:

- Bellcore/Telcordia Technologies document GR-356,
- American Society for Testing and Materials (ASTM)-D1784, Standard Specification for Rigid (PolyVinyl Chloride) (PVC) Compounds and (Chlorinated Poly Vinyl Chloride) (CPVC) Compounds,
- ASTM-D1785, Standard Specification for Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120,
- ASTM-D2122, Standard Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings,
- ASTM-F2160, Standard Specification for Solid Wall High Density Polyethylene (HDPE) Conduit Based in Controlled Outside Diameter,
- ASTM-D2412, Standard Test Method for Determination of External Loading, and
- ASTM-D3350, Standard Specification for Polyethylene Plastic Pipe and Fittings Materials.

Provide above ground ITS multi-duct conduit materials that have been tested and listed as defined in the NEC for the specific use to meet the following industry standards:

- ASTM-A90, Standard Test Method for Weight of Coating on Iron and Steel Articles with Zinc-Alloy Coatings,
- ASTM-D2105, Standard Test Method for Longitudinal Tensile Properties of "Fiberglass" (Glass-Fiber-Reinforced Thermoplastic-Resin) Pipe and Tube, and
- ASTM-D2444, Standard Test Method for Determination of the Impact Resistance of Thermoplastic Pipe and Fittings by Means of a Tup (Falling Weight).

3. EQUIPMENT

3.1. General Requirements.

- 3.1.1. **Pre-Assembled Multi-Duct.** Provide a pre-assembled multi-duct conduit system of the material type specified with a nominal 4 in. inner diameter round outer duct containing 4 factory installed 1.25 in. nominal diameter round inner ducts. Inner ducts must be held together in a square configuration by a system of spacers. The design of the spacers, which hold the individual conduits in formation, must be capable of locking them tightly together to prevent free twisting of the inner ducts.

For pre-assembled multi-duct, provide a single protective end cap for each bundled 10 ft. or 20 ft. conduit sections, factory bends, and fittings.

- 3.1.2. **Fittings.** Provide all required sweeps, bends, repair couplings, ground box termination kits, alternative outer ducts, adapters, preassembled split repair kits, lubrication access fittings, tug-plugs, slit-inner duct plugs, hangers, brackets, expansion joints, and accessories to complete the conduit system as incidentals.

- 3.1.3. **Flexural Modulus.** Do not exceed the ovality of the conduit system by 5%.

3.1.4. Environmental Requirements.

For underground construction, provide conduit that will perform in an ambient temperature range of -30°F to 122°F without degradation of material properties In accordance with the NEC.

For above ground conduit construction, provide conduit that performs in an ambient temperature range of -60°F to 200°F without degradation of material properties.

- 3.1.5. **Corrosion Resistance.** Provide a conduit system that is resistant to most harsh chemicals and protected against degradation due to oxidation or general corrosion.

- 3.1.6. **Direct Bury.** Provide a conduit system capable of being installed by trenching or boring as shown on the plans.

- 3.1.7. **Free of Defects.** Provide a conduit system free of visible cracks, holes, or other physical defects that would degrade its performance.

- 3.1.8. **Uniformity.** Provide conduit that is uniform as practical in respect to overall dimensions, color, density, and thickness.

- 3.1.9. **Stabilization.** Provide conduit with a UV light stabilizer which will protect it, for a minimum of 12 mo., from degradation due to prolonged exposure to direct sunlight.

- 3.1.10. **Conduit Identification.** Provide conduit with a durable identification labeling showing the name and trademark of the manufacturer, conduit size, date of manufacture and "TxDOT - Fiber Optic Cable System" identification.

- 3.1.11. **Grounding.** Provide a bare copper No. 8 AWG system grounding conductor, in accordance with Item 620, "Electrical Conductors", in 1 inner duct of the conduit duct system if no other cable is to be installed in the conduit system for use as a grounding conductor between ground boxes.
- 3.2. **Outer Duct.**
- 3.2.1. **PVC Multi-Duct.** Provide heavy walled Schedule 40 polyvinyl chloride (PVC) or heavy walled Schedule 80 PVC outer duct with a nominal inside diameter (ID) of 4 in. as shown on the plans or as directed for underground construction. Provide minimum 20 ft. sections of conduit.
- Incorporate a longer integral bell in place of the standard 3-1/2 in. bell to accommodate the length of the coupling body.
- Provide 4 in. Schedule 40 conduit with an average outside diameter (OD) of 4.5 in. and a minimum wall thickness of 0.237 in..
- Provide 4 in. Schedule 80 conduit, or equivalent with an average OD of 4.75 in. and a minimum wall thickness of 0.337 in. When providing an equivalent to Schedule 80, provide independent laboratory testing certifications showing the equivalent product meets or exceeds performance and testing requirements to that of Schedule 80.
- 3.2.2. **Rigid Metal Multi-Duct.** Provide galvanized rigid metal conduit (RMC) outer duct with a nominal ID of 4 in. as shown on the plans or as directed. Provide a minimum 10 ft. section of conduit.
- Provide 4 in. RMC with an average OD of 4.5 in. and a minimum wall thickness of 0.225 in.
- 3.2.3. **Fiberglass Multi-Duct.** Provide, bullet resistant, pure, high grade, reinforced thermosetting resin conduit outer duct with a nominal ID of 4 in. as shown on the plans or as directed. Provide a minimum 10 ft. section of conduit.
- Provide 4 in. fiberglass conduit with a minimum OD of 4.25 in. and a minimum wall thickness of 0.250 in.
- 3.3. **Inner ducts.** Provide inner duct Schedule 40 PVC or High Density Polyethylene (HDPE) conduit with a 1.25 in. nominal diameter. Extrude inner ducts in a controlled OD fashion.
- 3.3.1. **Spacers.** Hold together the inner ducts with spacers located throughout each section of conduit. Factory install the system of spacers to hold inner ducts in place during transport and maintain alignment within the outer duct. Mold spacers from high impact plastic, and be factory certified to withstand all handling pressures and stresses.
- 3.3.2. **Longitudinal Ribbing.** For HDPE inner ducts, incorporate longitudinal ribbing and permanent dry lubricant that is extruded to provide friction reduction in cable installation.
- 3.3.3. **Identification by Color.** Provide inner ducts that are uniquely defined by the extrusion of a different color for each of the inner ducts; colors must be orange, yellow, red, and black.
- Provide black inner duct that is placed directly in line with the manufacturer's identification on the outer duct for ease of identification and installation.
- Duct designated for backbone fiber will be black in color; duct designated for distribution fiber will be orange and red in color; and duct designated for drop (field cabinet) fibers cable will be yellow in color.
- 3.3.4. **Pull Cord.** Provide a flat pull cord in all empty inner ducts. Provide a pull cord with a tensile strength of 1,250 lb. minimum and have foot markings to determine length installed.

- 3.4. **Fittings.** Provide fittings with the same material to the connecting conduit unless otherwise shown on the plans.
- 3.5. **Coupling Body.** Provide a factory installed primary coupling body that is manufactured as a hard plastic coupling body incorporating conical shaped target areas to accommodate self-alignment of each inner duct upon field assembly.
- Provide a coupling body that incorporates sealing devices to facilitate field assembly and prevent water and foreign material leakage from outside the multi-duct system and to prevent air leakage from inside the inner ducts. Assemble solely by hand without use of special tools such that no lubricant will be required for field assembly of this conduit system.
- Provide the coupling body with its sealing members sealing the outer walls of the inner ducts and the inner wall of the outer duct providing an airtight seal from within the inner duct system and a watertight seal from the outside of the outer duct.
- Provide the gasket or sealing members that is an anti-reversing design in such that the lengths of conduit stay joined together without the need for solvent cement.
- Provide the field connection end of the internal coupling body that incorporates shaped target areas to accommodate self-alignment of the inner ducts with bore openings during field assembly.
- Provide the coupling body that has one of the bore openings on the field assembly side uniquely identified to facilitate proper continuous inner duct alignment during field assembly.
- The coupling body must seal the inner duct so that after the application of 100 psi to an inner duct, the inner duct must be capable of maintaining a minimum of 15 psi for 24 hr. Employ an approved independent commercial testing laboratory to perform the above test. Submit certified reports of test to Department.
- 3.6. **Expansion Joints.** Provide expansion joints having a material similar to the connecting conduit unless otherwise shown on the plans.
- Use conduit expansion fittings at structure expansion joint crossings.
- 3.7. **Termination Kits.** Provide end or pass-through termination kits from the same conduit manufacturer for termination in ground boxes and junction boxes.
- Ensure a watertight seal of conduit to structure wall when terminating conduit.
- 3.8. **Multi-Duct Sweeps.** Conduit deflection should not deviate more than 1 in. horizontally or vertically per foot (1:12) of running length of conduit. Long conduit sweeps should be used wherever possible to change conduit direction in order to reduce the pulling tension required during cable installation.
- For conduit deflection at obstructions, utilities, or transitions to structures where the 1:12 deflection requirement above or long sweeps are not possible, use complete conduit manufactured minimum 36 in. radius sweeps (11-1/4°, 22-1/2°, 30°, 45°, and 90° angles) complete with bell and spigot. Do not field bend conduit.
- 3.9. **Fiber Optic Cable Route Markers.** Furnish tubular delineator markers, minimum 6 ft. in length and a minimum 3 in. OD, and constructed of Type III HDPE material. Provide marker assemblies that are orange in color and ultraviolet stabilized to help prevent components from color fading, warping, absorbing water, and deterioration with prolonged exposure to the elements. Refer to the Standard Details for details of the text on the decal that should be affixed to each marker. Ensure that all markers furnished on this project are new and consistent in appearance.

Install markers using a method that firmly and securely anchors the marker a minimum of 1 ft. into the ground to prohibit twisting and easy removal. When located at an ITS ground box, marker may be placed within the concrete riprap apron avoiding rebar reinforcement. Spacing between markers should not exceed 1,000 ft. or as shown on the plans and placed at significant changes in direction such as a 90° turn. Do not place markers in any roadway paved surface.

4. CONSTRUCTION

- 4.1. **Underground Construction.** Place conduit in accordance with the lines, grades, details and dimensions shown on the plans or as directed. Maintain constant slope to prevent water from being trapped in the conduit system.

Ream all conduit ends to remove burrs and sharp edges.

Install underground conduit system a minimum of 42 in. from ground surface to the top of the conduit unless otherwise directed or to avoid utility conflicts or field conditions. When conditions require trench depths greater than 5 ft., provide trench protection in accordance with Item 402, "Trench Excavation Protection." Install conduit in accordance with the requirements of the NEC and USDA RUS.

Fasten all external conduit placed on structures with conduit straps or hangers as shown on the plans or as directed. Conduit straps, hanger systems, and junction boxes are incidental to this Item.

Fit the conduit terminations with bushings or bell ends with duct plugs. Seal inner ducts with duct plugs within 24 hr. of conduit placement. This includes but is not limited to intermediate or incomplete sections of conduit system prior to conduit splicing or termination in ground boxes.

Document Global Positioning System (GPS) coordinate points, in NAD83, and provide to the Department for shifts or deviations of the ITS multi-duct alignment from the plans required to avoid obstructions or utilities. GPS coordinate points to be recorded at the point of curvature and point of tangent for horizontal or vertical transitions and include installed depth.

- 4.1.1. **Proofing.** Prior to installation of cables or final acceptance, pull a spherical template having a diameter of not less than 75% of the inside diameter of the inner duct through the inner duct to insure that the inner duct is free from obstruction. At the conclusion of proofing, fit ends of all empty inner ducts with duct plugs or caps within 24 hr.

- 4.2. **Trench Construction.** Provide minimum Schedule 40 PVC conduit when conduit is installed through trenching method unless otherwise shown on the plans or as directed.

Provide a 2 in. minimum layer of sand at the bottom of the trench to serve as a bedding material for construction.

Provide conduit spacers made of a non-metallic material designed for installation underground and encased in concrete. Spacers should be of the type recommended by the conduit manufacturer and designed with an interlocking device and stackable to relieve the conduit of both horizontal and vertical stress. Provide spacers sized appropriately for the conduit with a minimum height of 2 in. spaced at 5 ft. intervals throughout the trench. Set conduit spacers directly on the sand bedding. Spacers must be anchored to prevent floating of conduit system and maintain constant slope.

Conduit system will be encased in the following materials based on depth of trench:

- 4.2.1. **Greater than 24 in.** For trench depths greater than 24 in. from the ground surface to the top of the ITS multi-duct conduit, encase the conduits in flowable fill to an elevation of 6 in. above the top of conduit in accordance with Item 401, "Flowable Backfill," or Class B concrete, maximum aggregate size 5, in accordance with Item 421, "Hydraulic Cement Concrete." Class B concrete at the discretion of the Engineer and will be shown on the plans. Backfill above encasement as defined in Section 4.2.3.

- 4.2.2. **Less than 24 in.** When a trench depth less than 24 in. is required, encase the conduits in Class B concrete, maximum aggregate size 5, to an elevation of 6 in. above the top of conduit in accordance with Item 421, "Hydraulic Cement Concrete." Backfill above encasement as defined in Section 4.2.3.
- 4.2.3. **Excavation and Backfill.** Trench, excavate, and backfill as shown on the plans and in accordance with Item 400, "Excavation and Backfill for Structures."
- 4.2.4. **Marking Tape.** Place a 4 in. wide detectable underground metalized mylar conduit marking tape over the ITS conduit at a minimum depth of 1 ft. below grade when no other electrical marking tape required or 8 in. below electrical marking tape when provisioned under Item 618, "Conduit".
- Imprint the marking tape "TxDOT Conduit and Fiber Optic Cable System - Call TxDOT Before Proceeding" every 18 in.
- 4.2.5. **Restoration of Trench Areas.** Where existing surfacing is removed for placing conduit, repair by backfilling with material equal in composition and density to the surrounding areas and by replacing any removed surfacing, such as asphalt pavement or concrete riprap, with like material to equivalent condition in accordance with Item 400, "Excavation and Backfill for Structures."
- 4.3. **Boring Construction.** Jacking and boring when required will be in accordance with Item 476, "Jacking, Boring, or Tunneling Pipe or Box"..
- When boring under pavement shallower than 48 in. from finish grade to top of conduit, provide Schedule 40 steel casing under pavement to encase the conduit system as shown on the plans unless otherwise directed. Provide steel casing of a size to accommodate all conduits in addition to 20% space capacity for pulling conduits through the steel casing. Steel casing will be furnished in accordance with this Item.
- During boring operation, locate bore head every 10 ft. along the bore path and before traversing underground utilities or structures. Use digital walkover locating system to track bore head during boring operation. Ensure locating system is capable of determining pitch, roll, heading, depth, and horizontal position of the bore head and document this information at the intervals specified above for as-built information..
- 4.4. **Above Ground Construction.** Place conduit in accordance with the lines, grades, details and dimensions shown on the plans or as directed. Maintain constant slope to prevent water from being trapped in the conduit system.
- Provide rigid metal conduit or fiberglass conduit for outer duct when system is mounted externally along a bridge or above ground structure. Provide fiberglass or other non-corrosive outer duct for coastal Districts where conduit is exposed to corrosive environments due to salt in the air.
- Provide rigid metal conduit outer duct that is hot-dipped galvanized in accordance with Item 445, "Galvanizing."
- Ground rigid metal conduit in accordance with the Department's Electrical Details and in accordance with the NEC.
- Provide fiberglass conduit that is bullet resistant, heavy walled, pure, high grade, reinforced thermosetting resin conduit.
- Provide conduit, elbows, and fittings that are manufactured from the same resin, hardener, or glass systems manufactured by the same filament wound system.
- 4.5. **Testing.** Perform tests in accordance with industry testing requirements identified in Article 2, "Materials."
- 4.5.1. **General.** Furnish certified documentation from an independent testing laboratory documenting compliance with all ASTM, NEMA, NEC, UL, and Telcordia Technologies standards as referenced in this Item.

Provide test procedures and blank test forms and conduct performance tests for all materials and equipment not previously tested and approved. If technical data is not considered adequate for approval, samples may be requested for test. The Contract period will not be extended for time lost or delays caused by testing prior to final approval of any items.

Compare the results of each test with the requirements of this Item. Failure to conform to the requirements of any test must be identified as a defect and the materials will be subject to rejection by the Engineer. Offer rejected materials again for retest provided all non-compliances have been corrected and retested by the Contractor with evidence submitted to the Engineer.

- 4.5.2. **Examination of Product.** Examine each conduit system component prior to installation carefully to verify that the materials, design, construction, markings, and workmanship comply with the requirements of this Item.
- 4.5.3. **References.** The ITS multi-duct conduit system supplier must submit 3 references, preferably State Departments of Transportation, where this supplier's conduit system has functioned successfully for a period of no less than 1 yr. Include current name and address of organization, and the current name and telephone number of an individual from the organization who can be contacted to verify system installation. Provide this information with documentation submittal. Failure to furnish the above references will be sufficient reason for rejection of the supplier's equipment.
- 4.6. **Documentation Requirements.** Submit documentation of the conduit system consisting of the following for Engineer approval 30 days prior to installation:
- manufacturer specifications or cut sheets for all components of the conduit duct system,
 - laboratory certified material test reports documenting conformance with pertinent standards identified under Article 2, "Materials",
 - GPS coordinates,
 - pre-installation test procedures,
 - post-installation test procedures, and
 - as-built of installed conduit system.

5. MEASUREMENT

ITS multi-duct conduit will be measured by the linear foot of the multi-duct conduit system.

Fiber optic cable road marker will be measured by each maker furnished and installed.

6. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided for under "Measurement" will be paid for at the unit price bid for "ITS Multi-Duct Conduit" of the types and construction method specified. This price is full compensation for furnishing and installing conduit; for jacking, boring, steel encasement, excavating, furnishing, and placing backfill; concrete encasement; replacing pavement structure, sod, riprap, curbs, or other surface; testing of the conduit system; for furnishing and installing all fittings, clamps, sweeps, bends, repair couplings, adapters, ground box or manhole termination kits, pre-assembled split repair kits, lubrication access, fittings, hangers, brackets, junction boxes, expansion joints, concrete, and detectable underground metalized mylar conduit marking tape; pull cords, and for all labor, tools, equipment and incidentals necessary to complete the work.

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Fiber Optic Cable Road Marker." This price is full compensation for furnishing and installing all cable markers; and for materials, equipment, labor, tools, documentation, warranty, training and incidentals.

Copper grounding conductor will be paid under Item 620, "Electrical Conductors."

This Item applies only to ITS multi-duct conduit. Any other conduit for communication or electrical use will be in accordance with and paid for under Item 618, "Conduit."

Special Specification 6017

Communications Hub Building



1. DESCRIPTION

Furnish and install Communications Hub Buildings as shown on the plans, as detailed in this Special Specification and as directed by the Engineer. Use these buildings to house the various surveillances and control equipment required for the system. Install and test each building upon completion of the work.

1.1. **Submittal Components.** As a minimum, the submittal for this Item completely addresses the following:

- Hub building shop drawing showing:
 - dimensions
 - doors
 - mounting channel
 - shelving
 - conduit routing
 - material list
 - exterior finish
 - door lock
 - door pin switches
- Power cable terminals
- RJ-11 voice communications jacks
- Terminal blocks
- Grounding
- Environmental parameters
- Wiring diagrams of all building panels
- Fan assembly and thermostat
- Air filter
- Light fixtures
- Building foundation drawing
- Power distribution panel
- Transient, surge and power line emi suppressors
- Circuit breakers

2. MATERIALS

Ensure overall floor dimensions of the structure are a minimum 6 ft. x 8 ft., or as required on the plans.

Ensure the suitability of the building for the equipment complement shown at each field location on the plans. Furnish and install if required, a larger size building fully at no additional cost. Other than size, ensure the selected building meets the requirements of this Specification and base mounted.

Components, back and side panels, terminal strips, harnesses, and connectors as well as mounting hardware necessary to provide for installation of equipment as described herein and on the plans. Ensure all electronic components comply with Special Specification Item, "Electronic Components."

Construct the building using unpainted sheet aluminum with a minimum thickness of 0.100 in. Design the building to withstand a 100 mph wind load. Ensure the exterior of the building is unpainted and the interior painted white.

Ensure all external screws, nuts and locking washers are stainless steel. Do not use self-tapping screws unless specifically approved by the Engineer. Ensure all parts are made of corrosion resistant material, such as plastic, stainless steel, aluminum or brass. Ensure all materials used in construction are resistant to fungus growth and moisture deterioration. Separate dissimilar metals by an inert dielectric material. Do not allow wood, wood fiber product, or flammable products in the building.

Ensure buildings conform to the requirements of ASTM B209 for 5052-H32 aluminum sheet.

Welds on aluminum buildings are to be done by using the gas metal arc (MIG) or gas tungsten arc (TIG) process using bare aluminum welding electrodes. Ensure electrodes conform to the requirements of the American Welding Society (AWS) A5.10 for ER5356 aluminum alloy bare welding electrodes.

Ensure procedures, welding machines and welding machine operators for welding on aluminum are qualified in accordance with the requirements of AWS B3.0, "Welding Procedures and Performance Qualification", and to the practices recommended in AWS C5.6.

Weatherproof the building to prevent the entry of water, dust and dirt. Seal all unwelded seams with a clear or aluminum-colored weather-seal compound.

Equip the building with shelves for supporting all shelf-mounted equipment as shown on the plans. Mount the shelves on unistrut or keyhole channels or equal. Provide shelves at least 10 in. deep in the building and a 1/2 in. clearance between the back of the shelf and wall. Support the shelves at least every 2 ft. of shelf length.

Equip each building with an open frame equipment rack for mounting EIA 19 in. rack mounted equipment. Provide the rack a minimum of 6 ft. of usable equipment mounting space. Provide the rack with mounting platforms to the building foundation with a minimum of 4 bolts. Equip the rack uprights with mounting holes drilled on EIA universal spacing and tapped with 10-32 threads. Ensure the racks are rust resistant and painted. Ground the rack to the building grounding system using a minimum of No. 6 AWG stranded cable. Mount two 12 outlet UL approved 15 ampere circuit breaker protected electrical outlet strips on the rack. Provide the outlet strips with AC power cords 12 ft. in length.

Ensure the building is tamper resistant and has a full size main door to allow entry while standing up. Equip the door with filtered vent openings. Brace the doors and hinges to withstand a 50 lb. per vertical foot of door height load applied vertically to the outer edge of the door when standing open. Ensure no permanent deformation or impairment of any part of the door or building body when the load is removed. Design provisions to hold the doors open at approximately the 90° and 180° positions.

Equip the door with a UL listed lock having the following features: A guard bolt which deadlocks the latch bolt, an inside knob which will always open the lock, and a toggle or other device on the inside which will prevent the outside knob from retracting the latch bolt. An example is the Sargent Function 05. Provide 2 keys for the lock. Provide a chain to limit the opening of the door. Ensure all buildings are keyed alike.

Provide a gasket to act as a permanent dust and weather resistant seal at the building door facings. Use a gasket material of a non-absorbent material to maintain its resiliency after long term exposure to the outdoor environment. The gasket has a minimum thickness of 3/8 in., and located in a channel provided for this purpose either on the building or on the door(s). A channel formed by an "L" bracket and the door lip is acceptable. In any case, the gasket must show no sign of rolling or sagging and must insure a uniform dust and weather resistant seal around the entire door facing. Any other method is subject to the Engineer's approval during inspection of an order.

Ensure the building is vented and cooled by a thermostatically controlled fan. The fan has a minimum capacity of 600 cu. ft. per minute.

The thermostat is an adjustable type with an adjustment range of 90°F to 135°F. Provide a press-to-test switch to test the operation of the fan.

Ensure the fan is a 12 in. commercially available model and designed to operate reliably over the temperature range of -30°F to 165°F. The intake for the vent system is filtered with a 16 in. (wide) by 25 in. (high) by 1 in. (thick) air conditioning filter. Securely mount the filter so that any air entering the building must pass through the filter. Screen the building opening for intake of air to prevent entry of insects and large enough to use the entire filter. Ensure the screen has openings no larger than 0.125 sq. in. Ensure the total free air opening of the vent is large enough to prevent excessive back pressure on the fan.

Mount one industrial type fluorescent light fixture with white porcelain enamel reflector and 4, 4 ft. fluorescent lamps in the building. Provide the light with an on-off switch. Position the light to provide illumination to all maintenance areas of the building.

Install one momentary pin-type door switch in the building or on the door. Wire the switch to a terminal block for the purpose of detecting a building intrusion condition by Satellite Control Center equipment.

Ensure the building foundation is included as part of this bid item. Mount the buildings on a concrete foundation as shown on the plans. Construct the cabinet foundation in accordance with Item 656, "Foundations for Traffic Control Devices". Ground the building to a 5/8 in. (minimum) copper clad ground rod 8 ft. long driven into the ground and installed in the foundation.

Provide the building with a unique 5 digit serial number which is stamped directly on the building or engraved on a metal or metalized mylar plate epoxied or riveted with aluminum rivets to the building. The digits are at least 0.2 in. in height and located on the upper right side wall near the front of the building.

Submit details of the building to the Engineer for review and approval prior to fabrication.

Submit a building layout for each building location for approval by the Engineer. Only buildings with an approved layout are accepted under this project.

Ensure the equipment, design, and construction uses the latest available techniques with a minimum number of different parts, subassemblies, circuits, cards and modules to maximize standardization and commonality.

Design the equipment for ease of maintenance. Ensure all component parts are readily accessible for inspection and maintenance.

2.1. **Electrical Requirements.**

2.1.1. **Distribution Panel.** Furnish the buildings with a U.L. listed single phase, 3 wire, 120/240, 100 ampere main circuit breaker, 12 circuit indoor surface mounted power distribution panel mounted on the inside wall of the building. Provide a detailed layout for approval by the Engineer. Ensure the panel is Square D QO series or equal. Install all wiring as per National Electrical Code.

2.1.1.1. **Receptacles.** Install receptacles as shown on the plans. Ensure all receptacles have circuit breaker protection. Ensure electronic equipment receptacles are NEMA type 5-20R or as required to match electronic equipment plugs. Convenience outlets are NEMA type 5-20R and have Ground Fault Circuit Interrupter protection.

2.1.1.2. **Circuit Breakers.** Install circuit breakers as shown on the plans. Provide circuit breakers from the same manufacturer as the distribution panel. Ensure all spare breaker spaces have 20 ampere breakers installed.

Circuit breakers must be unaffected by ambient temperature range, relative humidity, applied power, shock and vibration range specified in Section 2, "Environmental Standards and Test Procedures", of NEMA TS1-1989, latest revision. Ensure circuit breakers have an interrupt capacity of 10,000 amperes and insulation resistance of 100 Megs at 500 VDC. Equip the circuit breakers with solderless connectors and install in such a manner that their rating markings are visible and easily accessible.

The above breakers are in addition to any auxiliary fuses which may be furnished with the electronic equipment to protect component parts. Protect the load side of all circuit breakers by an EDCO Model SHP-300-10S or equivalent 3 terminal lightning arrestor. Use number 8 AWG or larger stranded copper conductors to connect the arrestor into the circuit. Connect the arrestor to the line filter as recommended by the manufacturer.

2.1.1.3. **Radio Interference Suppressor.** Equip all buildings with a radio interference suppressor installed on the load side of each electronic equipment circuit breaker. Provide the suppressor with a minimum attenuation of 50 decibels over a frequency range of 200 kilohertz to 75 megahertz. Hermetically seal the suppressor in a substantial metal case, and then fill with a suitable insulation compound. Ensure the suppressor terminals are nickel plated brass studs of sufficient external length to provide space for connection of 2 appropriately sized conductors and mounted so that the terminals cannot be turned in the case. Design the suppressors for operation at the proper current rating as determined by the Contractor per the plans. Design the suppressors for 120 volts, 60 hertz, operating and approved by UL and EIA.

2.1.1.4. **Power Line Surge Protection.** Install power line surge protectors in each building between the line conductors and ground. Provide and install power line surge protectors as described herein.

Provide one surge protector with a 3 electrode gas tube type and that has the following ratings:

- Impulse Breakdown: Less than 1,000 volts in less than 0.1 microseconds at 10 Kilovolts/microsecond.
- Standby Current: Less than 1 milliampere.
- Striking Voltage: Limit any voltage greater than 212 VDC.
- Capable of withstanding 15 pulses of peak current, each of which will rise in 8 microseconds and fall in 20 microseconds to 1/2 the peak voltage, at 3 minute intervals. Peak current rating must be 20,000 amperes.

Ensure the surge protector uses both metal oxide varistors and silicon avalanche diodes to protect against transients having a single surge energy level up to 70 joules, voltage transients up to 6 kv and current transients up to 6 kA. Provide protection for line to neutral, line to ground and neutral to ground terminals.

Provide the protectors with the following ratings:

- Recurrent peak voltage - 212 volts.
- Energy rating minimum - 120 joules.
- Power dissipation - average 0.85 watts.
- Peak current for pulses of less than 6 microseconds - 20,000 amperes.
- Standby current - less than 1 milliampere.

2.1.1.5. **Power Cable Input Junction Terminals.** Provide a barrier terminal block with a minimum of 2 terminals and 1 compression fitting designed to accept up to a No. 2 AWG stranded wire for the power supply lines. Rate the block at 100 amperes and ensure double binder head screw terminals.

Electrically isolate the AC neutral and equipment ground wiring from the line wiring by an insulation resistance of at least 10 megohms when measured at the AC neutral. Color code the AC neutral and equipment grounding wiring white and green, respectively.

2.1.2. **Loop Input Distribution Panel.** Include in each building a fully wired loop input distribution panel to be mounted on the inside wall of the building. Provide a detailed layout for approval by the Engineer. This panel includes the following components:

2.1.2.1. **Power Distribution.** If any 120 volts AC power is needed for the loop input distribution panel, use the power distribution panel described in Article 4.A. "Distribution Panel".

2.1.2.2. **Loop Surge Protection.** Mount the surge protection for incoming loop pairs on the loop input distribution panel.

- 2.1.3. **Back Panel.** Include in each building a fully wired equipment panels to be mounted on the inside wall of the building. Provide a detailed layout for approval by the Engineer.

Use the back panels to distribute and properly interconnect all building wiring related to the specific complement of equipment called out on the plans. Terminate the cable harness at each item of equipment including any furnished by the Department at terminal boards on the back panel. Ensure all functions available at the equipment connector carries in the connector cable harness to the terminal blocks from the power distribution panel.

Install Voice Communications jacks as required on the plans. Install an RJ-11 modular telephone jack on the back panel and connect it to the voice communication circuit of the communications system. Install a phone jack compatible with the emergency voice communication equipment on the back panel and connect it to the emergency voice communications circuit.

- 2.1.4. **Wiring.** Ensure the building is fully wired and all wiring within the building are neatly wrapped and routed such that opening and closing the door or raising or lowering the back panel will not twist or crimp the wiring. Ensure no cable pressure points are present.

Cut all wires to the proper length before assembly. Ensure no wires are doubled back to take up slack. Ensure harnesses to connectors are covered with PVC sheathing, woven braid or braided. Secure cables with nylon cable clamps.

Provide cable slack to facilitate removal and replacement of assemblies, panels and modules.

Ensure all harnesses and wiring are color coded. In addition, ensure each wire in every harness is hot-stamped every 4 in. with a number indicating the pin number of the connector that the wire is connected to. Ensure harnesses with connectors with pins identified by letters are stamped with numbers that correspond to the alphabetic sequence of the pins. Ensure each harness is cross-referenced to a chart on the building print that lists the connector pin letter or number, the wire number, the terminal number that the wire is connected to and the function of the wire. Ensure each harness is enclosed in PVC sheathing, woven braid or braided. Ensure individual conductors in detector harnesses are exempt from the requirements for hot-stamping. Tie wraps, tape or other cable ties are not acceptable.

Ensure all electrical connections in the building, including relays, flashers, terminal strips, etc., have sufficient clearance between each terminal and the building to provide an adequate distance to prevent a leakage path or physical contact under stress. Ensure all equipment grounds run directly and independently to the ground bus. The lay of the interconnect cable between the components must be such that when the door is closed, it does not press against the cables or force the cables against the various components inside the buildings. Provide sufficient length of cable to easily reach the electronic equipment placed anywhere on the shelves.

Route and bundle all wiring containing line voltage AC separately and/or shielded from all low voltage, i.e., control circuits. Cover all conductors and live terminals or parts, which could be hazardous to maintenance personnel, with suitable insulating material.

Ensure all conductors used on the building wiring are stranded No. 22 AWG or larger. Ensure conductors conform to MIL SPEC MIL-W-168780, Type B or D. Ensure the insulation has a minimum thickness of 10 mils. Ensure all wiring containing line voltage is a minimum size of No. 14 AWG.

Ensure all AC service lines are of sufficient size to carry the maximum current of the circuit or circuits they are provided for. Ensure conductors for AC common are white; conductors for equipment ground are green and all other conductors color different than the foregoing.

Use grounding conductors in all electrical circuits and do not rely on conduit as sole means of grounding. Ensure the ground conductor is sized according to the NEC and has green insulation.

- 2.1.5. **Terminal Blocks.** Provide terminal blocks located on the panels accessible to the extent that it will not be necessary to remove the electronic equipment from the cabinet to make an inspection or connection.

Ensure terminal blocks are 2-position, multiple pole barrier type. Provide shorting bars in each of the positions provided along with an integral marking strip. Arrange terminal blocks so that they do not upset the entrance, training and connection of incoming field conductors. Identify all terminals suitably by legends permanently affixed and attached to the terminal blocks. Ensure not more than 3 conductors is brought to any 1 terminal screw. Ensure no electrically energized components or connectors extend beyond the protection afforded by the barriers. Locate all terminal blocks below the shelves. Ensure terminals used for field connections are secure conductors by means of a No. 10-32 nickel or cadmium plated brass binder head screw. Ensure terminals used for interwiring connections, but not for field connections, are secure conductors by means of a No. 6-32 nickel plated brass binder head screw.

As a minimum, all connections to and from the electronic equipment must terminate to an interwiring type block. These blocks will act as intermediate connection points for all electronic Input/Output.

Permanently identify all terminals in accordance with the building wiring diagram. Where through-panel solder lugs or other suitable connectors are used, permanently attach both sides of the panel as close to the terminal strip as possible and do not affix to any part which is easily removable from the terminal block panel.

Provide and equip detector harnesses with connectors compatible with loop amplifiers used on project. Protect each loop pair by an EDCO Model SRA-16C or Davis Engineering Model DE320 or equivalent surge arrester.

Connection of the detector lead-in cable to the detector terminal blocks must be accomplished in the following manner: Properly dress each cable into position in accordance with the approved lead-in cable position on the panel (bundle the cables together and broken out by their position on the terminal boards). Bring the cable as close to the terminal points as possible and leave floating. Ground the cable shield after testing and in accordance with the loop detector manufacturer's specifications.

- 2.1.6. **Solid State Load Switches.** Ensure the load switches are solid state and have no moving parts. Ensure the load switches meet the requirements set forth in Section 5 of NEMA Standard TS1-1989, latest revision, and are "triple signals load switch" type. Provide an indicator light for each circuit on each load switch. Keep the indicator light on when a true input to the load switch is present. Ensure the load switches are capable of operation at 10 amperes of tungsten lamp load over the specified temperature range.
- 2.1.7. **Building Internal Grounding.** The building internal ground consists of 1 or more ground bus-bars permanently affixed to the building and connected to the grounding electrode. Use bare stranded No. 1/0 AWG copper wire between the bus-bars and between bus-bar and grounding electrode. Ensure each copper ground bus-bar has a minimum of 20 connector points, each capable of securing at least 1 No. 10 AWG conductor. Return AC neutral and equipment ground wiring to these bus-bars.
- 2.1.8. **Transient Suppression.** Place transient suppression devices on the coil side of all relays in the building. Ensure DC relay coils has, as a minimum, a reverse biased diode across the coil. Ensure AC relays has MOV's or equivalent suppression across their coils.
- 2.1.9. **Surge Protection.**
- 2.1.9.1. **Protector and Building Configuration.** Provide all ungrounded conductor wires entering or leaving the building with surge protectors. Keep the conductor leads and the surge protector leads as short as possible with all conductor bends formed to the maximum possible radius. Locate the protector units as near as possible to the entry or exit point, and as far as possible from any electrical equipment. Connect the protector ground lead directly to the ground bus.
- Ensure the surge protector used for AC power does not dissipate any energy and does not provide any series impedance during standby operation. Return the unit to its non-shunting mode after the passage of any surge and do not allow the shunting of AC power.
- 2.1.9.2. **Signal Head Lamp Wires.** Provide all signal light interconnect conductors with surge protectors in the building. Ensure the surge protector has the same characteristics as that specified in Section 4.A.4 of this Specification.

- 2.1.9.3. **Vehicle Detector Loop Lead-In.** Provide each vehicle detector lead-in cable with surge protection. In addition, connect the drain wire of the lead-in cable to the building ground bus.
- 2.1.9.4. **Signal Wires.** Ensure each signal wire entering or leaving the building has 2 stage surge protection with the following characteristics:
- Protector must have input, output and ground connections;
 - Peak surge handling capability: 4,000 amps, 8 X 20 microsecond waveform;
 - Protector life: Must withstand a minimum of fifty 2,000 amp, 8 X 20 waveform surges.
 - Response time: Calculated element speed of 1 X 10-12 seconds, measured speed of less than 20 nanoseconds.
 - Protector clamp voltage: Specified by the Contractor so as to be consistent with the equipment being protected and submitted to the Engineer for approval.
- 2.1.10. **Environmental Design Requirements.**
- Ensure the buildings meet all of its functional requirements during and after subsection to any combination of the following requirements:
- 2.1.10.1. Ambient temperature range of 0°F to 158°F.
- 2.1.10.2. Temperature shock not to exceed 30°F per hour, during which the relative humidity shall not exceed 95%.
- 2.1.10.3. Relative humidity range not to exceed 95% over the temperature range of 40°F to 110°F.
- 2.1.10.4. Moisture condensation on all surfaces caused by temperature changes.
- 2.1.11. Testing, Training, Documentation, Final Acceptance and Warranty
- 2.1.12. Testing of the Communications Hub Building complies with Article 2. of Special Specification, "Testing, Training, Documentation, Final Acceptance, and Warranty".
- Documentation for the Communications Hub Building complies with Article 4. of Special Specification "Testing, Training, Documentation, Final Acceptance and Warranty".
- Warranty for the Communications Hub Building complies with Article 6. of Special Specification, "Testing, Training, Documentation, Final Acceptance and Warranty".

3. MEASUREMENT

This Item will be measured as each unit furnished, installed and tested in accordance with this Special Specification.

4. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" are paid for at the unit price bid for "Communications Hub Building". This price is full compensation for all equipment described under this Item with all cables and connectors, building foundation, documentation and testing, and for furnishing all labor, materials, training, equipment, and incidentals.

Special Specification 6027

Preparation of Existing Conduits, Ground Boxes, or Manholes



1. DESCRIPTION

Prepare conduits, ground boxes, or manholes; replace conduits, ground boxes, or manholes, when necessary; replace conduit fittings with junction boxes; replace damaged ground box or manholes covers; adjust ground box or manholes covers; install pull lines in conduits; install cable racks in ground boxes or manholes.

2. MATERIALS

Provide new materials that comply with the details shown on the plans, the requirements of this Item, and to the pertinent requirements of the following Items:

- Item 624, "Ground Boxes"
- Item 465, "Manholes and Inlets"

When conduit replacement is required, provide conduit meeting the requirements of Item 618, "Conduit." Use conduit of same size and type of that being replaced or as directed.

Provide 24 in. × 24 in. × 12 in. (L × W × D) minimum size NEMA 4X junction boxes with screw covers.

Provide polyester tapes or rope pull cords with a tensile strength of at least 1200 lb.

Provide heavy duty, non-metallic, non-corrosive cable racks that can support a minimum dead load of 300 lbs. Ensure cable racks are resistant to the effects of oils, hydrocarbons, common esters, ketones, ethers, or amides. Ensure cable racks are adjustable between 8 in. and 14 in. wide. Do not provide grounding or insulators for cable racks.

3. CONSTRUCTION

Check existing conduit and ground boxes.

- 3.1. **Preparation of Conduit, Ground Box or Manhole.** Pull a mandrel through empty conduits. Use a mandrel with a diameter greater than 70% of the inside diameter of the conduit and 2 in. length. Repair or replace conduit runs that will not allow passage of the mandrel. Replace conduit deemed impractical to repair or remains unsuitable in accordance with Item 618, "Conduit." Clean the conduit by pulling a rubber swab slightly larger in diameter than the conduit.

Blow compressed air through conduits that contain wires. Remove debris from the conduit by pushing a fish tape through the conduit. Do not use water to clear debris. Retest the conduit by blowing compressed air.

Install 1 pull cord in each conduit for use in installing the conductors, cables, or innerduct. Leave 1 pull cord in each conduit after the conductors, cables, or innerduct have been installed.

Remove silt and debris from ground boxes or manholes prior to installing cable.

- 3.2. **Installation of Ground Box or Manhole.** Furnish new ground boxes or manholes as directed. Install ground boxes or manholes as shown the plans or as directed.

Backfill disturbed surface with material equal in composition and density to the surrounding area. Replace surfacing material with similar material to an equivalent condition.

- 3.3. **Installation or Adjustment of Ground Box or Manhole Covers.** Remove, dispose, and install ground box or manhole covers as shown on the plans or as directed. Adjust ground box or manhole covers as shown on the plans or as directed. Adjustment may include welding, raising, or lowering.

Backfill disturbed surface with material equal in composition and density to the surrounding area. Replace surfacing material with similar material to an equivalent condition.

- 3.4. **Installation of Junction Box.** Locate conduit fittings in conduits carrying fiber optic cables. Replace the conduit fitting and associated section of conduit with a junction box. Install junction boxes as shown on the plans.

- 3.5. **Installation of Cable Rack Assembly.** Install cable racks to permit coiling of conductors or cables without violating the manufacturer's minimum bending radius. Install 2 cable rack supports and 4 adjustable levels on each support, at a minimum, on each wall of the ground box or manhole as shown on plans or as directed. Anchor the cable rack support permanently to the ground box wall with mechanical or powder actuated fasteners. Use fasteners with an ultimate pull out strength of at least 2500 lb. and ultimate shear strength of at least 3000 lb. Provide sufficient cable supports for the particular number of conductors or cables coiled or passing through the ground box or manhole as shown on the plans or as directed.

4. MEASUREMENT

This Item will be measured by the foot of conduit cleared, tested, replaced and repaired, by each cable rack, junction box, ground box, or manhole installed or prepared, and by each ground box or manhole cover replaced or adjusted.

5. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Conduit (Prepare)," "Junction Box (Install)," "Manhole (Install)," "Ground Box (Install)," "Manhole (Prepare)," "Ground Box (Prepare)," "Cover (Replace)" of the sizes specified, "Cover (Adjust)," and "Cable Rack Assembly (Install)." This price is full compensation for cleaning and testing conduit, ground boxes, and manholes; furnishing and installing pull cords, ground boxes, manholes, junction boxes, and cable racks; excavating and backfilling; adjusting ground boxes and manholes covers; disposal of unsalvageable material; and equipment, materials, labor, tools, and incidentals.

Repair of existing conduit will be paid for by the Department in accordance with Article 9.7., "Payment for Extra Work and Force Account Method."

Special Specification 6028

Dynamic Message Sign System



1. DESCRIPTION

Transport, install, and test Department-furnished Dynamic Message Signs (DMS), controller, and equipment cabinets.

2. MATERIALS

Provide all materials not supplied by the Department necessary for the DMS installation. All materials provided by the Contractor must be new. Include a task in the project schedule for delivery of Department furnished materials and provide a minimum of 30 days' notice to the Department for pick-up of Department-furnished materials. Unless otherwise shown on the plans, DMS will be stored by the Department for pick up at location shown on the plans.

Ensure that all materials and construction methods necessary to complete the installation conform to the requirements of this Item, the plans and the pertinent requirements of the following Items:

- Item 432, "Riprap"
- Item 441, "Steel Structures"
- Item 445, "Galvanizing"
- Item 449, "Anchor Bolts"
- Item 618, "Conduit"
- Item 620, "Electrical Conductors"
- Item 656, "Foundations for Traffic Control Devices"

3. CONSTRUCTION

- 3.1. **Installation.** Perform a site survey in advance of the proposed DMS location in order to determine the horizontal and vertical angles of the sign for optimum legibility, based on the manufacturer's recommendations.

Install DMS on overhead sign structures in accordance with this Item and the lines, grades, details and dimensions as shown on the plans or as directed. Maintain safe construction practices. Ensure the mechanical execution of work complies with NEC, Article 110.12. Equipment shall be installed in a neat and workmanlike manner.

Adjustments or additions of sign attachment hardware, support brackets, and appurtenances, such as walkways, conduit, etc., may be necessary for compatibility with specified sign positioning recommended by the manufacturer, as shown on the plans, or as directed. All adjustments or additional materials will not be paid for directly but will be subsidiary to this Item.

Prevent damage to all sign components. Replace any portion of the sign assembly that is damaged or lost during transportation or installation. Do not use any materials furnished by the Department on any work which is not required by and which does not constitute a part of the contract. Materials not used which were furnished by the Department must be returned undamaged to the location from which the materials were obtained upon completion of the work. Any unused or removed material deemed salvageable by the Engineer shall remain the property of the Department and shall be delivered to a designated site. Accept ownership of unsalvageable materials and dispose of in accordance with federal, state, and local regulations.

Stockpile all materials designated for reuse or to be retained by the Department within the project limits or at a designated location as directed.

Equipment to be installed at each DMS field site shown on the plans may include, but not be limited to, the following:

- Dynamic Message Sign (DMS), controller and cabinet (provided by the Department)
- Cabling and connectors from power source to DMS connection point as specified by the DMS manufacturer (Provided by the Contractor).
- Cabling and connectors from telecommunications source to DMS connection point as specified by the DMS manufacturer when required (Provided by the Contractor).
- Communications as shown on the plans
- Power and communication cabling and connectors from controller to DMS shall follow NEMA TS4, Section 4, "Controller to Sign Interface," (cables and termination provided by the Contractor)

Make all arrangements for connection to the power supply and telecommunications source including any required permits. Supply and install any required materials not provided by the utility companies (power or communications service provider).

Construct the foundation for DMS Controller cabinets, when required as shown on the plans, in accordance with Item 656, "Foundations for Traffic Control Devices", unless otherwise directed. Include a 6 ft. x 6 ft. x 5 in. (L x W x D) riprap maintenance pad with foundation, unless otherwise directed. Provide a 5/8-in. diameter by 8 foot copper clad steel ground rod in the foundation of each DMS Controller cabinet.

After the signs have been erected, wash the exterior of the entire sign with a biodegradable cleaning solution, approved by the Engineer, to remove all dirt, grease, oil smears, streaks, finger marks, and other foreign particles.

- 3.2. **Technical Assistance.** Ensure that a manufacturer's representative is available to assist the Contractor's technical personnel at each sign installation site. The manufacturer's representative must provide technical assistance in following areas:

- Site survey for horizontal and vertical angles of sign's mounting orientation
- Sign to structure installation (final responsibility of the Contractor, see 3.3., "Working Drawings.")
- Sign controller cabinet installation
- Sign to controller cabling
- Testing requirements given in Section 3.4., "Testing."

Do not execute the initial powering up of the signs without the permission of the manufacturer's representative.

- 3.3. **Working Drawings.** Before fabrication submit for approval 5 prints of the working drawings for attachment of each DMS. Show the details of any additional sign brackets, sign support connections, and methods of attachment of the signs to the sign support. Have a licensed professional engineer sign, seal and date the working drawings.

- 3.4. **Testing.** Testing of the sign system is for the purpose of relieving the Contractor of maintenance of the system. The Contractor will be relieved of the responsibility for maintenance of the sign system in accordance with Item 7, "Legal Relations and Responsibilities," after all testing is successfully completed.

After delivery of the DMS to the storage site, an approved demonstration test will be conducted prior to transporting the sign to the installation site. Have a manufacturer's representative available to assist with making all necessary connections and preparations for this testing.

After all signs have been installed, the Department and the DMS manufacturer will conduct approved continuity, stand alone, and DMS system tests on the installed field equipment with central, remote, and

laptop equipment. A final acceptance test will be conducted to demonstrate all control, monitor, and communication requirements for 90 days. The Engineer will furnish a Letter acknowledging the final acceptance testing commencement date stating the first day of the final acceptance test. The completion of the final acceptance test occurs when system downtime due to mechanical, electrical, or other malfunctions to equipment furnished or installed does not exceed 72 hr. and any individual points of failure identified during the test period have operated free of defects. Assume responsibility only for test failures directly related to the work in accordance with this Item. Upon completion of successful final acceptance testing, permanently mark acceptance date and project identification information inside the controller cabinet. The Department will pay for electrical energy consumed by the system.

4. MEASUREMENT

This Item will be measured as each DMS system installed and tested.

5. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Installation of Dynamic Message Sign System" of cabinet mounting type specified (pole mounted, foundation mounted or wall mounted). This price is full compensation for transportation and installation of DMS; furnishing and installing any new mounting hardware, and DMS controller cabinet foundation when required; storing the DMS when required; cleaning and testing the DMS; replacement/repair of damaged components; disposal of unsalvageable material and for all manipulations, labor, tools, working drawings, equipment and incidentals.

New overhead sign supports or relocation of existing overhead sign supports will be paid for under Item 650, "Overhead Sign Supports." New drilled shaft foundations will be paid for under Item 416, "Drilled Shaft Foundations." Sign walkways will be paid for under Item 654, "Sign Walkways."

Special Specification 6035

Fiber Optic Video Data Transmission Equipment



1. DESCRIPTION

Furnish and install fiber optic video data transmission equipment in designated equipment cabinets in the field and in the Satellite Control Center as shown on the plans, as detailed in the special specifications, and as directed.

- 1.1. **Submittal Components.** As a minimum, the submittal for this Item is to completely address the requirements of Table 1.

Table 1
Submittal Components

| | | |
|------------------------------|-----------------------------------|---|
| Transmitting device | Data link signal parameters | Optical detector device |
| Operating wavelength | Optical fiber compatibility | Transmitter video/data input parameters |
| Power requirements | Transmitter optical output power | Surge suppression |
| Receiver optical sensitivity | Receiver automatic gain control | Receiver video/data output parameters |
| Connectors: | a. Optical b. Video c. Data | d. Power e. Gold plating |
| Modulation method | Signal to noise ratio | Linearity |
| Tilt | Differential phase | Modular design |
| Differential gain | Housing | Baseband frequency response |
| Environmental parameters | Data link frequency response | Power supply |

2. MATERIALS

Ensure the materials furnished, assembled, fabricated, or installed under this Item are new, corrosion resistant, and in strict accordance with the details shown on the plans and in the specifications.

- 2.1. **Functional Requirements.** Furnish fiber optic video data transmission equipment (transmitter and receiver system) that transmits video from the field video camera and receives pan, tilt, and zoom (PTZ data communications link) data simultaneously for video camera controls. This unit operates with one single mode fiber and utilizes “FC” fiber optic connectors.

Furnish a video fiber optic transmitter that generates optical signals modulated by the baseband video signal from the video camera output in the form of pulse frequency modulation.

Furnish a video fiber optic receiver that detects the optical signal and converts it to baseband video signal. The operating optical wavelength is 1,300 nm.

Ensure each fiber optic link meets RS-250B medium haul video requirements.

Furnish both the video fiber optic transmitter and receiver from the same manufacturer.

- 2.2. **Electrical/Optical Requirements.**

- 2.2.1. **Transmitter Video Input.** Ensure the transmitter video input is 75 Ohms nominal, 1.0 Volt peak to peak RS-170 NTSC standard between sync tip to 100% white level (minus 40 IRE to plus 100 IRE).

- 2.2.2. **Transmitting Device.** Ensure the transmitting device is a light emitting diode (LED) or LASER diode which has a MTBF of 100,000 hours at 160°F ambient.

- 2.2.3. **Transmitter Optical Output.** Ensure the transmitter optical output provides output power to 8/125 single mode glass fiber at a wavelength of 1300 nm sufficient to accommodate a link loss budget of 20 db or more. No optical spacers or optical "doughnuts" are allowed for compensation of optical link operational dynamic range.
- 2.2.4. **Optical Detector.** Ensure the optical detector of the receiver is an APD diode, a PIN, or a device approved by the Engineer.
- 2.2.5. **Receiver Optical Sensitivity.** Ensure the receiver input has a minimum sensitivity of 20 db below the transmitter output level and operates within the parameters of this specification. No optical spacers or optical "doughnuts" are allowed for compensation of optical link operation dynamic range.
- 2.2.6. **Receiver Automatic Gain Control.** Ensure the receiver has automatic gain control (AGC) circuitry to provide the receiver with the required dynamic range from transmitter receiver spacing of 1 to 20 db.
- 2.2.7. **Receiver Video Output.** Ensure the receiver video output is 75 Ohms nominal, 1.0 Volt peak to peak between sync tip and 100% white level.
- 2.2.8. **Modulation.** Provide pulse frequency modulation.
- 2.2.9. **Signal to Noise Ratio.** Ensure the system signal to noise ratio (SNR), measured as peak to peak white to blanking, to rms noise (ppwb/rms) in a 10 KHz to 5 MHz bandwidth, is greater than 60 db.
- 2.2.10. **Linearity.** Provide linearity greater than 1%.
- 2.2.11. **Tilt.** Provide tilt less than 2%.
- 2.2.12. **Differential Phase.** Ensure differential phase is less than 0.5 degrees at 10% to 90% Average Picture Level (APL).
- 2.2.13. **Differential Gain.** Ensure differential gain is less than 2% at 10% to 90% APL.
- 2.2.14. **Frequency Response.** Ensure the video signal frequency response is ± 0.1 dB, 10 Hz to 0.5 MHz; ± 0.2 db, 0.5 MHz to 4.2 MHz. The 3 dB bandwidth is 10 MHz.
- 2.2.15. **Data Link Frequency Response.** Ensure the data link frequency response is DC-100KHz.
- 2.2.16. **Data Link Communications Compatibility.** Ensure the data communications link is field programmable by shorting straps or dip switch settings of the video fiber optic transmission equipment. Furnish a data link that is compatible with RS-232, RS-422, RS485, two wire Manchester, BI-Phase, NRZ, and NRZI digital encoding with greater than ten to the minus ninth Bit Error Rate with more than a 20 db link loss. Furnish a data link compatible with a DB 9, a DB 25 connector, or a terminal block connector.
- 2.2.17. **Optical Fiber Compatibility.** Ensure optical fiber compatibility to be 8/125 micron single mode glass fiber.
- 2.2.18. **Power Requirements.** Provide transmitters and receivers that operate on standard 115 VAC electrical service. Operate the equipment over a voltage range of 115 VAC, ± 20 VAC at 60 HZ. Supply modular units (standalone) with an internal or low voltage external wall-mounted power supply with a minimum of a 6 ft. power cord terminating in a standard 2- or 3-prong line plug. Ensure maximum power requirements do not exceed 5 W for each transmitter or receiver.

Ensure the equipment operation is not affected by transient voltages, surges, and sags normally experienced on commercial power lines. Assume responsibility to check the local power service to determine if any special design is needed for the equipment. If a special design is required, include the extra cost in the bid of this item.

- 2.2.19. **Surge Protection.** Install surge protectors in the equipment cabinet for the coaxial cable connection to the video camera.
- 2.2.20. **Power Service Transients.** Provide equipment that meets the requirements of Section 2.1.6, "Transients, Power Service," of the NEMA Standard TS-2-2003, latest revision.
- 2.2.21. **Wiring.** Furnish line wiring that meets the requirements of the National Electric Code. Cut wires to proper length. Provide cable slacks to facilitate removal and replacement of assemblies, panels, and modules. Do not double back wires to take up slack. Neatly lace wires into cable with nylon lacing or plastic straps. Secure cables with clamps.
- 2.2.22. **Power Service Protection.** Provide equipment containing readily accessible, manually resettable or replaceable circuit protection devices (such as circuit breakers or fuses) for equipment and power source protection.
- 2.2.23. **Fail Safe Provision.** Design the equipment such that the failure of the equipment does not cause the failure of any other unit of equipment.
- 2.3. **Mechanical Requirements.**
- 2.3.1. **Modular Design.** Design modular equipment such that major portions may be readily replaced in the field.
- Mechanically key modules of unlike functions to prevent insertion into the wrong socket or connector.
- Clearly identify modules and assemblies with name, model number, serial number, and any other pertinent information required to facilitate equipment maintenance.
- 2.4. **Connectors and Harness.** Make external connections by means of connectors. Key the connectors to preclude improper hookups. Color code and appropriately mark the wires to and from the connectors.
- Furnish video input and output connectors of the BNC type.
- Plate every conductive contact surface or pin with a minimum of 50 microns of gold.
- Use optical input and output connectors of the "FC" type with stainless steel housing and ceramic ferrule.
- Provide a connecting harness of appropriate length and terminate it with matching connectors for interconnection with the video cameras, video switcher, video multiplexer, and the fiber optic network.
- 2.5. **Housing.** Provide receiver and transmitter packages that are suitable for rack mounting, shelf mounting, or standalone packages. Equip card cages for rack mounting of equipment with a power supply capable of supplying power to a fully-loaded card cage. Rack mount the card cage on a standard EIA 19-in. rack.
- 2.6. **Environmental Design Requirements.** Furnish equipment that meets its specified requirements during and after subjecting to any combination of the following requirements:
- Ambient operational temperature range of -30°F to 165°F
 - Relative humidity range of 0% to 95%

3. CONSTRUCTION

Use equipment that is designed and constructed to utilize the latest available techniques with a minimum number of parts, subassemblies, circuits, cards, and modules to maximize standardization and commonality.

Design the equipment for ease of maintenance with component parts that are readily accessible for inspection and maintenance. Provide test points for checking essential voltages and waveforms.

- 3.1. **Electronic Components.** Ensure the electronic components comply with Special Specification Item, "Electronic Components."
- 3.2. **Mechanical Components.** Use stainless steel external screws, nuts, and locking washers; do not use self-tapping screws unless approved by the Engineer.
- Furnish parts that are made of corrosion-resistant material, such as plastic, stainless steel, anodized aluminum, or brass.
- Protect the materials used in construction from fungus growth and moisture deterioration.
- Separate dissimilar metals by using an inert dielectric material.
- 3.3. **Testing, Documentation, and Warranty.** Test the fiber optic video data transmission equipment in compliance with Article 2 of the Special Specification, "Testing, Training, Documentation, Final Acceptance, and Warranty."
- Provide documentation for the fiber optic video data transmission equipment in compliance with Article 4 of the Special Specification, "Testing, Training, Documentation, Final Acceptance, and Warranty."
- Provide a warranty for the fiber optic video data transmission equipment in compliance with Article 6 of the Special Specification, "Testing, Training, Documentation, Final Acceptance, and Warranty."

4. MEASUREMENT

This Item is measured as each unit furnished, installed, made fully operational, and tested in accordance with these Special Specifications or as directed.

5. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" are paid for at the unit price bid for "Fiber Optic Video Data Transmitter" or "Fiber Optic Video Data Receiver." This price is full compensation for equipment described under this Item with cables and connectors; for documentation and testing; and for furnishing labor, materials, training, equipment, and incidentals.

Special Specification 6064

Intelligent Transportation System (ITS) Pole with Cabinet



1. DESCRIPTION

Furnish, install, relocate, or remove Intelligent Transportation System (ITS) pole structures and pole mounted cabinets of the various types and sizes at locations shown on the plans, or as directed.

1.1. **ITS Equipment Application.** At a minimum, the ITS pole structure serves as the structural support for the following ITS equipment applications:

- closed circuit television (CCTV),
- fixed video,
- microwave vehicle detector (MVD) or radar vehicle sensing device (RVSD),
- bluetooth equipment,
- wireless radio equipment,
- environmental sensor station (ESS),
- solar power system, and
- pole mounted cabinets.

Ensure the equipment, design, and construction use the latest available techniques with a minimum number of different parts, subassemblies, circuits, cards, and modules to maximize standardization and commonality.

Design the equipment for ease of maintenance. All component parts must be readily accessible for inspection and maintenance. The only tools and test instruments required for maintenance by maintenance personnel must be simple hand held tools, basic meters and oscilloscopes.

2. MATERIALS

Provide materials that comply with the details shown on the plans or as directed, the requirements of this Item, and the pertinent requirements of the following Items:

- Item 416, "Drilled Shaft Foundations,"
- Item 421, "Hydraulic Cement Concrete,"
- Item 440, "Reinforcement for Concrete,"
- Item 441, "Steel Structures,"
- Item 442, "Metal for Structures,"
- Item 445, "Galvanizing,"
- Item 449, "Anchor Bolts,"
- Item 496, "Removing Structures,"
- Item 618, "Conduit,"
- Item 620, "Electrical Conductors," and
- Item 740, "Graffiti Removal and Anti-Graffiti Coating".

2.1. **Anchor Bolts.** Provide anchor bolts, nuts, and washers that conform with the details shown on the plans, the requirements of this Item, and in accordance with Item 449, "Anchor Bolts."

Furnish "medium strength, mild steel" anchor bolts for anchor bolts 1 in. or less in diameter, unless otherwise shown on the plans. Furnish "alloy steel" anchor bolts for anchor bolts greater than 1 in. diameter, unless otherwise shown on the plans.

- 2.2. **ITS Poles.** Provide material for pole shafts that conforms to the requirements on the plans and the requirements of ASTM A1011 SS Grade 50, A572 Grade 50, A1011 HSLAS Grade 50, or A595 Grade A. Material thicknesses in excess of those stipulated under A1011 will be acceptable providing it meets all other ASTM A1011 requirements and the requirements of this specification. A595 Grade A material must have a minimum of 50 ksi yield strength adjacent to base welds after fabrication.

Fabrication plants that produce steel ITS poles must be approved in accordance with DMS-7380, "Steel Non-Bridge Member Fabrication Plant Qualification." The Department maintains an MPL of approved ITS pole fabrication plants.

- 2.3. **ITS Pole Mounted Cabinet.** Provide ITS pole mounted cabinets to house ITS field equipment as shown on the plans or as directed. ITS equipment applications inside the cabinet may include, but is not limited to:

- CCTV field equipment,
- fixed video,
- radar vehicle sensing device (RVSD),
- dynamic message sign (DMS) or lane control signal (LCS) controller,
- bluetooth equipment,
- highway advisory radio (HAR),
- media conversion equipment,
- hardened ethernet switch,
- wireless radio equipment,
- environmental sensor station (ESS),
- roadway weather information system (RWIS), and
- solar power system.

Provide the cabinet with fully wired back panels, with all the necessary terminal boards, wiring, harnesses, connectors and attachment hardware for each cabinet location. Place all terminals and panel facilities on the lower portion of the cabinet walls below all shelves.

Typically, an ITS pole mounted cabinet may contain, but is not limited to, the following:

- 19-in. EIA rack,
- adjustable shelves,
- fan and thermostat,
- cabinet light,
- back panel,
- surge protection,
- terminal strips,
- interconnect harnesses with connectors,
- "Door Open" connection to back panel,
- ITS equipment hardware (as listed in Article 2.3), and
- all necessary installation and mounting hardware.

Ensure all cabinets are identical in size, shape and quality for each type as provisioned on the plans or as directed. Equip and configure the cabinet set-up as defined in this Specification and as detailed in the ITS pole with cabinet standards.

Submit details of the cabinet design and equipment layout for each cabinet to the Engineer for review and approval before fabrication.

2.4. Electrical Requirements.

- 2.4.1. **Primary Input Power Interruption.** Use material that meets all the requirements in Section 2.1.4., "Power Interruption" of the National Electrical Manufacturers Association (NEMA) Standard TS2 for traffic control system, or most current version.
- 2.4.2. **Power Service Transients.** Use material that meets all the requirements in Section 2.1.6., "Transients" of the NEMA Standard TS2 for traffic control system, or most current version.
- 2.4.3. **Power Service Protection.** Ensure that equipment contains readily accessible, manually resettable or replaceable circuit protection devices (such as circuit breakers or fuses) for equipment and power source protection. Provide circuit breakers or fuses sized such that no wire, component, connector, PC board or assembly is subjected to sustained current in excess of their respective design limits upon failure of any single circuit element or wiring.
- 2.4.4. **Power Distribution Panel.** Provide cabinets with a 120 VAC +/- 5 VAC power distribution panel. Provide the following components on the panel:
- 2.4.4.1. **Duplex Receptacles.** Provide two 120 VAC NEMA Type 5-15R duplex receptacles, or as shown on the plans, protected by a circuit breaker. Permanently label duplex receptacles "For Internal ITS Equipment Only." Install duplex receptacles in an isolated location and provide a clear 1/8 in. thick removable cover made from transparent thermoplastic material to cover the duplex receptacles. Ensure this cover is installed as not to interfere with the functional operation within the cabinet and allows enough space to plug in AC adapters and any necessary equipment. Submit alternative cover material for approval as part of the documentation submittal requirement.
- 2.4.4.2. **Ground Fault Circuit Interrupter (GFCI) Duplex Receptacles.** Provide at least one 120 VAC NEMA Type 5-15R GFCI duplex receptacle, or as shown on the plans, protected by a circuit breaker. This GFCI duplex receptacle is intended for maintenance personnel and is not to be used to serve equipment inside the cabinet. Permanently label GFCI duplex receptacles "For Personnel Use." Install GFCI duplex receptacles in a readily accessible location.
- Provide a 120 VAC, rack mountable outlet strip with 6 NEMA Type 5-15R receptacles with surge suppression. Plug outlet strip into GFCI duplex receptacle and label for personnel use.
- Circuit Breakers.** Determine the ampere rating, quantity, and configuration for main, accessory, spare, and equipment circuit breakers to support ITS equipment loads as shown on the plans. Provide Underwriters Laboratories (UL) 489 listed circuit breakers capable of operating in accordance with Section 2, "Environmental Standards and Test Procedures" of NEMA TS2-2003, or most current version. Provide circuit breakers with an interrupt capacity of 5,000 A. and insulation resistance of 100 megohms at 500 VDC. Provide minimum ampere rating for the following circuit types:
- 2.4.4.2.1. **Main Breaker.** Size the main circuit breaker such that the load of all branch circuits is less than the main circuit breaker ampere rating in accordance with the most current version of the National Electrical Code (NEC).
- 2.4.4.2.2. **Accessory Breaker.** Minimum 15 A. Size accessory circuit breaker to protect lighting, door switches, fans, and GFCI duplex receptacle in accordance with the most current version of the NEC.
- 2.4.4.2.3. **Equipment Breakers.** Minimum 15 A. Size equipment circuit breaker to protect ITS equipment and duplex receptacles in accordance with the most current version of the NEC.
- 2.4.4.2.4. **Spare Equipment Breaker.** Minimum 20 A. Provide one spare equipment breaker for future use.

Furnish breakers, which are in addition to any auxiliary fuses, with the electronic equipment to protect component parts. Provide 3-terminal lightning arrestor to protect the load side of all circuit breakers. Connect

the arrester into the circuit with size 8 AWG or larger stranded copper conductors. Connect arrester to the line filter as recommended by the manufacturer.

- 2.4.4.3. **Power Line Surge Protection.** Provide and install power line surge protection devices that meet the requirements of Article 2.6.
- 2.4.4.4. **Power Cable Input Junction Terminals.** Provide power distribution blocks suitable for use as a power feed and junction points for 2 and 3 wire circuits. Accommodate up to No. 4 AWG conductors on the line side of each circuit. Provide appropriate sized lugs at the junction terminals for conductors larger than a No. 4 AWG when shown on the plans.

Electrically isolate the AC neutral and equipment ground wiring from the line wiring by an insulation resistance of at least 10 megohms when measured at the AC neutral. Color code the AC neutral and equipment grounding wiring white and green respectively in accordance with the most current version of the NEC.

Utilize the back panel to distribute and properly interconnect all cabinet wiring related to the specific complement of equipment called out on the plans. Each item of equipment including any furnished by the Department must have the cable harness properly terminated at terminal boards on the back panel. Ensure all functions available at the equipment connector are carried in the connector cable harness to the terminal blocks from the power distribution panel mounted on the left side panel of the cabinet.

- 2.4.5. **Alternative Power Option.** When shown on the plans, accommodate renewable electrical power source for the design load specified in accordance with "ITS Solar Power System" Specification. Renewable electrical power source may, or may not, be integrated with public utility electrical services, as shown on the plans or as directed. Accommodate solar system components including batteries and solar charge controller when shown on the plans.
- 2.4.6. **Wiring.** Ensure all cabinet wiring identified by the use of insulated pre-printed sleeving slipped over the wire before attachment of the lug or making the connection. Supply enough text on wire markers in plain words or abbreviations with sufficient level of detail so that a translating sheet will not be required to identify the type and size of wire.

Cut all wires to the proper length before assembly. Ensure no wires are doubled back to take up slack. Ensure harnesses to connectors are covered with braided cable sleeves. Secure cables with nylon cable clamps.

Provide service loops to facilitate removal and replacement of assemblies, panels and modules. Use insulated parts and wire rated for at least 600 V. Color-code harnesses and wiring.

Route and bundle all wiring containing line voltage AC separately and shield from all low voltage, i.e., control circuits. Cover all conductors and live terminals or parts, which could be hazardous to maintenance personnel, with suitable insulating material.

Provide AC internal cabinet wiring identified in accordance with the most current version of the NEC. Provide white insulated conductors for AC neutral. Provide green insulated conductors for equipment ground. Provide any color different from the foregoing on other conductors in accordance with the most current version of the NEC. For equipment that requires grounding, provide grounding conductors and do not use conduit for grounding. Provide No. 22 AWG or larger stranded conductors for internal cabinet wiring. Provide conductors that are UL-listed THHN in accordance with the most current version of the NEC. Ensure the insulation has at least a thickness of 10 mm. Ensure all wiring containing line voltage is at least size No. 14 AWG. No strands of any conductor may be trimmed to "fit" the wiring into the breaker or terminal block.

- 2.4.7. **Terminal Strips.** Provide terminal strips located on the back panel that are accessible to the extent that it is not necessary to remove the electronic equipment from the cabinet to make an inspection or connection.

Ensure terminal blocks are 2 position, multiple pole barrier type.

Provide shorting bars in each of the positions provided along with an integral marking strip.

Arrange terminal blocks such that they will not upset the entrance, training and connection of incoming field conductors.

Identify all terminals with legends permanently affixed and attached to the terminal blocks.

Ensure not more than 3 conductors are brought to any 1 terminal screw.

Ensure no electrically energized components or connectors extend beyond the protection afforded by the barriers.

Locate all terminal blocks below the shelves.

Ensure terminals used for field connections are secure conductors by means of a No. 10-32 nickel or cadmium plated brass binder head screw.

Ensure terminals used for interwiring connections, but not for field connections, are secure conductors by means of a No. 5-32 nickel plated brass binder head screw.

Terminate all connections to and from the electronic equipment to an interwiring type block. These blocks will act as intermediate connection points for all electronic equipment input and output.

Provide termination panels that are used to distribute and properly interconnect all cabinet wiring related to the specific complement of equipment as shown on the plans. Provide properly terminated cable harnesses for each item including any furnished by the Department. Provide all functions available at the equipment terminals that are carried in the connector cable harness.

- 2.4.8. **Cabinet Internal Grounding.** The cabinet internal ground consists of at least 1 ground bus-bar permanently affixed to the cabinet and connected to the grounding electrode.

Use bare stranded No. 4 AWG copper wire between bus-bars and between the bus-bar and grounding electrode when providing multiple bus-bars.

Ensure each copper ground bus-bar has a minimum of 12 connection points, each capable of securing bare conductor ranging in size from No 4 AWG to No 14 AWG.

Return AC neutral and equipment ground wiring to these bus-bars.

- 2.4.9. **Door Switch.** Provide door switch meeting the following requirements:

- momentary, pin-type door switch,
- installed in the cabinet or on the door, and
- connected to a terminal so that the equipment installed in the cabinet can confirm input is connected to logic ground when the cabinet door is open.

Provide 2 momentary, pin type door switches for each door provided with the cabinet. Wire 1 switch to turn on the cabinet lights when the door is open and off when the door is closed. Wire the other in parallel to a terminal block to detect a cabinet intrusion condition.

- 2.5. **Mechanical Requirements.**

- 2.5.1. **Size and Construction.** Provide ITS pole mounted cabinets meeting the configuration types detailed in the Statewide ITS pole with cabinet standards.

Table 1
Minimum Cabinet Internal Dimensions

| | Depth (in.) | Width (in.) | Height (in.) |
|--------|-----------------|-------------|--------------|
| Type 1 | 12 ¹ | 24 | 24 |
| Type 2 | 18 | 24 | 36 |
| Type 3 | 20 | 24 | 41 |

1. Minimum dimension for cabinet provided without EIA 19 in. rack assembly.
Provide 18 in. minimum depth when providing EIA 19 in. rack assembly.

Determine the suitability of the listed cabinet configuration types for the equipment at each field location identified on the plans or as desired.

2.5.2. **Ventilation.** Provide the cabinet with vent openings to allow cooling of electronic components.

Locate louvered air intake vent openings on the lower portion of the cabinet doors and covered fully on the inside with a commercially available disposable 3 layer graded pleated type filter of minimum size 6 in. (high) x 12 in. (wide) for Type 1 cabinet and 12 in. (high) x 16 in. (wide) for Type 2 and 3 cabinets. Size the louvered intake area and filter to allow maximum filtered air flow and cooling, securely mounted so that any air entering the cabinet must pass through the filter. Ensure the cabinet opening for intake of air is large enough to accommodate filter size. Screen the exhaust to prevent entry of insects. Provide the screen openings no larger than 0.0125-sq. in.

Provide a, minimum of 2, thermostatically controlled fans that are adjustable with an adjustment range of 70 to 110°F. Provide a press-to-test switch to test the operation of the fan. Provide a fan with a capacity of at least 110 cfm each.

There is no opening on the roof of the cabinet.

2.5.3. **Lighting.** Provide minimum 15 W fluorescent fixtures above each door inside the cabinet, each with clear shatter proof lens. NEMA TS2 rated light-emitting diode (LED) fixtures are acceptable instead of fluorescent light fixtures. Determine the appropriate number of fixtures to achieve at least 1000 lumens to illuminate the equipment. Position the fixtures to provide illumination to the face of the equipment in the cabinet and not into a technician's eyes.

2.5.4. **Exterior Finish.** Provide cabinets with a smooth aluminum finish and the exterior in its unpainted natural color.

When shown on the plans or as directed, provide cabinets with an anti-graffiti coating in accordance with Item 740 "Graffiti Removal and Anti-Graffiti Coating."

2.5.5. **Serial Number.** Provide the cabinets with a serial number unique to the manufacturer, preceded by an assigned 2 letter manufacturer's code. Provide at least a 0.2 in. letter height. Stamp the entire identification code and number on a metal plate which is riveted to the cabinet, stamp directly on the cabinet wall, or engrave on a metalized mylar plate that is epoxied on the upper right hand cabinet side wall.

2.5.6. **Modular Design.** Provide cabinets that have a modular design and allows ITS equipment to be installed in a variety of mounting configurations as detailed on the plans or as directed.

Provide Type 1 and Type 2 cabinets with 2 unistrut or DIN rail channels on each side wall of the cabinet for mounting power panel and auxiliary ITS equipment. Provide a 19 in. EIA rack assembly only when noted on the plans or in the general notes.

Provide Type 3 cabinets with an EIA 19 in. rack assembly, sized appropriately based on cabinet type inside height dimension and is accessible from either door. Provide a rack with a minimum of one 1RU (RU = rack

unit) horizontal power strip. Provide 2 unistrut or DIN rail channels on each side wall of the cabinet for mounting power panel and auxiliary ITS equipment.

- 2.5.7. **Shelves.** Provide adjustable shelves in each cabinet as required to support the equipment as specified on the plans. Ensure shelf adjustment at 1 RU intervals in the vertical position. Provide shelves that can be mounted to an EIA 19 in. rack cage or unistrut channel as detailed in the standards.

Provide shelves that are removable and capable of supporting the electronic equipment. Provide a minimum of 2 in. between the back and front edge of the shelf to back inside wall and door of the cabinet respectively to allow room for the equipment cables and connectors.

Provide each cabinet type with at least 1 slide out drawer with telescoping drawer guides to allow full extension from the rack frame. Provide at least 1.75 in. (high) x 16 in. (wide), drawer sized appropriately for the cabinet with a hinged lid to allow access to storage space.

- 2.5.8. **Mounting Hardware.** Provide cabinets with the appropriate "U" channel mounting brackets, stiffening plates, anchor bolts, and any other necessary hardware to mount the cabinet on the ITS pole structure. Provide mounting brackets made of 0.250 in. thick steel.

Weld cabinet mounting plates to the pole. This may be done in the field for transport reasons. Do not band the cabinet or mounting plates to the pole. Design the cabinet for pole mounting and reinforce at the points of attachment to the pole

- 2.6. **Surge Protective Devices (SPD).** Provide SPDs to protect electronics from lightning, transient voltage surges, and induced current. Install SPDs on all power, data, video, and any other conductive circuit.

- 2.6.1. **120 V or 120/240 V SPD at Service and ITS Cabinet Power Distribution Panel.** Install an SPD at the closest termination or disconnection point where the supply circuit enters the cabinet. Locate the SPD on the load side of the cabinet power distribution panel breakers and ahead of any and all electronic devices. Keep leads as short as possible with all conductor bends formed to the maximum possible radius. Connect the SPD ground lead directly to the ground bus. Use of wire nuts is prohibited. Install in accordance with manufacturers recommendations.

Provide UL Listed Type 1 or Type 2 SPD and labeled to UL 1449 Third Edition, posted at UL.com, under Certifications UL Category Code VZCA, and have a 20 kA I-nominal rating. Provide SPD rated as NEMA 4. SPD with integral EMI/RFI line filtering may be required if shown on the plans.

Do not exceed 700 V on the Voltage Protection Rating (VPR) on any mode (L-N, L-G, and N-G).

Do not exceed 150 V on the Maximum Continuous Operating Voltage (MCOV).

Equal or exceed 40 kA the SPD surge current rating per mode (L-N), (L-G), (N-G).

Equal or exceed 50 kA or the available short circuit current, whichever is higher for the SPD Short Circuit Current Rating (SCCR).

Provide SPD with directly connected Metal Oxide Varistors (MOV) exceeding 32 mm in diameter with thermal safety disconnectors. Gas tube and spark gap SPD are not be permitted. Ensure each MOV's operational status can be monitored via visual indicator, including N-G mode.

Provide SPD with one set of Normally Open (NO), Normally Closed (NC) Form C contacts for remote monitoring.

Ensure the SPD utilized for AC power does not dissipate any energy and does not provide any series impedance during standby operation. Return the unit to its non-shunting mode after the passage of any surge and do not allow the shunting of AC power

- 2.6.2. **Parallel SPD for 120 V Equipment.** Install an SPD inside of the cabinet on the power distribution to the equipment. Keep leads as short as possible with all conductor bends formed to the maximum possible radius. Connect the SPD ground lead directly to the ground bus. Use of wire nuts is prohibited. Install in accordance with manufacturers recommendations.

Provide UL Listed Type 1 or Type 2 SPD labeled to UL1449 Third Edition, posted at UL.com, under Certifications UL Category Code VZCA, and have a 20 kA I-nominal rating. Provide SPD rated as NEMA 4.

Do not exceed 700 V on the Voltage Protection Rating (VPR) on any mode (L-N and N-G).

Do not exceed 150 V on the Maximum Continuous Operating Voltage (MCOV).

Equal or exceed 40 kA the SPD surge current rating per mode (L-N) and (N-G).

Equal or exceed 50 kA or the available short circuit current, whichever is higher for the SPD Short Circuit Current Rating (SCCR).

Provide SPD with directly connected Metal Oxide Varistors (MOV) exceeding 32 mm in diameter with thermal safety disconnectors. Gas tube and spark gap SPD are not be permitted. Ensure each MOV's operational status can be monitored via visual indicator, including N-G mode.

Provide SPD with one set of Normally Open (NO), Normally Closed (NC) Form C contacts for remote monitoring.

- 2.6.3. **Low-Voltage Power, Control, Data and Signal Systems SPD.** Install a specialized SPD on all conductive circuits including, but not limited to, data communication cables, coaxial video cables, and low-voltage power cables. Ensure that these devices comply with the functional requirements shown in Table 2 for all available modes (i.e., power L-N, N-G; data and signal center pin-to-shield, L-L, L-G, and shield-G where appropriate).

These specialized SPD must have an operating voltage matching the characteristics of the circuit. Ensure that these specialized SPD are UL 497B or UL 497C Listed, as applicable.

Provide the SPD with 3 stages of surge suppression in a Pi (π) configuration. The first stage (primary side) consists of parallel-connected Gas Discharge Tubes (GDTs). The second stage consists of a series connected resistor or inductor. The third stage (secondary side) consists of parallel-connected transorbs or silicone avalanche diodes (SADs).

Ground the SPD to the DIN rail and a wire terminal connection point. (Grounding solely through the DIN rail connection is not adequate and does not meet the performance or intent of this specification.)

Install coaxial SPDs in a manner that prevents ground loops and resulting signal deterioration. This is usually caused where the cable has different references to ground at either end and connecting SPDs at both ends that have only Pin to Shield protection completes a ground loop circuit through the Shield. SPDs having Pin to Shield protection, and separate Shield to Ground protection are acceptable to eliminate ground loops.

Table 2
SPD Minimum Requirements

| Circuit Description | Maximum Continuous Operating Voltage (MCOV) | Frequency/ Bandwidth/ Data Rate | Surge Capacity | Maximum Let-Through Voltage |
|-------------------------|---|---------------------------------|--------------------------------|-----------------------------|
| 12 VDC | 15-20 V | N/A | 5 kA per mode (8x20 μ s) | <150 Vpk |
| 24 VAC | 30-55 V | N/A | 5kA per mode (8x20 μ s) | <175 Vpk |
| 48 VDC | 60-85 V | N/A | 5 kA per mode (8x20 μ s) | <200 Vpk |
| Coaxial Composite Video | 4-8 V | Up to 1.5 GHz | 10 kA per mode (8x20 μ s) | <100 Vpk |
| RS422/RS485 | 8-15 V | Up to 10 Mbps | 10 kA per mode (8x20 μ s) | <30 Vpk |
| T1 | 13-30 V | Up to 10 Mbps | 10 kA per mode (8x20 μ s) | <30 Vpk |
| Ethernet Data | 7-12 V | Up to 100 Mbps | 3kA per mode (10x1000 μ s) | <30 Vpk |

- 2.7. **Environmental Design Requirements.** Provide cabinets that meet the functional requirements of this Item during and after subsection to any combination of the following requirements:
- ambient temperature range of -30 to 165°F,
 - temperature shock not to exceed 30°F per hour, during which the relative humidity does not exceed 95%,
 - relative humidity range not to exceed 95% over the temperature range of 40 to 110°F, and
 - moisture condensation on all surfaces caused by temperature changes.
- 2.8. **Vibration.** Material used must show no degradation of mechanical structure, soldered components, plug in components or satisfactory operation in accordance with the manufacturer's equipment specifications after being subjected to the vibration test as described in the NEMA standard TS2, Section 2.2.8, "Vibration Test", or the latest revision.

3. FABRICATION

- 3.1. **Anchor Bolts.** Fabricate anchor bolts, nuts, and washers in accordance with the details shown on the plans and Item 449, "Anchor Bolts." Galvanize these items in accordance with Item 445, "Galvanization."
- Provide 2 circular steel templates as shown on the plans conforming to ASTM A36 for each assembly. Tack weld the lower anchorage nuts to the lower template in the shop. Perform this welding with an appropriate jig to ensure that the anchor bolt is perpendicular to the template. Shipping of the anchor bolt cage in its assembled condition is not required.

- 3.2. **ITS Poles.** Fabricate ITS poles in accordance with the details shown on the plans, this Item, and Item 441, "Steel Structures." Alternate designs are not acceptable unless approved by the Department.

Provide properly fitting components. Provide round, octagonal (8-sided), or dodecagonal (12-sided) pole shafts tapered to the heights shown on the plans.

Permanently mark, at a visible location when erected, ITS pole base plates with the design wind speed. Locate the handholes, as shown on the plans, opposite of the direction of traffic flow.

Permanently mark, at a visible location when erected, ITS pole base plates with the fabrication plant's insignia or trademark. Place the mark on the pole base plate adjacent to the handhole access compartment.

Provide circumferential welds only at the ends of the shaft. Provide no more than 2 longitudinal seam welds in shaft sections. Grind or smooth the exterior of longitudinal seam welds to the same appearance as other shaft surfaces. Ensure 100% penetration within 6 in. of circumferential base welds and 60% minimum penetration at other locations along the longitudinal seam welds. Use a welding technique that minimizes acid entrapment during later galvanizing. Hot-dip galvanize all fabricated parts in accordance with Item 445, "Galvanizing."

Fabricate air terminal and bracket assembly to serve as a lightning arrestor in accordance with ITS pole air terminal details and IEEE standards for lightning protection. Bond air terminal with air terminal bracket via clad weld or other approved bolted connection.

- 3.3. **Cabinet.** Continuously weld all exterior seams for cabinet and doors. Fill edges to a radius of 0.03125 in. minimum. Smooth exterior welds.

Welding on aluminum cabinets are done by the gas metal arc (MIG) or gas tungsten arc (TIG) process using bare aluminum welding electrodes. Ensure electrodes conform to the requirements of the American Welding Society (AWS) A5.10 for ER5356 aluminum alloy bare welding electrodes.

Procedures, welding machines and welding machine operators for welding on aluminum must be qualified and conform with the requirements of AWS B3.0, "Welding Procedures and Performance Qualification", and to the practices recommended in AWS C5.6.

Construct all cabinets of welded sheet aluminum with a thickness of at least 0.125 in. meeting NEMA 3R standards. Do not allow wood, wood fiber product, or flammable products in the cabinet. Seal cabinet structure to prevent the entry of rain, dust, and dirt.

Provide a sunshield on the exterior top of the cabinet to reflect solar rays and mitigate temperature build-up inside the cabinet. Construct sunshield out of 0.125 in. thick aluminum and provide a minimum of 1.25 in. clearance above the top of cabinet secured in four locations.

Attach aluminum lifting eyes or ears to the top of the cabinet to permit lifting the cabinet with a sling. Lifting eyes may be permanently fabricated to the cabinet frame as long as they do not interfere with the construction and operation of the sunshield. Manufacturer may provide removable lifting eyes that can be removed after installation. Seal any penetrations to the cabinet exterior or sunshield after removal of lifting eyes.

Ensure cabinets conform to the requirements of ASTM designation: B209 for 5052-H32 aluminum sheet.

- 3.3.1. **Door.** Provide sturdy and torsionally rigid cabinet doors that substantially cover the full area of the cabinet access opening. Attach cabinet doors by a minimum of 2 heavy duty hinges or full length hinge. Provide stainless steel hinge pins.

Fabricate the doors and hinges to withstand a 100 lb. per vertical ft. force applied to the outer edge of the door when open without permanent deformation or impairment of the door or cabinet body when the load is removed.

Fit the cabinet doors with Number 2 Corbin locks and aluminum or chrome plated handles with a minimum 3/8 in. drive pin and a 3 point latch. Design the lock and latch so that the handles cannot be released until the lock is released. Provide a locking ring for a padlock along with a padlock. Provide 2 keys for the door and 2 keys for the padlock with each cabinet. Locate the lock clear of the arc of the handle. Keys must be removable in the locked position only. Mount locks with 2 stainless steel machine screws. Provide cabinet doors with a catch mechanism to hold the door open at 2 positions: 90° and 120°.

Fabricate the door and door stop mechanism to withstand a simulated wind load of 5 lb. per sq. ft. applied to both inside and outside surfaces without failure, permanent deformation, or compromising of door position.

Provide cabinets without auxiliary police doors.

Provide a gasket to act as a permanent and weather resistant seal at the cabinet door facing. The gasket material must be of a non-absorbent material and maintain its resiliency after long term exposure to the outdoor environment.

Provide a gasket with a minimum thickness of 0.25 in. Locate the gasket in a channel provided for this purpose either on the cabinet or on the door. An "L" bracket is acceptable instead of this channel if the gasket is fitted snugly against the bracket to insure a uniformly dust and weather resistant seal around the entire door facing.

3.3.2. **Mechanical Components.** Ensure all external screws, nuts, and locking washers are stainless steel. Do not use self-tapping screws unless specifically approved by the Engineer.

Ensure all parts are made of corrosion resistant material, such as plastic, stainless steel, aluminum or brass.

Ensure all materials used in construction are resistant to fungus growth and moisture deterioration.

Separate dissimilar metals by an inert dielectric material.

4. CONSTRUCTION

4.1. **Installation.** Locate ITS poles as shown on the plans unless otherwise directed to secure a more desirable location or to avoid conflict with utilities. Stake the ITS pole locations for verification by the Engineer.

Use established industry and utility safety practices when working near underground or overhead utilities. Consult with the appropriate utility company before beginning such work.

Construct foundations for new ITS poles in accordance with Item 416, "Drilled Shaft Foundations," and the details shown on the plans." Orient anchor bolts as shown on the plans. Install conduit per Item 618, Conduit."

Identify all items of a shipment with a weatherproof tag. This tag minimally must identify manufacturer, contract number, and date and destination of shipment.

Erect poles after foundation concrete has attained its design strength as required on the plans and Item 421, "Hydraulic Cement Concrete." Coat anchor bolt threads and tighten anchor bolts in accordance with Item 449, "Anchor Bolts." Do not grout between the base plate and the foundation.

Mount the pole mounted cabinet to the backside of the ITS pole, with door either parallel or perpendicular to the roadway, away from the direction of traffic flow, as shown on the plans. Mount cabinet plumb in all directions.

For ITS pole sites located on slopes greater than 4H:1V, mount the pole mounted cabinet to the backside of the ITS pole, from the perspective parallel to the roadway with the door facing the direction of traffic flow as shown on the plans.

Install grounding conductor from cabinet and ITS pole air terminal inside a minimum 1 in. PVC conduit within the foundation. Bond grounding conductors to the primary ground rod as part of the grounding ring in accordance with the ITS grounding details.

Construct reinforced maintenance pad, when required, with Class A concrete in accordance with Item 421, "Hydraulic Cement Concrete." Provide reinforcing steel in accordance with Item 440, "Reinforcing Steel."

- 4.2. **Relocation.** Before removal of the existing pole structure or cabinet, disconnect and isolate the power cables from the electric power supply and disconnect all cables (power and communication) from the equipment and remove any ITS equipment, associated mounting brackets, pole mounted cabinet, and cabling from the pole structure. Remove existing pole structure as shown on the plans only at such time as authorized by the Engineer.

Inspect the existing pole structure, with a representative from the Department, and document any evidence of structural stress cracks or fatigue before removal. Remove and deliver to the Department, existing pole structures that fail structural inspection to an address to be supplied by the Department.

Remove the existing pole structure in a manner acceptable to the Engineer using a method that does not cause undue overstress or damage to the structure or appurtenances attached.

Use a crane of sufficient capacity to remove the pole. Disconnect and relocate the existing pole structure from and to the foundation as shown on the plans in a manner acceptable to the Engineer.

When the poles are laid down, place the poles on timber cribbing so that the poles lie reasonably straight to prevent any damage or deterioration.

Maintain safe construction and operation practices at all times. Handle the poles in such a manner during removal so as to prevent damage to the pole's exterior finish. The Contractor will be responsible for any damage to poles.

Unless otherwise shown on the plans, remove abandoned concrete foundations, including steel, to a depth of at least 2 ft. below final grade in accordance with Item 496, "Removing Structures." Backfill the excavation with materials equal in composition and density to the surrounding area. Replace any surfacing material with similar material to an equivalent condition.

Supply all new anchor bolts required for the installation of the ITS pole structure. Match bolt dimensions and lengths previously used or as shown on the plans and as directed. Provide anchor bolts in accordance with Item 449, "Anchor Bolts."

Move existing poles to the locations shown on the plans or as directed. Construct new foundations for relocated ITS poles in accordance with Item 416, "Drilled Shaft Foundations," and the details shown on the plans. Install conduit per Item 618, "Conduit." Install existing poles on new foundations in accordance with Section 4.1, "Installation." Do not grout between the base plate and foundation.

- 4.3. **Removal.** Use established industry and utility safety practices when removing poles and assemblies located near overhead or underground facilities. Consult with the appropriate utility company before beginning work.

Inspect the pole and cabinet, where included, with a representative from the Department, and remove any ITS equipment, associated mounting hardware, and cabling still attached to the pole or inside the cabinet before commencing work. Inspect the existing pole and cabinet in place, with a representative from the Department, and document any evidence of damage to the representative before removal.

Before removal of the existing pole structure or cabinet, disconnect and isolate the power cables from the electric power supply and disconnect all cables (power and communication) from the equipment. Remove and coil existing cabling to the nearest ITS ground box or as identified on the plans.

Carefully remove the cabinet from the pole structure. Avoid damage or injury to surrounding objects or individuals. Deliver the cabinet to an address to be supplied by the Department.

Carefully remove the pole from the foundation in accordance with Item 496, "Removing Structures." Avoid damage or injury to surrounding objects or individuals. Separate the pole at the slip-fitted connections, if applicable. If the pole cannot be separated, transport the complete pole or partially separate the pole to make it transportable. Deliver the pole structure to an address to be supplied by the Department.

Unless otherwise shown on the plans, remove abandoned concrete foundations, including steel, to a depth of 2 ft. below final grade in accordance with Item 496, "Removing Structures." Backfill the excavation with materials equal in composition and density to the surrounding area. Replace surfacing material with similar material to an equivalent condition.

4.4. **Testing.**

4.4.1. **Installation.** Unless otherwise shown on the plans, perform the following tests on cabinets supplied through this Item.

4.4.1.1. **Test Procedures Documentation.** Provide 5 copies of the test procedures to include tests identified in Article 4.4.2 through Article 4.4.4 inclusive and blank data forms to the Engineer for review and comment at least 45 days before testing for each test required on this project. Include the sequence of the tests in the procedures. The Engineer will comment, approve, or reject test procedures within 30 days after Contractor submittal of equipment for tests. Contractor to resubmit if necessary rejected test procedures for final approval within 10 days before testing. Review time is calendar days. Conduct all tests in accordance with the approved test procedures. The Department may witness all tests.

Record test data on the data forms and quantitative results. No bid item measurement or payment will be made until the Engineer has verified the test results meet the requirements of the specification. The data forms for all tests, except design approval tests, must be signed by an authorized representative of the Contractor.

Provide written notice to the Engineer within 48 hr. of discovery of any testing discrepancy performed in testing by the contractor. Furnish data forms containing the acceptable range of expected results and measured values.

4.4.1.2. **Design Approval Test.** Conduct a design approval test on 10% of the total number of cabinets supplied as part of the project, with at least one of each type of cabinet used on the project.

Certification from an independent testing laboratory of a successfully completed design approval test is acceptable. Ensure that the testing by this laboratory is performed in accordance with the requirements of this specification. Failure of independent tests to comply with the requirements of this specification will be grounds for rejection of any certification.

Provide a copy of the certification to the Engineer. The data forms for the design approval tests must be signed by an authorized representative (company official) of the equipment manufacturer or by an authorized representative of an independent testing facility.

Notify the Engineer 10 working days before conducting this testing. The Department may witness all the tests. Perform the following tests:

- 4.4.1.2.1. **Power Service Transients.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to the power service transients as specified in NEMA TS2, Section 2.2.7.2, "Transient Tests (Power Service)", or most current version.
- 4.4.1.2.2. **Temperature and Condensation.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to the following conditions in the order specified below:
- stabilize the equipment at -30°F and test as specified in NEMA TS2, Sections 2.2.7.3, "Low-Temperature Low-Voltage Tests" and 2.2.7.4, "Low-Temperature High-Voltage Tests", or most current version.
 - Allow the equipment to warm up to room temperature in an atmosphere with relative humidity of at least 40%. Operate the equipment for 2 hr., while wet, without degradation or failure.
 - Stabilize the equipment at 165°F and test as specified in NEMA TS2, Sections 2.2.7.5, "High-Temperature High Voltage Tests" and 2.2.7.6, "High-Temperature Low-Voltage Tests", or most current version.
- 4.4.1.2.3. **Relative Humidity.** Provide equipment that meets the performance requirements, specified in this Item, within 30 min. of being subjected to a temperature of 165°F and a relative humidity of 18% for 48 hr.
- 4.4.1.2.4. **Vibration.** Provide equipment that shows no degradation of mechanical structure, soldered components, or plug-in components and will operate in accordance with the manufacturer's equipment specifications after being subjected to the vibration tests as described in NEMA TS2, Section 2.2.8, "Vibration Test", or most current version.
- 4.4.1.2.5. **Power Interruption.** Provide equipment that meets the performance requirements, specified in this Item, when subjected to nominal input voltage variations as specified in NEMA TS2, Section 2.2.10, "Power Interruption Test", or most current version.
- 4.4.1.3. **Stand-Alone Tests.** Conduct a Stand-Alone Test for each cabinet after installation. Exercise all stand-alone (non-network) functional operations consisting of the following, at a minimum:
- 19-inch EIA rack,
 - adjustable shelves,
 - locking mechanism,
 - fan and thermostat,
 - cabinet light,
 - back panel,
 - circuit breakers,
 - surge protection,
 - grounding system,
 - terminal strips,
 - interconnect harnesses with connectors,
 - cabinet attachment to pole,
 - weatherproofing, and
 - "Door Open" connection to back panel.

Notify the Engineer 5 working days before conducting this test. The Engineer may witness all the tests.

- 4.4.1.4. **Consequences of Test Failure.** If a unit fails a test, submit a report describing the nature of the failure and the actions taken to remedy the situation before modification or replacement of the unit. If a unit requires modification, correct the fault and then repeat the test until successfully completed. Correct minor discrepancies within 30 days of written notice to the Engineer. If a unit requires replacement, provide a new unit and then repeat the test until successfully completed. Major discrepancies that will substantially delay receipt and acceptance of the unit will be sufficient cause for rejection of the unit.

Failure to satisfy the requirements of any test is considered a defect and the equipment is subject to rejection by the Engineer. The rejected equipment may be offered again for retest provided all noncompliance has been corrected.

If a failure pattern develops in similar units within the system, implement corrective measures, including modification or replacement of units, to all similar units within the system as directed. Perform the corrective measures within 30 calendar days without additional cost or extension of the contract period.

4.4.1.4.1. **Consequences of Design Approval Test Failure.** If the equipment fails the design approval test, correct the fault within 30 days and then repeat the design approval test until successfully completed.

4.4.1.4.2. **Consequences of Stand-Alone Test Failure.** If the equipment fails the stand-alone test, correct the fault within 30 days and then repeat the stand-alone test until successfully completed.

4.4.2. **Relocation.**

4.4.2.1. **Pre-Test.** Conduct performance testing before removal of ITS pole mounted cabinet. Test the following components or equipment, at a minimum, and document functional operations in the presence of representatives of the Contractor and the Department.

- locking mechanism,
- fan and thermostat,
- cabinet light,
- back panel,
- circuit breakers,
- surge protection system,
- grounding system, and
- "Door Open" connection to back panel.

Ensure that both representatives sign the test report indicating that the equipment has passed or failed each function. Once removed, the equipment becomes the responsibility of the Contractor until accepted by the State. Compare test data before removal and test data after installation.

4.4.2.2. **Post Test.** Testing of the ITS pole mounted cabinet is for the purpose of relieving the Contractor of maintenance of the system. The Contractor will be relieved of the responsibility for maintenance of the system in accordance with Item 7, "Legal Relations and Responsibilities", after a successful test period. The Contractor will not be required to pay for electrical energy consumed by the system.

After all existing ITS equipment has been installed, perform the same functional operation test described under Article 4.4.2.1. Furnish test data forms containing the sequence of tests including all of the data taken and quantitative results for all tests. Submit the test data forms to the Engineer at least 30 days before the day the tests are to begin. Obtain Engineer's approval of test procedures before submission of equipment for tests. Send at least 1 copy of the data forms to the Engineer.

The performance test results after relocation must be equal to or better than the test results before removal. Repair or replace those components within the system which failed after relocation but which passed before removal.

The Department will conduct approved ITS equipment system tests on the field equipment hardware with the central equipment. The tests will, as a minimum, exercise all remote control functions and display the return status codes from the controller.

If any unit fails to pass a test, prepare a report and deliver it to the Engineer. Describe in the report the nature of the failure and the corrective action needed. If the failure is the result of improper installation or damage during reinstallation, reinstall or replace the unit and repeat the test until the unit passes successfully, at no additional cost to the Department or extension of the contract period.

4.5. **Documentation.** Submit documentation for this Item consisting of the following:

4.5.1. **ITS Pole.** Shop drawings should clearly detail the following for the ITS poles submitted for the project:

- physical pole drawings,
- anchor bolts,
- material list,
- lightning suppression,
- weatherheads,
- cabinet Mounting attachments (when cabinet required), and
- grounding system.

4.5.2. **Pole Mounted Cabinet.** Shop drawings should clearly detail the following for ITS pole mounted cabinets when required as shown on the plans:

- dimensions,
- shelves,
- door,
- gasket,
- door look,
- materials list,
- exterior finish,
- ventilation,
- terminal strips,
- harnesses,
- filter,
- power distribution panel,
- surge suppression,
- back panel,
- outlets,
- circuit breakers,
- power cable terminals,
- wiring diagrams,
- cabinet grounding,
- environmental parameters, and
- connectors.

Submit shop drawings, signed, sealed, and dated by a registered professional Engineer in Texas showing the fabrication and erection details for each ITS pole including the ITS cabinet and mounting details in accordance with Item 5, "Control of the Work".

Provide at least 2 complete sets of operation and maintenance manuals in hard copy format in addition to a CD/DVD or removable flash drive that include the following:

- complete and accurate schematic diagrams,
- complete installation procedures,
- complete performance specifications (functional, electrical, mechanical and environmental) on the unit,
- complete parts list including names of vendors for parts not identified by universal part number such as JEDEC, RETMA, or EIA,
- pictorial of component layout on circuit board,
- complete maintenance and trouble-shooting procedures,
- complete stage-by-stage explanation of circuit theory and operation,
- recovery procedures for malfunction, and
- instructions for gathering maintenance assistance from manufacturer.

Identify material which is copyrighted or proprietary in nature as part of the documentation submittal. The Department will take proper provisions to secure such material and not distribute without written approval.

Provide Department with certification documentation verifying conformance with environmental and testing requirements contained in the special specification. Certifications may be provided by the manufacturer or through independent labs.

4.6. **Warranty.** The start date of the manufacturer's standard warranty will begin when the stand-alone test plan has been approved. Any equipment with less than 95% of its warranty remaining at the beginning of the stand-alone test will not be accepted by the Department. Guarantee that equipment furnished and installed

for this project performs according to the manufacturer's published specifications. Warrant the equipment against defects or failure in design, materials, and workmanship for a minimum of 5 years or in accordance with the manufacturer's standard warranty if warranty period is greater. Assign, to the Department, all manufacturer's normal warranties or guarantees on all electronic, electrical, and mechanical equipment, materials, technical data, and products furnished for and installed on the project. Repair or replace, at the manufacturer's option, defective equipment during the warranty period at no cost to the Department.

Repair or replace equipment at the Contractor's expense before beginning testing in the event of a malfunction or failure. Furnish replacement parts for all equipment within 30 days of notification of failure by the Department.

5. MEASUREMENT

This Item will be measured as each unit furnished, installed, relocated, or removed as shown on the plans, excluding new foundations and conduit.

6. PAYMENT

- 6.1. **Furnish and Install.** The work performed and materials furnished in accordance with this Item and measured as provided for under "Measurement" will be paid for at the unit price bid for "ITS Pole" of the type and height specified, including COSS/OSB extension, and "ITS Pole Mount Cabinet" of the type and configuration specified. This price is full compensation for furnishing, fabricating, and erecting ITS pole structures as shown on the plans; for furnishing, fabricating, and installing ITS pole mounted cabinets as shown on the plans; for furnishing and placing anchor bolts, nuts, washers, and templates; conducting cabinet testing; and equipment, materials, labor, tools, and incidentals necessary to provide an ITS pole structure or pole mounted cabinet complete in place and ready for the attachment of ITS equipment.

New drill shaft foundations will be paid for under Item 416, "Drilled Shaft Foundations." New conduit will be paid for under Item 618, "Conduit."

- 6.2. **Install Only.** The work performed and materials furnished in accordance with this Item and measured as provided for under "Measurement" will be paid for at the unit price bid for "ITS Pole (Install Only)" of the type and height specified, including COSS/OSB extension, and "ITS Pole Mount Cabinet (Install Only)" of the type and configuration specified. This price is full compensation for erecting ITS pole structures and installing ITS pole mounted cabinets furnished by the Department as shown on the plans; for installing and placing anchor bolts, nuts, washers, and templates; conducting cabinet testing; and equipment, materials, labor, tools, and incidentals necessary to provide an ITS pole structure or pole mounted cabinet, complete in place, and ready for the attachment of ITS equipment.

New drill shaft foundations will be paid for under Item 416, "Drilled Shaft Foundations." New conduit will be paid for under Item 618, "Conduit."

- 6.3. **Relocate.** The work performed and materials furnished in accordance with this Item and measured as provided for under "Measurement" will be paid for at the unit price bid for "ITS Pole (Relocate)" of the type and height specified, including COSS/OSB extension, and "ITS Pole Mount Cabinet (Relocate)" of the type and configuration specified. This price is full compensation for removing existing ITS pole structures or pole mounted cabinets as shown on the plans; removing existing foundations; backfilling and surface placement; hauling and erecting ITS pole structures; hauling and installing ITS pole mounted cabinets; furnishing and placing anchor bolts, nuts, washers, and templates; conducting cabinet testing; and equipment, materials, labor, tools, and incidentals necessary to relocate existing ITS pole structures or pole mounted cabinets, complete in place, and ready for the attachment of ITS equipment.

New drill shaft foundations will be paid for under Item 416, "Drilled Shaft Foundations." New conduit will be paid for under Item 618, "Conduit."

- 6.4. **Remove.** The work performed and materials furnished in accordance with this Item and measured as provided for under "Measurement" will be paid for at the unit price bid for "ITS Pole (Remove)" of the type and height specified, including COSS/OSB extension, and "ITS Pole Mount Cabinet (Remove)" of the type and configuration specified. This price is full compensation for removing existing ITS pole structures and pole mounted cabinets as shown on the plans; removing existing foundations; backfilling and surface placement; loading and hauling; and equipment; materials, labor, tools, and incidentals necessary to complete the removal of existing ITS pole structures and pole mounted cabinets.

Special Specification 6185

Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA)



1. DESCRIPTION

Furnish, operate, maintain and remove upon completion of work, Truck Mounted Attenuator (TMA) or Trailer Attenuator (TA).

2. MATERIALS

Furnish, operate and maintain new or used TMAs or TAs. Assure used attenuators are in good working condition and are approved for use. A list of approved TMA/TA units can be found in the Department's Compliant Work Zone Traffic Control Devices List. The host vehicle for the TMA and TA must weigh a minimum of 19,000 lbs. Host vehicles may be ballasted to achieve the required weight. Any weight added to the host vehicle must be properly attached or contained within it so that it does not present a hazard and that proper energy dissipation occurs if the attenuator is impacted from behind by a large truck. The weight of a TA will not be considered in the weight of the host vehicle but the weight of a TMA may be included in the weight of the host vehicle. Upon request, provide either a manufacturer's curb weight or a certified scales weight ticket to the Engineer.

3. CONSTRUCTION

Place or relocate TMA/TAs as shown on the plans or as directed. The plans will show the number of TMA/TAs needed, for how many days or hours, and for which construction phases.

Maintain the TMA/TAs in good working condition. Replace damaged TMA/TAs as soon as possible.

4. MEASUREMENT

4.1. **Truck Mounted Attenuator/Trailer Attenuator (Stationary).** This Item will be measured by the each or by the day. TMA/TAs must be set up in a work area and operational before a calendar day can be considered measurable. When measurement by the day is specified, a day will be measured for each TMA/TA set up and operational on the worksite.

4.2. **Truck Mounted Attenuator/Trailer Attenuator (Mobile Operation).** This Item will be measured by the hour. The time begins once the TMA/TA is ready for operation at the predetermined site and stops when notified by the Engineer. A minimum of 4 hr. will be paid each day for each operating TMA/TA used in a mobile operation.

5. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Truck Mounted Attenuators/Trailer Attenuators (Stationary)," or "Truck Mounted Attenuators/Trailer Attenuators (Mobile Operation)." This price is full compensation for furnishing TMA/TA: set up; relocating; removing; operating; fuel; and equipment, materials, tools, labor, and incidentals.

Special Specification 6186

Intelligent Transportation System (ITS) Ground Box



1. DESCRIPTION

Construct, furnish, install or remove Intelligent Transportation System (ITS) ground boxes for fiber optic communication infrastructure complete with lids.

2. MATERIALS

Provide new materials that comply with the details shown on the plans, the requirements of this Item, and the requirements of the following items:

- Item 420, "Concrete Substructures,"
- Item 421, "Hydraulic Cement Concrete,"
- Item 432, "Riprap,"
- Item 440, "Reinforcement for Concrete,"
- Item 471, "Frames, Grates, Rings, and Covers,"
- Item 618, "Conduit", and
- Item 620, "Electrical Conductors."

Provide new ITS ground boxes constructed of precast concrete or polymer concrete in accordance with the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards, most current version. Faulty fabrication or poor workmanship in materials, equipment, or installation will be justification for rejection. Provide manufacturer's warranties or guarantees when offered as a customary trade practice.

2.1. **Precast Concrete.** Provide precast concrete ground boxes and aprons that comply with the details shown on the plans, the requirements of this Item, and in accordance with the following:

- construct ground boxes with Class A concrete in accordance with Item 421, "Hydraulic Cement Concrete," unless otherwise directed,
- provide American Society for Testing and Materials (ASTM) A 615 Grade 60 reinforcement steel in accordance with Item 440, "Reinforcing Steel," and
- provide steel for the frames and covers in accordance with Item 471, "Frames, Grates, Rings, and Covers," unless otherwise approved by the Engineer.

2.1.1. **Loading Requirements.** Designed to withstand American Association of State Highway and Transportation Officials (AASHTO) H-20 loading. Manufacturer must furnish certification of conformance with H-20 loading.

2.2. **Polymer Concrete.** Manufacture ground box and ground box cover from polymer concrete reinforced with 2 continuous layers of fiberglass fabric. Provide fabricated precast polymer concrete ground boxes and aprons that comply with the details shown on the plans, the requirements of this Item, and in accordance with American Standards Institute (ANSI)/Society of Cable Telecommunications Engineers (SCTE) - ANSI/SCTE 77, most current version.

- **Polymer Concrete.** Construct polymer concrete from catalyzed polyester resin, sand, and aggregate. Polymer concrete containing chopped fiberglass or fiberglass-reinforced plastic is prohibited. Ensure a minimum compressive strength of 11,000 psi.

- **Fiberglass Fabric.** The base glass on the fiberglass fabric must be alumina-limeborosilicate type “E” glass. The reinforcing fabric must line the entire inner and outer surfaces. Obtain approval for the fabric prior to production.

- 2.2.1. **Loading Requirements.** All polymer concrete boxes and covers must meet all test provisions of the ANSI/SCTE 77 Tier 22 requirements. All polymer concrete boxes and covers will be UL Listed or manufacture must provide a certification from an NRTL or factory-testing documentation witnessed and certified by professional engineer licensed in Texas.

Ensure ground box withstands 800 lb. per sq. ft. of force applied over the entire sidewall with less than 1/4 in. deflection per foot length of box. Ensure ground box and ground box cover withstand a test load of 33,750 lb. over a 10 in. x 20 in. area centered on the cover with less than 1/2 in. deflection at the design load of 22,500 lb.

3. EQUIPMENT

- 3.1. **Size.** Provide ITS ground boxes meeting the configuration types detailed in Table 1.

Table 1
Ground Box Inside Dimensions

| Type | Width (Inches) | Length (Inches) | Depth (Inches) |
|------------------|----------------|-----------------|----------------|
| Type 1 (Precast) | 24 | 36 | 36, 48, or 60 |
| Type 2 (Precast) | 36 | 60 | 36, 48, or 60 |
| Type 1 (Polymer) | 24 | 36 | 24, 36, or 48 |
| Type 2 (Polymer) | 36 | 60 | 24, 36, or 48 |

- 3.2. **Shape.** Provide ITS ground boxes rectangular in shape.
- 3.3. **Aprons.** Provide concrete aprons for ground boxes installed in native ground as shown on the plans. Aprons will be omitted when the ground boxes are located in riprap, sidewalk, or landscape pavers.
- 3.4. **Bolts.** Provide stainless steel penta bolts or special keyed bolts, as required by Department, with associated hardware as shown on plans. Provide self-draining bolt holes. Washers must be provided with all bolts.
- 3.5. **Accessories.** Include all necessary provisions for knockouts, cable racking, adapters and terminators for proper conduit and cable installation.
- 3.5.1. **Knockouts.** Provide knockouts at the factory to accommodate the appropriate number and size of conduits entering the ground box as shown in the plans. Within the factory, score or provide indentation on each outside wall identifying additional conduit entry points for future expansion that does not impact the rebar structure. Place a bell fitting on the end of each conduit to ensure a flush fit inside the ground box. Place concrete grout in the knockout (inside and out), around the conduit and bell fitting to ensure a neat and watertight fit. Ensure that the grout does not enter the inside of the conduit.
- 3.5.2. **Cable Racking.** Provide steel (ASTM A-153), non-metallic glass reinforced nylon, or equivalent cable rack assemblies with the dimensions shown on the plans.
- 3.5.3. **Terminators.** Terminators must be appropriately sized for the conduits indicated on plans and must be an airtight and watertight connection.

Terminators for the PVC conduits should be placed symmetrically about the centerline of the box at the depth shown on plans.

Terminators that do not have conduits attached must be capped and sealed as shown on the plans.

Install the quantity, size, and location of terminators as shown on plans.

3.6. **Cover Requirements.**

3.6.1. **Type of Cover.** Provide the following types of covers based on the type of ground box:

- Precast concrete ground box: Provide a 1-piece or 2-piece galvanized steel or cast iron cover depending on the ground box type. Provide a torsion assisted cover for Type 2 ground box with lids that can open freely a minimum 90° each and lock in place with locking latches or a pin-lock inserted in the hinge. Covers must be grounded in accordance with the requirements of the most current version of the NEC. Provide the cover with drop handles.
- Polymer concrete ground box: Provide a 1-piece or 2-piece cover depending on the ground box type, bolted to the ground box. Cover must have a minimum of 2 lifting eyes.

3.7. **Label.** Permanently mark all ground boxes and covers with the manufacturer's name or logo and model number. Legibly imprint each cover with a permanently marked logo in letters at least 1 in. high as follows: "DANGER—HIGH VOLTAGE TRAFFIC MANAGEMENT", unless otherwise directed. Glue in logos are prohibited.

3.8. **Security.** Equip all ground box covers with a stainless steel penta head or keyed bolting system that will securely hold the cover in place. Provide an appropriate means to secure or lock the cover in place as required by the plans.

3.9. **Skid Resistance.** All ground box covers must be skid resistant and should have a minimum coefficient of friction of 0.50 on the top surface of the cover. Provide certification minimum coefficient of friction value is met as part of material documentation.

3.10. **Strength Requirements.** The following ground box strengths are required based on the following 2 applications.

3.10.1. **Deliberate Roadway Traffic.** Precast concrete ground boxes with steel covers must be used in locations that may experience deliberate, continuous vehicular traffic, such as near the shoulder or an auxiliary lane, or immediately adjacent to the unprotected edge of pavement. Do not place ground boxes in the paved travel lanes or shoulder of highways, frontage roads, streets, bridges, or driveways.

Ground boxes and covers located in these areas must be rated for heavy-duty traffic loading and meet an AASHTO H-20 design loading.

Precast concrete ground boxes and covers located in non-deliberate heavy vehicular traffic must still meet AASHTO H-20 design loading.

3.10.2. **Non-Deliberate Heavy Vehicular Traffic.** Polymer concrete ground boxes and covers may be used in off roadway applications subject to occasional non-deliberate heavy vehicular traffic, such as driveways, along sidewalks, parking lots and behind non-mountable curb. Polymer ground boxes and covers located in these areas must meet ANSI/SCTE Tier 22 loading requirements.

4. **CONSTRUCTION**

Perform work in accordance with the details shown on the plans and the requirements of this Item.

Use established industry and utility safety practices when installing or removing ground boxes located near underground utilities. Consult with the appropriate utility company before beginning work.

- 4.1. **Installation.** Install ground boxes as shown on the plans. Maintain spacing as shown on the plans.

Ground box locations may be revised to fit existing field conditions or to better facilitate the installation of the conduit system with approval by the Engineer.

Field-locate ground boxes to avoid steep slopes and low-lying locations with poor drainage.

Construct ground box cover to fit properly on ground box.

When installing ground boxes in surfaced areas, make the tops of the ground boxes flush with the finished surface.

- 4.1.1. **Gravel at Base of Ground Box.** Install all ground boxes on a bed of crushed rock at the base of the excavation as shown on the plans. Place 12 in. of washed, crushed stone (1.5 in. nominal) which extends 6 in. in all directions from the perimeter of the box. Lightly tamp the gravel immediately prior to the placement of the ground box to reduce settlement. Crushed gravel will not be paid directly, but be considered subsidiary to this Item.

- 4.1.2. **Cable Racking Installation.** Provide and locate cable rack assemblies designed to support up to 25 ft. of slack for each fiber optic cable inside each Type 1 ground box, 100 ft. of slack for each fiber optic cable inside each Type 2 ground box, slack associated with other communication cabling, and any splice enclosure as shown on the plans or as directed. Cable racks may be installed at the factory or in the field. Place the racks in a manner so as not to impede access in and out of the ground box.

Ground metallic cable rack assemblies to grounding system inside ground box in accordance with the most current version of the NEC.

Use fasteners with an ultimate pull out strength of at least 2500 lb. and ultimate shear strength of at least 3000 lb. When securing cable racks to side walls of ground box in the field, seal all penetrations to the side wall to prevent moisture and contaminant penetration. Sufficient cable supports must be provided for the particular of conductors or cables coiled or passing through the ground as shown on the plans or directed by the Engineer.

- 4.1.3. **Buried Installation.** When shown in the plans or identified in the General Notes, bury ground boxes for security measures. When burying ground boxes, provide polymer concrete ground boxes meeting ANSI/SCTE Tier 22 loading requirements.

Provide 12 in. cover between ground surface and top of ground box lid. Prior to backfilling, provide a 30 lb. felt paper over the entire ground box extending a minimum of 2 in. from either side to prevent backfill materials from entering ground box.

- 4.2. **Excavation and Backfill.** Ensure excavation and backfill for ground boxes meets the requirements as set forth by Item 400, "Excavation and Backfill for Structures." For buried ground boxes, compact backfill material in order to prevent depressions in ground surface from occurring over the ground box.

- 4.3. **Testing.** Ground box and cover must be tested by a laboratory independent of the manufacturer to meet loading requirements. Certificate of such tests must be submitted to the Engineer for approval.

- 4.4. **Documentation Requirements.** Submit documentation for this Item consisting of the following for Engineer approval prior to installation:

- record Global Positioning System (GPS) coordinates using NAD83 datum for all ground boxes prior to backfill. Identify location to obtain coordinates on drawing detail,
- shop drawings,

- concrete mix design,
- material specifications for ground box, lid, cable racks, bolts, and skid resistance for cover
- testing certification for loading requirements,
- hot, cold, and wet weather plan, and
- backfill material composition.

Shop drawings should clearly detail the following for ground boxes, at a minimum:

- | | | |
|---------------|---------------|---------------|
| ■ dimensions | ■ terminators | ■ cover |
| ■ knockouts | ■ adapters | ■ load rating |
| ■ cable racks | ■ bolts | ■ cover lock |

- 4.5. **Removal.** Remove existing ground boxes and concrete aprons to at least 6 in. below the conduit level. Uncover conduit to a sufficient distance so that 90° bends can be removed and conduit reconnected. Clean the conduit in accordance with Item 618, "Conduit." Replace conduit within 5 ft. of the ground box. Remove old conductors and install new conductors as shown on the plans. Backfill area with material equal in composition and density to the surrounding area. Replace surfacing material with similar material to an equivalent condition.

5. MEASUREMENT

This Item will be measured by each ground box installed or removed.

6. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "ITS Ground Box (Precast Concrete)" of the various types and sizes specified or "ITS Ground Box (Polymer Concrete)" of the various types and sizes specified and for "Remove ITS Ground Box".

- 6.1. **Furnish and Install.** This price is full compensation for excavating and backfilling; constructing, furnishing and installing the ITS ground boxes and concrete aprons when required; and all labor, tools, equipment, materials, transportation, accessories, documentation, testing and incidentals.

Conduit will be paid for under Item 618, "Conduit" and Special Specification 6016, "ITS Multi-Duct Conduit."

Electrical conductors will be paid for under Item 620, "Electrical Conductors."

- 6.2. **Remove.** This price is full compensation for removing and disassembling ground boxes and concrete aprons; excavation, backfilling, and surface placement; removing old conductors; disposal of unsalvageable materials; and materials, equipment, labor, tools, and incidentals. Cleaning of conduit is subsidiary to this Item. Conduit replaced within 5 ft. of the ground box will be subsidiary to this Item.

Special Specification 6304

Intelligent Transportation System (ITS) Radar Vehicle Sensing Device



1. DESCRIPTION

Furnish, install, relocate, or remove Intelligent Transportation System (ITS) radar vehicle sensing device (RVSD) system at locations shown on the plans, or as directed.

2. MATERIALS

- 2.1. **General.** Except as allowed for relocation of RVSD equipment, ensure all equipment and component parts are new and in an operable condition at time of delivery and installation. Ensure all RVSD within the project are from the same manufacturer. RVSD are further classified by the type of functions they can perform. The primary classifications are RVSD (Data Collection Only) and RVSD (Data Collection and Wrong-way alarm).

Provide RVSD field equipment that is compatible with existing infrastructure and software located in the Department's Traffic Management Centers (TMCs) across the state or as directed.

RVSD system equipment must include the following:

- Radar vehicle sensing devices
- Mounting assembly and hardware
- All cabling and connector assemblies
- Associated devices required to integrate into communication system

RVSD must be a roadside sensor, or group of sensors, that accurately provides volume, speed, occupancy, and classification data for the roadway segment where they are installed.

Ensure sensor is designed and constructed with subassemblies, circuits, cards, and modules to maximize standardization and commonality. Ensure all external parts and surfaces are designed to protect against corrosion, fungus and moisture deterioration.

Design the equipment for ease of maintenance. Provide component parts that are readily accessible for inspection and maintenance. Provide test points for checking essential voltages and waveforms.

RVSD must self-recover from power failure once power is restored.

Sensor must be provided with a mounting bracket designed to mount directly to a pole, mast-arm, or other structure. Ensure bracket is designed such that the sensor can be tilted both vertically and horizontally for alignment and then locked into place after proper alignment is achieved. All hardware must be designed to support the load of the RVSD sensor and mounting bracket.

- 2.2. **Configuration.** Each RVSD system consists of roadside sensors as shown on the plans. Ensure the RVSD system detects a minimum of eight lanes. Ensure lane width, medians, and geometry are configurable. Traffic barriers must not interfere with detection.

Ensure RVSD does not require tuning or recalibration to maintain performance once initial calibration and configuration is complete. RVSD must not require cleaning or adjustment to maintain performance.

Ensure RVSD can detect vehicles within a range of 10 to 200 feet from the sensor and can simultaneously detect vehicles in all lanes within the detection range of the radar.

- 2.3. **Automatic Detection.** Once installed and aligned, ensure the sensor automatically detects vehicle volume, speed, and occupancy. Ensure only minor operator input is required for setup, such as verification of lane configuration and distance from sensor. Ensure the sensor tunes out stationary objects to omit false readings.

- 2.4. **Data Collection.** The RVSD must automatically calibrate vehicle speed, detection level, and sensitivity. Ensure RVSD provides accurate, real-time volume, average speed, and occupancy for each lane detected.

RVSD must provide user configurable settings for collection and polling intervals. Interval configurations must include options ranging from twenty seconds to 15 minutes or more.

RVSD must be able to correctly categorize detected vehicles into a minimum of three user definable length-based classification bins.

Ensure RVSD sensor performance is not affected by environmental conditions such as shadows, glare, wind, rain, heat, or snow. Ensure speed detection is accurate without requiring vehicle length for calculations.

Ensure RVSD system includes remote connection capabilities allowing an operator to update configuration and firmware as well as download interval data. In the event of communication loss, ensure RVSD stores and transfers data upon communication restoration and subsequent request for data.

Ensure RVSD sensor provides non-volatile memory for configuration settings and for local storage. The sensor must store a minimum of 3 hours of data for all data collected over eight travel lanes at twenty-second intervals. Ensure local storage data is overwritten in a first-in first-out manner.

Ensure RVSD supports the Department's Transportation Sensor System Protocol Document (TSS-Protocol) as detailed in the *TSS Tools* link on the Department's website (<http://www.txdot.gov/business/resources/engineering-software.html>).

- 2.5. **Accuracy.** Ensure RVSD accuracy meets or exceeds the following requirements during nominal conditions:

- Sensor volume data accuracy is within 5 percent of actual per direction of travel.
- Sensor average speed data is accurate within 5 mph per direction of travel.
- Individual lane speed accuracy is within 10 mph of actual.
- Individual vehicle speed accuracy is within 5 mph for 90% of measurements.
- Vehicle classification data is accurate for 90% of detected vehicles.

- 2.6. **Functional Requirements for RVSD with Wrong-way Alarms.** RVSD with wrong-way alarms must be capable of detecting and reporting direction of travel for each vehicle detected as well as include all features and functions required for Data Collection RVSD.

The RVSD sensor must automatically determine if a vehicle is traveling in the opposite direction for which the lane is configured.

Ensure the RVSD can detect real-time vehicle direction of travel.

- 2.7. **Cabling.** Supply the RVSD with all cabling of the appropriate length for each installation site.

- 2.8. **Communication.** RVSD must be remote accessible and provide communication options including RS-232, RS-485 and TCP/IP.

RVSD communication through RS-232 or RS-485 must include an internal RS-232, RS-485 communication port. Each serial communication port must support the following baud rates: 9600, 19200, 38400, 57600 and

115200. Additionally, the RS-232 port must be full-duplex and must support true Request to Send / Clear to Send (RTS/CTS) hardware handshaking for interfacing to various communication devices.

RVSD system must produce interval data packets containing all available criteria as detailed in TSS-Protocol.

- 2.9. **Software.** Ensure the RVSD manufacturer includes all software required to configure and monitor operation of RVSD field equipment locally and remotely. RVSD software must be a stable production release.

Software must allow the user to configure, operate, exercise, diagnose, and read current status of all RVSD features and functions using a laptop computer.

RVSD system computer software must be able to communicate with RVSD field devices using TCP/IP and serial connections, including cellular modem connections. The software must provide for local and remote configuration and monitoring, including a graphical user interface (GUI) that displays all configured lanes and provides visual representation of all detected vehicles.

System software must provide the user complete control over the configuration and setup process for RVSD devices and allow the user to load new firmware into non-volatile memory of RVSD field devices locally and over any supported communication channel including TCP/IP networks.

Software must include the ability to save a local copy of RVSD field device configurations, and load saved configurations to RVSD field devices.

Ensure the software allows the operator to change the baud rate via a drop-down list, add response delays for the communication ports to allow for communication stabilization, switch between data pushing and data polling, and change the RVSD's settings for Flow Control between none and RTS/CTS. Ensure the software automatically selects the correct baud rate and serial communication port from up to 15 serial communication ports.

The software must include the ability to retrieve and store data collected by RVSD field devices.

Ensure all licenses required for operation and use of software are included at no additional cost.

Software updates must be provided at no additional cost during the warranty period.

- 2.10. **Mechanical.** Ensure that all parts are fabricated from corrosion resistant materials, such as plastic, stainless steel, aluminum, or brass.

Ensure that all screws, nuts, and locking washers are stainless steel. Do not use self-tapping screws.

Ensure equipment is clearly and permanently marked with manufacturer name or trademark and part number as well as date of manufacture or serial number.

Ensure RVSD system is modular in design for ease of field replacement and maintenance. Ensure cable connector design prohibits improper connections. Cable connector pins are plated to improve conductivity and resist corrosion. RVSD sensor dimensions must not exceed 14 in. by 11 in. by 7 in.

Ensure the RVSD housing is a weather resistant, ultraviolet (UV) resistant material. RVSD sensor must meet NEMA 250 4X requirements. Ensure all gasket and sealant materials are UV resistant and intended to be used in outdoor environment with exposure to the sun.

All printed circuit boards (PCB) must have conformal coating.

- 2.11. **Electrical.** Ensure the RVSD system operates on nominal 120 V_{AC}. Provide a transformer with any system device that requires a nominal operating voltage other than 120 V_{AC}. Ensure RVSD sensor operates between

12 V_{DC} and 28 V_{DC} utilizing ten watts or less. Ensure equipment is designed to protect personnel from exposure to high voltage during installation, operation, and maintenance.

- 2.12. **Environmental.** All RVSD system components must operate properly during and after being subjected to the environmental testing procedures described in NEMA TS2, Section 2. RVSD sensor must be able to withstand the maximum wind load defined in the Department's basic wind velocity zone map standard without any damage or loosening from structure.

- 2.13. **Connectors and Harnesses.** External connections exposed to the outdoor environment must be made with weatherproof connectors. Connectors must be keyed to ensure correct alignment and mating.

Ensure all conductors are properly color coded and identified. Ensure that every conductive contact surface or pin is gold-plated or made of a noncorrosive, nonrusting, conductive metal.

Ensure power and data cable connectors exposed to the elements are IP 67 compliant. Ensure all conductors that interface with the connector are encased in one jacket.

RS-485 and RS-232 communication cables must:

- be shielded, twisted pair cable with a drain wire,
- have a nominal capacitance conductor to conductor @ 1Khz \geq 26pF/ ft.,
- have nominal conductor DC resistance @ 68°F \leq 15 ohms/1000 ft.,
- be one continuous run with no splices, and
- be terminated only on the two farthest ends of the cable.

- 2.14. **Documentation.** Provide hardcopy operation and maintenance manuals, along with a copy of all product documentation on electronic media. Include the following documentation for all system devices and software:

- operator manuals,
- installation manuals with installation procedures,
- maintenance and troubleshooting procedures, and
- manufacturer's specifications (functional, electrical, mechanical, and environmental).

Provide certification from an independent laboratory demonstrating compliance with NEMA TS2 environmental requirements for temperature, humidity, transients, vibration, and shock.

RVSD system must transmit in the 10.50 – 10.55 GHz or 24.00 – 24.25 GHz frequency band and meets the power transmission and frequency requirements of CFR 47. Ensure FCC certification is displayed on each device according to FCC rules. Provide third party test results for CFR 47, Part 15 (Section 15.245 or 15.249).

The RVSD enclosure must conform to criteria set forth in the NEMA 250 Standard for Type 4X enclosures. Provide third party enclosure test results demonstrating the sensor enclosure meets Type 4X criteria.

Ensure the RVSD system manufacturer has a quality assurance program for manufacturing RVSD as described in this specification. Manufacturer of the RVSD must be ISO 9001 certified, or provide a copy of the company quality manual for review.

The RVSD must pass testing to ensure functionality and reliability prior to delivery. These include functional tests for internal subassemblies, a 24 hr. minimum unit level burn-in test, and a unit functionality test. Test results and supporting documentation, including serial number tested, must be submitted for each RVSD. If requested, manufacturing data per serial number must be provided for each RVSD.

- 2.15. **Warranty.** Warrant the equipment against defects or failure in design, materials, and workmanship for a minimum of 5 yr. or in accordance with the manufacturer's standard warranty if that warranty period is greater. The start date of the manufacturer's standard warranty will begin after the equipment has successfully passed all tests contained in the final acceptance test plan. Any equipment with less than 90%

of its warranty remaining after the final acceptance test is completed will not be accepted by the Department. Guarantee that equipment furnished and installed for this project performs according to the manufacturer's published specifications. Assign, to the Department, all manufacturer's normal warranties or guarantees on all electronic, electrical, and mechanical equipment, materials, technical data, and products furnished for and installed on the project.

Malfunctioning equipment must be repaired or replaced at the Contractor's expense prior to completion of the final acceptance test plan. Furnish replacement parts for all equipment within 10 days of notification of failure by the Department.

During the warranty period, technical support must be available via telephone within 4 hr. of the time a call is made by a user, and this support must be available from factory certified personnel.

- 2.16. **Training.** Conduct a training class for a minimum of 8 hr., unless otherwise directed, for up to 10 representatives designated by the Department on installation, configuration, operation, testing, maintenance, troubleshooting, and repair. Submit a training session agenda, a complete set of training material, the names and qualifications of proposed instructors, and proposed training location for approval at least 30 days before the training. Conduct training within the local area unless otherwise directed. Provide 1 copy of course material for each attendee. Ensure that training includes:
- "Hands-on" operation of system software and equipment;
 - explanation of all system commands, their function and usage; and
 - system "troubleshooting," operation, and maintenance.

3. CONSTRUCTION

- 3.1. **System Installation.** Install RVSD system devices according to the manufacturer's recommendations to achieve the specified accuracy and reliability. Completion of the work must present a neat, workmanlike, and finished appearance.

If the RVSD is to be mounted near large planar surfaces (sound barrier, building, parked vehicles, etc.), verify the final placement meets manufacturer recommendations for installation and clearance.

Ensure installation and configuration of software on Department computers is included with the RVSD system.

- 3.2. **Mechanical Components.** Ensure that all fasteners, including bolts, nuts, and washers with a diameter less than 5/8 in. are Type 316 or 304 stainless steel and meet the requirements of ASTM F593 and ASTM F594 for corrosion resistance. Ensure that all bolts and nuts 5/8 in. and over in diameter are galvanized and meet the requirements of ASTM A307. Separate dissimilar metals with an inert dielectric material.

- 3.3. **Wiring.** All wiring and electrical work supplying the equipment must meet the requirements of the most current version of the National Electrical Code (NEC). Supply and install all wiring necessary to interconnect RVSD sensors to the field cabinet and incidentals necessary to complete the work. If additional cables are required, the Contractor must furnish and install them at no additional cost to the Department. Provide conductors at least the minimum size indicated on the plans and insulated for 600 V.

Cables must be cut to proper length prior to assembly. Provide cable slack for ease of removal and replacement. All cable slack must be neatly laced with lacing or straps in the bottom of the cabinet. Ensure cables are secured with clamps and include service loops.

- 3.4. **Electrical Service.** The Contractor is responsible for checking the local electrical service to determine if a modification is needed for the equipment.

3.5. **Grounding.** Ensure all RVSD system devices, cabinets, and supports are grounded in accordance with the NEC and manufacturer recommendations.

3.6. **Relocation of RVSD Field Equipment.** Perform the relocation in strict conformance with the requirements herein and as shown on the plans. Completion of the work must present a neat, workmanlike, and finished appearance. Maintain safe construction practices during relocation.

Inspect the existing RVSD field equipment with a representative from the Department and document any evidence of damage prior to removal. Conduct testing in accordance with 4.9. Remove and deliver equipment that fails inspection to the Department.

Prior to removal of existing RVSD field equipment, disconnect and isolate the power cables from the electric power supply and disconnect all communication cabling from the equipment located inside the cabinet. Coil and store power and communication cabling inside the cabinet until such time that it can be relocated. Remove existing RVSD field equipment as shown on the plans only at such time as authorized by the Engineer.

Use care to prevent damage to any support structures. Any equipment or structure damaged or lost must be replaced by the Contractor (with items approved by the Engineer) at no cost to the Department.

Make all arrangements for connection to power and communications including any permits required for the work to be done under the Contract. Provide wire for the power connection at least the minimum size indicated on the plans and insulated for 600 V.

3.7. **Removal of RVSD Field Equipment.** Perform the removal in strict conformance with the requirements herein and as shown on the plans. Completion of the work must present a neat, workmanlike, and finished appearance. Maintain safe construction practices during removal.

Inspect the existing RVSD field equipment with a representative from the Department and document any evidence of damage prior to removal. Conduct testing in accordance with 4.9.

Disconnect and isolate any existing electrical power supply prior to removal of existing field equipment.

Use care to prevent damage to any support structures. Any equipment or structure damaged or lost must be replaced by the Contractor (with items approved by the Engineer) at no cost to the Department.

All materials not designated for reuse or retention by the Department will become the property of the Contractor and be removed from the project site at the Contractor's expense. Deliver items to be retained by the Department to a location shown on the plans or general notes. The Contractor is fully responsible for any removed equipment until released by the Engineer.

3.8. **Contractor Experience Requirements.** Contractor or designated subcontractor must meet the following experience requirements:

3.8.1. **Minimum Experience.** Three years of continuous existence offering services in the installation of RVSD systems. Experience must include freeway and arterial management, forward fire and side fire applications, single zone and dual beam detection, and equipment setup, testing, and troubleshooting.

3.8.2. **Completed Projects.** Three completed projects where personnel installed, tested and integrated RVSD field equipment. The completed installations must have been in continuous satisfactory operation for a minimum of 1 yr.

3.8.3. **Equipment Experience.** One project (may be 1 of the 3 projects in the preceding paragraph) in which the personnel worked in cooperation with technical representatives of the equipment supplier to perform installation, integration, or acceptance testing of the work. The Contractor will not be required to furnish equipment on this project from the same supplier who was referenced in the qualification documentation.

Submit the names, addresses and telephone numbers of the references that can be contacted to verify the experience requirements given above.

4. TESTING

Ensure that the following tests are performed on equipment and systems unless otherwise shown on the plans. The Department may witness all the tests.

- 4.1. **Test Procedures Documentation.** Provide an electronic copy of the test procedures and blank data forms 60 days prior to testing for each test required on this project. Include the sequence of the tests in the procedures. The Engineer will approve test procedures prior to submission of equipment for tests. Conduct all tests in accordance with the approved test procedures.

Record test data on the data forms, as well as quantitative results. Ensure the data forms are signed by an authorized representative (company official) of the equipment manufacturer.

- 4.2. **Design Approval Test.** Ensure that the RVSD has successfully completed a Design Approval Test that confirms compliance with the environmental requirements of this specification.

Provide a certification and test report from an independent testing laboratory as evidence of a successfully completed Design Approval Test. Ensure that the testing by this laboratory is performed in accordance with the requirements of this specification.

- 4.3. **Demonstration Test.** Conduct a Demonstration Test on applicable equipment at an approved Contractor facility. Notify the Engineer 10 working days before conducting this testing. Perform the following tests:

- 4.3.1. **Examination of Product.** Examine each unit carefully to verify that the materials, design, construction, markings and workmanship comply with the requirements of this specification.

- 4.3.2. **Continuity Tests.** Check the wiring to determine conformance with the requirements of this specification.

- 4.3.3. **Operational Test.** Operate each unit for at least 15 min. to permit equipment temperature stabilization and observation of a sufficient number of performance characteristics to ensure compliance with this specification.

- 4.4. **Stand-Alone Test.** Conduct a Stand-Alone Test for each unit after installation. The test must exercise all stand-alone (non-network) functional operations. Notify the Engineer 5 working days before conducting this test.

- 4.4.1. **Performance Test.** Ensure the RVSD meets functional performance requirements of Section 2.5 by using the following test methods:

Verify volume and classification accuracy by performing a manual count on each lane of detection. Volume and classification data reported by the sensor must meet the volume and classification data accuracy requirements in Section 2.5 when compared with data collected manually.

Verify speed accuracy by comparing sensor speed data to speeds data collected with a laser speed gun, radar speed gun, or by video speed trap using frame rate as a time reference. Vehicle speeds must be collected and averaged over a minimum of 10 vehicles. Speed data must meet the speed data accuracy requirements in Section 2.5 when compared to average speeds collected using laser, radar, or video.

Verify wrong-way detection accuracy by reversing the configured direction of travel for at least one travel lane. Verify vehicles detected in a reversed lane are classified as wrong-way vehicles and properly counted. Volume reported for vehicles classified as wrong-way must meet the volume data accuracy requirement in Section 2.5.

- 4.5. **System Integration Test.** Conduct a System Integration Test on the complete functional system. Demonstrate all control and monitor functions for each system component for 72 hr. Supply 2 copies of the System Operations manual before the System Integration Test. Notify the Engineer 10 working days before conducting this testing.
- 4.6. **Consequences of Test Failure.** If a unit fails a test, submit a report describing the nature of the failure and the actions taken to remedy the situation prior to modification or replacement of the unit. If a unit requires modification, correct the fault and then repeat the test until successfully completed. Correct minor discrepancies within 30 days of written notice to the Engineer. If a unit requires replacement, provide a new unit and then repeat the test until successfully completed. Major discrepancies that will substantially delay receipt and acceptance of the unit will be sufficient cause for rejection of the unit.
- If a failure pattern develops in similar units within the system, implement corrective measures, including modification or replacement of units, to all similar units within the system as directed. Perform the corrective measures without additional cost or extension of the Contract period.
- 4.7. **Final Acceptance Test.** Conduct a Final Acceptance Test on the complete functional system. Demonstrate all control, monitoring, and communication requirements and operate the system for 90 days. The Engineer will furnish a Letter of Approval stating the first day of the Final Acceptance Test. The completion of the Final Acceptance Test occurs when system downtime due to mechanical, electrical, or other malfunctions to equipment furnished or installed does not exceed 72 hr. and any individual points of failure identified during the test period have operated free of defects.
- 4.8. **Consequences of Final Acceptance Test Failure.** If a defect within the system is detected during the Final Acceptance Test, document and correct the source of failure. Once corrective measures are taken, monitor the point of failure until a consecutive 30 day period free of defects is achieved.
- If after completion of the initial test period, the system downtime exceeds 72 hr. or individual points of failure have not operated for 30 consecutive days free of defects, extend the test period by an amount of time equal to the greater of the downtime in excess of 72 hr. or the number of days required to complete the performance requirement of the individual point of failure.
- 4.9. **Relocation and Removal**
- 4.9.1. **Pre-Test.** Tests may include, but are not limited to, physical inspection of the unit and cable assemblies. Include the sequence of the tests in the procedures along with acceptance thresholds. Contractor to resubmit, if necessary, rejected test procedures for final approval within 10 days. Review time is calendar days. Conduct all tests in accordance with the approved test procedures.
- Conduct basic functionality testing prior to removal of RVSD field equipment. Test all functional operations of the equipment in the presence of representatives of the Contractor and the Department. Ensure that both representatives sign the test report indicating that the equipment has passed or failed each function. Once removed, the equipment becomes the responsibility of the Contractor until accepted by the Department. Compare test data prior to removal and after installation. The performance test results after relocation must be equal to or better than the test results prior to removal. Repair or replace those components within the system that failed after relocation but passed prior to removal.
- 4.9.2. **Post-Test.** Testing of the RVSD field equipment is to relieve the Contractor of system maintenance. The Contractor will be relieved of the responsibility for system maintenance in accordance with Item 7, "Legal Relations and Responsibilities" after a successful test period. The Contractor will not be required to pay for electrical energy consumed by the system.
- After all existing RVSD field equipment has been installed, conduct approved continuity, stand alone, and performance tests. Furnish test data forms containing the sequence of tests including all the data taken as well as quantitative results for all tests. Submit the test data forms to the Engineer at least 30 days prior to the day the tests are to begin. Obtain Engineer's approval of test procedures prior to submission of equipment for tests. Send at least 1 copy of the data forms to the Engineer.

Conduct an approved stand-alone test of the equipment installation at the field sites. At a minimum, exercise all stand-alone (non-network) functional operations of the field equipment installed per the plans as directed by the Engineer. Complete the approved data forms with test results and turn over to the Engineer for review and either acceptance or rejection of equipment. Give at least 30 working days notice prior to all tests to permit the Engineer or his representative to observe each test.

The Department will conduct approved RVSD field equipment system tests on the field equipment with the central equipment. The tests will, as a minimum, exercise remote control functions and confirm communication with field equipment.

If any unit fails to pass a test, prepare and deliver a report to the Engineer. Describe the nature of the failure and the corrective action needed. If the failure is the result of improper installation or damage during reinstallation, reinstall or replace the unit and repeat the test until the unit passes successfully, at no additional cost to the Department or extension of the Contract period.

5. MEASUREMENT

RVSD for data collection only will be measured by each unit furnished and installed, installed, relocated or removed. RVSD for data collection and wrong-way alarm will be measured by each system furnished and installed, installed, relocated or removed.

6. PAYMENT

- 6.1. **Furnish and Install.** The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit bid price for "ITS RVSD (Data Collection Only) System" and "ITS RVSD (Data Collection and Wrong-way alarm) System." This price is full compensation for furnishing, installing, configuring, integrating, and testing the completed installation including RVSD equipment, voltage converters or injectors, cables, connectors, associated equipment, and mounting hardware; and for all labor, tools, equipment, any required equipment modifications for electrical service, documentation, testing, training, software, warranty and incidentals necessary to complete the work.
- 6.2. **Install Only.** The work performed and materials furnished in accordance with this Item will be paid for at the unit bid price for "ITS RVSD (Data Collection Only) (Install Only)" and "ITS RVSD (Data Collection and Wrong-way alarm) (Install Only)." This price is full compensation for installing, configuring, integrating, and testing the completed installation including RVSD equipment, voltage converters or injectors, cables, connectors, associated equipment, and mounting hardware; and for all labor, tools, equipment, any required equipment modifications for electrical service, documentation, testing, training, software, and incidentals necessary to complete the work.
- 6.3. **Relocate.** The work performed and materials furnished in accordance with this Item will be paid for at the unit bid price for "ITS RVSD (Data Collection Only) (Relocate)" and "ITS RVSD (Data Collection and Wrong-way alarm) (Relocate)." This price is full compensation for relocating and making fully operational existing RVSD field equipment; furnishing and installing additional cables or connectors; for testing, delivery and storage of components designated for salvage or reuse; and all testing, training, software, equipment, any required equipment modifications for electrical service, labor, materials, tools, and incidentals necessary to complete the work.
- 6.4. **Remove.** The work performed and materials furnished in accordance with this Item will be paid for at the unit bid price for "ITS RVSD (Data Collection Only) (Remove)" and "ITS RVSD (Data Collection and Wrong-way alarm) (Remove)." This price is full compensation for removing existing RVSD equipment; removal of cables and connectors; for testing, delivery and storage of components designated for salvage; and all testing, training, software, equipment, labor, materials, tools, and incidentals necessary to complete the work.