

INDEX OF SHEETS

SEE SHEET 2 FOR INDEX OF SHEETS

STATE OF TEXAS  
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED  
HIGHWAY ROUTINE MAINTENANCE CONTRACT

TYPE OF WORK:

ON CALL METAL BEAM GUARD FENCE REPAIR

PROJECT NO. : RMC 6388-89-001


HIGHWAY : US 82, ETC

LIMITS OF WORK : VARIOUS LOCATIONS IN LAMAR, DELTA AND RED RIVER COUNTIES

GRAPHICS FILE		MAINTENANCE PROJECT NO.		SHEET NO.
		6388-89-001		1
CHECKED	STATE	STATE DIST.	COUNTY	
	TEXAS	PAR	LAMAR, ETC	
CHECKED	CONT.	SECT.	JOB	HIGHWAY NO.
	6388	89	001	US 82, ETC

BARRICADES AND WARNING SIGNS

PROJECT LIMIT BARRICADES WILL NOT BE REQUIRED. THE CONTRACTOR SHALL PROVIDE AND ERECT WARNING SIGNS IN ACCORDANCE WITH THE BARRICADE & CONSTRUCTION STANDARDS, TCP STANDARDS, THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND AS DIRECTED.

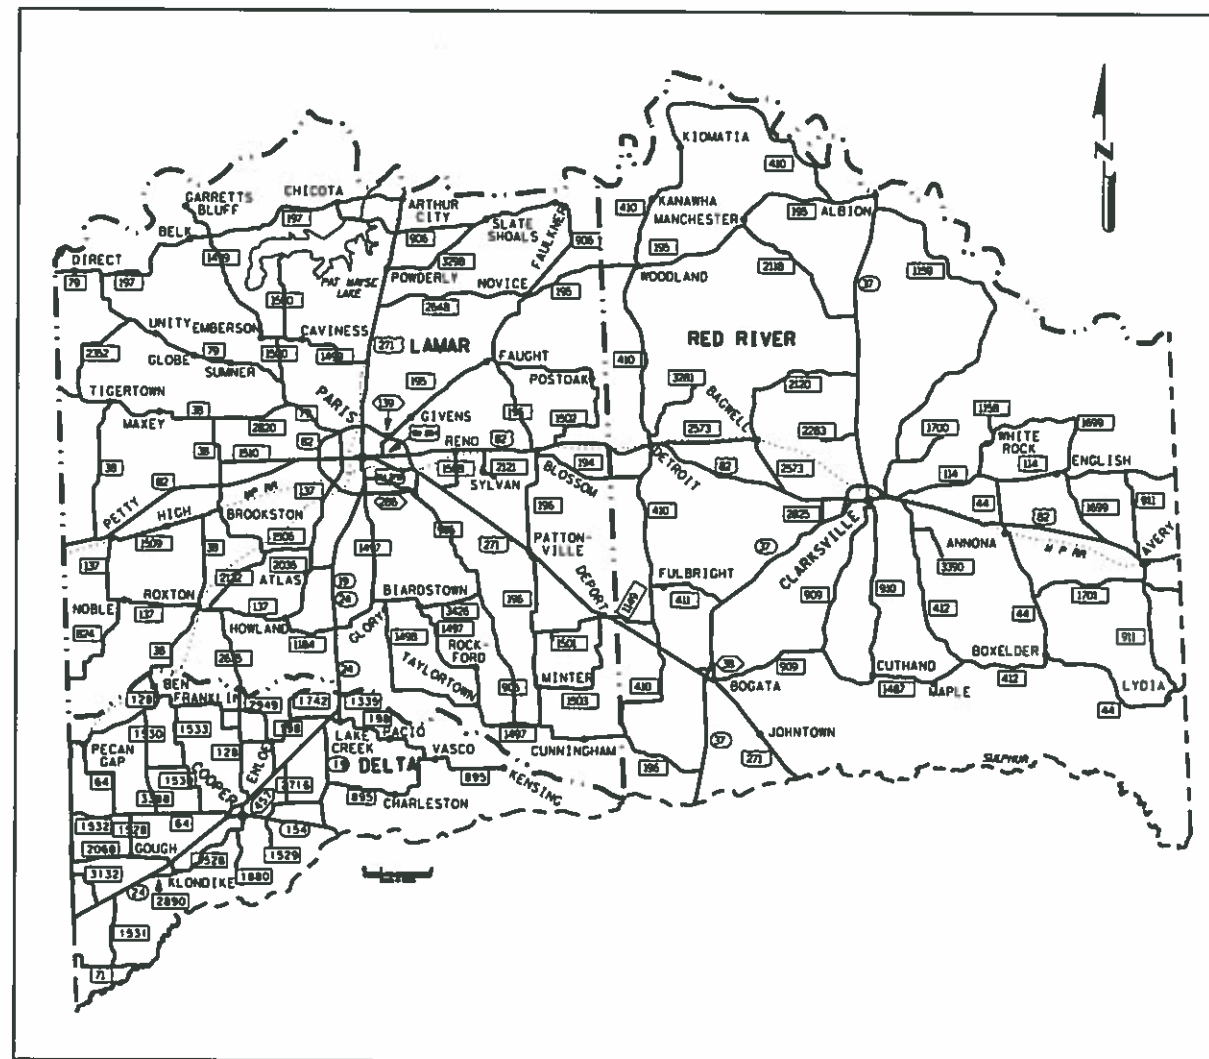

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH BC (1)- 14 THRU BC (12)- 14 AND THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".



SUBMITTED FOR LETTING:  
*Daniel H. Taylor, P.E.* 09/02/ 20 21  
AREA ENGINEER


RECOMMENDED FOR LETTING  
*Paul Cuddy* 10-20-21  
DISTRICT MAINTENANCE ADMINISTRATOR

APPROVED FOR LETTING  
*John I. [Signature]* 10/20/21  
DIRECTOR OF OPERATIONS

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

# INDEX OF SHEETS

SHEET NO.	DESCRIPTION				
1	TITLE SHEET	56	>	TRACC (W)-16	
2	INDEX OF SHEETS	57-58	>	CATCB-17	
3-5	GENERAL NOTES	59	>	D & OM(1)-20	
6	ESTIMATE AND QUANTITY SHEET	60	>	D & OM(2)-20	
7	> TCP (1-1)-18	61	>	D & OM(5)-20	
8	> TCP (1-2)-18	62	>	D & OM(6)-20	
9	> TCP (1-4)-18				
10	> TCP (1-5)-18				
11	> TCP (1-6)-18				
12	> WZRS -16				
13-24	> BC (1-12)-21				
25	> MBGF -19				
26	> MBGF (SR)-19				
27	> MBGF (MS)-19				
28	> MBGF (TL2)-19				
29	> MBGF (T101)-19				
30	> MBGF (TR) -19				
31	> GF (31)-19				
32	> GF (31)DAT-19				
33	> GF (31)LS-19				
34	> GF (31)MS-19				
35	> GF (31)T6-19				
36	> GF (31)T101-19				
37	> GF (31)TR TL2-19				
38-39	> GF (31)TR TL3-20				
40	> RAIL (ADJ) (A)-19				
41	> RAIL (ADJ) (B)-19				
42	> BED-14				
43	> RAIL (T631)-20				
44	> SGT (10S)31-16				
45	> SGT (11S)31-18				
46	> SGT (12 S)31-18				
47	> SGT (13S)31-18				
48	> SGT (14W)31-18				
49-51	> SRG (TL-2)-21				
52-54	> SRG (TL-3)-21				
55	> TAU (M) (N)-19				



*Ellen Perry, P.E.*, PE      09/01/2021  
 DATE

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE, AS MARKED WITH (>) HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

**ON CALL MBGF REPAIR  
 INDEX OF SHEETS**



CONT	SECT	JOB	HIGHWAY
6388	89	001	US 82, ETC
DIST	COUNTY		SHEET NO.
PAR	LAMAR, ETC		2

DATE:  
FILE:

**Project Number:** RMC 6388-89-001

**County:** Lamar, etc.

**Control:** 6388-89-001

**Highway:** US 82, etc.

**GENERAL NOTES:**

**PROJECT DESCRIPTION:** The project consists of making necessary metal beam guard fence repairs on a call-out basis in Lamar, Delta, and Red River Counties. Make repairs as the need arises due to damage, accidents, etc.

Perform work on various highways within the area denoted on the location map. Accomplish work in accordance with the latest guardrail standards unless otherwise directed by the Engineer.

Questions prior to letting may be submitted by email to the names listed below and will be answered by email:

Paris Area Office  
Daniel Taylor – [Daniel.Taylor@txdot.gov](mailto:Daniel.Taylor@txdot.gov)

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:  
[https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/](https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/)

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

**TXDOT PROJECT SUPERVISOR:** All work on this contract will be scheduled and directed by the following persons. Payment will be made on a monthly basis for work completed and accepted according to specifications. All payment requests shall be directed to same:

David Escobedo, Lamar/Delta County Maintenance Supervisor  
3600 SW Loop 286  
Paris, TX 75460  
Phone: (903) 785-4468  
Fax: (903) 785-3396

Mark Miller, Red River County Maintenance Supervisor  
2002 W Main  
Clarksville, Texas 75426  
Phone: (903) 427-3561  
Fax: (903) 427-4021

**Project Number:** RMC 6388-89-001

**County:** Lamar, etc.

**Control:** 6388-89-001

**Highway:** US 82, etc.

**Contract Prosecution:** Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

The Engineer may require the Contractor to use two separate crews if the workload warrants their use. A crew shall consist of a minimum of four laborers.

Furnish a mechanical hole digger capable of digging holes in soil and rock the diameter and depth as set forth in the latest standards. The digger may be mounted on a truck, or self-propelled, as long as the machine functions to the satisfaction of the Engineer.

The Contractor should be aware that some posts have been previously set in concrete.

Maintain existing drainage.

**ITEM 2: INSTRUCTIONS TO BIDDERS**

Article 2.5 - This project includes plan sheets that are not part of the bid proposal.

View plans on-line or download from the web at:  
<http://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:  
<http://www.txdot.gov/business/letting-bids/repro-companies.html>

**ITEM 3: AWARD AND EXECUTION OF CONTRACT**

This contract includes non-site specific work. Multiple work orders will be used to procure work of the type identified in the contract at locations that have not yet been determined.

**ITEM 5: CONTROL OF THE WORK**

The initial method of contact will be by phone and then followed up by email. The Contractor will not be called out to work unless there is a minimum of one (1) Single Guardrail Terminal (SGT) to repair or replace; or 150' of guardrail to be repair or replace. Begin physical work within 72 hours of verbal notification and continue until all work within the respective work order is complete.

Avoid damaging utilities during guard fence operations by contacting utility companies and locating all underground lines in the vicinity of the work.

**Project Number:** RMC 6388-89-001

**County:** Lamar, etc.

**Control:** 6388-89-001

**Highway:** US 82, etc.

Upon completion of the work and before final acceptance and final payment is made, clear and remove from the site all surplus and discarded materials and shall leave the entire project in a neat and sightly condition.

**ITEM 6: CONTROL OF MATERIALS**

All materials, labor, tools and equipment required to complete this project shall be furnished by the Contractor in accordance with applicable specifications.

All material furnished by the contractor shall be new.

Any salvaged material will become the property of the Contractor to dispose of properly.

**ITEM 7: LEGAL REGULATIONS AND RESPONSIBILITIES**

No significant traffic generator event identified.

**ITEM 8: PROSECUTION AND PROGRESS**

Time will be computed according to Item 8.3.1.5 calendar day

The number of working days for this project will be 365 calendar days or until contract funds are expended.

**ITEM 500: MOBILIZATION**

Call out work orders may have multiple locations spanning multiple days and may require work in all three counties.

**ITEM 502: BARRICADES, SIGNS AND TRAFFIC HANDLING**

All flaggers shall be certified.

All workers working within the highway right of way will wear a white safety helmet/hardhat.

The Contractor's personnel shall be dressed in approved safety attire while outside vehicles and/or while performing work on the highway right of way. For daytime and nighttime activity, flaggers shall wear high-visibility safety apparel that meets the Performance Class 2 or 3 requirements of the ANSI/ISEA 107-2004 publication entitled "American National Standard for High-Visibility Apparel and Headwear".

**Project Number:** RMC 6388-89-001

**County:** Lamar, etc.

**Control:** 6388-89-001

**Highway:** US 82, etc.

The traffic control plan for this contract consists of the installation and maintenance of warning signs and other traffic control devices shown in the plans, specification data wich may be included in the general notes, applicable provisions of the Texas Manual of uniform Traffic Control Devices (TMUTCD), traffic control plan sheets included in the plans, standard BC sheets and Item 502 of the Standard Specifications.

**ITEM 540: MBGF**

Upgrade MBGF under this Item.

**ITEM 542: REMOVING MBGF**

Removal of MBGF element and replacing rail will be paid for under this Item

**ITEM 545: CRASH CUSHION ATTENUATOR**

Item 545-6001 will be used to pay for installation of CATCB(1)-17 system

**ITEM 770: METAL BEAM GUARD FENCE REPAIR**

Install guardrail terminals, repair, remove and replace or upgrade guardrail element under this item.

Close no more than one (1) lane of traffic in one location. Once work begins to repair/replace damaged metal beam guard fence on one side of the roadway, all work shall be fully completed before beginning work on the opposite side of the roadway in the same general area.

The concrete for terminal anchor posts or for embedment of other posts in concrete, where embedment is required, shall meet the requirements for class "A" concrete as specified in item 421, "Hydraulic Cement Concrete". All class "A" concrete and concrete design shall be approved by the Engineer and strength testing requirement may be waived.

When repair to a Single Guardrail Terminal is required, make repairs as shown on SGT (10S)31-16 or SGT (12S)31-18 to be paid under "Replace Single Guardrail Terminal Rail", "Replace Single Guardrail Terminal Post" or "Replace Single Guardrail Term Impact Head".

When replacing damaged "ET plus system" or "terminal anchor section" with SGT, work will be paid under item 770-6027 "Remove Guardrail End Treatment/Replace with SGT".

**ITEM 774: ATTENATOR REPAIR**

Repair of damaged attenuators and crash cushions consist of removal and replacement of damaged components as directed.

**Project Number:** RMC 6388-89-001

**County:** Lamar, etc.

**Control:** 6388-89-001

**Highway:** US 82, etc.

**ITEM 776: METAL RAIL**

This item will be used to pay for repair to TY T631 bridge rail and TY T631 post.

**ITEM 6185: TMA**

Shadow vehicles with truck mounted attenuator (TMA) are required on traffic control plan and TCP standards for this project. The contractor will be responsible for determining if one or more of these traffic control operations will be ongoing at the same time to determine the total number of TMA's needed for the project.



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6388-89-001

DISTRICT Paris  
HIGHWAY US0082

COUNTY Lamar


CONTROL SECTION JOB				6388-89-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00181409			
COUNTY				Lamar			
HIGHWAY				US0082			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	500-6033	MOBILIZATION (CALLOUT)	EA	20.000		20.000	
	540-6002	MTL W-BEAM GD FEN (STEEL POST)	LF	1,000.000		1,000.000	
	540-6022	MTL THRIE-BEAM GD FEN (STEEL POST)	EA	20.000		20.000	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	1,000.000		1,000.000	
	542-6002	REMOVE TERMINAL ANCHOR SECTION	EA	4.000		4.000	
	545-6005	CRASH CUSH ATTEN (REMOVE)	EA	2.000		2.000	
	545-6024	CRASH CUSHION ATTEN (INSTALL) (TRACC)	EA	1.000		1.000	
	658-6080	INSTL DEL ASSM (D-SW)SZ 1(WFLX)GND	EA	40.000		40.000	
	658-6082	INSTL DEL ASSM (D-SW)SZ 1(WFLX)GND(BR)	EA	50.000		50.000	
	658-6099	INSTL OM ASSM (OM-22)(WFLX)GND	EA	10.000		10.000	
	770-6001	REPAIR RAIL ELEMENT (W - BEAM)	LF	1,000.000		1,000.000	
	770-6002	REPAIR RAIL ELEMENT (THRIE - BEAM)	LF	80.000		80.000	
	770-6003	REP RAIL ELMNT(THRIE-BM TRANS TO W -BM)	LF	80.000		80.000	
	770-6004	REPAIR RAIL ELEMENT (CURVED RAIL)	LF	80.000		80.000	
	770-6006	RAISE RAIL ELEMENT	LF	50.000		50.000	
	770-6012	REM / REPL TIMBER POST W / O CONC FND	EA	100.000		100.000	
	770-6013	REM / REPL STEEL POST W / O CONC FND	EA	50.000		50.000	
	770-6014	REM / REPL TIMBER POST W / CONC FND	EA	5.000		5.000	
	770-6015	REM / REPL STEEL POST W / CONC FND	EA	5.000		5.000	
	770-6017	REALIGN POSTS	EA	100.000		100.000	
	770-6019	REMOVE & REPLACE BLOCKOUT	EA	50.000		50.000	
	770-6021	REPLACE SINGLE GDRAIL TERMINAL RAIL	LF	100.000		100.000	
	770-6022	REPLACE SINGLE GDRAIL TERMINAL POST	EA	40.000		40.000	
	770-6027	REMOVE GDRAIL END TRT / REPL WITH SGT	EA	24.000		24.000	
	770-6028	REPL SINGLE GDRAIL TERM IMPACT HEAD	EA	5.000		5.000	
	770-6029	REM & RESET SGT IMPACT HEAD	EA	5.000		5.000	
	770-6031	REPLACE SGT CABLE ANCHOR	EA	5.000		5.000	
	770-6032	REPLACE SGT STRUT	EA	5.000		5.000	
	774-6011	REPAIR (CATCB - FRNT SECT)	EA	1.000		1.000	
	774-6012	REPAIR (CATCB - REAR SECT)	EA	1.000		1.000	
	776-6055	REP METAL PST W/ BASE PLATE (TY T631)	EA	80.000		80.000	
	776-6056	REP W BEAM (TY T631)	LF	250.000		250.000	
	6185-6002	TMA (STATIONARY)	DAY	24.000		24.000	

DISTRICT	COUNTY	CCSJ	SHEET
Paris	Lamar	6388-89-001	6




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

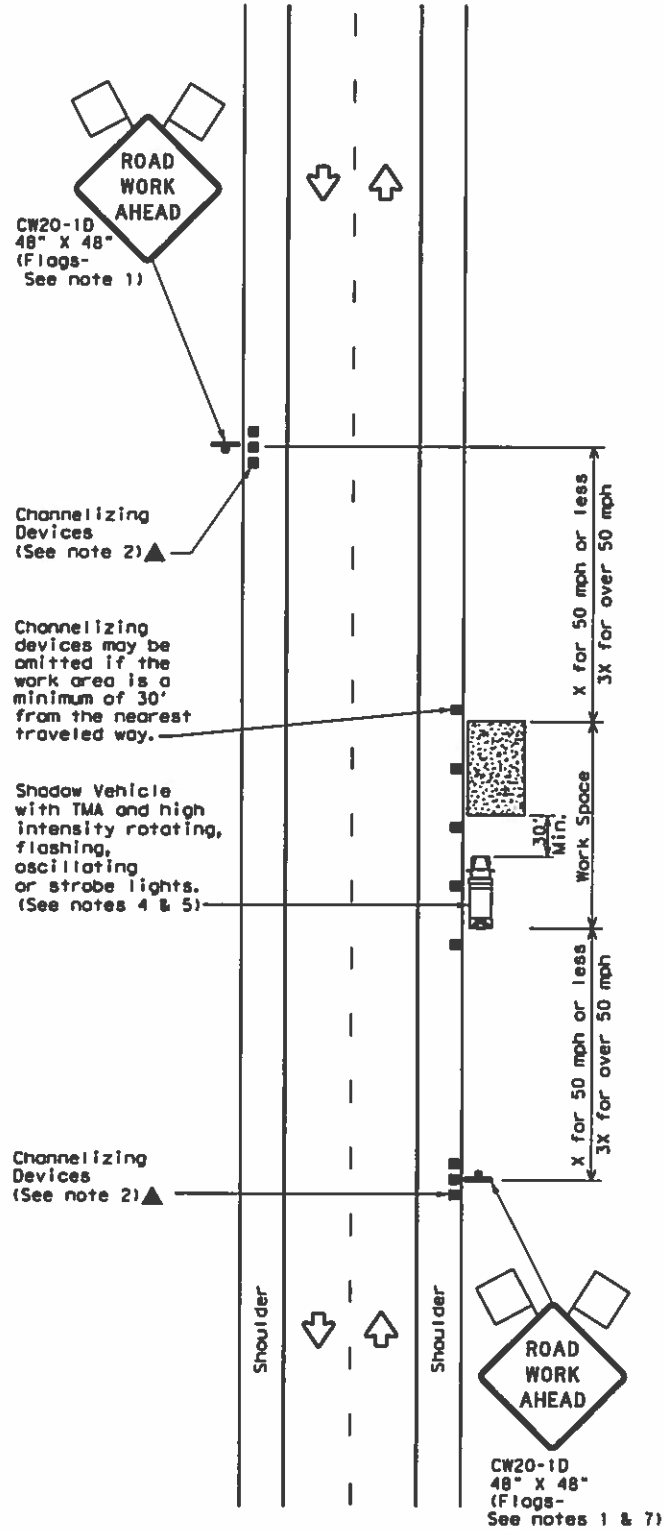


TCP (1-1a)

**WORK SPACE NEAR SHOULDER**  
Conventional Roads

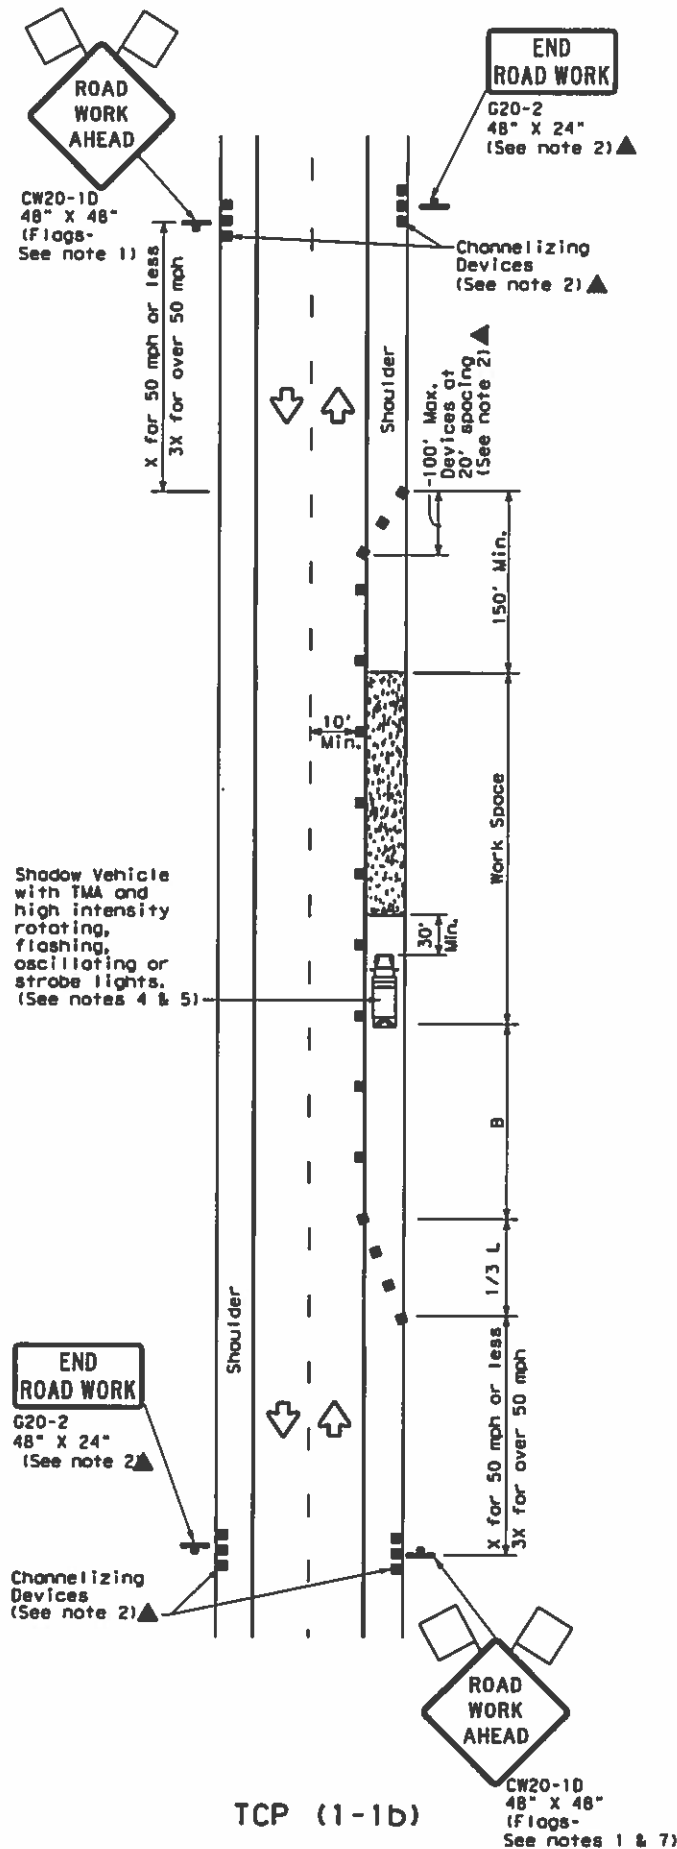

TCP (1-1b)

**WORK SPACE ON SHOULDER**  
Conventional Roads

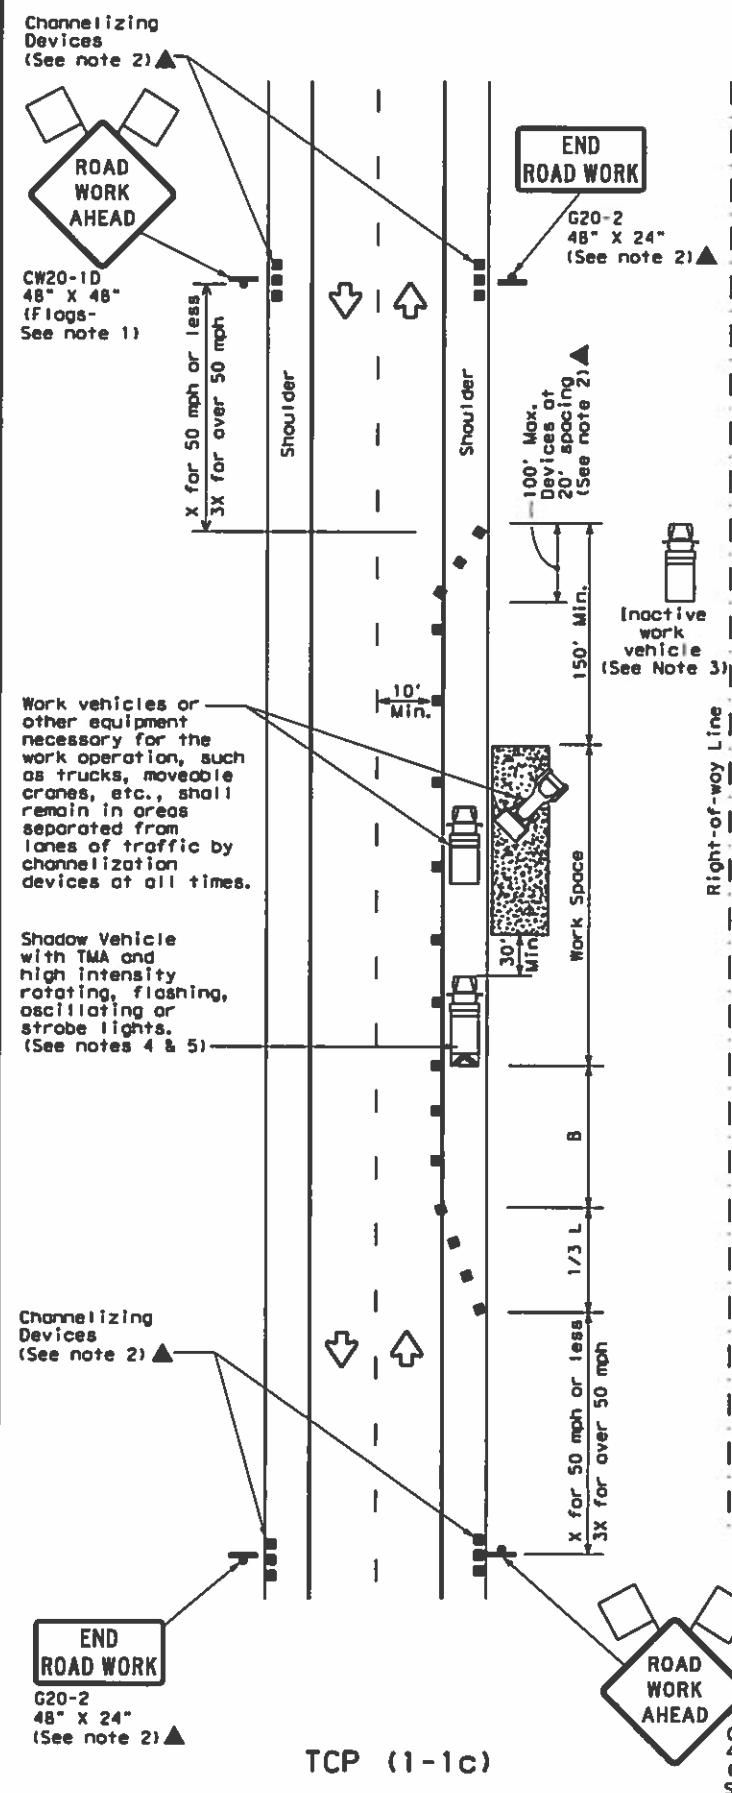

TCP (1-1c)

**WORK VEHICLES ON SHOULDER**  
Conventional Roads

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
  - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
  - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
  - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
  - See TCP (5-1) for shoulder work on divided highways, expressways and freeways.
  - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.

Texas Department of Transportation  
Traffic Operations Division Standard



**TRAFFIC CONTROL PLAN**  
**CONVENTIONAL ROAD**  
**SHOULDER WORK**

**TCP (1-1)-18**

FILE: tcp1-1-18.dgn	DWG	CHK	DWG	CHK
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82; ETC
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	PAR	LAMAR; ETC		7
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

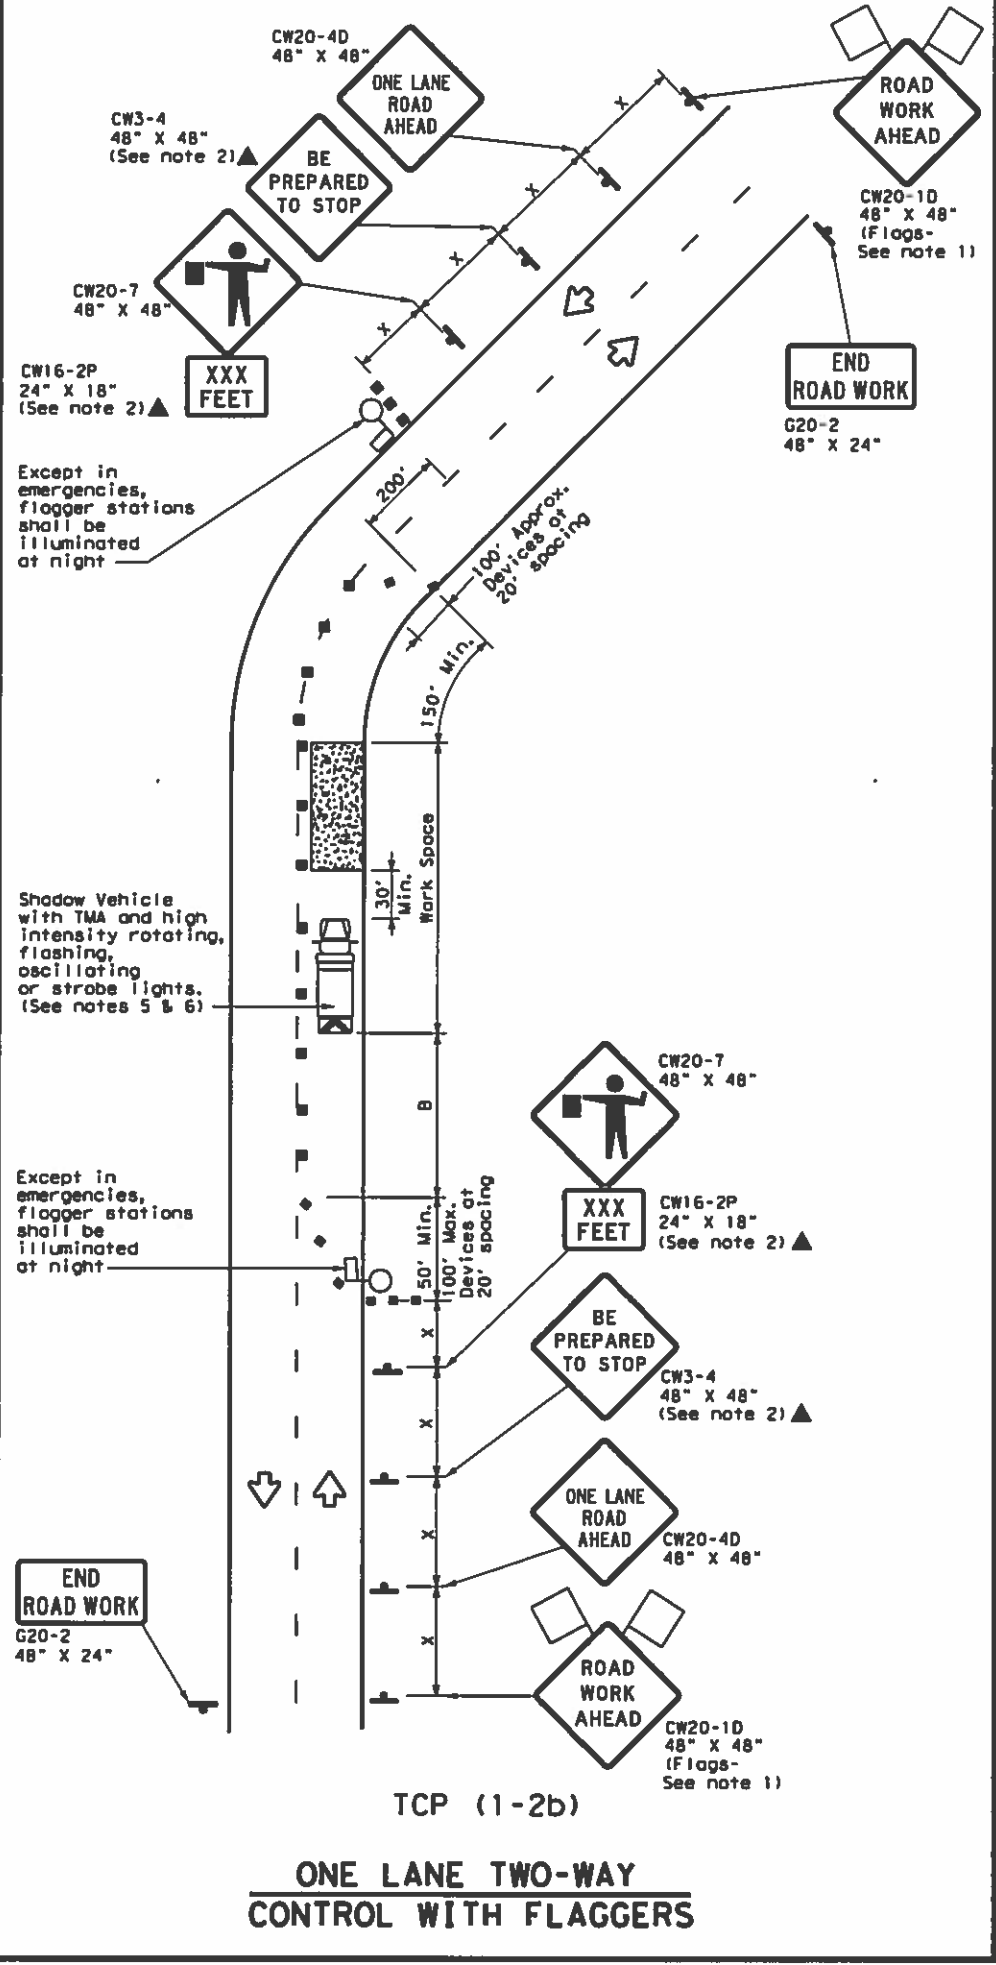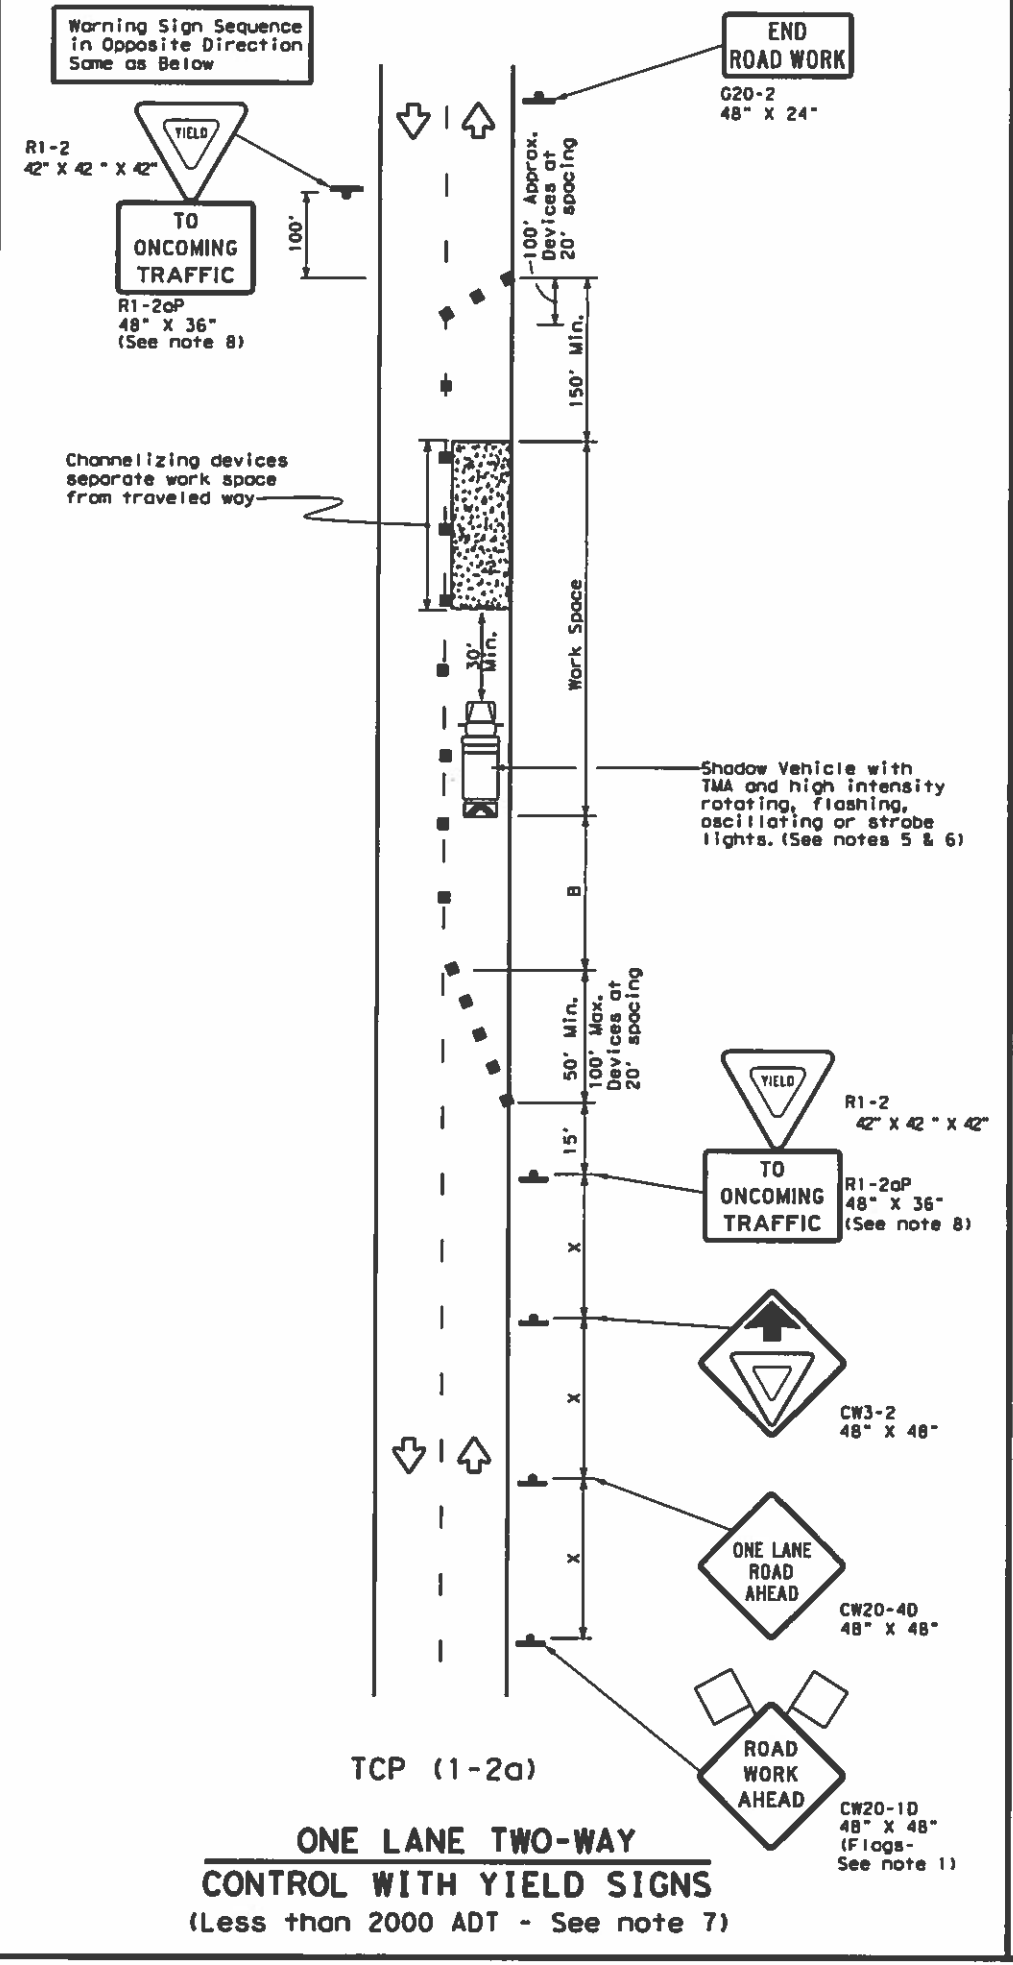

**LEGEND**

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70	700'	770'	840'	70'	140'	800'	475'	730'	
75	750'	825'	900'	75'	150'	900'	540'	820'	

\* Conventional Roads Only  
\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

**TYPICAL USAGE**

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

**GENERAL NOTES**

- Flags attached to signs where shown are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
  - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
  - Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger or R1-2 "YIELD" sign is less than 1500 feet.
  - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
  - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- TCP (1-2a)**
- R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet.
  - R1-2 "YIELD" sign with R1-2aP "TO ONCOMING TRAFFIC" plaque shall be placed on a support at a 7 foot minimum mounting height.
- TCP (1-2b)**
- Flaggers should use two-way radios or other methods of communication to control traffic.
  - Length of work space should be based on the ability of flaggers to communicate.
  - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
  - Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.
  - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

Texas Department of Transportation

**TRAFFIC CONTROL PLAN**  
**ONE-LANE TWO-WAY**  
**TRAFFIC CONTROL**


**TCP (1-2) - 18**

FILE: tcp1-2-18.dgn	DW: CKI	CKI	DW	CKI
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82,ETC
4-90 4-98	DIST	COUNTY		SHEET NO.
2-94 2-12	PAR	LAMAR,ETC		8
1-97 2-18				




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

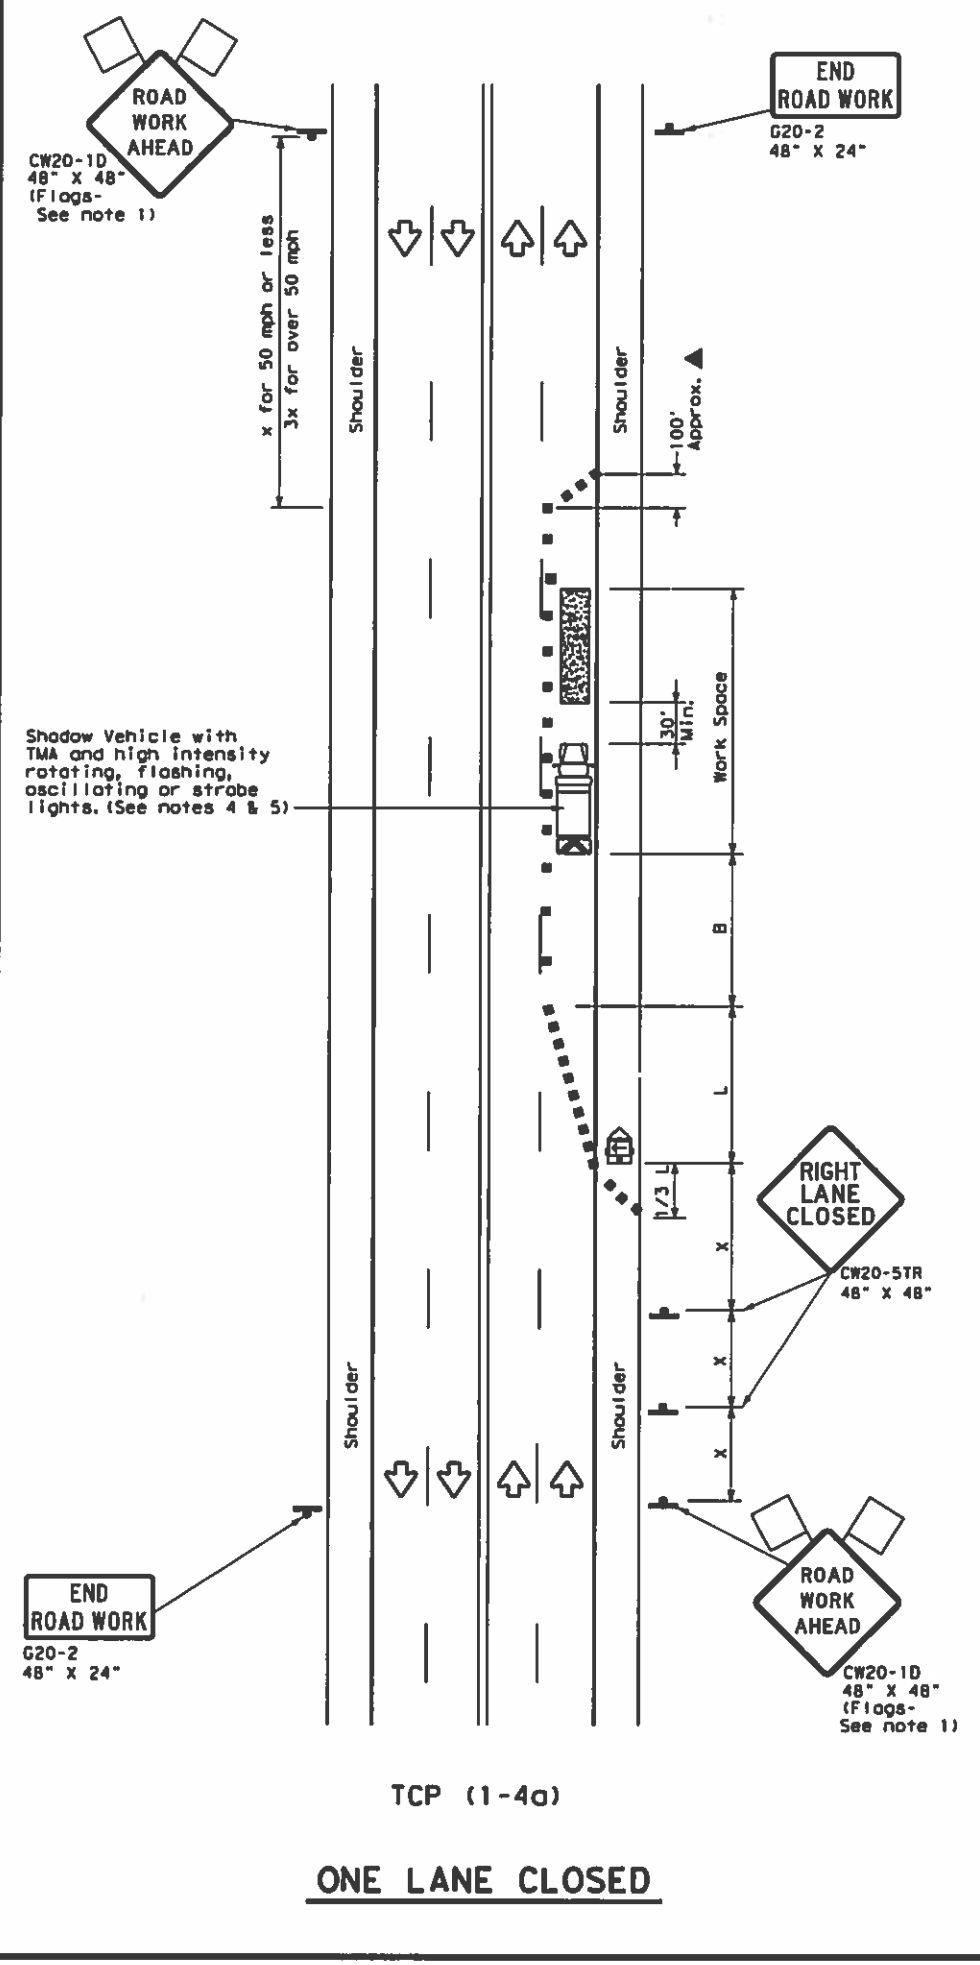

TCP (1-4a)  
ONE LANE CLOSED

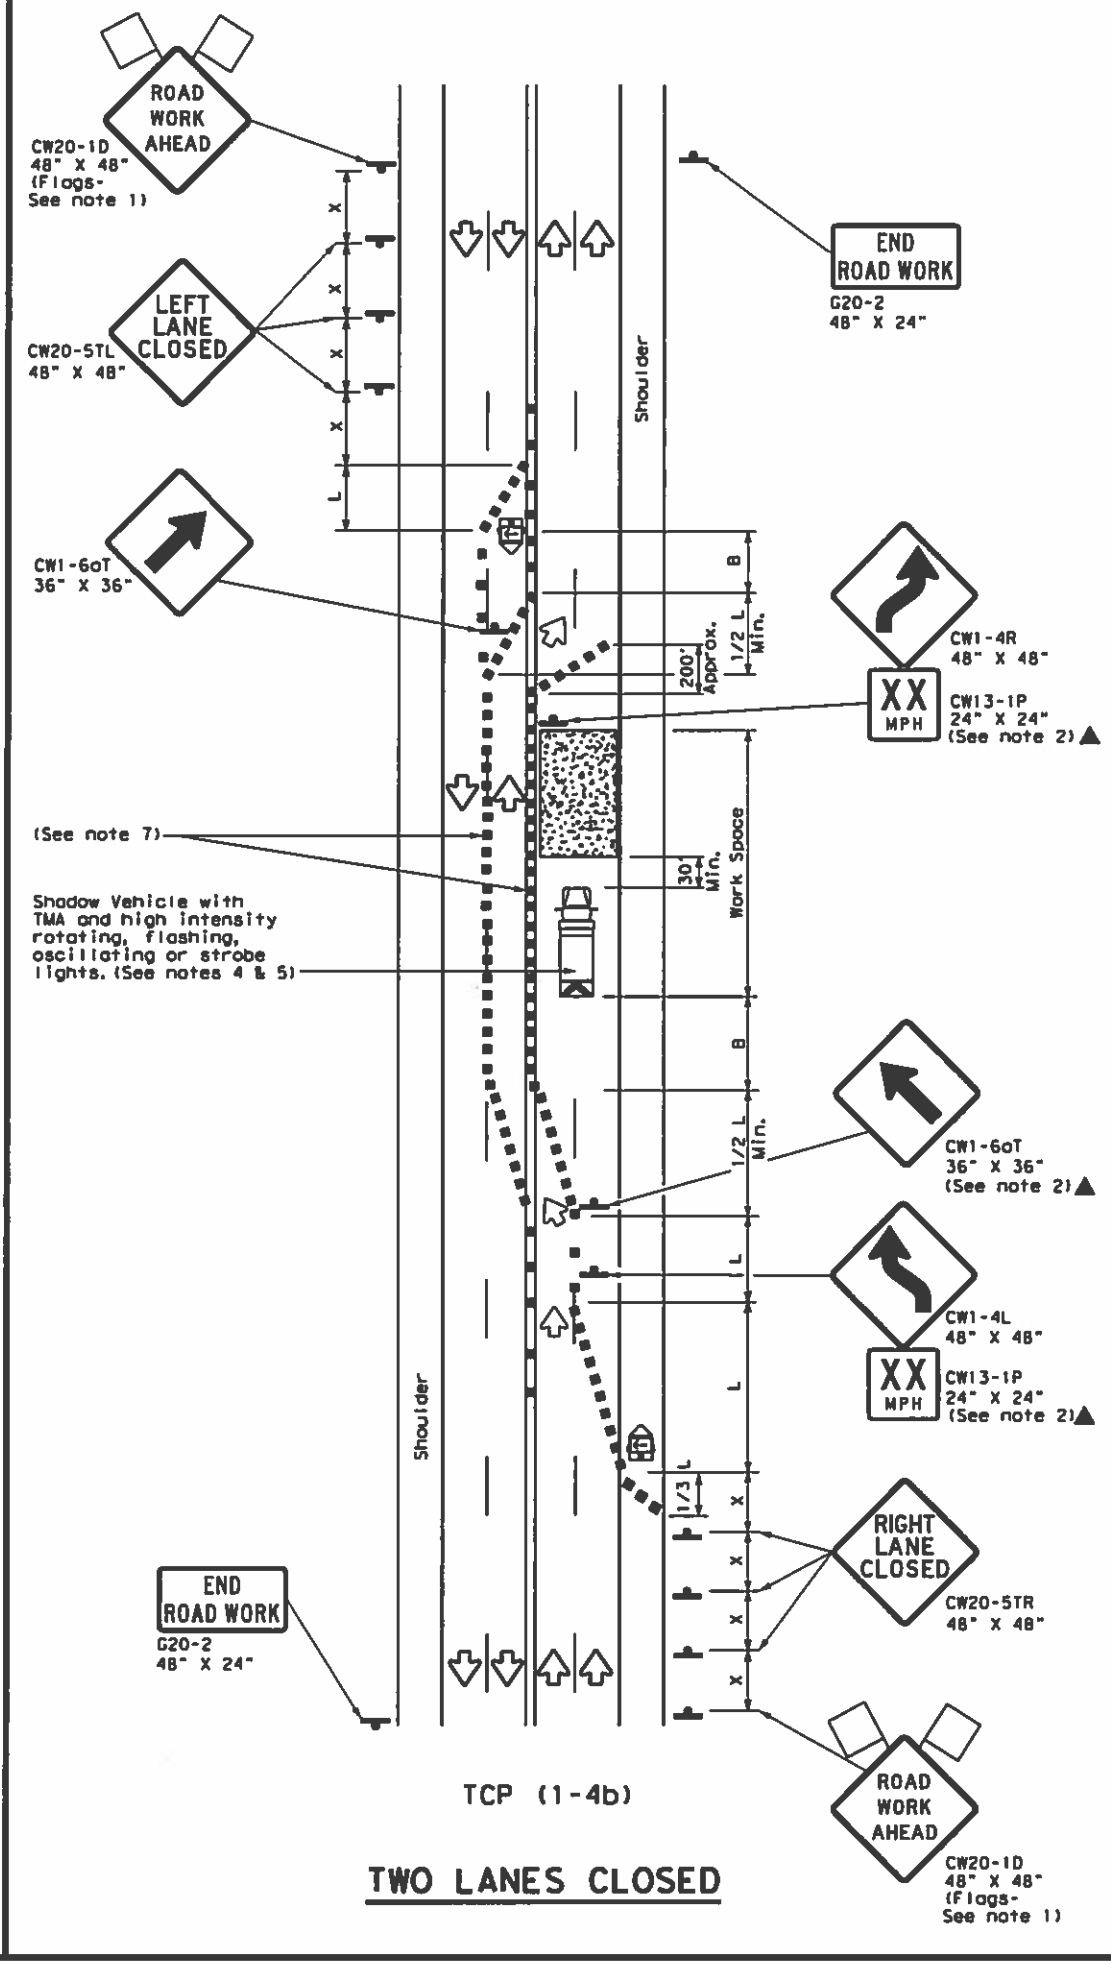

TCP (1-4b)  
TWO LANES CLOSED

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * S	Formula L = WS <sup>2</sup> / 60	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing - "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
  - The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the visibility of the work zone is less than 1500 feet.
  - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
  - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- TCP (1-4a)**
- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline where needed to protect the work space from opposing traffic with the arrow panel placed in the closed lane near the end of the merging taper.
- TCP (1-4b)**
- Where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15'. If posted speeds are 35 mph or slower, and for tangent sections, at 1/2S where S is the speed in mph. This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

Texas Department of Transportation  
 Traffic Operations Division Standard




**TRAFFIC CONTROL PLAN  
 LANE CLOSURES ON MULTILANE  
 CONVENTIONAL ROADS**

**TCP (1-4) - 18**

FILE: tcp1-4-18.dgn	DWG: CBI	CHK: CBI	DATE: CBI
© TxDOT December 1985	CONT: 6388	SECT: 89	JOB: 001
REVISIONS	DIST: COUNTY		HIGHWAY: US 82; ETC
2-94 4-98	PAR LAMAR; ETC		SHEET NO. 9
8-95 2-12			
1-97 2-18			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

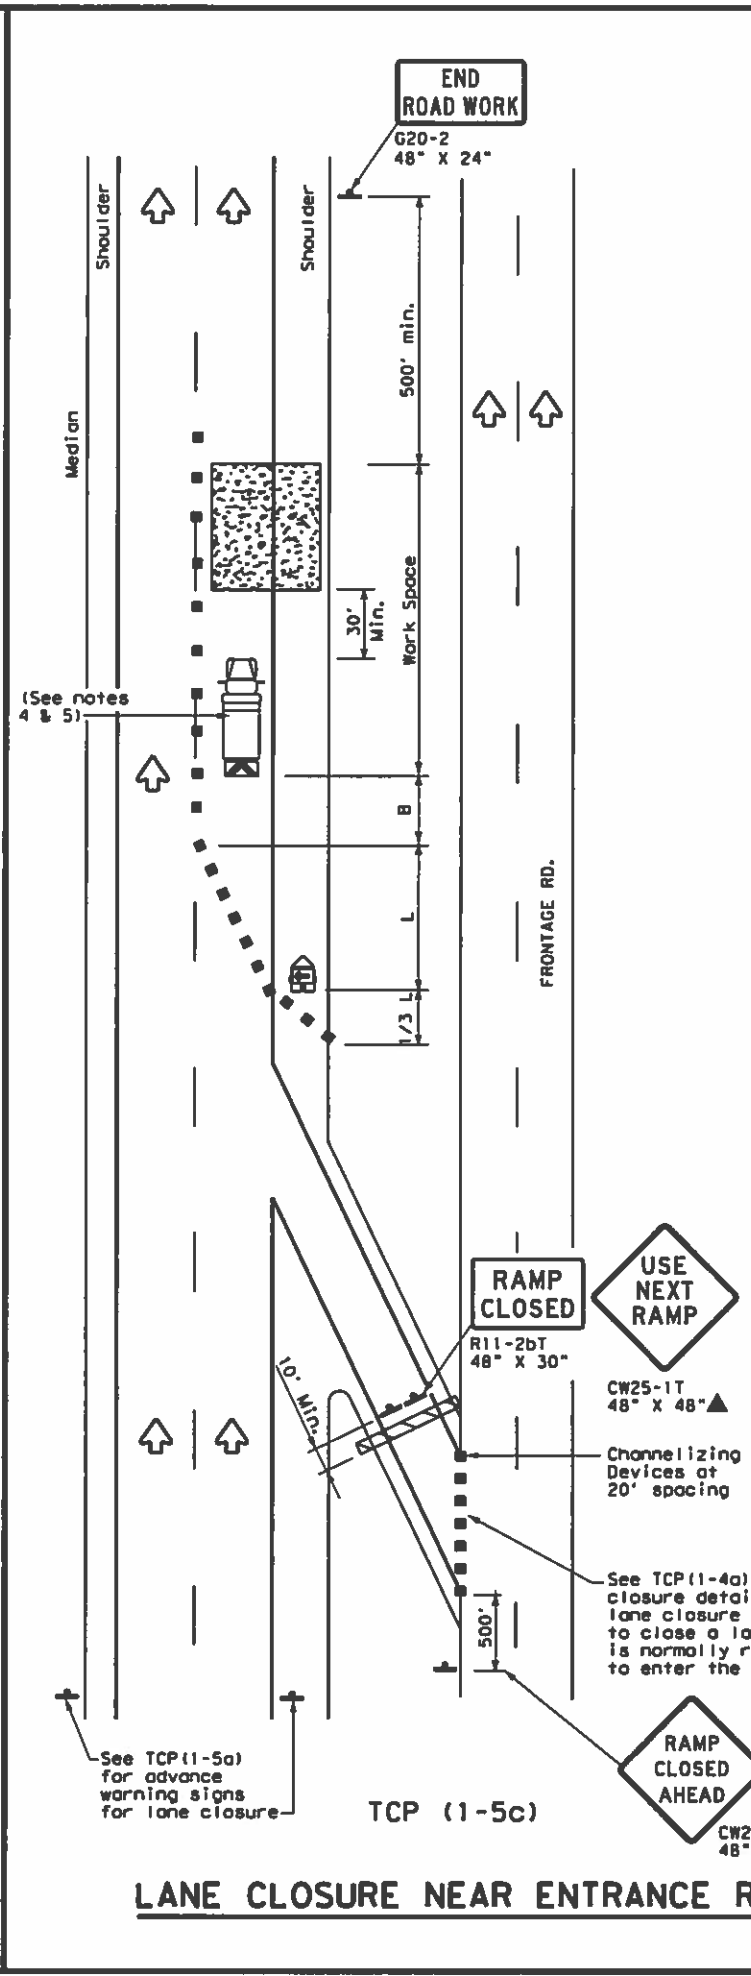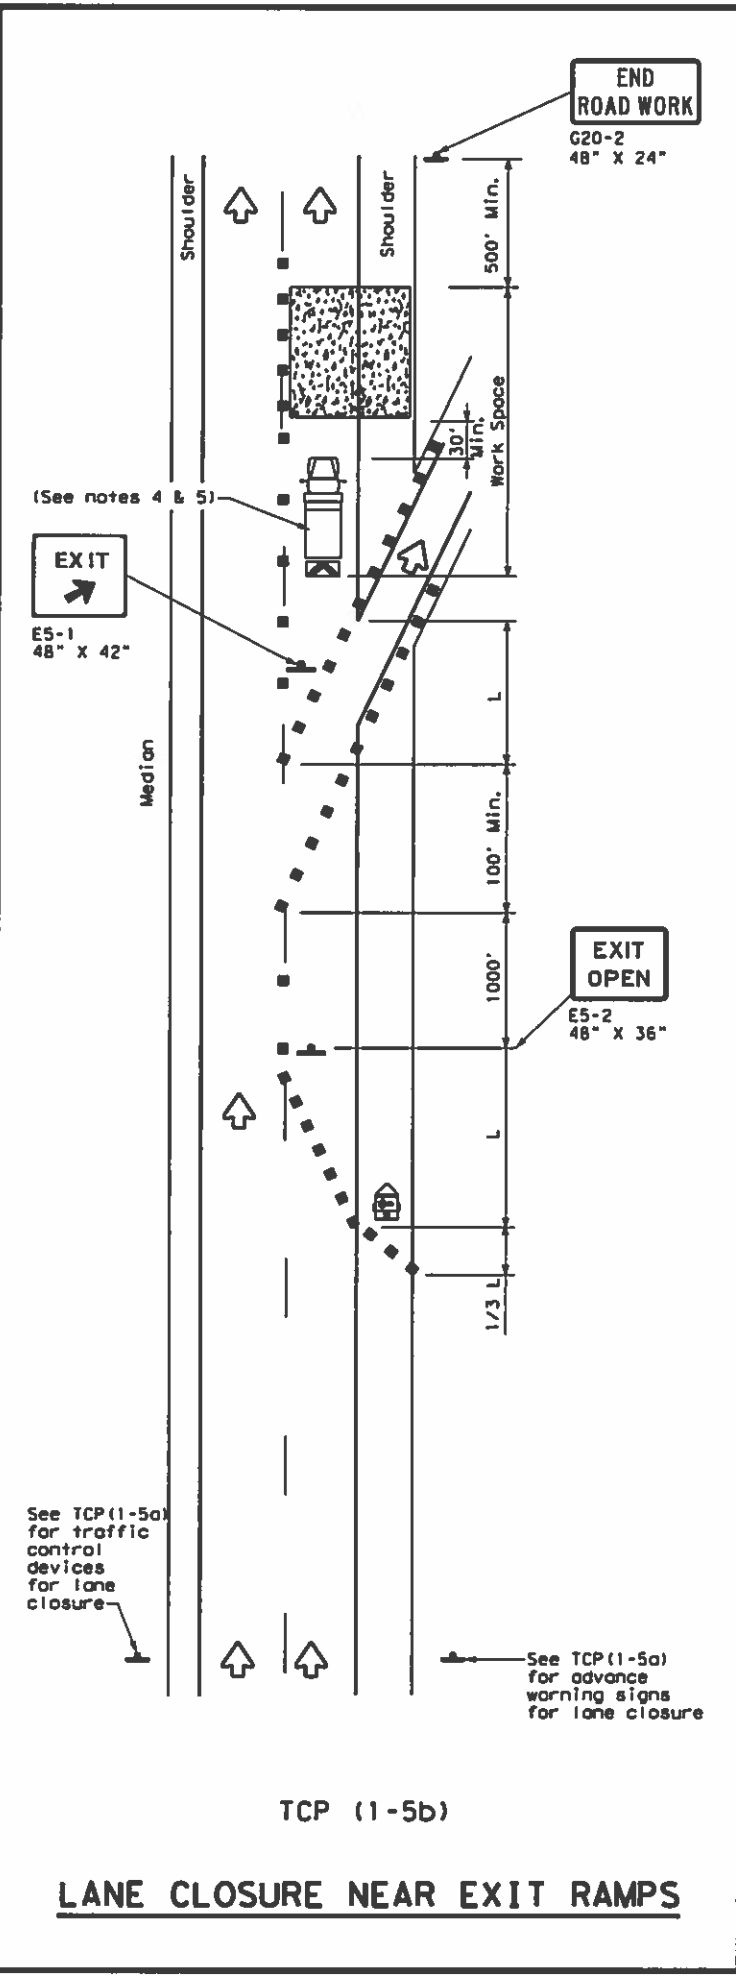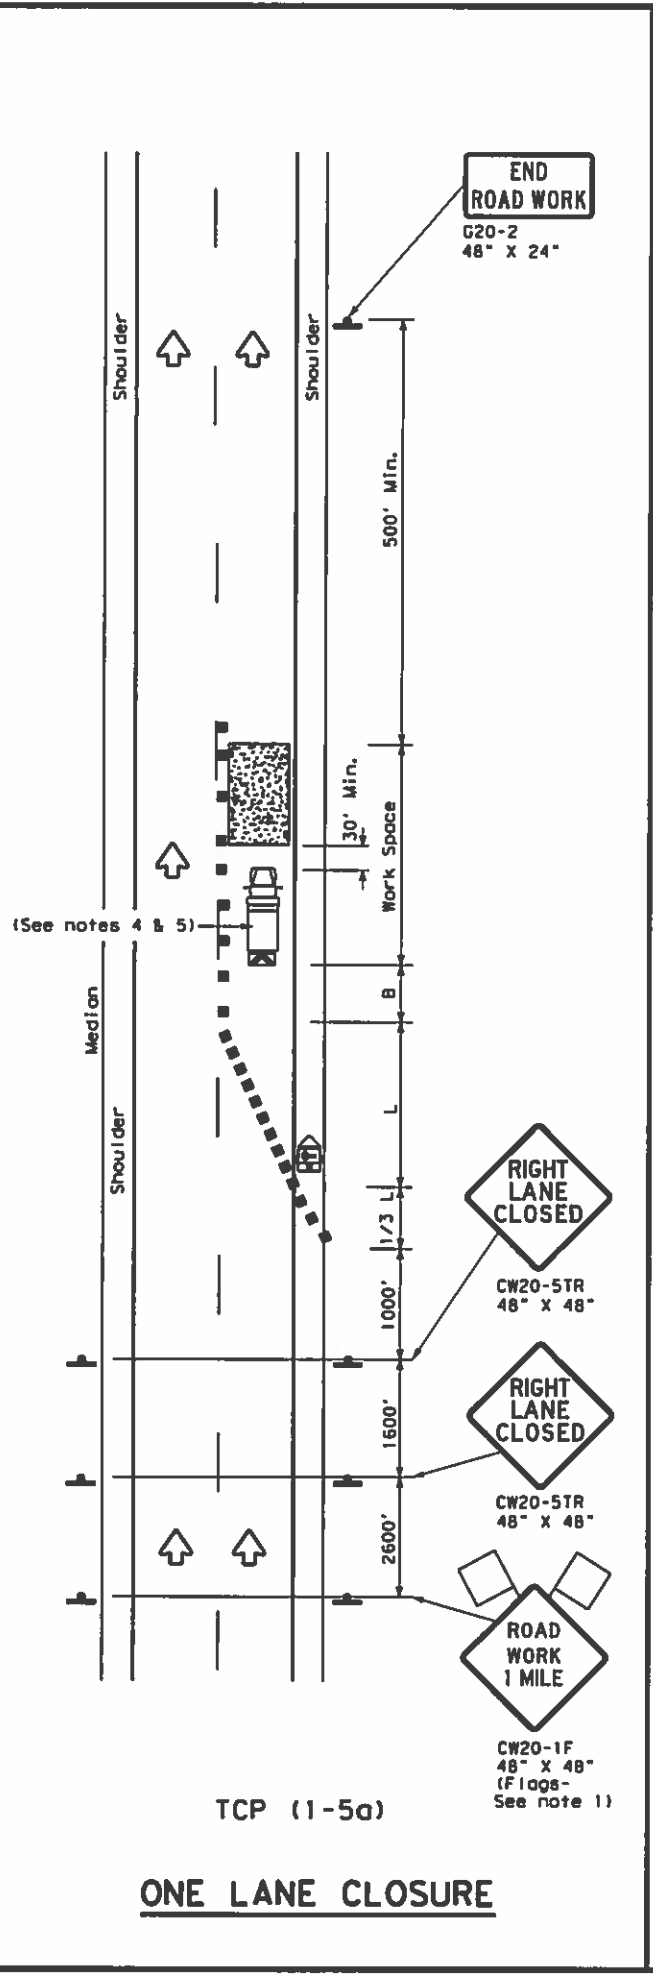

**LEGEND**

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	700'	770'	840'	70'	140'	800'	475'	
75	750'	825'	900'	75'	150'	900'	540'	

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

**TYPICAL USAGE**

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓		

**GENERAL NOTES**

- Flags attached to signs where shown, are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
- Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

**Texas Department of Transportation**  
 Traffic Operations Division Standard


**TRAFFIC CONTROL PLAN  
 LANE CLOSURES FOR  
 DIVIDED HIGHWAYS**

**TCP (1-5) - 18**

FILE: tcp1-5-18.dgn	DATE: February 2012	COM: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82; ETC
2-18	REVISIONS	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO.: 10	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

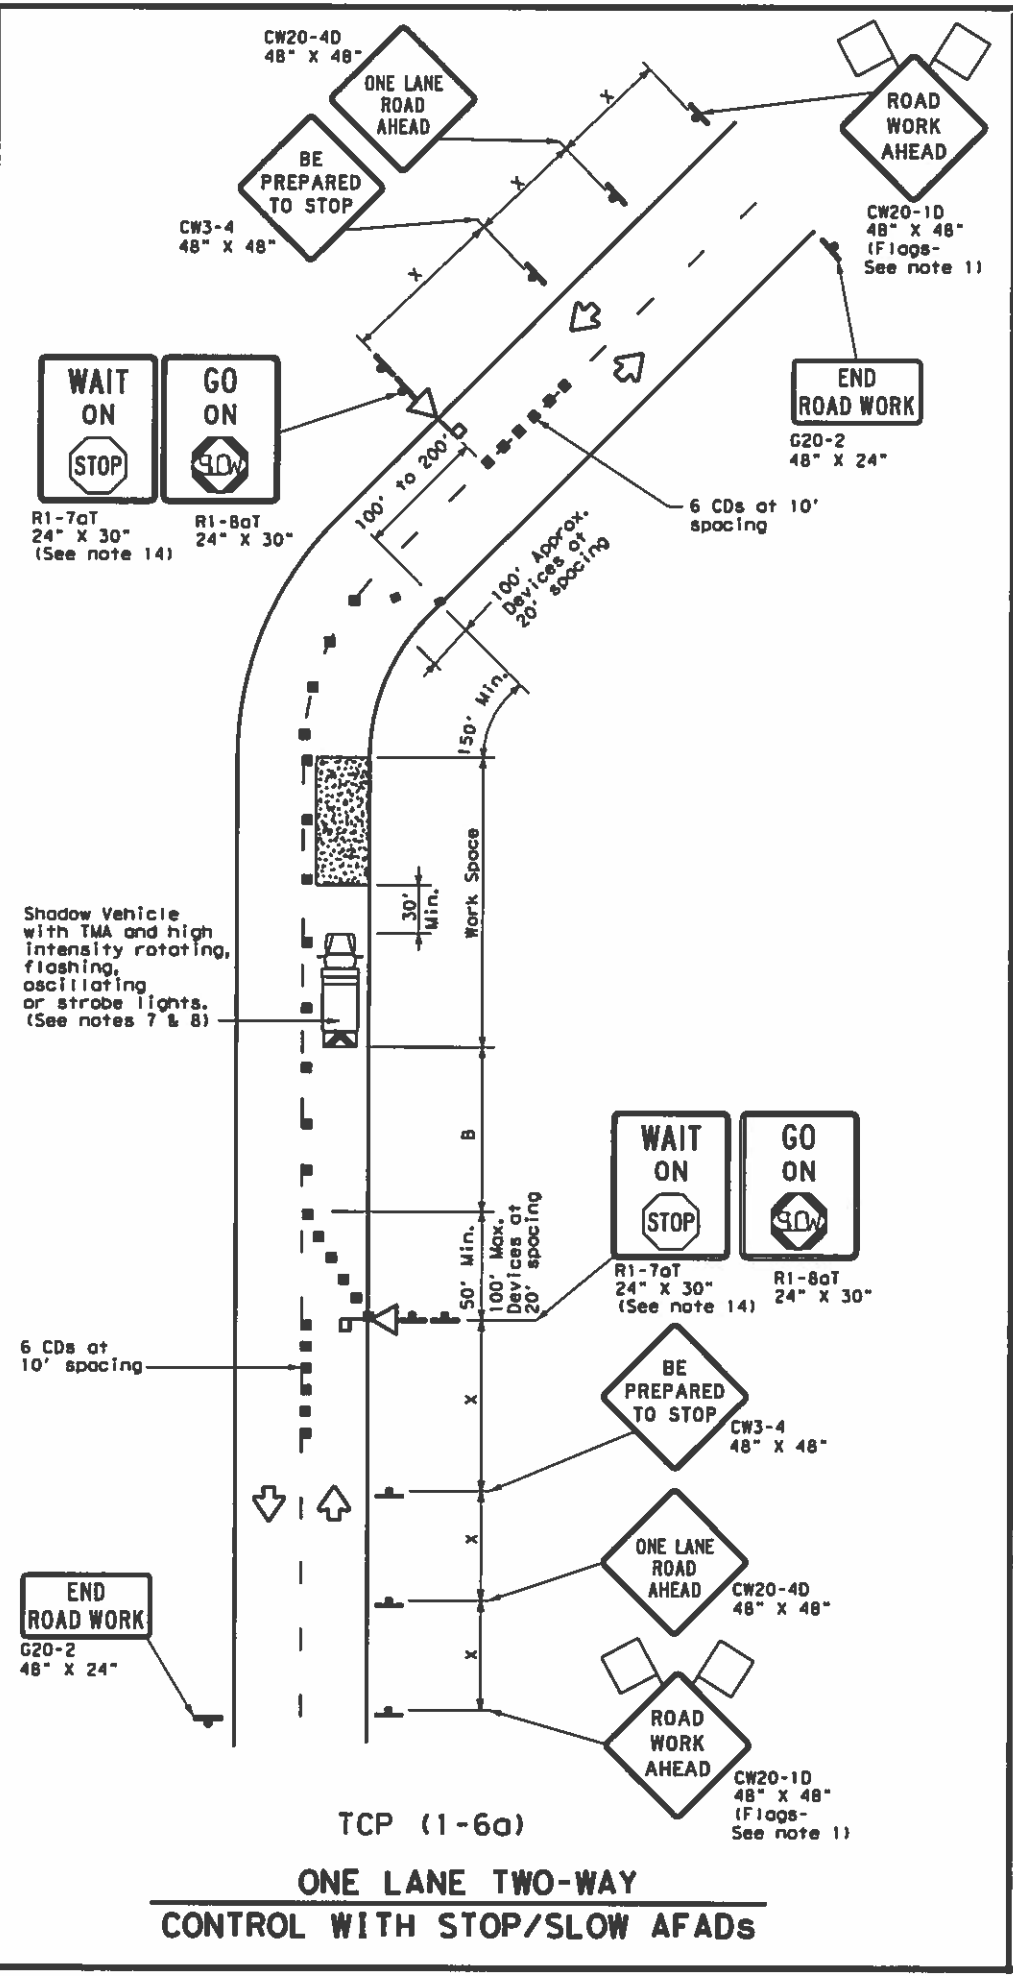

TCP (1-6a)

**ONE LANE TWO-WAY CONTROL WITH STOP/SLOW AFADS**

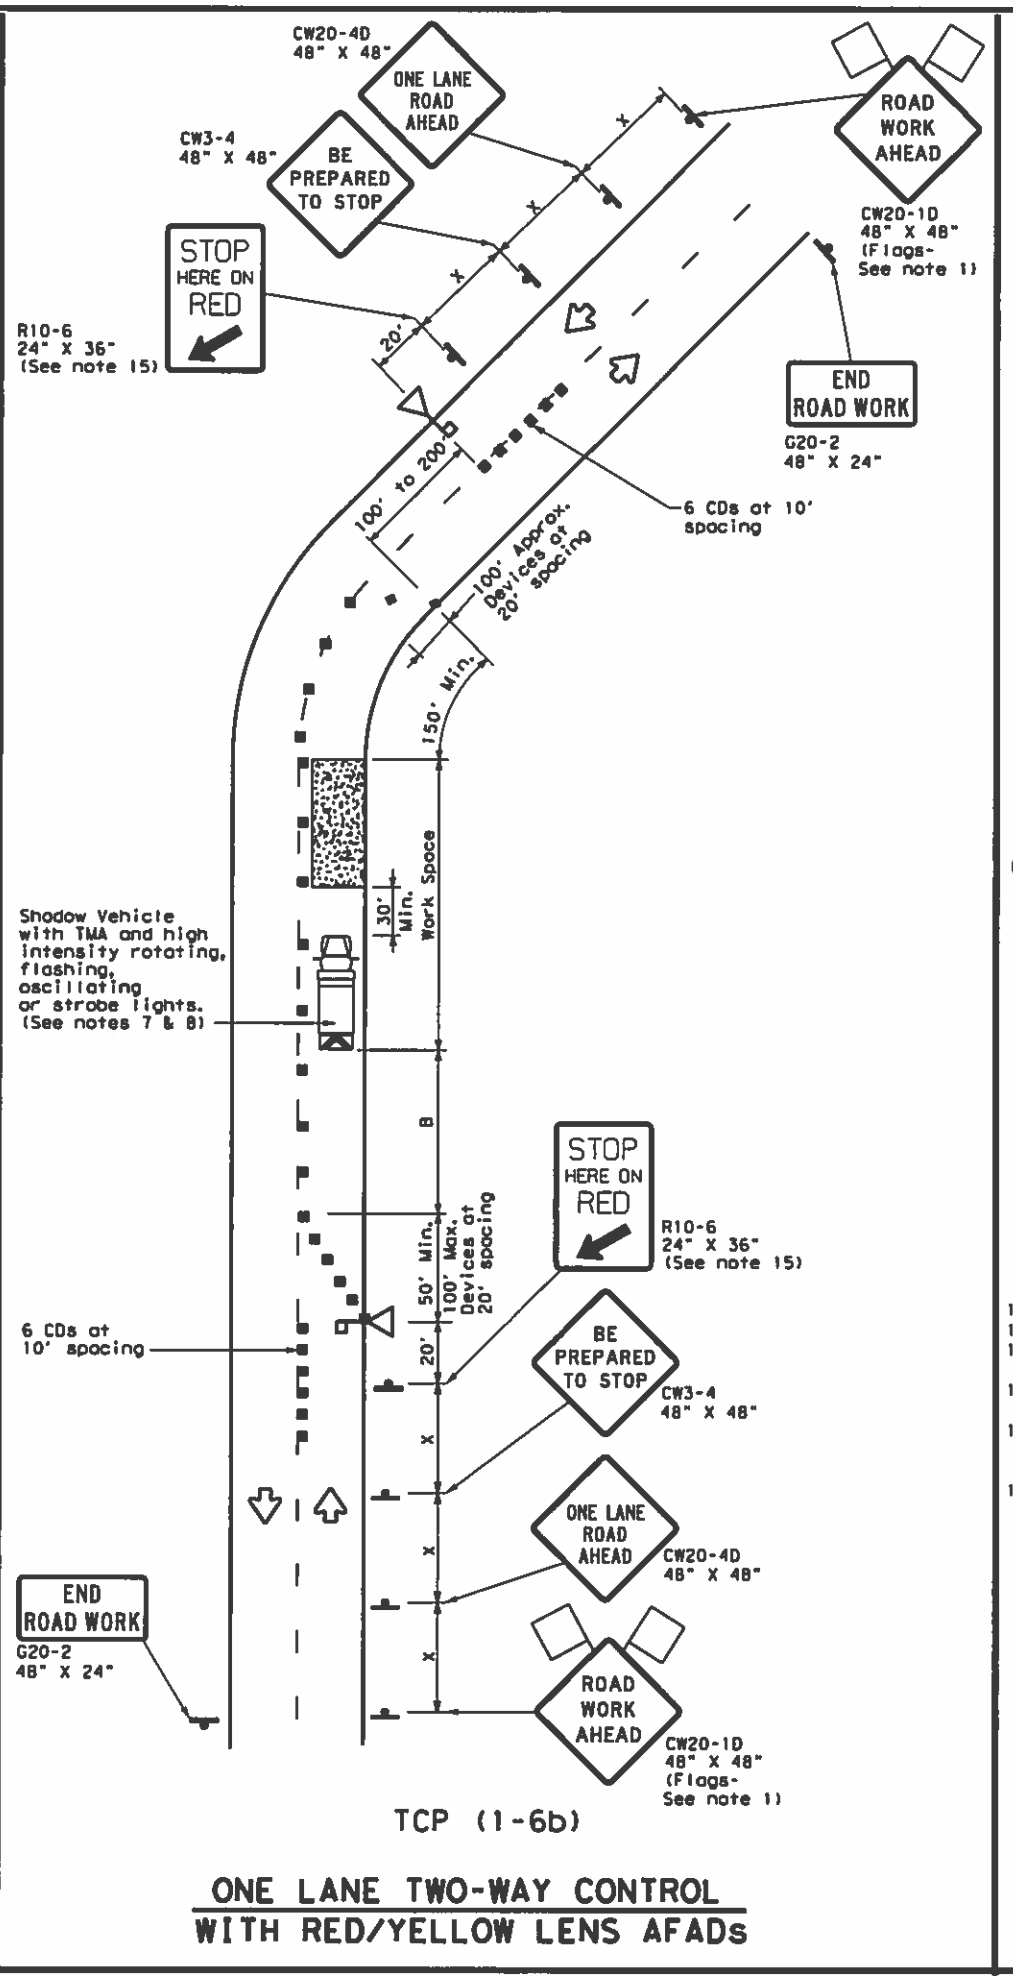

TCP (1-6b)

**ONE LANE TWO-WAY CONTROL WITH RED/YELLOW LENS AFADS**

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Automated Flagger Assistance Device (AFAD)		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L=WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

**GENERAL NOTES**

- Flags attached to signs where shown are REQUIRED.
- AFADs shall only be used in situations where there is one lane of approaching traffic in the direction to be controlled.
- Adequate stopping sight distance must be provided to each AFAD location for approaching traffic. (See table above).
- Each AFAD shall be operated by a qualified/certified flagger. Flaggers operating AFADs shall not leave them unattended while they are in use.
- One flagger may operate two AFADs only when the flagger has an unobstructed view of both AFADs and of the approaching traffic in both directions.
- When pilot cars are used, a flagger controlling traffic shall be located on each approach. AFADs shall not be operated by the pilot car operator.
- All AFADs shall be equipped with gate arms with an orange or fluorescent red-orange flag attached to the end of the gate arm. The flag shall be a minimum of 16" square.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- Flaggers should use two-way radios or other methods of communication to control traffic.
- Length of work space should be based on the ability of flaggers to communicate.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain stopping sight distance to the AFAD.
- Channelizing devices on the center line may be omitted when a pilot car is leading traffic and approved by the Engineer.
- The R1-7aT "WAIT ON STOP" sign and the R1-8aT "GO ON SLOW" sign shall be installed at the AFAD location on separate supports or they may be fabricated as one 48" x 30" sign. They shall not obscure the face of the STOP/SLOW AFAD.
- The R10-6 "STOP HERE ON RED" arrow sign shall be offset so as not to obscure the lenses of the AFAD.

Texas Department of Transportation  
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN  
 AUTOMATED FLAGGER ASSISTANCE DEVICES (AFADS)**


**TCP (1-6) - 18**

FILE:	tcp1-6-18.dgn	DATE:	02/12	BY:	CE1
© TxDOT	February 2012	CON:	89	JOB:	HIGHWAY
REVISIONS:		6388	89	001	US B2; ETC
2-18		DIST:		COUNTY:	
		PAR:	LAMAR; ETC	SHEET NO.:	11


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Warning sign and rumble strip sequence in opposite direction is same as below

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

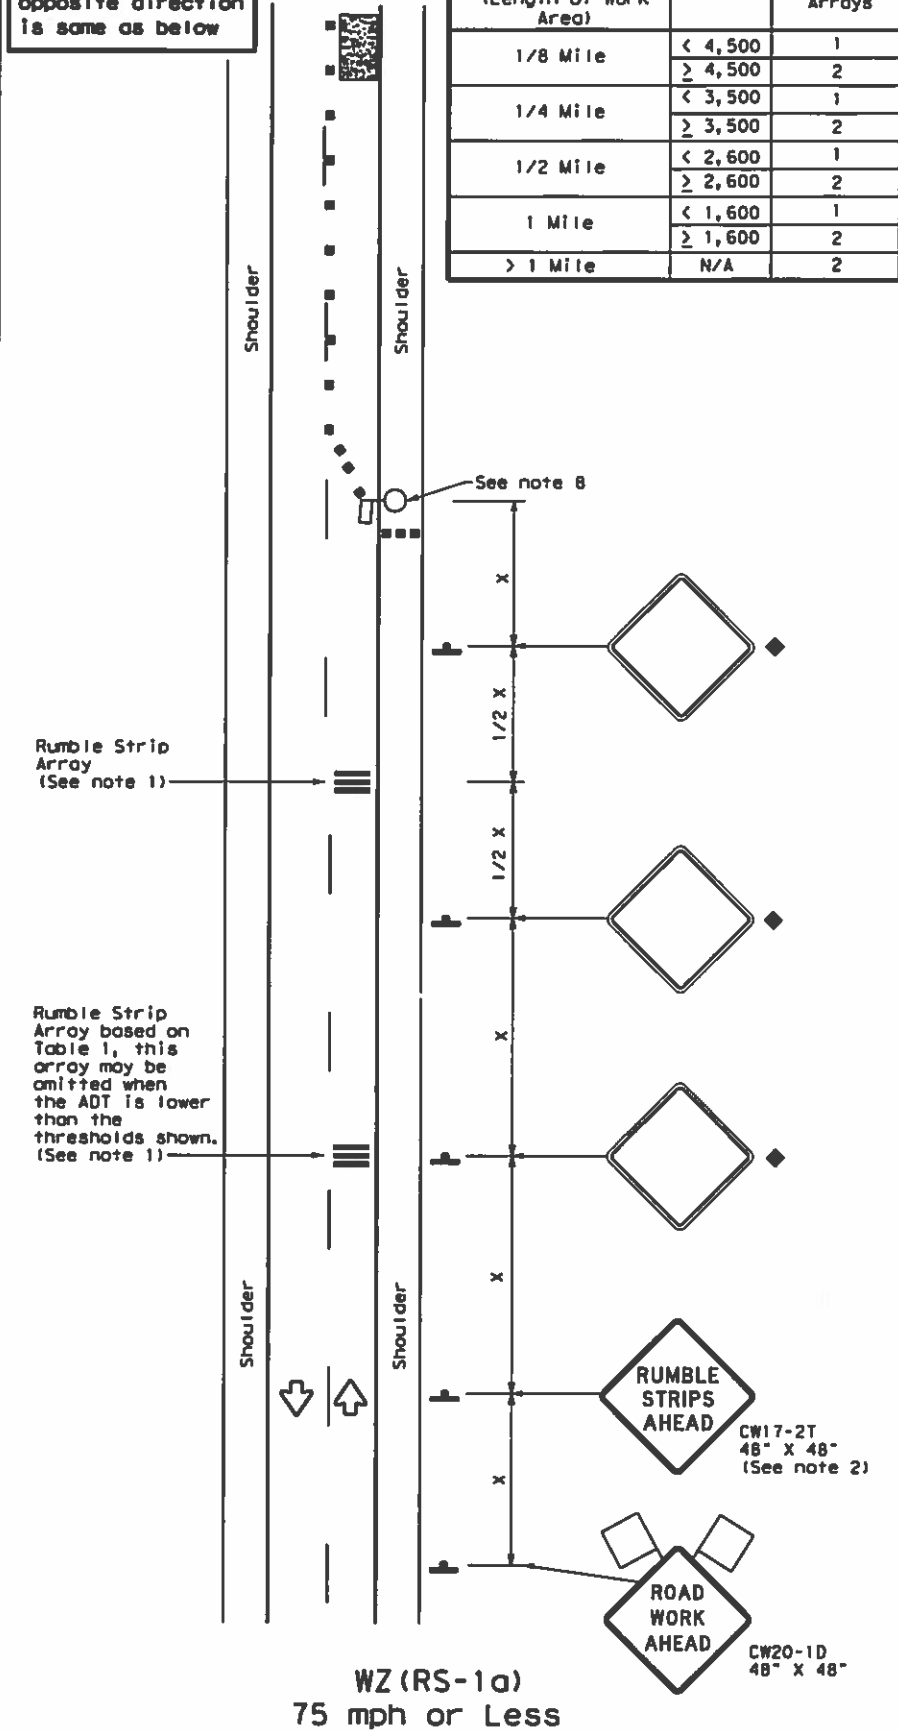

WZ(RS-1a)  
75 mph or Less  
**RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION**

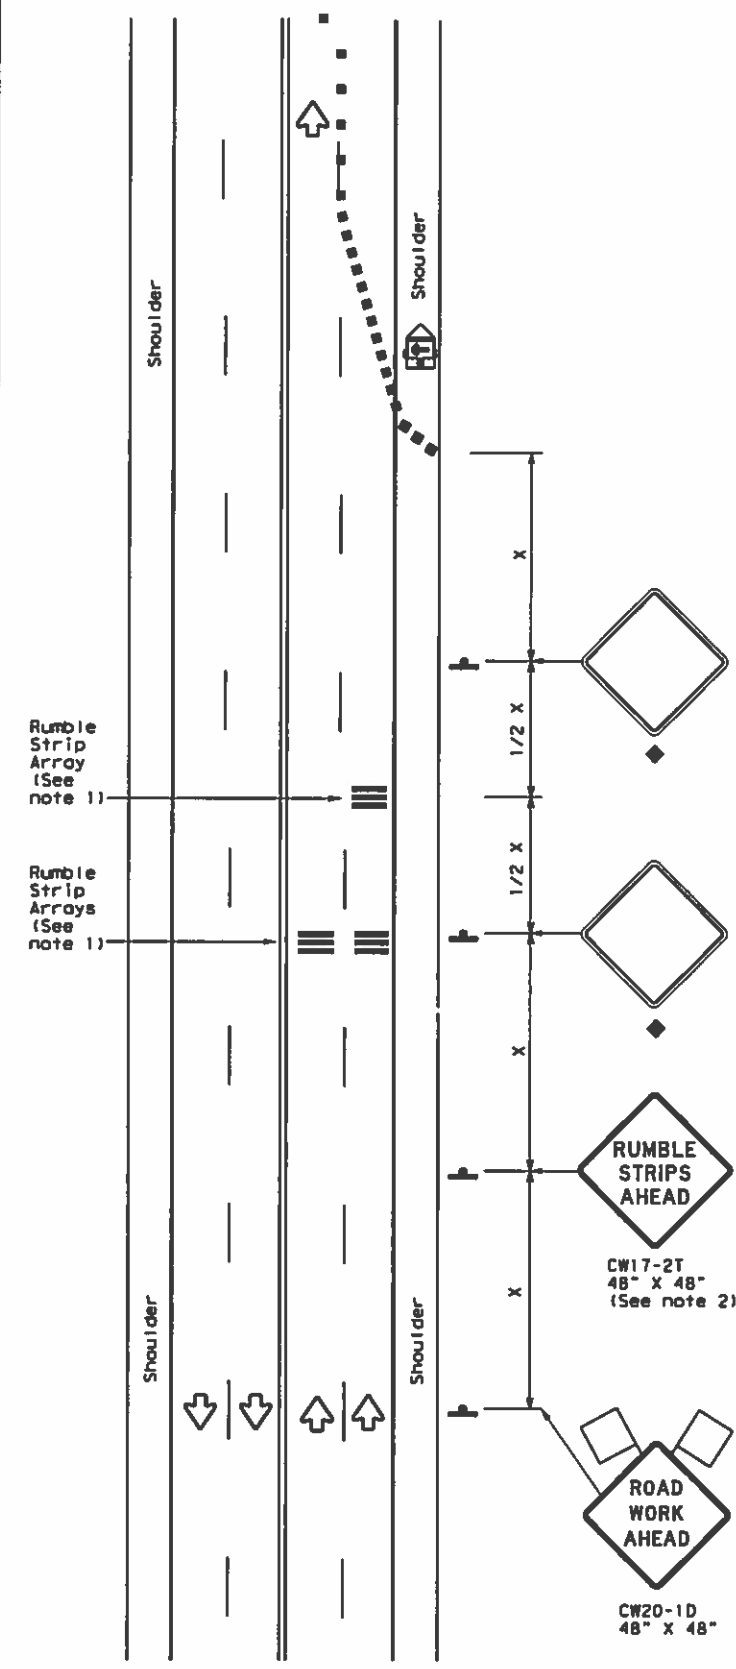

WZ(RS-1b)  
75 mph or Less  
**RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY**

**GENERAL NOTES**

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Removal of the Temporary Rumble Strips should be accomplished before removing the advance warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an AFAD or a portable traffic signal.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment.

Speed	Approximate distance between strips in an Array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
> 55 MPH	20'

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper (FT) W=Width of Offset (FT)  
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

Texas Department of Transportation  
 Traffic Operations Division Standard

## TEMPORARY RUMBLE STRIPS

### WZ(RS) - 16

FILE: wzn16.dgn	DATE: November 2012	CONTRACT: 6388B9	SECTION: 001	JOB: US 82; ETC
DATE: 2-14-16	REVISIONS:	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO: 12

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

**BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:**

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

**WORKER SAFETY NOTES:**


1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

**COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES**

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).


<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT <a href="http://www.txdot.gov">http://www.txdot.gov</a></p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12

 Texas Department of Transportation		Traffic Safety Division Standard	
<p><b>BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS</b></p> <p><b>BC (1) - 21</b></p>			
FILE:	bc-21.dgn	DN:	TxDOT
©:	TxDOT November 2002	COM:	SECT:
		JOB:	HIGHWAY
		DIST:	COUNTY
		PAR:	LAMAR,ETC
			SHEET NO.
			13


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**TYPICAL LOCATION OF CROSSROAD SIGNS**

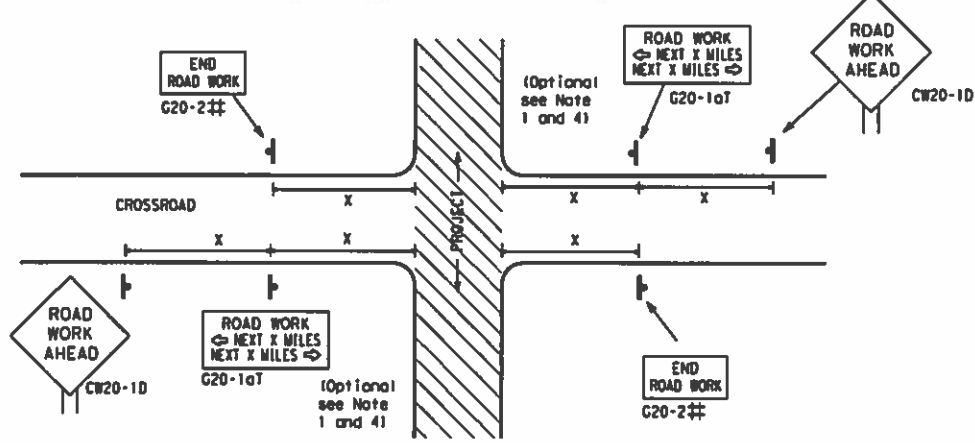

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
  - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
  - Based on an existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
  - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
  - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
  - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

**T-INTERSECTION**

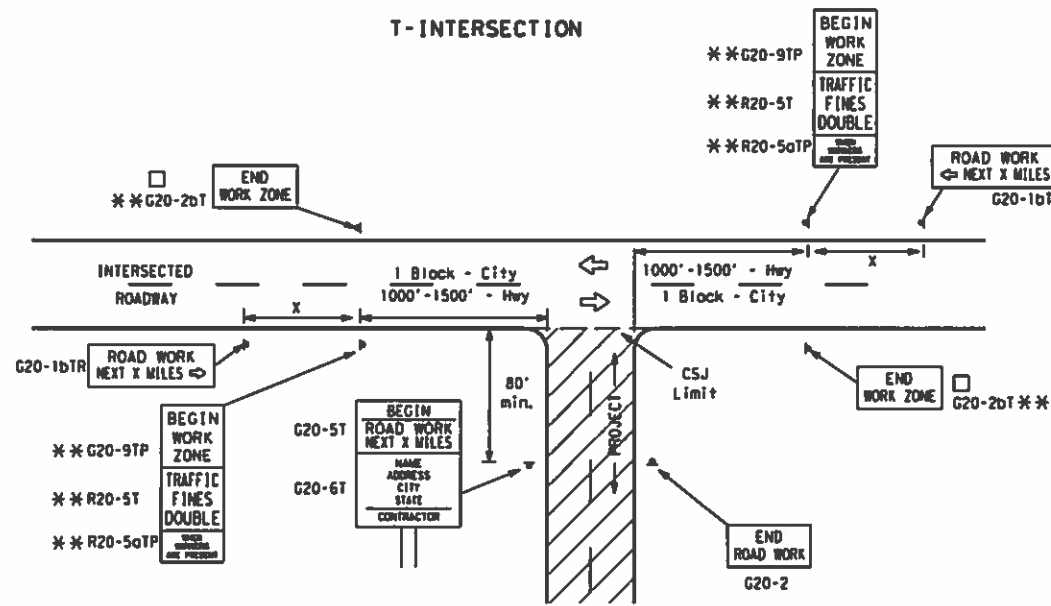

**CSJ LIMITS AT T-INTERSECTION**

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

**TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING<sup>1,5,6</sup>**

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Spacing "x" Feet (Approx.)
CW20 <sup>4</sup>			30	120
CW21	48" x 48"	48" x 48"	35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 <sup>2</sup>
			60	600 <sup>2</sup>
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	65	700 <sup>2</sup>
			70	800 <sup>2</sup>
			75	900 <sup>2</sup>
			80	1000 <sup>2</sup>
			*	* <sup>3</sup>


\* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

△ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

**GENERAL NOTES**


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

**WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS**

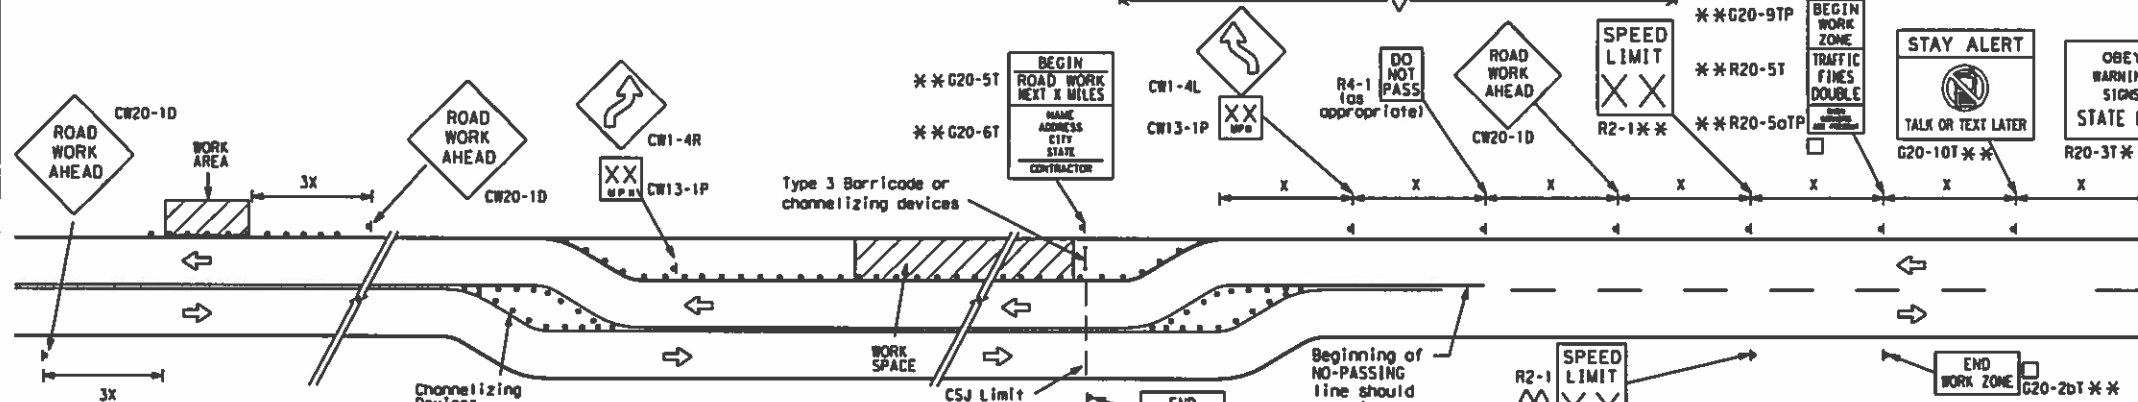

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS**

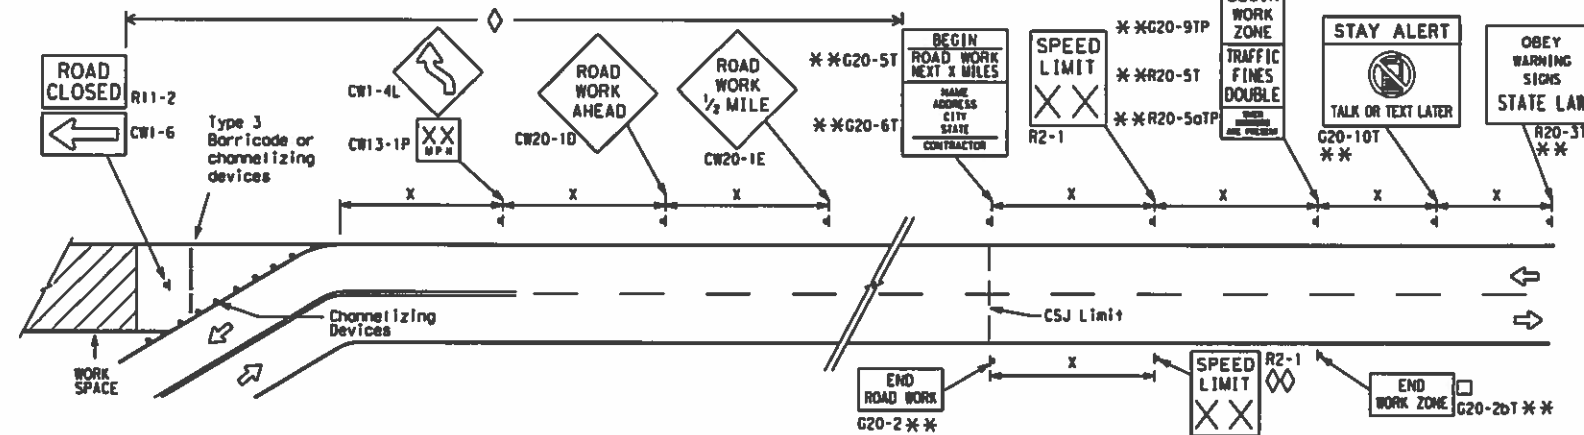

**NOTES**

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
  - \*\* CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
  - ◇ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
  - ◇◇ Contractor will install a regulatory speed limit sign at the end of the work zone.

**LEGEND**

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
—	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



**BARRICADE AND CONSTRUCTION PROJECT LIMIT**

BC(2)-21

FILE#	bc-21.dgn	DATE	TxDOT	BY	TxDOT	DATE	TxDOT	BY	TxDOT
REVISIONS		DATE	BY	DESCRIPTION		DATE	BY	DESCRIPTION	
		9-07	8-14			7-13	5-21		
				DIST	COUNTY			SHEET NO.	
				PAR	LAMAR,ETC			14	


DATE: FILE:



# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

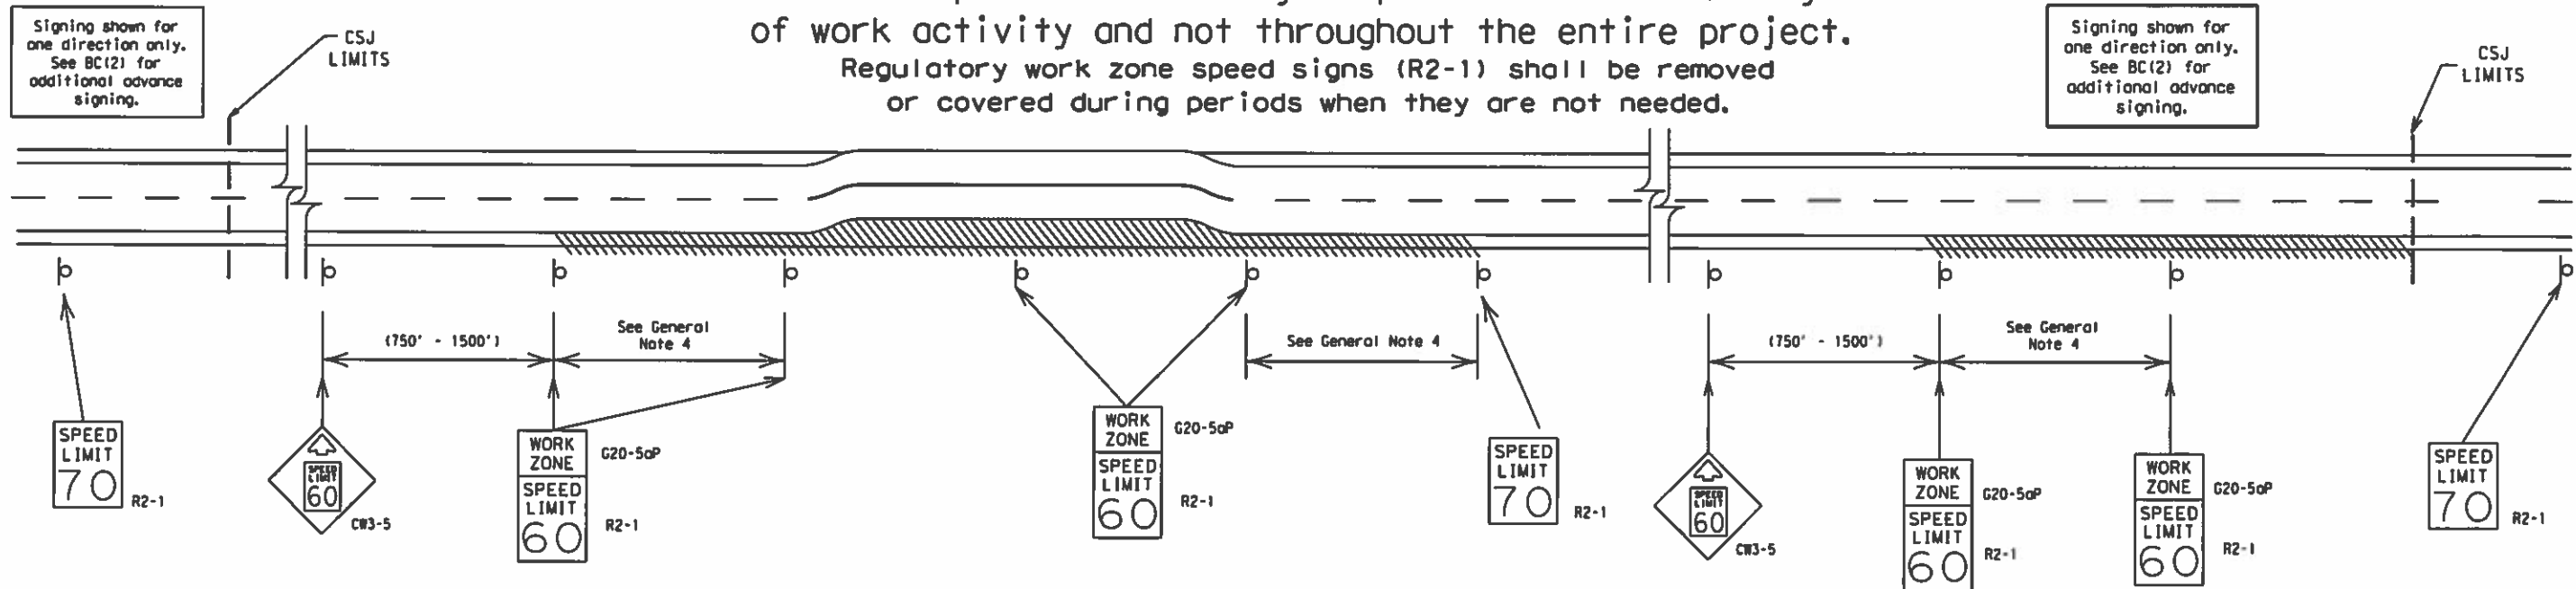

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

## GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
  - 40 mph and greater 0.2 to 2 miles
  - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
  - Law enforcement.
  - Flagger stationed next to sign.
  - Portable changeable message sign (PCMS).
  - Low-power (drone) radar transmitter.
  - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

SHEET 3 OF 12

		Traffic Safety Division Standard	
<b>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</b>			
<b>BC (3) - 21</b>			
FILE#	bc-21.dgn	DN# TxDOT	CR# TxDOT
© TxDOT	November 2002	COM#	SEC#
REVISIONS		JOB	HIGHWAY
9-07	8-14	6388	89
7-13	5-21	001	US 82.ETC
DIST	COUNTY	SHEET NO.	
PAR	LAMAR.ETC	15	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS**

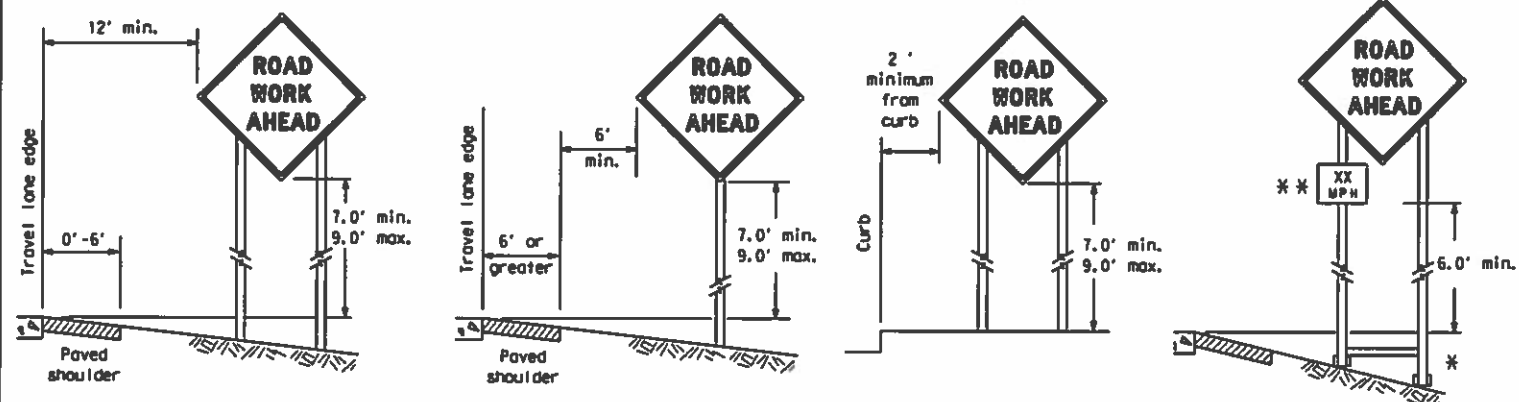

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\*\* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

**ATTACHMENT FOR SIGN SUPPORTS**

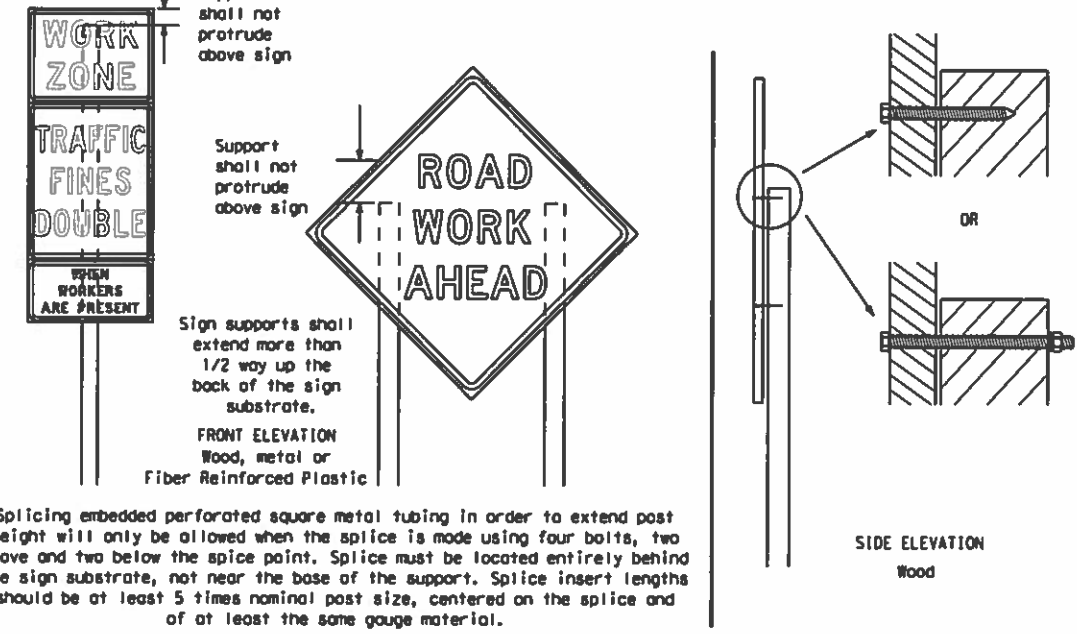

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

**GENERAL NOTES FOR WORK ZONE SIGNS**

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedure are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

**DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)**

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - Long-term stationary - work that occupies a location more than 3 days.
  - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - Short, duration - work that occupies a location up to 1 hour.
  - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

**SIGN MOUNTING HEIGHT**

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

**SIZE OF SIGNS**

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

**SIGN SUBSTRATES**

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

**REFLECTIVE SHEETING**

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

**SIGN LETTERS**

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

**REMOVING OR COVERING**

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

**SIGN SUPPORT WEIGHTS**


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

**FLAGS ON SIGNS**

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

**STOP/SLOW PADDLES**

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflectorized when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

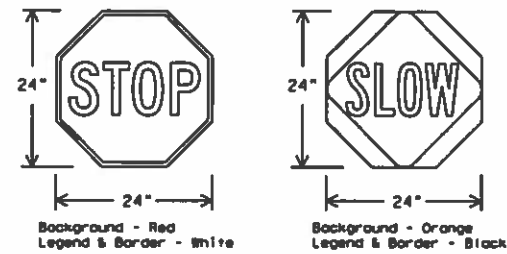

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

**CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS**

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.




**BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES**

**BC (4) - 21**

FILE#	bc-21.dgn	DWG	TxDOT	EXT	TxDOT	DRW	TxDOT	CHK	TxDOT
© TxDOT	November 2002	CONF	SECRET	JOB		HIGHWAY			
REVISIONS		6388	89	001		US 82,ETC			
9-07	8-14	DIST		COUNTY		SHEET NO.			
7-13	5-21	PAR		LAMAR,ETC		16			


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

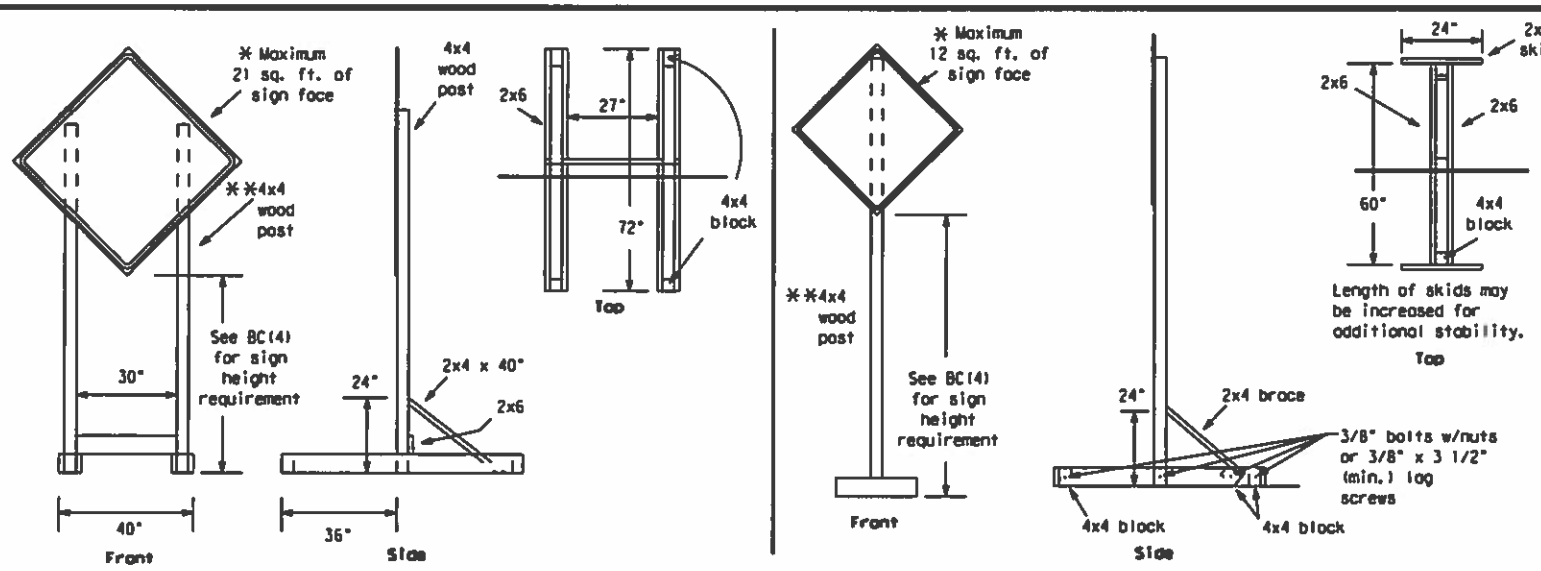


### SKID MOUNTED WOOD SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

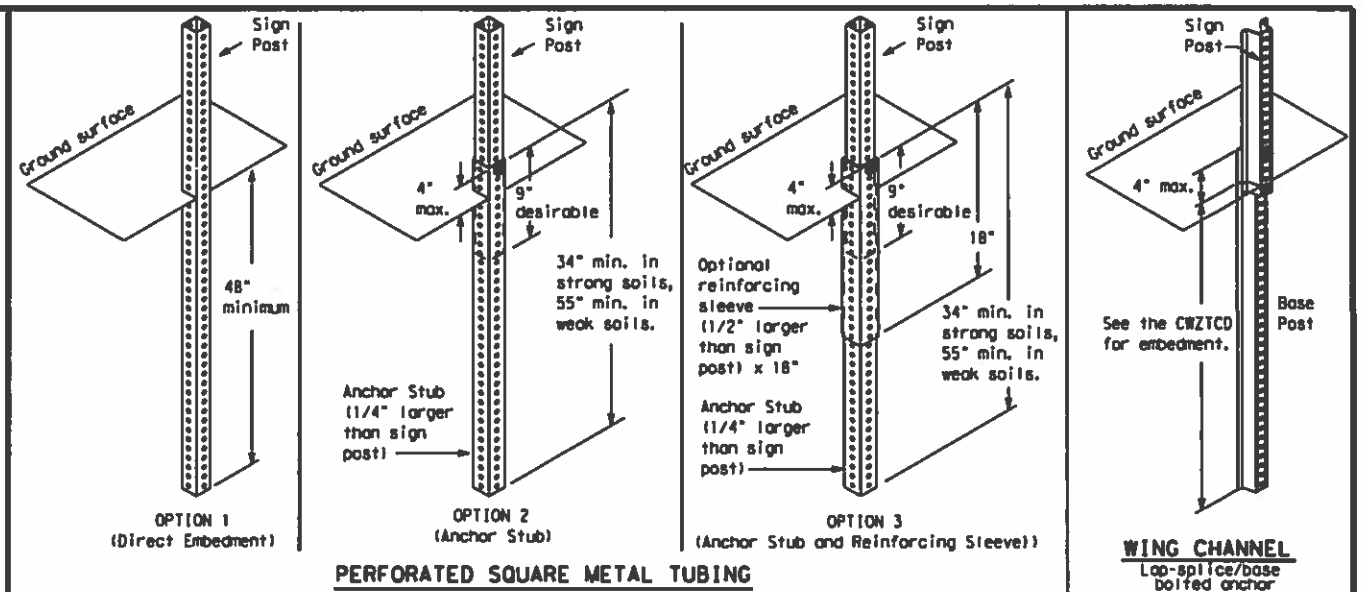



### GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

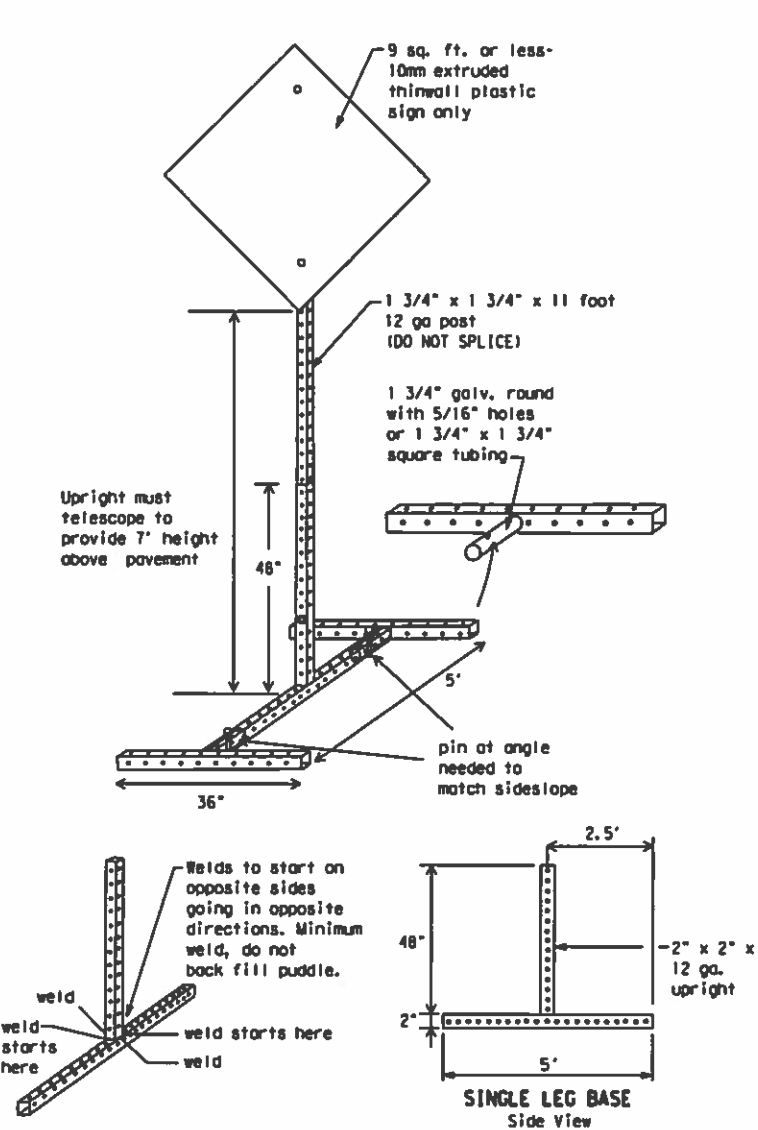

### SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

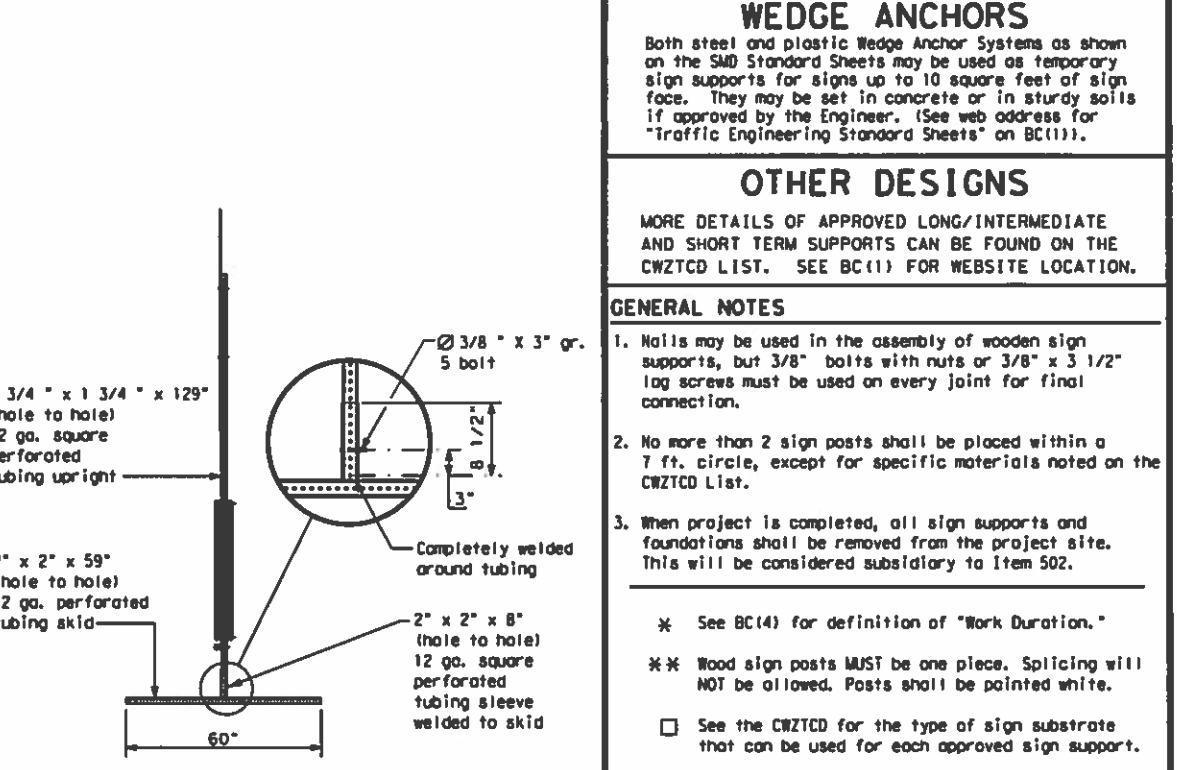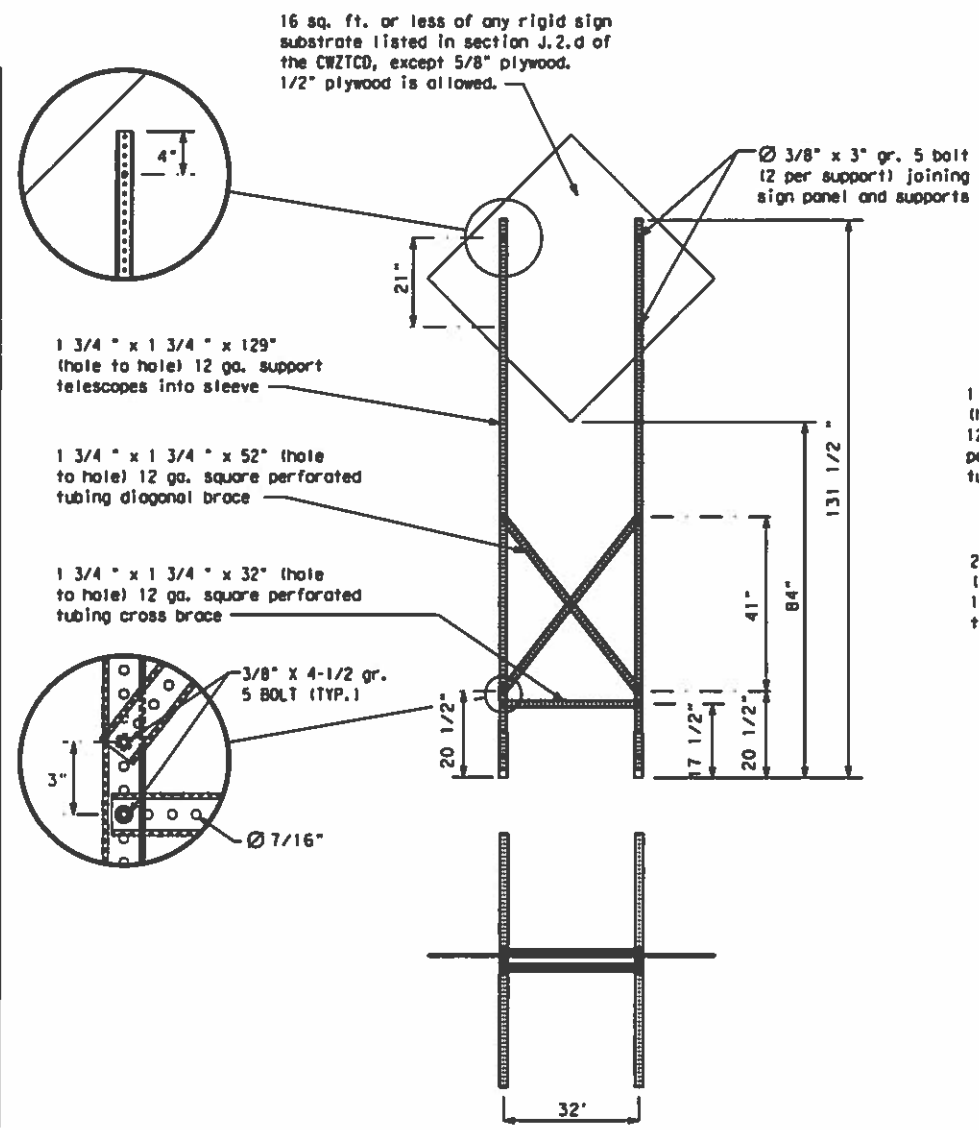

### WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

### OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

### GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" log screws must be used on every joint for final connection.
  2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
  3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- \* See BC(4) for definition of "Work Duration."  
 \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.  
 See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



## BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE:	bc-21.dgn	DATE:	TxDOT	REV:	TxDOT	BY:	TxDOT	CHK:	TxDOT
© TxDOT	November 2002	CONT:	SECT:	JOB:	HIGHWAY				
REVISIONS		6388	89	001	US 82.ETC				
9-07	8-14	DIST:	COUNTY:		SHEET NO.				
7-13	5-21	PAR:	LAMAR,ETC		17				

DATE: FILE:

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

# RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

## PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MINR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FRWY BLKD	Thursday	THURS
Friday	FRI	To Downtown Traffic	TO DWTN TRAF
Hazardous Driving	HAZ DRIVING	Travelers	TRVLRS
Hazardous Material	HAZMAT	Tuesday	TUES
High-Occupancy	HOV	Time Minutes	TIME MIN
Vehicle Highway	HWY	Upper Level	UPR LEVEL
Hour (s)	HR, HRS	Vehicles (s)	VEH, VENS
Information	INFO	Warning	WARN
It is	ITS	Wednesday	WED
Junction	JCT	Weight Limit	WT LIMIT
Left	LFT	West	W
Left Lane	LFT LN	Westbound	(route) W
Lane Closed	LN CLOSED	West Payment	WET PVMT
Lower Level	LWR LEVEL	Will Not	WONT
Maintenance	MAINT		

Roadway designation = IH-number, US-number, SH-number, FM-number

## Phase 1: Condition Lists

### Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

### Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT
ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

## Phase 2: Possible Component Lists

### Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

### Location List

FORM X LINES RIGHT
USE XXXX RD EXIT
USE EXIT I-XX NORTH
USE I-XX E TO I-XX N
WATCH FOR TRUCKS
EXPECT DELAYS
PREPARE TO STOP
END SHOULDER USE
WATCH FOR WORKERS

### Warning List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

### \*\* Advance Notice List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

### \*\* Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

\*\* See Application Guidelines Note 6.

## APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

## WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.


## FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.


<h3>BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)</h3> <h2>BC (6) - 21</h2>			
FILE#	DC-21.dgn	DATE	11/07/02
REV#	0388	BY	BP
DATE	9-07	REV#	8-14
DATE	7-13	REV#	5-21
CONTRACT	6388	SECTION	BP
JOB	001	COUNTY	LAMAR, ETC
HIGHWAY	US 82; ETC	SHEET NO.	18

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8500. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

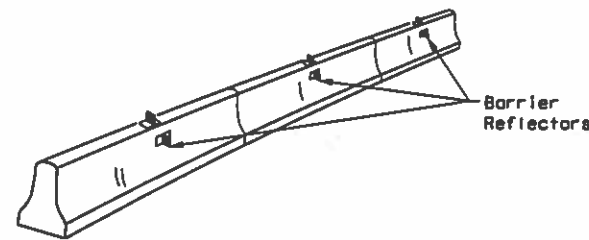

**CONCRETE TRAFFIC BARRIER (CTB)**

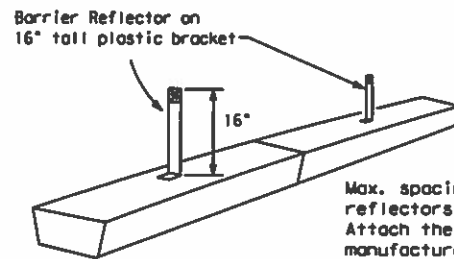


**LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES**

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

**LOW PROFILE CONCRETE BARRIER (LPCB)**

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

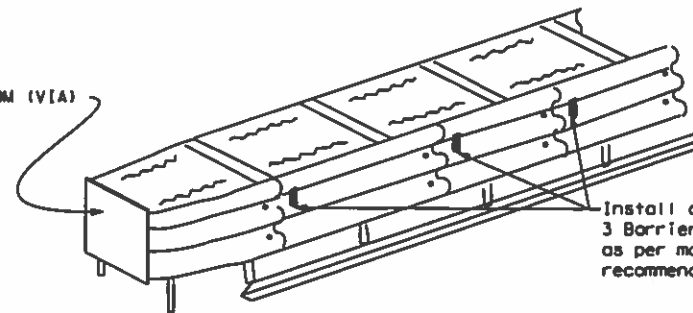

**DELINEATION OF END TREATMENTS**

**END TREATMENTS FOR CTB'S USED IN WORK ZONES**

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CRZTCD List for approved end treatments and manufacturers.

**BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS**

**WARNING LIGHTS**


- Warning lights shall meet the requirements of the TMTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B<sub>PL</sub> or C<sub>PL</sub> Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

**WARNING LIGHTS MOUNTED ON PLASTIC DRUMS**


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

**WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS**

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CRZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

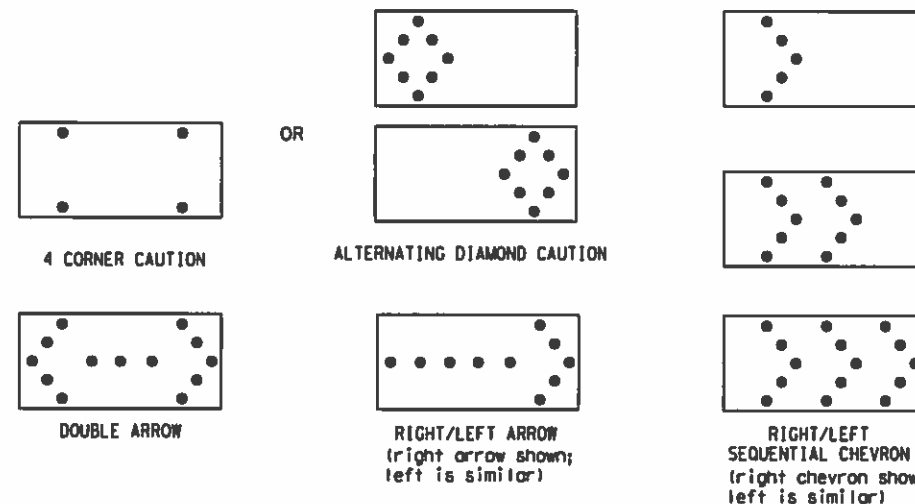

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

**ATTENTION**  
Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

**FLASHING ARROW BOARDS**

SHEET 7 OF 12

**TRUCK-MOUNTED ATTENUATORS**

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CRZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CRZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



**BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR**

**BC (7) - 21**

FILE#	bc-21.dgn	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6388	89	001	US 82.ETC				
9-07	8-14	DEST	COUNTY		SHEET NO.				
7-13	5-21	PAR	LAMAR,ETC		19				

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**GENERAL NOTES**

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

**GENERAL DESIGN REQUIREMENTS**

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

**RETROREFLECTIVE SHEETING**

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

**BALLAST**

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

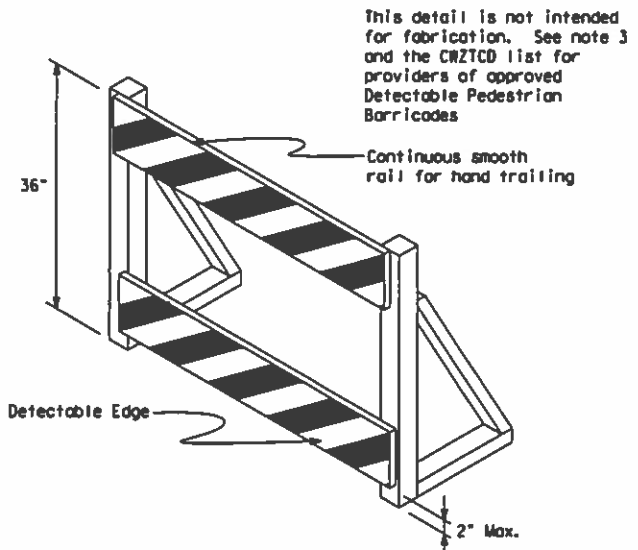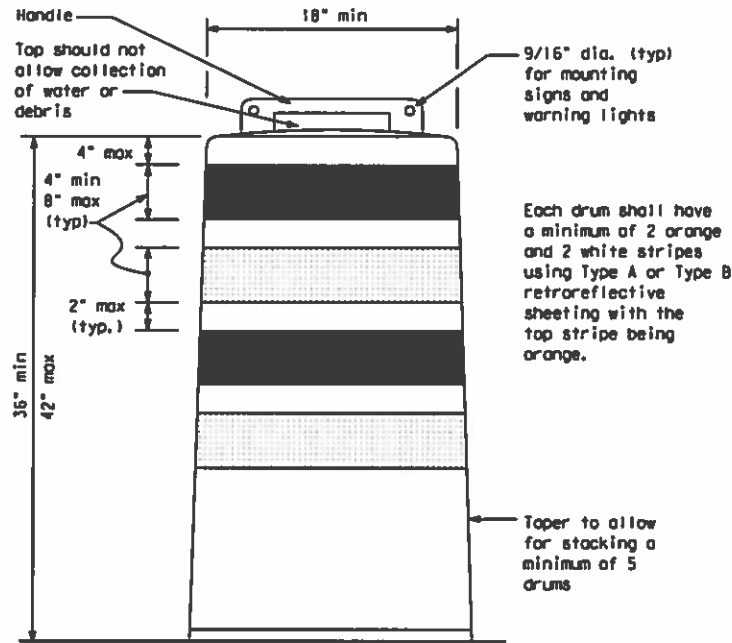


**DETECTABLE PEDESTRIAN BARRICADES**

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign  
(Maximum Sign Dimension)  
Chevron CW1-8, Opposing Traffic Lane  
Divider, Driveway sign D70a, Keep Right  
R4 series or other signs as approved  
by Engineer



12" x 24"  
Vertical Panel  
mount with diagonals  
sloping down towards  
travel way

Plywood, Aluminum or Metal sign  
substrates shall NOT be used on  
plastic drums

**SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS**


- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B<sub>FL</sub> or Type C<sub>FL</sub> Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than an every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

<b>BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES</b>			
<b>BC (8) - 21</b>			
FILE#	BC-21.dgn	DRW	TxDOT
DESIGNER	TXDOT	CHECKED	TXDOT
DATE	NOVEMBER 2002	CONTRACT	SECTION
NOVEMBER 2002	NOVEMBER 2002	6388	89
4-03	8-14	001	US 82.ETC
9-07	5-21	DIST	COUNTY
7-13		PAR	LAMAR.ETC
			SHEET NO. 20

DATE: FILE:




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

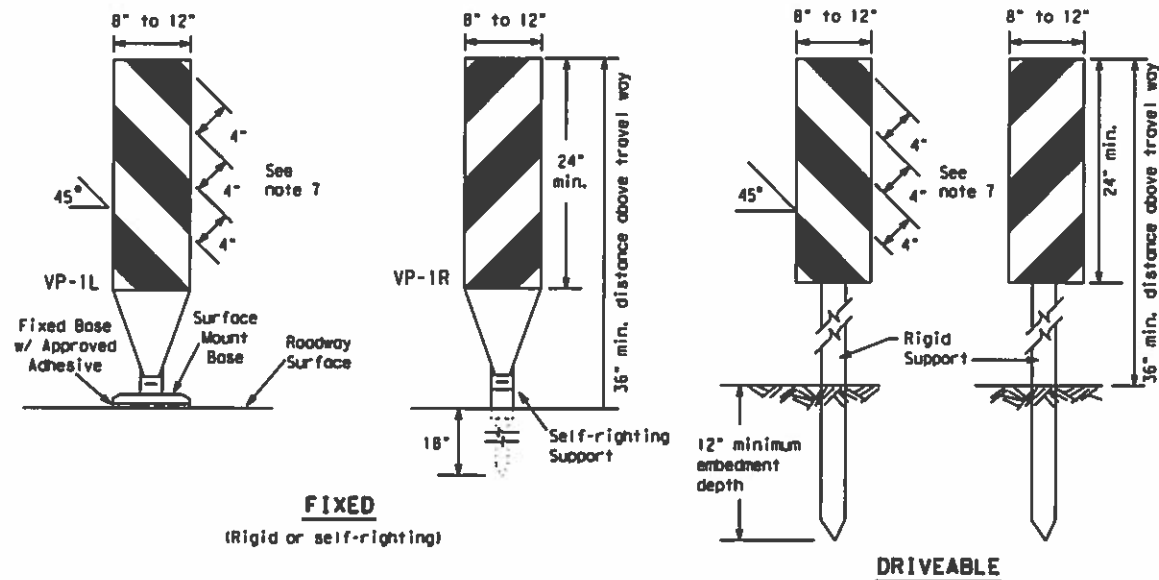

**FIXED**  
(Rigid or self-righting)


**DRIVEABLE**

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

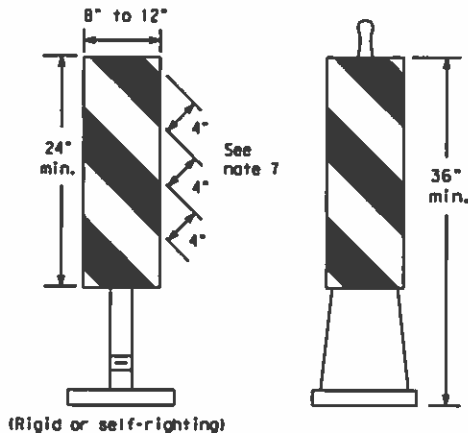


**PORTABLE**

**VERTICAL PANELS (VPs)**

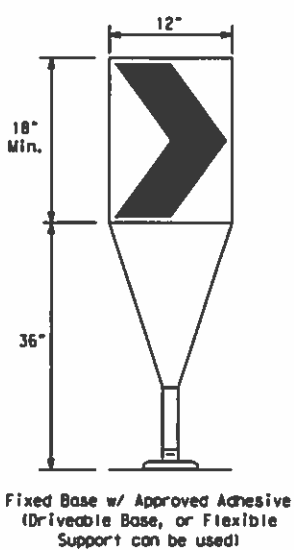

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B<sub>2</sub> or Type C<sub>2</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

**CHEVRONS**



**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long cones and the top of the unit shall not be less than 32 inches in height.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

**GENERAL NOTES**

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

\*\*Taper lengths have been rounded off.  
L=Length of Taper (FT.) W=Width of Offset (FT.)  
S=Posted Speed (MPH)

**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

SHEET 9 OF 12




**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

BC (9) - 21

FILE#	bc-21.dgn	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT
REVISED	NOVEMBER 2002	DATE	NOVEMBER 2002	DATE	NOVEMBER 2002	DATE	NOVEMBER 2002	DATE	NOVEMBER 2002
NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002	NOVEMBER 2002
9-07	8-14	9-07	8-14	9-07	8-14	9-07	8-14	9-07	8-14
7-13	5-21	7-13	5-21	7-13	5-21	7-13	5-21	7-13	5-21

DATE: FILE:

**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**

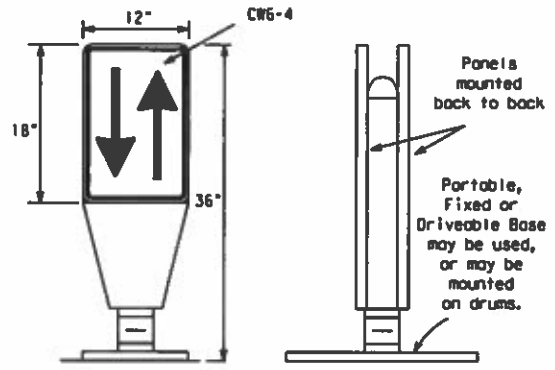

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B<sub>2</sub> or Type C<sub>2</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPE 3 BARRICADES**

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




**TYPICAL STRIPING DETAIL FOR BARRICADE RAIL**

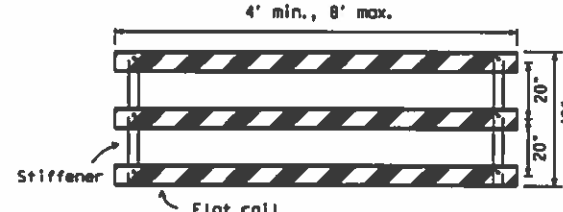

Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.


**TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES**

Each roadway of a divided highway shall be barricaded in the same manner.

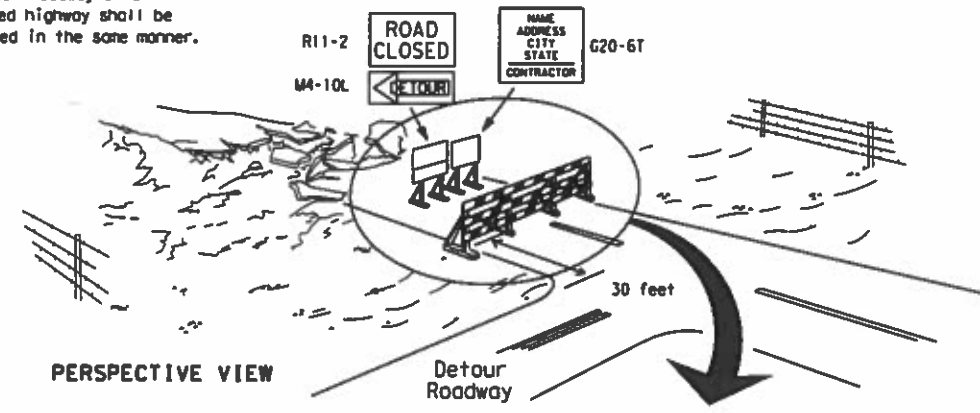

PERSPECTIVE VIEW


The three rolls on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

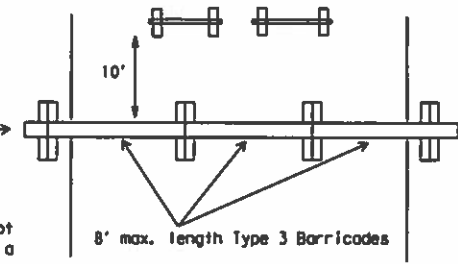

PLAN VIEW


1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

**TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION**

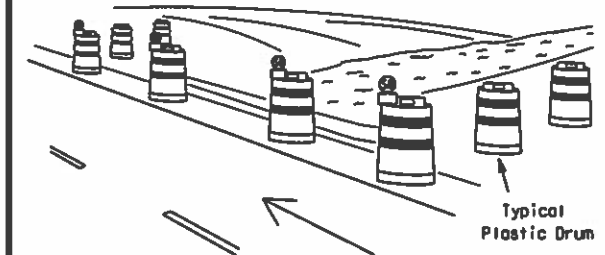

PERSPECTIVE VIEW

These drums are not required on one-way roadway

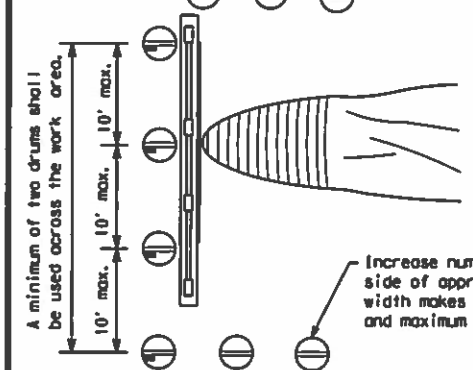


PLAN VIEW

**CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS**

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

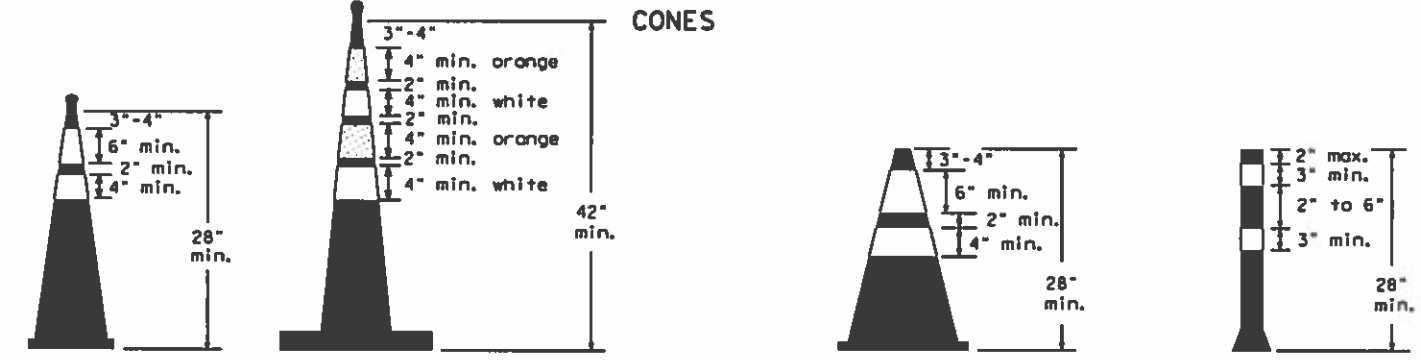


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.  
42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

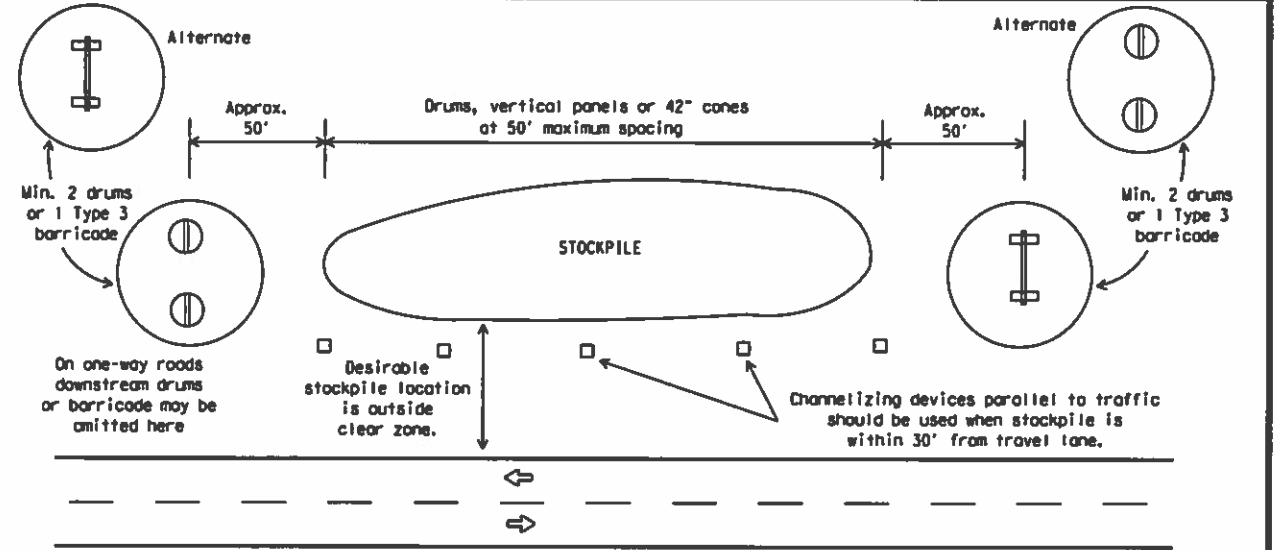

**TRAFFIC CONTROL FOR MATERIAL STOCKPILES**

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC(10)-21**

FILE# bc-21.dgn	DATE TxDOT	EXT TxDOT	REV TxDOT	CHK TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82,ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	PAR	LAMAR,ETC	22	

DATE: FILE#

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (fall back) shall meet the requirements of DMS-8240.


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where floggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-pointing of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

## Temporary Flexible-Reflective Roadway Marker Tabs

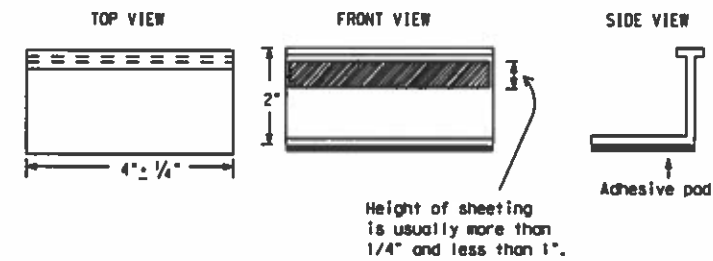

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

### RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
 YELLOW - (two amber reflective surfaces with yellow body).  
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(11).

SHEET 11 OF 12





		Traffic Safety Division Standard	
<b>BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS</b>			
<b>BC(11)-21</b>			
FILE: Dc-21.dgn	DR: TxDOT	CR: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB
REVISIONS	6388	89	001
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.
1-02 7-13	PAR	LAMAR:ETC	23
11-02 8-14			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

### PAVEMENT MARKING PATTERNS

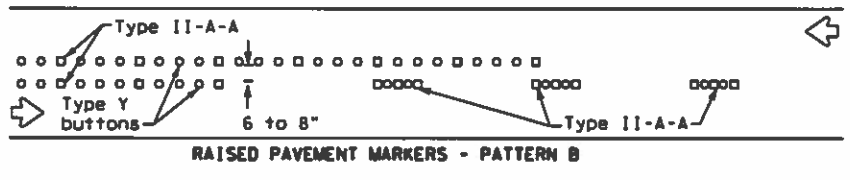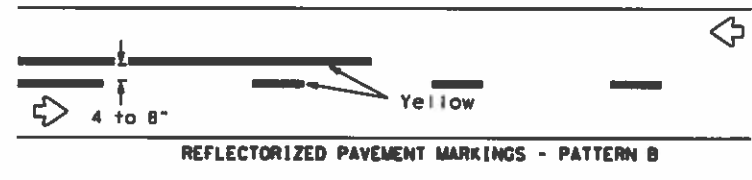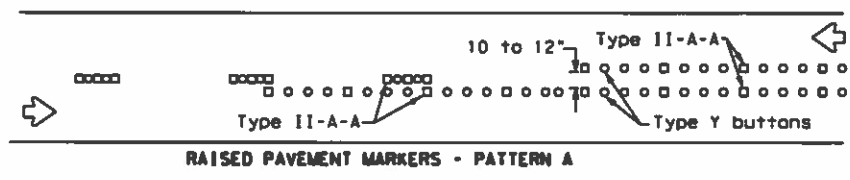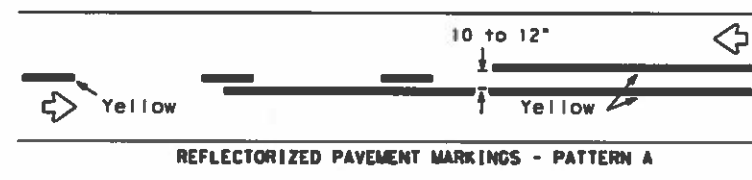



Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

### CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

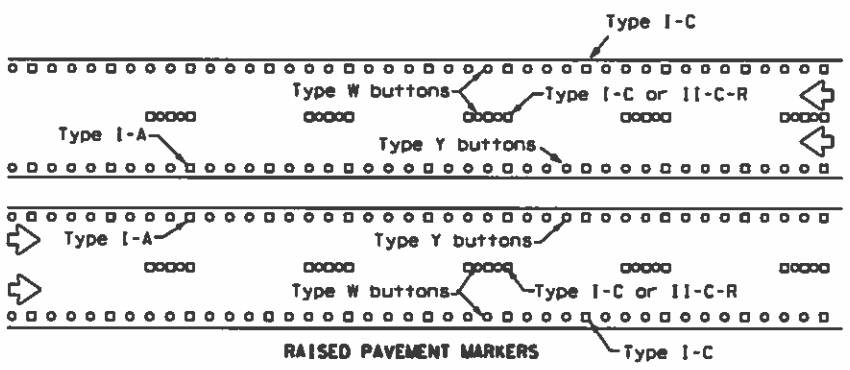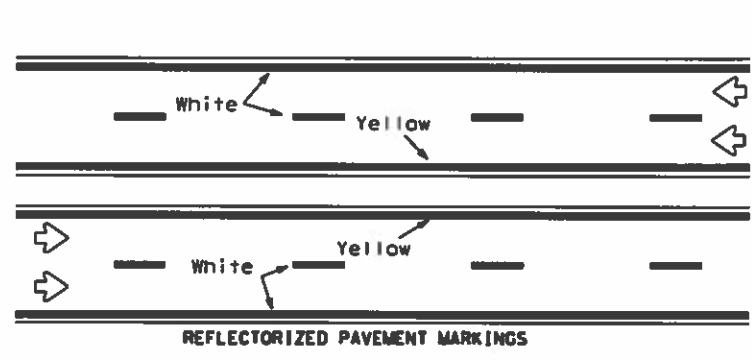



Prefabricated markings may be substituted for reflectorized pavement markings.

### EDGE & LANE LINES FOR DIVIDED HIGHWAY

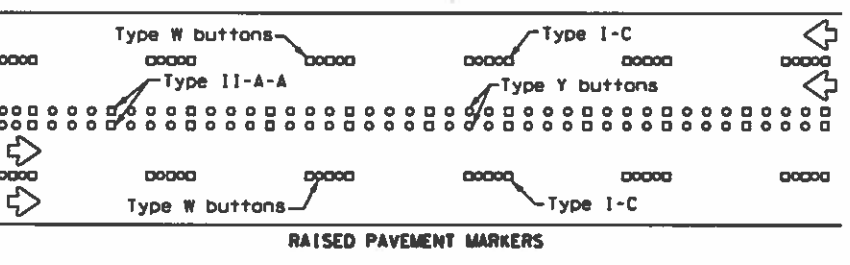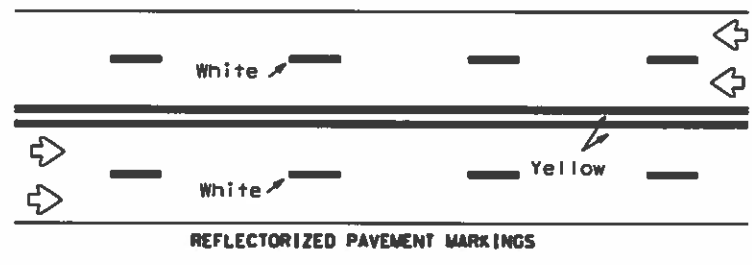

Prefabricated markings may be substituted for reflectorized pavement markings.





### LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

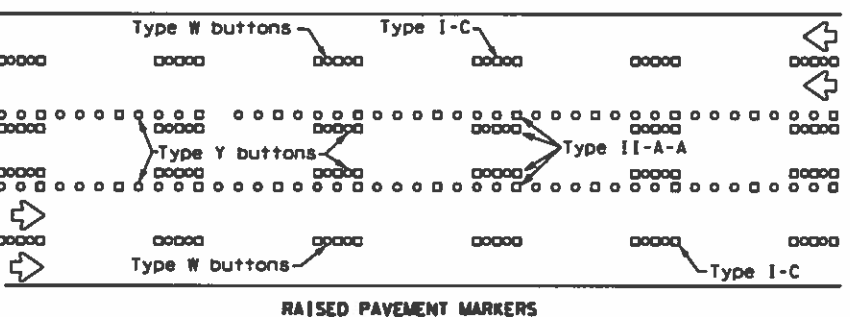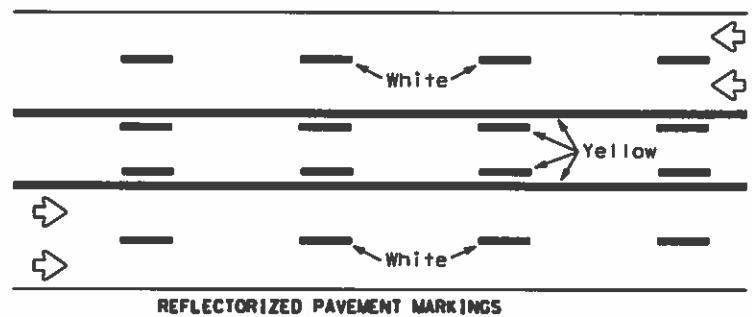

Prefabricated markings may be substituted for reflectorized pavement markings.

### TWO-WAY LEFT TURN LANE

### STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

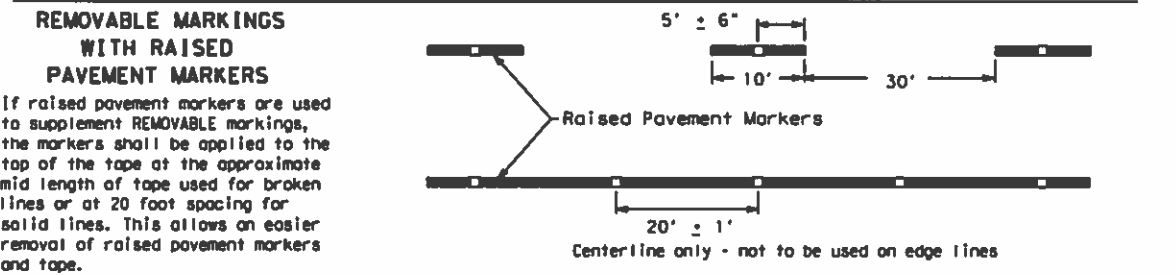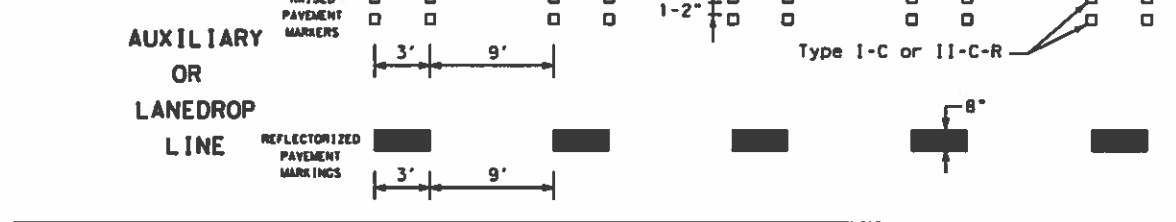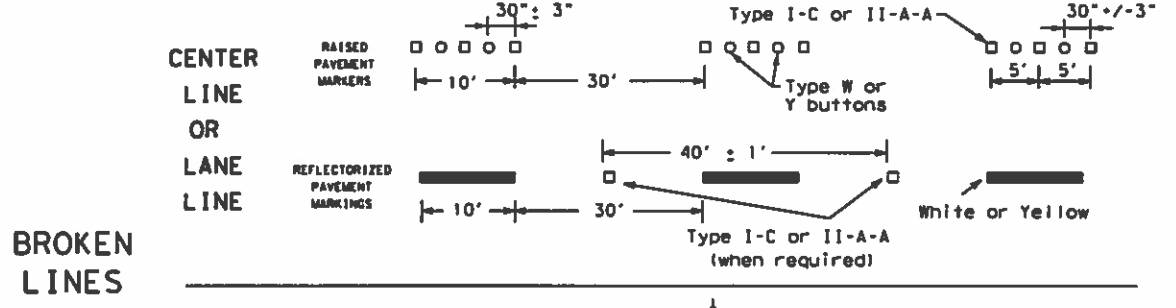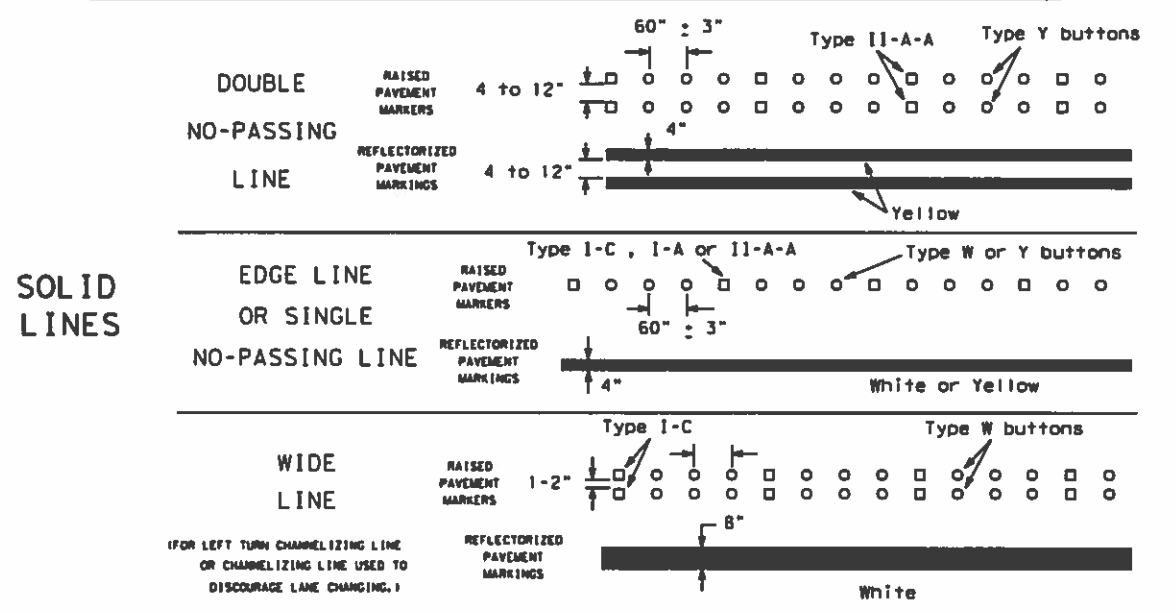

Centerline only - not to be used on edge lines

SHEET 12 OF 12

Texas Department of Transportation Traffic Safety Division Standard

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

### BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS


BC (12) - 21

FILE: bc-21.dgn	DATE: February 1998	CON: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82, ETC
REVISIONS:		DIST:	COUNTY:	SHEET NO.:	
1-97 9-07 5-21		PAR:	LAMAR, ETC	24	
2-98 7-13					
11-02 8-14					


DATE: FILE:



DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

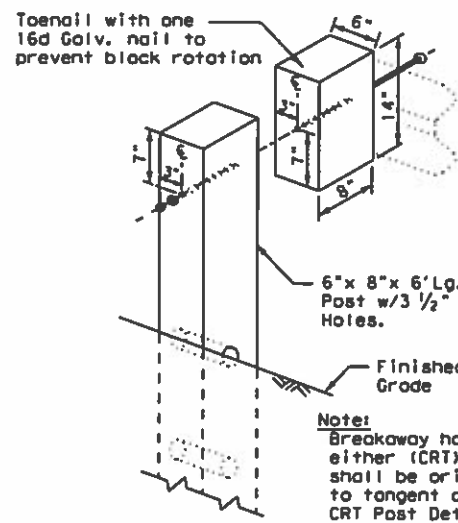


**WOOD BLOCK TO RECTANGULAR WOOD (CRT) POST**  
Showing the required 3 1/2" Dia. holes.

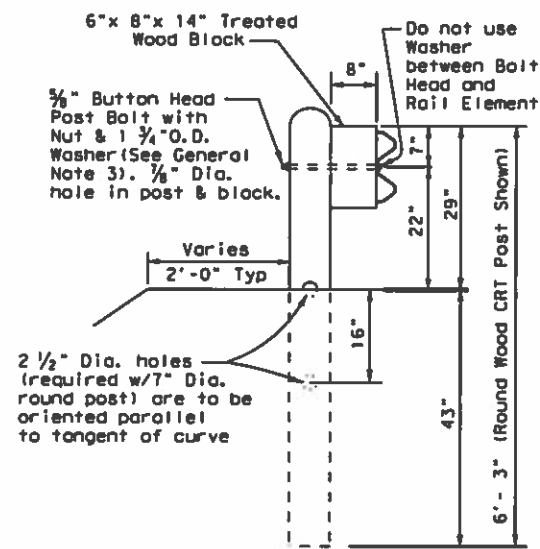


**(CRT) POST DETAIL CONTROLLED RELEASE TERMINAL POST**


Two or more wood CRT post(s) are required at any radius installation located at intersecting roadways or driveways.

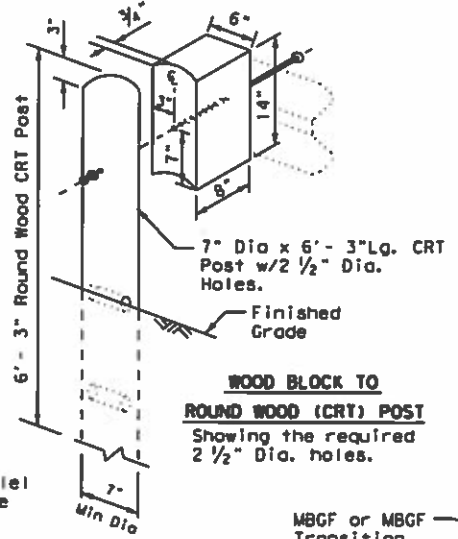

**WOOD BLOCK TO ROUND WOOD (CRT) POST**  
Showing the required 2 1/2" Dia. holes.

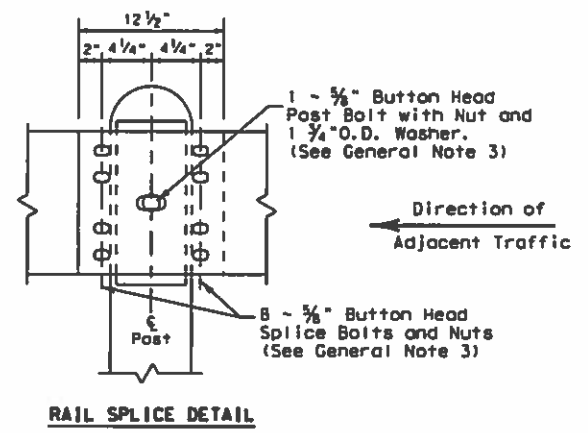

**RAIL SPLICE DETAIL**

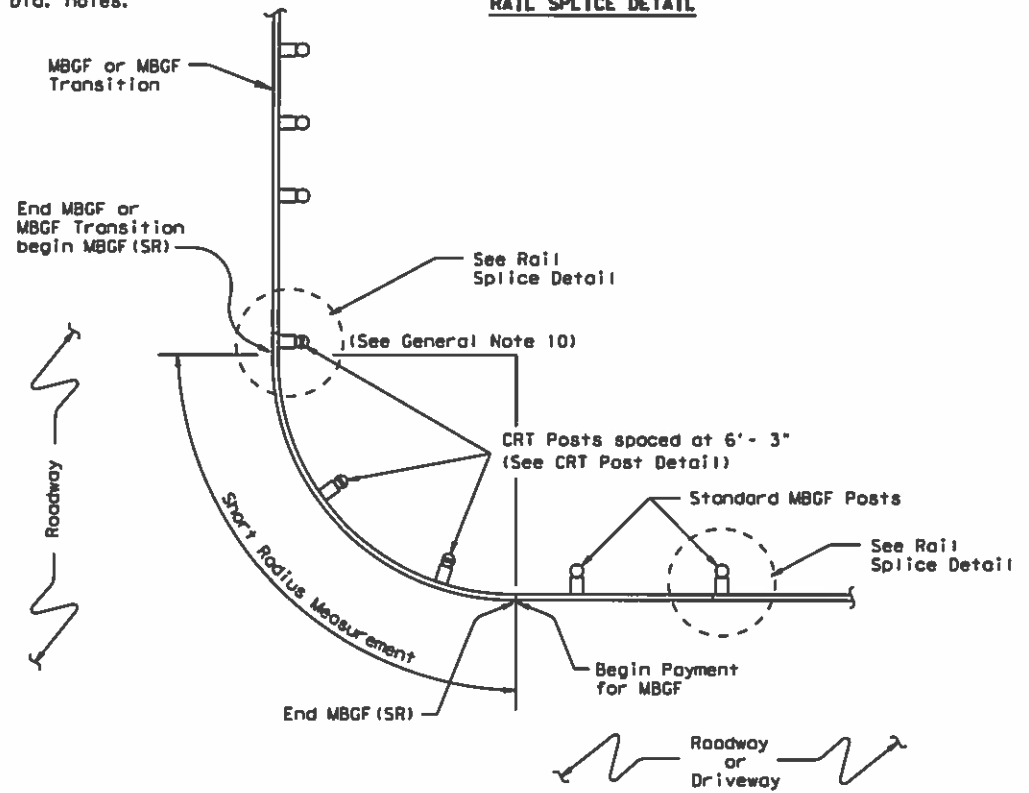

**PLAN VIEW SHOWING TYPICAL RADIUS**


The required radius is shown elsewhere on the plans.

**GENERAL NOTES**

- The type of (CRT) post (round wood post, or rectangular wood post) will be shown elsewhere in the plans. The exact position of MBGF shall be shown elsewhere in the plans or as directed by the Engineer.
- Steel posts are not permitted at CRT post positions.
- Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans. The Contractor may furnish rail elements of 12 1/2 or 25 foot nominal lengths.
- Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and Type A (1 3/4" O.D.) washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 5/8" x 1 1/4" (or 2" long at triple rail splices) with a 5/8" double recessed nut (ASTM A563).
- Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item.
- Crown shall be widened to accommodate the Metal Beam Guard Fence.
- The lateral approach to the guard fence, shall have a slope rate of not more than 1V:10H.
- Unless otherwise shown in the plans, guard fence placed in the vicinity of curbs shall be positioned so that the face of curb is located directly below or behind the face of the block. Rail placed over curbs shall be installed so that the post bolt is located approximately 21 inches above the gutter pan or roadway surface.
- If solid rock is encountered within 0 to 18" of the finished grade, drill a 22" dia. hole, 24" into the rock, or drill two 12" dia. front to back overlapping holes, 24" into the rock. If solid rock is encountered below 18", drill a 12" dia. hole, 12" into the rock or to the standard embedment depth, whichever is less. Any excess post length, after meeting these depths, may be field cut to ensure proper guardrail mounting height. Backfill with a cohesionless material.
- Guardrail posts shall not be set in concrete, of any depth.
- Special rail fabrication will be required at installations having a curvature of less than 150 ft. radius. The required radius shall be shown on the plans.
- The terminal anchor section (TAS) post shall be set in Class A concrete (unless otherwise shown in the plans) in accordance with Item 421, "Hydraulic Cement Concrete." Concrete shall be subsidiary to the bid item requiring construction of the terminal anchor section (TAS). Terminal anchor post to be galvanized in accordance with Item 445, "Galvanizing."
- Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.

**"DRIVEWAY" TERMINAL ANCHOR SECTION**

Only for use within driveway locations, where a standard (TAS) Terminal Anchor Section can not be installed.

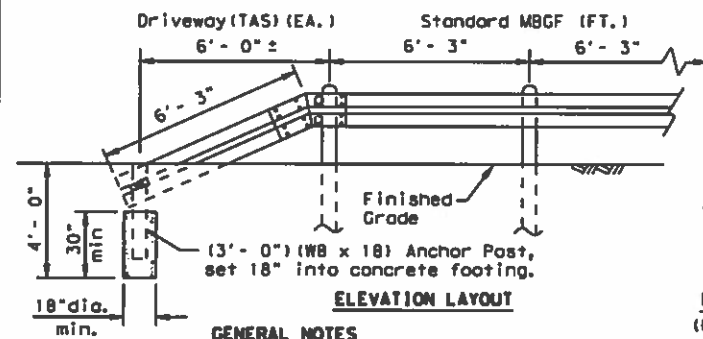


**ELEVATION LAYOUT**



**GENERAL NOTES**

- The "Driveway" Terminal Anchor Section is ONLY to be used within driveway locations, where the ROW is limited and a standard 25 ft. (TAS) Terminal Anchor Section, is too long.
- Terminal anchor post shall be set in Class A concrete.
- All steel shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."

**PLATE WASHER FOR METAL BEAM**  
(Galvanized after fabrication)



**ANCHOR POST**

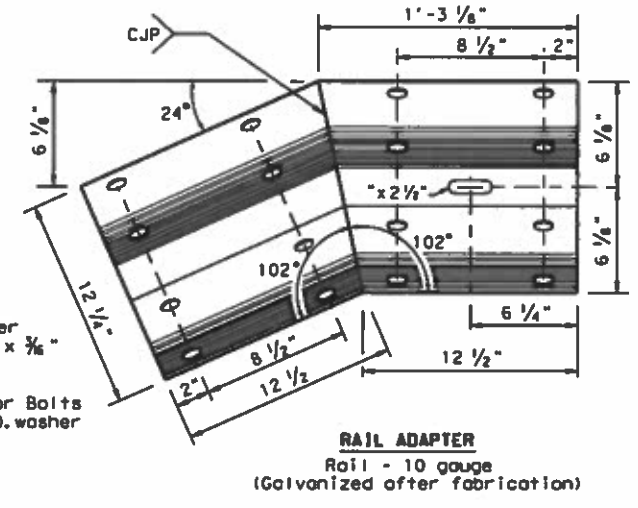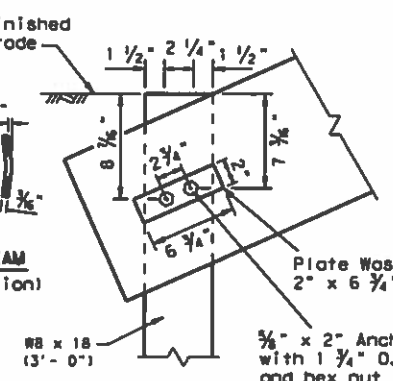

**RAIL ADAPTER**  
Rail - 10 gauge  
(Galvanized after fabrication)

**ONLY FOR USE IN MAINTENANCE REPAIRS OR HIGHLY CONSTRAINED SITE CONDITIONS.**

Design Division Standard


**METAL BEAM GUARD FENCE  
(SHORT RADIUS)  
MBGF (SR) - 19**

FILE: mbgfsr19.dgn	DR: TxDOT	CR: KM	DR: BD	DR: VP
© TxDOT NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISTIONS	6388/89	001	US 82 ETC	
DIST	COUNTY	SHEET NO.		
PAR	LAMAR, ETC	26		

DATE: FILE:



DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

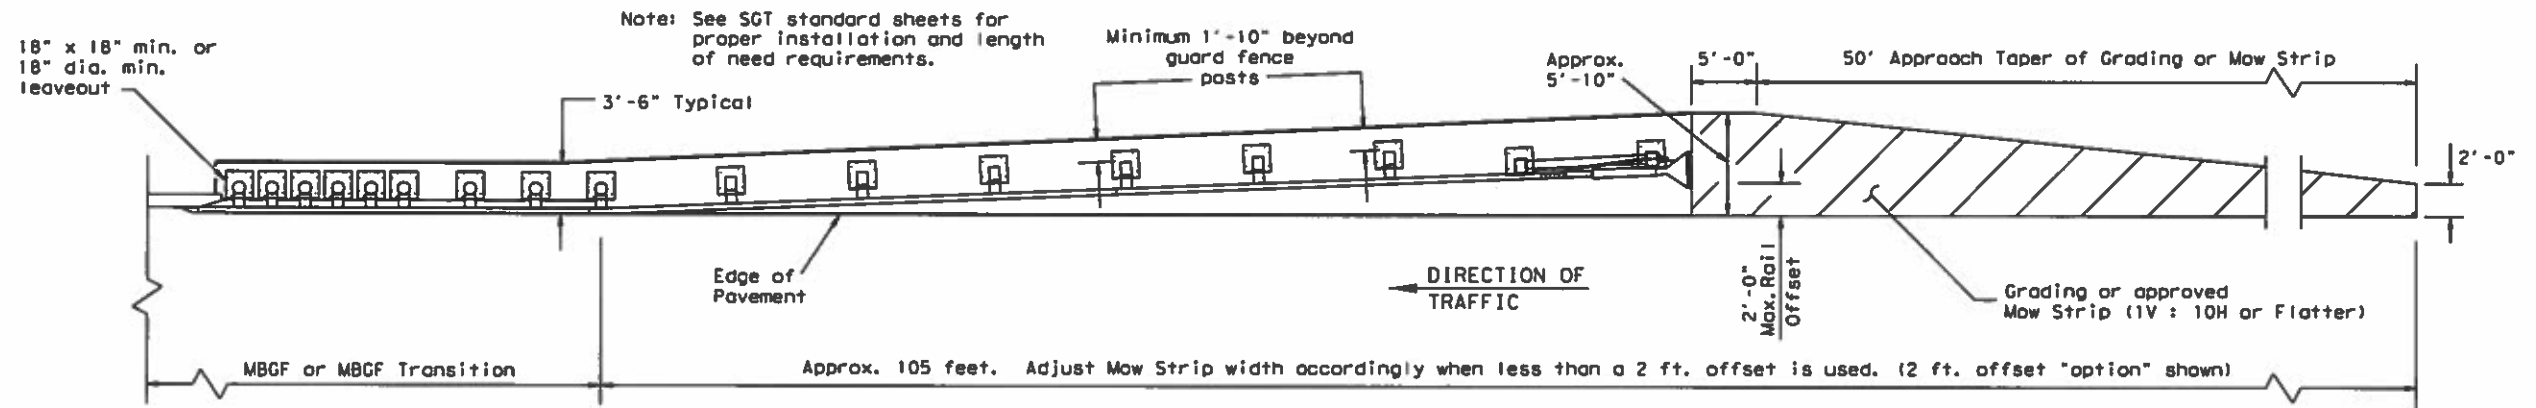


**GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS**

Note: Site Conditions)  
 Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments.  
 Approach grading or mow strip may be decreased or eliminated. As directed by the Engineer.


**GENERAL NOTES**

1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments (See SGT standards for proper SGT installation).
2. Mow strips shall be asphaltic pavement or reinforced concrete (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item of work. Asphaltic pavement shall meet the requirements of the item, and be placed in accordance with the pertinent bid item as shown on the plans. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
3. The leaveout behind the post shall be a minimum of 7".
4. The type of approved post will be shown elsewhere in the plans. See the applicable standard sheets for additional details and information.
5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
6. Depth of mow strip will be 4".
7. The limits of payment for asphaltic pavement or reinforced concrete will include leaveouts for posts.
8. The leave-outs shall be filled with no more than a 2-sack grout mixture (1 part cement, 5 parts water, and 14 parts sand by volume) with a 28-day compressive strength of approximately 120 psi or less. Provide grout of a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of rip rap mow strip.

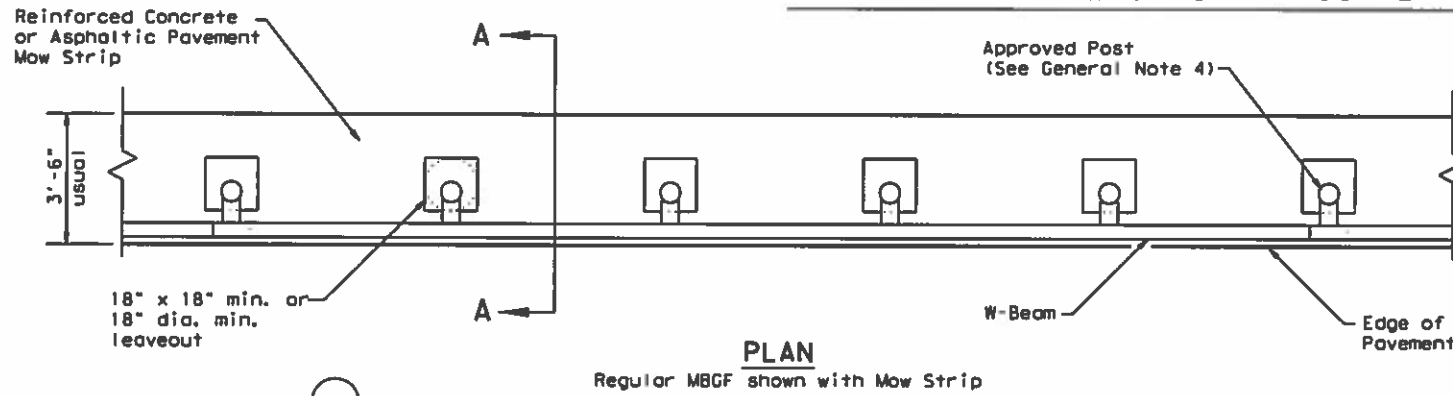


**PLAN**

Regular MBEF shown with Mow Strip

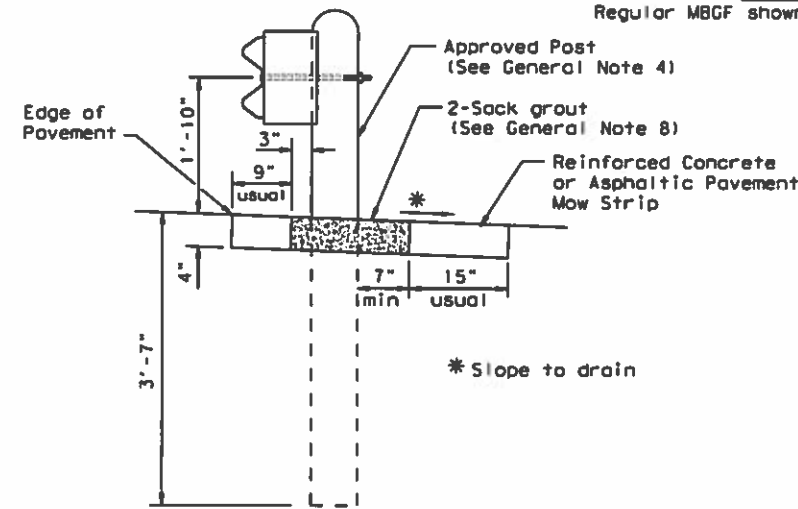


**SECTION A-A**  
Typical

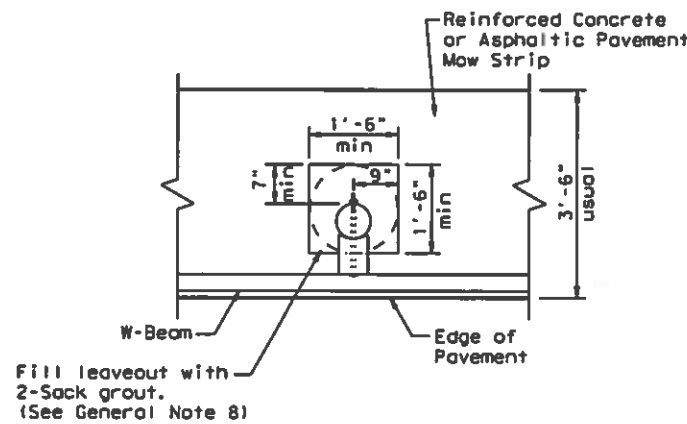


**MOW STRIP DETAIL**

Reinforced Concrete or Asphaltic Pavement Mow Strip with 18" x 18" or 18" dia. minimum leaveout.

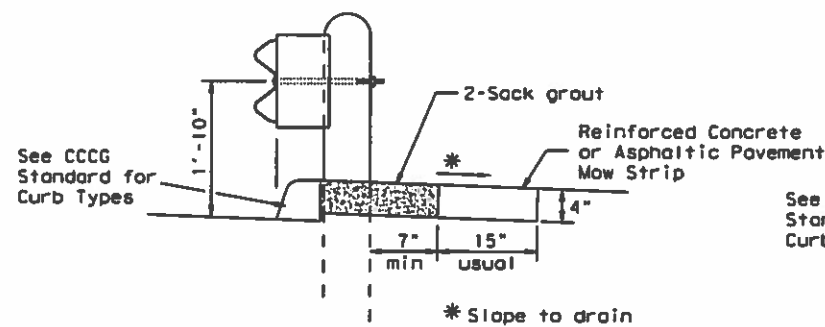


**CURB OPTION (1)**

This option will increase the post embedment through out the system.

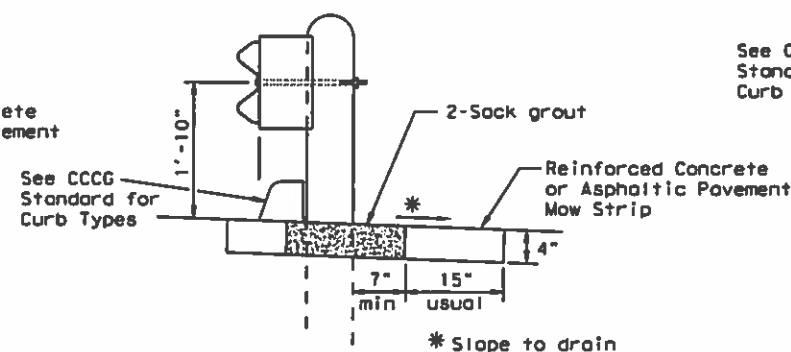

**CURB OPTION (2)**

Curb shown on top of mow strip

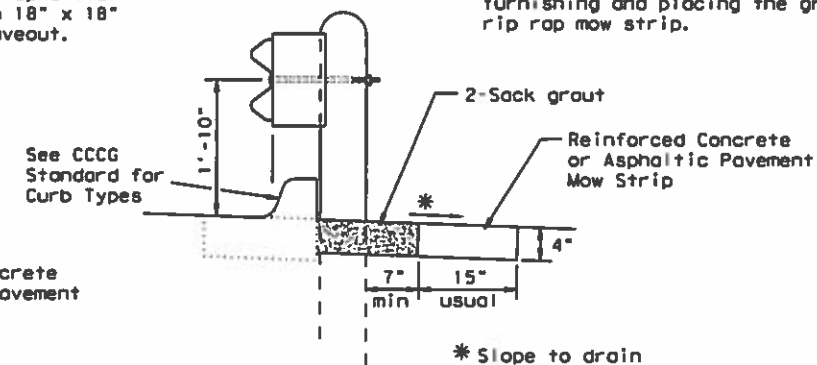

**CURB OPTION (3)**

**ONLY FOR USE IN MAINTENANCE REPAIRS.**







**METAL BEAM GUARD FENCE (MOW STRIP)**  
**MBGF (MS) - 19**

FILE: mbgfms19.dgn	DR: TxDOT	CR: KM	DN: TxDOT	CH: EL
© TxDOT NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82, ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR, ETC	27	


DATE: FILE:

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: FILE:

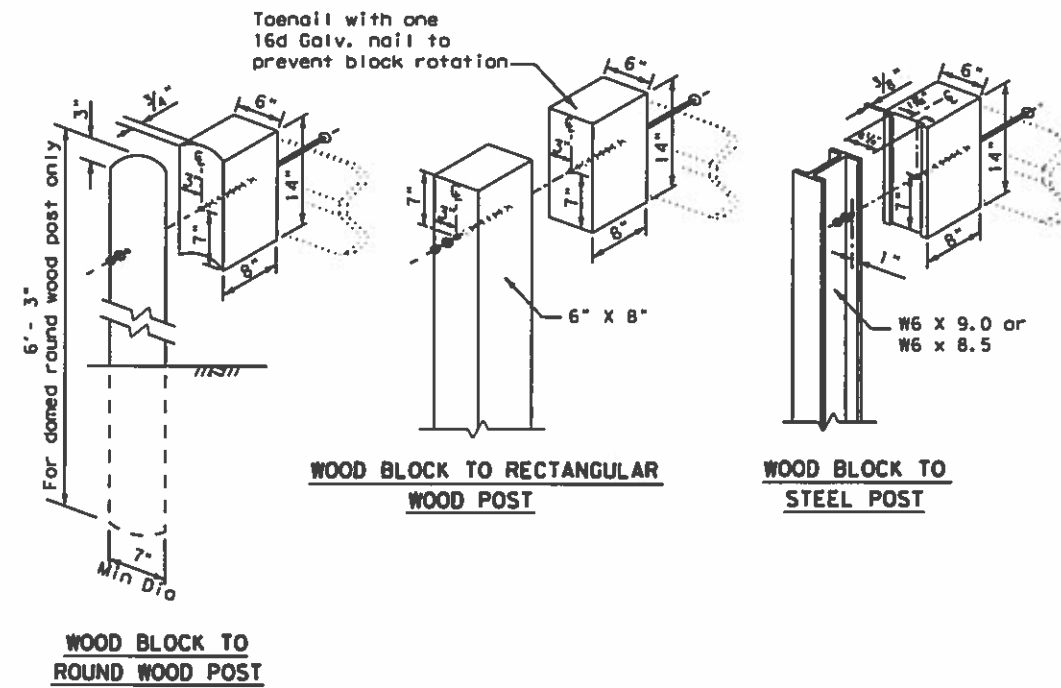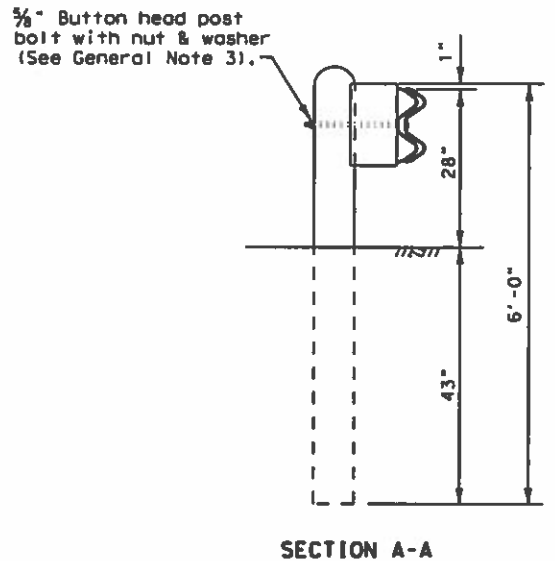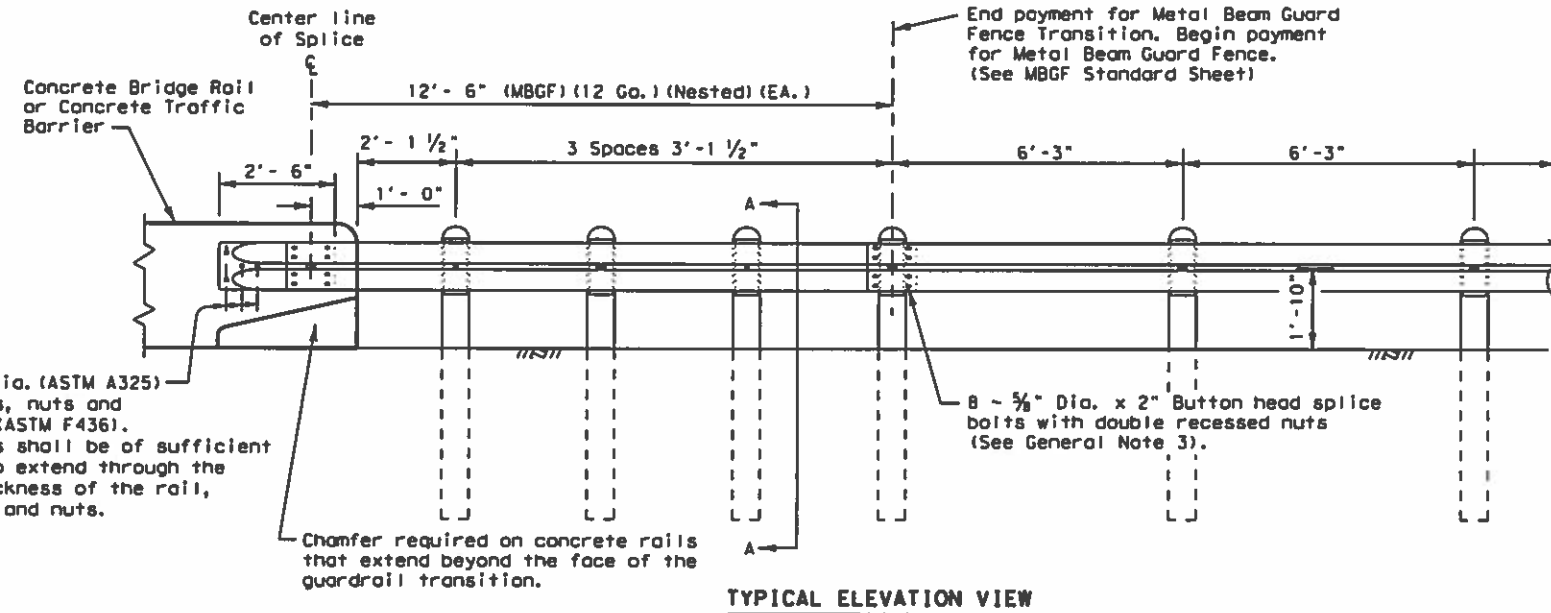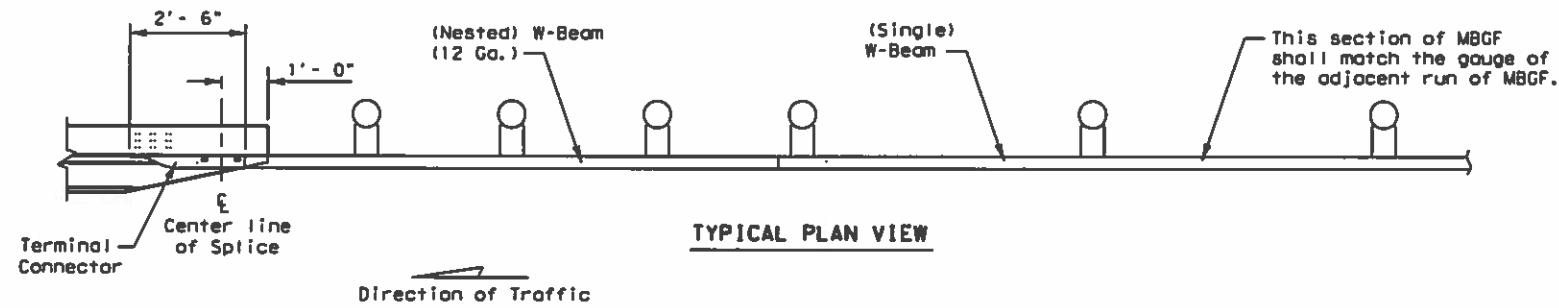

- ### GENERAL NOTES
- The type of post (round wood post, rectangular wood post, or steel post) will be shown elsewhere in the plans. The exact position of transitions shall be shown elsewhere in the plans or as directed by the Engineer.
  - Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans.
  - Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut and Type A 1 3/4" O.D. washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 3/8" x 2" (at triple rail splices) with 3/8" double recessed nuts (ASTM A563).
  - Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item requiring construction of the transition.
  - Crown will be widened to accommodate transitions.
  - If solid rock is encountered. See the MBGF standard sheet for the proper installation guidance.
  - Posts shall not be set in concrete.
  - Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT, maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.
  - Refer to MBGF standard sheet for additional details.


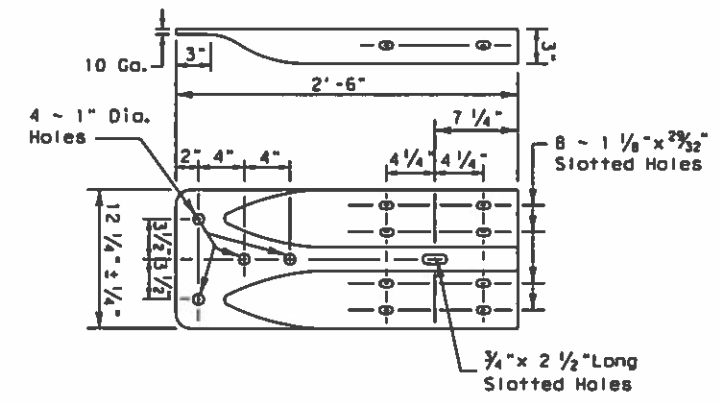


**TERMINAL CONNECTOR**  
 FOR USE WITH MBGF CONNECTIONS TO CONCRETE BRIDGE RAILS AND TRAFFIC BARRIERS

ONLY FOR USE IN MAINTENANCE REPAIRS.





		Design Division Standard	
<b>METAL BEAM GUARD FENCE TRANSITION (TL2)</b> (Low Speed Transition) <b>MBGF (TL2) - 19</b>			
FILE: rbgf1219.dgn	DN: TxDOT	CR: RM	DR: BD
© TxDOT NOVEMBER 2019	CONT: 6388	SECT: 89	JOB: 001
REVISIONS	DIST: PAR	COUNTY: LAMAR, ETC	SHEET NO.: 28

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

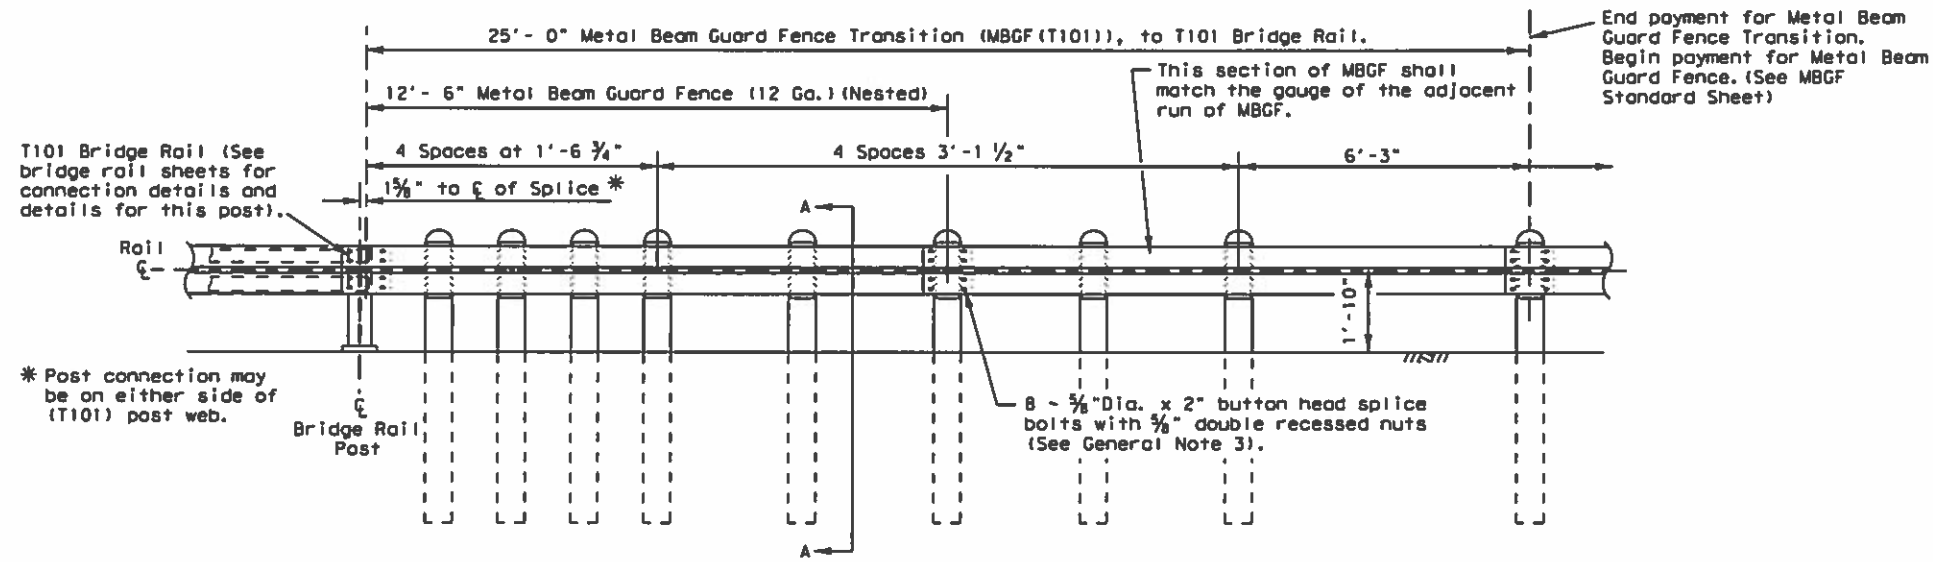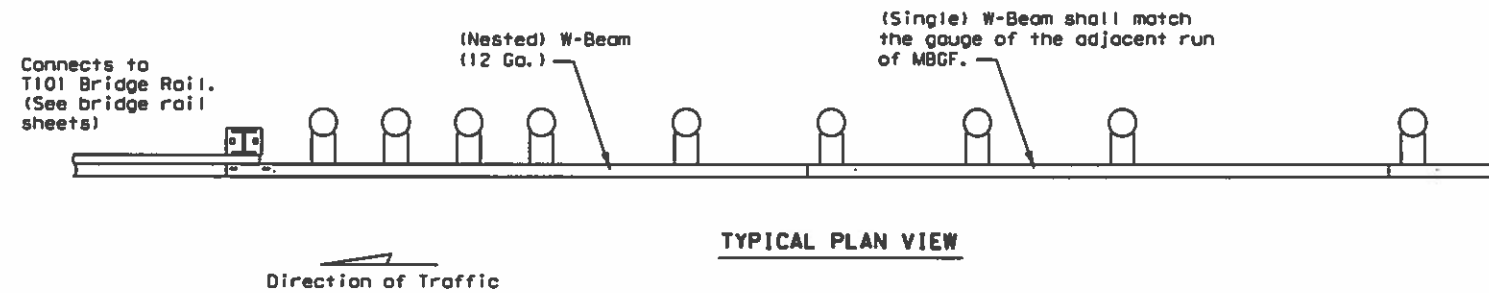

\* Post connection may be on either side of (T101) post web.

- ### GENERAL NOTES
1. The type of post (round wood post, rectangular wood post, or steel post) will be shown elsewhere in the plans. The exact position of transitions shall be shown elsewhere in the plans or as directed by the Engineer.
  2. Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans.
  3. Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and the Type A 1 3/4" O.D. washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 5/8" x 2" (at triple rail splices) with a 3/8" double recessed nuts (ASTM A563).
  4. Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item requiring construction of the transition.
  5. Crown will be widened to accommodate transitions.
  6. If solid rock is encountered. See the MBGF standard sheet for proper installation guidance.
  7. Posts shall not be set in concrete.
  8. Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT, maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.
  8. Refer to MBGF Standard Sheet for additional details.

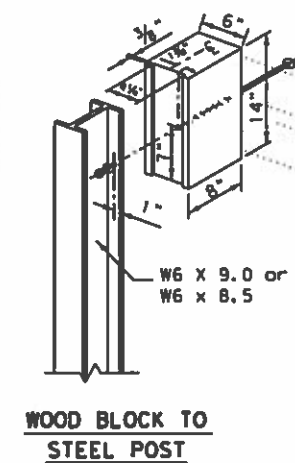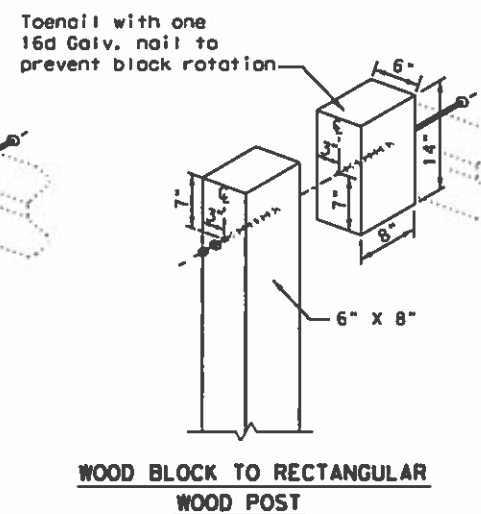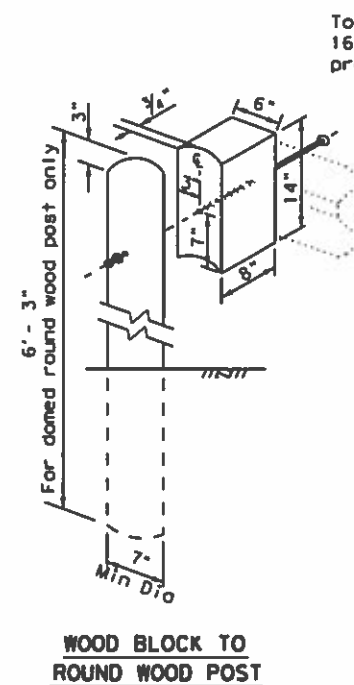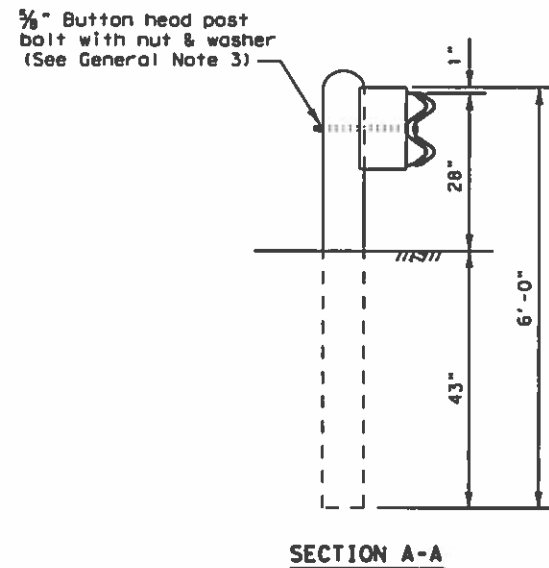

ONLY FOR USE IN MAINTENANCE REPAIRS.

Texas Department of Transportation  
Design Division Standard

## METAL BEAM GUARD FENCE TRANSITION (T101) (T101 BRIDGE RAIL) MBGF (T101)-19


FILE: mdf110119.dgn	DATE: NOVEMBER 2019	CONTRACT: 638889	SECTION: 001	JOB: US 82; ETC	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO.: 29
---------------------	---------------------	------------------	--------------	-----------------	-----------	--------------------	---------------

DATE: FILE:




DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: FILE:

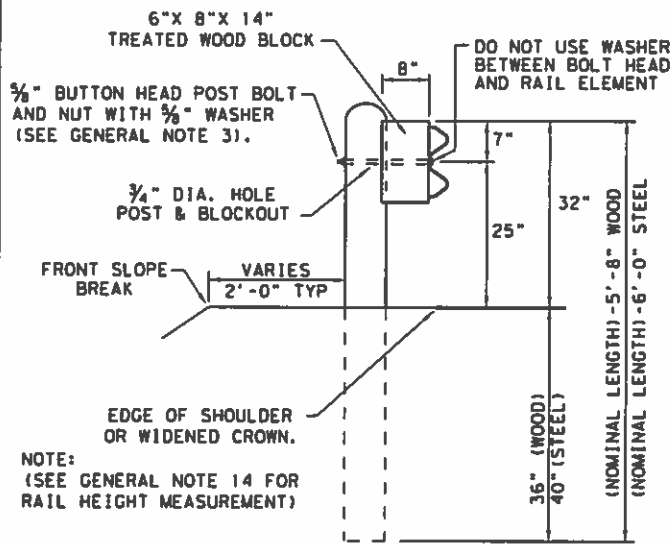

**TYPICAL POST PLACEMENT**

NOTE: (SEE GENERAL NOTE 14 FOR RAIL HEIGHT MEASUREMENT)

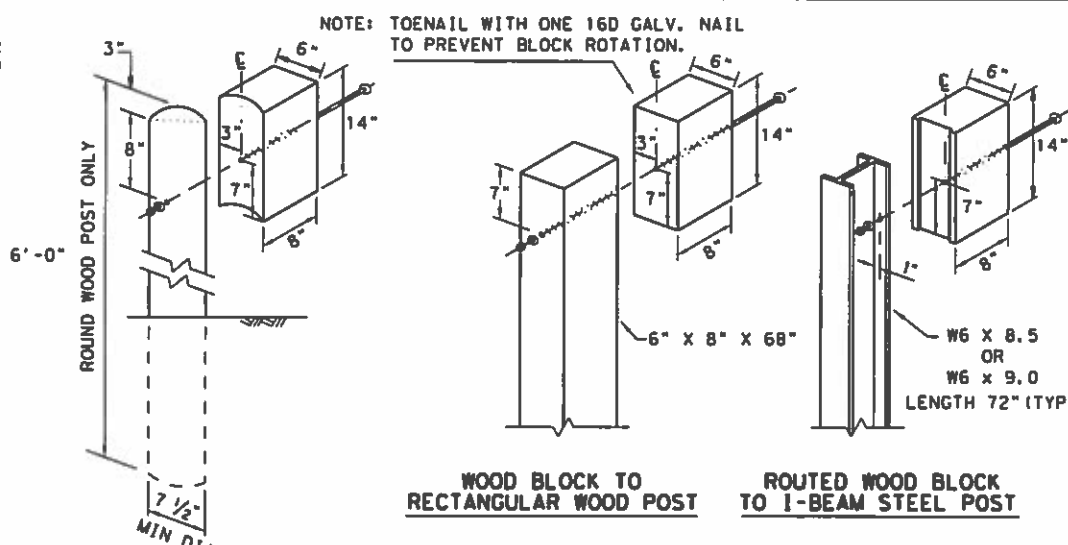


**WOOD BLOCK TO ROUND WOOD POST**      **ROUTED WOOD BLOCK TO I-BEAM STEEL POST**

**GENERAL NOTES**


1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

NOTE: \*\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

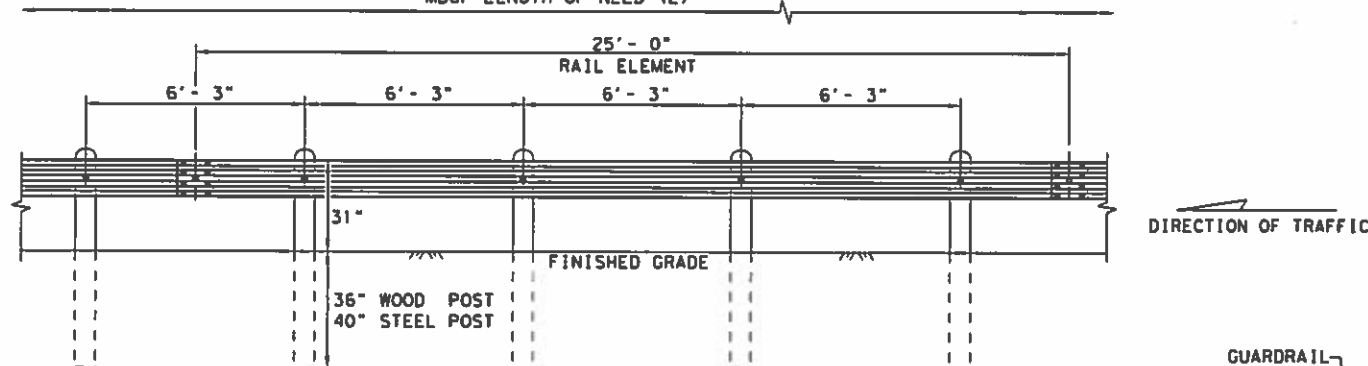

**ELEVATION MID-SPAN RAIL SPLICE**


SHOWING A 25'-0" SECTION OF W-BEAM RAIL. (SEE GENERAL NOTE 2)

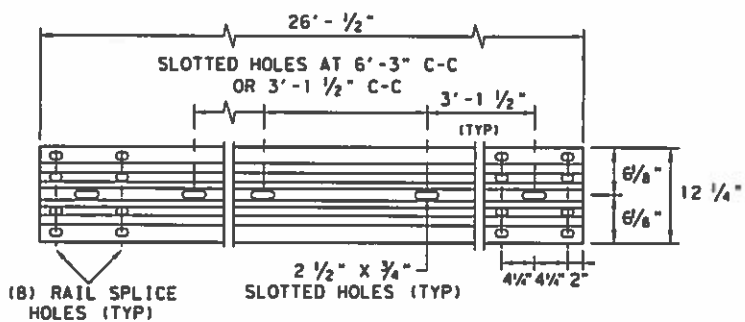

**ELEVATION 25'-0" (NOM.) W-BEAM SECTION**

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.

\* POST(S) MAY REQUIRE FIELD MODIFICATION TO ENSURE PROPER GUARDRAIL HEIGHT.

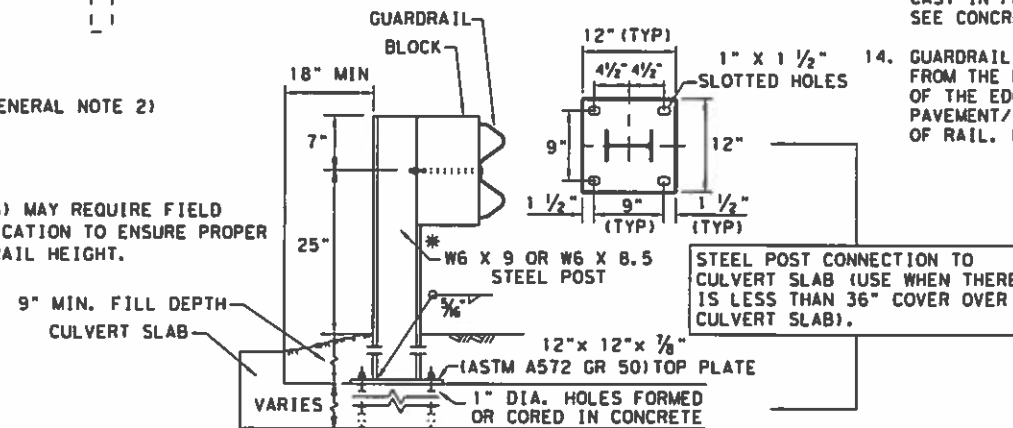

**LOW FILL CULVERT POST**

NOTE: TRANSITIONS TO BRIDGE RAILS OR TRAFFIC BARRIERS. SEE GF(31)TL3 TR STANDARD FOR HIGH-SPEED TL-3 TRANSITIONS. SEE GF(31)TL2 TR STANDARD FOR LOW-SPEED TL-2 TRANSITIONS.

NOTE: TWO INSTALLATION OPTIONS.

1. **BOLT-THROUGH OPTION:** REQUIRES A 6" MIN. SLAB THICKNESS. 3/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS. NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.
2. **EPOXY ANCHOR OPTION:** THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 3/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.

NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF(31)LS STANDARD FOR "LONG SPAN" OPTION.

NOTE: FOUR TYPES OF BUTTON-HEAD GUARD RAIL BOLTS COME WITH A RECESSED NUT.


SPLICE BOLT LENGTH VARIES

FBBO1 = 1 1/4"  
FBBO2 = 2"

POST & BLOCK LENGTH  
FBBO3 = 10"  
FBBO4 = 18"

**BUTTON HEAD BOLT**

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

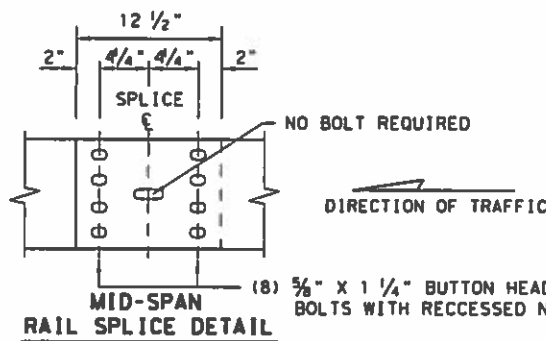


**MID-SPAN RAIL SPLICE DETAIL**

NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

		Design Division Standard	
<b>METAL BEAM GUARD FENCE</b> <b>TL-3 MASH COMPLIANT</b> <b>GF(31)-19</b>			
FILE: gf3119.dgn	DW:TxDOT	CHK:KM	DWG:VP
©TxDOT: NOVEMBER 2019	CONF	SECT	JOB
REVISIONS		6388	89
		DIST	COUNTY
		PAR	LAMAR; ETC
		US B2;	ETC
		SHEET NO.	31


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

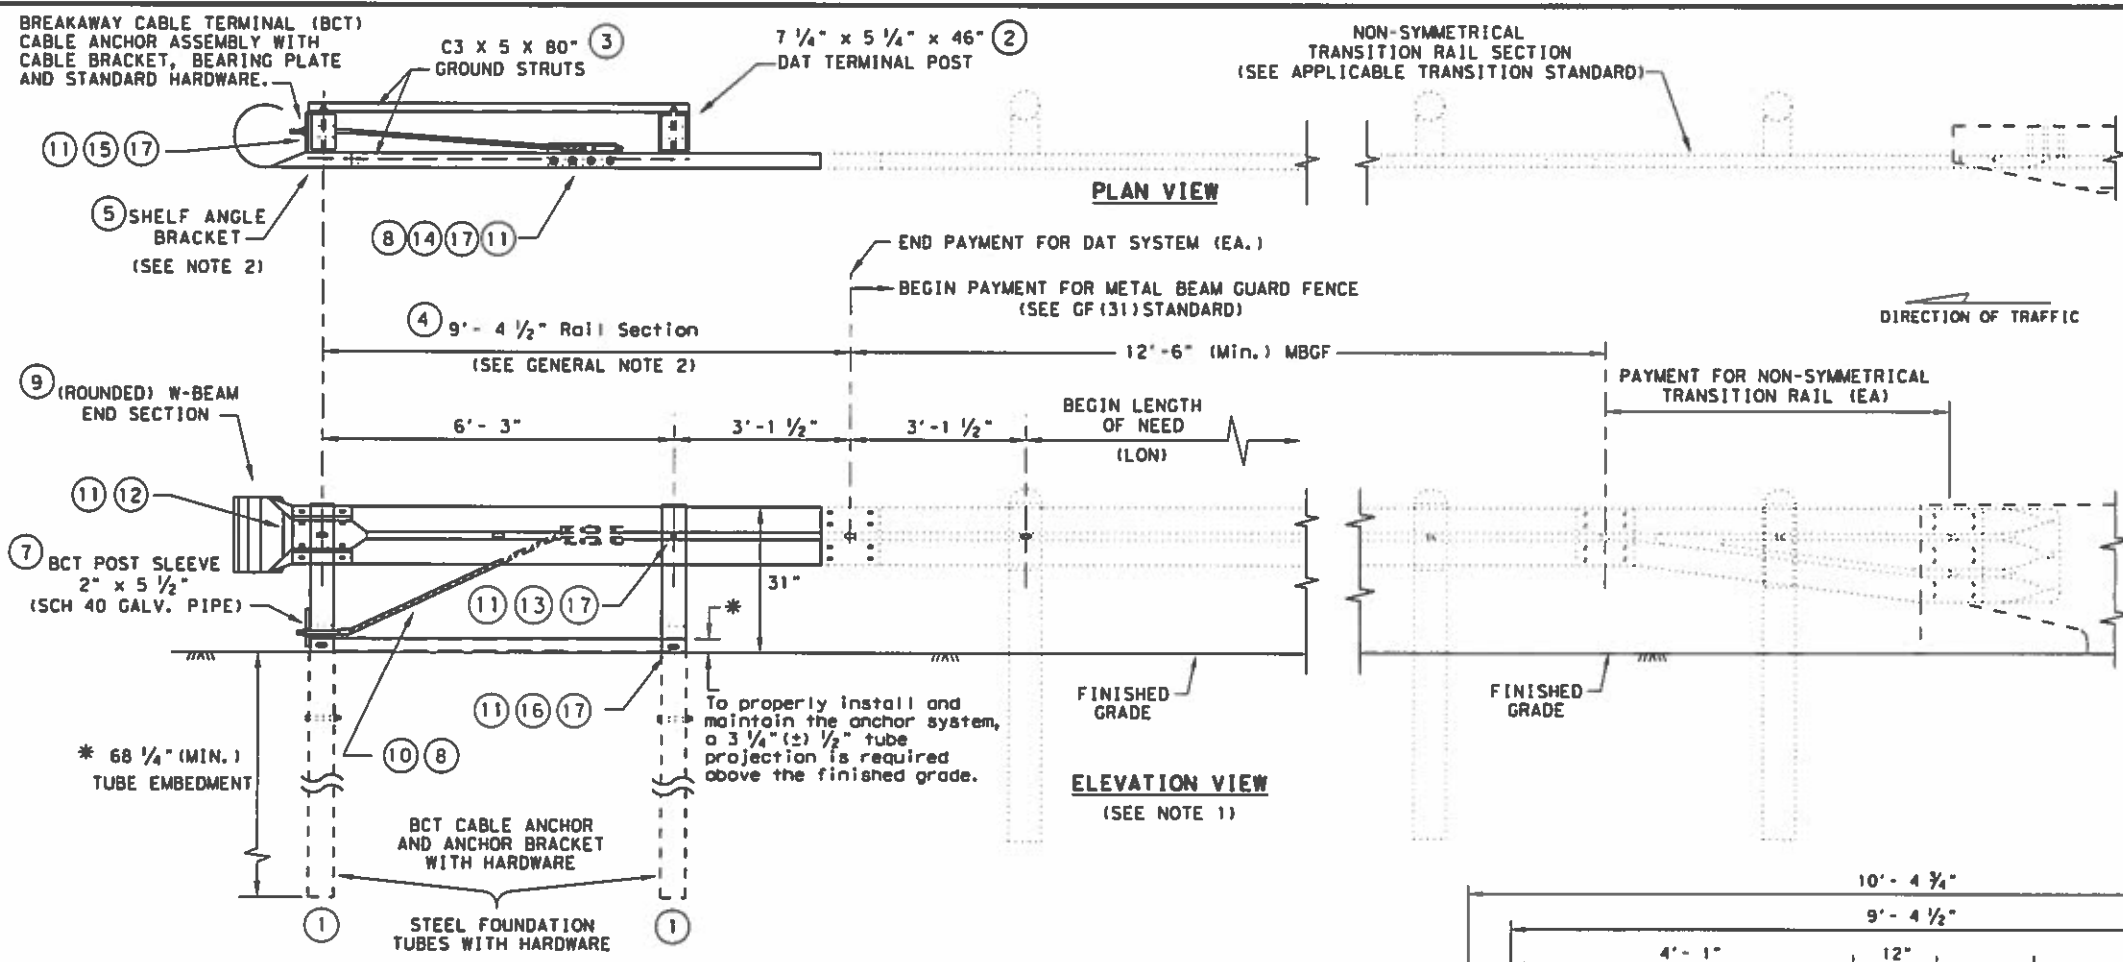







**DOWNSTREAM ANCHOR TERMINAL (DAT)**  
 NOTE: ONLY FOR DOWNSTREAM USE, WHEN LOCATED OUTSIDE THE HORIZONTAL CLEARANCE AREA OF OPPOSING TRAFFIC.

- GENERAL NOTES**
1. THE DETAIL SHOWN IS THE MINIMUM LENGTH OF NEED (LON) FOR A DOWNSTREAM ANCHOR TERMINAL (DAT) CONNECTED TO A CONCRETE RAIL.
  2. THE RAIL SECTION AT THE END POST IS SUPPORTED BY THE SHELF ANGLE BRACKET. THE RAIL ELEMENT IS NOT ATTACHED TO THE END POST.
  3. THE FOUNDATION TUBES SHALL NOT PROJECT MORE THAN 3 3/4" ABOVE THE FINISHED GRADE.
  4. ALL HARDWARE FOR DAT SHALL BE ASTM A307 UNLESS OTHERWISE SHOWN.
  5. REFER TO GF (31) SHEET FOR TERMINAL CONNECTION DETAILS.

**MOW STRIP INSTALLATION**  
 IF A MOW STRIP IS REQUIRED WITH THE DAT INSTALLATION THE LEAVE-OUT AREA AROUND THE STEEL FOUNDATION TUBES AND THE TWO CHANNEL STRUTS MAY BE OMITTED. THIS WILL REQUIRE A FULL POUR AT THE FOUNDATION TUBES.

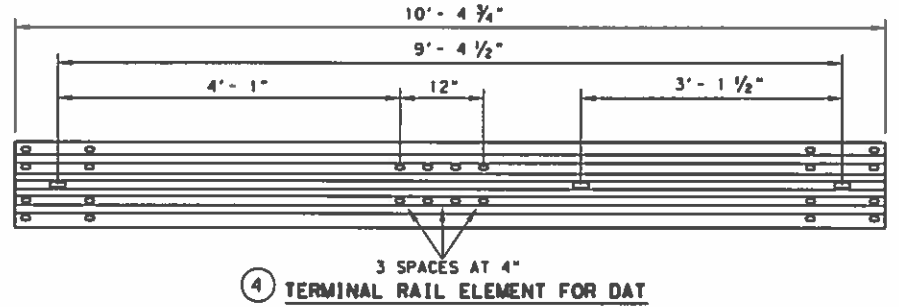

#	(DAT) PARTS LIST	QTY
1	STEEL FOUNDATION TUBE	2
2	DAT TERMINAL POST	2
3	CHANNEL STRUT	2
4	TERMINAL RAIL ELEMENT	1
5	SHELF ANGLE BRACKET	1
6	BCT BEARING PLATE	1
7	BCT POST SLEEVE	1
8	GUARDRAIL ANCHOR BRACKET	1
9	(ROUNDED) W-BEAM END SECTION	1
10	BCT CABLE ANCHOR	1
11	RECESSED NUT, GUARDRAIL	20
12	1 1/4" BUTTON HEAD BOLT	4
13	10" BUTTON HEAD BOLT	2
14	5/8" X 2" HEX HEAD BOLT	8
15	5/8" X 8" HEX HEAD BOLT	4
16	5/8" X 10" HEX HEAD BOLT	2
17	5/8" FLAT WASHER	18

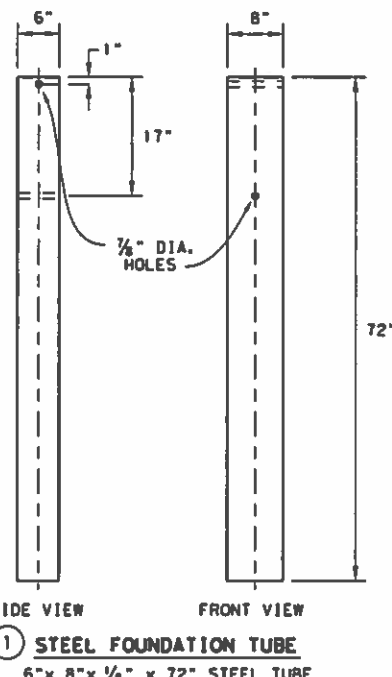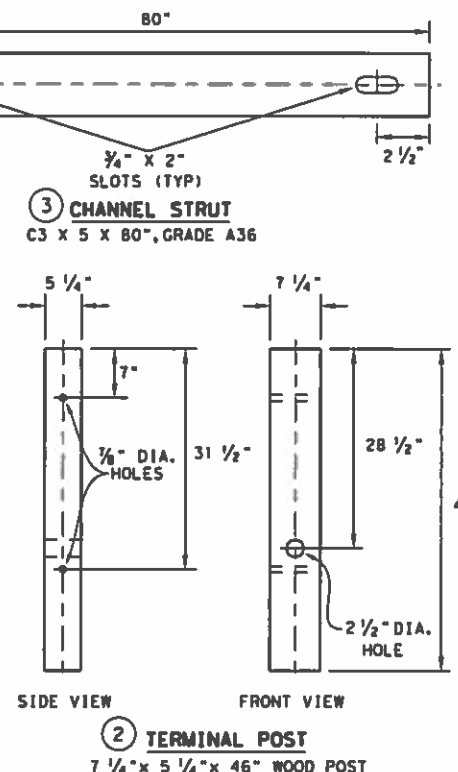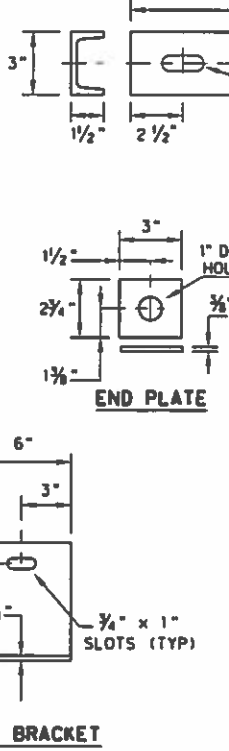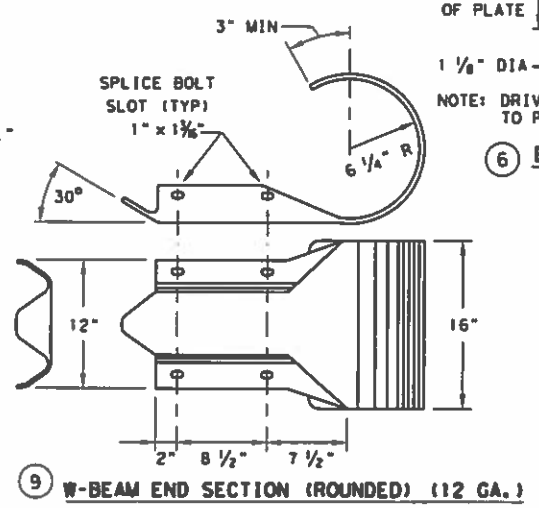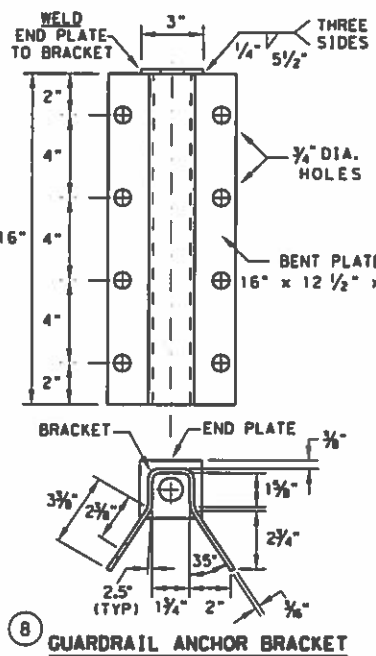

Design Division Standard

METAL BEAM GUARD FENCE  
 (DOWNSTREAM ANCHOR TERMINAL)  
 TL-3 MASH COMPLIANT  
 GF (31) DAT-19


FILE: gf31dat19.dgn	DW: TxDOT	CR: KM	DW: VP	CR: CGL/AG
© TxDOT: NOVEMBER 2019	CONT: SECT	JOB: HIGHWAY		
REVISIONS	6388 89	001	US B2; ETC	
	DIST:	COUNTY:	SHEET NO.	
	PAR:	LAMAR; ETC	32	

DATE: FILE:




DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

NOTE: TOENAIL WITH ONE 16D GALV. NAIL TO PREVENT BLOCK ROTATION.

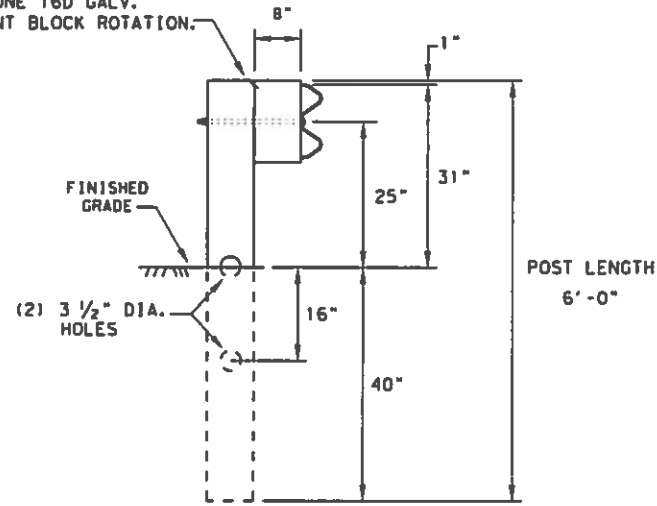

**RECTANGULAR CRT POST  
(6" X 8" X 6' LONG)**

(6) CRT REQUIRED  
SEE ELEVATION DETAIL FOR LOCATIONS

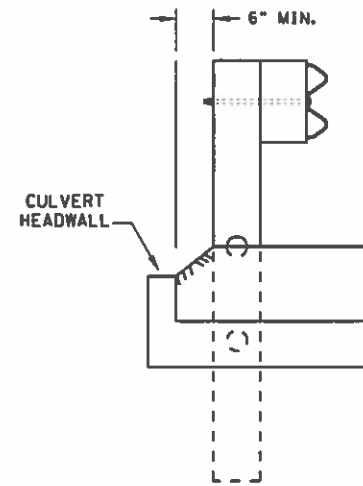


**LATERAL OFFSET BETWEEN THE  
GUARDRAIL AND THE CULVERT HEADWALL**

**GENERAL NOTES**

1. THE TYPE OF LINE POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF THE TRANSITIONS SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET ALL REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 12'-6" OR 25'-0" NOMINAL LENGTHS.
3. RAIL POST HOLES ARE OFFSET 3'-1 1/2" FROM STANDARD GUARDRAIL TO ACCOMMODATE THE MIDSPAN SPLICING.
4. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC16a) AND NO MORE THAN 1" BEYOND IT.
5. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
6. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
7. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
8. REFER TO GF(31) STANDARD SHEET FOR ADDITIONAL DETAILS.
9. FLAME CUTTING OF HOLES IN GUARDRAIL SHALL NOT BE PERMITTED. IF YOU ENCOUNTER MIS-ALIGNED BOLT HOLES IN GUARDRAIL CONTACT THE DESIGN DIVISION FOR ADDITIONAL INFORMATION & OPTIONS.

NOTE: SEE GF(31) STANDARD FOR STANDARD LINE POSTS.

DIRECTION OF TRAFFIC

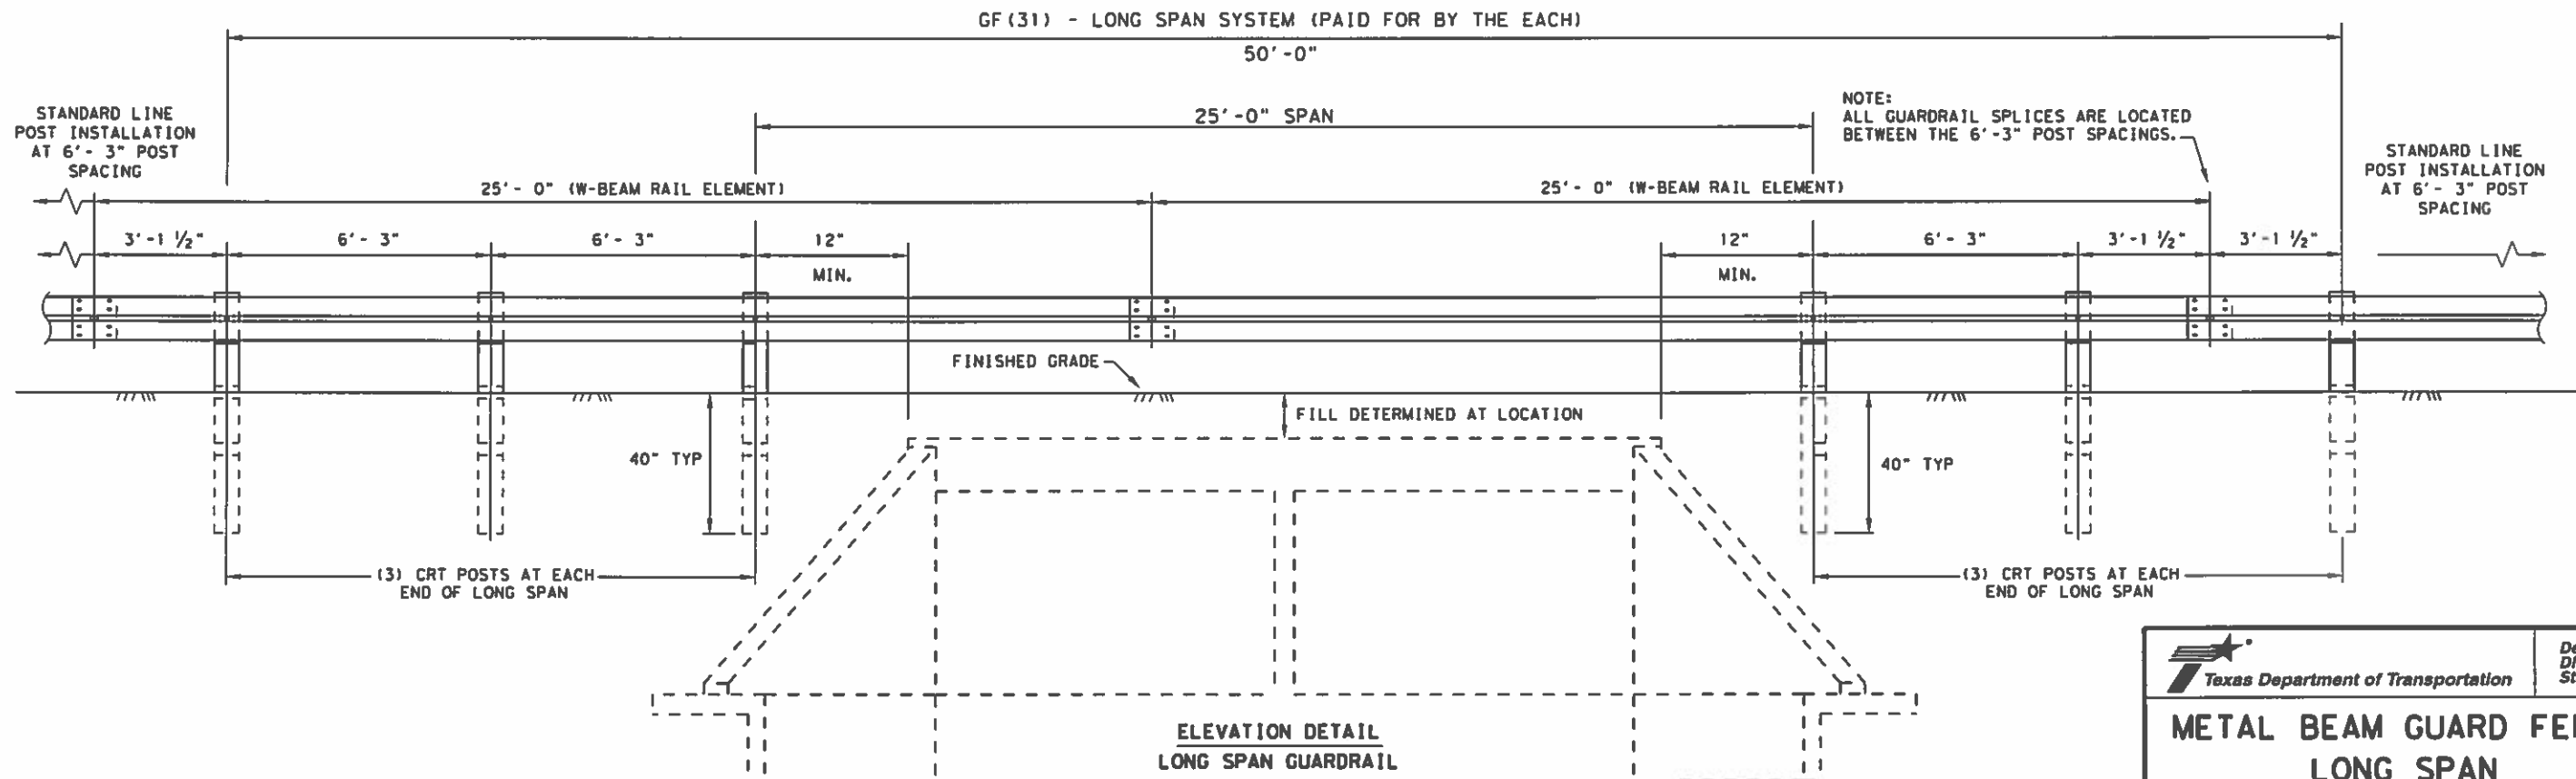


**ELEVATION DETAIL  
LONG SPAN GUARDRAIL**

		Design Division Standard	
<b>METAL BEAM GUARD FENCE LONG SPAN TL-3 MASH COMPLIANT</b>			
<b>GF(31)LS-19</b>			
FILE: gf31ls19.dgn	DN: TxDOT	CR: KM	DN: VP
© TxDOT: NOVEMBER 2019	CONT: 6388	SECT: 89	JOB: 001
REVISTIONS	6388	89	001
DIST: PAR	COUNTY: LAMAR	ETC	SHEET NO.: 33

DATE:  
FILE:

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

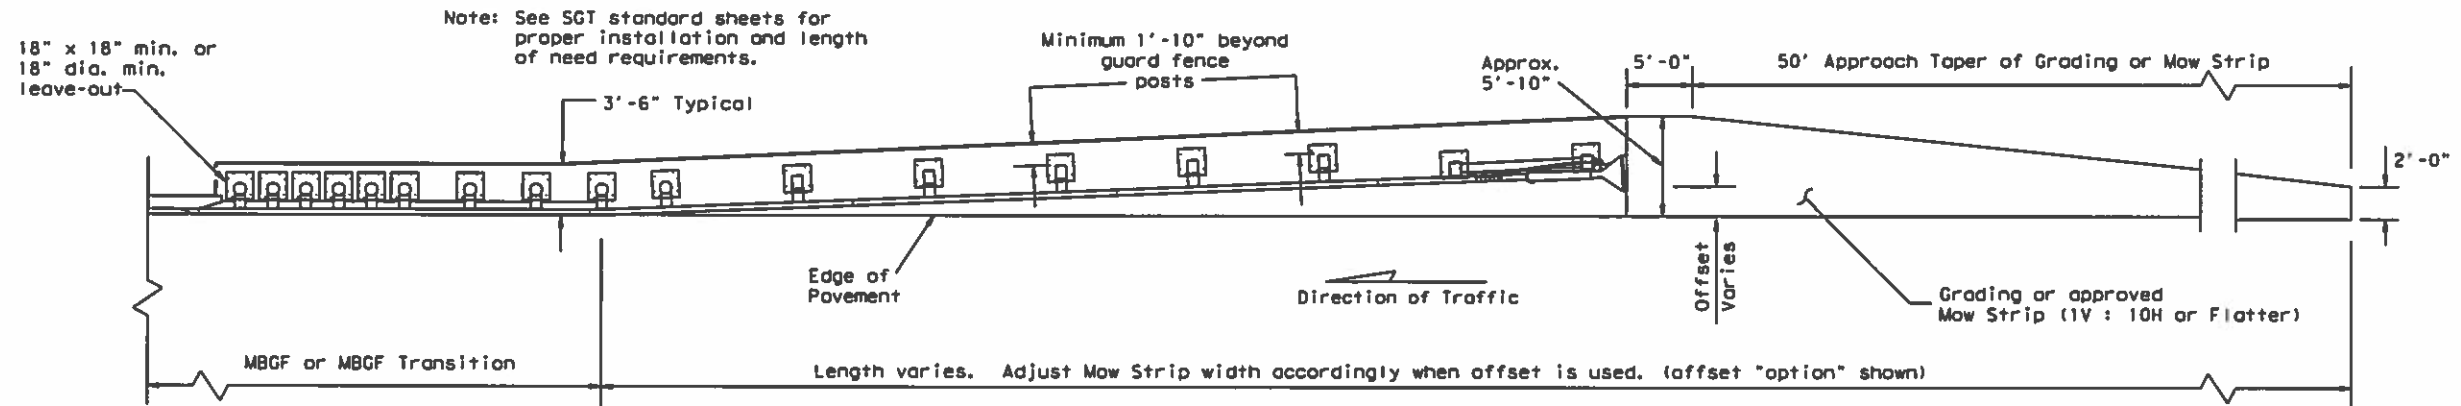


**GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS**

Note: Site Condition(s)

Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments. Approach grading or mow strip may be decreased or eliminated, as directed by the Engineer.


**GENERAL NOTES**

1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments. See applicable GF(31) MBGF or GF(31) Transition Standard sheet for additional information.
2. Mow strips shall be reinforced concrete with (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
3. The leave-out behind the post shall be a minimum of 7".
4. Only steel (W6 x 8.5 or W6 x 9.0), or 7 1/2" Dia. round wood posts are acceptable for use in the mow strip. See GF(31) Standard for additional details.
5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
6. Thickness of the mow strip will be 4".
7. The limits of payment for reinforced concrete will include leave-outs for the posts.
8. The leave-outs shall be filled with a Grout mixture consisting of: 2719 pounds sand, 188 pounds Type I or II cement, and 550 pounds of water per cubic yard, with a 28-day compressive strength of approximately 230 psi or less. Provide grout with a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested Maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of riprap mow strip.

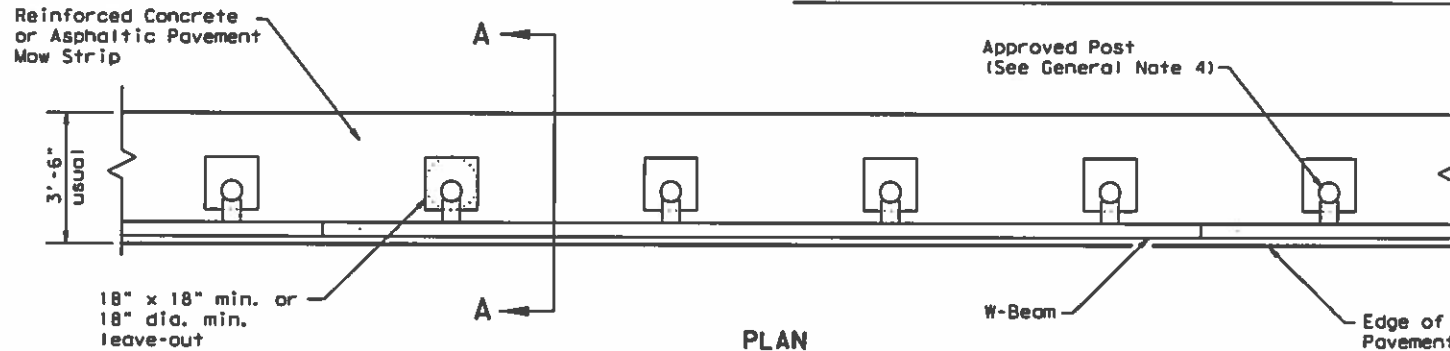


**PLAN**

GF(31) shown with Mow Strip (See GF(31) standard sheet for proper installation)

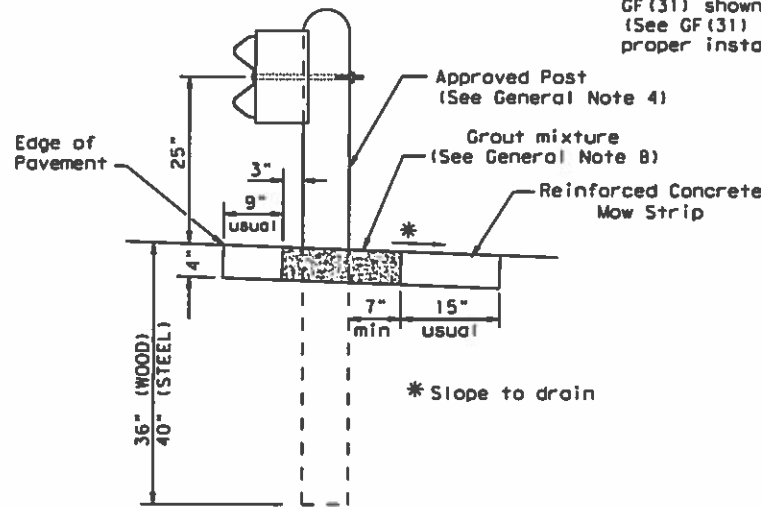


**SECTION A-A**  
Typical

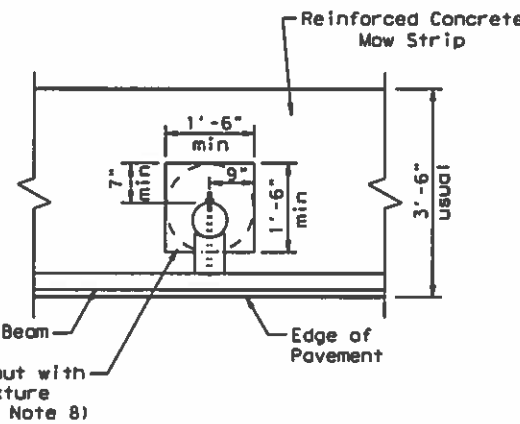


**MOW STRIP DETAIL**

Reinforced Concrete Mow Strip with 18" x 18" Square or 18" Dia. minimum leave-out.

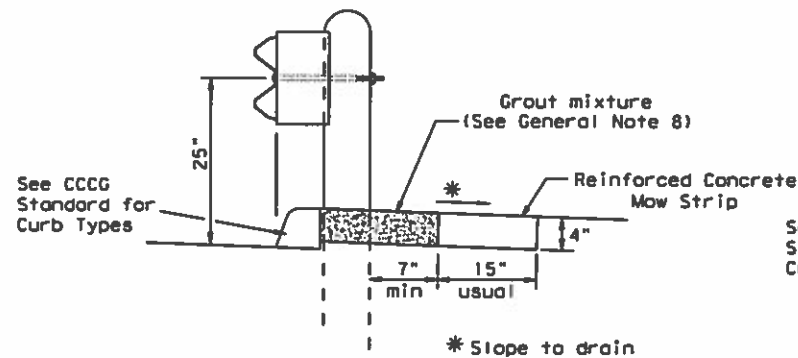


**CURB OPTION (1)**

This option will increase the post embedment throughout the system.

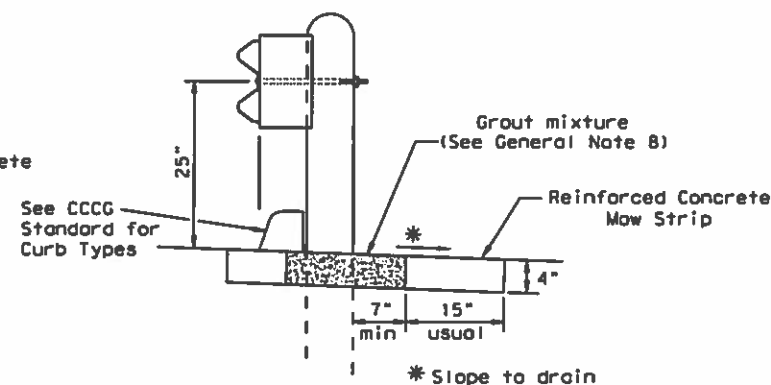

**CURB OPTION (2)**

Curb shown on top of mow strip

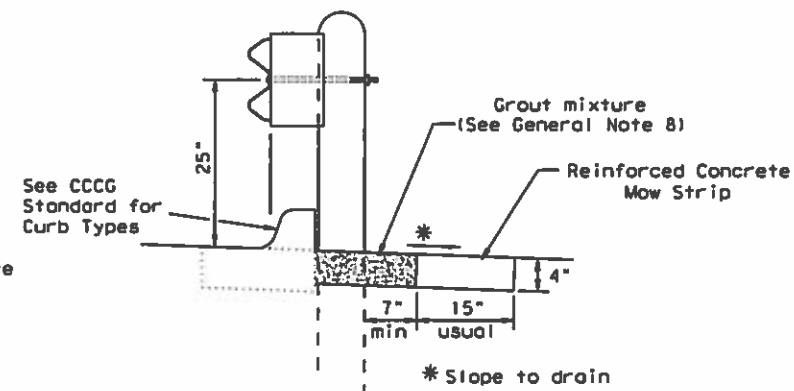


**CURB OPTION (3)**

		Design Division Standard	
<b>METAL BEAM GUARD FENCE (MOW STRIP)</b> <b>TL-3 MASH COMPLIANT</b> <b>GF(31)MS-19</b>			
FILE: gf31ms19.dgn	DN: TxDOT	CK: KM	DN: VP
© TxDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	6388	89	001
DIST	COUNTY	SHEET NO.	
PAR	LAMAR, ETC	34	

DATE: FILE:


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE:  
FILE:

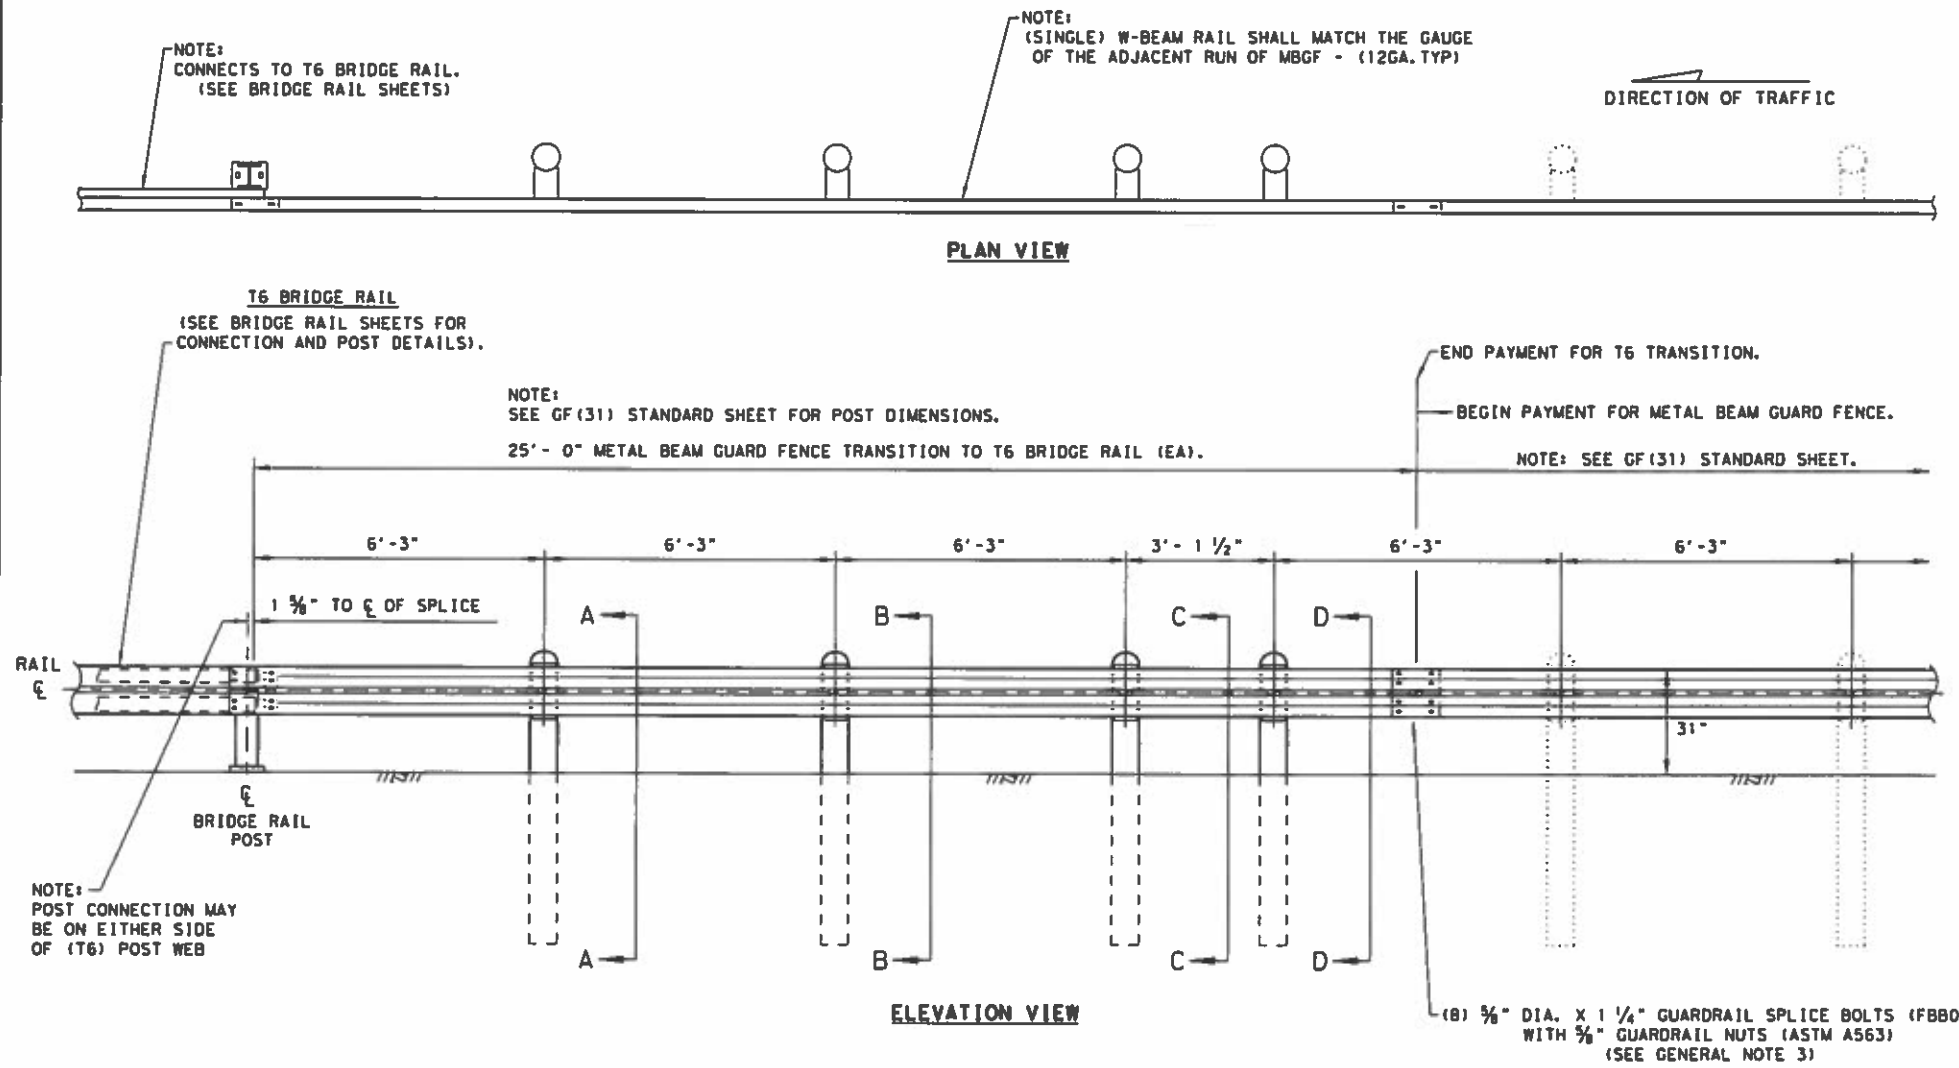

- GENERAL NOTES**
1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
  2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
  3. BUTTON HEAD "POST" BOLTS (ASTM A307 GR. A) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 3/8" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 3/8" X 1-1/4" WITH 3/8" NUTS (ASTM A563).
  4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
  5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
  6. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
  7. POSTS SHALL NOT BE SET IN CONCRETE.
  8. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
  9. REFER TO STANDARD GF (31) & APPLICABLE BRIDGE RAILING STANDARD FOR ADDITIONAL DETAILS.


\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

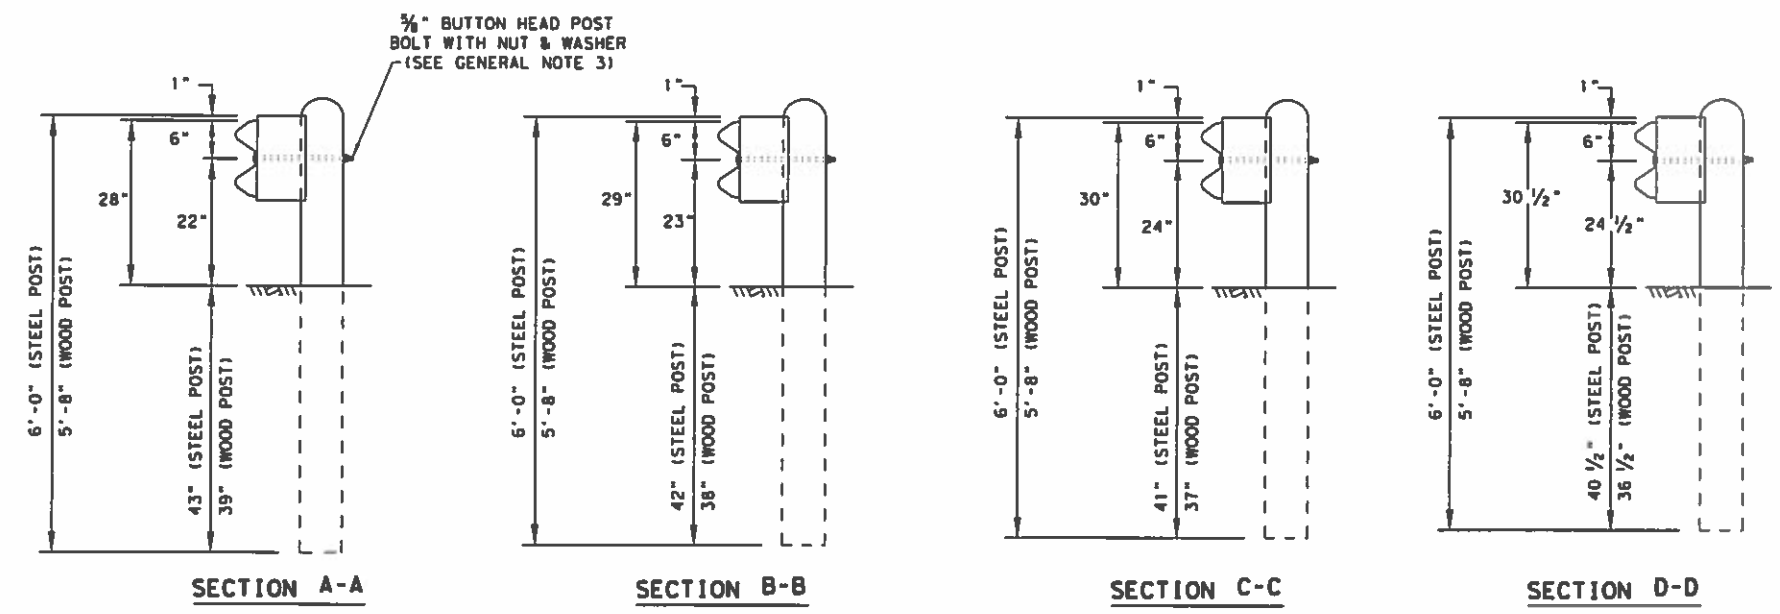

		Design Division Standard			
		<b>METAL BEAM GUARD FENCE TRANSITION (T6)</b> <b>GF (31) T6-19</b>			
FILE: gf311619.dgn	DN: TxDOT	CK: KM	DR: VP	CR: CGL/AG	
© TxDOT: NOVEMBER 2019	CONT: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82; ETC	
REVISIONS	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO.:	35	


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: FILE:

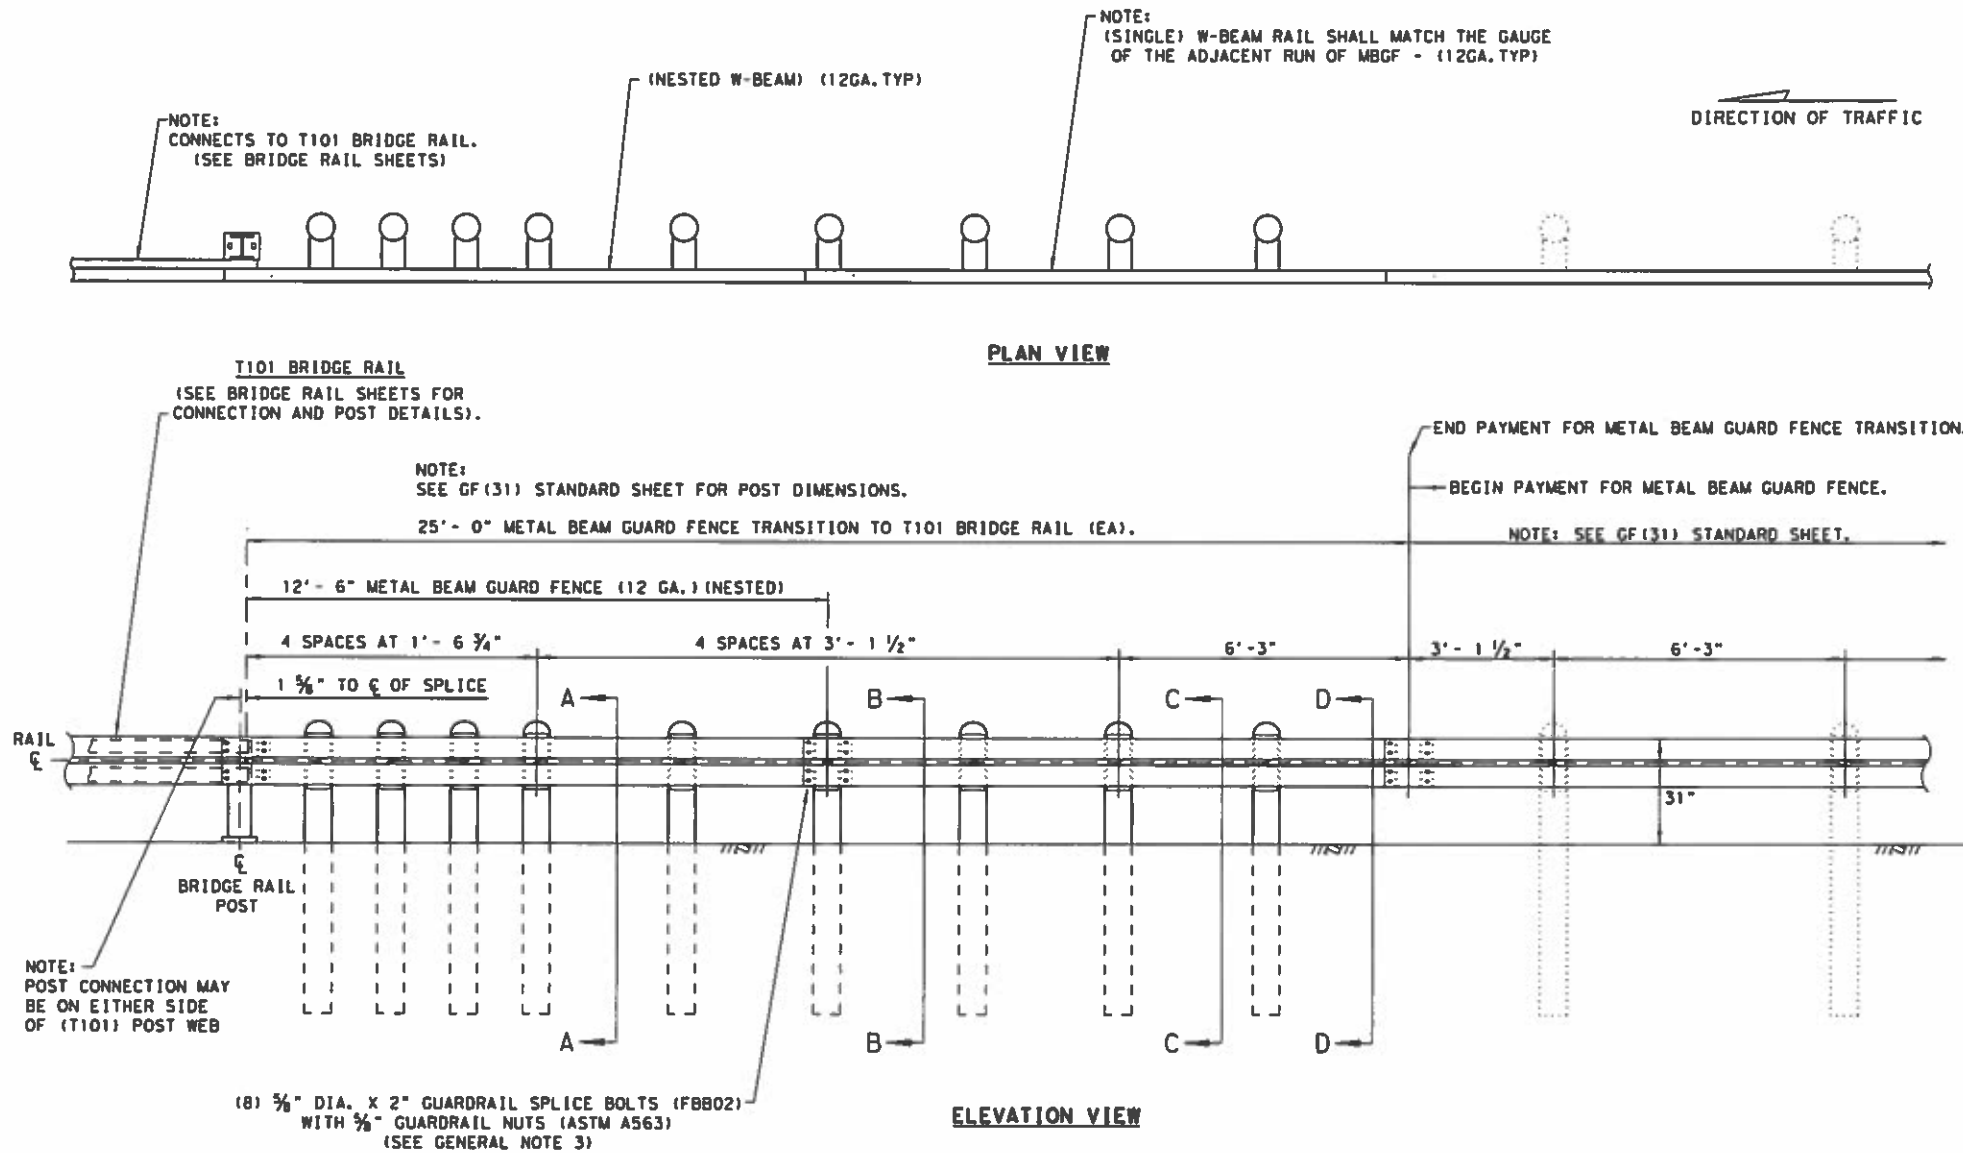


- GENERAL NOTES**
1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
  2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
  3. BUTTON HEAD "POST" BOLTS (ASTM A307 GR. A) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 3/8" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 3/8" X 1-1/4" WITH 3/8" NUTS (ASTM A563).
  4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
  5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
  6. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
  7. POSTS SHALL NOT BE SET IN CONCRETE.
  8. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
  9. REFER TO STANDARD GF(31) AND APPLICABLE BRIDGE RAILING STANDARD FOR ADDITIONAL DETAILS.

\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

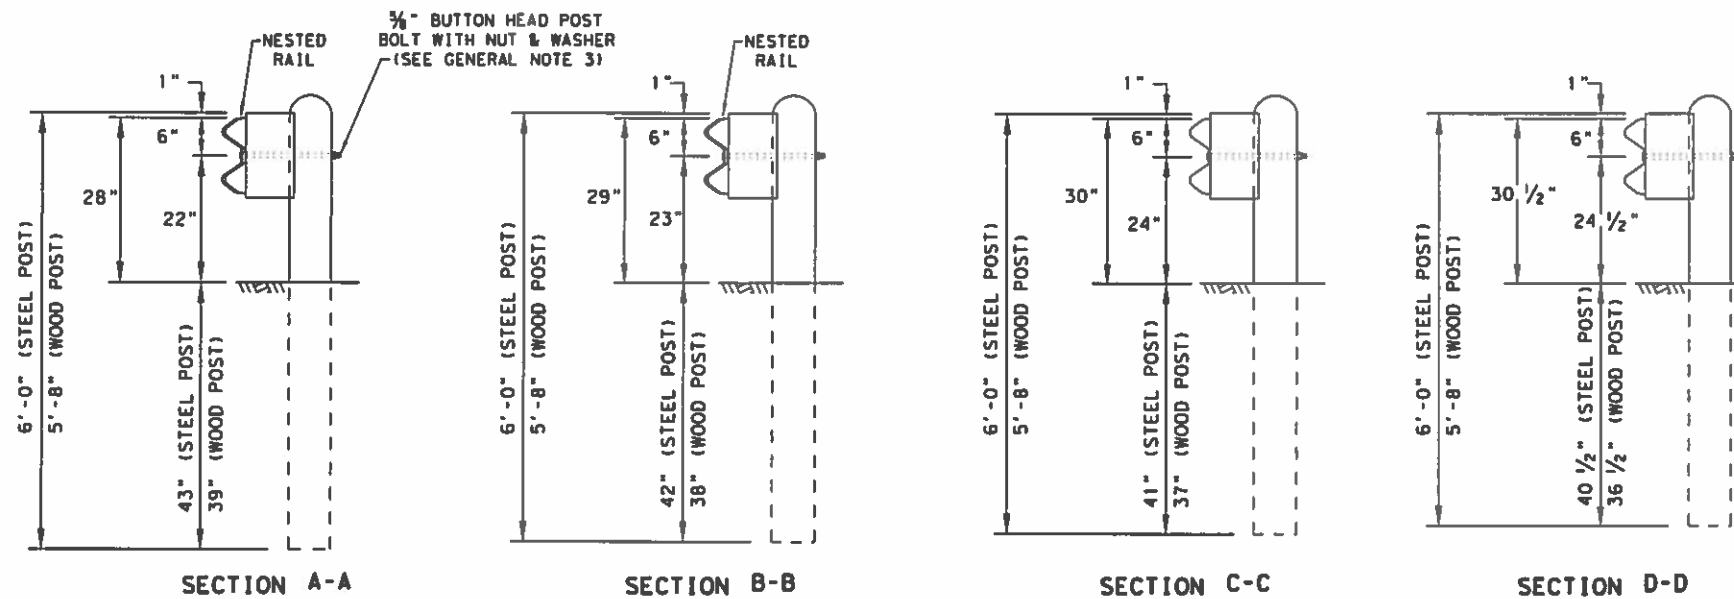

		Design Division Standard	
<b>METAL BEAM GUARD FENCE TRANSITION (T101)</b>			
<b>GF(31)T101-19</b>			
FILE: gf3110119	DN: TxDOT	CR: KM	DR: VP
© TxDOT: NOVEMBER 2019	CON: 6388	SECT: 89	JOB: 001
REVISIONS	DIST: COUNTY		HIGHWAY: US 82; ETC
	PAR: LAMAR; ETC		SHEET NO.: 36


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

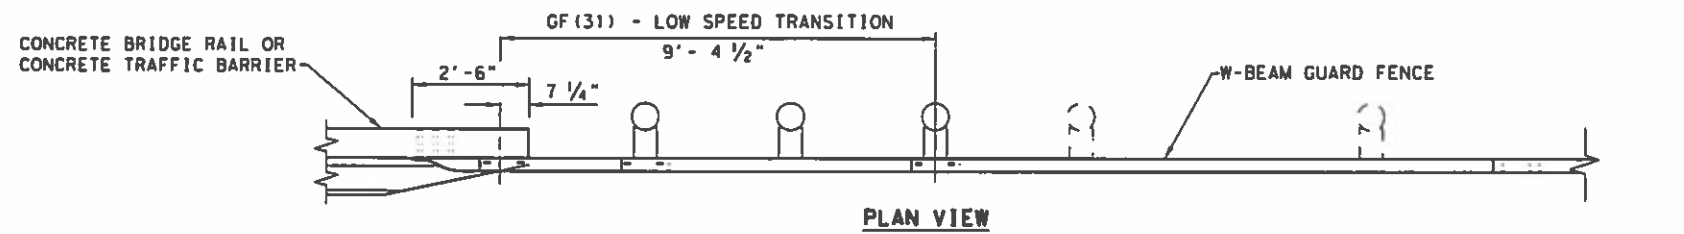




- (5) 3/8" DIA. HEAVY HEX HEAD BOLTS (ASTM A325 OR A449)
  - (10) 1 3/4" O.D. WASHER UNDER EACH HEX BOLT HEAD AND NUT.
  - (5) 3/8" DIA. HEAVY HEX NUTS (ASTM A194 OR A563)
- THRIE-BEAM CONNECTOR TO CONCRETE RAIL

NOTE: HEAVY HEX BOLT LENGTH WILL VARY DEPENDING ON WIDTH CONCRETE RAIL, LEAVE 1" OF BOLT LENGTH PAST THE 3/8" HEX NUT. TRIM AS REQUIRED.

NOTE: CHAMFER REQUIRED ON CONCRETE RAILS THAT EXTEND BEYOND THE FACE OF GUARDRAIL TRANSITION.

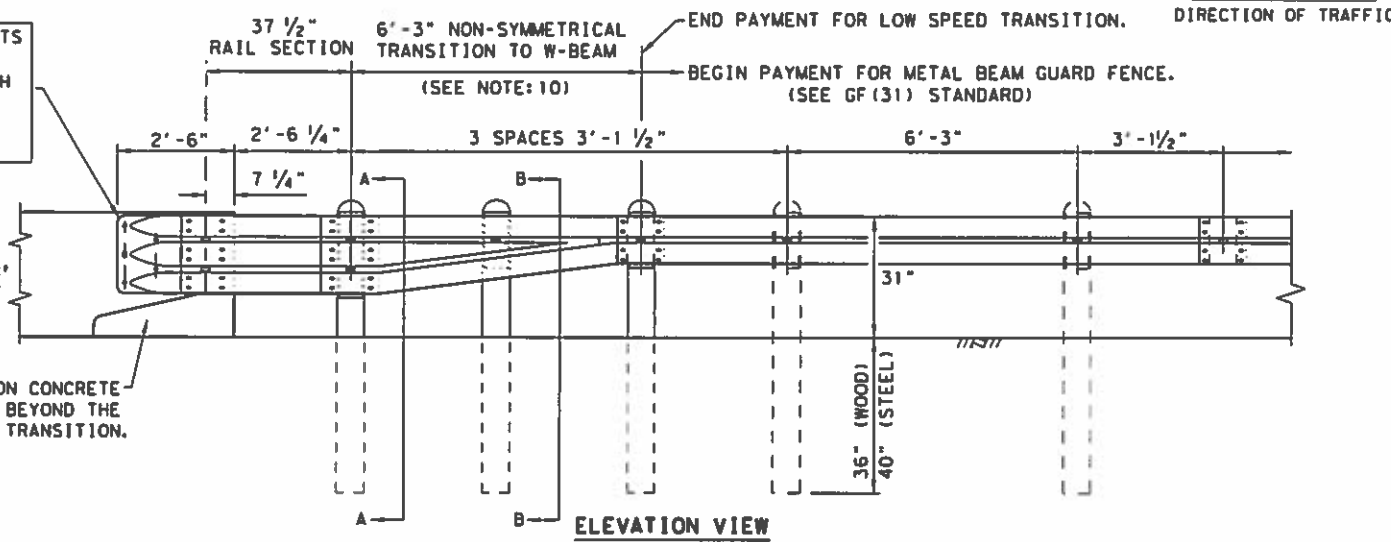

- ### GENERAL NOTES
1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF TRANSITIONS SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. REFER TO GF(31) STANDARD SHEET.
  2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS.
  3. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
  4. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/4" WASHER (FWC16a) AND NOT MORE THAN 1" BEYOND IT. TRIM BOLT LENGTH TO MEET REQUIRED LENGTH.
  5. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
  6. CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
  7. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
  8. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT, MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
  9. REFER TO GF(31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
  10. FOR ROUND WOOD POSTS SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE TRANSITION.



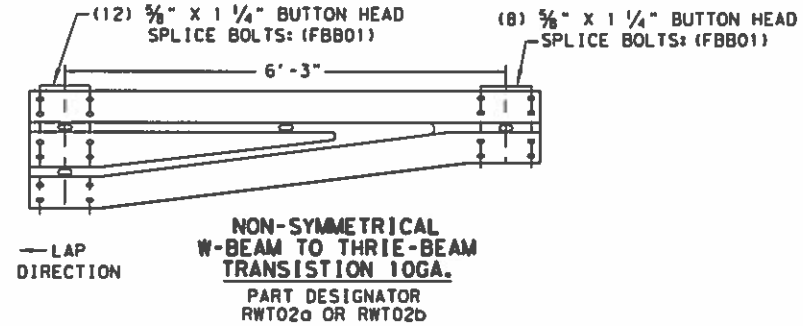

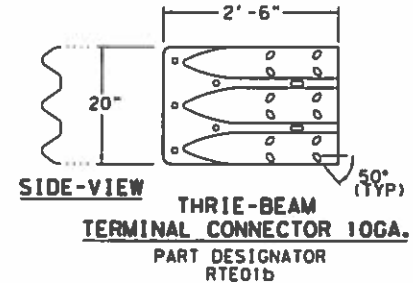


- (2) 3/8" BUTTON HEAD POST BOLTS & NUTS: (FBB04)
- (1) 3/8" FLAT WASHER: (FWC14a) UNDER EACH NUT

- (1) 3/8" BUTTON HEAD POST BOLT & NUT: (FBB04)
- (1) 3/8" FLAT WASHER: (FWC14a) UNDER EACH NUT

PLATE WASHER INSTRUCTIONS

BRIDGE APPROACH - UPSTREAM: THE SHORT RAIL LAPS OVER THE TERMINAL CONNECTOR. PLATE WASHERS ARE INSTALLED UNDER THE SPLICE NUTS AGAINST INSIDE OF CONNECTOR.  
BRIDGE EXIT - DOWNSTREAM: THE TERMINAL CONNECTOR LAPS OVER THE NESTED RAIL. PLATE WASHERS ARE INSTALLED UNDER THE BOLT HEAD AGAINST OUTSIDE OF CONNECTOR.

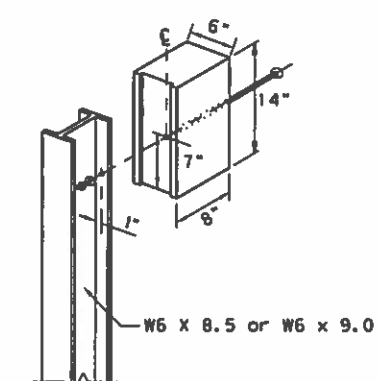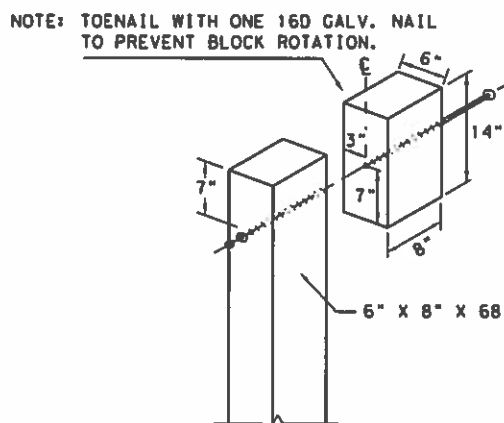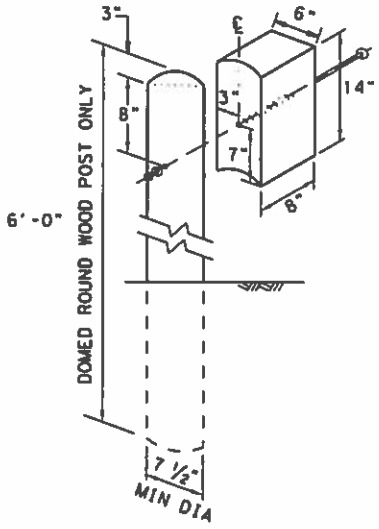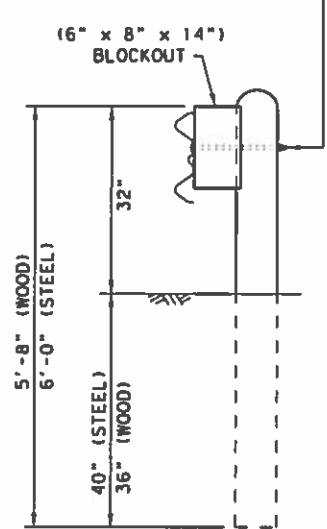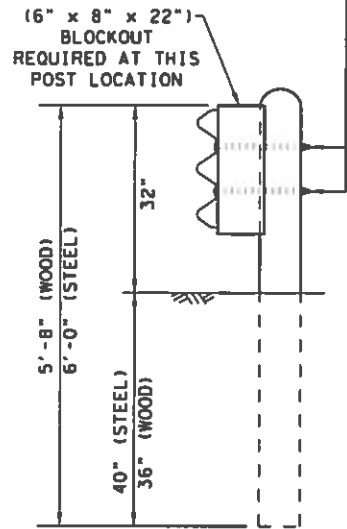

NOTE: \* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

LOW-SPEED TRANSITION






Design Division Standard

## METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-2 MASH COMPLIANT


### GF(31) TR TL2-19

FILE: gf31trtl219.dgn	DR: TxDOT	CR: KM	DM: VP	CK: CGL/AG
© TxDOT: NOVEMBER 2019	CONT: 5388	SECT: 89	JOB: 001	HIGHWAY: US 82; ETC
REVISIONS	DIST	COUNTY	SHEET NO.	
PAR	LAMAR; ETC		37	

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

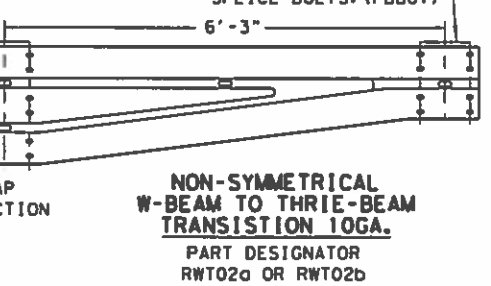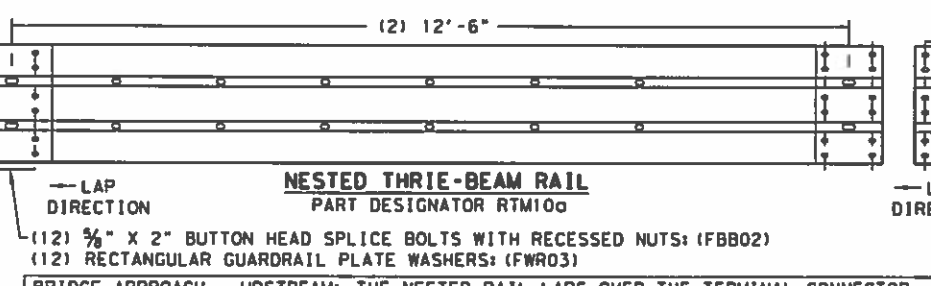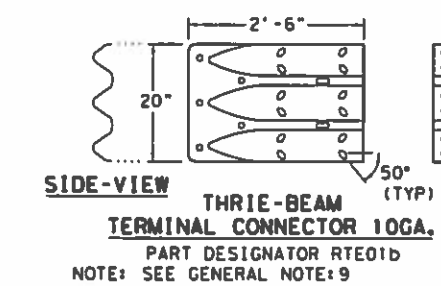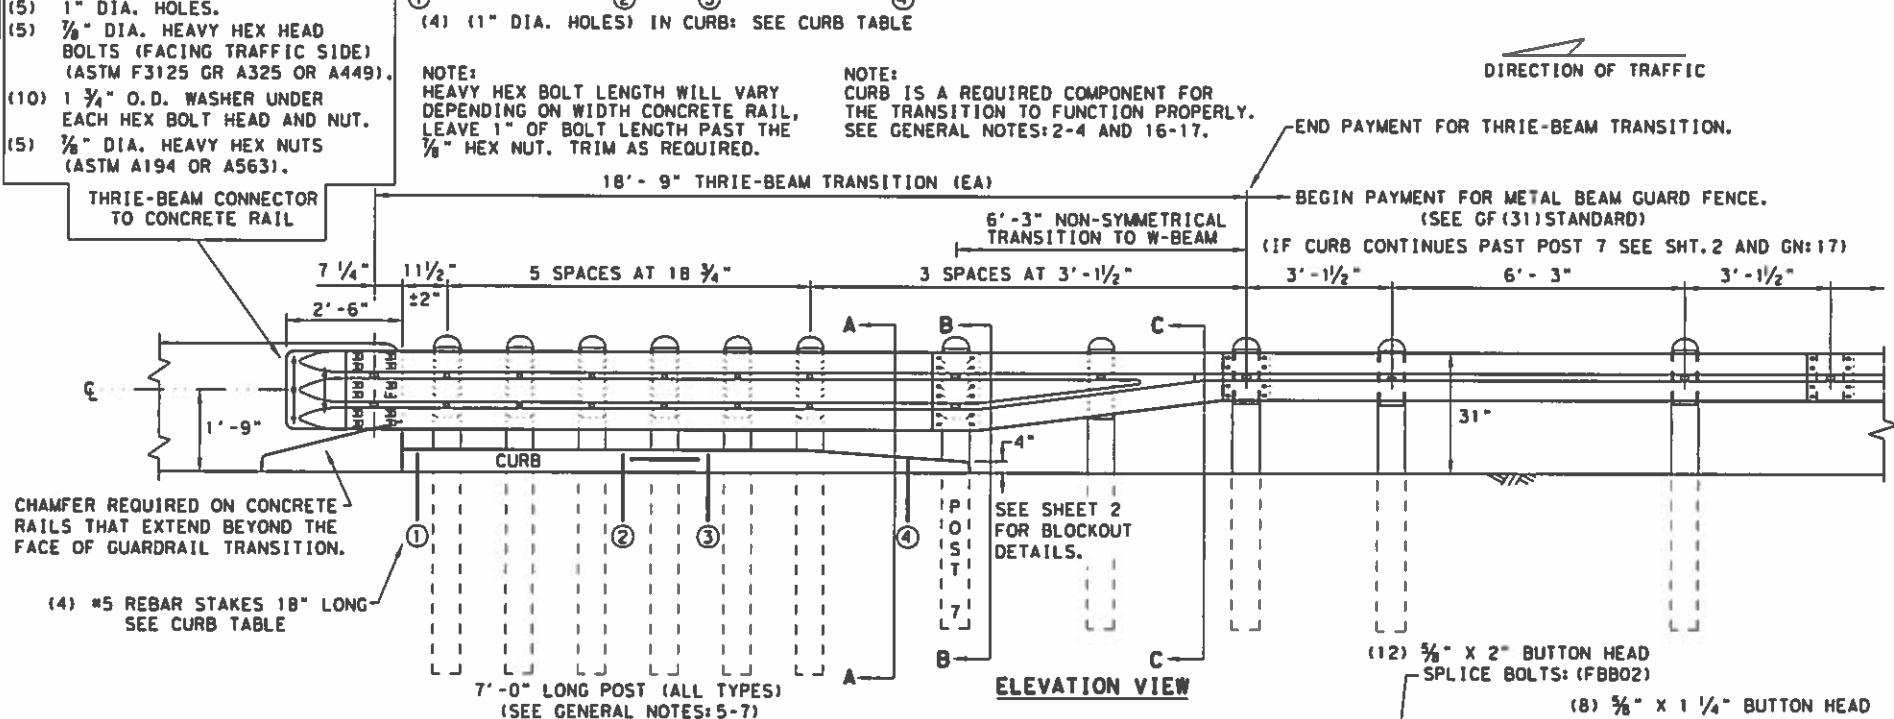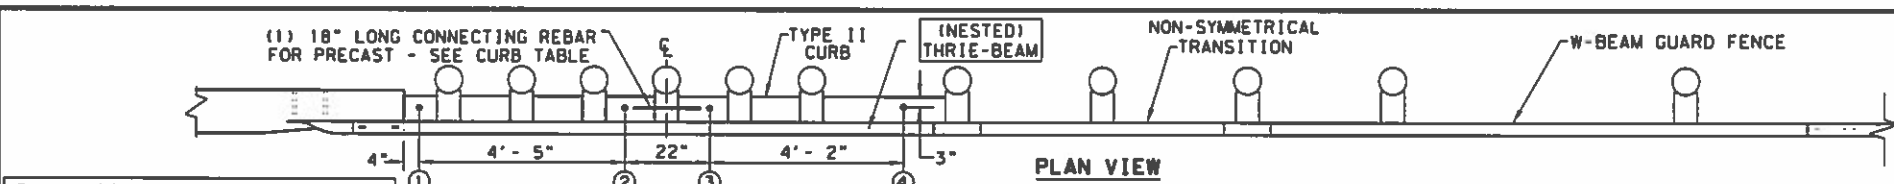


**BRIDGE APPROACH - UPSTREAM:** THE NESTED RAIL LAPS OVER THE TERMINAL CONNECTOR. PLATE WASHERS ARE INSTALLED UNDER THE SPLICE NUTS AGAINST INSIDE OF CONNECTOR.  
**BRIDGE EXIT - DOWNSTREAM:** THE TERMINAL CONNECTOR LAPS OVER THE NESTED RAIL. PLATE WASHERS ARE INSTALLED UNDER THE BOLT HEAD AGAINST OUTSIDE OF CONNECTOR.

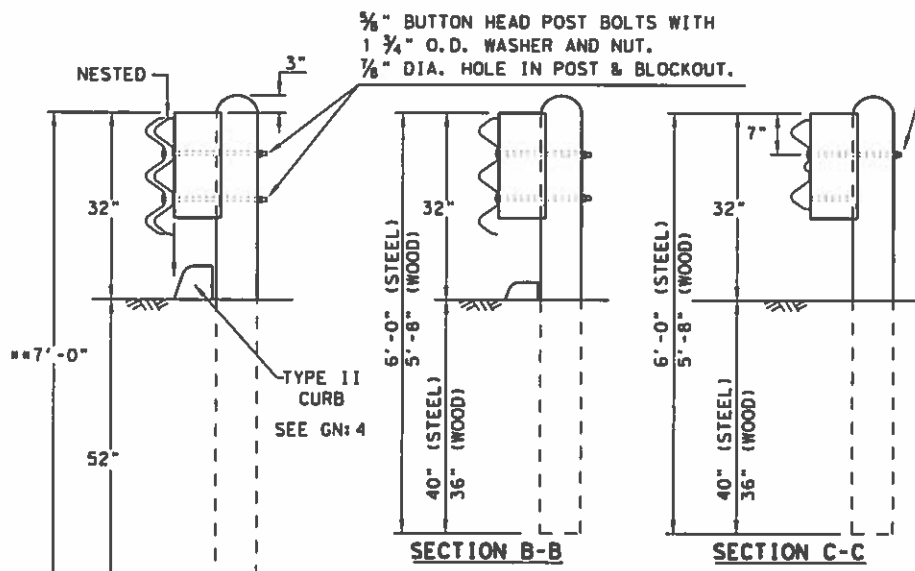

THRIE-BEAM TERMINAL - CURB TABLE	
PRECAST CURB FULL LENGTH EQUALS 12'-2"	
THE PRECAST CURB MAY BE FORMED INTO TWO SECTIONS.	
CURB (1)	LENGTH 5'-8"
CURB (2)	LENGTH 6'-6"
TAPER CURB (2) TO A HEIGHT OF 4" AT POST 7	
CONNECTING PRECAST CURB SECTIONS (1) & (2):	
FORM OR CORE 1" DIA. HOLE 9" LONG INTO EACH CURB END. USE (1) #5 GR.60 REBAR 18" LONG TO CONNECT BOTH CURBS.	
SECURING PRECAST OR CAST-IN-PLACE TO FINISHED GRADE *:	
FORM OR CORE (4) 1" DIA. HOLES, SEE PLAN AND ELEVATION VIEWS FOR HOLE LOCATIONS. DRIVE (4) #5 GR.60 REBAR STAKES 18" LONG INTO THE GROUND AND 1/2" BELOW TOP OF CURB.	
FILL HOLES WITH APPROVED GROUT MIXTURE.	

\* NOTES: NOT NEEDED FOR CAST-IN-PLACE. SEE TYPE II CURB DETAIL FOR REBAR AND COVER REQUIREMENTS. PERCUSSION DRILLING IS NOT PERMITTED WITH: TYPE II CURB, BRIDGE RAIL OR CONCRETE TRAFFIC RAIL.

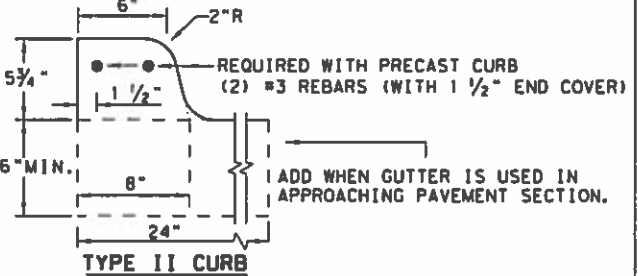

NOTE: OPTIONS FOR TYPE II CURB:  
 1. PRECAST  
 2. CAST-IN-PLACE

**GENERAL NOTES**

- CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
- CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET. WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5'- 3/4" HEIGHT); SEE CURRENT CCG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE: 17 FOR CIRCUMSTANCES WHERE CURB CONTINUES PAST POST 7.
- CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
- UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
- FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
- THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF(31) STANDARD SHEET.
- THE POST LENGTH SHALL BE MARKED ON ALL 7'-0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 3/8" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
- POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
- RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
- BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC16a) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
- FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
- WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
- UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TxDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
- REFER TO GF(31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
- THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
- IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION, (SEE SHT.2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED) (TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED) (STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT.2 FOR ADDITIONAL INFORMATION.

**HIGH-SPEED TRANSITION SHEET 1 OF 2**

		Design Division Standard	
<b>METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-3 MASH COMPLIANT</b>			
<b>GF(31) TR TL3-20</b>			
FILE: gf31tr+1320.dgn	DW: TxDOT	CR: KM	DR: VP
© TxDOT: NOVEMBER 2020	CONT: 6388	SECT: 89	JOB: 001
REVISIONS	DIST: 001	COUNTY: US	HIGHWAY: 82; ETC
PAR: LAMAR; ETC	SHEET NO.:	38	

DATE: FILE:

NOTE: \*\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.




DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE:  
FILE:


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

END PAYMENT FOR METAL BEAM GUARD FENCE TRANSITION. BEGIN PAYMENT FOR METAL BEAM GUARD FENCE.


(SEE GF(31) STANDARD SHEET)

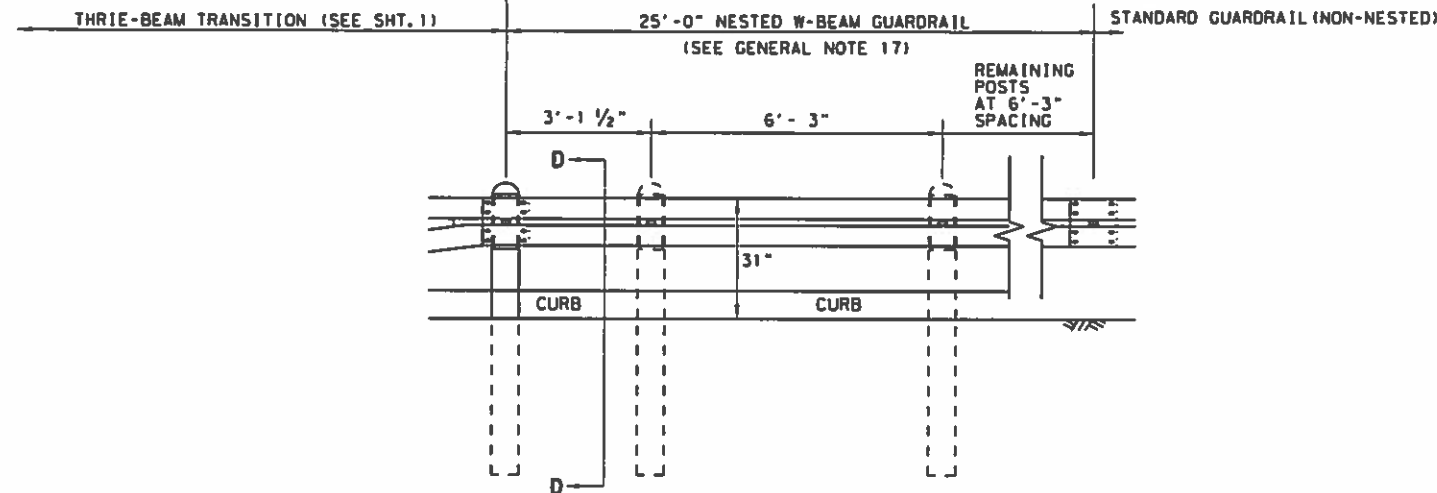

ELEVATION VIEW

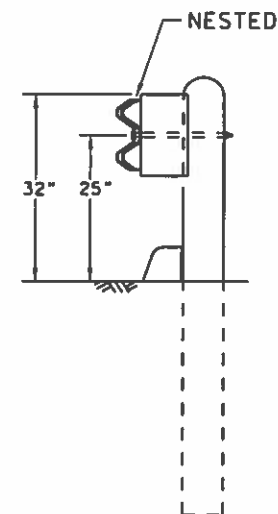

SECTION D-D

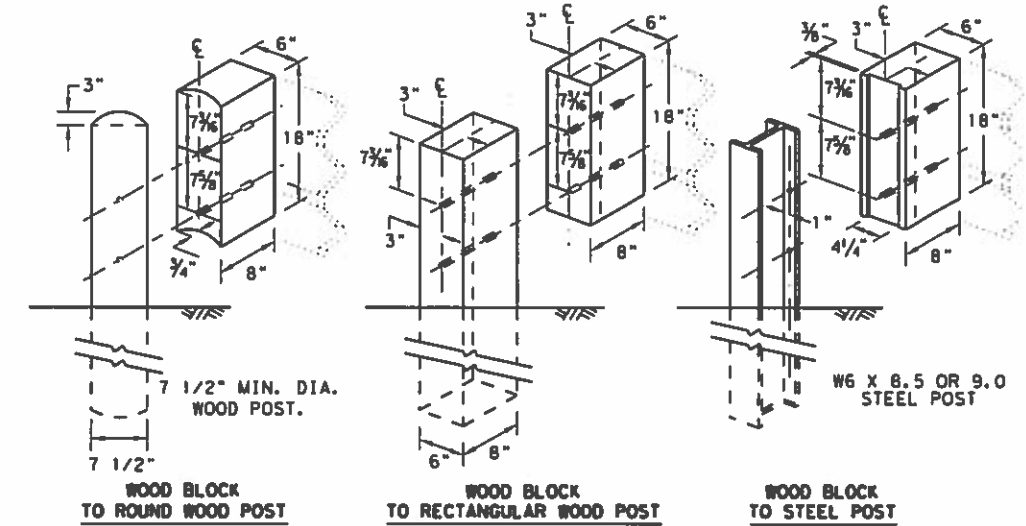

THRIE BEAM TRANSITION BLOCKOUT DETAILS


HIGH-SPEED TRANSITION

SHEET 2 OF 2




		Design Division Standard	
<b>METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-3 MASH COMPLIANT GF(31)TR TL3-20</b>			
FILE: gf31tr+1320.dgn	DN: TxDOT	CK: KM	DR: KM
© TxDOT: NOVEMBER 2020	CONT: 6388	SECT: 89	JOB: 001
REVISIONS	DIST: PAR	COUNTY: LAMAR	US 82; ETC
			SHEET NO. 39

**GENERAL NOTES**

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST" BOLTS (ASTM A307) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 1/4" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPlice" BOLTS (ASTM A307) ARE 3/8" X 1-1/4" WITH 3/4" NUTS (ASTM A563).
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. SEE GF(31) STANDARD FOR INSTALLATION GUIDANCE.
9. POSTS SHALL NOT BE SET IN CONCRETE.
10. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
11. REFER TO STANDARD GF(31) FOR ADDITIONAL DETAILS.
12. RAIL HEIGHT ADJUSTMENT IS ASSESSED AT TL-3 MASH COMPLIANT FOR STEEL POST HEIGHT TRANSITION TO 28" STEEL POST GUARDRAIL.

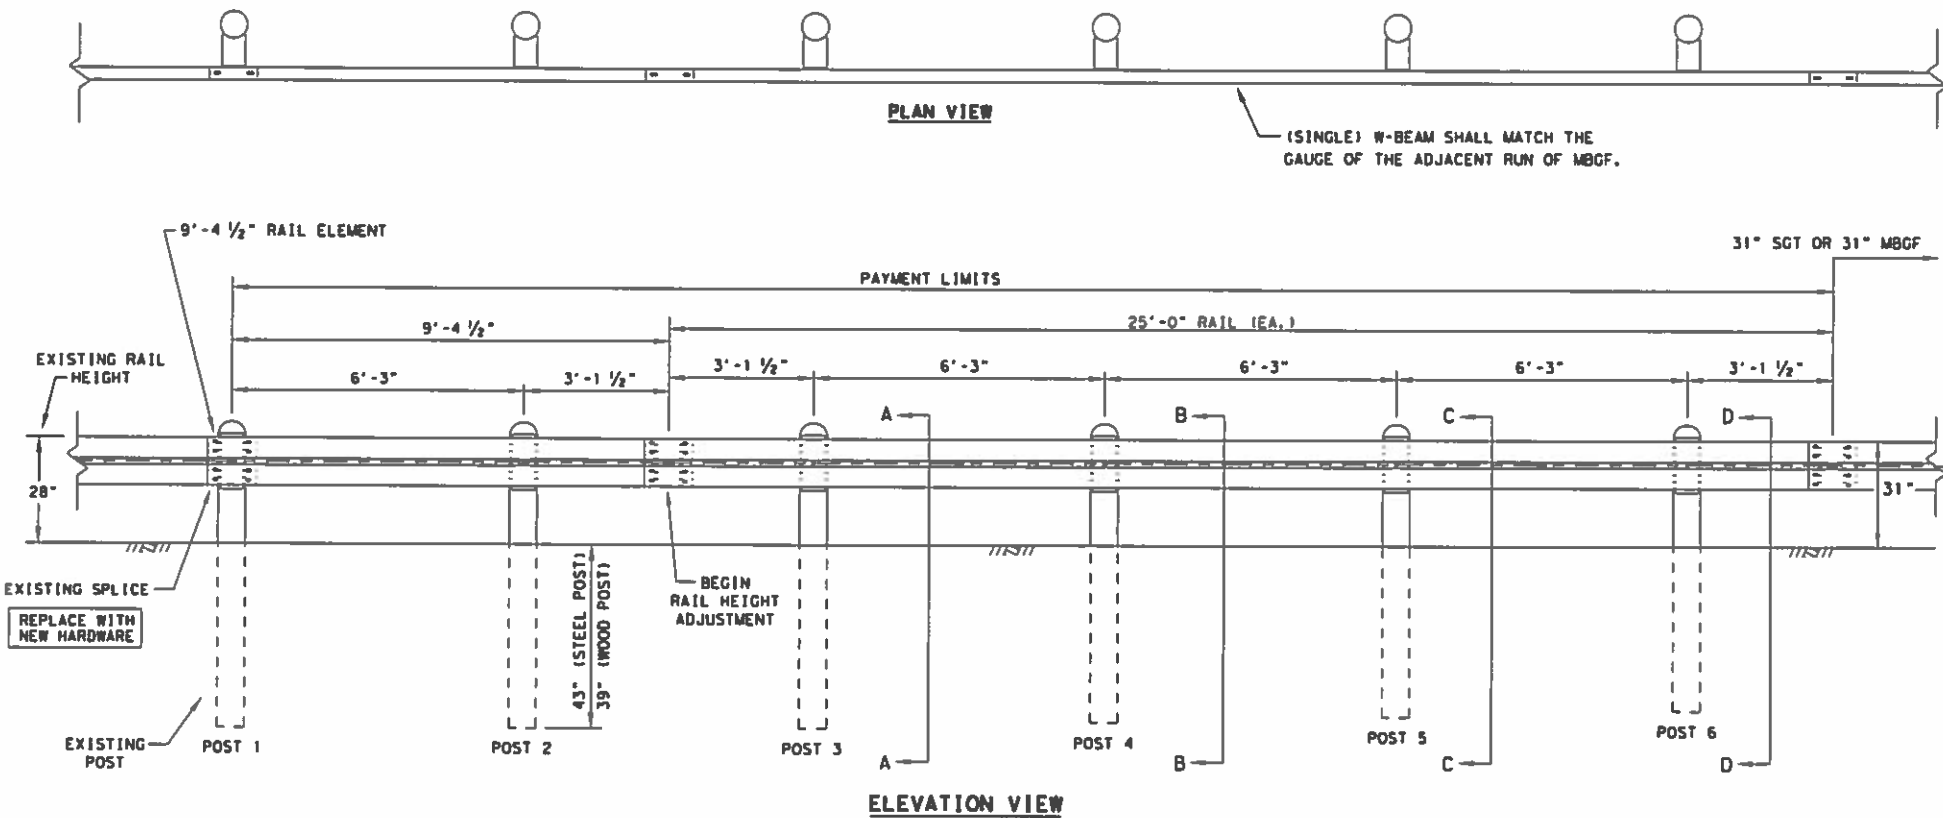

\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

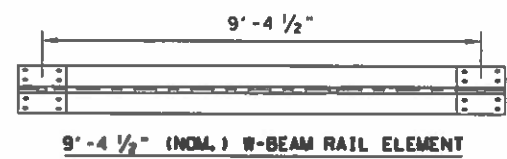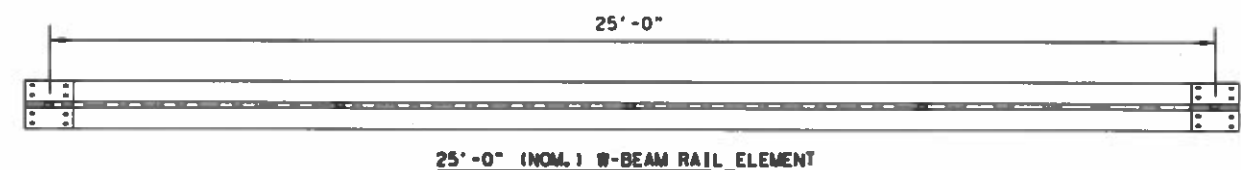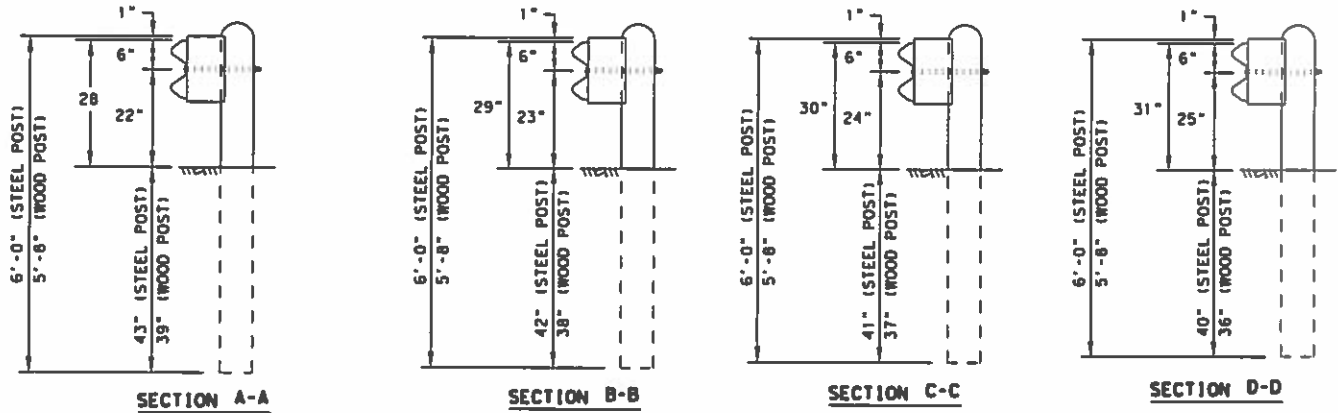

HARDWARE LIST	
QTY	DESCRIPTION
1	9'-4 1/2" W-BEAM RAIL ELEMENT 12GA.
1	25'-0" W-BEAM RAIL ELEMENT 12GA. (TYP)
6	7 1/2" DIA X 6'-0" DOMED ROUND WOOD POSTS (TYP)
6	6" X 8" X 68" RECTANGULAR WOOD POSTS (TYP)
6	W6 X 8.5 OR W6 X 9 X 72" STEEL POSTS (TYP)
6	6" X 8" X 14" WOOD BLOCKS OR COMPOSITE (TYP)
6	3/8" X 18" GUARDRAIL BOLTS WITH NUTS (FBB04)
6	3/8" ROUND WASHERS (ASTM F436) (FWC160)
6	3/8" X 10" GUARDRAIL BOLTS WITH NUTS (FBB03)
24	3/8" X 1-1/4" GUARDRAIL SPLICE BOLTS WITH DOUBLE RECESSED NUTS (ASTM A563) (FBB01)


POST AND BLOCK-OUT TYPES AVAILABLE

FOR WOOD POST

FOR STEEL POST

NOTE: HARDWARE SHALL MEET THE FOLLOWING REQUIREMENTS.

GUARDRAIL POST BOLTS (ASTM A307 GR. A)  
 GUARDRAIL ROUND WASHERS (ASTM F436)  
 GUARDRAIL DOUBLE RECESSED NUTS (ASTM A563)  
 GUARDRAIL SPLICE BOLTS (ASTM A307 GR. A)  
 GUARDRAIL SPLICE NUTS (ASTM A563)

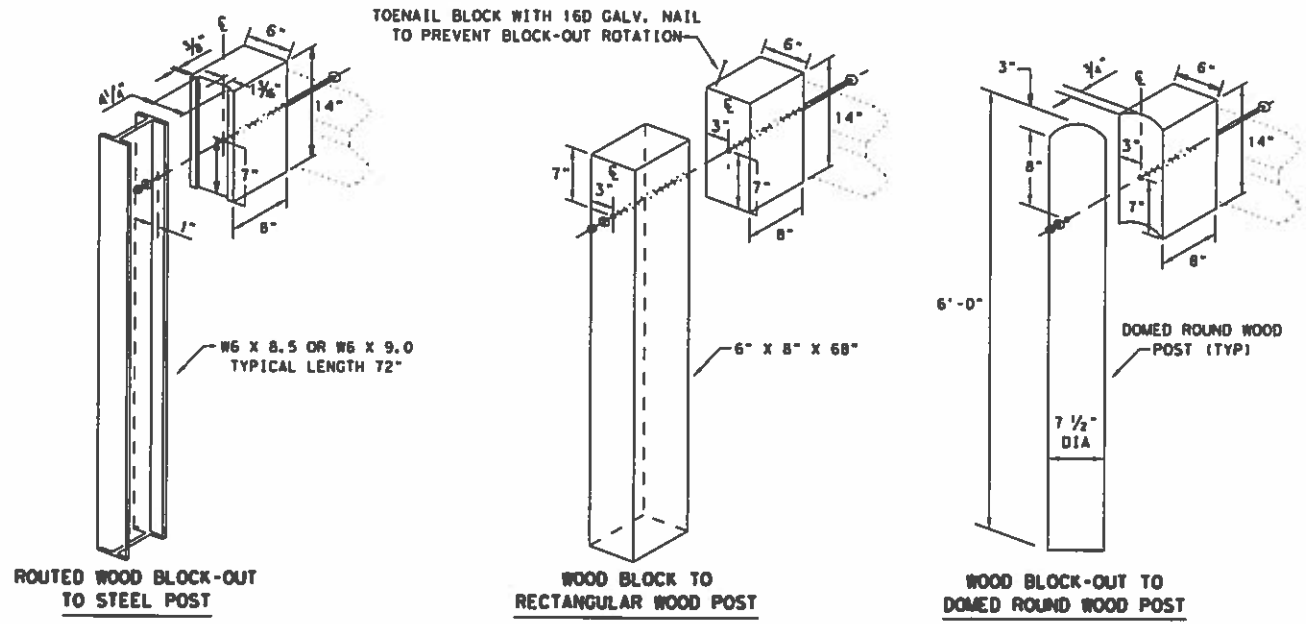

**Texas Department of Transportation** Design Division Standard


**METAL BEAM GUARD FENCE  
 RAIL HEIGHT ADJUSTMENT  
 (28" TO 31")  
 TL-3 MASH COMPLIANT  
 RAIL-ADJ(A)-19**

FILE: railadj19	DATE: NOV 2019	CHK: KM	DWG: VP	CHK: CGL/AG
© TXDOT: NOVEMBER 2019	CONT: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82; ETC
REVISIONS	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO. 40	


DISCLAIMER: THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

**GENERAL NOTES**

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST" BOLTS (ASTM A307) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 3/8" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 5/8" X 1-1/4" WITH 3/8" NUTS (ASTM A563).
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. SEE GF(31) STANDARD FOR INSTALLATION GUIDANCE.
9. POSTS SHALL NOT BE SET IN CONCRETE.
10. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
11. REFER TO STANDARD GF(31) FOR ADDITIONAL DETAILS.
12. RAIL HEIGHT ADJUSTMENT IS ASSESSED AT TL-3 MASH COMPLIANT FOR STEEL POST HEIGHT TRANSITION TO 28" STEEL POST GUARDRAIL.

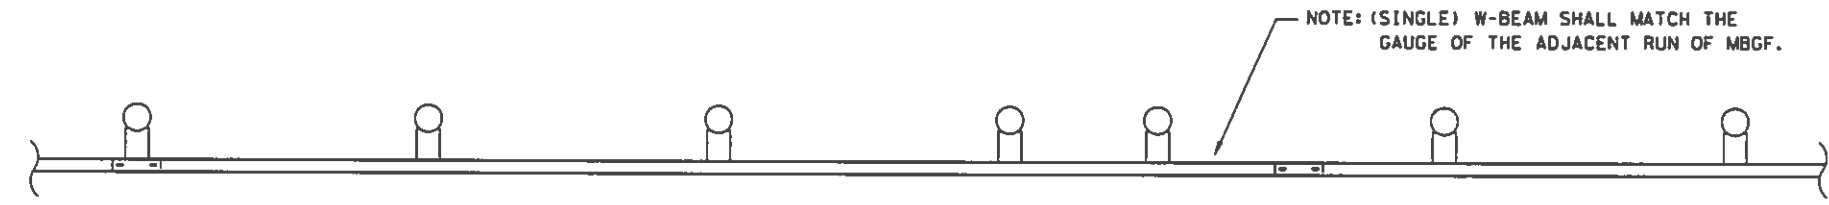

**PLAN VIEW**

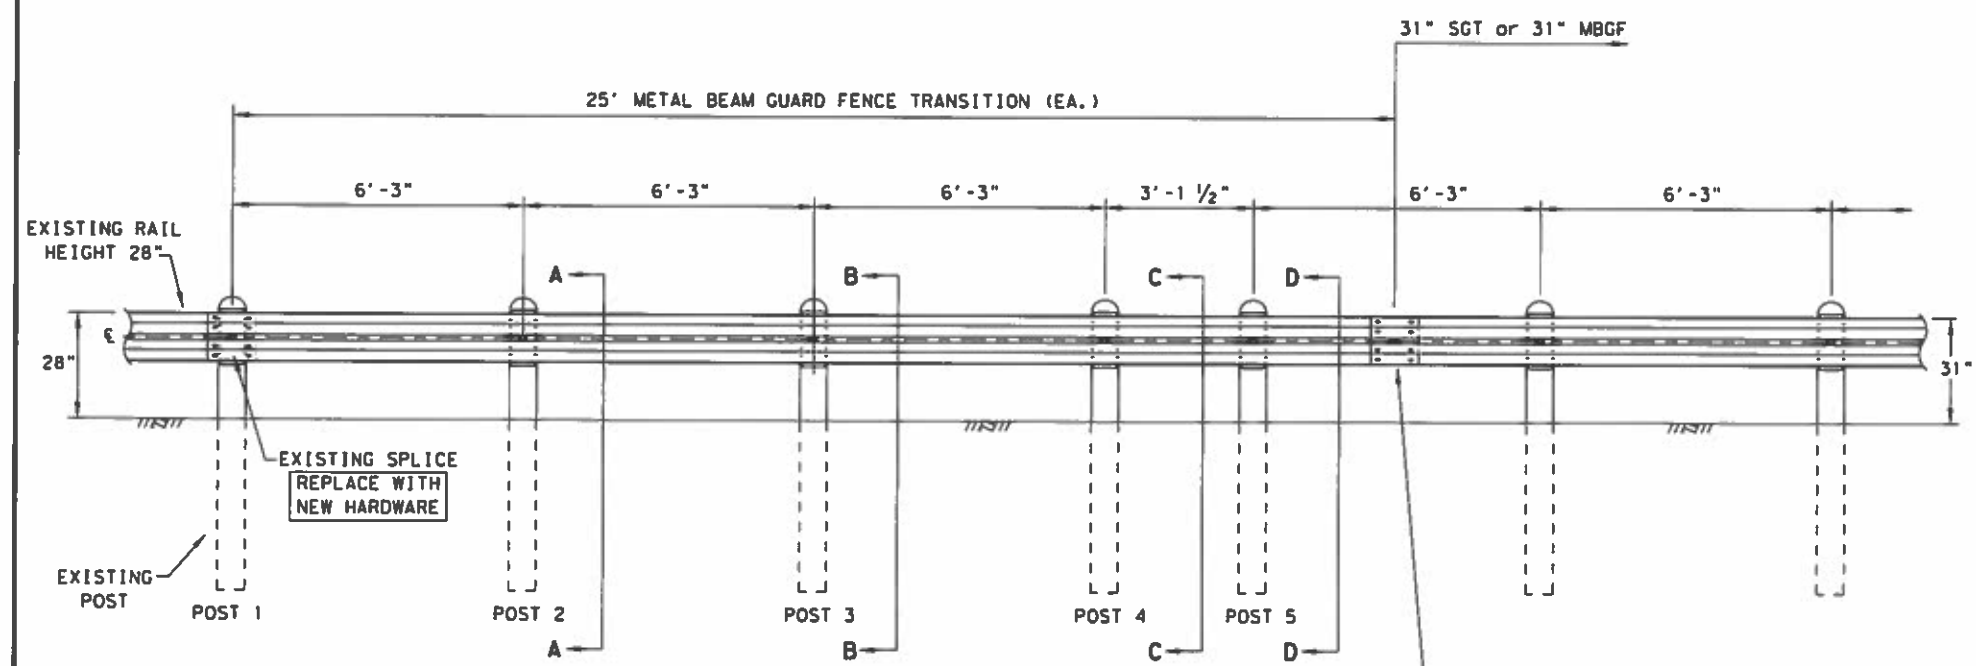

**ELEVATION VIEW**

\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.


(8) 5/8" DIA. X 1 1/4" GUARDRAIL SPLICE BOLTS WITH 3/8" NUTS (ASTM A563). (SEE GENERAL NOTE 3).

HARDWARE LIST	
QTY	DESCRIPTION
1	25'-0" W-BEAM RAIL ELEMENT 12GA. (TYP)
5	7 1/2" DIA X 6'-0" DOMED ROUND WOOD POSTS (TYP)
5	6" X 8" X 68" RECTANGULAR WOOD POSTS (TYP)
5	W6 X 8.5 OR W6 X 9 X 72" STEEL POSTS (TYP)
5	6" X 8" X 14" WOOD BLOCKS OR COMPOSITE (TYP)
5	5/8" X 18" GUARDRAIL BOLTS AND NUTS (FBB04)
5	3/8" ROUND WASHERS (ASTM F436) (FWC160)
5	5/8" X 10" GUARDRAIL BOLTS AND NUTS (FBB03)
16	5/8" X 1-1/4" GUARDRAIL SPLICE BOLTS WITH DOUBLE RECESSED NUTS (ASTM A563) (FBB01)

POST AND BLOCK-OUT TYPES AVAILABLE

FOR WOOD POST

FOR STEEL POST

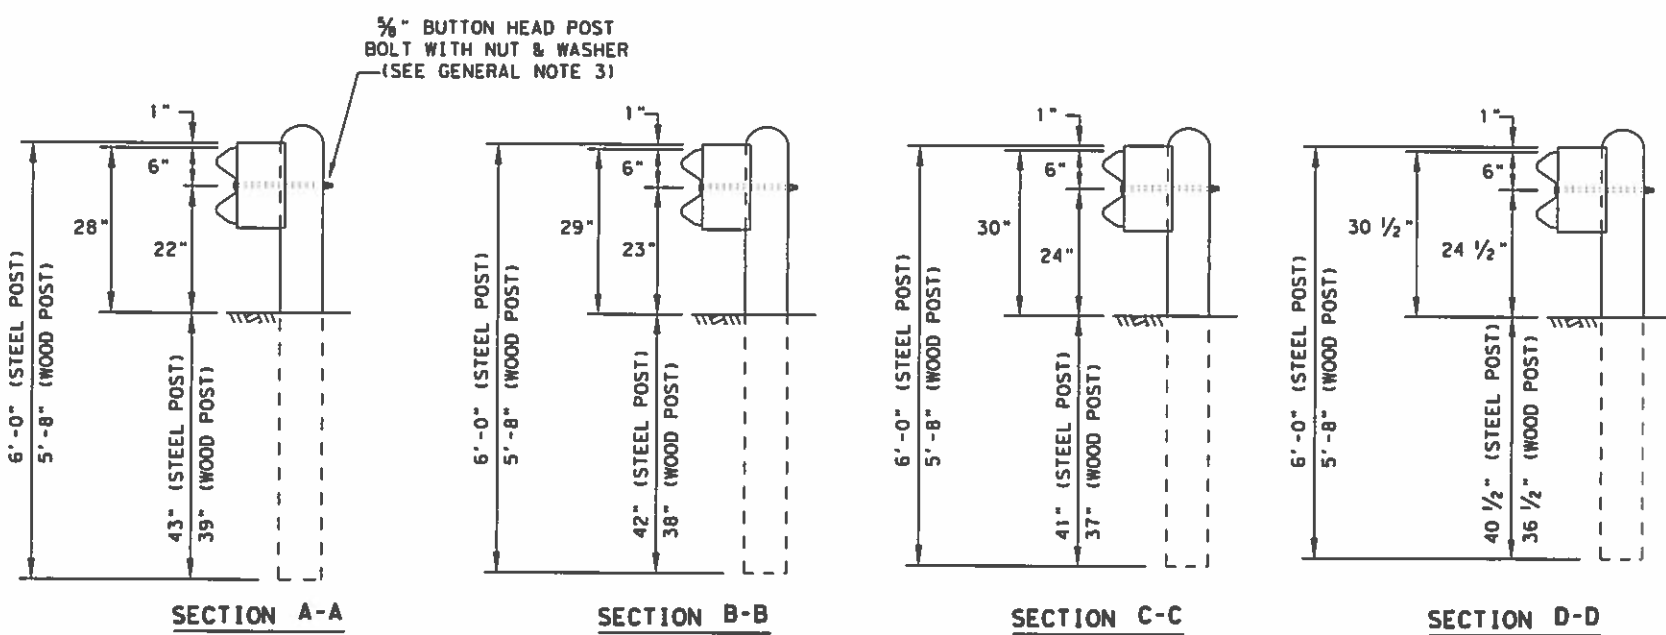

NOTE: HARDWARE SHALL MEET THE FOLLOWING REQUIREMENTS.  
 GUARDRAIL POST BOLTS (ASTM A307 GR. A)  
 GUARDRAIL ROUND WASHERS (ASTM F436)  
 GUARDRAIL DOUBLE RECESSED NUTS (ASTM A563)  
 GUARDRAIL SPLICE BOLTS (ASTM A307 GR. A)  
 GUARDRAIL SPLICE NUTS (ASTM A563)

**Texas Department of Transportation** Design Division Standard




**METAL BEAM GUARD FENCE  
 RAIL HEIGHT ADJUSTMENT  
 (28" TO 31")  
 TL-3 MASH COMPLIANT  
 RAIL-ADJ(B)-19**

FILE: railadjb19	DN: TxDOT	CR: KM	DN: VP	CR: CGL/AG
© TxDOT: NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82; ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	41	

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

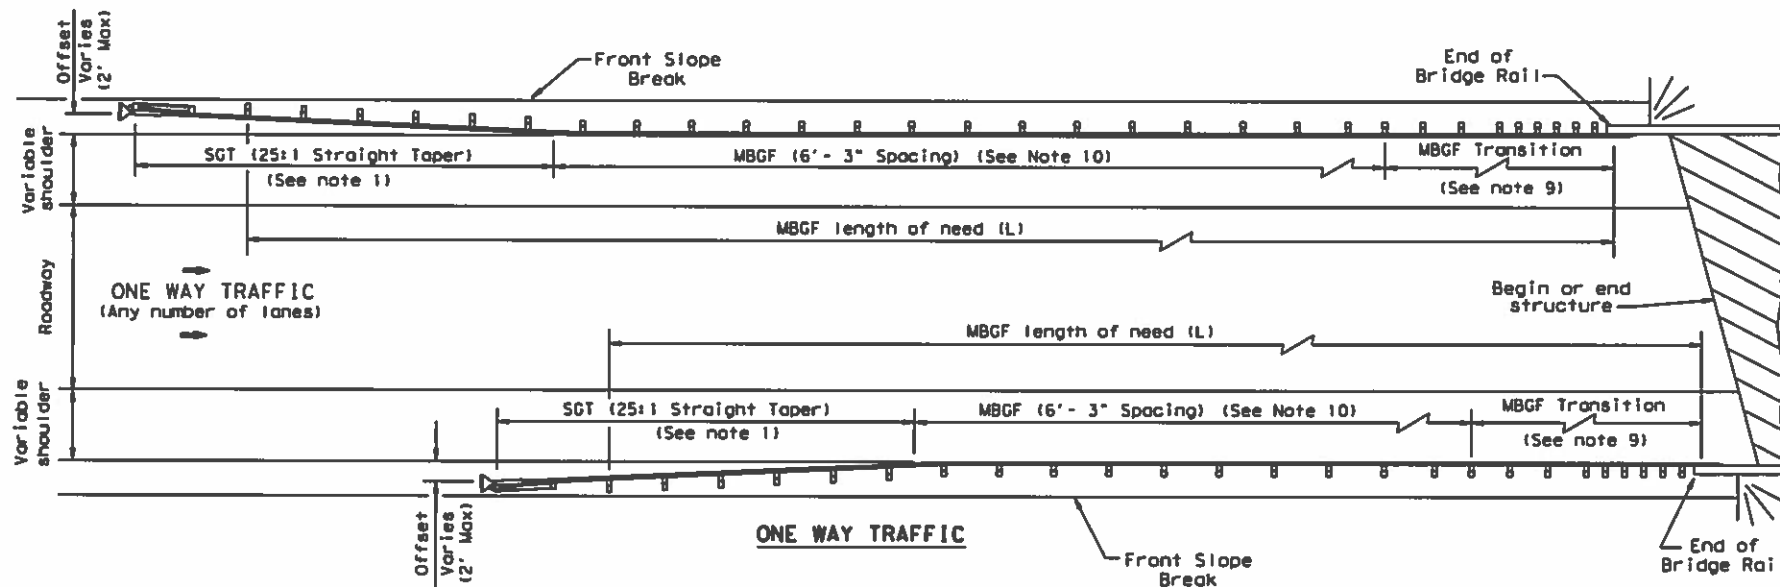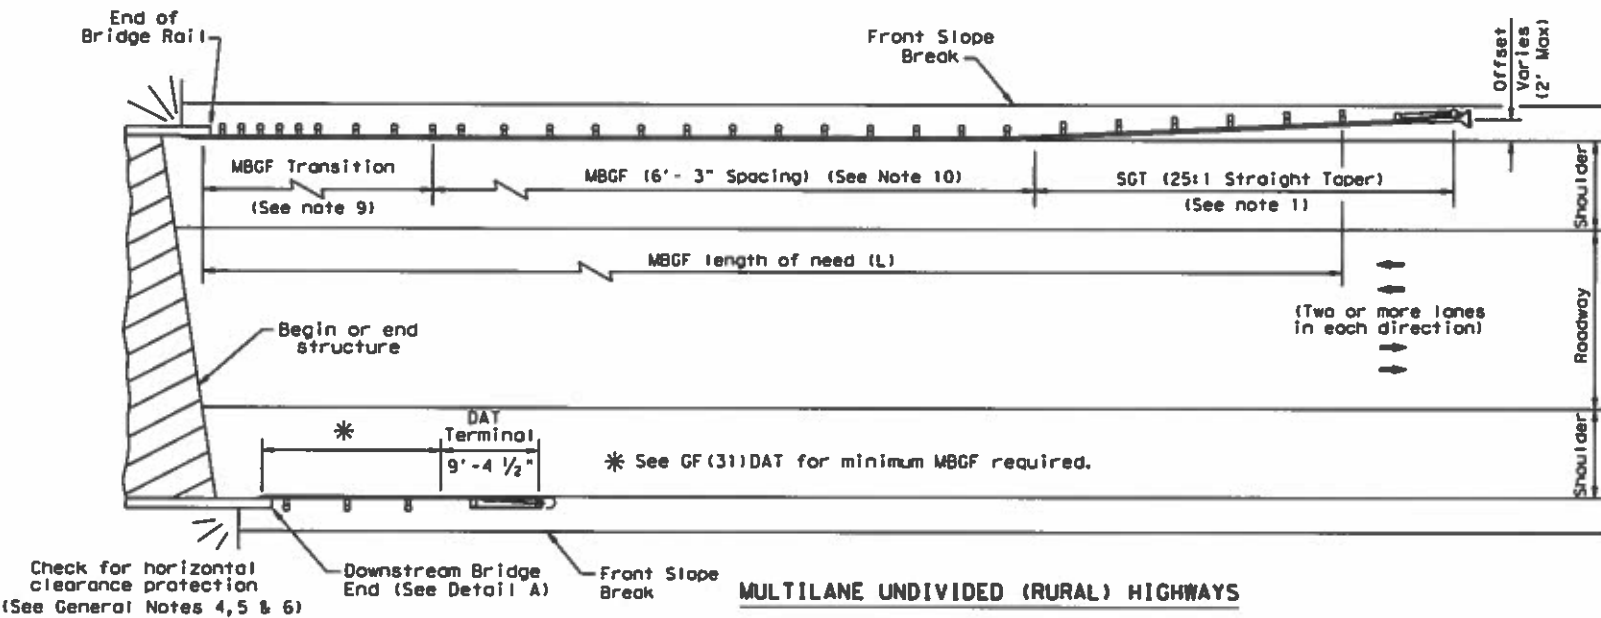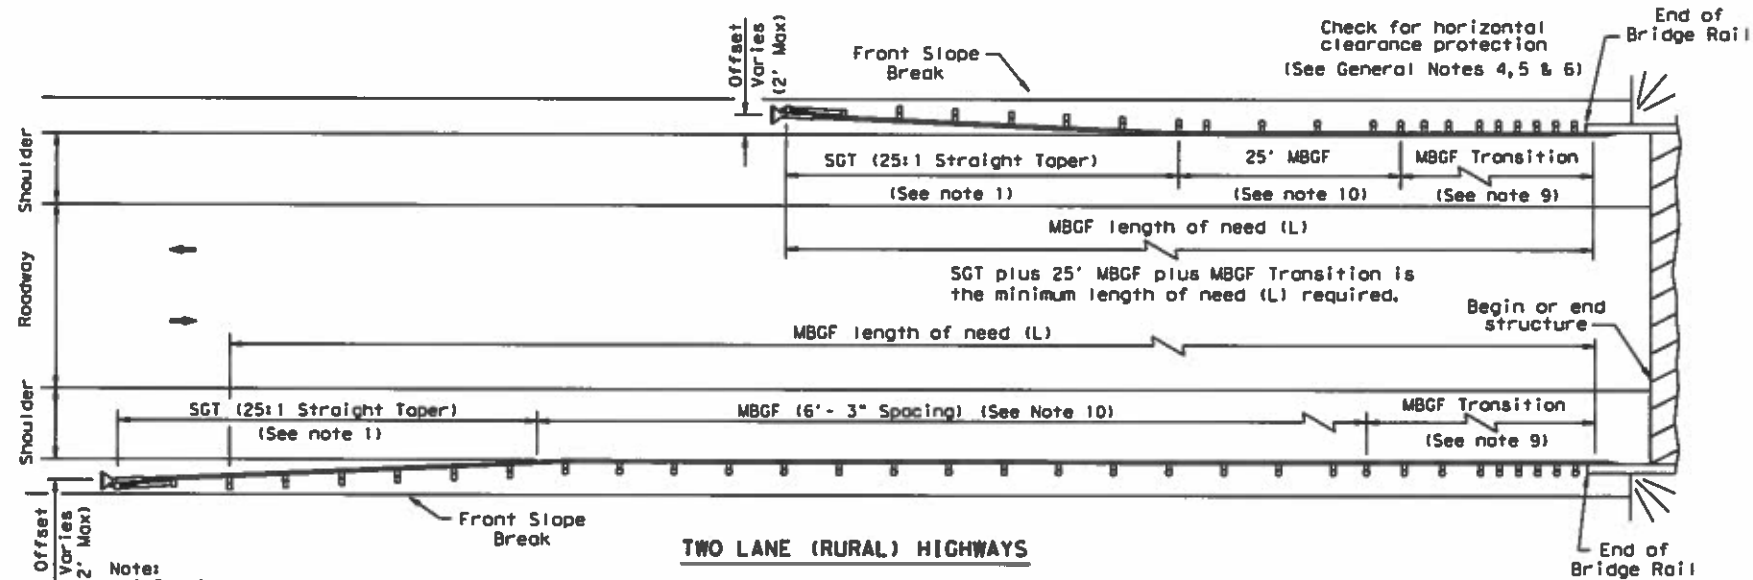

**GENERAL NOTES**

- For more detail: See GF (31), SGT (131), GF (31)TR, and GF (31)TL2 standard sheets.
- Quantities of metal beam guard fence (MBGF) at individual bridge ends are as shown in the plans.
- Use average daily traffic (ADT) for the current year to determine MBGF length of need in accordance with the Roadway Design Manual unless otherwise specified. Where significant traffic volume growth is anticipated on low volume (0-750 ADT) highways, use length determinations for the higher volume category.
- MBGF may not be required to shield departure end of bridge unless other obstacles within the horizontal clearance limits or opposing traffic indicate a MBGF consideration.
- Downstream anchor terminals (DAT) are only for downstream end anchorage use, outside the horizontal clearance area of opposing traffic.
- Direct connection of MBGF to concrete rails are only for downstream rail connections outside the horizontal clearance area of opposing traffic. (This requires a minimum of three standard line posts plus the DAT terminal, See Detail A)
- The crown shall be widened to accommodate MBGF. Typically the "front slope" break should be 2' - 0" from the back of the MBGF post. This applies to new construction on new alignment or where existing roadway cross section is to be widened to increase roadway width. This does not apply to rehabilitation work where existing roadway crown width is to be retained (See Typical Cross Section at MBGF).
- For restrictive bridge widths: The MBGF should be properly transitioned from the existing bridge rail to the adjoining MBGF (See MBGF Transition Standards). Metal beam guard fence at these bridge location(s) shall be flared at the rate of 25:1 or flatter, and be of the length necessary to locate the terminal end at the 2 ft. "maximum" offset from the shoulder edge in the approach direction.
- Transition length and post spacing will vary depending on the transition type. Transition type will be shown elsewhere in the plans.
- A minimum 25' length of MBGF will be required.

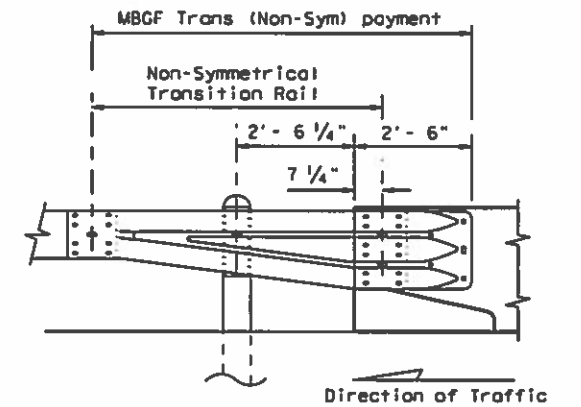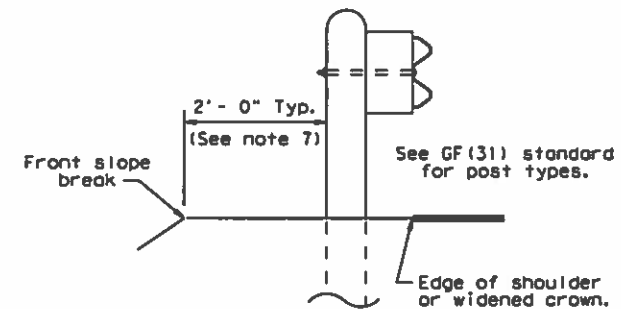

Note: All rail elements shall be lapped in the direction of adjacent traffic.

Texas Department of Transportation Design Division Standard

**BRIDGE END DETAILS (METAL BEAM GUARD FENCE APPLICATIONS TO RIGID RAILS)**


**BED-14**

FILE: bed14.dgn	DN: TxDOT	CR: AM	DR: BD/VP	CR: CGL
© TxDOT: December 2011	CON: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82 ETC
REVISIONS	DIST: PAR	COUNTY: LAMAR, ETC.	SHEET NO.:	42




DISCLAIMER: The use of this standard is governed by the Texas Engineering Practice Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

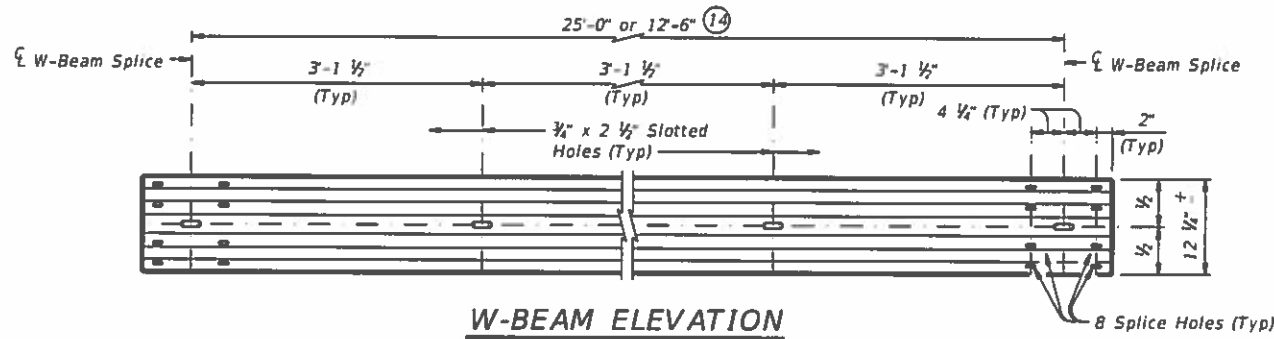


**W-BEAM ELEVATION**

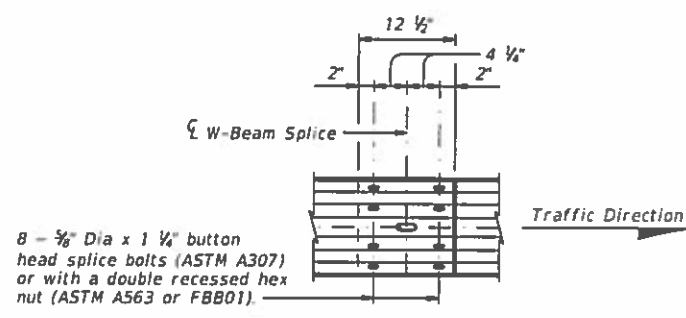


**W-BEAM SPICE ELEVATION**

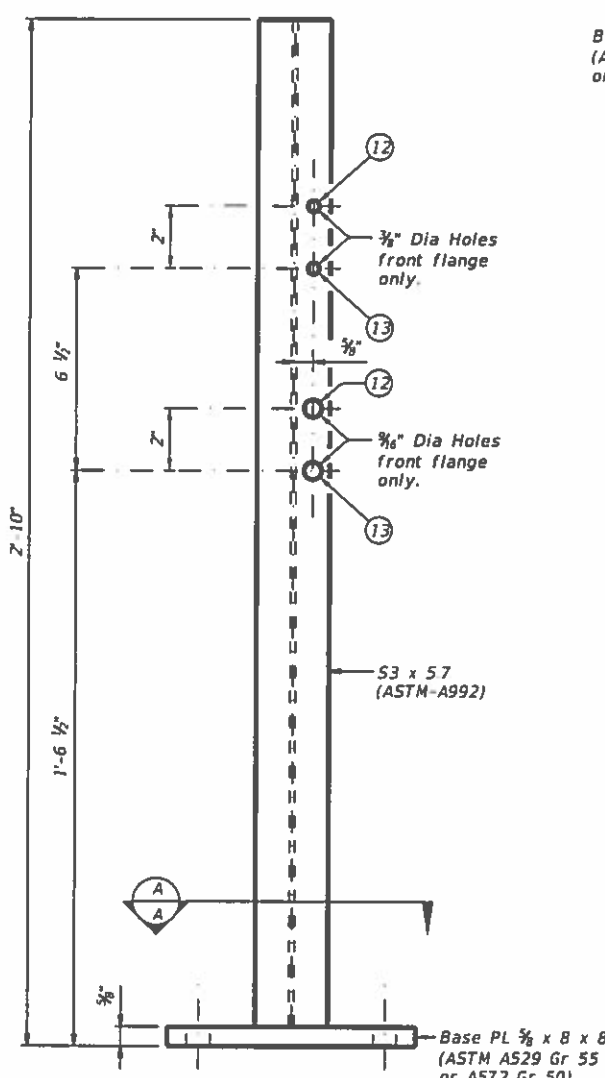

**POST ELEVATION**

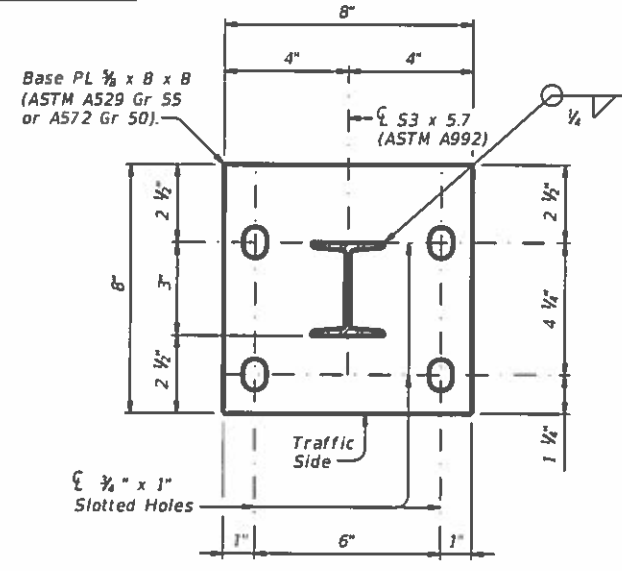


**SECTION A-A**

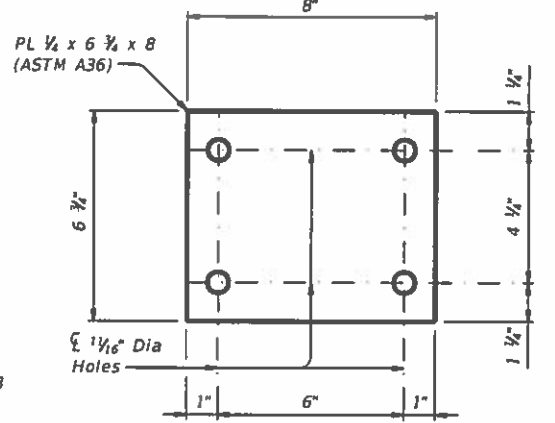


**WASHER PLATE DETAIL**

5/8" Dia heavy hex head anchor bolt (ASTM F3125 Gr A325 or A449) or threaded rod (ASTM A193 Gr B7 or F1554 Gr 105) with one hardened steel washer (ASTM F436) and one regular lock washer placed under heavy hex nut (ASTM A563). One additional heavy hex nut must be furnished and tack welded for each threaded rod.




**CAST-IN-PLACE & FORMED HOLE ANCHOR BOLT OPTIONS**

- 9 See "Rail Details On Bridge Slab" and/or "Rail Section On Abutment Wingwall".
- 10 See "Material Notes" for anchor bolt information.
- 11 Backer PL 1/4" x 8" x 1'-3" (ASTM A1011 CS or SS Gr 33, or A1008 CS or SS Gr 33 (11 Gage acceptable)).
- 12 Used for structures with overlay.
- 13 Used for structures without overlay.
- 14 At the nominal end of the bridge rail for payment, one 9'-4 1/2" or 6'-3" W-beam section is permitted in order to achieve the required W-Beam splice location on the MBGF.

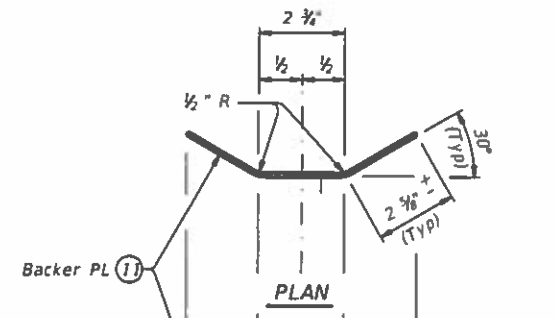

**PLAN**

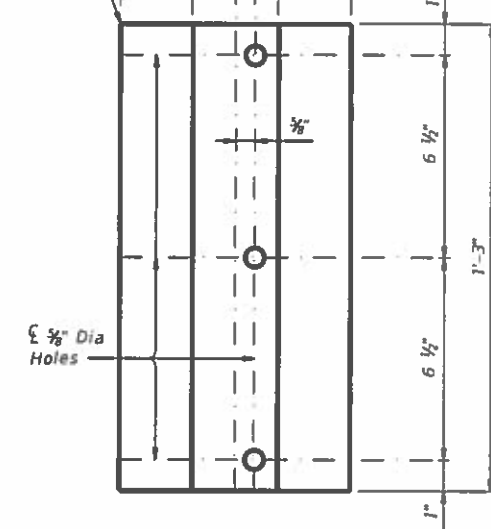

**ELEVATION**

**BACKER PLATE**

**MBGF AND END TREATMENT NOTES:**  
This traffic railing must be anchored by metal beam guard fence (MBGF) and guard fence end treatments. Determine MBGF length of need in accordance with the Roadway Design Manual, unless otherwise specified. The minimum MBGF length of need required for anchoring the railing is 25' of MBGF plus the appropriate end treatment.

**CONSTRUCTION NOTES:**  
Face of rail post must be plumb unless otherwise approved by the Engineer. Post must be perpendicular to adjacent roadway grade. Use epoxy mortar under post base plates if gaps larger than 1/16" exist.  
Fully anchored guardrail must be attached to each end of rail. A metal beam guard fence transition is not used with this rail. At the Contractor's option anchor bolts may be an adhesive anchor system. See "Material Notes".  
Test adhesive anchors in accordance with Item 450.3.3, "Tests". Test 3 anchors per 100 anchors installed. Perform corrective measures to provide adequate capacity if any of the tests do not meet the required test load. Repair damage from testing as directed.  
It is recommended to show a Rail Layout with rail posts and W-beam splices. Fabricator must submit erection drawings to the Engineer for approval.  
Round or chamfer exposed edges of rail post and backer plate to approximately 1/16" by grinding.  
Shop drawings are not required for this rail.

**MATERIAL NOTES:**  
Galvanize all steel components.  
Anchor bolts for base plate must be 5/8" Dia ASTM F3125 Gr A325 or A449 bolts (or ASTM A193 Gr B7 or F1554 Gr 105 threaded rods with one tack welded heavy hex nut each) with one hardened steel washer (ASTM F436) and one regular lock washer placed under each heavy hex nut. Nuts must conform to ASTM A563 requirements.  
Optional adhesive anchorage system must be 5/8" Dia ASTM A193 Gr B7 or F1554 Gr 105 fully threaded rods with one hardened steel washer (ASTM F436) and one regular lock washer placed under each heavy hex nut. Nuts must conform to ASTM A563 requirements. Embed fully threaded rod into slab and/or abutment wingwall using a Type III, Class C, D, E, or F anchor adhesive. Minimum adhesive anchor embedment depth is 4 1/2". Anchor adhesive chosen must be able to achieve a nominal bond strength in tension of a single anchor, Na, of 8 kips (edge distance must be accounted for). Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop this load to the Engineer for approval prior to use. Anchor installation, including hole size, drilling, and clean out, must be in accordance with Item 450, "Railing".  
W-beam must meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified in the plans. The Contractor may furnish rail elements of 25'-0" or 12'-6" (Nominal) lengths and a single rail element of 9'-4 1/2" or 6'-3" (Nominal) length. W-Beam must have slotted holes at 3'-1 1/2".  
Some part numbers from the "Task Force 13" Guide to Standardized Highway Barrier Hardware have been furnished for quick reference.


**GENERAL NOTES:**  
This railing has been successfully evaluated by full-scale crash test to meet MASH TL-3 criteria. This railing can be used for speeds of 50 mph and greater.  
This rail is designed to deflect approximately 4' to 4'-6" as it contains and redirects the errant vehicle. This rail may not be installed on top of or behind curbs that project above finished grade, on bridges with expansion joints providing more than 5" movement, on retaining walls, or on grade separations and interchanges.  
Repairs to impact-damaged post and base plate unit are not permitted. Replace all impact-damaged posts with a new post and base plate unit.  
Average weight of railing with no overlay: 20 pcf total.

Texas Department of Transportation		Bridge Division Standard	
<b>TRAFFIC RAIL</b>			
<b>TYPE T631</b>			
FILE: f1std038-20.dgn	DN: TxDOT	EX: AES	DW: JTR
©TxDOT September 2019	CSMT	SECT	JOB
REVISIONS	6388	89	001
07-20 Allowing 4'-4 1/2" or 4'-3" W-Beam sections.	DIST	COUNTY	SHEET NO.
	PAR	LAMAR, ETC	44





DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

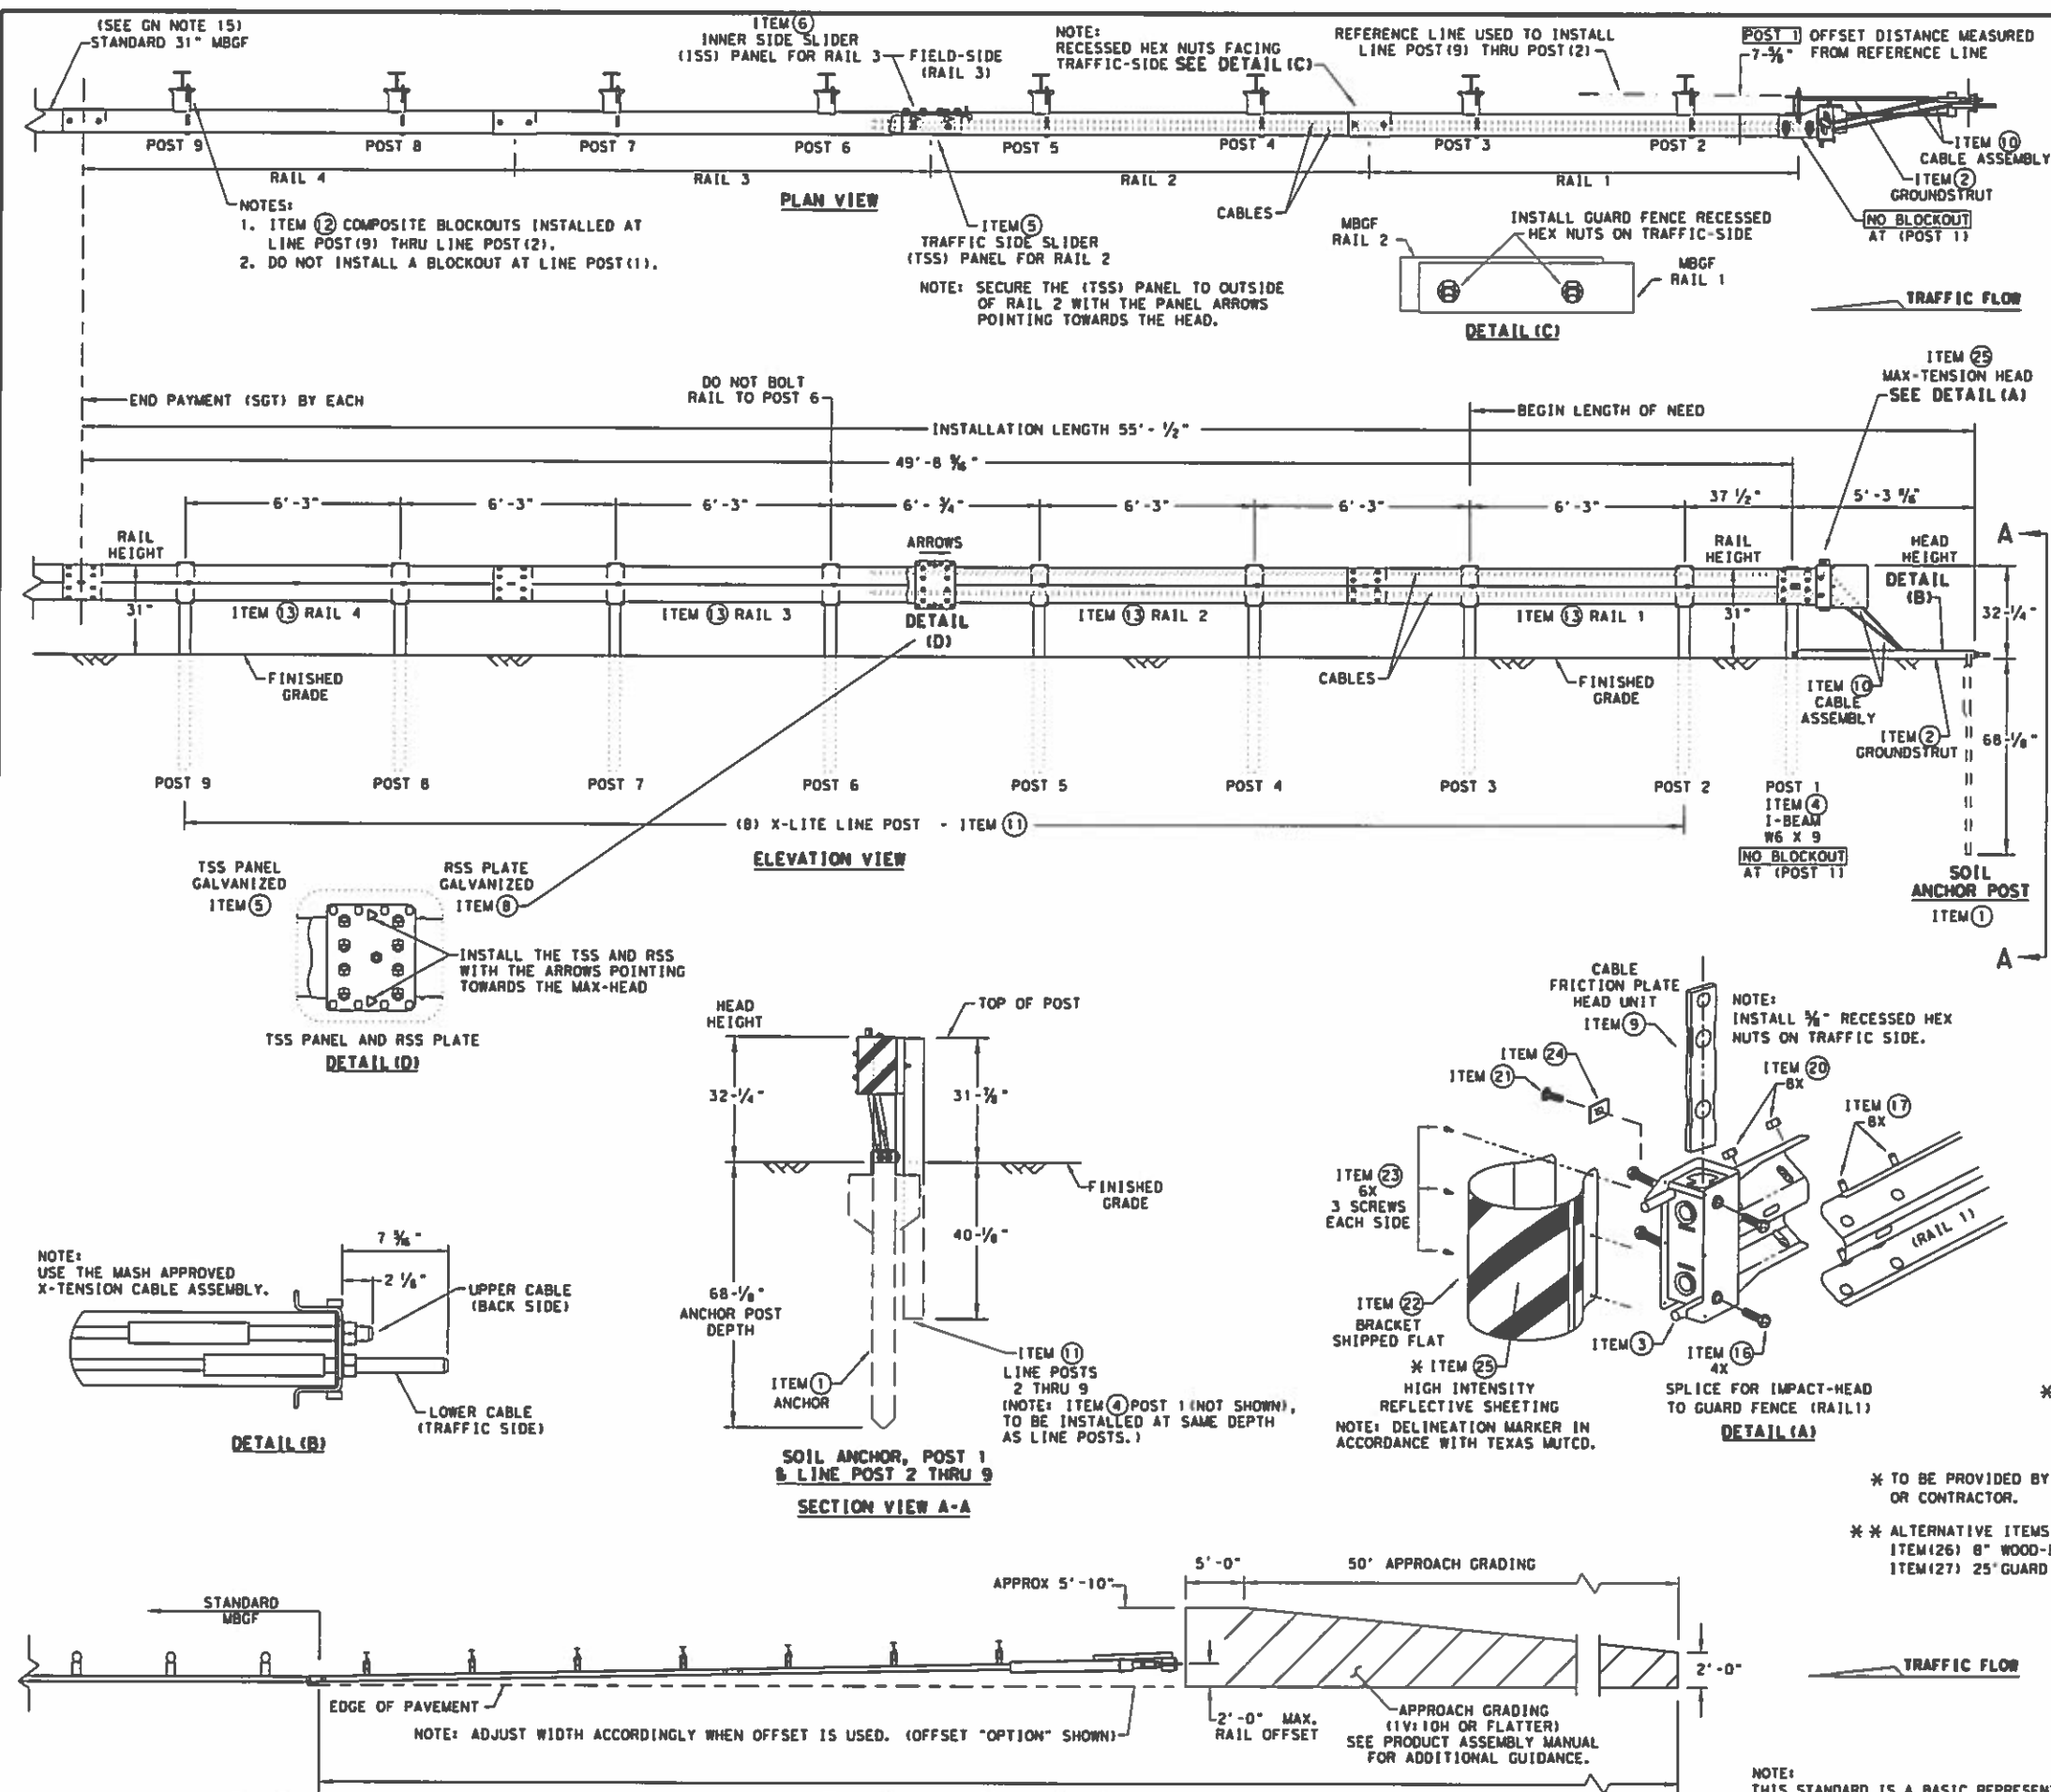

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800
  - FOR INSTALLATION, REPAIR, & MAINTENANCE REFER TO THE MAX-TENSION INSTALLATION INSTRUCTION MANUAL. P/N MANMAX REV D (ECN 3516).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - ALL STEEL COMPONENTS ARE GALVANIZED PER ASTM A123 OR EQUIVALENT UNLESS OTHERWISE STATED.
  - SYSTEM SHOWN USING STEEL WIDE FLANGE POST WITH COMPOSITE BLOCKOUTS.
  - COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - REFER TO INSTALLATION MANUAL FOR SPECIFIC PANEL LAPPING GUIDANCE.
  - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POST TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST.
  - MAX-TENSION SYSTEM SHALL NEVER BE INSTALLED WITHIN A CURVED SECTION OF GUARDRAIL.
  - IF A DELINEATION MARKER IS REQUIRED, MARKER SHALL BE IN ACCORDANCE WITH TEXAS MUTCD.
  - THE SYSTEM IS SHOWN WITH 12'-6" MGBF PANELS, 25'-0" MGBF PANELS ARE ALSO ALLOWED.
  - A MINIMUM OF 12'-6" OF 12GA. MGBF IS REQUIRED IMMEDIATELY DOWNSTREAM OF THE MAX-TENSION SYSTEM.

ITEM#	PART NUMBER	DESCRIPTION	QTY
1	BSI-1610060-00	SOIL ANCHOR - GALVANIZED	1
2	BSI-1610061-00	GROUND STRUT - GALVANIZED	1
3	BSI-1610062-00	MAX-TENSION IMPACT HEAD	1
4	BSI-1610063-00	W6x9 I-BEAM POST 6FT. -GALVANIZED	1
5	BSI-1610064-00	TSS PANEL - TRAFFIC SIDE SLIDER	1
6	BSI-1610065-00	ISS PANEL - INNER SIDE SLIDER	1
7	BSI-1610066-00	TOOTH - GEOMET	1
8	BSI-1610067-00	RSS PLATE - REAR SIDE SLIDER	1
9	8061058	CABLE FRICTION PLATE - HEAD UNIT	1
10	BSI-1610069-00	CABLE ASSEMBLY - MASH X-TENSION	2
11	BSI-1012078-00	X-LITE LINE POST-GALVANIZED	8
12	8090534	8" W-BEAM COMPOSITE-BLOCKOUT XT110	8
13	BSI-4004386	12'-6" W-BEAM GUARD FENCE PANELS 12GA.	4
14	BSI-1102027-00	X-LITE SQUARE WASHER	1
15	BSI-2001886	3/8" X 7" THREAD BOLT HH (GR.5) GEOMET	1
16	BSI-2001885	3/4" X 3" ALL-THREAD BOLT HH (GR.5) GEOMET	4
17	4001115	3/8" X 1 1/4" GUARD FENCE BOLTS (GR.2)MGAL	48
18	2001840	3/8" X 10" GUARD FENCE BOLTS MGAL	8
19	2001636	3/8" WASHER F436 STRUCTURAL MGAL	2
20	4001116	3/8" RECESSED GUARD FENCE NUT (GR.2)MGAL	59
21	BSI-2001888	3/8" X 2" ALL THREAD BOLT (GR.5)GEOMET	1
22	BSI-1701063-00	DELINEATION MOUNTING (BRACKET)	1
23	BSI-2001887	1/4" X 3/4" SCREW SD HH 41055	7
24	4002051	GUARDRAIL WASHER RECT AASHTO FWRD3	1
25	SEE NOTE BELOW	HIGH INTENSITY REFLECTIVE SHEETING	1
26	4002337	8" W-BEAM TIMBER-BLOCKOUT, PDB01B	8
27	BSI-4004431	25' W-BEAM GUARDRAIL PANEL, 8-SPACE, 12GA.	2
28	MANMAX Rev-(D)	MAX-TENSION INSTALLATION INSTRUCTIONS	1

Texas Department of Transportation

Design Division Standard

### MAX-TENSION END TERMINAL

#### MASH - TL-3


#### SGT (11S) 31-18

FILE: sgt11a3118.dgn	DN: TxDOT	CR: KM	DR: TxDOT	CR: CL
© TxDOT: FEBRUARY 2018	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US B2; ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	46	

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MAX-TENSION END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DATE: FILE:



DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

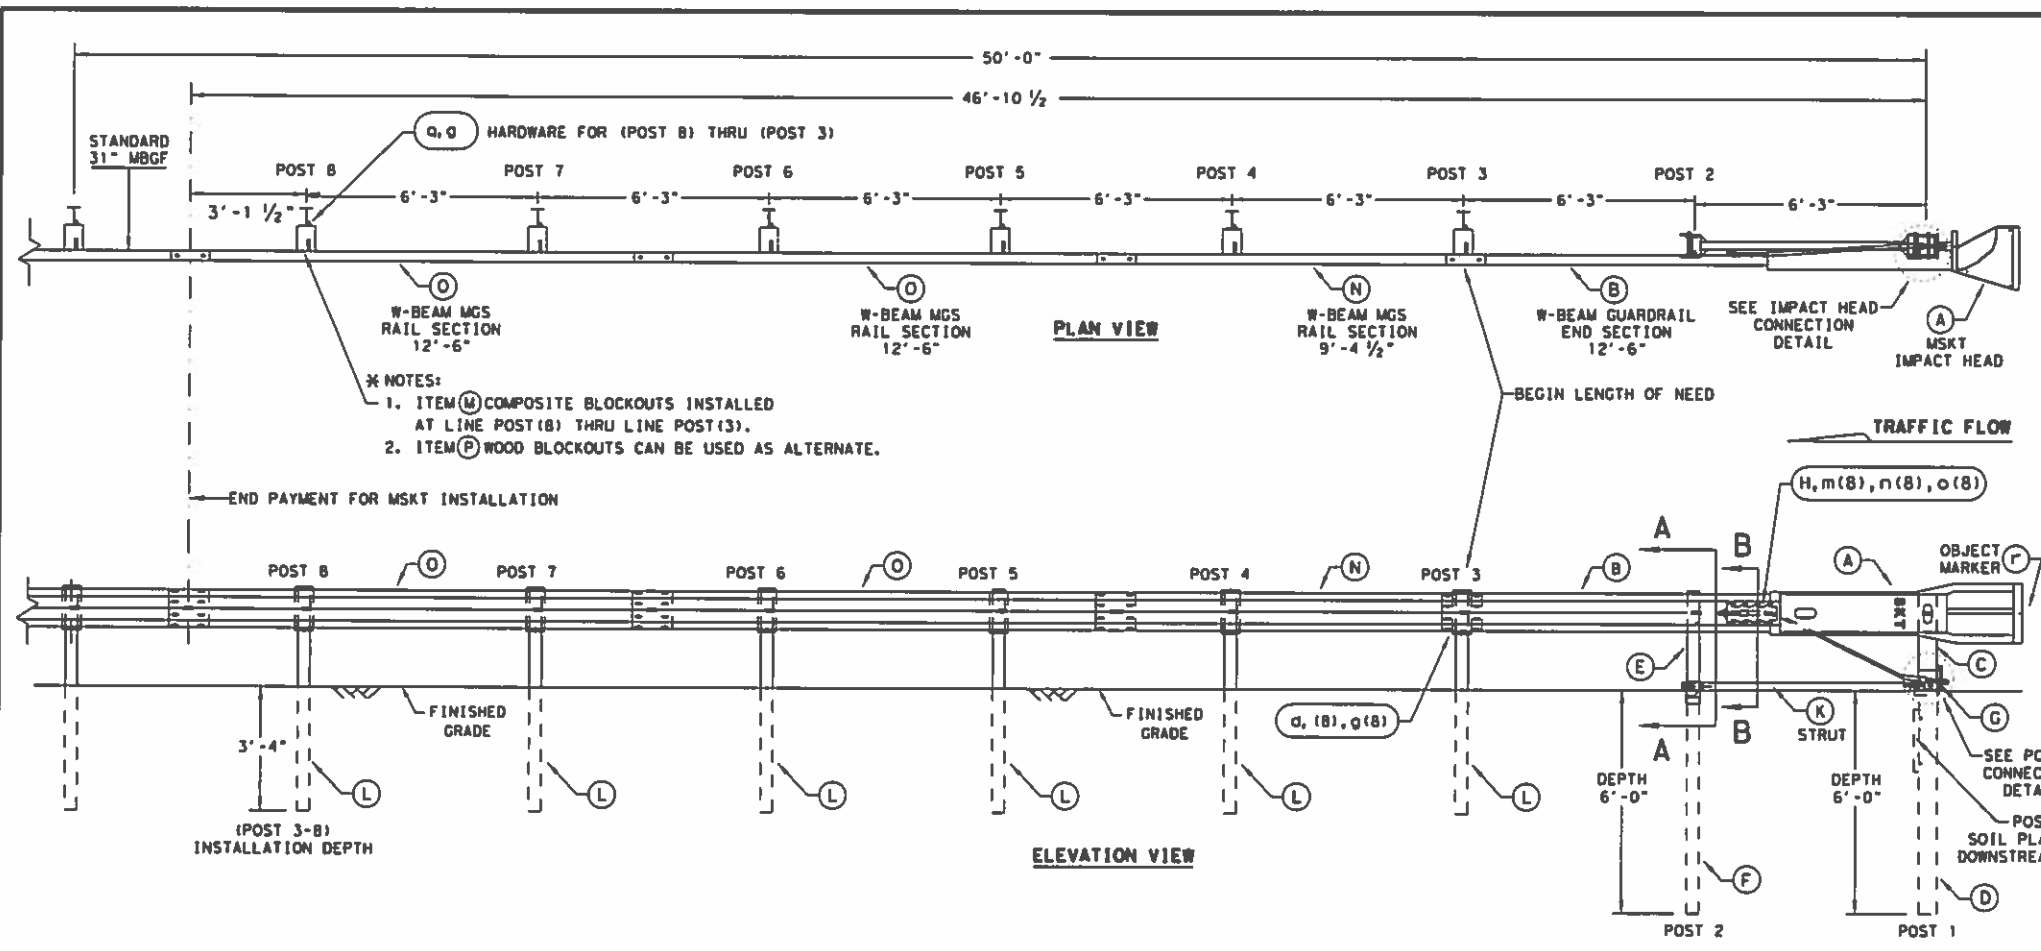

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435, 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
  - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBGF.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRoACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
  - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBGF PANELS, ONE 25'-0" MBGF PANEL IS ALSO ALLOWED IN THEIR PLACE.
  - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Ga.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6" W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	LHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6" W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	M5785
L	6	W6X9 OR W6X8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209


SMALL HARDWARE			
a	2	3/8" x 1" HEX BOLT (GRD 5)	B516Q104A
b	4	3/8" WASHER	W0516
c	2	3/8" HEX NUT	N0516
d	25	3/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	3/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	3/8" WASHER	W050
g	33	3/8" Dia. H.G.R. NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/8" O.D. x 3/8" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	3/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

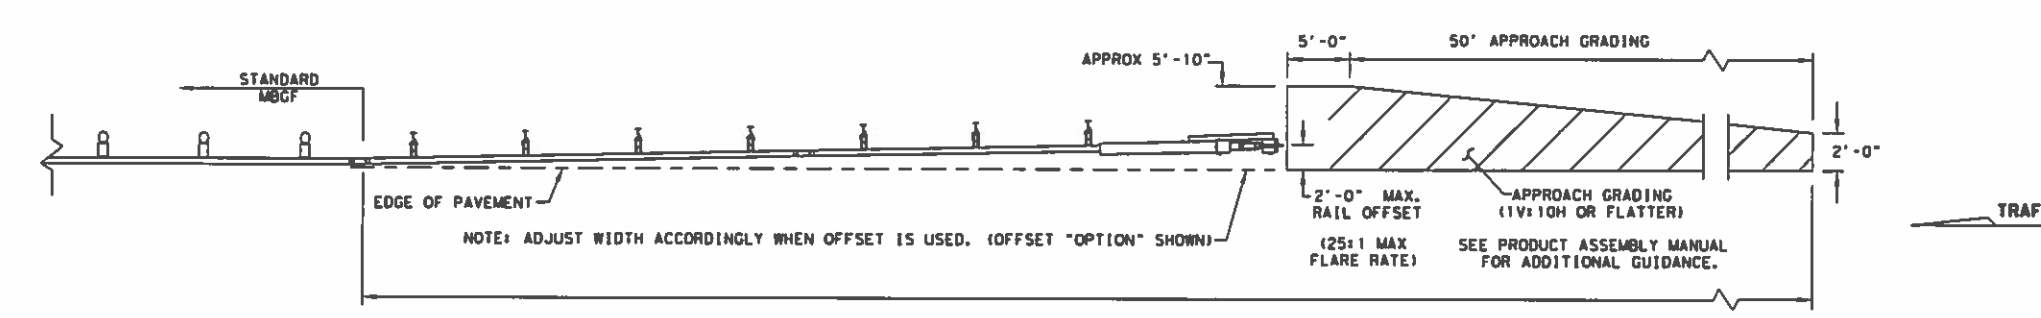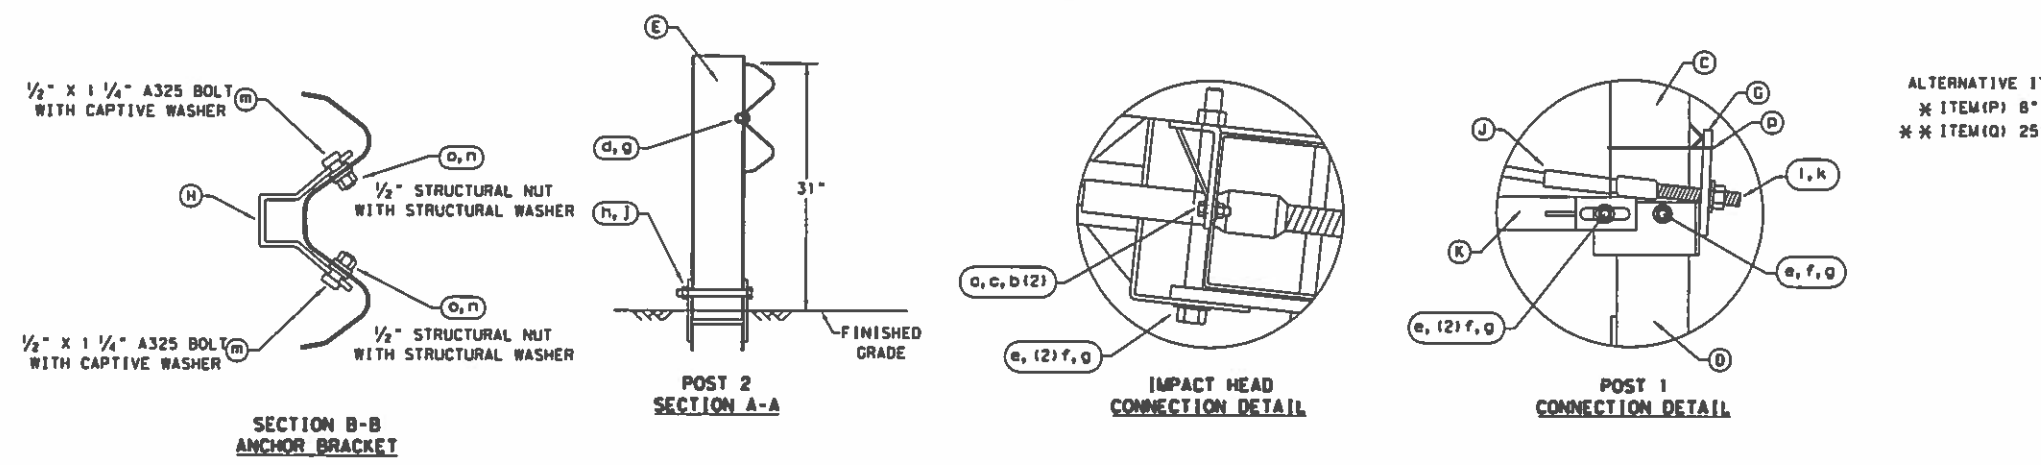

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

APPROACH GRADING AT GUARDRAIL END TREATMENTS

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL. IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.


  
**SINGLE GUARDRAIL TERMINAL**  
**MSKT-MASH-TL-3**  
**SGT (12S) 31-18**




FILE: sgt12s3118.dgn	CON: TXDOT	CK: KM	DW: VP	CK: CL
© TXDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	6388 89	001	US 82; ETC	
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	47	

Design Division Standard

DATE: FILE:

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: FILE:

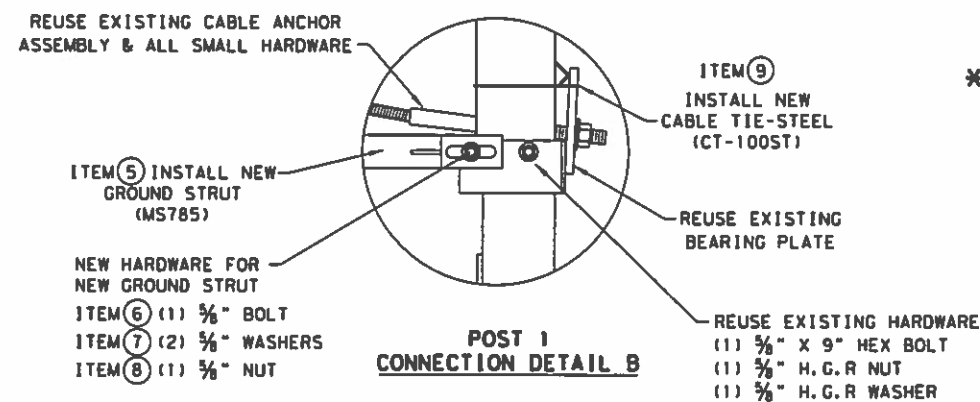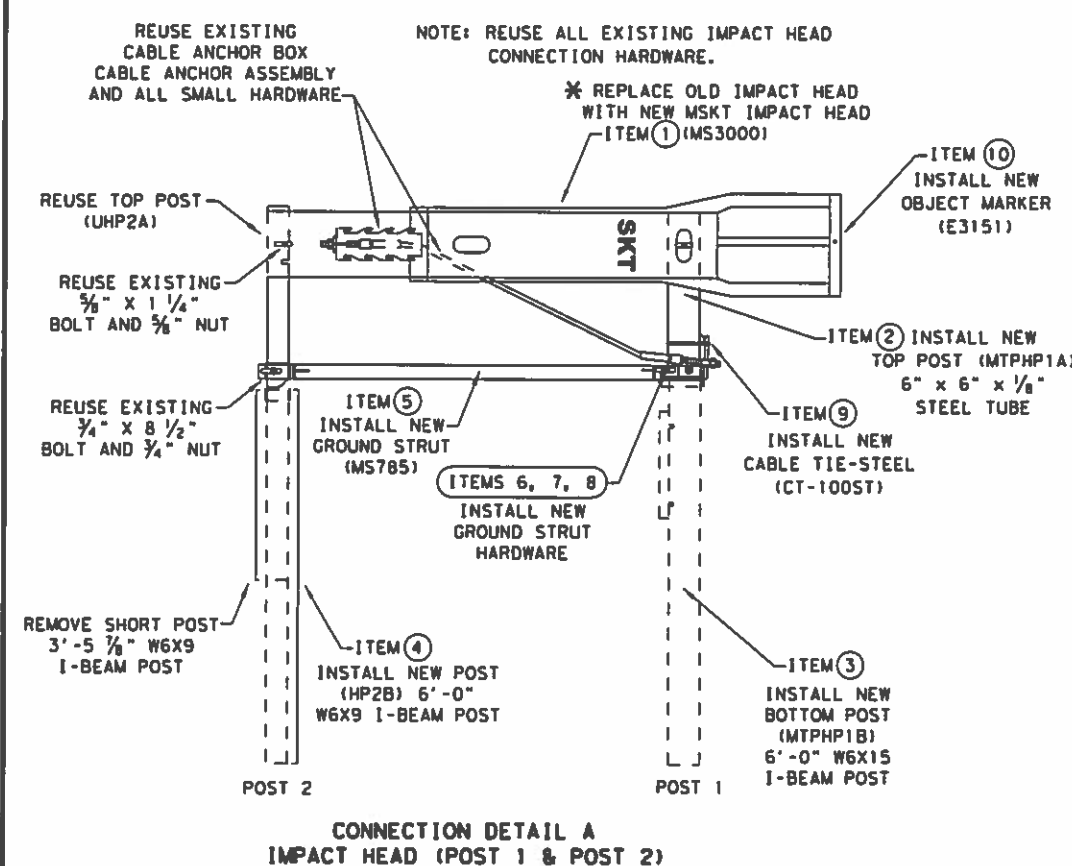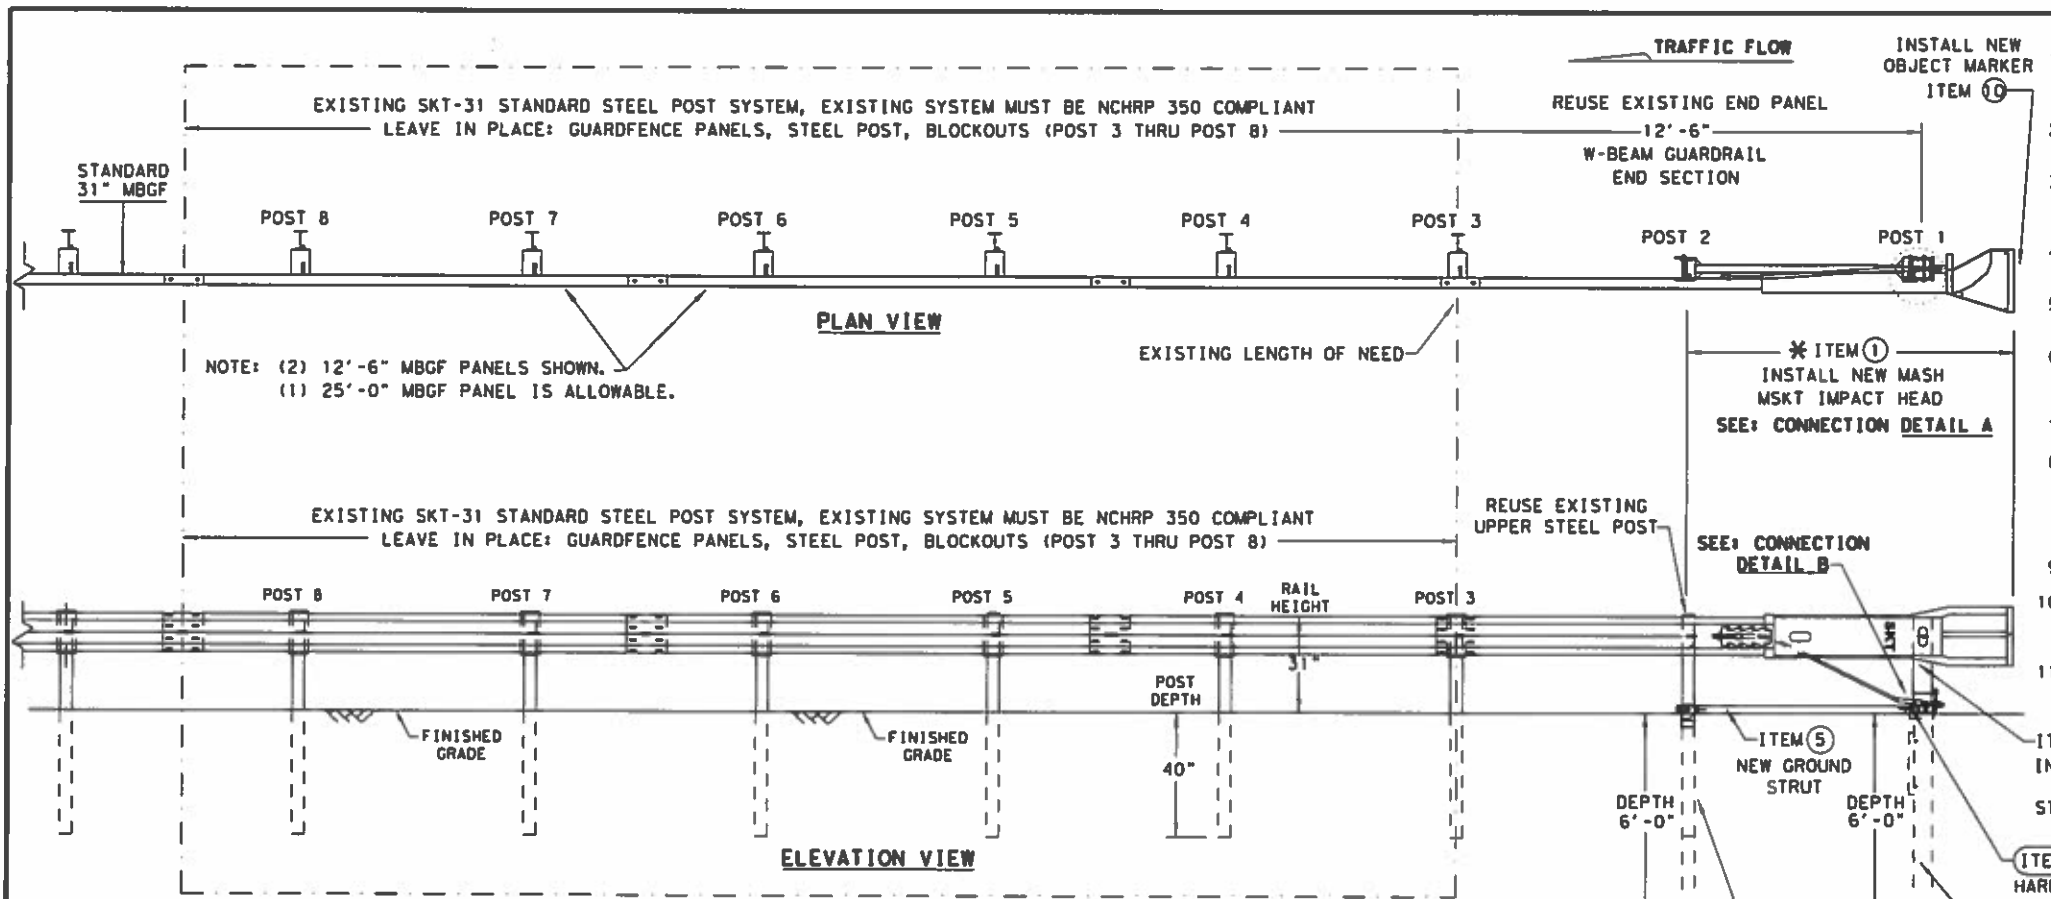

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, AND REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - THE EXISTING SKT 31" STANDARD STEEL POST SYSTEM MUST BE THOROUGHLY INSPECTED, AND DETERMINED TO BE INTACT, AND FREE OF ANY DAMAGE OR DEFECTS BEFORE RETROFITTING. THIS INSPECTION INCLUDES COMPLETING THE MSKT RETROFIT INSPECTION CHECKLIST FOR THE EXISTING SKT 31" STEEL POST NCHRP 350 SYSTEM. ALL EXISTING, AND REUSABLE PARTS MUST BE FREE OF ANY DAMAGE FOR A MASH COMPLIANT RETROFIT.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRDACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
  - SPECIAL DRIVING CAP TO BE USED WHEN DRIVING (LOWER POSTS 1 & 2) TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEMS	QTY	MAIN SYSTEM COMPONENTS	PART NUMBERS
1	1	MSKT IMPACT HEAD	MS3000
2	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
3	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
4	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
5	1	GROUND STRUT	MS785
6	1	3/8" X 9" HEX BOLT (GRD A449)	B580904A
7	2	3/8" WASHERS	W050
8	1	3/8" H.G.R NUT	N050
9	1	CABLE TIE-STEEL	CT-100ST
10	1	OBJECT MARKER 18" X 18"	E3151

COMPONENTS REQUIRED TO RETROFIT: EXISTING 31" STEEL POST (NCHRP 350 SKT) GUARDRAIL TERMINAL WITH THE NEW 31" (MASH COMPLIANT MSKT IMPACT HEAD).  
 \* IF THE EXISTING NCHRP 350 (31" STEEL POST SKT) ALREADY HAS THE MSKT IMPACT HEAD THERE IS NO NEED TO REPLACE THE IMPACT HEAD OR OBJECT MARKER AS LONG AS IT IS NOT DAMAGED.

**Texas Department of Transportation** Design Division Standard

**RETROFIT STANDARD  
SKT 31" STEEL POST SYSTEM  
TO MASH MSKT  
SGT (13S) 31-18**




FILE: sqt13s3118.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CL
© TxDOT: APRIL 2018	CONT: SECT	JOB: HIGHWAY		
REVISIONS	6388	89	001	US 82; ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	48	

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE EXISTING SKT END TERMINAL RETROFITTED TO THE MSKT MASH COMPLIANT TERMINAL. IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

**GENERAL NOTES**

- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
- FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
- APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
- FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
- HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, AND REFER TO THE LATEST ROADWAY MBSG STANDARD FOR INSTALLATION GUIDANCE.
- POSTS SHALL NOT BE SET IN CONCRETE.
- THE EXISTING SKT 31" STANDARD WOOD POST SYSTEM MUST BE THOROUGHLY INSPECTED, AND DETERMINED TO BE INTACT, AND FREE OF ANY DAMAGE OR DEFECTS BEFORE RETROFITTING. THIS INSPECTION INCLUDES COMPLETING THE MSKT RETROFIT INSPECTION CHECKLIST FOR THE EXISTING SKT 31" WOOD POST NCHRP 350 SYSTEM. ALL EXISTING, AND REUSABLE PARTS MUST BE FREE OF ANY DAMAGE FOR A MASH COMPLIANT RETROFIT.
- UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
- A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRANCHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
- SPECIAL DRIVING CAP TO BE USED WHEN DRIVING (LOWER POSTS 1 & 2) TO PREVENT DAMAGE TO THE WELDED PLATES.

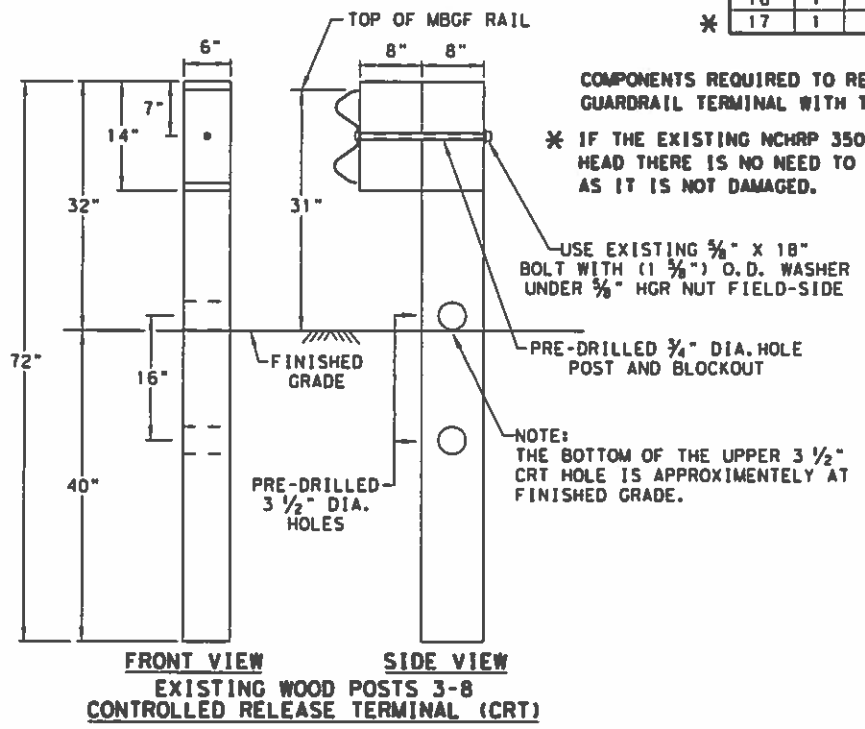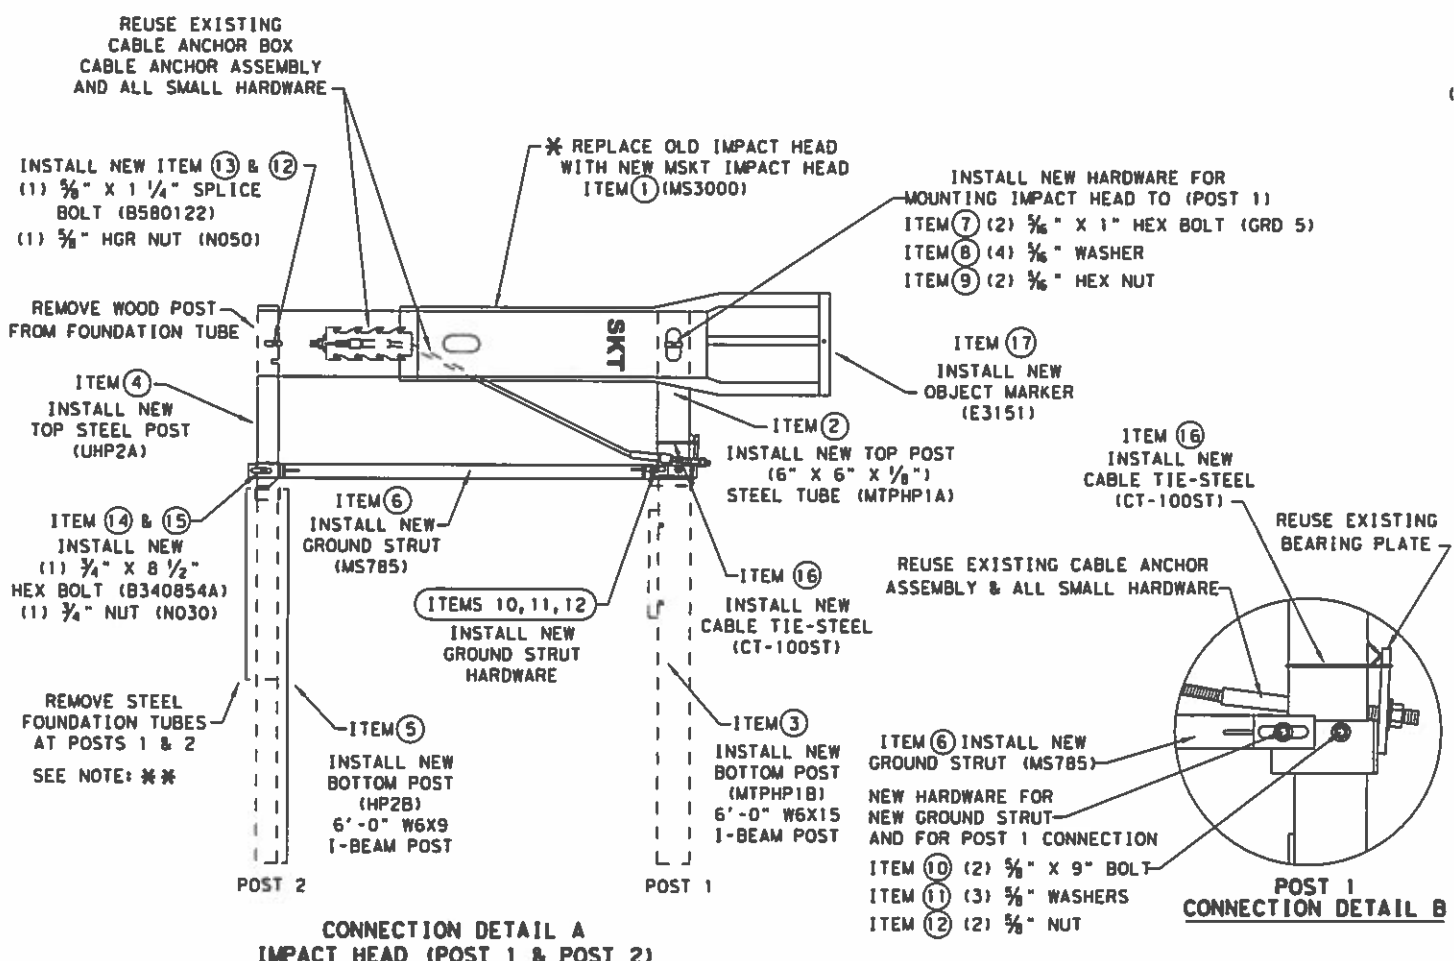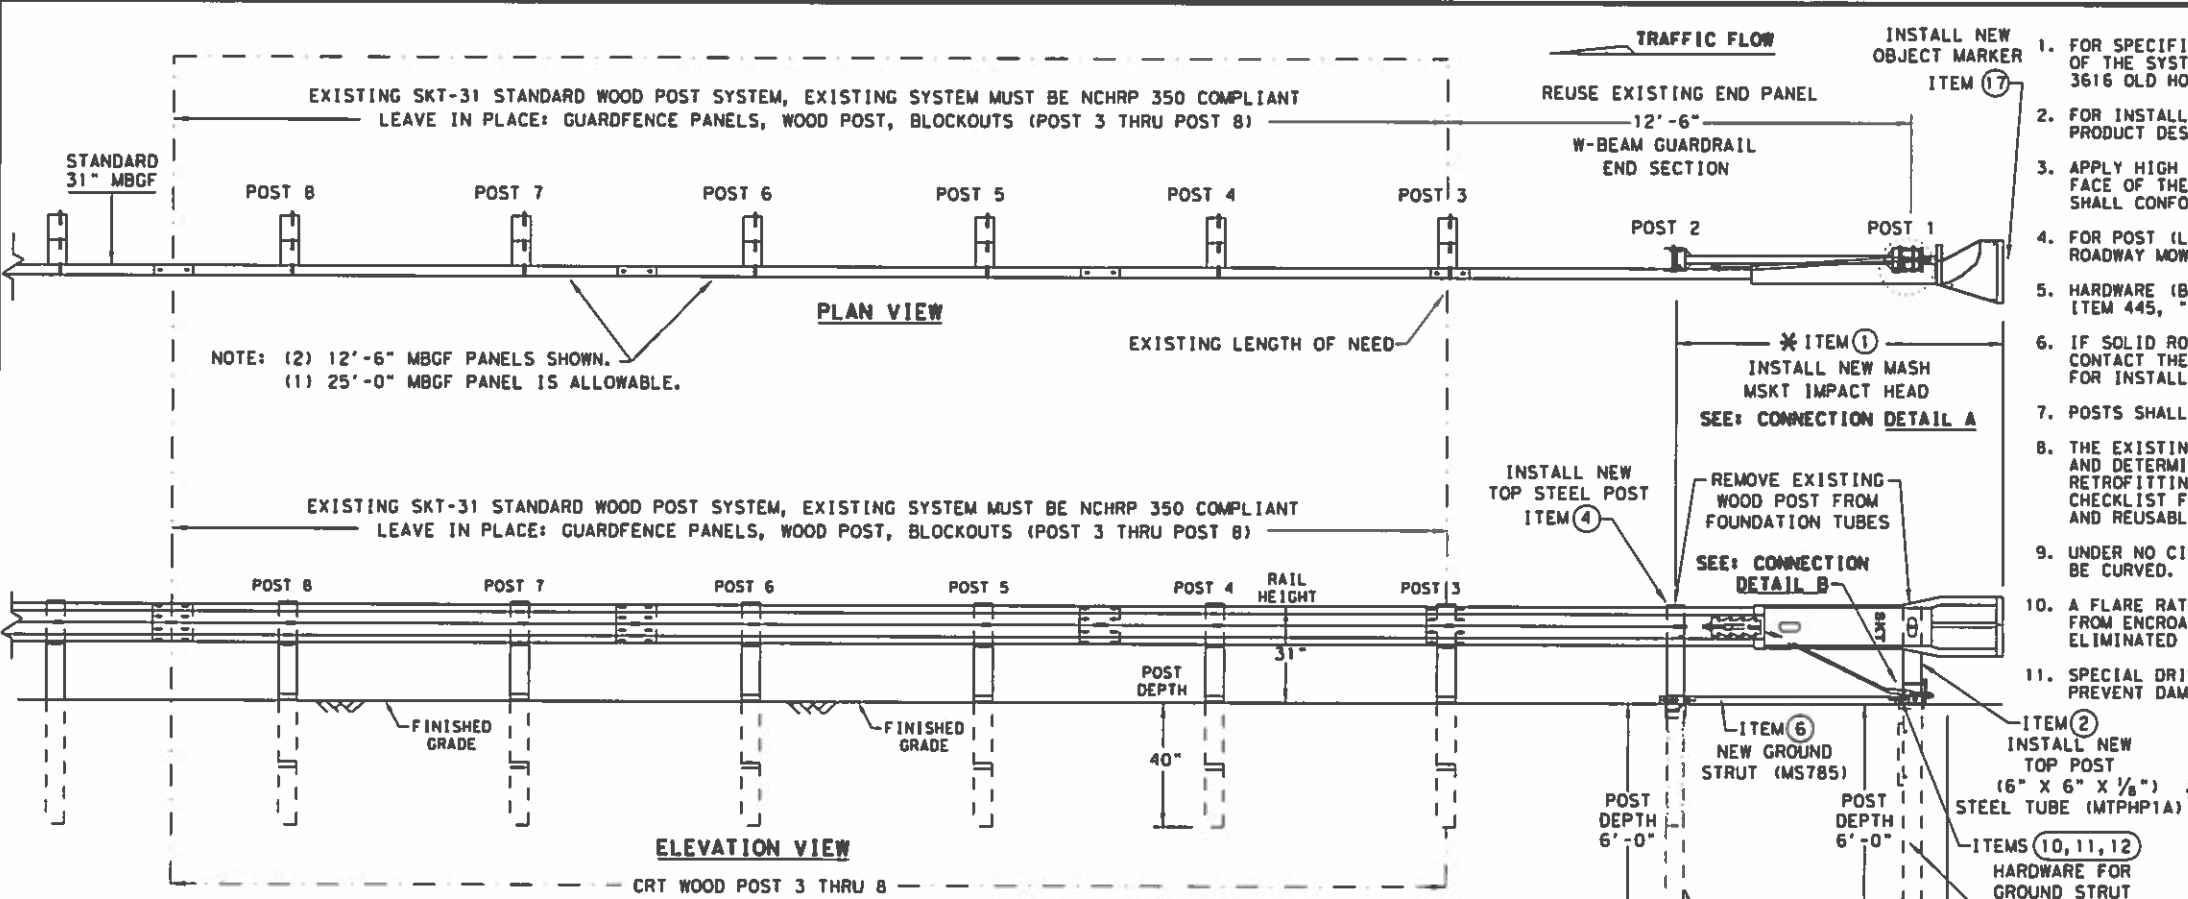

ITEMS	QTY	MAIN SYSTEM COMPONENTS	PART NUMBERS
1	1	MSKT IMPACT HEAD	MS3000
2	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
3	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
4	1	POST 2 - ASSEMBLY TOP	UHP2A
5	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
6	1	GROUND STRUT	MS785
7	2	3/8" X 1" HEX BOLT (GRD 5)	B516014A
8	4	3/8" WASHERS	W0516
9	2	3/8" HEX NUT	N0516
10	2	3/4" X 9" HEX BOLT (GRD A449)	B580904A
11	3	3/8" WASHERS	W050
12	3	3/8" H.G.R NUT	N050
13	1	3/8" X 1 1/4" SPLICE BOLT	B580122
14	1	3/4" X 8 1/2" HEX BOLT (GRD 5)	B340854A
15	1	3/4" HEX NUT	N030
16	1	CABLE TIE-STEEL	CT-100ST
17	1	OBJECT MARKER 18" X 18"	E3151

Texas Department of Transportation  
Design Division Standard



**RETROFIT STANDARD  
SKT 31" WOOD POST SYSTEM  
TO MASH MSKT  
SGT (14W) 31-18**

FILE: sgt14w3118.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CL
© TxDOT: APRIL 2018	CONT: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82, ETC
REVISIONS	DIST: PAR	COUNTY: LAMAR, ETC	SHEET NO. 49	


NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE EXISTING SKT END TERMINAL RETROFITTED TO THE MSKT MASH COMPLIANT TERMINAL. IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DATE: FILE:

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.  
 DATE: FILE:

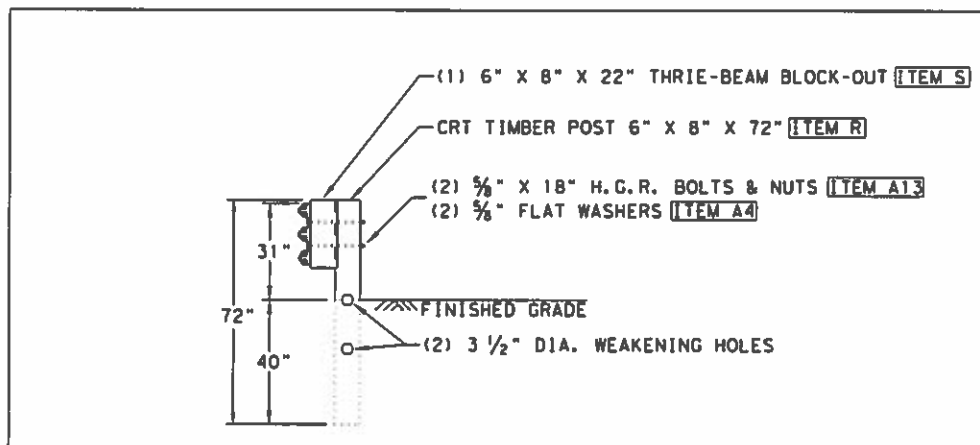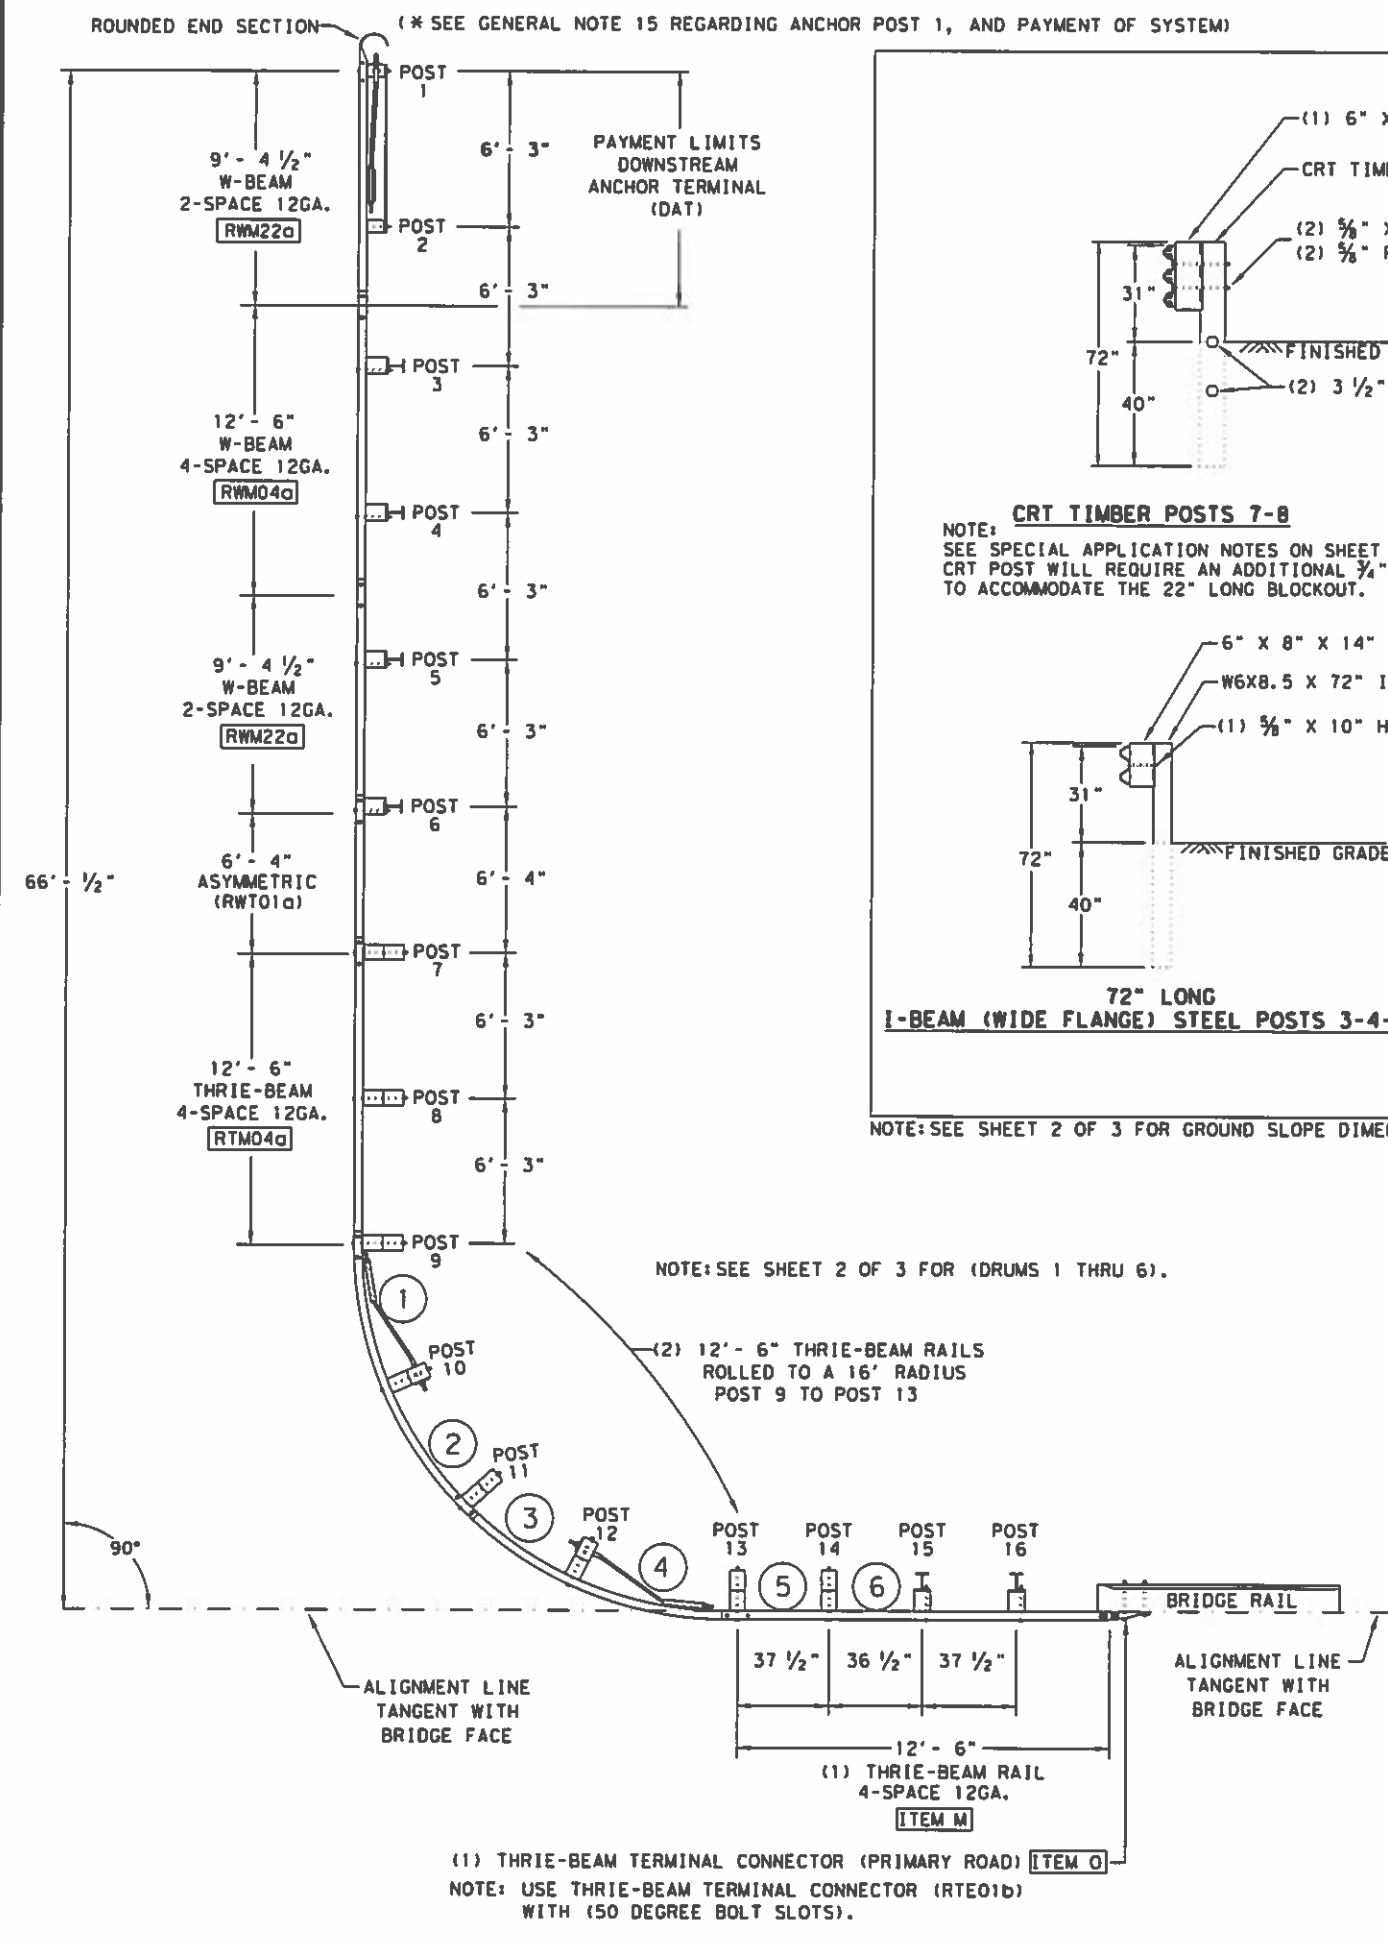


**CRT TIMBER POSTS 7-8**  
 NOTE: SEE SPECIAL APPLICATION NOTES ON SHEET 3 OF 3. CRT POST WILL REQUIRE AN ADDITIONAL 3/4" HOLE TO ACCOMMODATE THE 22" LONG BLOCKOUT.

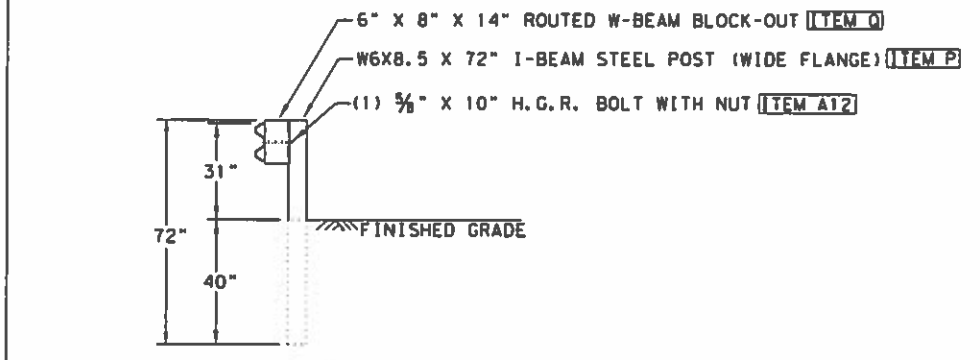

**72" LONG I-BEAM (WIDE FLANGE) STEEL POSTS 3-4-5-6**


NOTE: SEE SHEET 2 OF 3 FOR GROUND SLOPE DIMENSIONS.

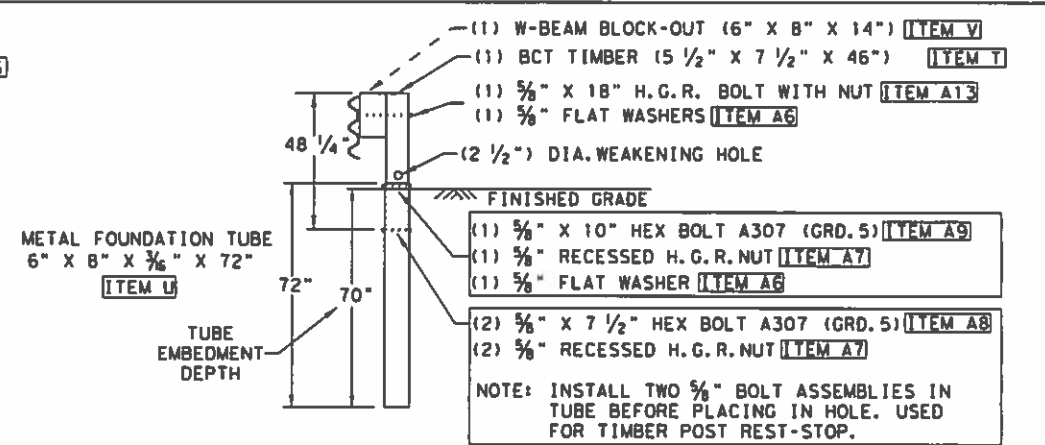


**BCT TIMBER POSTS WITH METAL FOUNDATION TUBES**  
 9-10-11-12-13-14

NOTE: FOR I-BEAM (POST 15) USE (1) 6" X 8" X 14" ROUTED WOOD BLOCK-OUT [ITEM A9] (1) H.G.R. BOLT & NUT [ITEM V]

NOTE: FOR I-BEAM (POST 16) USE (1) 6" X 8" X 18" ROUTED WOOD BLOCK-OUT [ITEM A9] (1) H.G.R. BOLT & NUT [ITEM X]

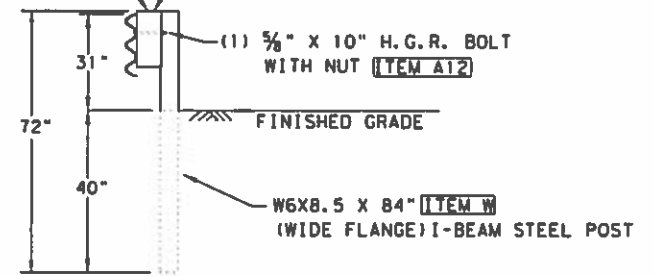

**84" LONG I-BEAM WIDE FLANGE STEEL POSTS 15-16**

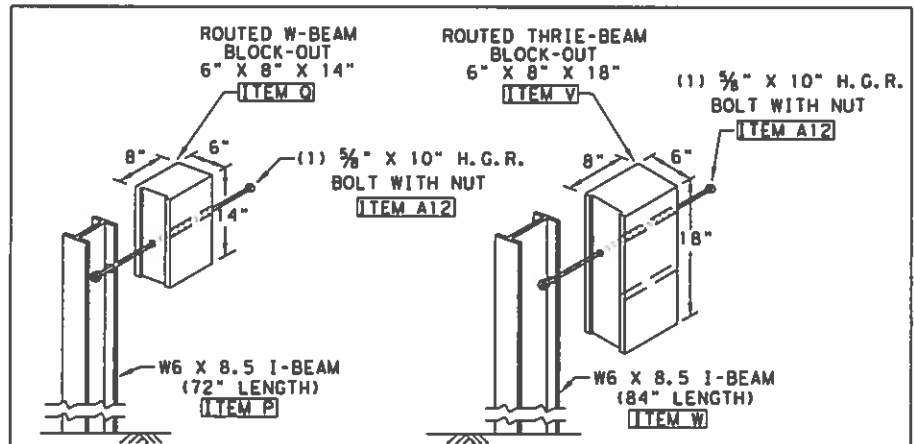

**POST 3-4-5-6-15 POST 16**

**INSTALLATION DETAIL ROUTED WOOD BLOCK-OUT WITH WIDE FLANGE STEEL POST**

NOTE: POST SYSTEM USES TWO TYPES OF 14" WOOD BLOCK-OUTS. FOR CRT & BCT WOOD POSTS USE: (PDB01a) FOR I-BEAM STEEL POSTS USE: (PDB01b)  
 POST (3-4-5-6) USE: 14" BLOCK-OUT (PDB01b)  
 POST (7-8) USE: 22" BLOCK-OUT (PDB02)  
 POST (9 THRU 14) USE: 14" BLOCK-OUT (PDB01a)  
 POST (15) USE: 14" BLOCK-OUT (PDB01b)  
 POST (16) USE: 18" BLOCK-OUT (PDB01)

(MASH TL-2 COMPLIANT)  
 TESTED TO MASH TL-2 WITH A 3:1 SLOPE

SHEET 1 OF 3







**TL-2 SHORT RADIUS GUARDRAIL MASH COMPLIANT SRG (TL-2) -21**

FILE: sfq1221	TxDOT	CK:KM	DN:VP	CK:GCL
© TxDOT: FEBRUARY 2021	CONT	SECT	JOB	HIGHWAY
REVISTONS	6388	89	001	US 82; ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	50	



DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.  
 DATE: FILE:

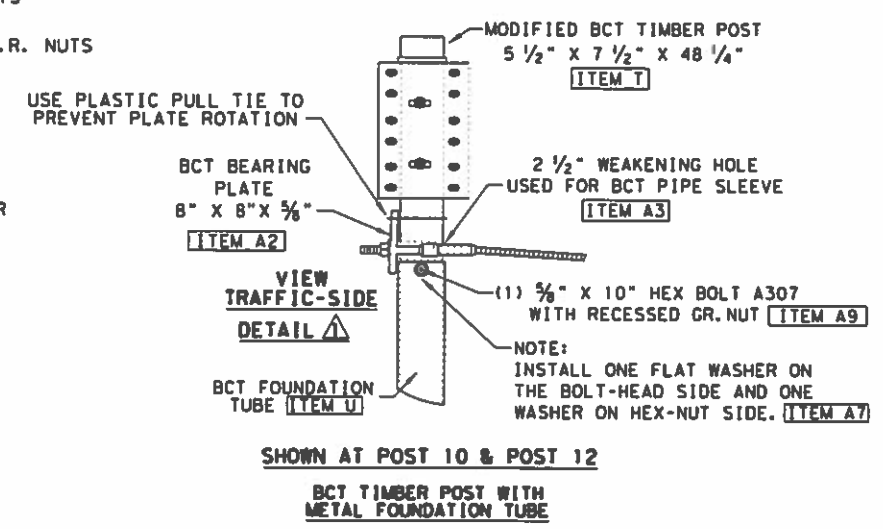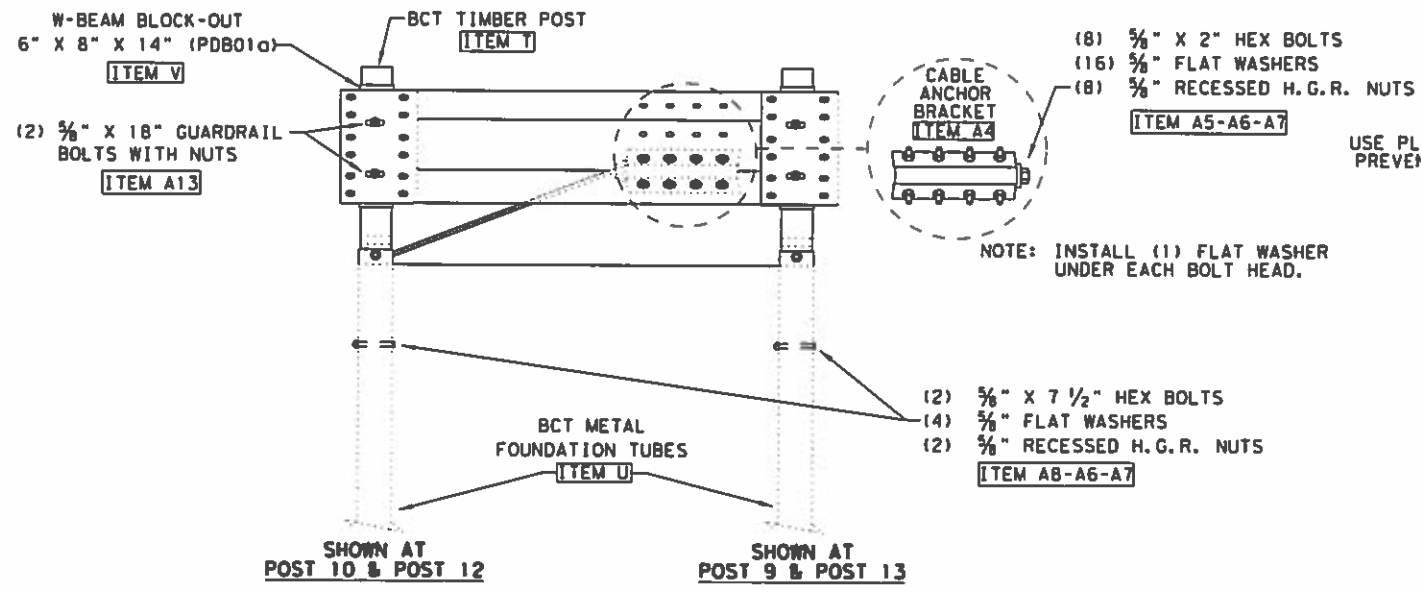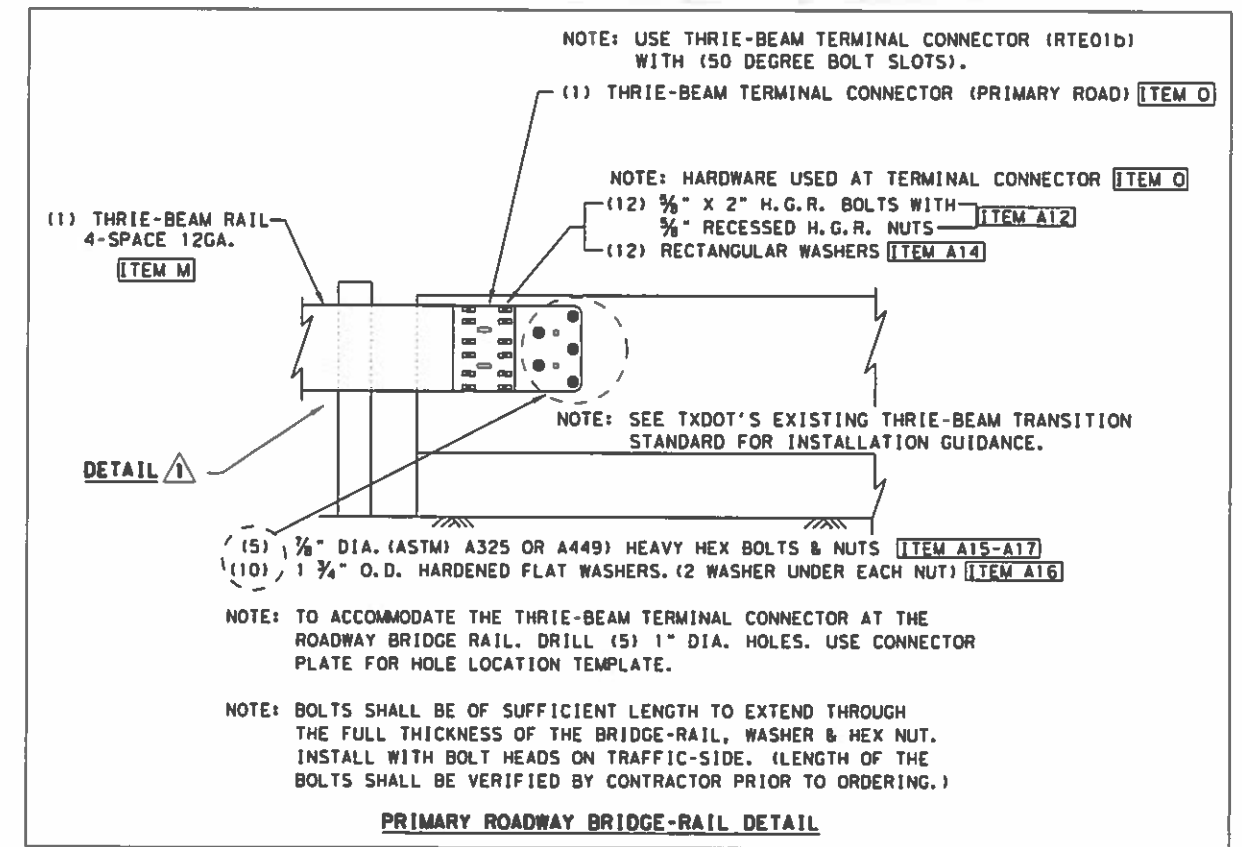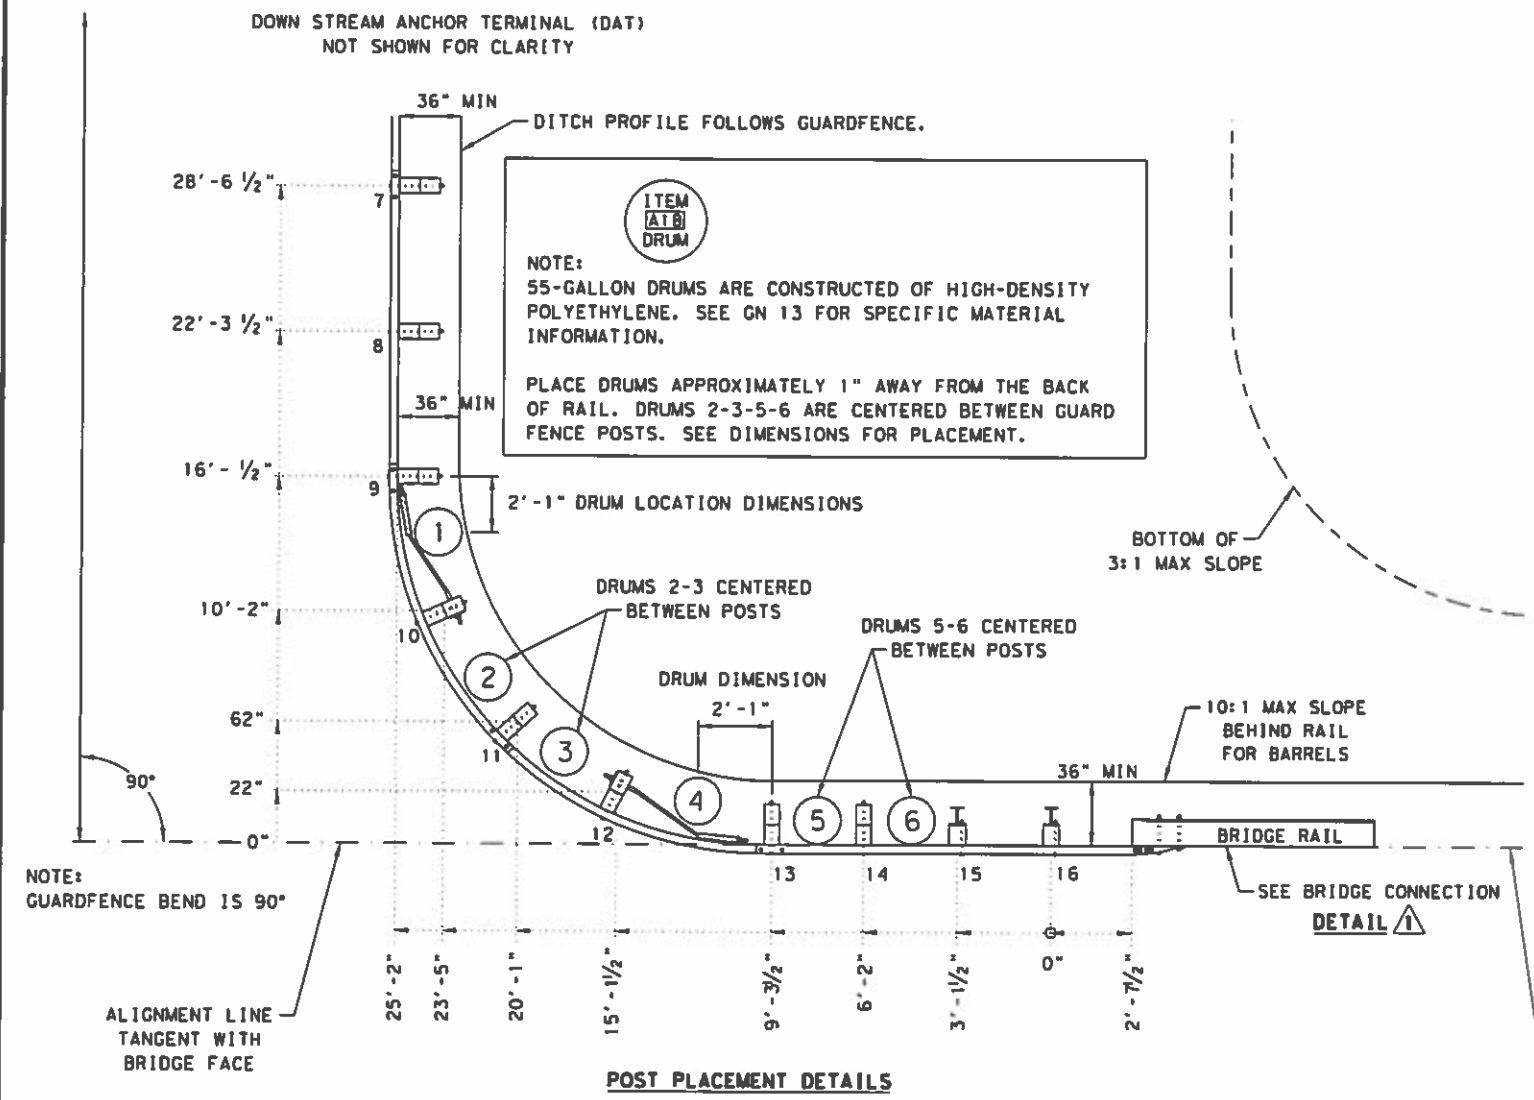

(MASH TL-2 COMPLIANT)  
TESTED TO MASH TL-2 WITH A 3:1 SLOPE

SHEET 2 OF 3

 Texas Department of Transportation		Design Division Standard	
<b>TL-2</b> <b>SHORT RADIUS GUARDRAIL</b> <b>MASH COMPLIANT</b> <b>SRG (TL-2) -21</b>			
FILE: brgt1221	TxDOT	CK:KM	DN:VP
© TxDOT: FEBRUARY 2021	CONT SECT	JOB	HIGHWAY
REVISTONS	6388 89	001	US 82; ETC
DIST	COUNTY	SHEET NO.	
PAR	LAMAR; ETC	51	

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: FILE:

ITEM	ALL LARGE & SMALL COMPONENT DESCRIPTIONS	TL-2 DOWNSTREAM ANCHOR TERMINAL (DAT) □ (PAYABLE BY EA.)		TL-2 SHORT RADIUS GUARDRAIL COMPLETE SYSTEM (INCL DAT) △ (ALL PAY ITEMS)	
		ITEM	QTY	ITEM	TOTAL QTY
A	POST 1 & 2 BCT TIMBER (5 1/2" X 7 1/2" X 48 1/4") (PDF01)	A	2	A	2
B	POST 1 & 2 BCT TUBE (6" X 8" X 3/8" X 72" LENGTH) (PTE05)	B	2	B	2
C	POST 1 & 2 CHANNEL STRUTS (C3 X 5 X 80") A36	C	2	C	2
D	POST 1 SHELF ANGLE BRACKET (6" X 7 1/2" X 1/4") SEE DAT DETAIL	D	1	D	1
E	POST 1 BCT POST SLEEVE (FMM02a)	E	1	E	1
F	POST 1 BCT CABLE BEARING PLATE (5/8" X 8" X 8") (FPB01)	F	1	F	1
G	BCT CABLE ANCHOR ASSEMBLIES (3/4" X 6'-6 3/4" LENGTH) (FCA01)	G	1	G	1
H	W-BEAM RAIL (ROUNDED END ANCHOR-TYPE) 12GA. (RWE03a)	H	1	H	1
I	W-BEAM RAIL (LENGTH 9'-4 1/2") 12GA. (RWM22a)	I	2	I	2
J	W-BEAM RAIL (LENGTH 12'-6") 12GA. (4 SPACE) (RWM04a)			J	1
K	W-BEAM RAIL (LENGTH 9'-4 1/2") 12GA. (RWM22a)			K	1
L	W-BEAM TO THRIE-BEAM ASYMMETRIC RAIL (RWT01a). (LENGTH 6'-4")			L	1
M	THRIE-BEAM RAIL (LENGTH 12'-6") 12GA. (4 SPACE) (RTM04a)			M	1
N	THRIE-BEAM RAIL (LENGTH 12'-6") 12GA. (16' RADIUS) (RTM02a)			N	2
O	THRIE BEAM RAIL (TERMINAL CONNECTOR) (BRIDGE-RAIL) (RTE01b)			O	1
P	POSTS 3,4,5,6 I-BEAM POSTS (LENGTH W6X8.5 X 72") (PWE01)			P	4
Q	POSTS 3,4,5,6,15 ROUTED W-BEAM BLOCK-OUTS (6" X 8" X 14") (PDB01b)			Q	5
R	POSTS 7,8 CRT TIMBER POSTS (LENGTH 6" X 8" X 72") (PDE09)			R	2
S	POSTS 7,8 THRIE-BEAM BLOCK-OUTS (6" X 8" X 22") (PDB02a)			S	2
T	POSTS 9,10,11,12,13,14 BCT TIMBER (5 1/2" X 7 1/2" X 46") (PDF04)			T	6
U	POSTS 9,10,11,12,13,14 BCT TUBE (6" X 8" X 3/8" X 72") (PTE05)			U	6
V	POSTS 9,10,11,12,13,14, W-BEAM BLOCK-OUTS (6" X 8" X 14") (PDB01a)			V	6
W	POSTS 15,16 I-BEAM POSTS (LENGTH W6X8.5 X 84") (PWE07)			W	2
X	POSTS 16 ROUTED THRIE-BEAM BLOCK-OUT (6" X 8" X 18") (PDB01)			X	1
A1	MODIFIED BCT CABLE ANCHOR ASSEMBLIES (3/4" X LENGTH 5'-5")			A1	2
A2	BCT CABLE BEARING PLATE (5/8" X 8" X 8") (POST 10 & POST 12) (FPB01)			A2	2
A3	BCT CABLE POST SLEEVE (POST 10 & POST 12) (FMM02)			A3	2
A4	BCT CABLE ANCHOR BRACKET (AT POST 9 & POST 13) (FPA01)			A4	2
A5	5/8" X 2" HEX BOLTS A307 GRD.5 (FOR CABLE ANCHOR BRACKETS)	A5	8	A5	24
A6	5/8" FLAT WASHER A307 GRD.5 (1 WASHER UNDER BOLT & 1 WASHER UNDER NUT)	A6	18	A6	48
A7	5/8" RECESSED H.G.R. NUTS (FOR ALL 5/8" BOLTS)	A7	20	A7	152
A8	5/8" X 7 1/2" HEX BOLTS A307 GRD.5 BCT POSTS (9-10-11-12-13-14)	A8	4	A8	12
A9	5/8" X 10" HEX BOLTS A307 GRD.5 BCT POSTS (9-10-11-12-13-14)	A9	2	A9	6
A10	5/8" X 1 1/4" H.G.R. BOLTS SPLICES AT POST (2-3-4-5-6-7-9-11-13) (FBB01)	A10	4	A10	72
A11	5/8" X 2" H.G.R. BOLTS (ROUND TERM-POST 10-END SPLICE) (FBB02)			A11	18
A12	5/8" X 10" H.G.R. BOLTS (I-BEAM POSTS RAIL & BLOCKOUT) (FBB03)	A12	2	A12	10
A13	5/8" X 18" H.G.R. BOLTS (POSTS 9,10,11,12,13,14) (FBB04)			A13	10
A14	RECTANGULAR WASHERS (FWR03) (FOR TERMINAL CONNECTOR RTE01b)			A14	12
A15	7/8" X (LENGTH VARIES) HEX BOLTS A325 OR A449 GR.5			A15	5
A16	1 3/4" O.D. HARDENED FLAT WASHER A325			A16	10
A17	7/8" HEX NUT GR.5 A325			A17	5
A18	55 GALLON DRUM - FILLED WITH SAND 700-7151bs.			A18	6

**GENERAL NOTES**

- FOR ADDITIONAL INSTALLATION INFORMATION AND GUIDANCE CONTACT: TEXAS DEPARTMENT OF TRANSPORTATION, (TXDOT'S DESIGN DIVISION), (512) 416-2678. THE EXACT POSITION OF MBSF SHALL BE SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER. THE SIGHT DISTANCE OF THE INSTALLATION WILL NEED TO BE VERIFIED WITH RESPECT TO THE SPECIFIC SITE PLACEMENT.
- STEEL POSTS ARE NOT PERMITTED AT CRT OR BCT POST POSITIONS.
- RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 12 1/2" OR 25 FOOT NOMINAL LENGTHS.
- BUTTON HEAD "POST" BOLTS (ASTM A307) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND TYPE A (1 3/4" O.D.) WASHER AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 3/8" X 1 1/4" OR 2" LONG AT TRIPLE RAIL SPLICES WITH A DOUBLE RECESSED NUT (ASTM A563).
- FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
- THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A SLOPE RATE OF NOT MORE THAN 1V:10H.
- IT IS NOT RECOMMENDED THAT GUARD FENCE BE PLACED IN THE VICINITY OF CURBS.
- GUARDRAIL POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
- SPECIAL RAIL FABRICATION WILL BE REQUIRED FOR THRIE BEAM RAIL RADIUS (ITEM J).
- ALL MATERIAL AND WORK INVOLVED IS SUBSIDIARY TO SHORT RADIUS BID ITEM, INCLUDING, BUT NOT LIMITED TO FOUNDATIONS, GRADING, THRIE BEAM RAIL, SAND DRUMS, AND OTHER PARTS.
- ALL CABLE ASSEMBLIES SHOULD BE TAUT AFTER INSTALLATION. WHEN CABLES ARE MANIPULATED BY HAND THE CABLES SHOULD NOT MOVE MORE THAN 1" IN ANY DIRECTION PERPENDICULAR TO THE CABLE.
- THE DRUMS ARE EAGLE MODEL 1656 FILLED WITH 715 LB (-/-15) SAND WITH THE PLASTIC LEVER-LOCK; OR AN APPROVED EQUIVALENT. THE APPROXIMATE HEIGHT OF THE DRUM IS 37" (-/-).
- WHEN THE SHORT RADIUS SYSTEM IS TERMINATED BY A DAT, REFER TO THE LATEST DAT STANDARD FOR INSTALLATION OF THE DAT SYSTEM. IF THE SYSTEM IS TERMINATED BY ANOTHER END TERMINAL SYSTEM, REFER TO THE CORRESPONDING END TERMINAL STANDARD.
- WHEN THE PLANNED LOCATION OF POST (I) IS WITHIN THE RIGHT-OF-WAY AND WITHIN THE CLEAR ZONE OF THE DIRECTION OF THE OPPOSING TRAFFIC, AN APPROPRIATE CRASHWORTHY END TERMINAL SHALL BE INSTALLED IN PLACE OF THE DOWNSTREAM ANCHOR TERMINAL (DAT). THE PAYMENT OF THE COMPLETE SHORT RADIUS SYSTEM WITH A DAT AT THE TERMINUS WILL BE WITH BID ITEMS: 540 6016 DOWNSTREAM ANCHOR TERMINAL SECTION, AND 540 6046 TL-2 31" SHORT RADIUS (W/O DAT). THE PAYMENT OF THE SYSTEM TERMINATED BY A CRASHWORTHY END TERMINAL (IN LIEU OF THE DAT) WILL BE WITH BID ITEMS: 540 6046 TL-2 31" SHORT RADIUS (W/O DAT), AND 544 6001 GUARDRAIL END TREATMENT (INSTALL).
- TESTED TO MASH WITH A 3:1 SLOPE OR SHALLOWER IS PREFERABLE IN THE LIMITS OF THE TOP AND BOTTOM OF THE SLOPE AS SHOWN IN THE PLAN VIEW. IF FIELD CONDITIONS REQUIRE A STEEPER SLOPE, THIS MAY BE ALLOWABLE UP TO A 2:1 SLOPE. CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE.


NOTE: SEE SHEET 1 OF 3.

**SPECIAL APPLICATION NOTES.**

- THIS IS A MASH COMPLIANT TL-2 SHORT RADIUS GUARDRAIL SYSTEM 31 INCHES TALL. THE SYSTEM REQUIRES A MINIMUM PLACEMENT FOOTPRINT OF 35' ALONG THE PRIMARY ROAD AND 30' ALONG THE SECONDARY DRIVEWAY.
- THE SYSTEM ALSO REQUIRES A MINIMUM 3' WIDE (WORK ZONE) DIRECTLY BEHIND THE GUARDRAIL SYSTEM, WITH A SLOPE AT 1V:10H, FROM THERE A 3:1 SLOPE IS RECOMMENDED. SEE SHEET 2 OF 3 FOR SLOPE DETAILS.
- NOTE FOR INSTALLER: THE TWO (2) CRT POSTS ITEM (R), AT POST LOCATIONS 7 & 8., WILL REQUIRE THE FOLLOWING FIELD ADJUSTMENT. USING A 3/4" X 10" LONG SPADE BIT DRILL ONE (1) ADDITIONAL HOLE 7-7/8" DIRECTLY BELOW THE EXISTING TOP HOLE TO ACCOMMODATE THE HARDWARE FOR THE 22" LONG BLOCKOUT.  
  
OPTION FOR ADDITIONAL 3/4" HOLE. THE 22" LONG BLOCKOUT (PDB01a) IS MANUFACTURED WITH TWO 3/4" DRILLED HOLES FOR THE POST HARDWARE, THEREFORE THE BLOCKOUT CAN BE USED AS A TEMPLATE GUIDE FOR THE BOTTOM 3/4" HOLE. AFTER INSTALLING THE CRT POST USE THE TOP HOLE TO MOUNT THE 22" LONG BLOCKOUT TO POST, USE THE BLOCKOUT'S PRE-DRILLED HOLE AS A GUIDE FOR THE BOTTOM 3/4" HOLE.





(MASH TL-2 COMPLIANT)  
TESTED TO MASH TL-2 WITH A 3:1 SLOPE

SHEET 3 OF 3

		Design Division Standard	
<b>TL-2 SHORT RADIUS GUARDRAIL MASH COMPLIANT SRG (TL-2) -21</b>			
FILE: arg1221	TXDOT	CK:KM	DN:VP
© TXDOT: FEBRUARY 2021	CONT: 6388	SECT: 89	JOB: 001
REVISIONS			US B2; ETC
	DIST:	COUNTY:	SHEET NO.:
	PAR:	LAMAR; ETC	52



DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

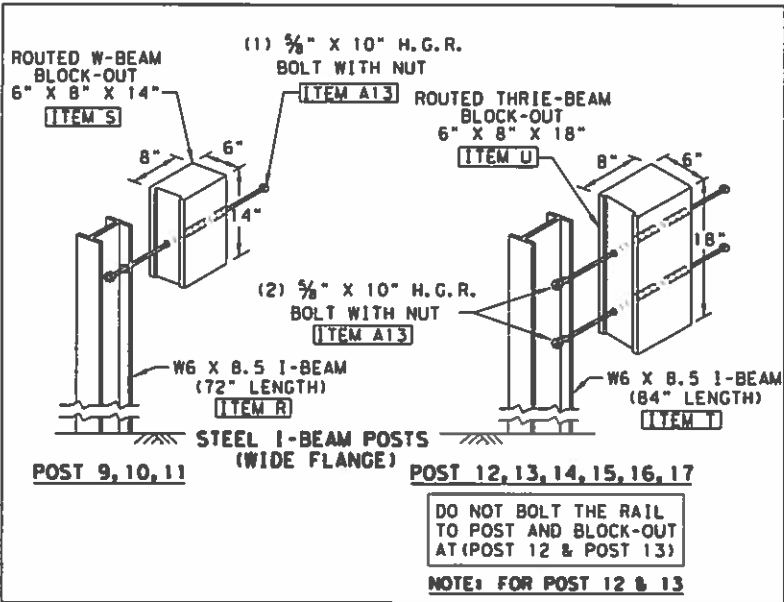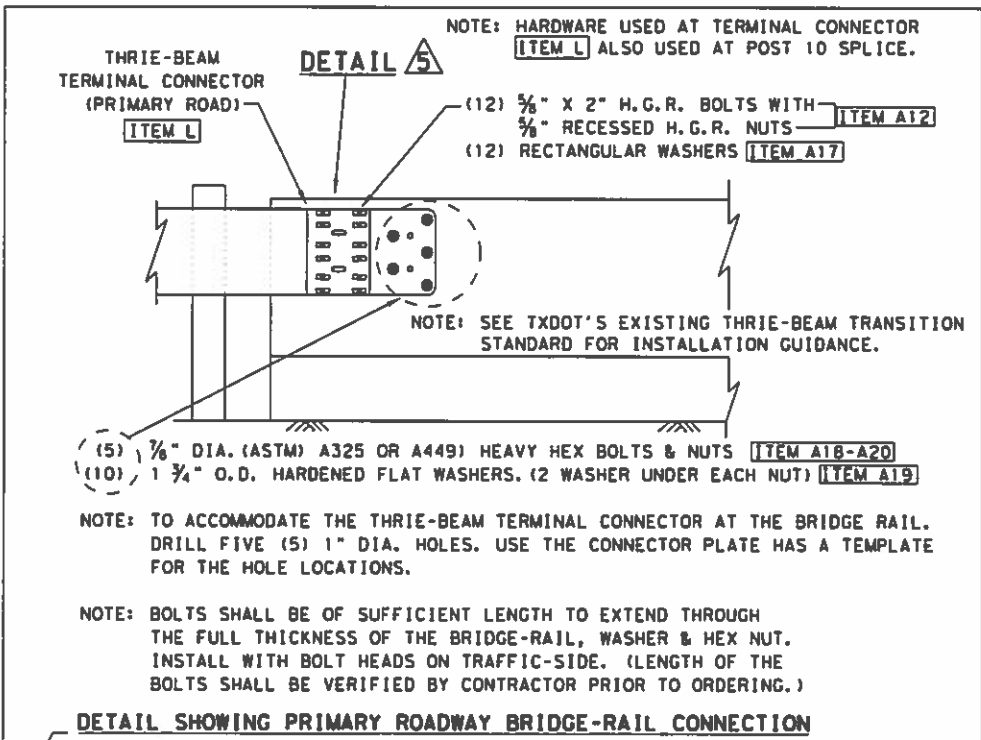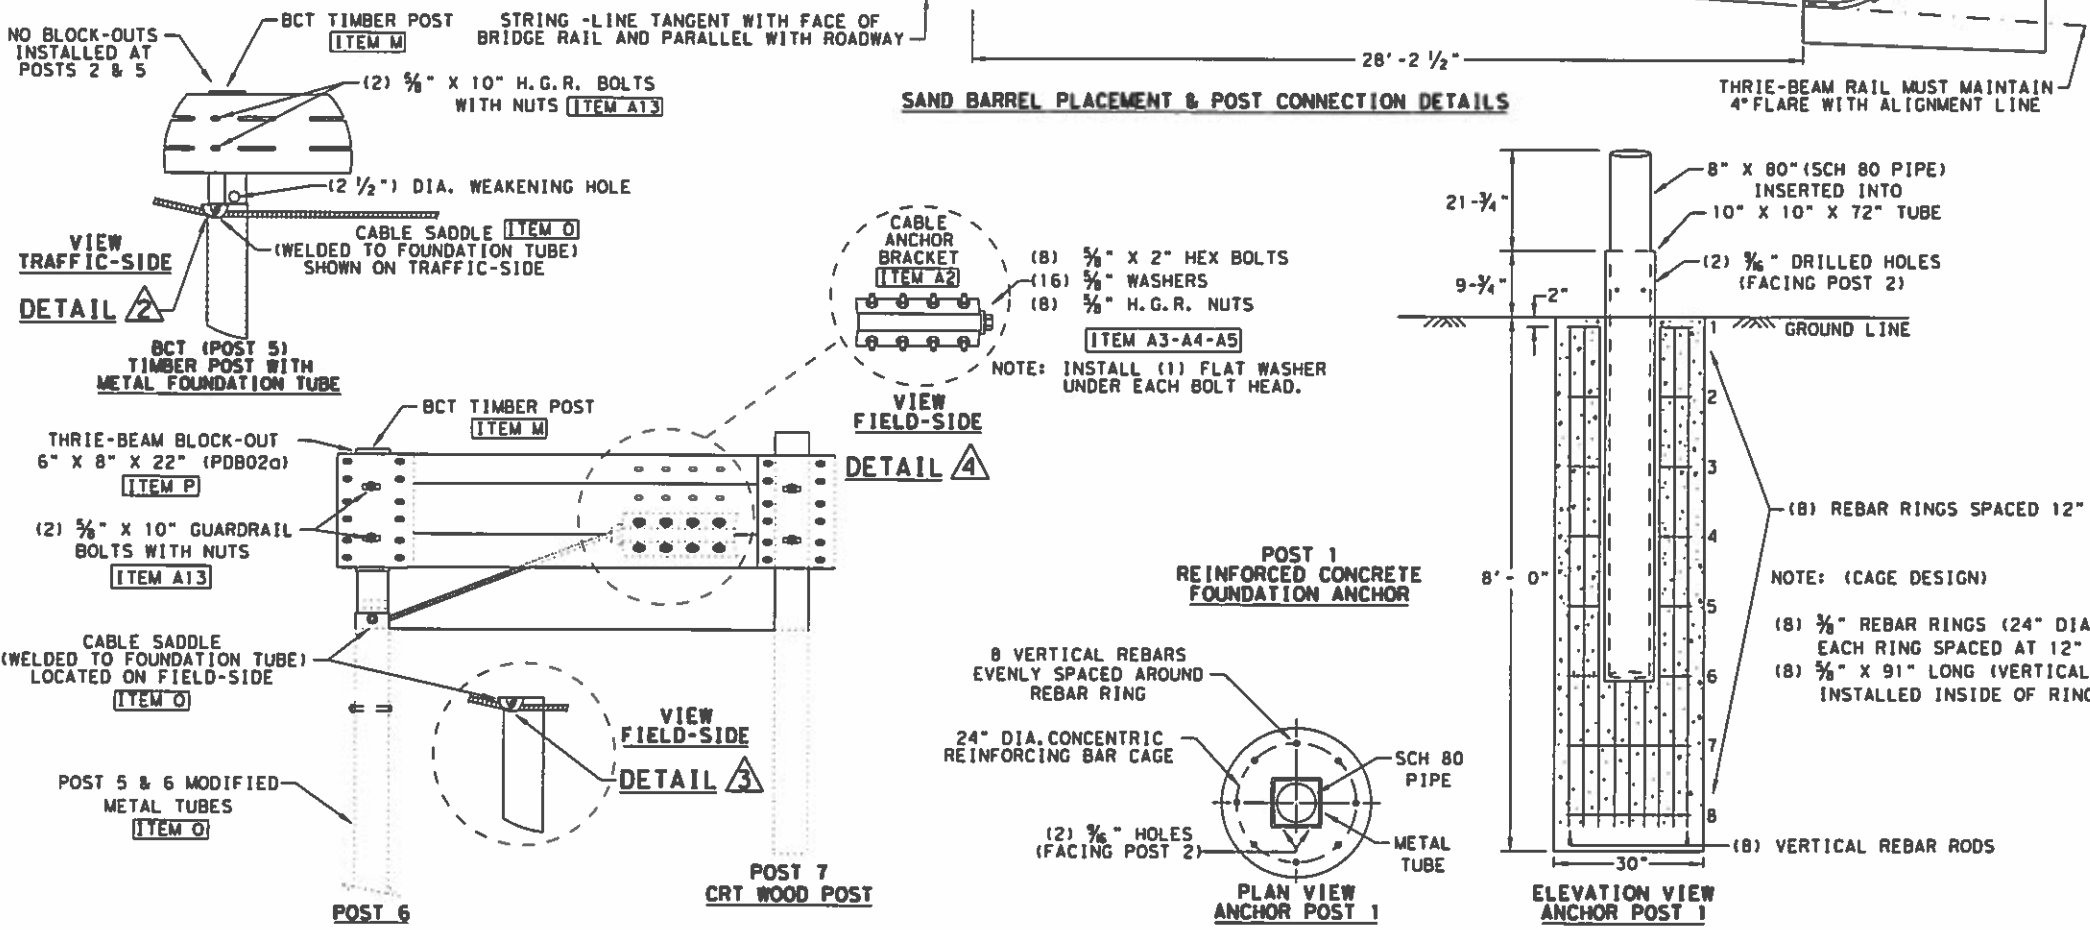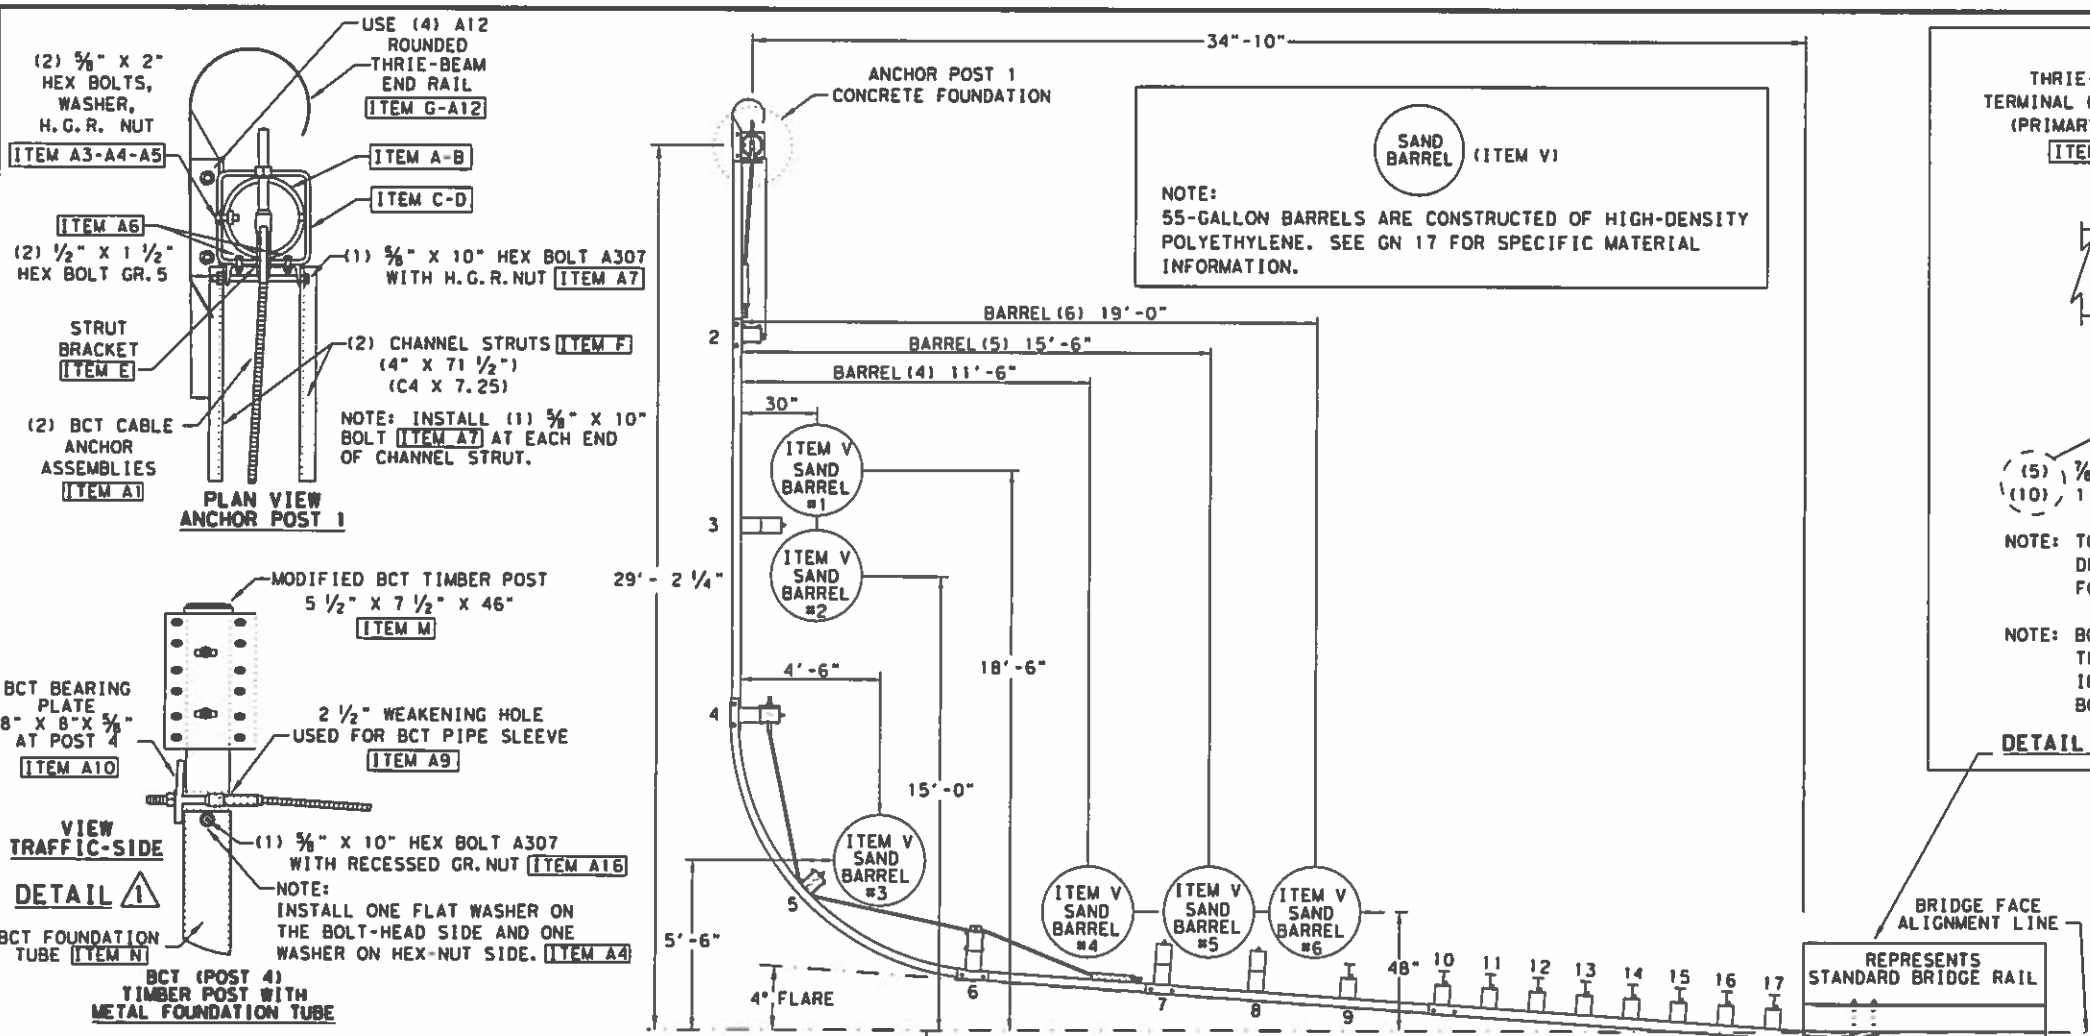

(MASH TL-3 COMPLIANT)  
 TESTED TO MASH TL-3 WITH A 3:1 SLOPE

SHEET 2 OF 3

Texas Department of Transportation

Design Division Standard


**TL-3**  
**SHORT RADIUS GUARDRAIL**  
**MASH COMPLIANT**  
**SRG (TL-3) -21**

FILE: srg1321	TXDOT	CKIM	DNI VP	CKICL
© TXDOT: FEBRUARY 2021	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82; ETC
	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	54	

DATE: FILE:



DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

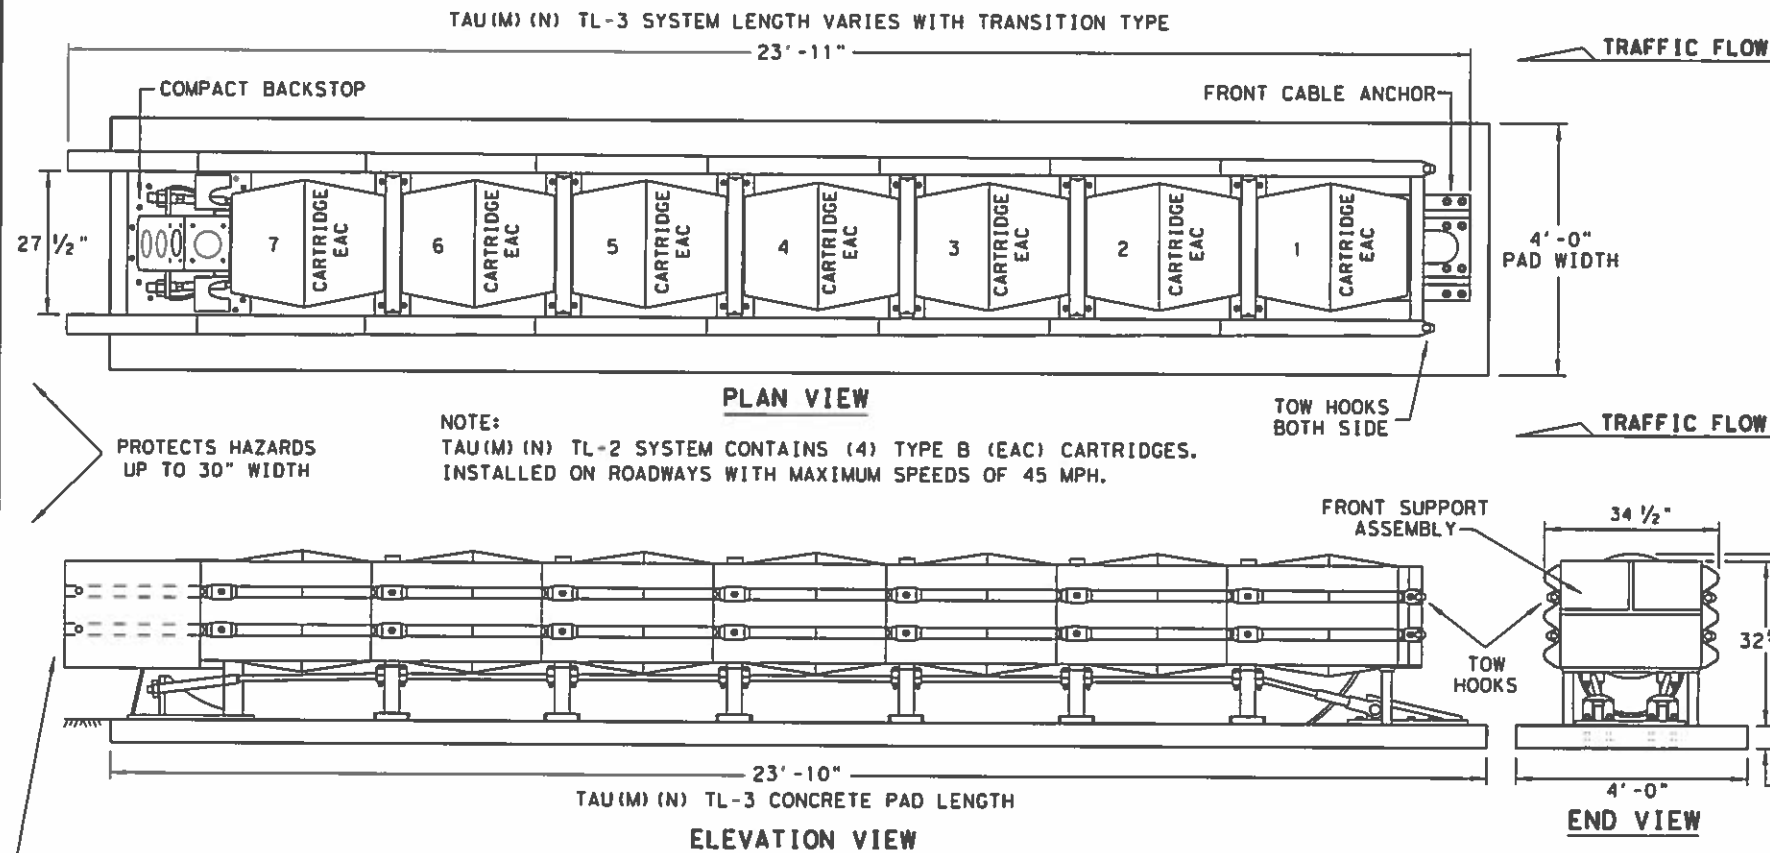

**GENERAL NOTES**

- FOR SPECIFIC INFORMATION REGARDING THE INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800, 180 RIVER ROAD, RIO VISTA, CA 94571
- REFER TO THE LATEST (LTS) INSTALLATION INSTRUCTION MANUAL FOR IMPORTANT SAFETY MESSAGES, COMPLETE SYSTEM ASSEMBLY, AND ANCHOR INSTALLATION REQUIREMENTS FOR THE NINE (9) DIFFERENT SITE TRANSITIONS.
- INSTALLATION DETAILS FOR THE COMPACT BACKSTOP, FRONT CABLE ANCHOR AND FOUNDATION OPTIONS ARE SHOWN ON THE INSTALLATION INSTRUCTION MANUAL FURNISHED TO THE ENGINEER.
- CONCRETE SHALL BE CLASS "S" WITH A MINIMUM COMPRESSIVE STRENGTH OF 4,000 P.S.I.
- IF THE CROSS-SLOPES VARIES MORE THAN 2% OVER THE LENGTH OF THE SYSTEM, THE CONCRETE PAD WILL REQUIRE LEVELING. MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE TAU(M) (N) SYSTEM SHOULD BE APPROXIMATELY PARALLEL WITH THE BARRIER OR CENTER LINE OF MERGING BARRIERS.
- THIS DRAWING REPRESENTS THE UNIVERSAL TAU(M) (N) TL-3 SYSTEM, A RE-DIRECTIVE NON-GATING CRASH CUSHION THAT CAN PROTECT HAZARDS UP TO 30-INCHES IN WIDTH. ALSO AVAILABLE IN TL-2 CONFIGURATION.

NOTE:  
TAU(M) (N) TL-2 SYSTEM CONTAINS (4) TYPE B (EAC) CARTRIDGES.  
INSTALLED ON ROADWAYS WITH MAXIMUM SPEEDS OF 45 MPH.

NOTE:  
PAD THICKNESS VARIES - SEE FOUNDATION OPTIONS

NOTES:  
TRANSITIONS AND ATTACHMENTS TO VARIOUS BARRIER SHAPES, RAILINGS AND BI-DIRECTIONAL TRAFFIC FLOWS ARE AVAILABLE. SEE MANUFACTURER'S INSTALLATION INSTRUCTIONS MANUAL FOR ADDITIONAL TRANSITION DETAILS.

NOTE:  
CONCRETE FOUNDATION PAD LENGTH VARIES WITH TL-3 AND TL-2 SYSTEMS, SEE SYSTEM & FOUNDATION LENGTH TABLE.

FOUNDATION OPTIONS
6" REINFORCED CONCRETE
8" UNREINFORCED CONCRETE
ASPHALT OVER CONCRETE WITH MINIMUM 6" EMBEDMENT IN CONCRETE
* 6" ASPHALT OVER 6" COMPACT SUBBASE
8" MINIMUM ASPHALT

SYSTEM & FOUNDATION LENGTH TABLE	
SYSTEM LENGTH	FOUNDATION LENGTH
TL-2 = 15'-5"	TL-2 = 15'-4"
TL-3 = 23'-11"	TL-3 = 23'-10"


BILL OF MATERIALS FOR TAU(M) (N) TL-3 & TL-2 SYSTEMS		QUANTITIES	
PART NUMBER	PART DESCRIPTION	TL-3 SYSTEM	TL-2 SYSTEM
BSI-1708019-00	SLIDING PANEL GALVANIZED TAU(M) (N)	14	8
BSI-1708030-00	END PANEL, THRIE BEAM, GALV, TAU(M) (N)	2	2
BSI-1706001-00	CABLE ASSEMBLY, 7 BAY, TAU(M) (N)	2	-
BSI-1805036-00	CABLE ASSEMBLY, 4 BAY, TAU(M) (N)	-	2
BSI-1708018-00	FRONT CABLE ANCHOR	1	1
BSI-1707034-00	COMPACT BACKSTOP	1	1
B030703	MIDDLE SUPPORT ASSEMBLY	6	3
B030704	FRONT SUPPORT	1	1
B010722	ENERGY ABSORBING CARTRIDGE, TYPE B	7	4
K001005	TAU-II FRONT SUPPORT LEG KIT	1	1
BSI-1709083-KT	TETHER KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1809041-KT	SLIDER KIT (INCLUDES ALL HARDWARE)	7	4
BSI-1808033-KT	CABLE GUIDE KIT (INCLUDES ALL HARDWARE)	6	3
BSI-1809040-KT	TOW HOOK KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808034-KT	DELINEATION BRACKET KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808035-KT	END PANEL MOUNT KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808036-KT	CONCRETE ANCHORING KIT	1	1
* * SEE NOTE	HIGH REFLECTIVE DECAL	1	1
ECN 3883	INSTALLATION AND INSTRUCTIONS MANUAL	1	1

\* NOTE:  
REQUIRES AN ASPHALT ANCHORAGE PACKAGE: INCLUDES ADDITIONAL BRACES FOR THE FRONT CABLE ANCHOR AND THE COMPACT BACKSTOP, AND ASPHALT HARDWARE KIT. THE TL-3 ASPHALT CONFIGURATION ALSO REQUIRES NESTED SLIDER PANELS AND SHIMS AT THE LAST TWO BAYS. SEE MANUFACTURER'S INSTALLATION INSTRUCTION MANUAL FOR DETAILS.

\* \* NOTE:  
ENGINEER OR CONTRACTOR SHALL COORDINATE WITH THE MANUFACTURER FOR THE CORRECT DECAL PER TRAFFIC FLOW, LEFT, RIGHT OR BOTH-SIDES.

NOTE:  
SEE MANUFACTURER'S INSTALLATION INSTRUCTION MANUAL FOR FOUNDATION SPECIFICATIONS THAT INCLUDE, STONE AGGREGATE MIX, COMPRESSION STRENGTH, STEEL SIZE, ANCHOR SIZE, AND EMBEDMENT DEPTH.

NOTE:  
DELINEATION BRACKET ATTACHES TO FRONT SUPPORT ASSEMBLY.

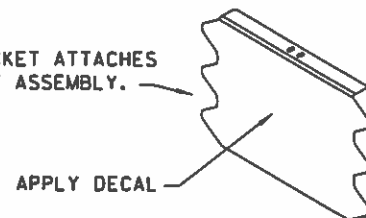

**DELINEATION BRACKET**

NOTE:  
APPLY A HIGH REFLECTIVE DECAL TO THE DELINEATION BRACKET. DELINEATION DECAL ORIENTATION IS SHOWN ON THE CONSTRUCTION PLAN SET AND SHALL BE IN ACCORDANCE WITH THE TEXAS MUTCD FOR (TRAFFIC CONTROL DEVICES). DECALS ARE AVAILABLE FOR TRAFFIC FLOW ON THE LEFT-SIDE, BOTH -SIDES AND RIGHT-SIDE.

NOTES:  
UPGRADE KITS ARE AVAILABLE TO RETROFIT EXISTING NCHRP 350 TAU-II SYSTEMS TO MASH COMPLIANT SYSTEMS. SEE MANUFACTURER'S PRODUCT INFORMATION.

THE TAU(M) (N) UNIDIRECTIONAL SYSTEM IS FREE STANDING AND IS NOT REQUIRED TO BE CONNECTED TO THE HAZARD.

TRANSITIONS TO GUARD FENCE, BRIDGE RAILS AND ROADSIDE BARRIERS SHALL BE IN ACCORDANCE WITH TxDOT'S POLICY.

NOTE:  
THIS STANDARD IS A BASIC REPRESENTATION OF THE UNIVERSAL TAU(M) (N) SYSTEM, IT IS NOT INTENDED TO REPLACE THE INSTALLATION INSTRUCTION MANUAL.

REUSABLE

TRANSITION OPTIONS	
USE THE COMPACT BACKSTOP	VERTICAL WALL
	CONCRETE TRAFFIC BARRIERS
	W-BEAM GUARDRAIL
	THRIE BEAM GUARDRAIL

NOTE:  
FOR BI-DIRECTIONAL TRANSITION PANELS AND BRIDGE RAIL END SHOE DETAILS. SEE MANUFACTURER'S INSTALLATION INSTRUCTIONS MANUAL.

**Texas Department of Transportation**

Design Division Standard

**LINDSAY TRANSPORTATION SOLUTIONS**

**UNIVERSAL CRASH CUSHION (MASH TL-3 & TL-2)**



**TAU(M) (N) - 19**

FILE: tau19.dgn	DN: TxDOT	CK: KM	DN: VP	CR:
© TxDOT: APRIL 2019	CONF: 6388	SECT: 89	JOB: 001	HIGHWAY: US 82; ETC
REVISIONS	DIST: PAR	COUNTY: LAMAR; ETC	SHEET NO.:	56

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

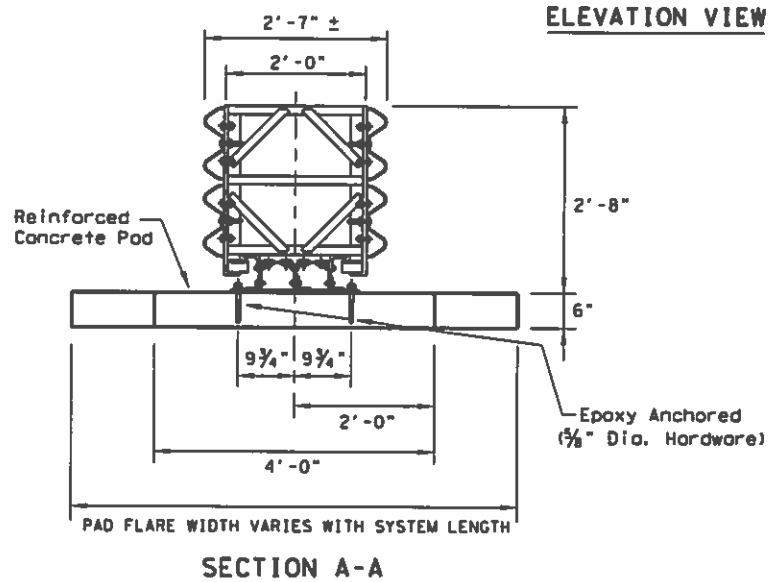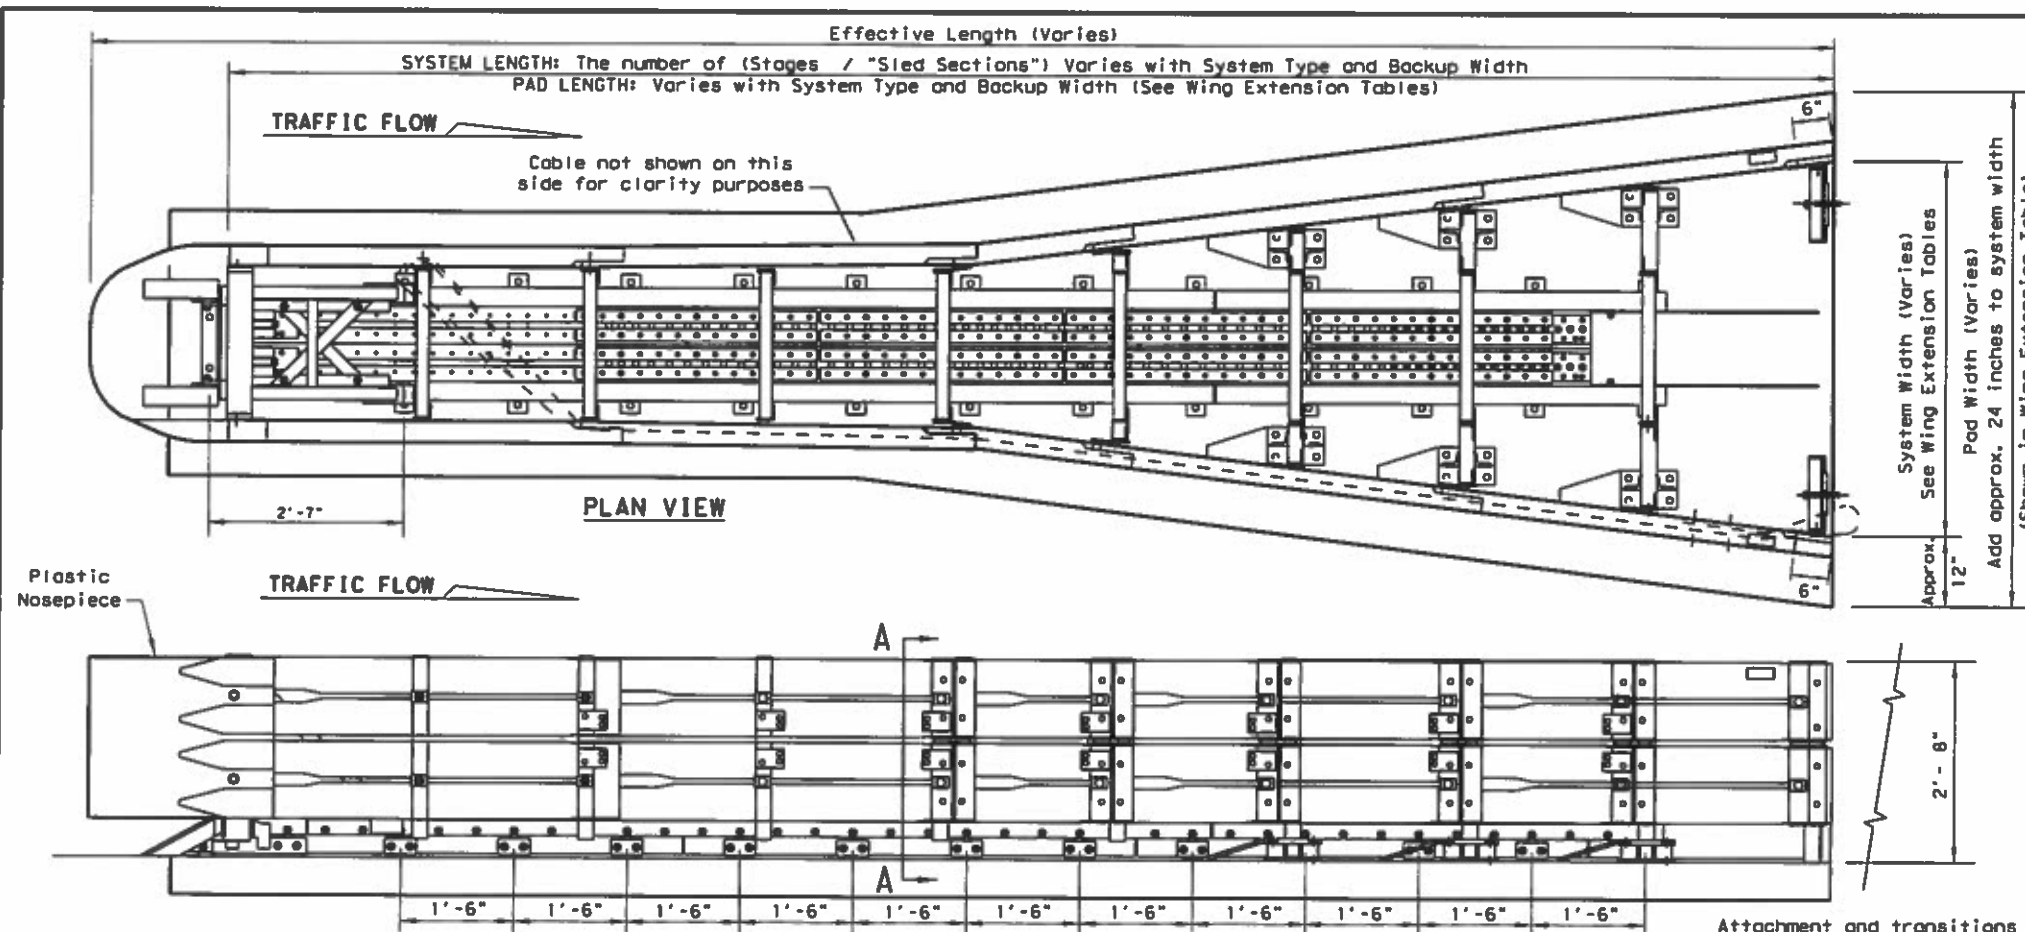

TYPE (WIDE)	TEST LEVEL
FASTRACC (4 Stage System)	70
TRACC (3 Stage System)	TL-3
SHORTTRACC (2 Stage System)	TL-2

NOTE: The Stage System refers to number of replaceable "sled sections" that could be replaced independently.

NUMBER OF WING EXTENSIONS	WIDTH	SYSTEM LENGTH	EFFECTIVE LENGTH	Wide-FASTRACC EXTENSION PART NUMBER (LEFT# / RIGHT#)
0 (BASE UNIT)	71"	25'-11"	27'-11"	
1	78"	28'-3"	30'-3"	33940
2	85"	30'-7"	32'-7"	33941 / 33942
3	92"	32'-11"	34'-11"	33943 / 33944
4	99"	35'-2"	37'-2"	33945 / 33946
5	106"	37'-6"	39'-6"	33947 / 33948
6	113"	39'-10"	41'-10"	33949 / 33950
7	120"	42'-2"	44'-2"	33951 / 33952
8	127"	44'-5"	46'-5"	33953 / 33954
9	134"	46'-9"	48'-9"	33955 / 33956
10	141"	49'-1"	51'-1"	33957 / 33958
10*				CONSULT TRINITY SALES PERSON

NUMBER OF WING EXTENSIONS	WIDTH	SYSTEM LENGTH	EFFECTIVE LENGTH	Wide-TRACC EXTENSION PART NUMBER (LEFT# / RIGHT#)
0 (BASE UNIT)	58"	21'	23'	
1	65"	23'-4"	25'-4"	33940
2	72"	25'-8"	27'-8"	33941 / 33942
3	79"	28'	30'	33943 / 33944
4	86"	30'-4"	32'-4"	33945 / 33946
5	92"	32'-8"	34'-8"	33947 / 33948
6	99"	35'	37'	33949 / 33950
7	106"	37'-4"	39'-4"	33951 / 33952
8	113"	39'-8"	41'-8"	33953 / 33954
9	120"	42'	44'	33955 / 33956
10	127"	44'-4"	46'-4"	33957 / 33958
10*				CONSULT TRINITY SALES PERSON

NUMBER OF WING EXTENSIONS	WIDTH	SYSTEM LENGTH	EFFECTIVE LENGTH	Wide-SHORTTRACC EXTENSION PART NUMBER (LEFT# / RIGHT#)
0 (BASE UNIT)	39"	15'	17'	
1	46"	17'-4"	19'-4"	33940
2	53"	18'-9"	20'-9"	33941 / 33942
3	60"	21'-1"	23'-1"	33943 / 33944
4	66"	23'-5"	25'-5"	33945 / 33946
5	73"	25'-8"	27'-8"	33947 / 33948
6	80"	28'-1"	30'-1"	33949 / 33950
7	87"	30'-4"	32'-4"	33951 / 33952
8	94"	32'-7"	34'-7"	33953 / 33954
9	101"	34'-11"	36'-11"	33955 / 33956
10	108"	37'-3"	39'-3"	33957 / 33958
10*				CONSULT TRINITY SALES PERSON

- GENERAL NOTES**
- For specific information regarding installation and technical guidance of the system, contact: Trinity Highway at 1(888)323-6374, 2525 N. Stemmons Freeway - Dallas, TX 75207
  - Contact the company for: Custom widths from 31" up to 57" wide, and transition panels for bi-directional traffic applications.
  - Details of components for the WideTRACC, Backups and re-inforcing details will be shown on the manufacturer's shop drawings furnished to the Engineer.
  - Concrete shall be class "5" with a min. compressive strength 4,000 p.s.i.
  - If the cross-slope varies more than 2% over the length of the system, the concrete pad will require leveling. Maximum permissible cross-slope 8%.
  - The installation area should be free from curbs, elevated objects, or depressions.
  - The WideTRACC system should be approximately parallel with the barrier or E of merging barriers.
  - The Unit shown is flared on both sides, but can be flared on a single side either left or right. The flares will effect the length and width of the system. (See Wing Extension Tables)

Attachment and transitions to other shapes, barriers railings and bi-directional traffic flows are available. (See manufacturer's product manual).

SQUARE CONCRETE BACKUP
CONCRETE BARRIER (CTB) BACKUP
SINGLE SLOPE CONCRETE BARRIER(SSCB)
GUARDRAIL BACKUP (BASE-PLATED POST)
GUARDRAIL BACKUP (DRIVEN POST)

VERTICAL WALL
MODIFIED (CTB) TO VERTICAL WALL
CONCRETE BARRIER (CTB)
GUARDRAIL (W-BEAM)
GUARDRAIL (THRIE-BEAM)

FOR BI-DIRECTIONAL TRANSITION PANEL DETAILS (SEE MANUFACTURER'S PRODUCT MANUAL).  
BACKUP AND TRANSITION TYPES ARE SHOWN ELSEWHERE ON THE PLANS, (I.E. ATTENUATOR LOCATION DETAILS OR IN THE GENERAL NOTES).

6" REINFORCED CONCRETE
8" UNREINFORCED CONCRETE
3" MIN. ASPHALT OVER 3" MIN. CONCRETE
6" ASPHALT OVER 6" COMPACT SUBBASE
8" MINIMUM ASPHALT

FOR STEEL PLACEMENT IN CONCRETE FOUNDATIONS, (SEE MANUFACTURER'S PRODUCT MANUAL).

PART #	QTY	FAST TRACC	TRACC	SHORT TRACC	DESCRIPTION
25937A	1				WIDFASTRACC UNIT ASSEMBLY
25939A	1				WIDETRACC UNIT ASSEMBLY
25997A				1	WIDESHORTTRACC UNIT ASSEMBLY
3310G	4	4	4		3/8" LOCKWASHER
4372G	4	4	4		3/8" FLATWASHER
4451G	4	4	4		3/8" DIA X 6" EXP. WEDGE ANCHOR
6531B	1	1	1		PLASTIC NOSEPIECE
6668B	4	4	4		REFLECTIVE SHEETING
<b>ANCHOR HARDWARE (CONCRETE BASE)</b>					
5204B	72	50	18		3/8" DIA X 7-1/8" THD ANCHOR STUD
4372G	72	50	18		3/8" FLATWASHER
3310G	72	50	18		3/8" LOCKWASHER
3361G	72	50	18		3/8" HEX NUT
5206B	6	4	2		Adhesive, Hilti Hit HY-150
<b>ANCHOR HARDWARE (ASPHALT BASE)</b>					
6380G	72	50	18		3/8" Dia x 18" Thd Anchor Stud
4372G	72	50	18		3/8" Flatwasher
3310G	72	50	18		3/8" Lockwasher
3361G	72	50	18		3/8" HEX NUT
5206B	15	11	4		ADHESIVE, HILTI HIT HY-150
<b>ANCHOR HARDWARE (OPTIONAL ITEMS, AS NEEDED)</b>					
5207B	A/R	A/R	A/R		NOZZLE, MIXER, HILTI HIT HY-150
5208B	A/R	A/R	A/R		EXT. TUBE, MIXER, HILTI HIT HY-150
5205B	A/R	A/R	A/R		DISPENSER GUN, HILTI HIT HY-150
5209B	A/R	A/R	A/R		DRILL BIT, 3/8", HILTI SDS

Texas Department of Transportation

**TRINITY HIGHWAY**

**CRASH CUSHION**

**(WIDE UNIT)**

**TRACC (W) - 16**


FILE# TRACCW16.dgn	DWG TxDOT	CS# KM	DWG VP	CSI VP
©TxDOT February 2006	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82, ETC
REVISED 06, 2013 (VP)	DIST	COUNTY		SHEET NO.
REVISED 03, 2016 (VP)	PAR	LAMAR, ETC		57

REUSABLE

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

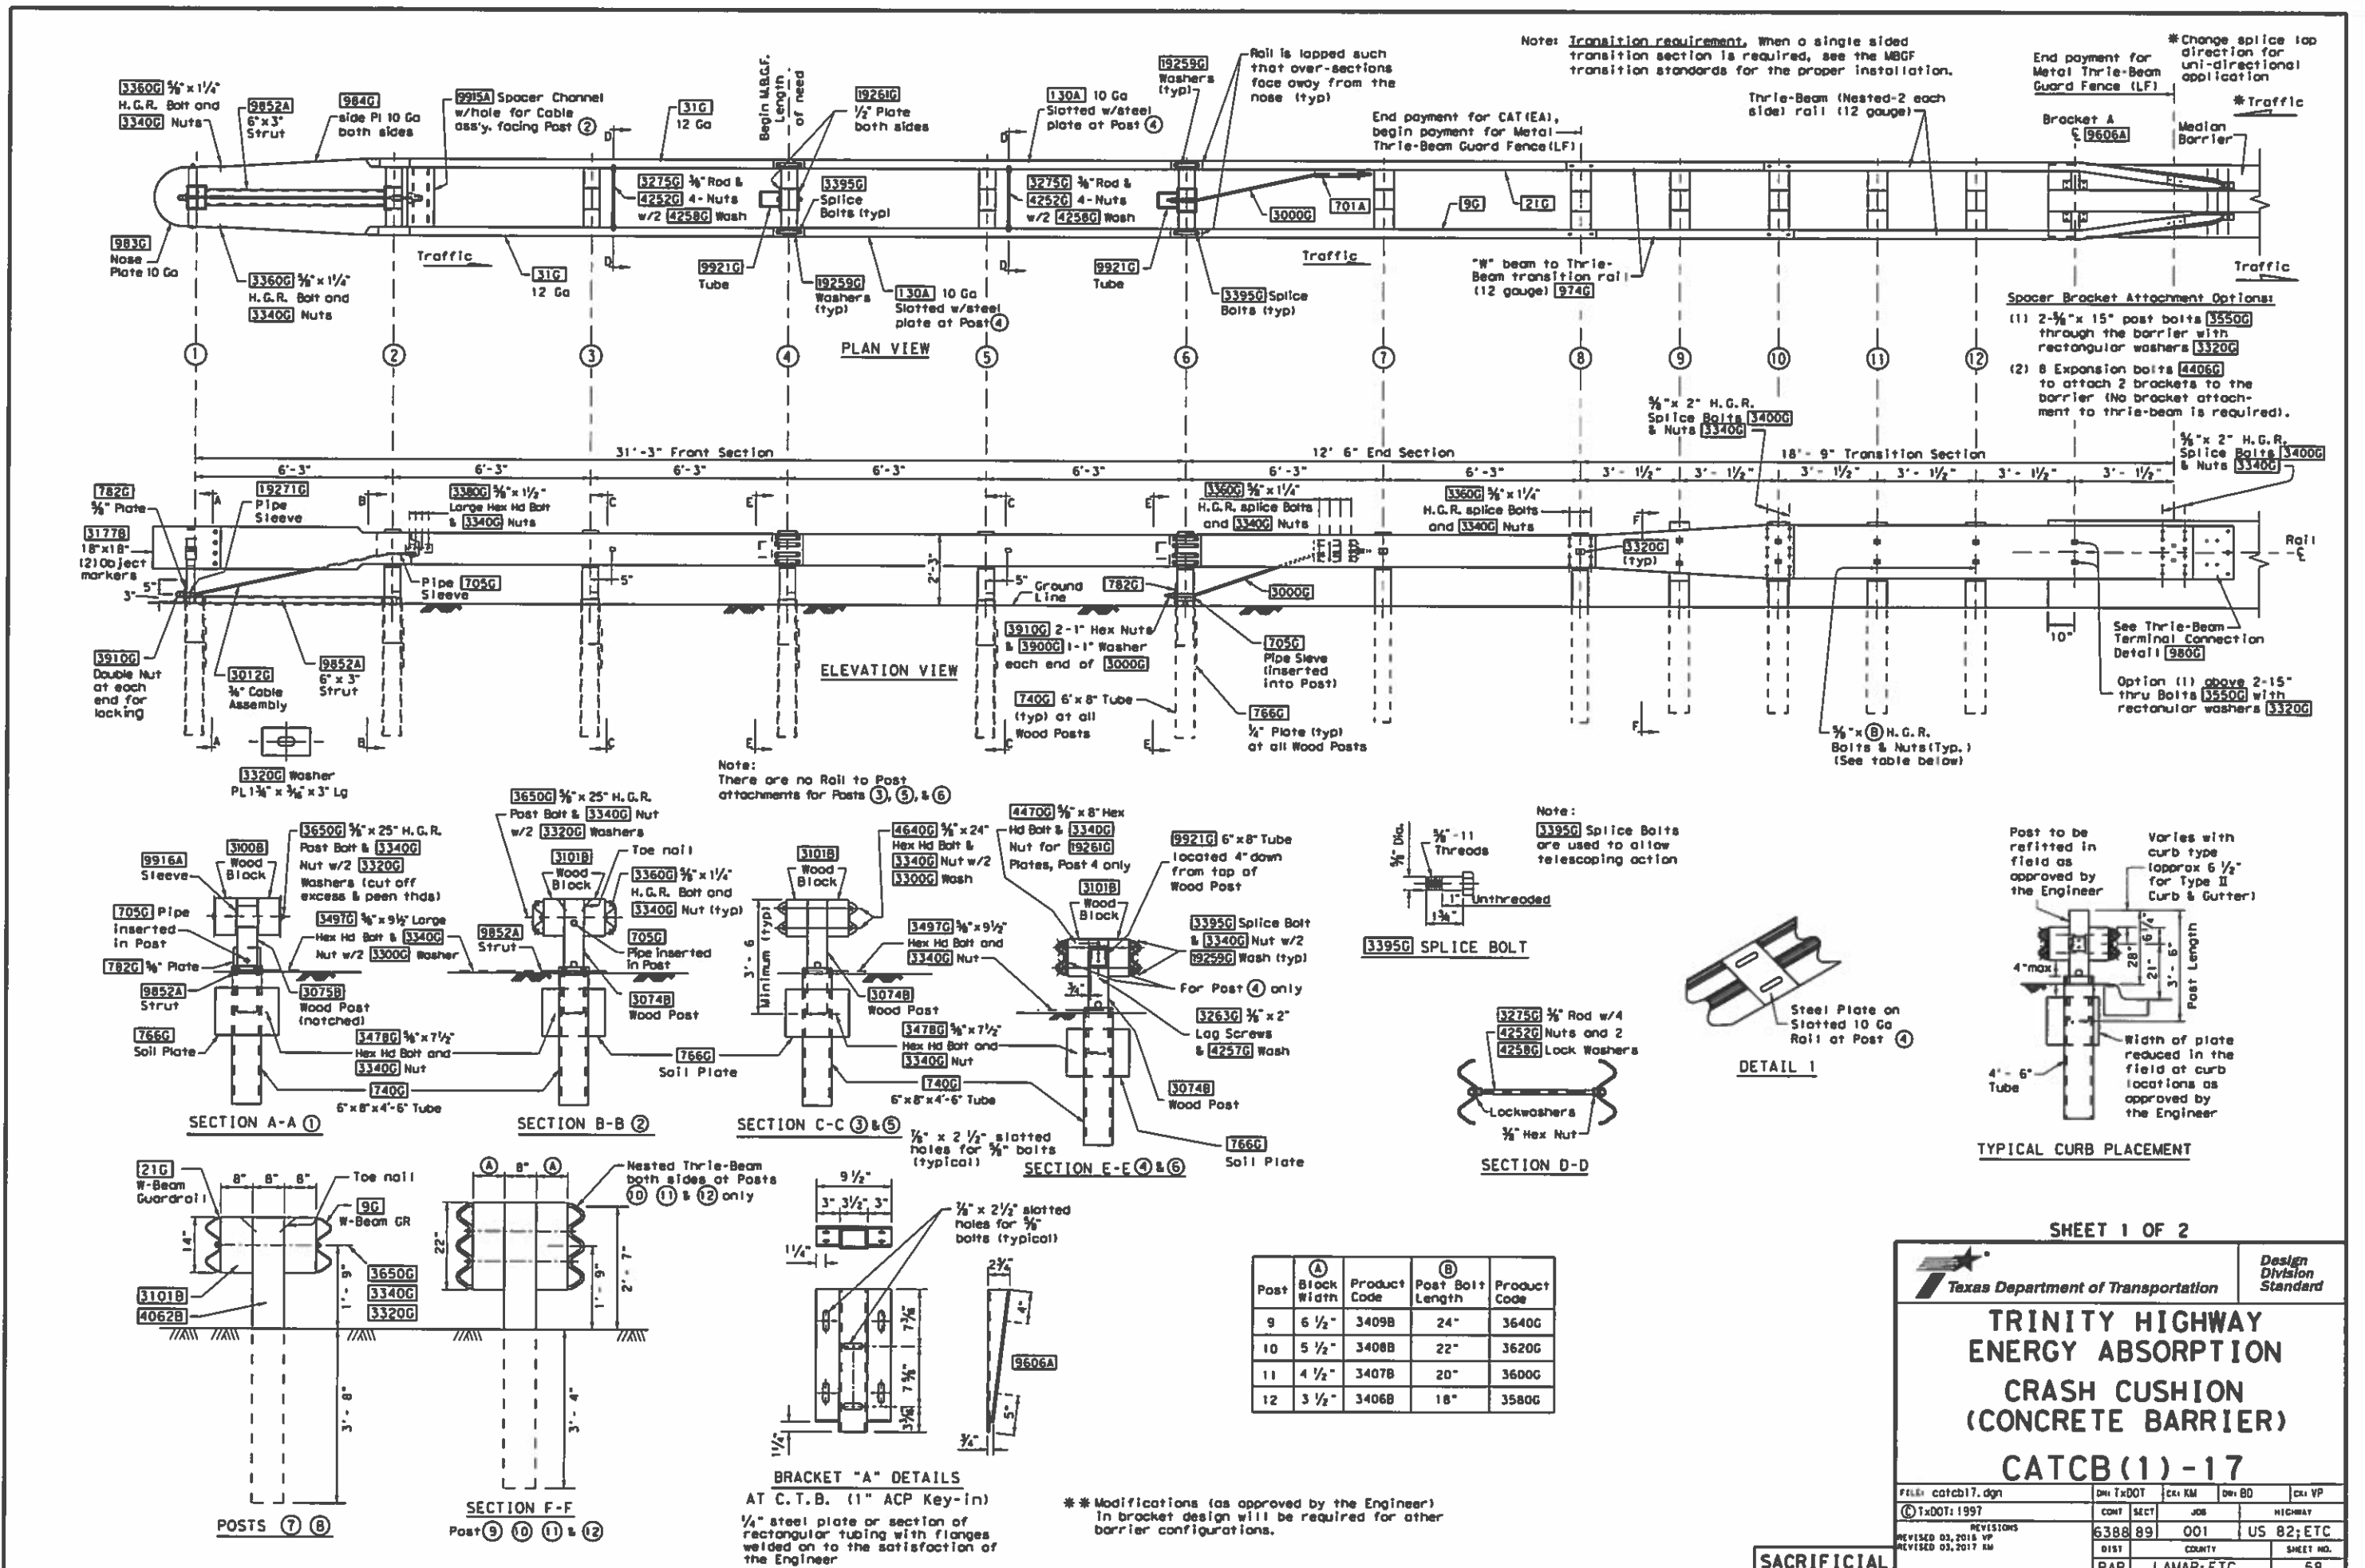

Post	Block Width	Product Code	Post Bolt Length	Product Code
9	6 1/2"	3409B	24"	3640G
10	5 1/2"	3408B	22"	3620G
11	4 1/2"	3407B	20"	3600G
12	3 1/2"	3406B	18"	3580G

SHEET 1 OF 2

Texas Department of Transportation

**TRINITY HIGHWAY ENERGY ABSORPTION CRASH CUSHION (CONCRETE BARRIER) CATCB(1)-17**

Design Division Standard

FILE: catcb17.dgn	DATE: 1997	CHK: KM	DRN: BD	CRK: VP
REVISED 03.2018 VP	REVISED 03.2017 KM	COM: 6388	SEC: 89	JOB: 001
REVISED 03.2017 KM		DIST: PAR	COUNTY: LAMAR, ETC	SHEET NO: 58

**SACRIFICIAL**

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

CATCB FRONT SECTION (POSTS 1 THRU 6)		
BILL OF MATERIAL		
Mfr Code #	QTY	DESCRIPTION
983G	1	Nose Plate (10 Ga)
984G	2	Side Plate (10 Ga)
31G	2	"W" Beam 12 Ga x 13'-6 1/2"
130A	2	"W" Beam 10 Ga x 13'-6 1/2"
9852A	1	Channel Strut x 6'-6"
740G	6	Steel Foundation Tube
766G	6	Soil Plate 18"x 24"
3075B	1	Wood Post 5 1/2" x 7 1/2" (Notched) (Post 1)
3074B	5	Wood Post 5 1/2" x 7 1/2" (Post 2-6)
3100B	2	Wood Block 5 1/2" x 7 1/2" (Post 1)
3101B	10	Wood Block 5 1/2" x 7 1/2" (Post 2-6)
9916A	1	Sleeve (Post 1)
9915A	1	Spacer Channel (Post 2)
9921G	2	Steel Tube (Posts 4 & 6)
19271G	1	Pipe Sleeve (Post 1)
705G	1	Pipe Sleeve (Post 2)
19261G	2	Post Plate (Post 4)
782G	1	Bearing Plate (Post 1)
3012G	1	Cable Assembly (Posts 1 to 2)
3275G	2	3/8" Restraint Rod (Post 3 & 5)
19259G	32	Plate Washer (Posts 4 & 6)

HARDWARE		
Mfr Code #	QTY	DESCRIPTION
3263G	4	3/8" x 2" Lg Lag Screw
4252G	8	3/8" Hex Nut
4258G	4	3/8" Lock Washer
4257G	4	3/8" Flat Washer
3320G	4	Rectangular Washer
3395G	32	3/8" x 1 1/4" H.H. Splice Bolt
3650G	2	3/8" x 25" Lg H.G.R. Bolt
4640G	8	5/8" x 24" Lg H.H. Bolt
3478G	13	3/4" x 7 1/2" Lg H.H. Bolt
3380G	8	5/8" x 1 1/2" Lg H.H. Bolt
3360G	16	3/4" x 1 1/4" Lg H.G.R. Bolt
3340G	85	3/8" H.G.R. Nut
3300G	8	3/8" Flat Washer
3497G	6	3/4" x 9 1/2" Lg H.H. Bolt
3910G	4	1" Hex Nut
3900G	2	1" Flat Washer

CATCB GUARDRAIL TERMINAL END SECTION (POSTS 7 & 8)		
BILL OF MATERIAL		
Mfr Code #	QTY	DESCRIPTION
4064B	2	Wood Post 5 1/2" x 7 1/2" x 6'
3101B	4	Wood Block 5 1/2" x 7 1/2"
21G	1	"W" Beam Guard Rail (12 Ga)
9G	1	"W" Beam Guard Rail (12 Ga)
701A	1	Bracket
782G	1	Bearing Plate
705G	1	Pipe Sleeve
3000G	1	Cable Assembly
3320G	2	Rectangular Washer

HARDWARE		
Mfr Code #	QTY	DESCRIPTION
3360G	24	3/8" x 1 1/4" H.G.R. Splice Bolt
3400G	4	3/8" x 25" H.G.R. Post Bolt
3380G	8	3/8" x 1 1/2" Hex Hd Bolt
3340G	28	3/8" H.G.R. Nut
3300G	8	3/8" Washer
3910G	4	1" Hex Nut
3900G	2	1" Washer

CATCB TRANSITION SECTION (POST 9 THRU END SHOE)		
BILL OF MATERIAL		
Mfr Code #	QTY	DESCRIPTION
211G	4	Thrie beam 12'-6" (12 Ga)
974G	2	Trans panel 6'-3" (12 Ga)
980G	2	Special Thrie beam end shoe
3078B	3	Wood Post 6" x 8" x 6", (Posts 11 & 12)
3320G	20	Rectangular Washer
3340G	62	3/8" H.G.R. Nut
3400G	52	3/8" x 2" Splice Bolt
3406B	2	22 1/2" Block 6" x 3 1/2" (Post 12)
3407B	2	22 1/2" Block 6" x 4 1/2" (Post 11)
3408B	2	22 1/2" Block 6" x 5 1/2" (Post 10)
3409B	2	22 1/2" Block 6" x 6 1/2" (Post 9)
3412B	1	Wood Post 6" x 8" x 6', (Post 9)
3560G	2	3/8" x 16" Bolt
4406G	8	3/8" x 3 3/4" Expansion Bolts w/Nuts
3580G	2	3/8" x 18" Post Bolt (Post 12)
3600G	2	3/8" x 20" Post Bolt (Post 11)
3620G	2	3/8" x 22" Post Bolt (Post 10)
3640G	2	3/8" x 24" Post Bolt (Post 9)
3725G	12	3/8" Washer (End Shoe Bolts)
3735G	6	3/8" Hex Nuts (End Shoe Bolts)
3840G	3	3/4" x 14" Hex Bolt (End Shoe)
3860G	3	3/8" x 16" Hex Bolt (End Shoe)
9606A	2	Spacer Bracket

Delineation		
Mfr Code #	QTY	DESCRIPTION
3177B	2	Object Marker 18" x 18" (Cut to fit)


  

Optional Hardware for Single Slope Barrier-42"		
Mfr Code #	QTY	DESCRIPTION
3640G	2	3/8" x 24" Bolt
4896G	6	3/8" x 24" Hex Bolt (End Shoe)

\* Expansion or through bolts may be used with optional bracket installation.

**GENERAL NOTES**

- For specific information regarding installation and technical guidance of the system, contact: Trinity Highway at 1(888)323-6374, 70 W. Madison St. Suite 2350, Chicago, IL 60602
- Crown will be widened to accommodate the CAT system. The crown should extend at least 3 feet beyond the inside face of rail. The ground line at posts should be an extension of the roadway surface crown.
- All bolts, nuts, washers, cable assemblies, cable anchors, post tubes, backup plates, and soil plates shall be galvanized.
- The exposed end segment of an "End Section" should be evaluated as a potential obstacle in the determination of the need of MGBF for the opposing direction of traffic.
- For placement at curb sections, the height from gutter pan to post bolt will be 21", and the front section shall be flared (See Detail 2).
- The wood blockouts shall be "toe nailed" to the rectangular wood posts to prevent them from turning when the wood shrinks.
- Either 6"- 8" or 5 1/2" x 7 1/2" wood blocks may be used at posts 1 thru 8 as supplied by the manufacturer.
- If a "single sided" transition section is required for the attachment to a rigid concrete rail, see the MGBF transition standards for the proper installation.
- Object markers shall be installed on the front of the terminal as detailed on the D&OM(VIA).

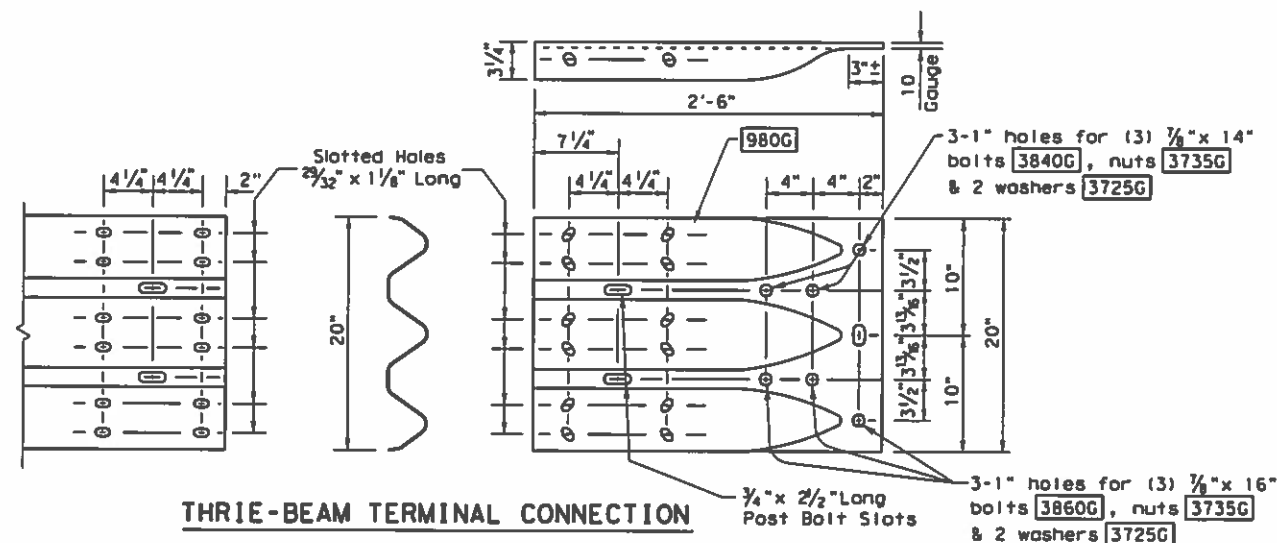

**THRIE-BEAM TERMINAL CONNECTION**

		Design Division Standard	
<b>TRINITY HIGHWAY ENERGY ABSORPTION CRASH CUSHION (CONCRETE BARRIER) CATCB(1)-17</b>			
FILE: cotcd17.dgn	DN: TxDOT	CK: KM	DM: BD
© TxDOT: 1997	CONT: 89	SECT: 001	HIGHWAY: US 82, ETC
REVISIONS REVISED 03, 2016 VP REVISED 03, 2017 KM	DIST: LAMAR, ETC	COUNTY:	SHEET NO.: 59

**SACRIFICIAL**

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS					DELINEATORS				D & OM DESCRIPTIVE CODES		
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	DEVICE	SINGLE		DOUBLE		INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX (XX)	
										NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRFL = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back	
SHEETING Yellow, White or Red Type B or C reflective sheeting					SHEETING Yellow, White or Red Type B or C Reflective Sheeting					DIRECTION	
NOTE 1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (flx). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.					POST TYPE WC YFLX, WFLX WC YFLX, WFLX		MOUNT TYPE GND GND, SRF GND GND, SRF		INSTL OM ASSM (OM-XX) (XXXX)XXX (XX)		

OBJECT MARKERS									
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)		Type 3 (OM-3)			Type 4 (OM-4)	
		OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4
SHEETING Yellow-Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting		SHEETING Yellow - Type B or C Sheeting			SHEETING Alternating acrylic black and retroreflective yellow - Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting			SHEETING Red -Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting	
POST TYPE TWT		POST TYPE WC		POST TYPE WC		POST TYPE WFLX		POST TYPE TWT	
MOUNT TYPE WAS, WAP		MOUNT TYPE GND		MOUNT TYPE GND		MOUNT TYPE GND, SRF		MOUNT TYPE WAS, WAP	

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.			
GF1	GF2	CTB	W1-8				W1-6					
1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			SIZE (W x L)		18" x 24" (Conventional)	24" x 30" (Conventional Oversize)	30" x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)	48" x 24" (Conventional)	60" x 30" (Expressway & Freeway)	
SHEETING Yellow, White, Red			MOUNTING HEIGHT		4'-0" or 7'-0"		7'-0" Only		MOUNTING HEIGHT		7'-0"	
NOTE			1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).									

Texas Department of Transportation  
 Traffic Safety Division Standard

### DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION

#### D & OM(1)-20

FILE: ddm1-20.dgn	DN: TXDOT	CS: TXDOT	DS: TXDOT	CS: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 821 ETC
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	PAR	LAMAR, ETC	60	

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**POST TYPE AND SUPPORT FOUNDATION DETAILS**








**TYPE OF BARRIER MOUNTS**

**WING CHANNEL (WC)**

**FLEXIBLE POSTS (YFLX, WFLX)**

**WEDGE ANCHOR SYSTEMS**


**GUARD FENCE ATTACHMENT**

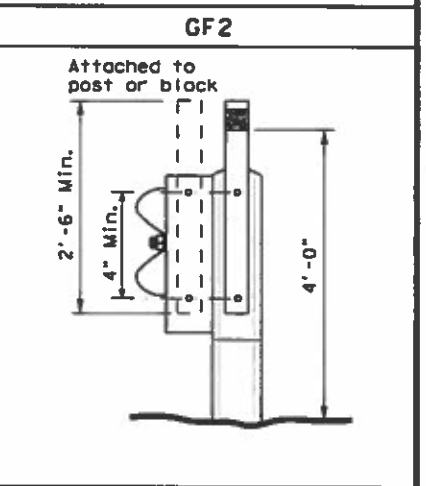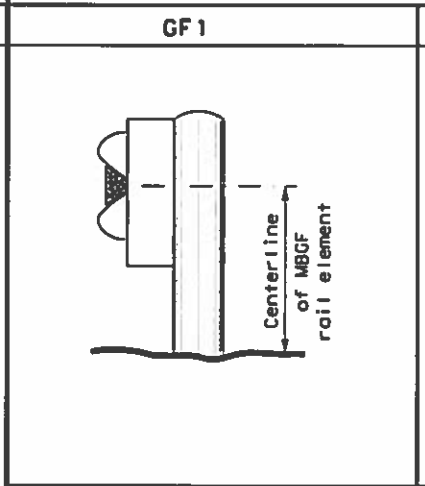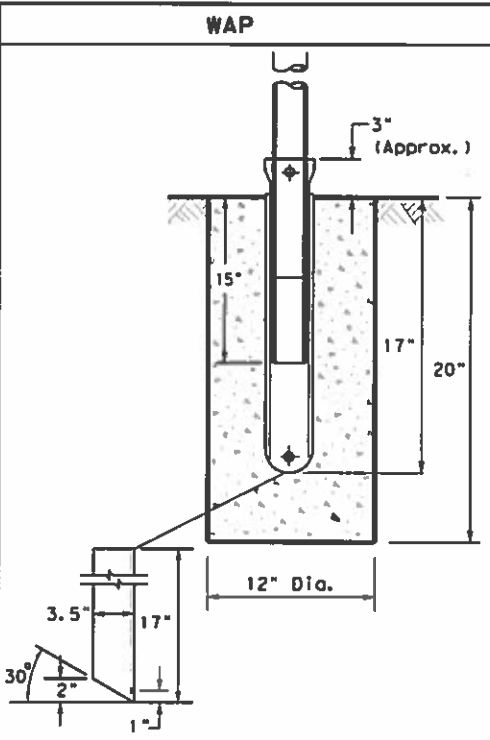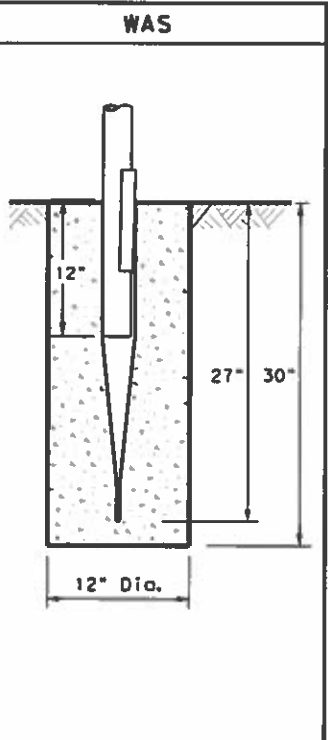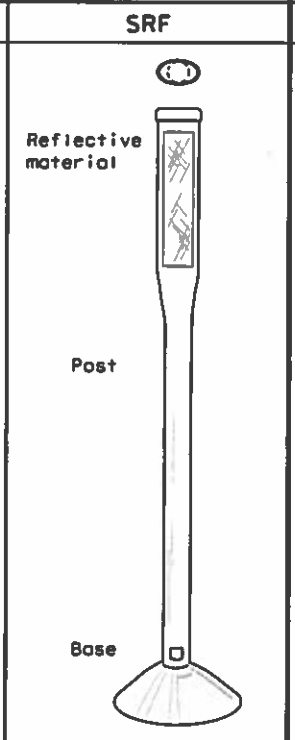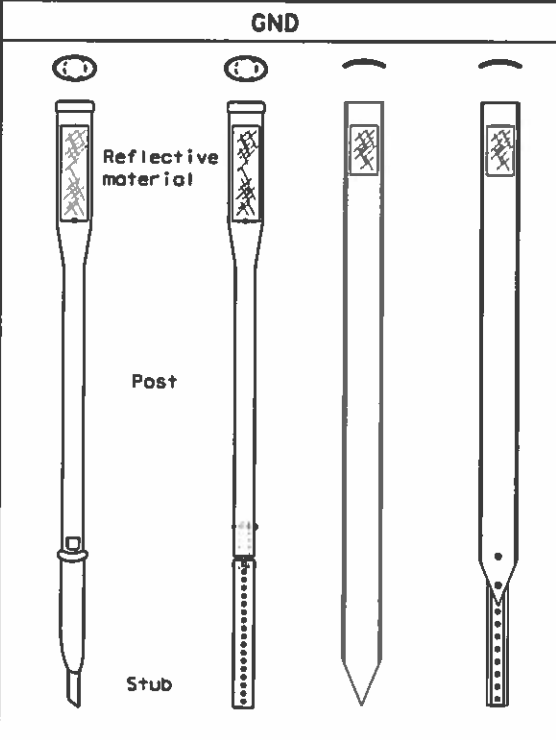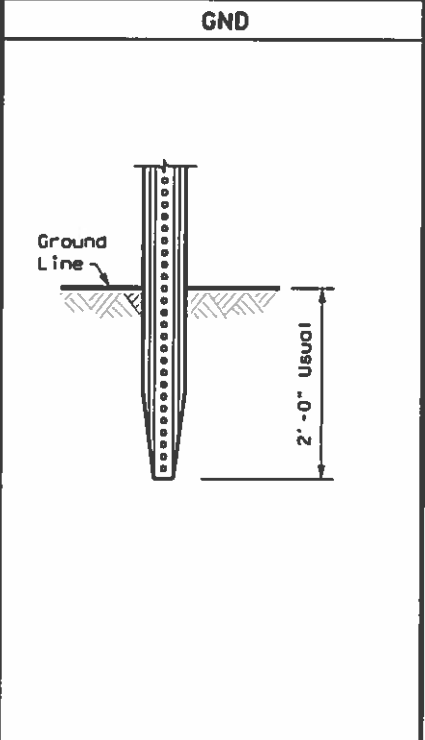

- NOTES**
1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only.
  2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.

- NOTES**
1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices.
  2. Install per manufacturer's recommendations.
  3. Post length may vary to meet field conditions.
  4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.

- NOTE**
1. Install per manufacturer's recommendations.



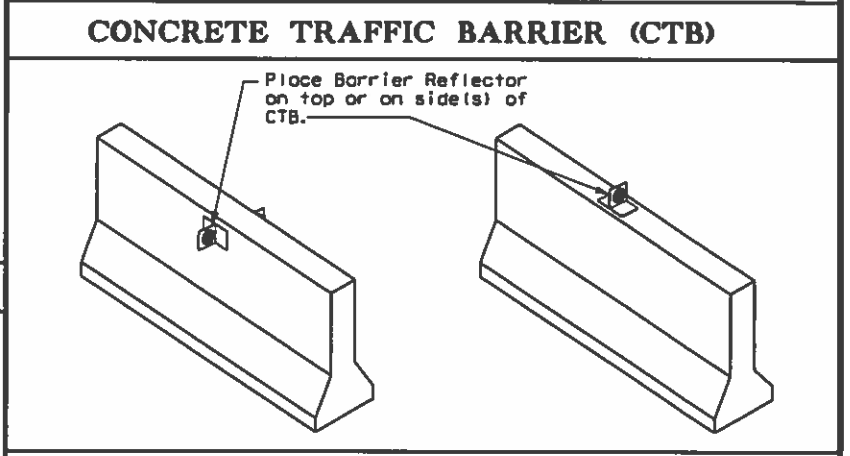


**TYPES 1, 3, AND 4 OBJECT MARKERS AND CHEVRONS**

**CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN**

**DELINEATORS AND TYPE 2 OBJECT MARKERS**

- GENERAL NOTES**
1. Place delineators on a section of roadway at a consistent distance from the edge of pavement.
  2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
  3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
  4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
  5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
  6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.

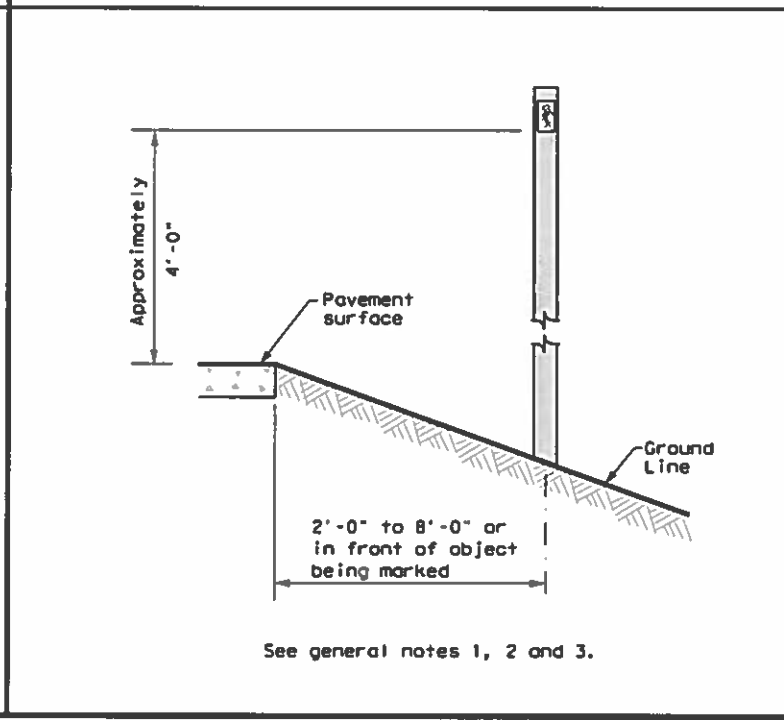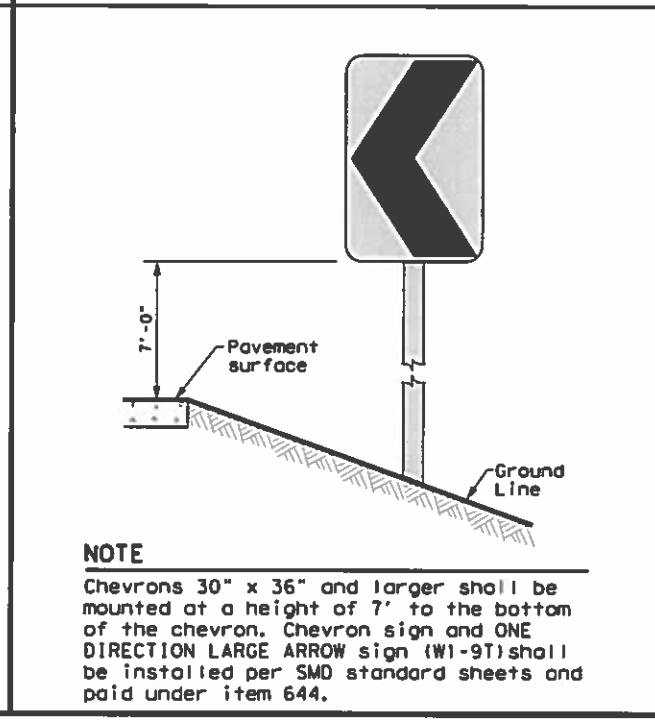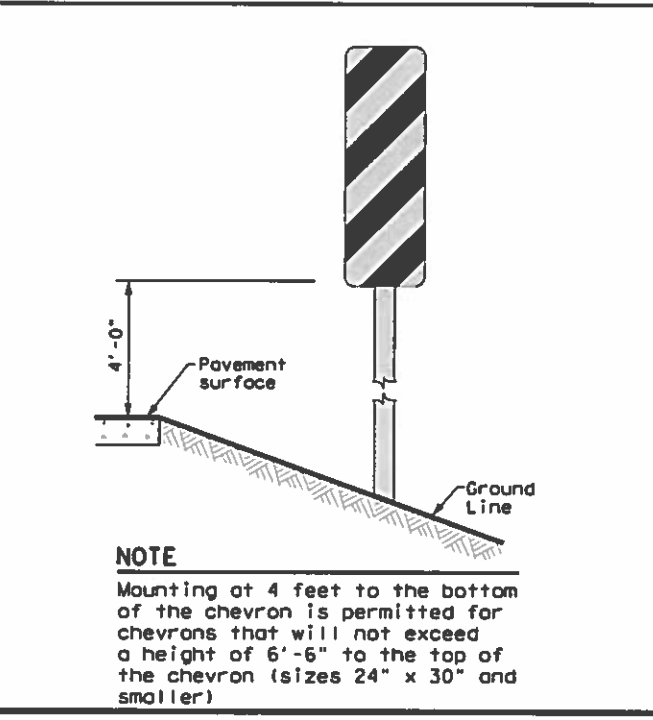

Texas Department of Transportation  
Traffic Safety Division Standard

**DELINEATOR & OBJECT MARKER INSTALLATION**


**D & OM(2)-20**

FILE: dar2-20.dgn	DW: TxDOT	CR: TxDOT	DR: TxDOT	CR: TxDOT
© TxDOT August 2004	CDT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82; ETC
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	PAR	LAMAR; ETC	61	

20B

DATE: FILE:


**TWO-WAY, TWO LANE ROADWAY  
WITH REDUCED WIDTH APPROACH RAIL**

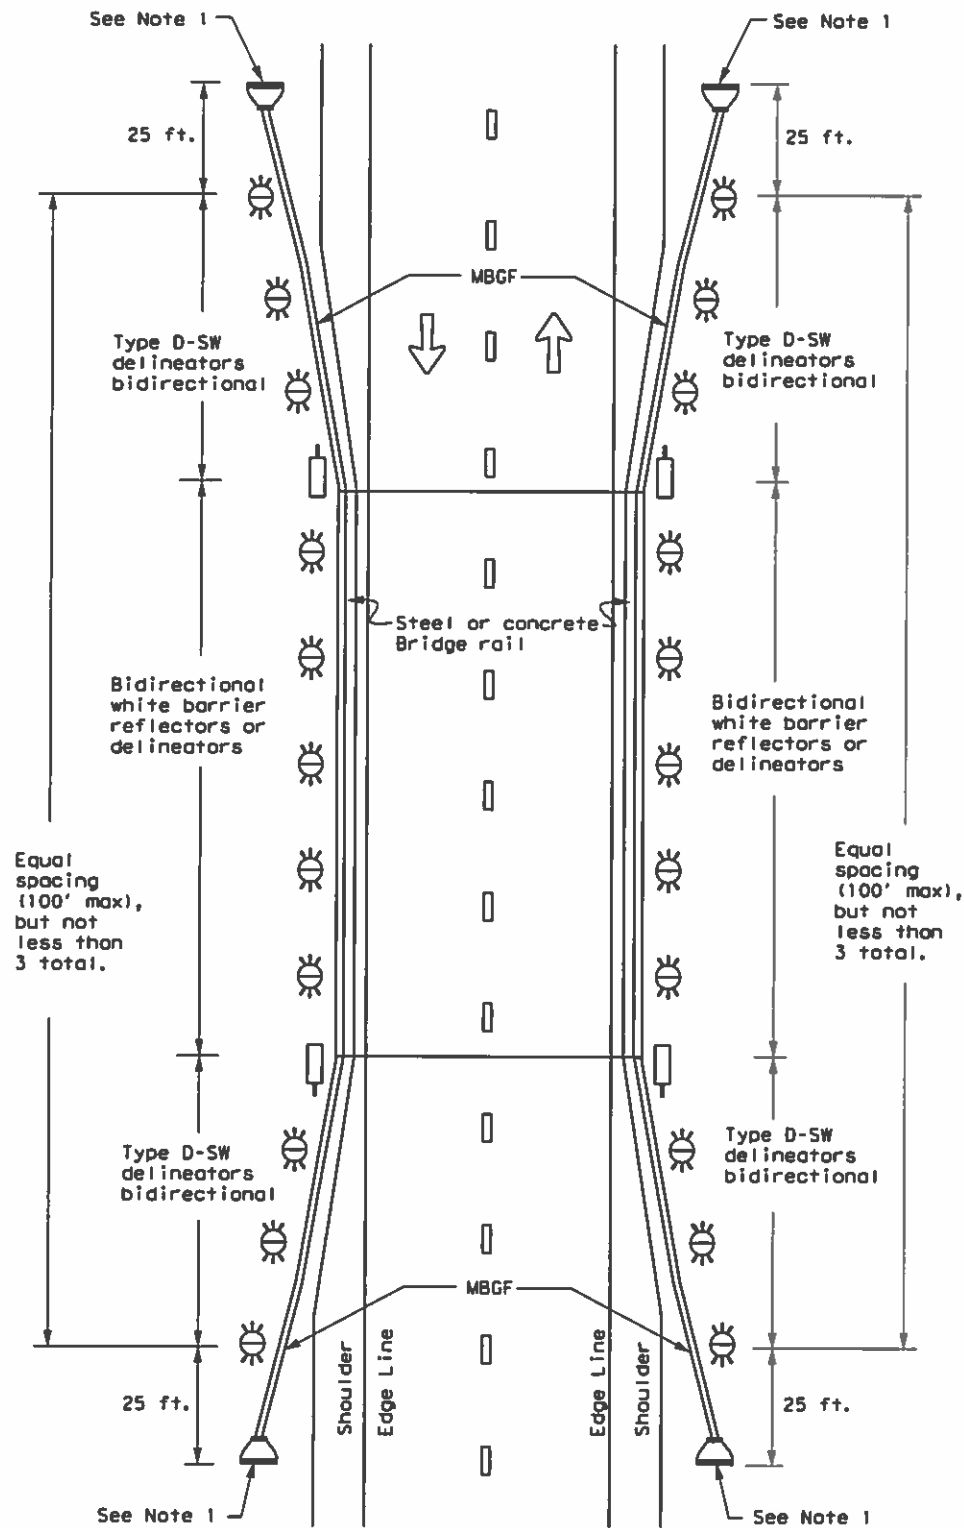

**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY  
WITH METAL BEAM GUARD FENCE (MBGF)**

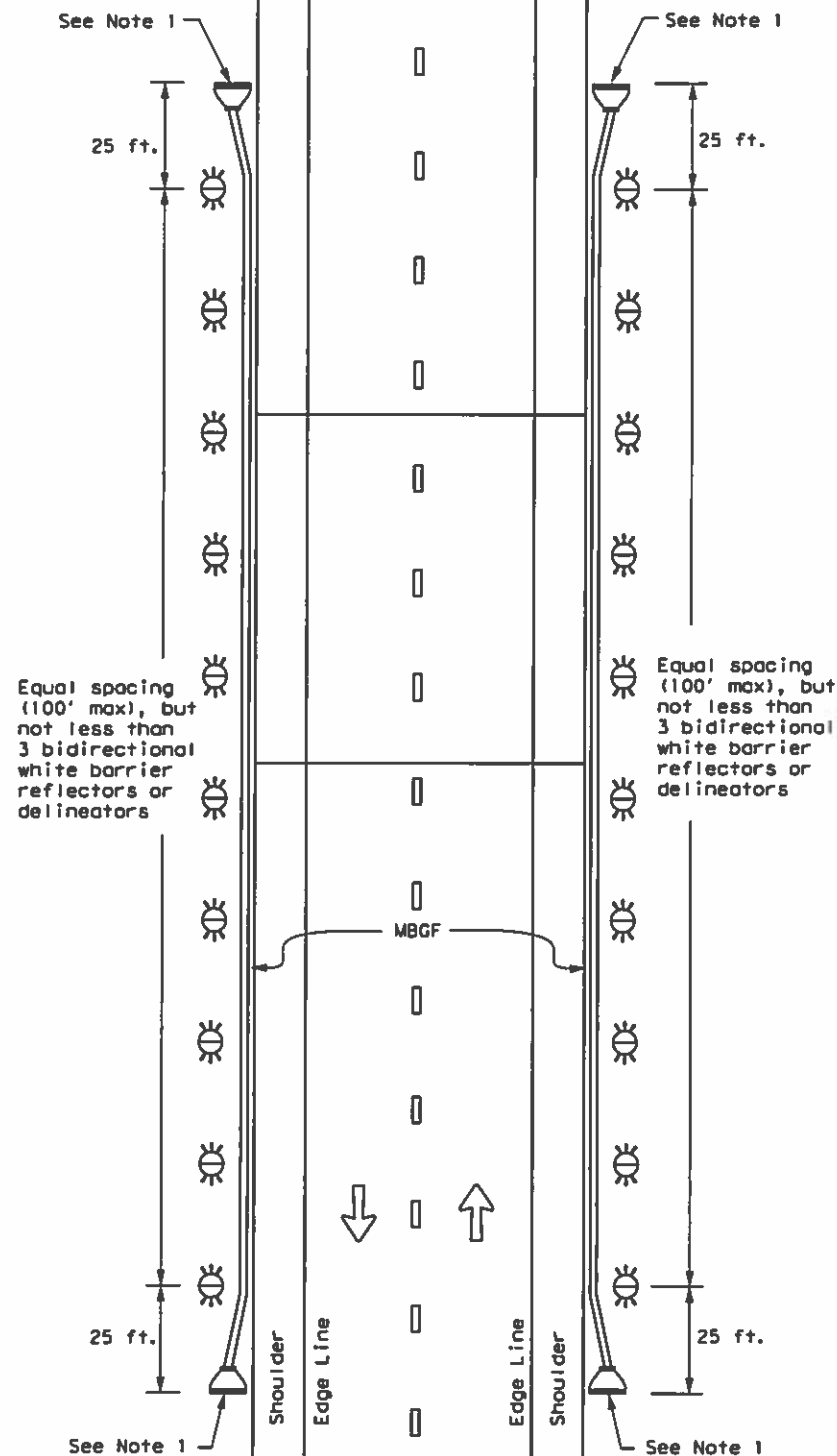

**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY  
BRIDGE WITH NO APPROACH RAIL**

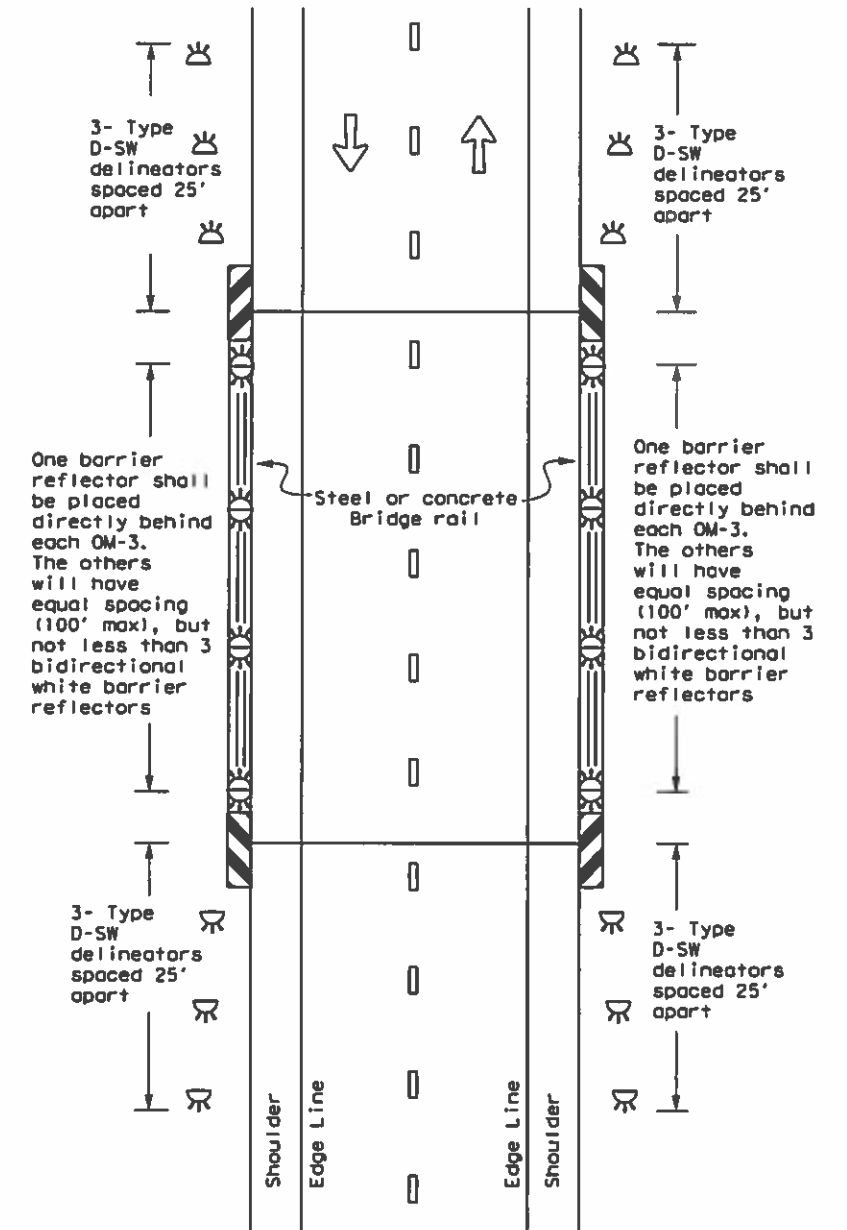

**LEGEND**

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow

**Texas Department of Transportation**  
Traffic Safety Division Standard

**DELINEATOR & OBJECT MARKER PLACEMENT DETAILS**

**D & OM(5) - 20**

FILE: dcm6-20.dgn	DATE: TxDOT	BY: TxDOT	CHK: TxDOT	REV: TxDOT
© TxDOT August 2015	CDMT	SECT	JOB	HIGHWAY
REVISIONS	6388	89	001	US 82; ETC
7-20	DIST	COUNTY	SHEET NO.	
	PAR	LAMAR; ETC	62	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversation of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:


**CONTINUOUS CONCRETE OR STEEL BARRIER**

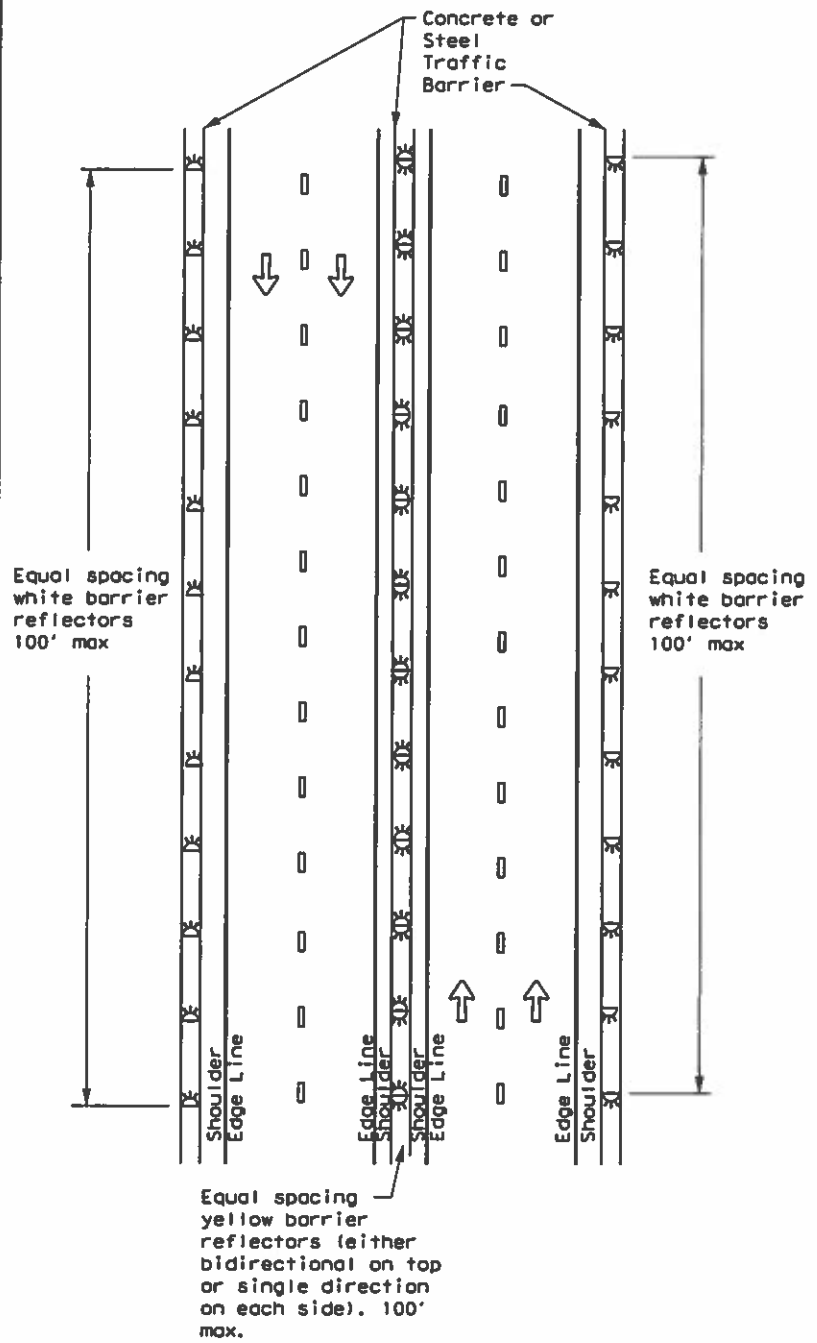


**MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)**

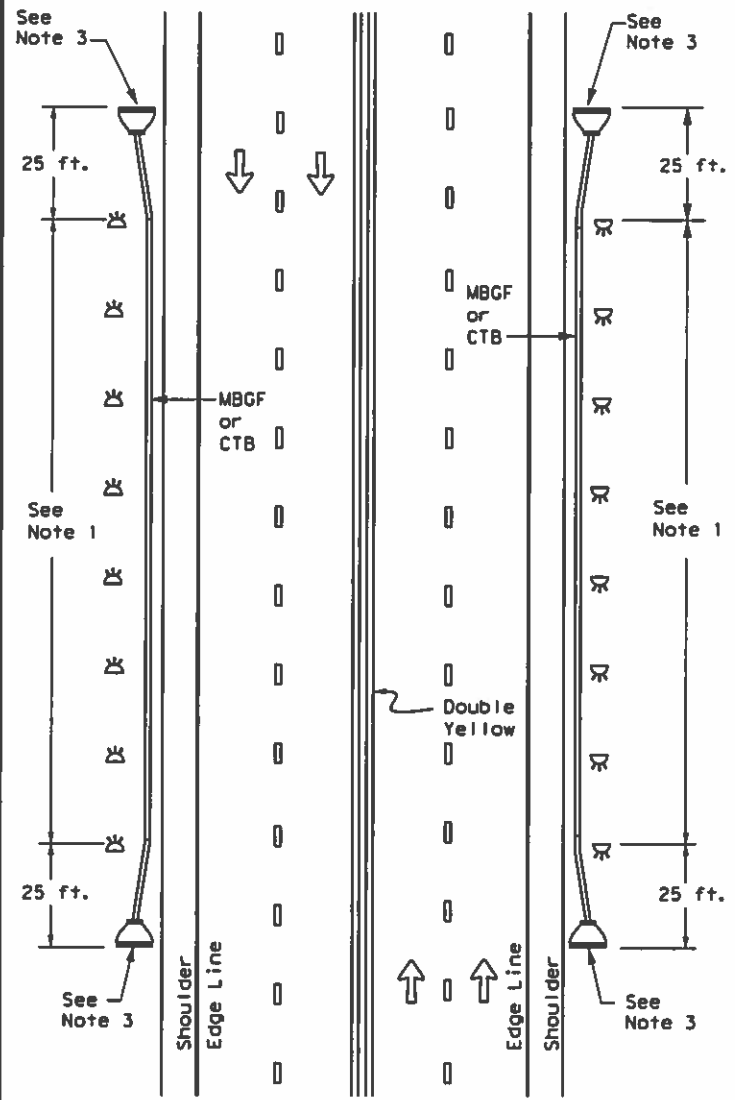

**DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)**

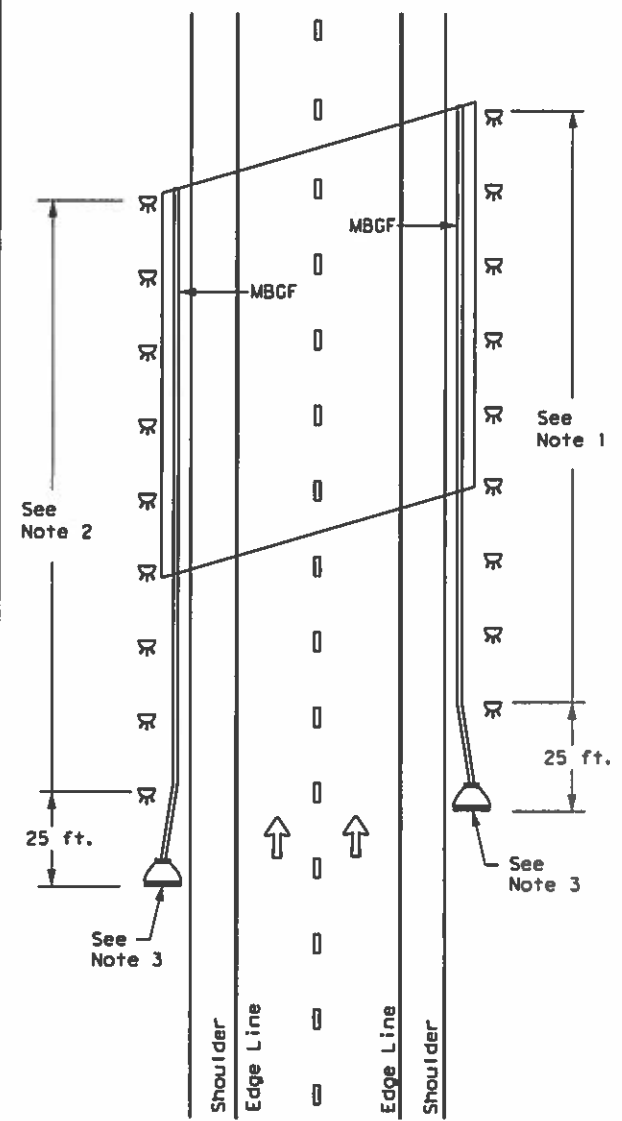

**EMERGENCY CROSSOVER**

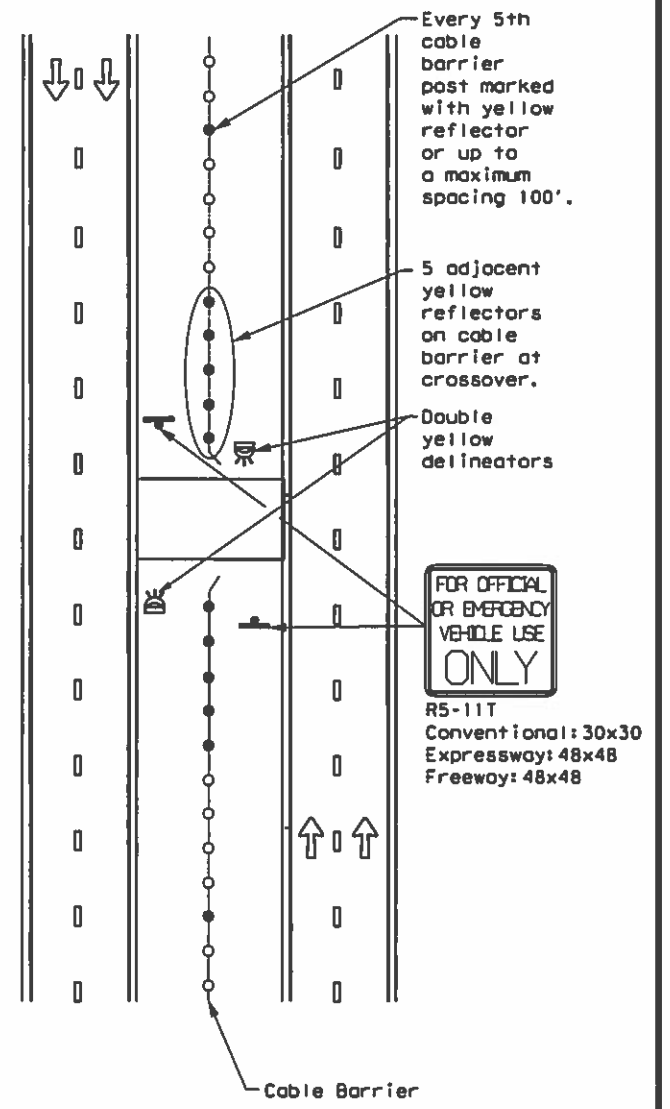

**NOTES**

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**LEGEND**

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow

Texas Department of Transportation  
Traffic Safety Division Standard

**DELINEATOR & OBJECT MARKER PLACEMENT DETAILS**

**D & OM(6) - 20**

FILE: dom6-20.dgn	DATE: August 2015	REV: 001	JOB: US 82 ETC
© TxDOT	REVISIONS	6388 89	001
7-20	DIST: PAR	COUNTY: LAMAR	SHEET NO.: 63