

INDEX OF SHEETS
SEE SHEET 2

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

FEDERAL-AID PROJECT NUMBER: STP 2B23(146)TP

US 81
WISE COUNTY


NET LENGTH OF PROJECT: 2,119.82 FT • 0.402 MILES
LIMITS: AT 4.2 MI N. OF DECATUR

CONSTRUCTION OF SAFETY REST AREAS
CONSISTING OF EARTHWORK, BASE, HOT MIX, CONCRETE AND PAVEMENT MARKING

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH
BC (1)- 21 THRU BC (12)- 21 AND THE "TEXAS
MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".

FEDERAL AID PROJECT NO.			
STP 2B23(146)TP			
CONT	SECT	JOB	HIGHWAY
0013	07	087	US 81
DIST	COUNTY		SHEET NO.
FTW	WISE		1
ROADWAY CLASSIFICATION:			
PRINCIPLE ATERIAL-OTHER			
DESIGN SPEED: 30 MPH			
CURRENT ADT 2021 - 32,589			

LETTING DATE:
CONTRACTOR:
DATE WORK BEGAN:
DATE WORK COMPLETED:
DATE WORK ACCEPTED:
FINAL CONTRACT COST:

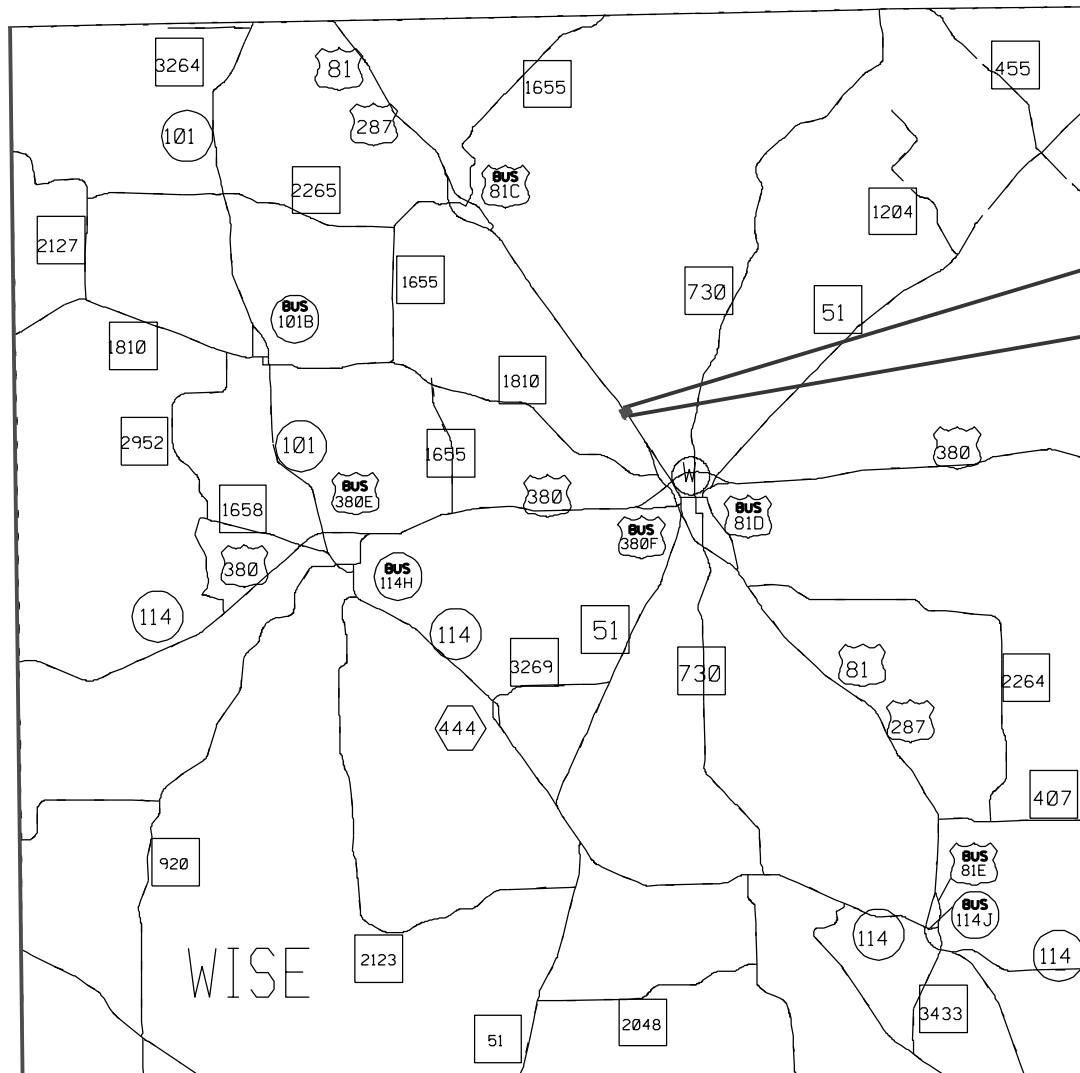

END CSJ: 0013-07-087
STA. 121+19.82
TRM 238.858

BEGIN CSJ: 0013-07-087
STA. 100+00.00
TRM 239.239



SUBMITTED FOR LETTING: 5/5/2023

Elijah Elenov, P.E.
4848D...
DESIGN ENGINEER

RECOMMENDED FOR LETTING: 5/5/2023

J. J. ...
1C2C4A...
AREA ENGINEER

RECOMMENDED FOR LETTING: 5/10/2023

David M Salazar
7879B0B92E5D403...
DIRECTOR OF TP & D

APPROVED FOR LETTING: 5/10/2023

David M Salazar, P.E.
B741E64FAD82411...
DISTRICT ENGINEER

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT. REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, JULY 2022)

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE

GENERAL

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3, 3A-3E GENERAL NOTES
- 4, 4A ESTIMATE & QUANTITY
- 5 TYPICAL SECTIONS

TRAFFIC STANDARDS

- 6 WZ(BRK)-13*
- 7 WZ(RCD)-13*
- 8 TCP (5-1) - 18*
- 9 TCP (6-1) - 12*
- 10-21 BC (1) - 21* THRU BC (12) - 21*

ROADWAY PLANS & STANDARDS

- 22 HORIZONTAL ALIGNMENT DATA
- 23-26 REMOVAL LAYOUT
- 27-30 PAVING LAYOUT
- 31-32 CRCP(1)-20*
- 33 TRANS-20*
- 34-37 PED-18*
- 38 CSWD (FTW)*
- 39 CCCG (FTW)*
- 40 ASPHALT DRIVEWAY DETAIL

PAVEMENT MARKING STANDARDS

- 41 PM(1)-22*
- 42 PM(2)-22*
- 43 PM(4)-22A*
- 44 PM(AP)-21*

SIGN MOUNTING DETAILS

- 45 SMD(GEN)-08*
- 46 SMD(SLIP-1)-08*
- 47 SMD(SLIP-2)-08*
- 48 SMD(SLIP-3)-08*
- 49 SMD(TWT)-08*
- 50 SMD(FRP)-08*


ENVIRONMENTAL

- 51 EROSION CONTROL LAYOUT
- 52 EPIC SHEET
- 53-54 STORM WATER POLLUTION PREVENTION PLAN (SW3P)
- 55 EC (1) - 16*
- 56 EC (2) - 16*
- 57 EC (3) - 16*
- 58-60 EC (9) - 16*



* THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN ISSUED BY ME AND ARE APPLICABLE TO THIS PROJECT.

Elijah Zelenov, PE 5/8/2023
 SIGNATURE DATE

 Texas Department of Transportation				
INDEX OF SHEETS				
	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		
REVISIONS	STATE	DISTRICT	COUNTY	2
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO.
	0013	07	087	US 81

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

**FORT WORTH DISTRICT GENERAL NOTES
2014 SPECIFICATIONS**

Basis of Estimate

260	Lime (Hydrated Lime (Slurry))	180 lb/cy.*	ton
310	Asph Mat'l (MC-30, EC-30, or CBSMS-1S) (Flex Base)	0.30 gal./sq. yd.*	gal.
3076	D-GR HMA (All Types)	110 lb./sq. yd.-in.	ton

Special Notes:

Contractor questions on this project are to be addressed to the following individual(s):

Area Engineer: Edrean Cheng, P.E.

Edrean.Cheng@txdot.gov

Asst. Area Engineer: Oscar Chavez, P.E.

Oscar.R.Chavez@txdot.gov

Contractor questions will be accepted through email, phone, and in person to the above individuals.

For Q&A's on Proposals navigate to <https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>. Use the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

General Notes:

Plans are required for this project. Plans may be obtained from one of the plan companies listed in the "Special Notice to Contractors", or viewed at Texas Department of Transportation's (TxDOT's) Internet site at <https://www.txdot.gov/business/letting-bids/plans-online.html>.

Personnel will be experienced in items of work in the contract which they will be performing. Safety vests and hard hats will be pre-approved and worn at all times outside vehicles within the work area. Safety vests shall be Class III.

Where necessary, the governing slopes indicated herein may be varied from the limits shown, to the extent approved.

Do not discolor or damage existing curb and curb and gutter during construction operations. In the event of discoloration or damage, clean or repair as directed.

Provide temporary drain openings at all low points or other drainage structures, as required, at the Contractor's expense.

Seasonal limitation will not be in effect for this contract.

Prior to mobilizing equipment into the Fort Worth District, all equipment will be clean and free of any debris from prior use in other districts or counties.

Contractor will be responsible for notifying a "one call" center when necessary. It will also be the Contractor's responsibility to notify the City and State for any utility and line locations. Telephone numbers are listed below:

TxDOT Traffic Operations Center (817)-370-3661
City of Fort Worth (Illumination) – (817)-392-8100
DIG TESS 1-(800)-344-8377

This is not to be considered a complete list of contacts. Contractor may need to contact additional agencies for utilities and line locations. Provide TxDOT with confirmation tickets of utility and line locates.

Contractor shall contact the TxDOT Signal Shop at (817) 370-3664 so that a representative may attend the pre-construction meeting.

Item 6. Control of Materials

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

Item 7 Legal Relations and Responsibilities

Item 7.2.4. Public Safety and Convenience. Personal vehicles will not be parked within the right-of-way at any time, including any section closed to the traveling public.

Operations will be curtailed or halted during special events that may result in delays or congestion to the traveling public.

No work that restricts or interferes with traffic shall be allowed from 3:00 pm on the day preceding the Holiday or Event to 9:00 am on the day after the Holiday or Event. The following Holiday/Event lane closure restriction requirements apply to this project:

Holiday Lane Closure Restrictions	
New Year's Eve and New Year's Day (December 31 through January 1)	3 PM December 30 through 9 AM January 2
Easter Holiday Weekend (Friday through Sunday)	3PM Thursday through 9 AM Monday
Memorial Day Weekend (Friday through Monday)	3 PM Thursday through 9 AM Tuesday
Independence Day (July 3 through July 5)	3 PM July 2 through 9 AM July 6
Labor Day Weekend (Friday through Monday)	3 PM Thursday through 9 AM Tuesday
Thanksgiving Holiday (Wednesday through Sunday)	3 PM Tuesday through 9 AM Monday
Christmas Holiday (December 23 through December 26)	3 PM December 22 through 9 AM December 27

Event Lane Closure Restrictions			
3 PM the day before Event to 9 AM the day after the Event			
NASCAR Races at Texas Motor Speedway (generally 3 events):	NASCAR Nationwide and Sprint Cup Series (Held in late March/early April)	NASCAR Nationwide and Sprint Cup Series (Held in Late October/early November)	Indy Series Racing and NASCAR Truck Series (Held in June)

No lane closures within approximately 1 mile proximity (based on potential impact) of major retail traffic generators (i.e. malls) (Thanksgiving Day through January 2). This includes the events listed below:

The above list of events is not all inclusive and should be added to or adjusted as needed. When deemed necessary, the Engineer will modify the list of major events when new events develop, existing events are rescheduled, or when warranted.

Modifications to Lane Closure / Work Restrictions:

Submit a request in writing for approval by the Engineer a minimum of 10 days in advance of implementing a change to lane closure restrictions.

When deemed necessary, the Engineer will lengthen, shorten, or otherwise modify lane closure restrictions as traffic conditions warrant.

Item 8 Prosecution and Progress

Working days will be computed and charged in accordance with Section 8.3.1.1, 'Five-Day Workweek.'

Item 8.3.2. Restricted Work Hours. Perform work as shown below, unless otherwise approved:

The contractor has the option of working on Saturdays or State holidays with forty-eight (48) hour advance notice. Work on Sundays or National holidays will not be permitted without written permission from the Engineer.

Working day charges for nighttime work will be charged against the night in which work begins.

Item 8.5. Project Schedules. Prepare the schedules as a Bar Chart. Schedules must be submitted by the twentieth (20th) day of every month.

Item 9 Measurement and Payment

Item 9.6. Payment for Material on Hand (MOH). Payment for MOH will only be made for materials by written approval of the Engineer.

Item 100 Preparing Right of Way. Prepare the right of way and designated easements for construction operations by removing and disposing of all obstructions when removal of such obstructions is not specifically shown on the plans to be paid by other items.

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

Item 104. Removing Concrete

When associated with a structure to be removed, removal of riprap as required, approach slabs, and shoulder drains are to be included in the unit price bid for Item 496, "Removing Structures."

Item 105. Removing Treated and Untreated Base and Asphalt Pavement

Cement, lime, and/or lime fly-ash treated base material removed on this project will become the property of the Contractor

Item 110. Excavation

Review proposed waste sites to determine if any site is located in a "Base Floodplain" or "Floodway" as defined by the Federal Emergency Management Agency (FEMA).

If waste material from this project is placed in a base floodplain as defined by FEMA, obtain a permit from the local community responsible for enforcing National Flood Insurance Program (NFIP) regulations. Ensure that the owner of the property receiving the waste has obtained the necessary permit.

Item 132. Embankment

Do not provide Type B embankment material with a Plasticity Index (PI) higher than 32.

Furnish test results per Test Procedures Tex-104, 105, and 106-E (PIs), Tex-113 or 114-E (M-D Curves), and Tex-145 and/or Tex-146-E (Sulfates) for each material sample provided by the Engineer. Perform field density tests (Tex-115-E, Part I) at a frequency for each worked section to produce passing results prior to testing by the Engineer per Tex-115-E, Part I.

Payment for structural excavation and/or excavation for placement of foundation course will not be paid for directly, but will be subsidiary to the pertinent bid items.

Item 247. Flexible Base

Place material in two or more equal lifts unless otherwise directed.

Do not add field sand to modify the final material to meet the requirements.

Build and maintain a 5,000 cu. yd. stockpile of approved material before and during hauling operations.

Item 260. Lime Treatment (Road-Mixed)

Apply lime by the "slurry placement" method. Allow the mixture to mellow for a minimum of 4 days after initial mixing. If moderate sulfates are present, or for other extenuating circumstances as determined by the Engineer, allow the mixture to mellow for 7 days after initial mixing.

Except as noted below, treat the raw subgrade to a depth of 8".

Treat the raw subgrade with lime to a depth of 18" for:

- Fills equal to or greater than 18"—soil PI > 39
- Fills <18"—soil PI >29
- All cuts—soil PI > 29
- Any location directed by the Engineer

Treat the raw subgrade with lime to a depth of 36" for:

- Fills equal to or greater than 36"—soil PI > 59
- Fills < 36"—soil PI > 49
- All cuts—soil PI > 49
- Any location directed by the Engineer

Item 310. Prime Coat

Provide an MC-30, EC-30, or CBSMS-1S for this Item. MC-30 is restricted to usage from September 16 through April 15.

Item 360. Concrete Pavement

When using the Hardy Chair-Lok to support reinforcing steel, chair spacing may be increased to 1.67 sq. yd. per chair, placed in a diamond or square pattern. Do not exceed 60" longitudinal spacing.

The provisions of Article 360.6.2, "Deficient Thickness Adjustment," will not be a requirement and the pavement will not be cored.

Include the approved mix design number on each delivery ticket.

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

Item 400. Excavation and Backfill for Structures

Class B bedding will be permitted in lieu of Class C bedding.

Drilling, boring, and trenching through rock is subsidiary to the various bid items. No additional compensation will be paid to the contractor for the removal of rock or any other obstruction during excavation, trenching, jacking, boring, or drilling and for any additional equipment, materials, labor, tools, or incidentals required to complete the work.

Item 421. Hydraulic Cement Concrete

For Class P (Item 360) and S (Item 421) Concrete Only: For concrete plants equipped with 2 aggregate bins or no calibrated metering system, blend manufactured and natural sand at the aggregate source only. For concrete plants equipped with a minimum of 3 bins and a calibrated metering system, blending of the separate sands on-site is permitted to meet gradation and AIR requirements.

Strength/cylinder testing equipment must be equipped with a printer for an electronic print out of all test results.

Air entrainment requirements are waived for all classes of concrete except all Class S and all Class P concrete.

Concrete will not be rejected for low air content. Adjustment to the dosage of air entrainment will be as directed or allowed by the Engineer.

Include the approved mix design number on each delivery ticket.

Item 500. Mobilization

Mobilization will be paid by lump sum.

Item 502. Barricades, Signs, and Traffic Handling

The contractor force account 'safety contingency' that has been established for this project is intended to be utilized for work zone enhancements to improve the effectiveness of the traffic control plan that could typically not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's responsible person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Permanent signs may be installed when construction in an area is complete and they will not conflict with the traffic control plan for the remainder of the job.

Existing signs are to remain as long as they do not interfere with construction and they do not conflict with the traffic control plan.

Any sign not detailed in the plans but called for in the layout will be as shown in the current "Standard Highway Sign Designs for Texas".

When traffic is obstructed, arrange warning devices in accordance with the latest edition of the "Texas Manual on Uniform Traffic Control Devices".

Cover or remove any work zone signs when work or condition referenced is not occurring.

Do not place barricades, signs, or any other traffic control devices where they interfere with sight distance at driveways or side streets. Provide access to all driveways during all phases of construction unless otherwise noted in the plans or as directed.

Item 502.4.2. Law Enforcement Personnel. If off-duty uniformed police officers are to be used during daytime hours, obtain prior approval from the Engineer. Nighttime closures will require off-duty uniformed police officer(s). All off-duty uniformed police officers will have marked police vehicle(s) with jurisdiction and full police power in the city or county where the work is being performed. Determine and agree upon the number of off-duty uniformed police officers in advance of the work. Off-duty police officers will be paid for through force account. Fill out Form 318 "Daily Report on Law Enforcement" to check against invoice for officers.

Item 506. Temporary Erosion, Sedimentation, and Environmental Controls

Remove accumulated sediment or replace SW3P controls when the capacity has been reduced by 50% or when the depth of sediment at the control structure exceeds one foot.

Items 530 And 531. Intersections, Driveways and Turnouts, and Sidewalks

The furnishing and installation of the sand cushion in proposed sidewalks, sidewalk ramps, and driveways will not be paid for directly but will be subsidiary to this bid item.

Item 666. Reflectorized Pavement Markings with Retroreflective Requirements

Collection of retroreflectivity readings using a mobile retroreflectometer is the preferred method. If retroreflectivity readings are collected using a portable or handheld unit, then measurement is defined as a collective average of at least 20 readings taken along a 200-foot test section. A minimum of three measurements will be required per mile of roadway. Measurements collected on a centerline stripe will be averaged separately for stripe in each direction of travel. A TxDOT inspector must witness the calibration and collection of all retro-reflectivity data.

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

Item 3076. Dense Graded Hot-mix Asphalt

RAP aggregate must meet the requirements of Table 1.

Provide aggregate with a Surface Aggregate Classification (SAC) value of SAC-B for the travel lanes and shoulders.

Provide aggregate with a Surface Aggregate Classification (SAC) value of SAC-B for the surfaces other than the travel lanes.

No blending, of the material retained on the No. 4 sieve, to meet SAC A will be allowed for surface mixes.

Natural (field) sands are not allowed.

Provide a PG 64-22 asphalt for the base course.

Provide a PG 64-22 asphalt for the concrete underlayment course.

Provide a PG 70-28 asphalt for the surface course.

Furnish a CSS-1P with greater than 50% asphalt residue for the tack coat on this project. A trackless tack can be used in lieu of CSS-1P tack coat or as directed by the Engineer. The Engineer will set the rate at time of application.

Warm Mix Asphalt (WMA) is not permitted in any mix type on this project.

RAP and RAS are not permitted in any surface and level up mixes on this project.

Grade substitution per Table 5 is not allowed.

Use the Boil Test, Test Procedure Tex-530-C, and provide only mixes that produce zero percent (0%) stripping for design verification and during production.

Include the approved mix design number on each delivery ticket.

Use a Material Transfer Device (MTD) unless otherwise directed.

Stop production after Lot 1. Review all test data and confirm any changes with the Engineer. Do not start production and placement on subsequent Lots until approved by the Engineer.

Shoulders, crossovers, and other areas listed on the Plan sheets or as directed are not subject to in-place air void determination for this project.

Temporary detours are subject to in-place air void determination for this project.

Use Surface Test Type A for this project.

Item 6001. Portable Changeable Message Sign.

Provide electronic portable changeable message sign unit(s) as directed.

If more than one (1) crew works on the same day, but in different locations, each crew will use portable changeable message signs and arrow panels.

Each sign will have the following eighteen (18) messages programmed in its permanent memory:

1. Ramp Closed Ahead
2. Use Other Routes
3. Right Lane Closed
4. Left Lane Closed
5. Closed Ahead
6. Two Lane
7. Detour Ahead
8. Thru Traffic
9. Be Prepared To Stop
10. Merging Traffic
11. Expect 15 Minute Delay
12. Max Speed **MPH
13. Merge Right
14. Merge Left
15. No Exit Next ** Miles
16. Various Lanes Closed
17. Two Left Lanes Closed
18. Two right Lanes Closed

Project Number: STP 2B23(146)TP

County: Wise

Control: 0013-07-087

Highway: US 81

Item 6185. Truck Mounted Attenuators (TMA).

The total number of truck mounted attenuators (TMA) required when utilizing the traffic control standards are shown in the tables below.

TCP 5 Series	Scenario	Required TMA
(5-1)-18	A	1
	B	2

TCP 6 Series	Scenario	Required TMA
(6-1)-12	A	1
	B	2

Shadow vehicles equipped for truck mounted attenuators (TMA) for mobile and stationary operations must be available for use at any time as determined by the Engineer.

The Contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMA needed for the project for those times per plan requirements. Additional TMAs used that are not specified in the plans in which the Contractor expects compensation will require prior approval from the Engineer.



CONTROLLING PROJECT ID 0013-07-087

DISTRICT Fort Worth
HIGHWAY US 81

COUNTY Wise

Estimate & Quantity Sheet

CONTROL SECTION JOB				0013-07-087		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00190802			
COUNTY				Wise			
HIGHWAY				US 81			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	100-6002	PREPARING ROW	STA	32.000		32.000	
	104-6001	REMOVING CONC (PAV)	SY	4,100.000		4,100.000	
	104-6015	REMOVING CONC (SIDEWALKS)	SY	70.000		70.000	
	104-6022	REMOVING CONC (CURB AND GUTTER)	LF	3,340.000		3,340.000	
	105-6014	REMOVING STAB BASE & ASPH PAV (7"-12")	SY	8,870.000		8,870.000	
	110-6001	EXCAVATION (ROADWAY)	CY	1,100.000		1,100.000	
	110-6003	EXCAVATION (SPECIAL)	CY	50.000		50.000	
	132-6007	EMBANKMENT (FINAL)(ORD COMP)(TY D)	CY	50.000		50.000	
	134-6002	BACKFILL (TY B)	STA	32.000		32.000	
	247-6230	FL BS (CMP IN PLACE)(TY A GR 1-2)(8")	SY	3,160.000		3,160.000	
	260-6002	LIME (HYDRATED LIME (SLURRY))	TON	252.700		252.700	
	260-6006	LIME TRT (EXST MATL) (6")	SY	3,260.000		3,260.000	
	260-6027	LIME TRT (EXST MATL)(8")	SY	10,190.000		10,190.000	
	310-6001	PRIME COAT (MULTI OPTION)	GAL	3,759.300		3,759.300	
	360-6002	CONC PVMT (CONT REINF - CRCP) (8")	SY	9,400.000		9,400.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	9.000		9.000	
	506-6004	ROCK FILTER DAMS (INSTALL) (TY 4)	LF	200.000		200.000	
	506-6011	ROCK FILTER DAMS (REMOVE)	LF	200.000		200.000	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	4,000.000		4,000.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	4,000.000		4,000.000	
	506-6040	BIODEG EROSN CONT LOGS (INSTL) (8")	LF	1,000.000		1,000.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	1,000.000		1,000.000	
	529-6005	CONC CURB (MONO) (TY II)	LF	1,650.000		1,650.000	
	529-6008	CONC CURB & GUTTER (TY II)	LF	1,690.000		1,690.000	
	530-6005	DRIVEWAYS (ACP)	SY	65.000		65.000	
	531-6001	CONC SIDEWALKS (4")	SY	620.000		620.000	
	531-6005	CURB RAMPS (TY 2)	EA	4.000		4.000	
	531-6010	CURB RAMPS (TY 7)	EA	1.000		1.000	
	644-6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA	3.000		3.000	
	666-6041	REFL PAV MRK TY I (W)12"(SLD)(090MIL)	LF	633.000		633.000	
	666-6308	RE PM W/RET REQ TY I (W)6"(SLD)(090MIL)	LF	594.000		594.000	
	668-6057	PRE PM TY B (ACC PRK)(BLU)(SYMBOL ONLY)	EA	1.000		1.000	
	1002-6025	LANDSCAPE AMENITY (TRASH/RECYCLE BIN)	EA	8.000		8.000	
	3076-6001	D-GR HMA TY-B PG64-22	TON	2,756.800		2,756.800	
	3076-6028	D-GR HMA TY-C SAC-A PG70-28	TON	283.800		283.800	
	6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EA	1.000		1.000	

DISTRICT	COUNTY	CCSJ	SHEET
Fort Worth	Wise	0013-07-087	4



Estimate & Quantity Sheet


CONTROLLING PROJECT ID 0013-07-087

DISTRICT Fort Worth


COUNTY Wise

HIGHWAY US 81

CONTROL SECTION JOB				0013-07-087		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00190802			
COUNTY				Wise			
HIGHWAY				US 81			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	6185-6002	TMA (STATIONARY)	DAY	25.000		25.000	
	18	LAW ENFORCEMENT: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	
		EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS	1.000		1.000	
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	

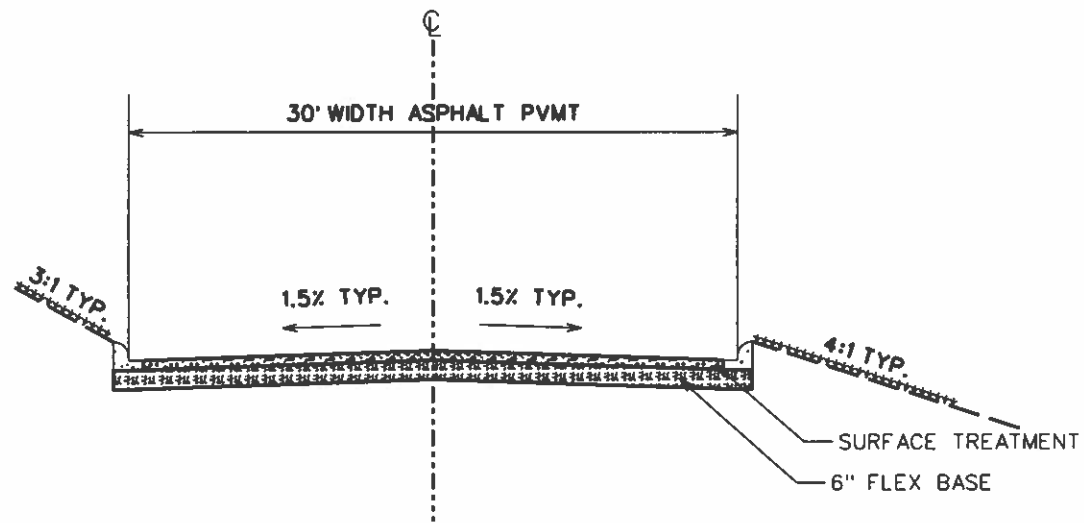


EXISTING TYPICAL SECTION CAR PARKING
FROM STA. 10+00.00 TO STA. 19+98.39
N.T.S

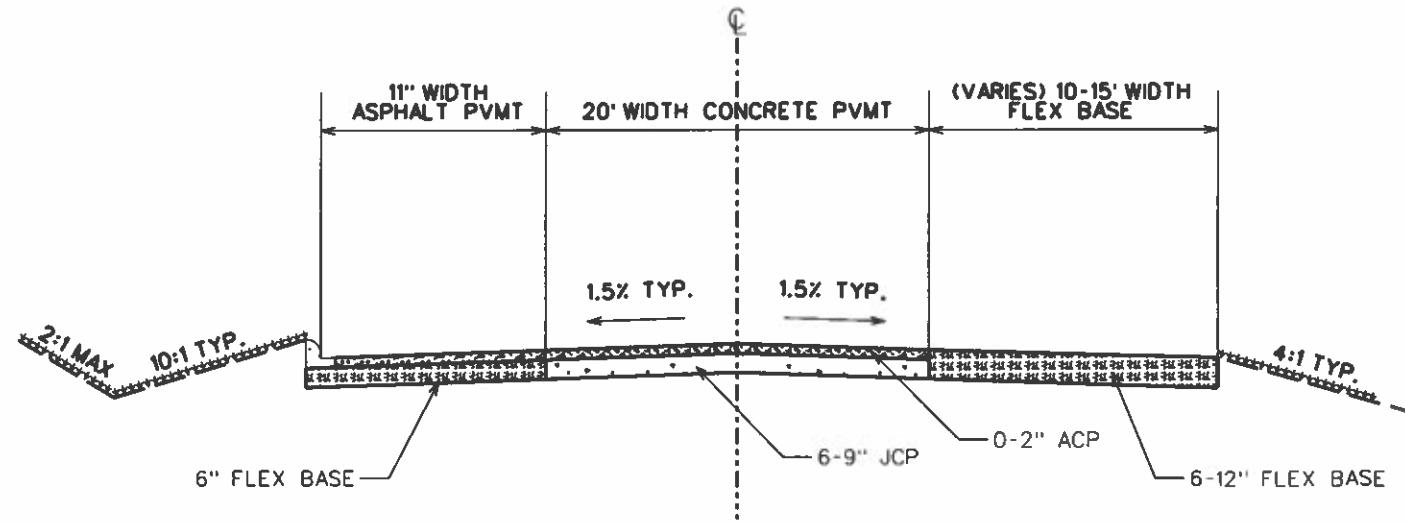


EXISTING TYPICAL SECTION TRUCK PARKING
FROM STA. 100+00.00 TO STA. 121+20.00
N.T.S



Elijah Zelenov, PE 5/17/23

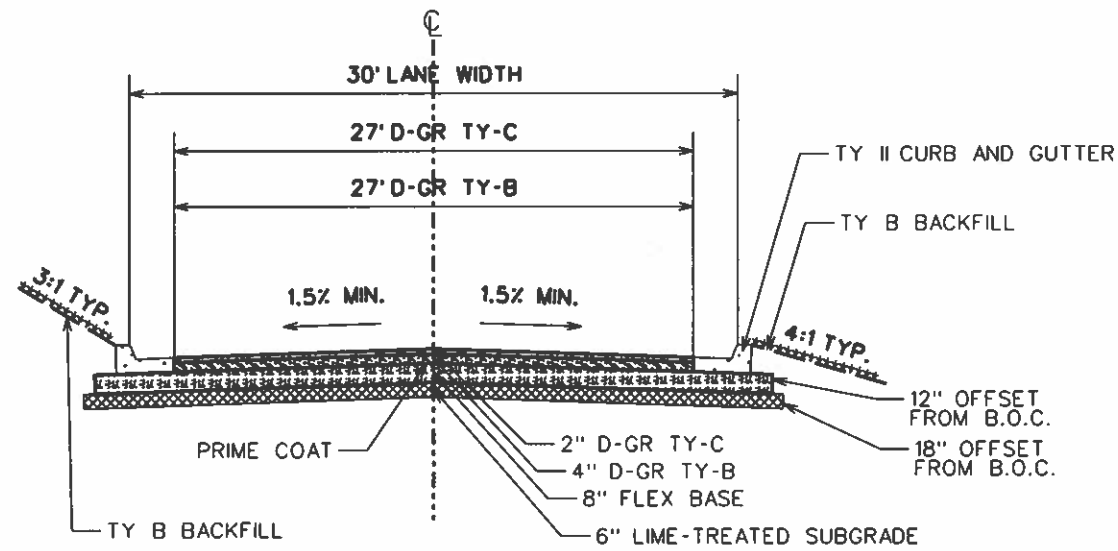

PROPOSED TYPICAL SECTION CAR PARKING
FROM STA. 10+00.00 TO STA. 19+98.39
N.T.S

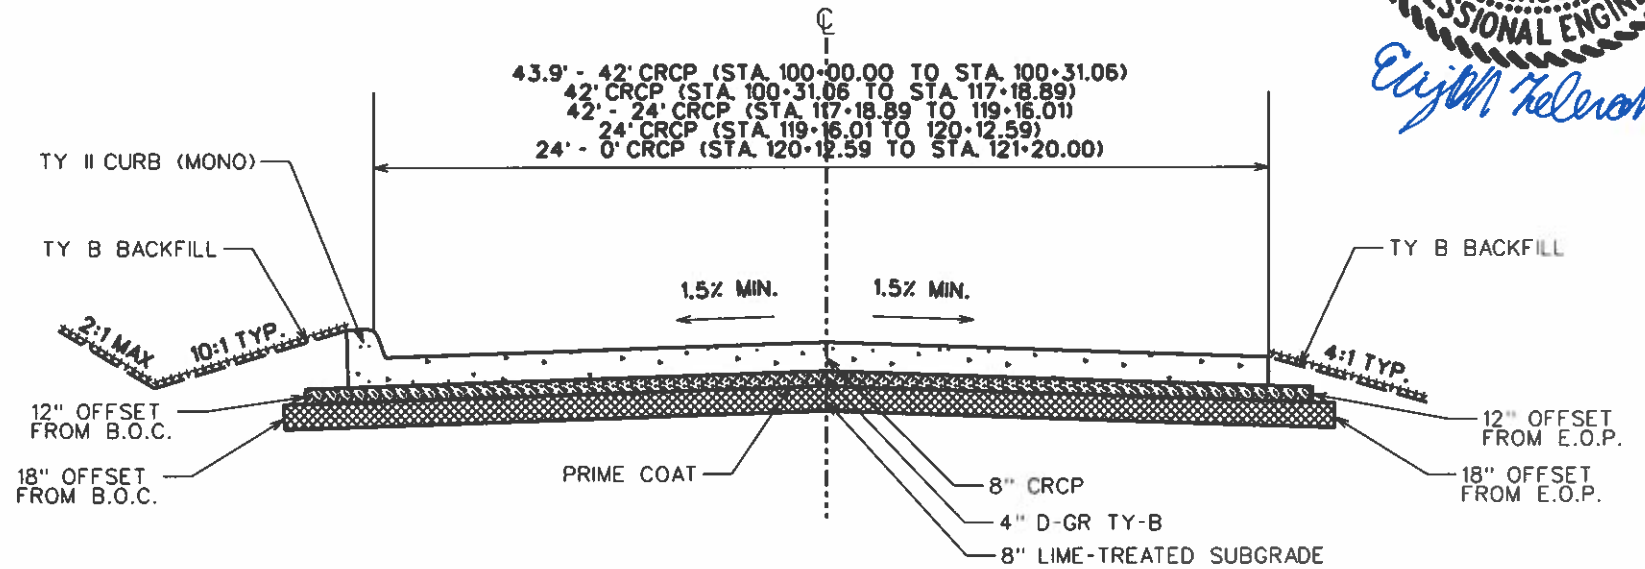


PROPOSED TYPICAL SECTION TRUCK PARKING
FROM STA. 100+00.00 TO STA. 121+20.00
N.T.S

TRUCK PARKING TYPICAL SECTIONS				
REVISIONS	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		5
	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	HIGHWAY NO.
	CONTROL	SECTION	JOB	US 81
	0013	07	087	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:03:11 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCN\006 WZ(BRK)-13.dgn

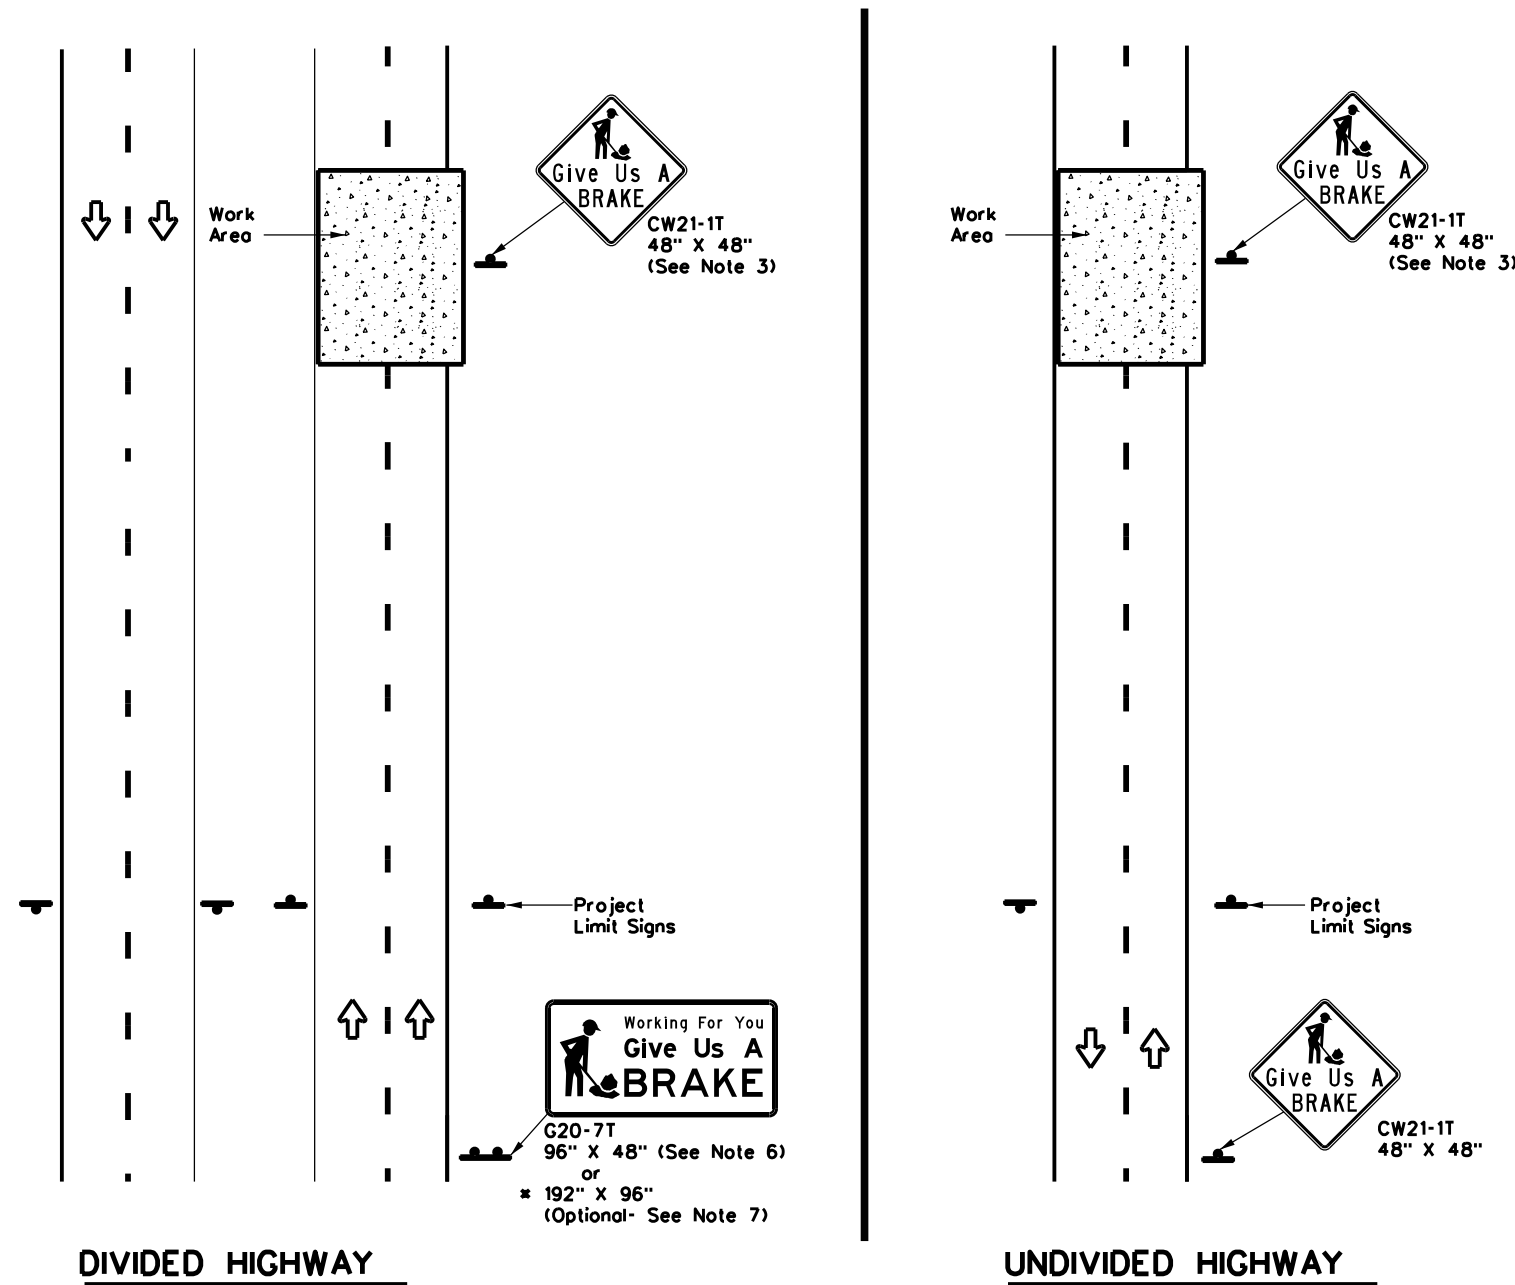

SIGNS ARE SHOWN FOR ONE DIRECTION OF TRAVEL

* When the optional larger WORKING FOR YOU GIVE US A BRAKE (G20-7T) 192" x 96" sign is required, the locations shall be noted elsewhere in the plans.

SUMMARY OF LARGE SIGNS

BACKGROUND COLOR	SIGN DESIGNATION	SIGN	SIGN DIMENSIONS	REFLECTIVE SHEETING	SO FT	GALVANIZED STRUCTURAL STEEL		DRILLED SHAFT
						Size	(LF)	
							① ②	24" DIA. (LF)
Orange	G20-7T		96" X 48"	Type B _{FL} or C _{FL}	32	▲	▲ ▲	▲
Orange	G20-7T		192" X 96"	Type B _{FL} or C _{FL}	128	W8x18	16 17	12

▲ See Note 6 Below

LEGEND	
	Sign
	Large Sign
	Traffic Flow

DEPARTMENTAL MATERIAL SPECIFICATIONS		
PLYWOOD SIGN BLANKS	DMS-7100	
ALUMINUM SIGN BLANKS	DMS-7110	
SIGN FACE MATERIALS	DMS-8300	

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL}
BLACK	LEGEND & BORDERS	NON-REFLECTIVE ACRYLIC FILM


GENERAL NOTES

- See BC and SMD sheets for additional sign support details.
- Sign locations shall be approved by the Engineer.
- For projects more than two miles in length, Give Us a BRAKE signs should be repeated halfway through the project. The Give Us a Brake (CW21-1T) may be used for this purpose.
- Work zone speed limits are sometimes used in conjunction with GIVE US A BRAKE signing. See BC(3) for location and spacing of construction speed zone signing when required.
- Give Us a Brake (CW21-1T) signs and supports shall be considered subsidiary to Item 502, "Barricades, Signs and Traffic Handling."
- The 96" X 48" Working For You Give Us A BRAKE (G20-7T) may use a 1/2" or 5/8" plywood substrate or 0.125" aluminum sheeting substrate and may be supported by two 4" x 6" wood posts with drilled holes for breakaway as per BC(5) and will be subsidiary to Item 502.
- The Working For You Give Us A BRAKE (G20-7T) 192" X 96" sign shall be paid for under the following specification items:
 Item 636 - Aluminum Signs
 Item 647 - Large Roadside Sign Supports and Assemblies.
 Item 416 - Drilled Shaft Foundations
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.


				Traffic Operations Division Standard	
WORK ZONE "GIVE US A BRAKE" SIGNS					
WZ(BRK)-13					
FILE: wzbrk-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
© TxDOT August 1995	CONT	SECT	JOB	HIGHWAY	
	0013	07	087	US 81	
REVISIONS					
6-96	5-98	7-13			
8-96	3-03				
	DIST	COUNTY		SHEET NO.	
	FTW	WISE		6	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:03:16 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCN\007 WZ(RCD)-13.dgn

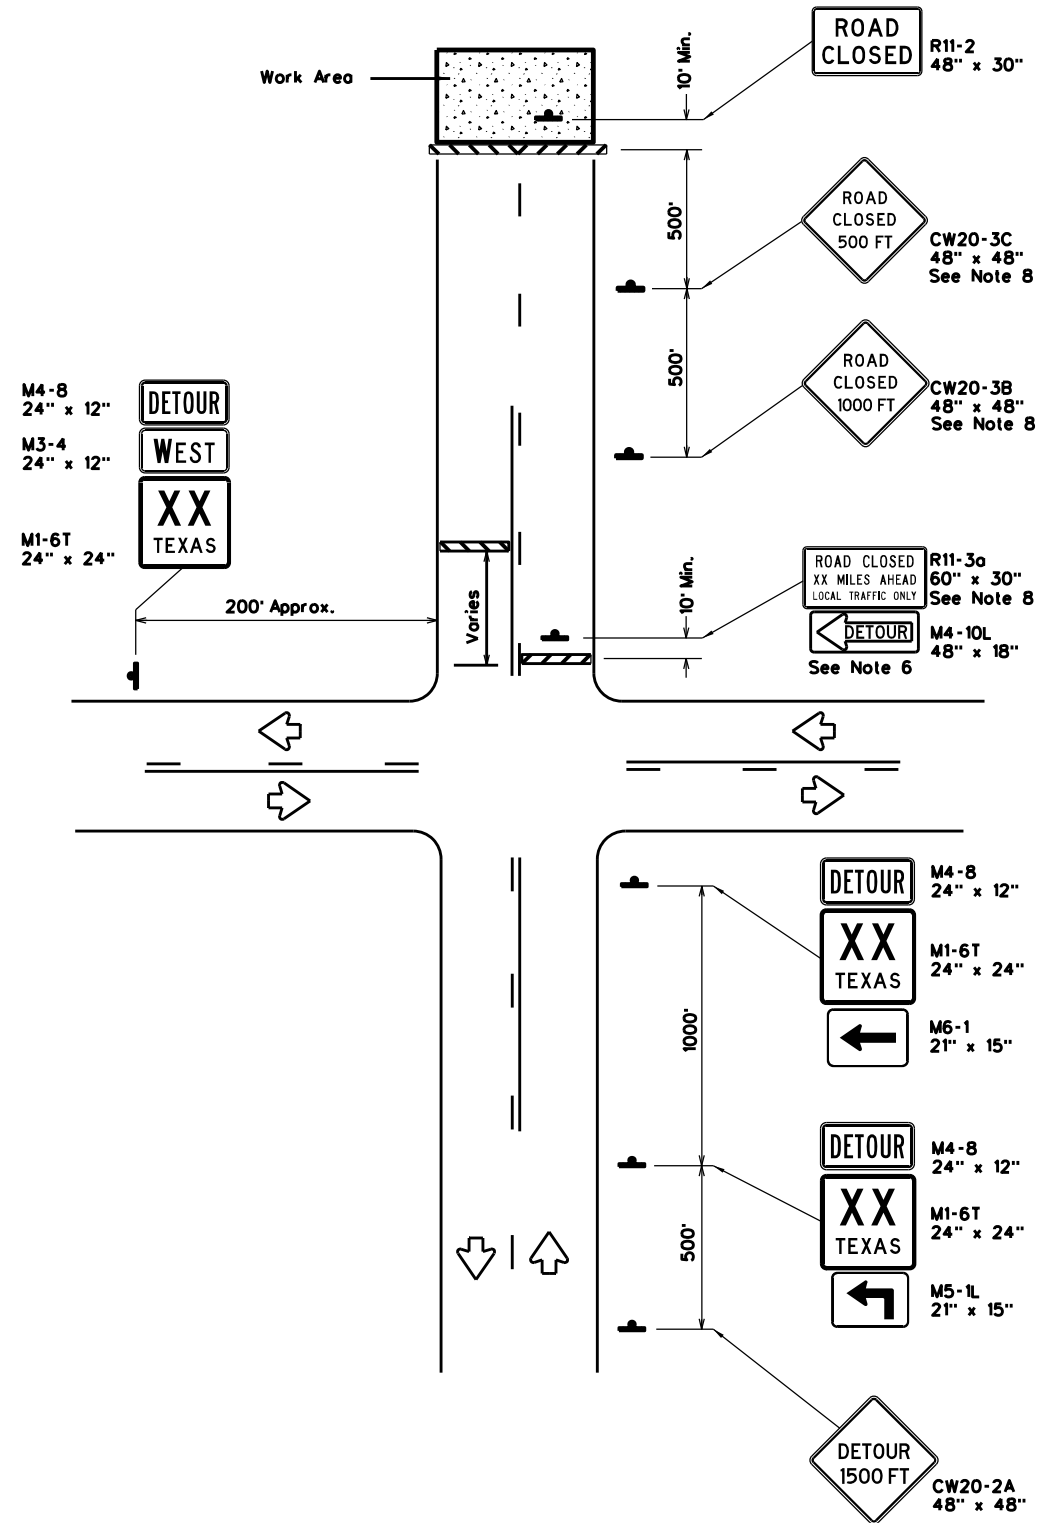

ROAD CLOSURE BEYOND THE INTERSECTION
 Signing for a Numbered Route with an Off-Site Detour

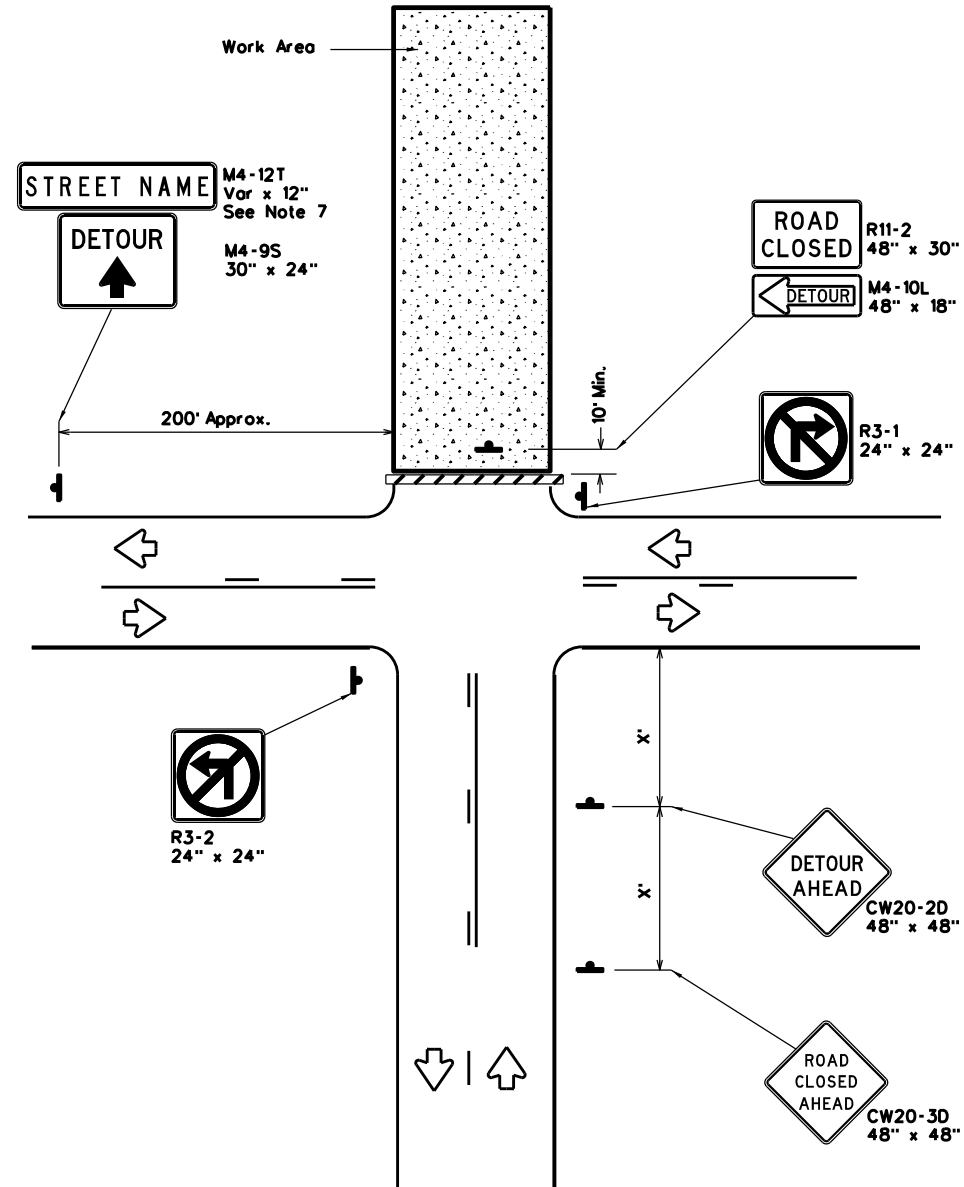

ROAD CLOSURE AT THE INTERSECTION
 Signing for an Un-numbered Route with an Off-Site Detour

LEGEND	
	Type 3 Barricade
	Sign

Posted Speed * *	Minimum Sign Spacing "x" Distance
30	120'
35	160'
40	240'
45	320'
50	400'
55	500'
60	600'
65	700'
70	800'
75	900'

* Conventional Roads Only


GENERAL NOTES

1. This sheet is intended to provide details for temporary work zone road closures. For permanent road closure details see the D&OM standards.
2. Barricades used shall meet the requirements shown on Barricade and Construction Standard BC(10) and listed on the Compliant Work Zone Traffic Control Devices list (CWZTCD).
3. Stockpiled materials shall not be placed on the traffic side of barricades.
4. Barricades at the road closure should extend from pavement edge to pavement edge.
5. Detour signing shown is intended to illustrate the type of signing that is appropriate for numbered routes or un-numbered routes as labeled. It does not indicate the full extent of detour signing required. Detour routes should be signed as shown elsewhere in the plans.
6. If the road is open for a significant distance beyond the intersection or there are significant origin/destination points beyond the intersection, the signs and barricades at this location should be located at the edge of the traveled way.
7. The Street Name (M4-12T) sign is to be placed above the DETOUR (M4-9S) sign.
8. For urban areas where there is a shorter distance between the intersection and the actual closure location, the ROAD CLOSED XX MILES AHEAD (R11-3a) sign may be replaced with a ROAD CLOSED TO THRU TRAFFIC (R11-4) sign. If adequate space does not exist between the intersection and the closure a single ROAD CLOSED AHEAD (CW20-3D) sign spaced as per the table above may replace the ROAD CLOSED 1000 FT (CW20-3B) and ROAD CLOSED 500 FT (CW20-3C) signs.
9. Signs and barricades shown shall be subsidiary to Item 502. Locations where these details will be required shall be as shown elsewhere in the plans.

				Traffic Operations Division Standard	
WORK ZONE ROAD CLOSURE DETAILS					
WZ(RCD)-13					
FILE: wzrcd-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
© TxDOT August 1995	CONT	SECT	JOB	HIGHWAY	
REVISIONS	0013	07	087	US 81	
1-97 4-98 7-13	DIST	COUNTY	SHEET NO.		
2-98 3-03	FTW	WISE	7		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:03:21 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCN\008 TCP(5-1)-18.dgn

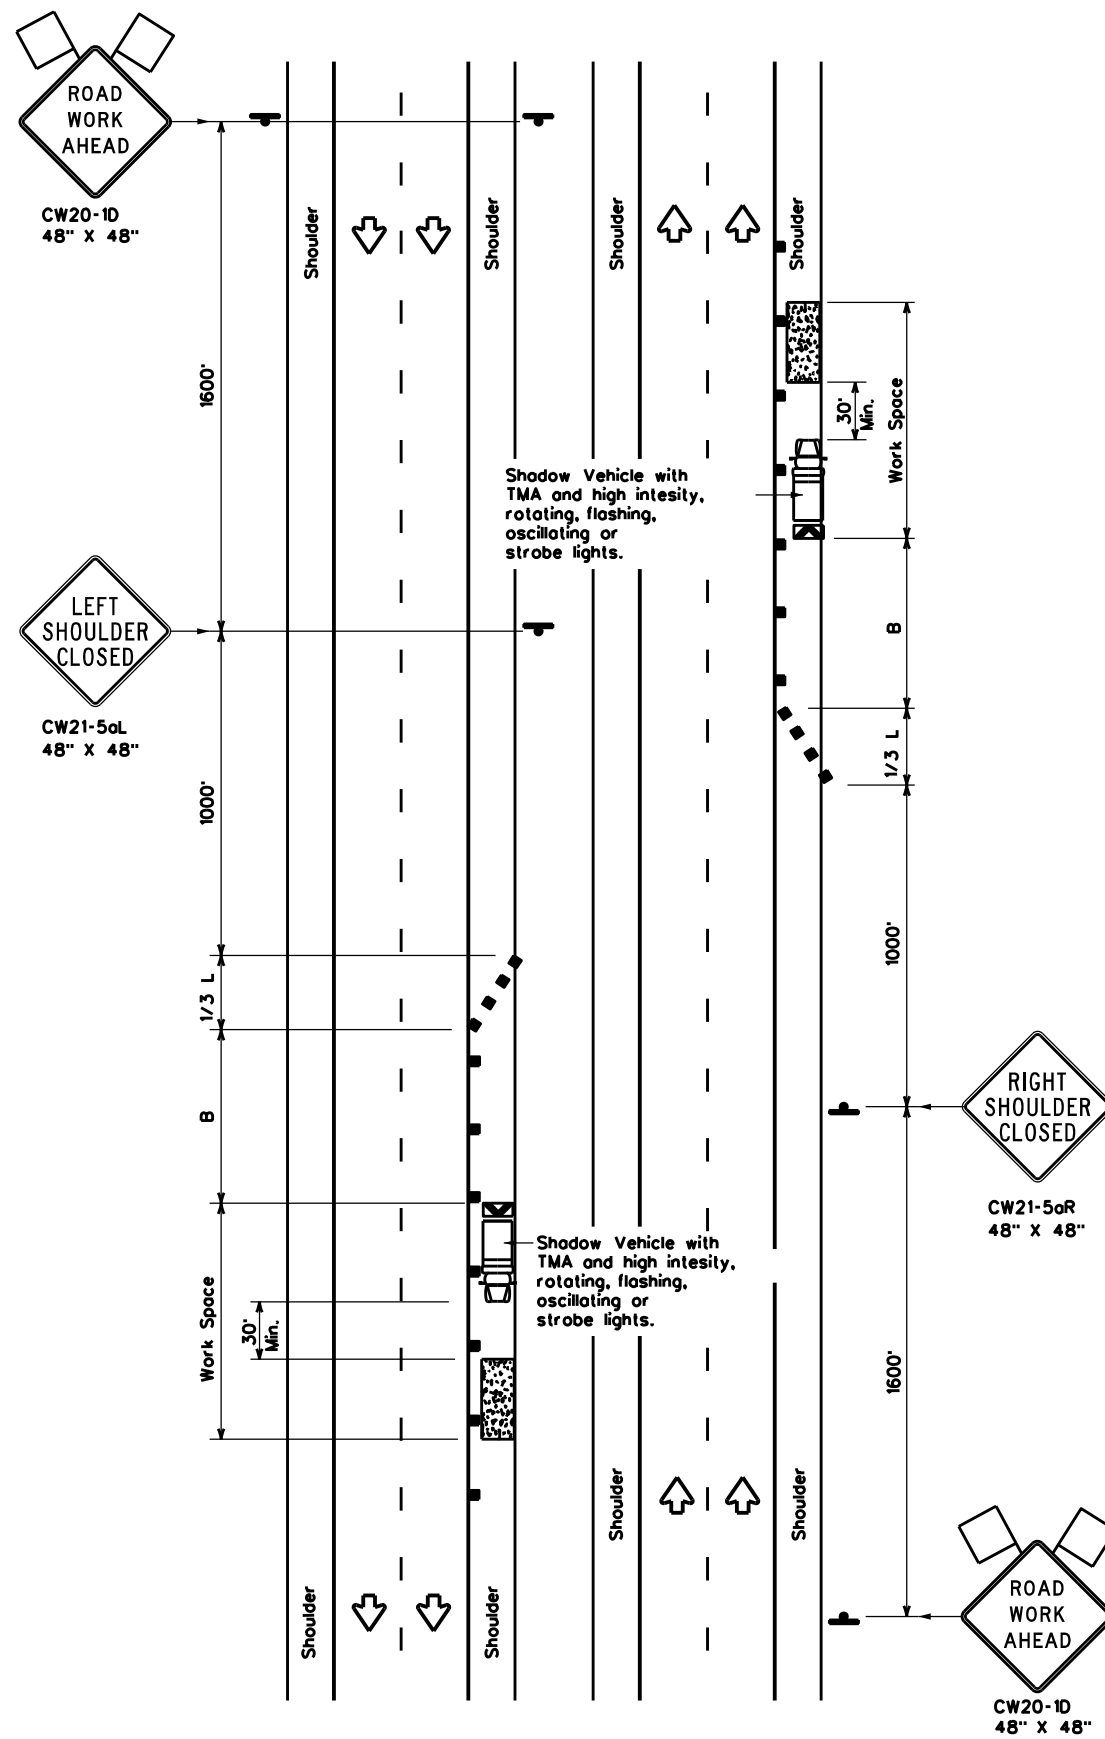

TCP (5-1a)

WORK AREA ON SHOULDER

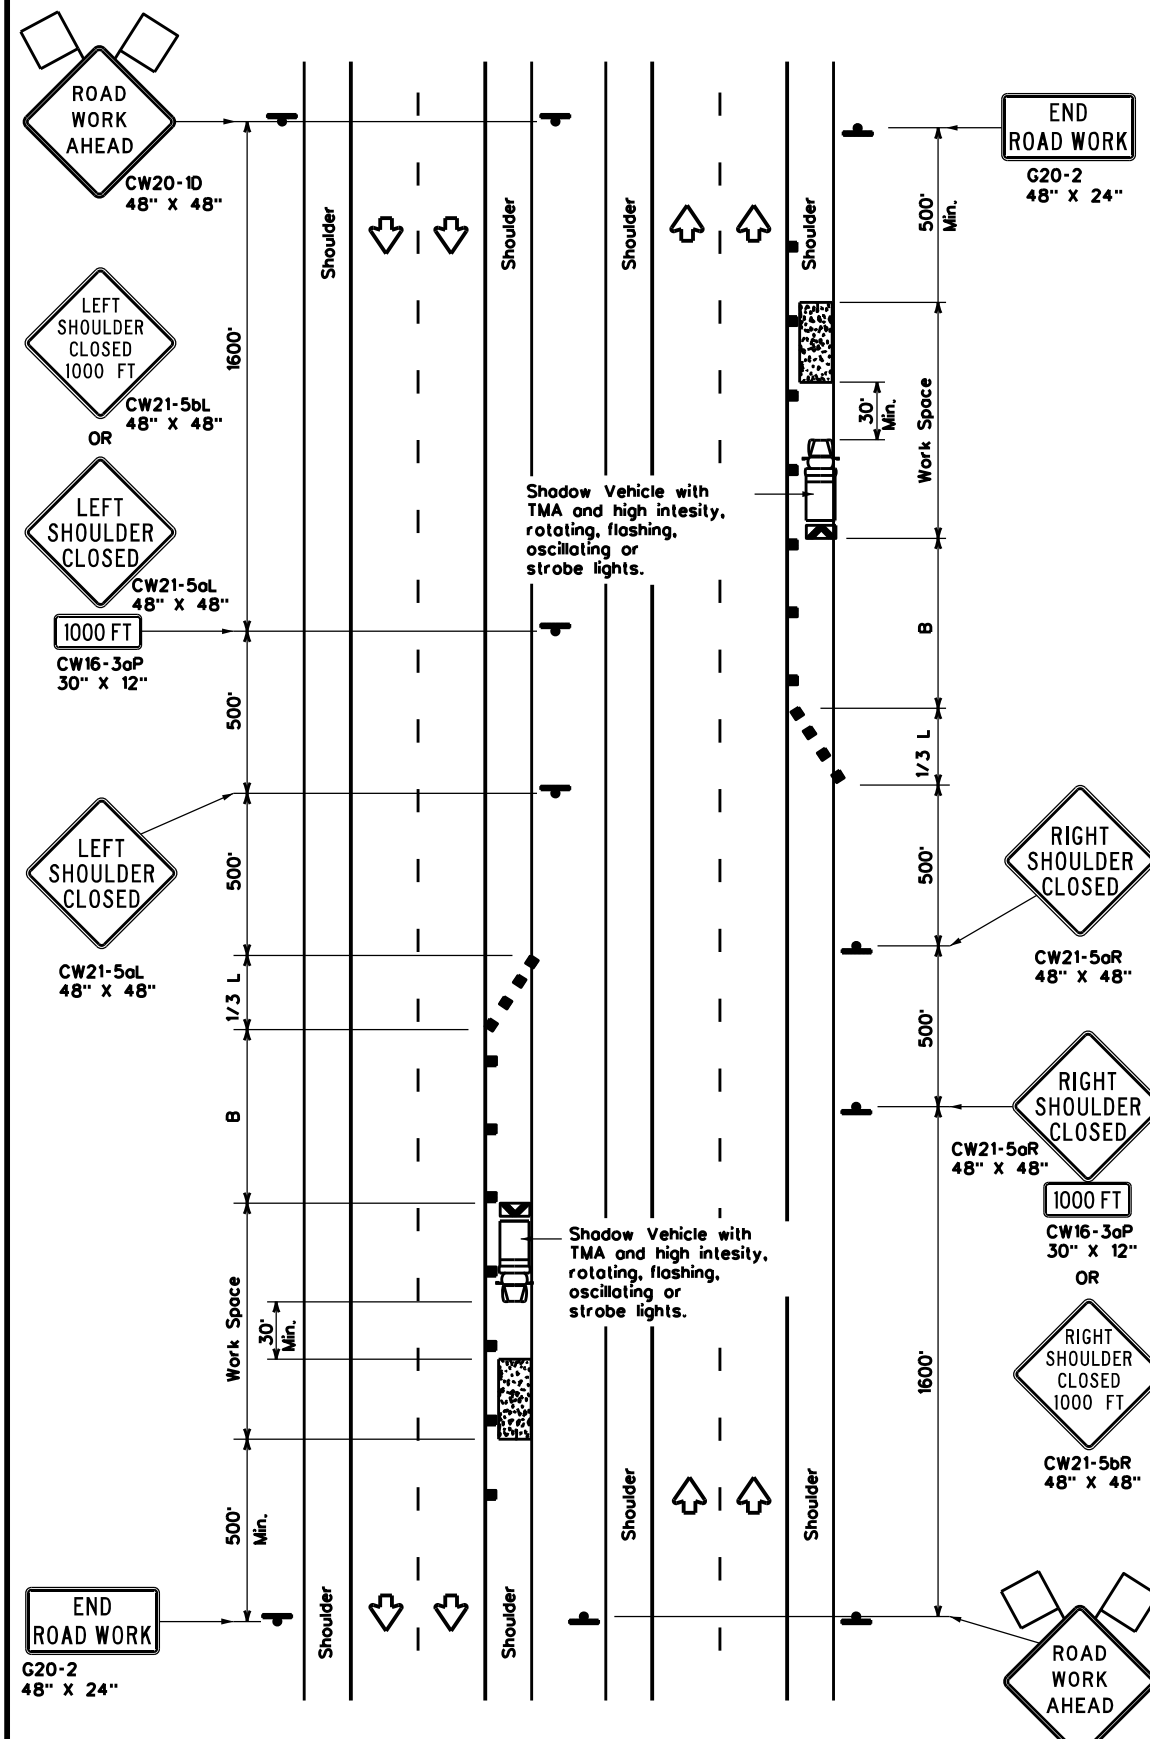

TCP (5-1b)

WORK AREA ON SHOULDER

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
30	L = WS ² / 60	150'	165'	180'	30'	60'	90'
35		205'	225'	245'	35'	70'	120'
40		265'	295'	320'	40'	80'	155'
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

x Conventional Roads Only
 x x Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	TCP(5-1a)	TCP(5-1b)	TCP(5-1b)	

GENERAL NOTES

1. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the performance or quality of the work. Type 3 barricades or drums may be substituted when workers on foot are no longer present when approved by the Engineer.
2. 28" tall or taller one-piece cones will be allowed only for Short Duration or Short Term stationary operations when workers are present to maintain the devices upright and in proper location. Intermediate Term stationary work areas should use Drums, Vertical Panels or 42" tall two-piece cones.




**TRAFFIC CONTROL PLAN
 SHOULDER WORK FOR
 FREEWAYS / EXPRESSWAYS**

TCP(5-1)-18


FILE: tcp5-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
2-18	DIST	COUNTY		SHEET NO.
	FTW	WISE		8

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:03:25 PM
 FILE: T:\DISM\MAINT_SRA DESIGN\Wise County\PS&E\DCN\009 TCP(6-1)-12.dgn

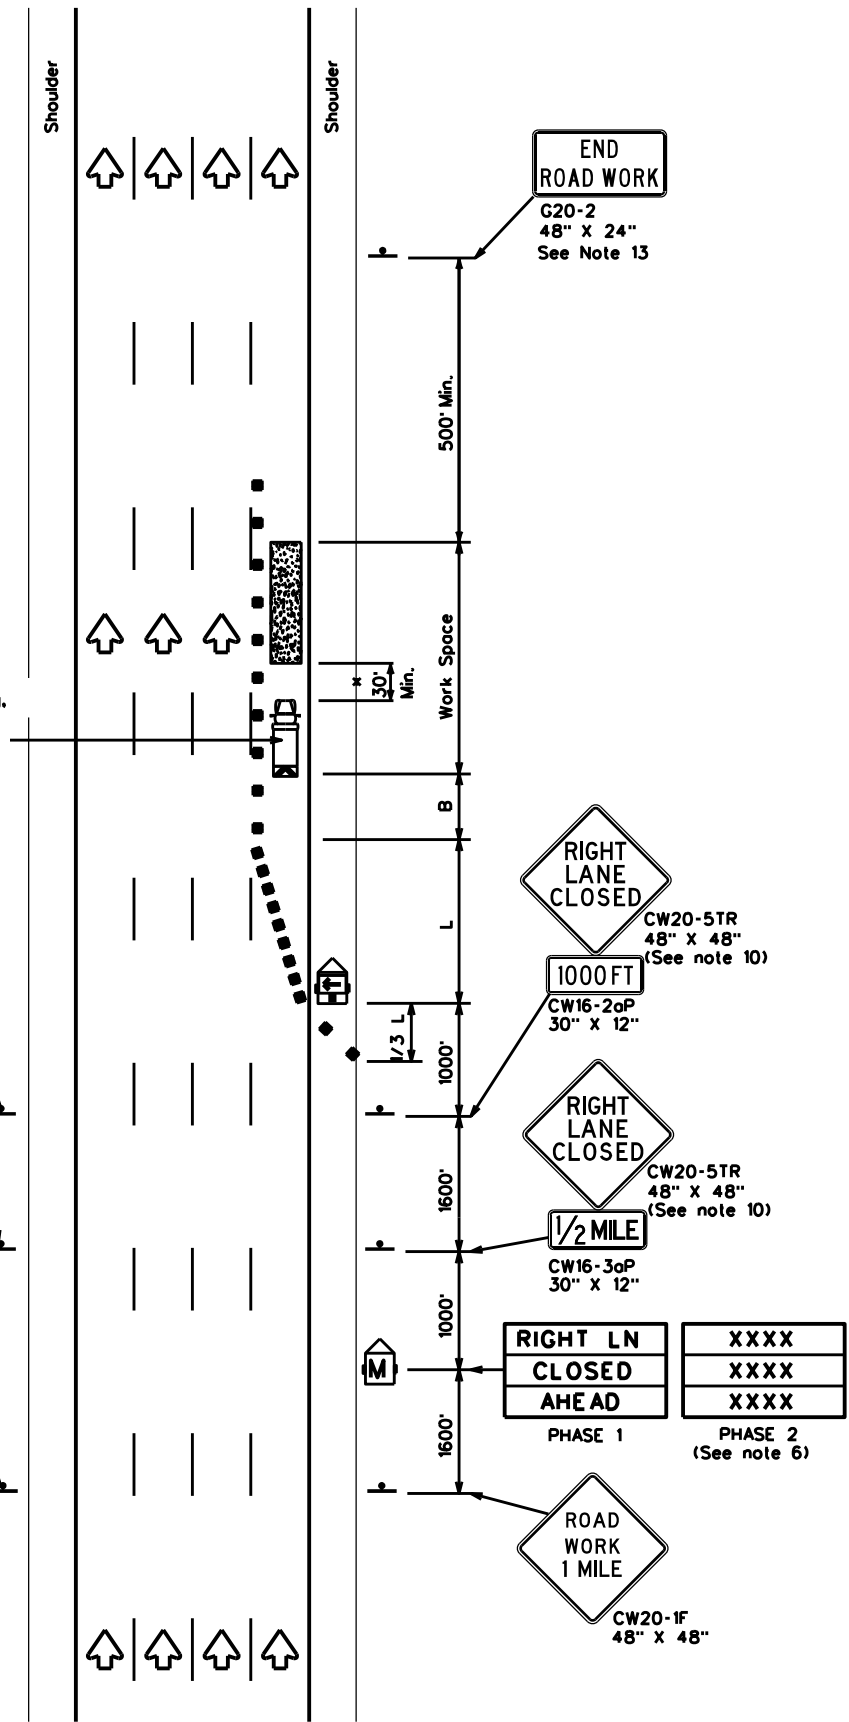

TCP (6-1a)
**TYPICAL FREEWAY
 ONE LANE CLOSURE**

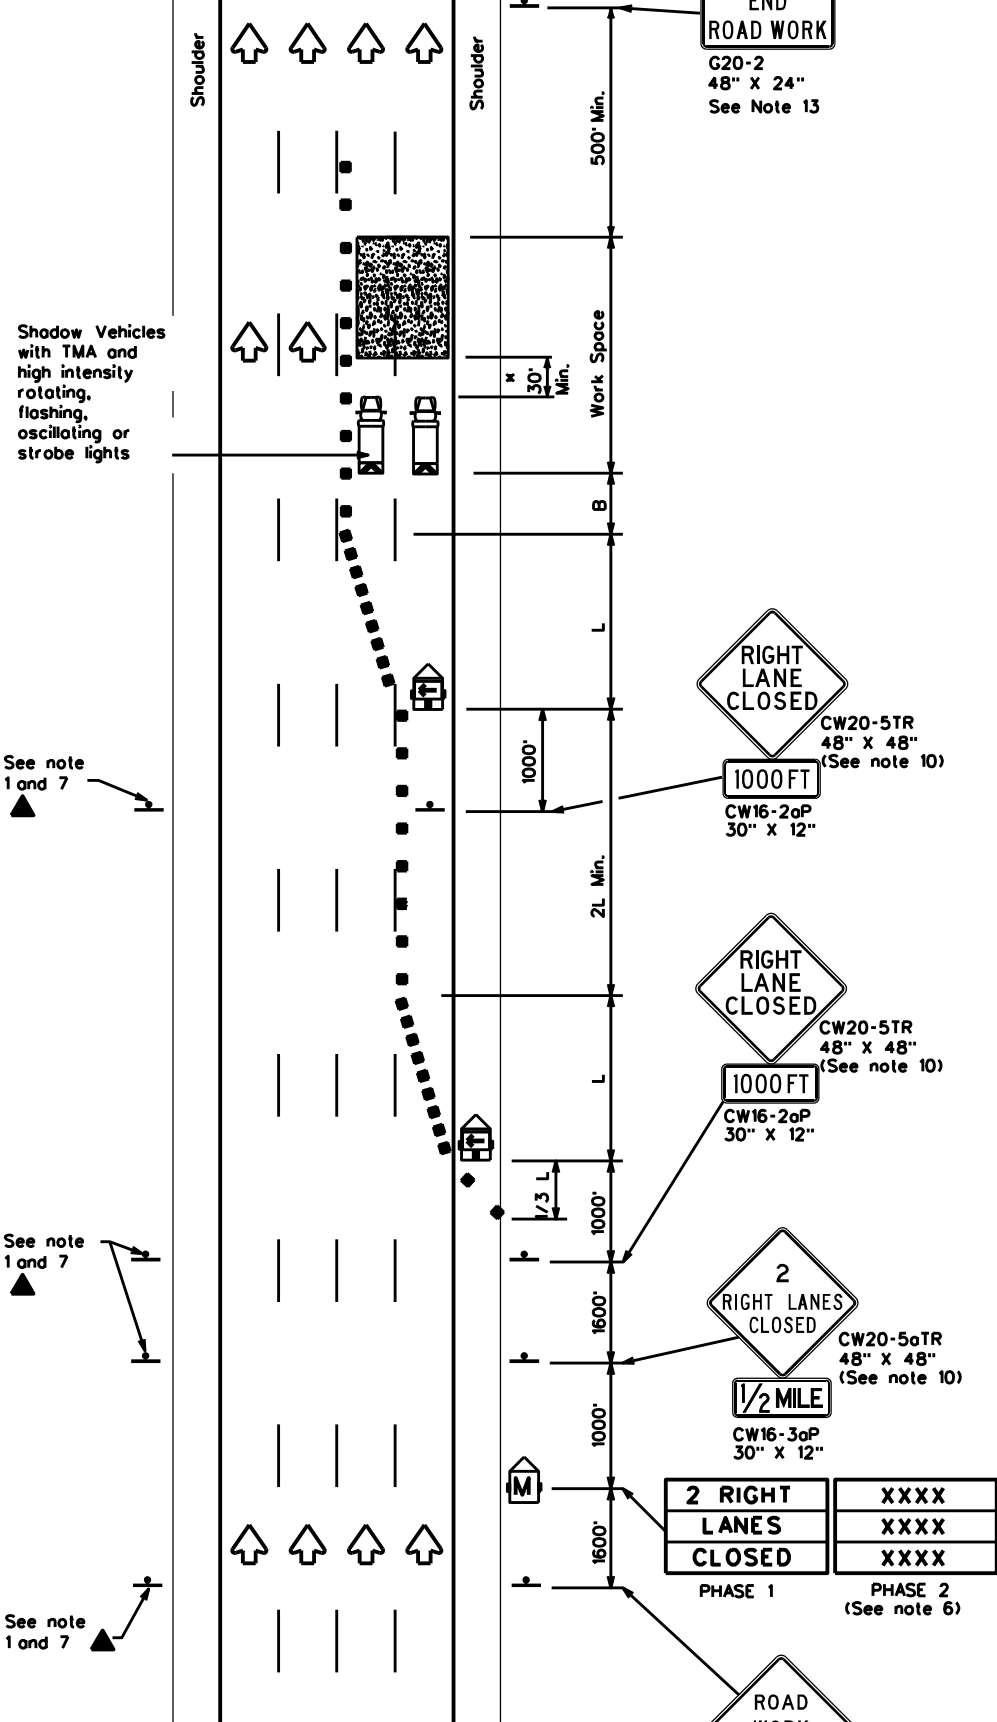

TCP (6-1b)
**TYPICAL FREEWAY
 TWO LANE CLOSURE**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

** Taper lengths have been rounded off.
 L-Length of Taper(FT) W-Width of Offset(FT) S-Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- Drums or 42" cones are the typical channelizing devices. For Intermediate Term Stationary work, drums shall be used on tapers with drums or 42" cones used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
- All construction signs and barricades placed during any phase of work shall remain in place until removal is approved by the Engineer.
- The Engineer may direct the Contractor to furnish additional signs and barricades as required to maintain traffic flow, detours and motorist safety during construction.
- Static message boards or changeable message signs stating the date and duration of ramp or freeway lane closures shall be placed a minimum of seven (7) calendar days in advance of the actual closure.
- Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE LEFT," recommended advisory speed, delay information, or other specific warnings.
- Duplicate construction warning signs should be erected on the median side of freeways where median width will permit and traffic volume justifies the signing.
- The number of closed lanes may be increased provided the spacing of traffic control devices, taper lengths and tangent lengths meet the requirements of the TMUTCD.
- Warning signs for intermediate term stationary work should be mounted at 7' to the bottom of the sign.
- Warning signs shown shall be appropriately altered for left lane closures. When signs are mounted at 7' height for short term stationary or short duration work, sign versions shown in the SHSD for Texas with distances on the sign face rather than mounted on a plaque below the sign may be used.
- When possible, PCMS units should be located in advance of the last available exit ramp prior to the lane closure to allow motorists an alternate route. They may also be relocated to improve advance warning in case of unanticipated queuing or congestion.
- For Intermediate Term Stationary work at night, floodlights should be used to illuminate the work area and equipment crossings. Floodlights shall not produce a disabling glare condition for road users or workers.
- The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.



**TRAFFIC CONTROL PLAN
 FREEWAY LANE CLOSURES**

TCP(6-1)-12

FILE:	tcp6-1.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	February 1998	CONT:	0013	SECT:	07	JOB:	087	HIGHWAY:	US 81
8-12	REVISIONS	DIST:	FTW	COUNTY:	WISE	SHEET NO.:	9		

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov</p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:35 PM
 FILE: T:\DISM\MAINT\SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn




**BARRICADE AND CONSTRUCTION
GENERAL NOTES
AND REQUIREMENTS**

BC(1)-21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	0013	SECT	07	JOB	087	HIGHWAY	US 81
REVISIONS		DIST	COUNTY		SHEET NO.				
4-03	7-13	FTW	WISE		10				
9-07	8-14								
5-10	5-21								

TYPICAL LOCATION OF CROSSROAD SIGNS

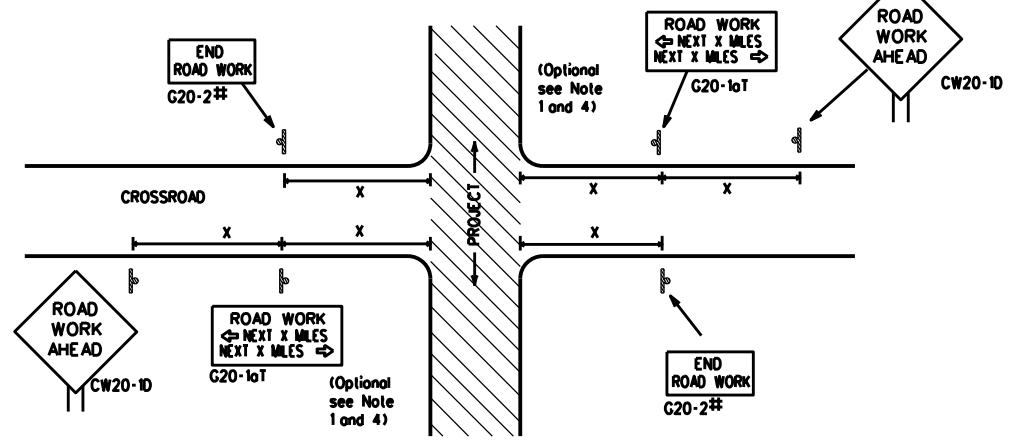

- †† May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

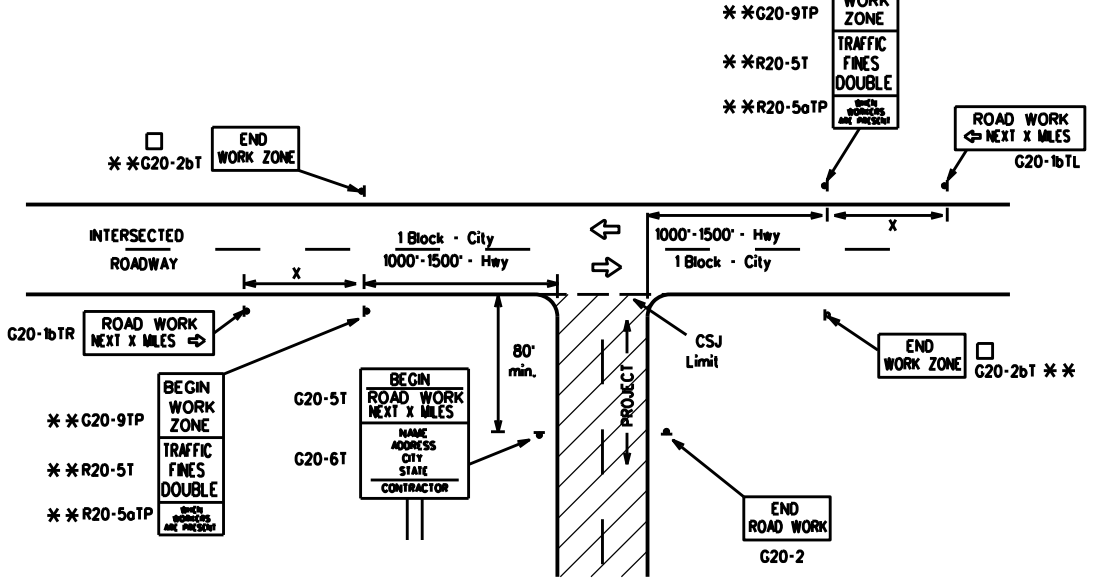

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING


Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Spacing "X" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
*			*	* ³

- For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.
- Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

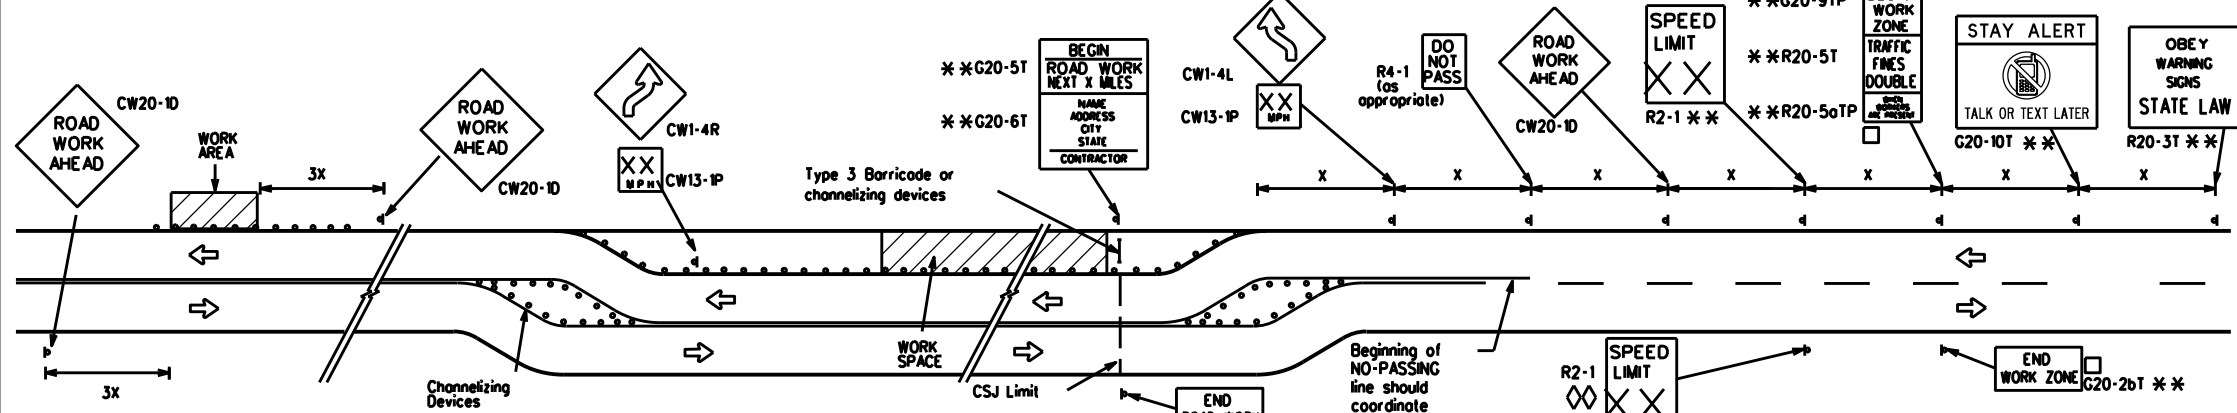

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

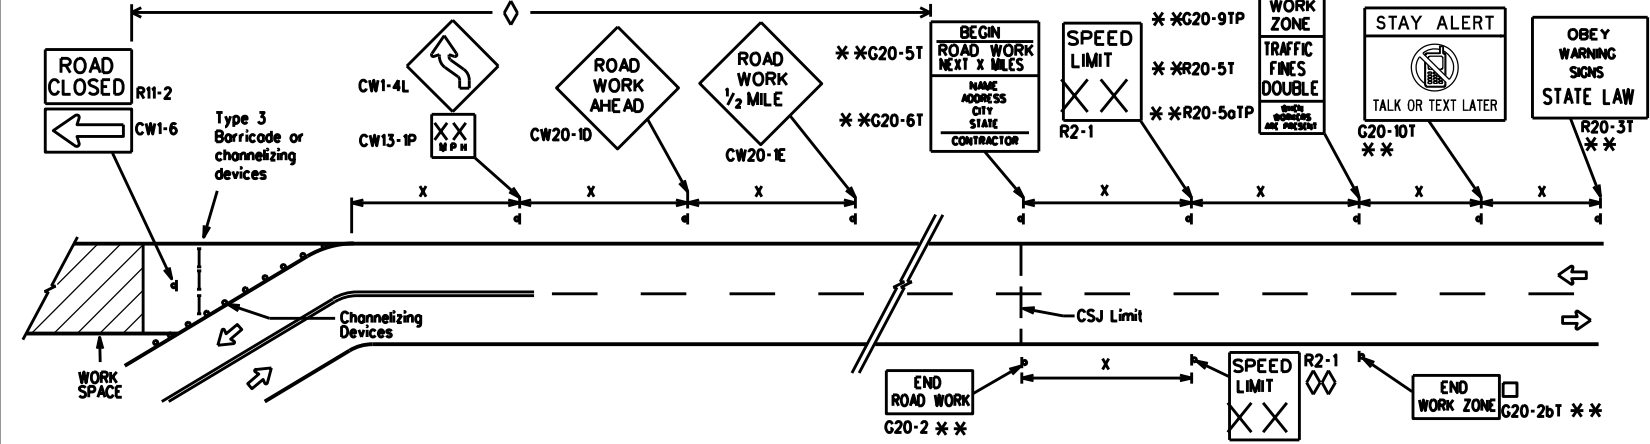

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
	Type 3 Barricade
	Channelizing Devices
	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT: 0013	SECT: 07	JOB: 087	HIGHWAY: US 81
REVISIONS: 9-07 8-14				
7-13 5-21	DIST: FTW	COUNTY: WISE	SHEET NO. 11	

DATE: 5/10/2023 4:03:36 PM
 FILE: T:\DISM\MAINT_SRA DESIGN\Wise County\PS&E\DCN\10-021 BC-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

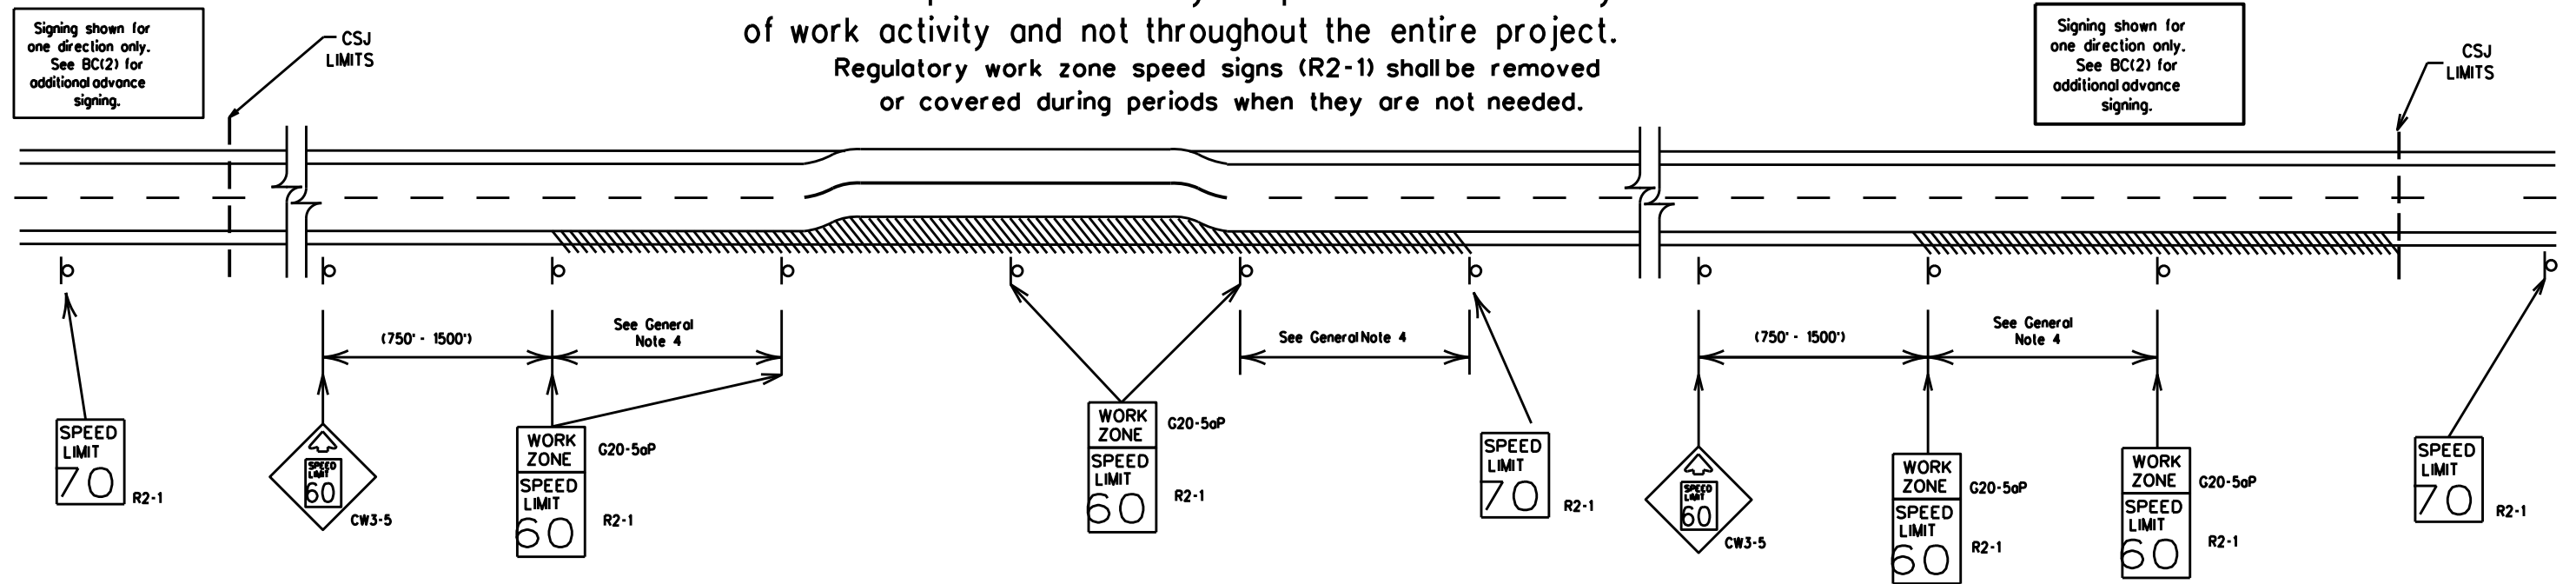

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Low enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form *1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:37 PM
FILE: T:\DIS\MINT_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

SHEET 3 OF 12




BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC(3)-21

FILE:	bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS		0013	07	087	US 81
9-07	8-14	DIST	COUNTY	SHEET NO.	
7-13	5-21	FTW	WISE	12	


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

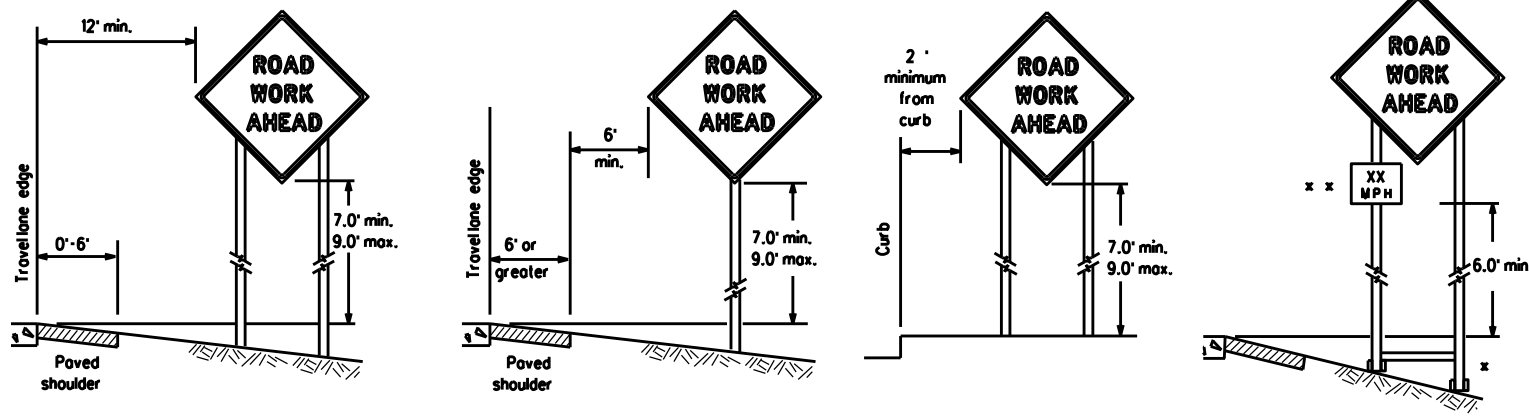

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

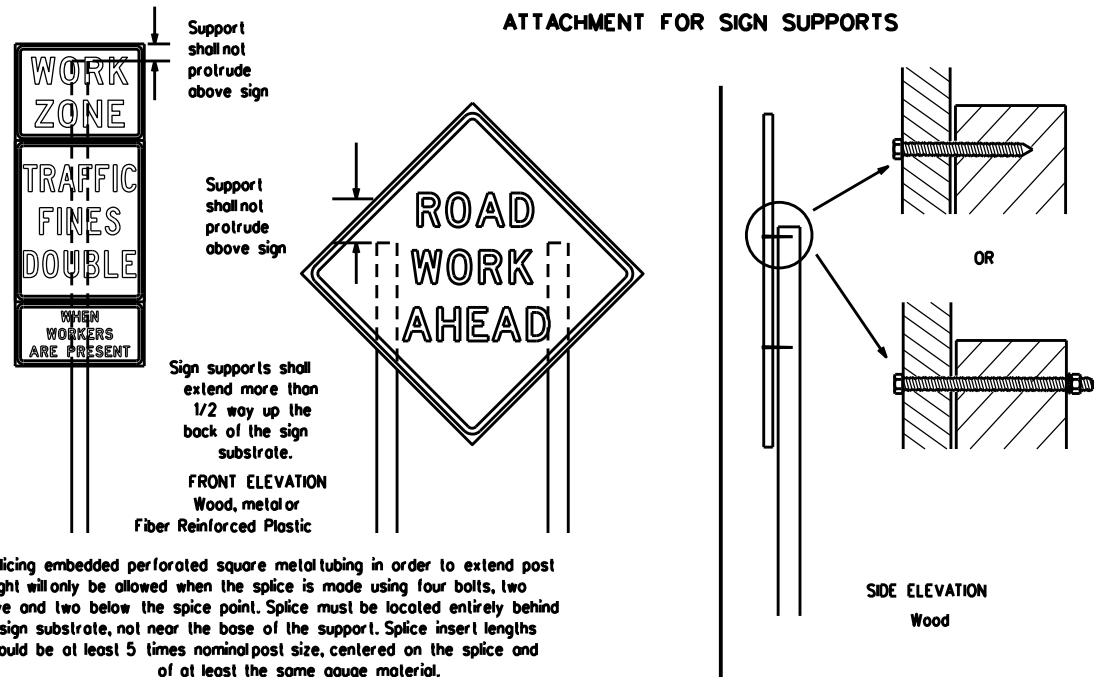


Nois shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflective when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

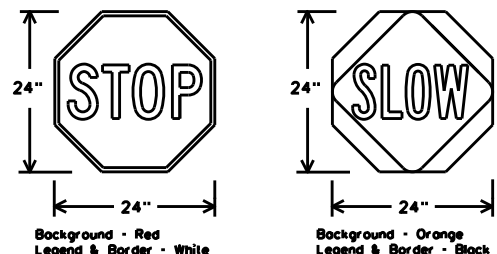

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{TL} OR C _{TL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCO list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
 2. Wooden sign posts shall be painted white.
 3. Barricades shall NOT be used as sign supports.
 4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
 5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
 6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCO) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
 7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
 8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
 9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.
- DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)**
- a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCO lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type C, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCO list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC(4)-21



FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT: 0013	SECT: 07	JOB: 087	HIGHWAY: US 81
REVISIONS: 9-07 8-14	DIST: FTW	COUNTY: WISE	SHEET NO. 13	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:39 PM FILE: T:\DISM\MAINT_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:40 PM
 FILE: T:\DISM\MAINT_SRA_DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

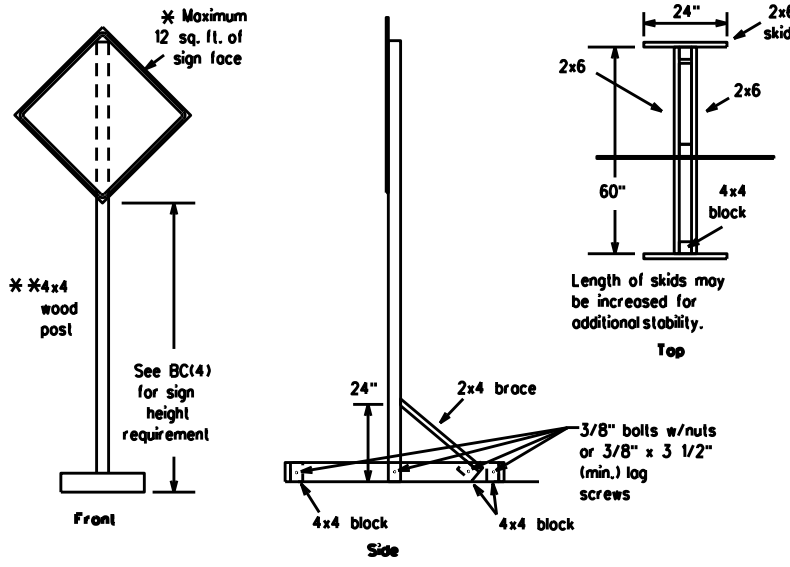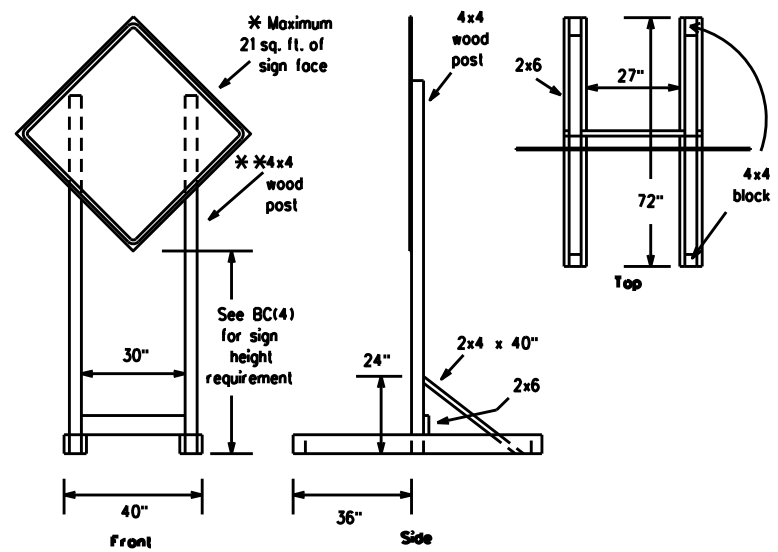



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

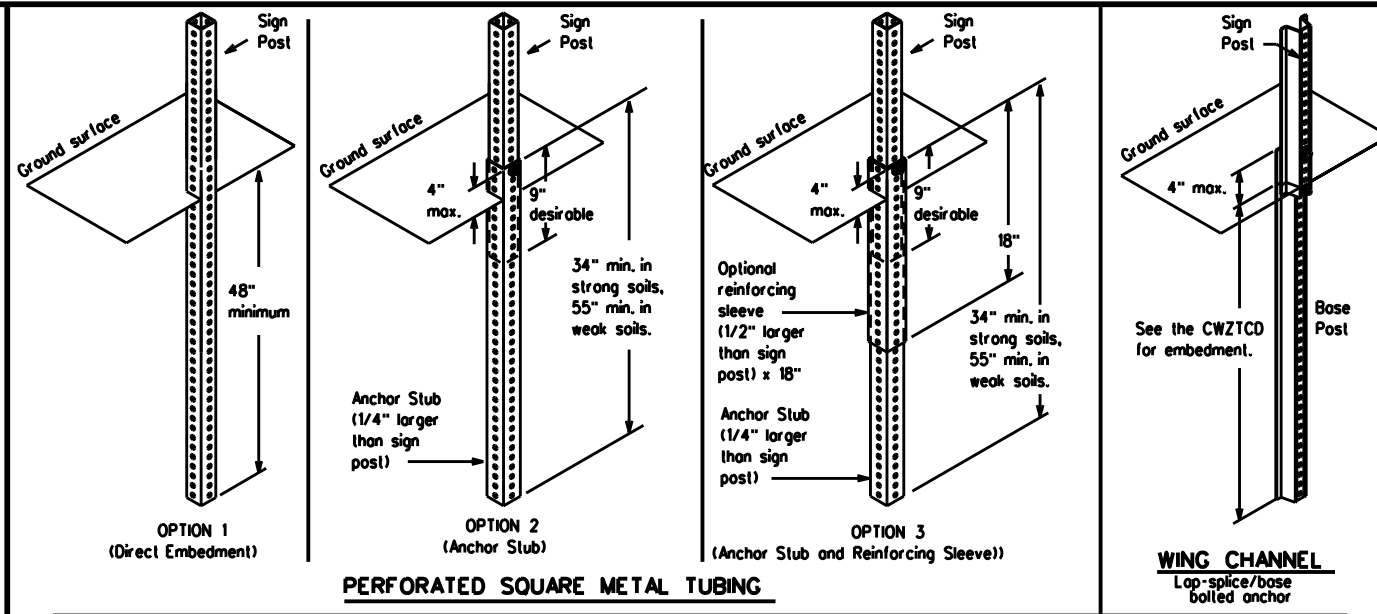

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTC and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

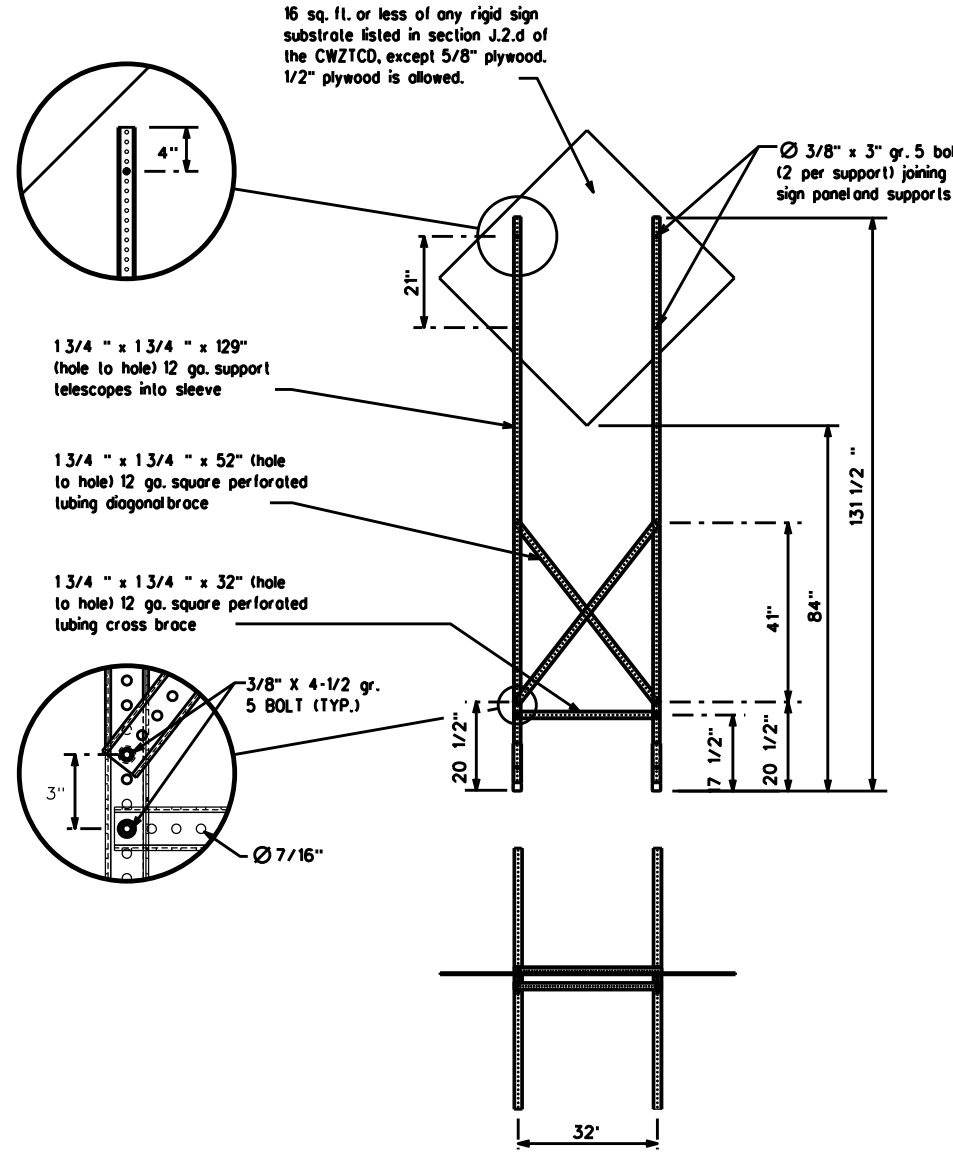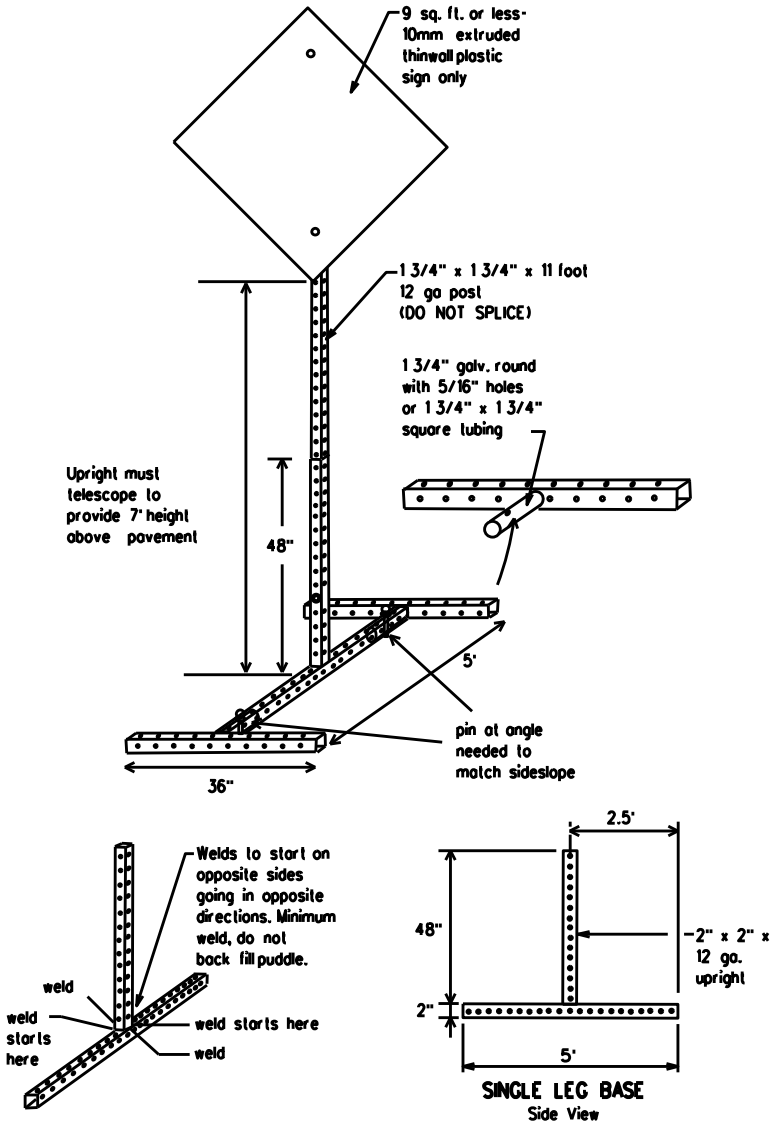

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTC LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" log screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTC List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- ☐ See the CWZTC for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	FTW	WISE		14

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHs
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation = IH-number, US-number, SH-number, FM-number

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXXX TO XXXXXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM- X PM
APR XX- XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM- XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS should be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and M, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flogger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	FTW	WISE	15	

DATE: 5/10/2023 4:03:42 PM FILE: T:\DISM\MAINT_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 5/10/2023 4:03:43 PM
 FILE: T:\DISM\MAINT_SRA_DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

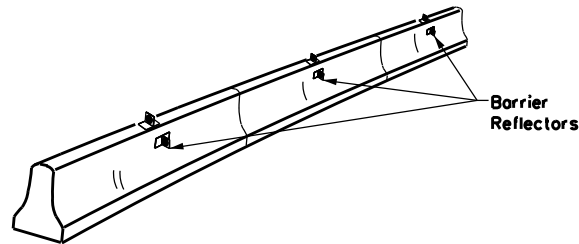

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edge line being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

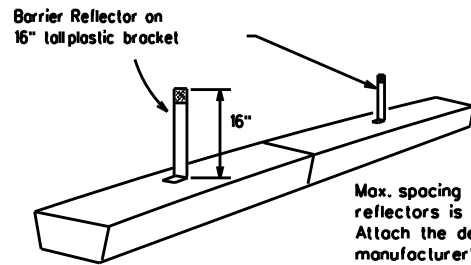


LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

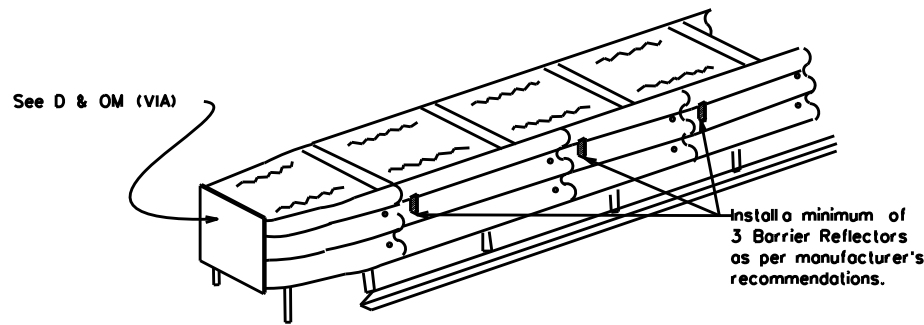

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCO List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C sheeting, meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCO.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.

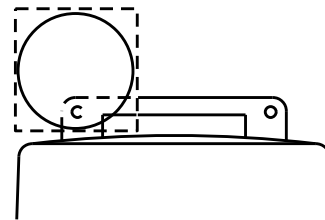

Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

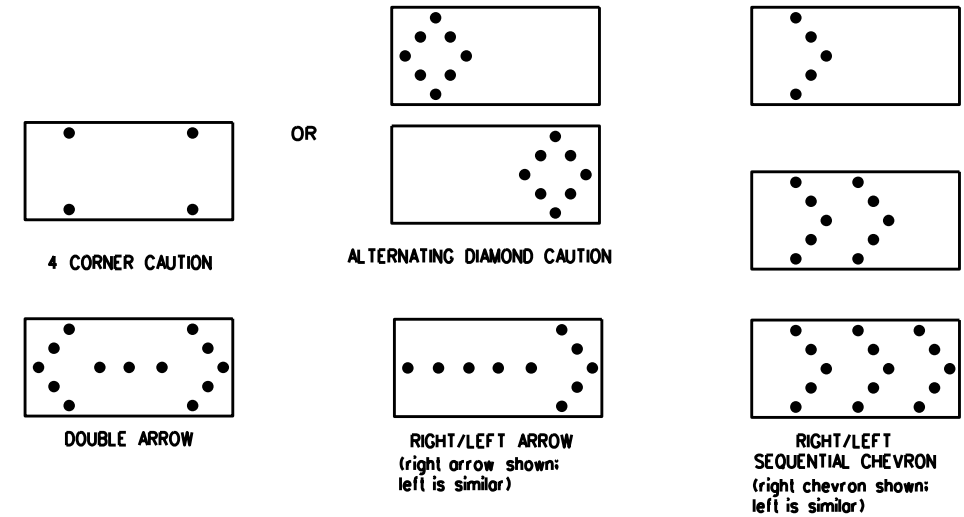

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCO for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCO for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be advanced anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC(7)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0013	07	087	US 81				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	FTW	WISE	16					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:44 PM
 FILE: T:\DIS\M\T_SRA_DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

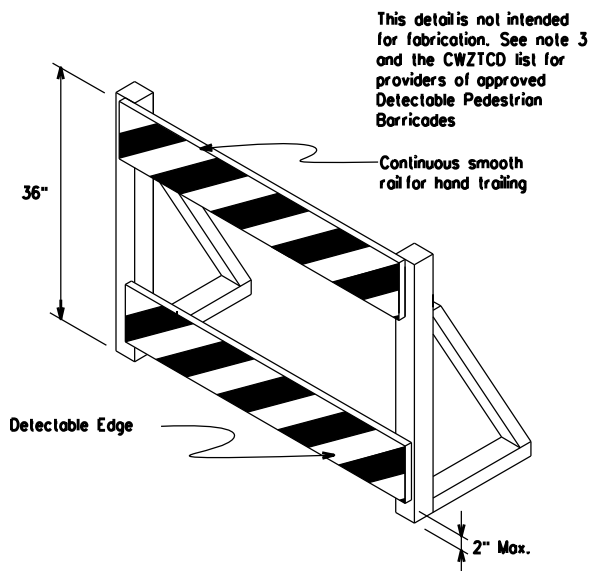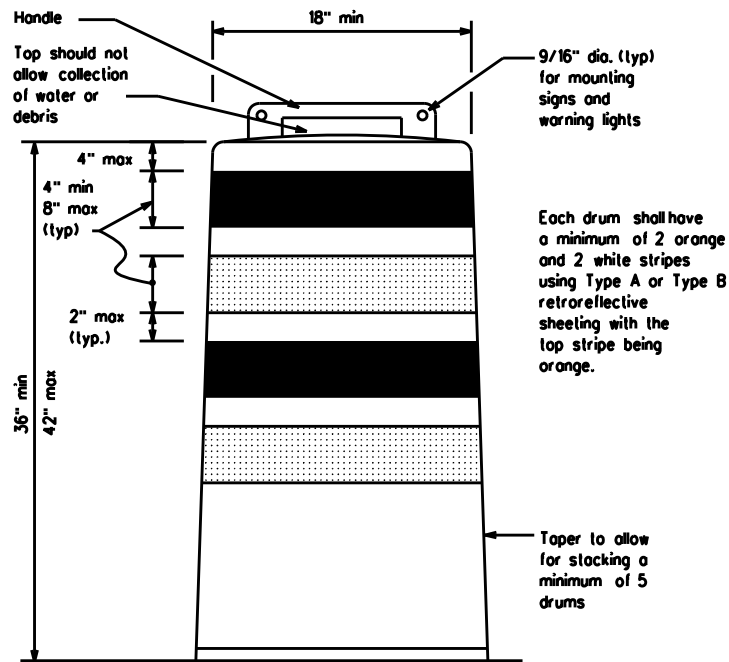


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used of each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT:	SECT:	JOB:	HIGHWAY:				
REVISIONS		0013	07	087	US 81				
4-03	8-14	DIST:	COUNTY:	SHEET NO.:					
9-07	5-21	FTW	WISE	17					
7-13									


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:46 PM
 FILE: T:\DISM\MAINT_SRA_DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

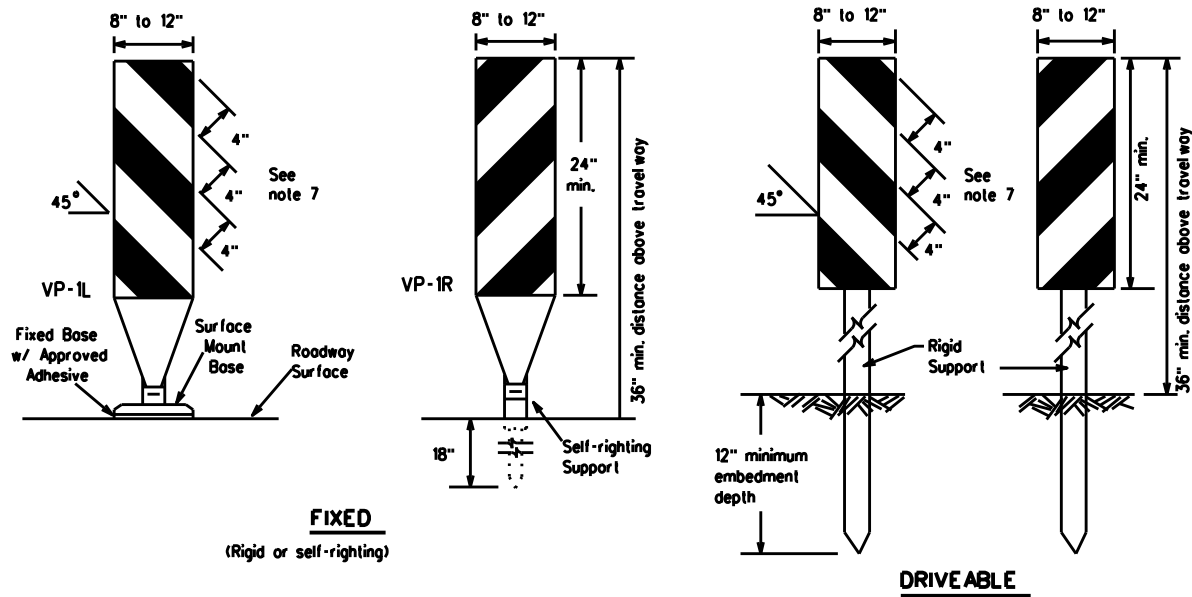

FIXED
(Rigid or self-righting)


DRIVEABLE

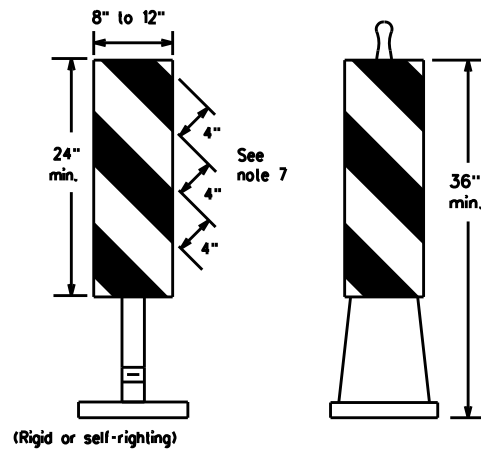

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panels is 36 inches or greater, a panel stripe of 6 inches shall be used.

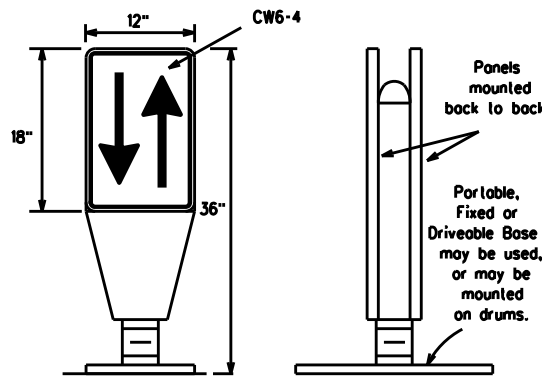

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

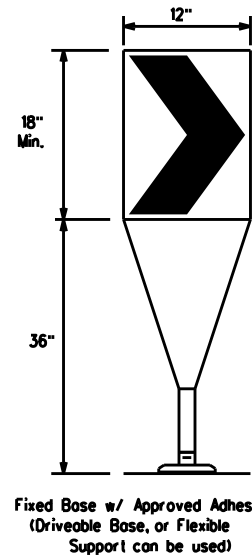

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

CHEVRONS

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.



LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long cones and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70	700'	770'	840'	70'	140'	
75	750'	825'	900'	75'	150'	
80	800'	880'	960'	80'	160'	

x x Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(9)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	FTW	WISE	18	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:47 PM
 FILE: T:\DISM\MAINT_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stocked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.


Barricades shall NOT be used as a sign support.



TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

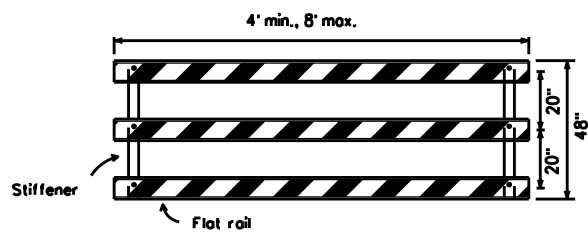


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

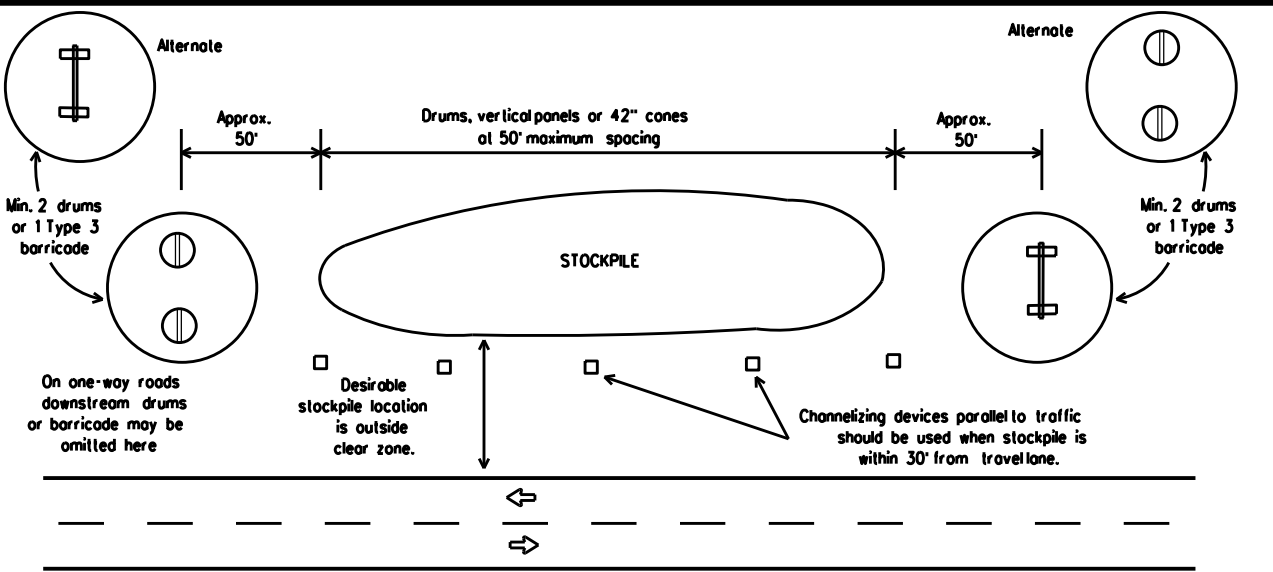

TRAFFIC CONTROL FOR MATERIAL STOCKPILES


Each roadway of a divided highway shall be barricaded in the same manner.

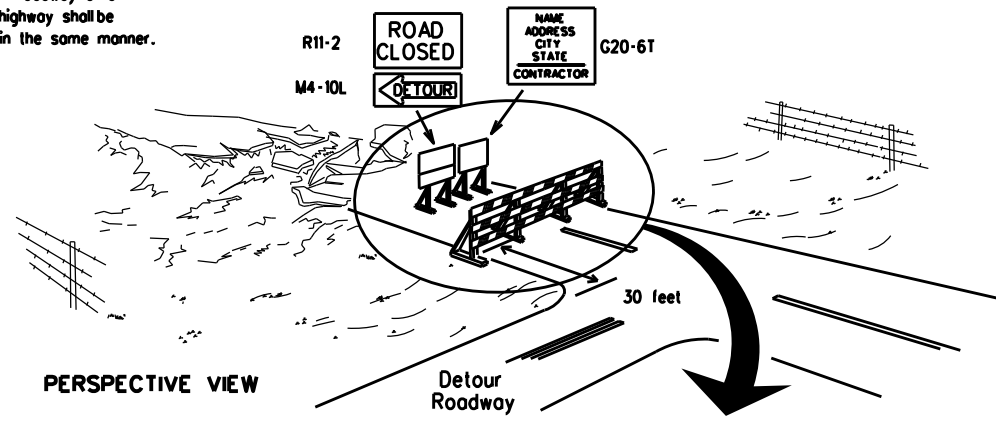

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

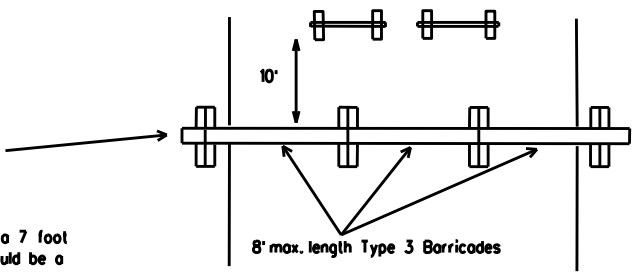


PLAN VIEW

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

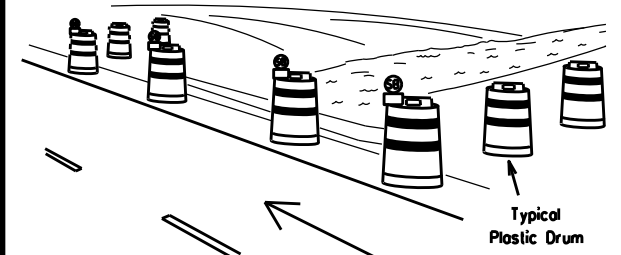

PERSPECTIVE VIEW

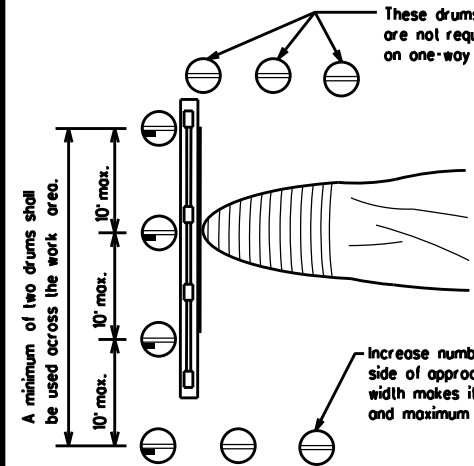


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

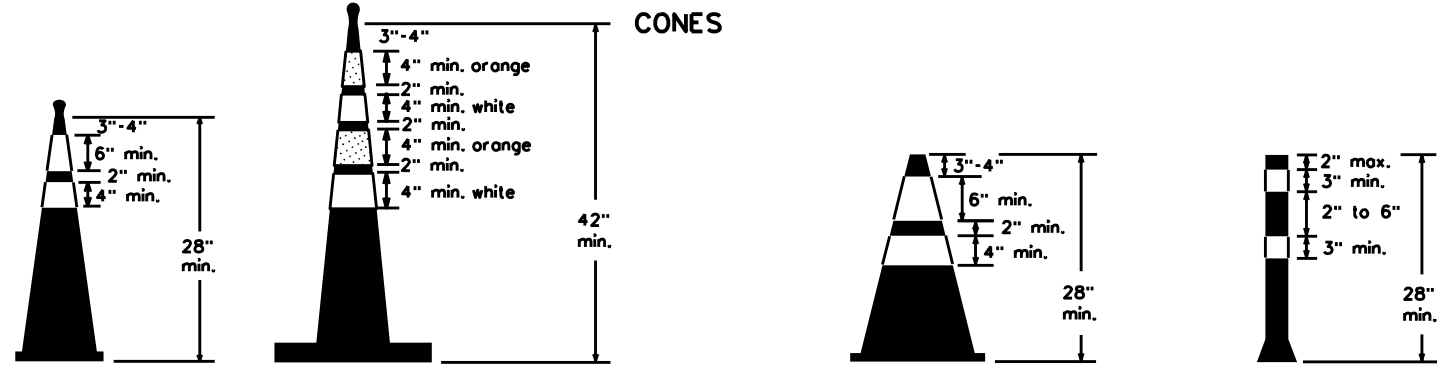

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined in BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	FTW	WISE	19	

WORK ZONE PAVEMENT MARKINGS

GENERAL

1. The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
2. Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
3. Additional supplemental pavement marking details may be found in the plans or specifications.
4. Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
7. All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

1. Raised pavement markers are to be placed according to the patterns on BC(12).
2. All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

1. Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
2. Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

1. The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
2. Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
4. Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

1. Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
2. The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
3. Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
5. Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
7. Over-painting of the markings SHALL NOT BE permitted.
8. Removal of raised pavement markers shall be as directed by the Engineer.
9. Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
10. Block-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

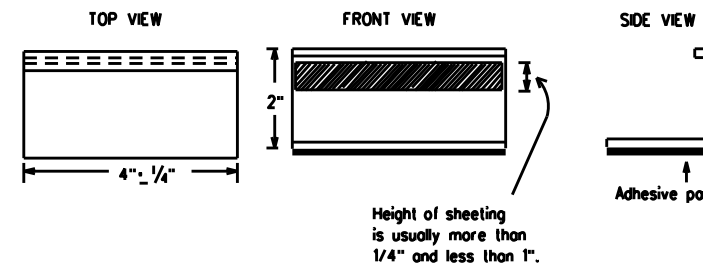

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

1. Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
2. Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
3. Small design variances may be noted between tab manufacturers.
4. See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS


1. Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
2. All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
3. Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS





BC(11)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
	0013	07	087	US 81
REVISIONS				
2-98	9-07	5-21		
1-02	7-13			
11-02	8-14			
	DIST	COUNTY	SHEET NO.	
	FTW	WISE	20	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 5/10/2023 4:03:49 PM
FILE: T:\DIS\M\T_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

PAVEMENT MARKING PATTERNS

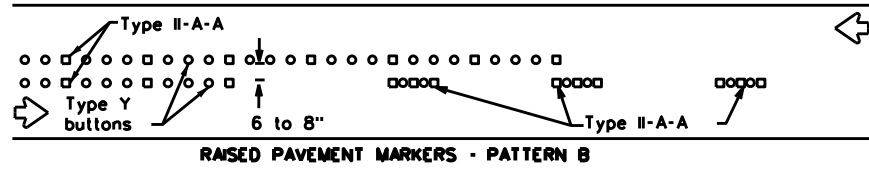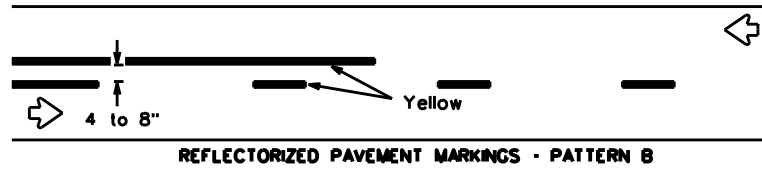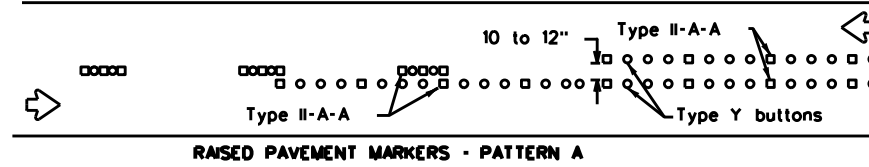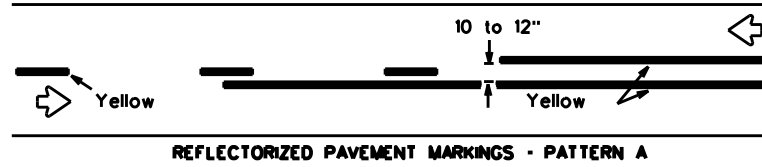



Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

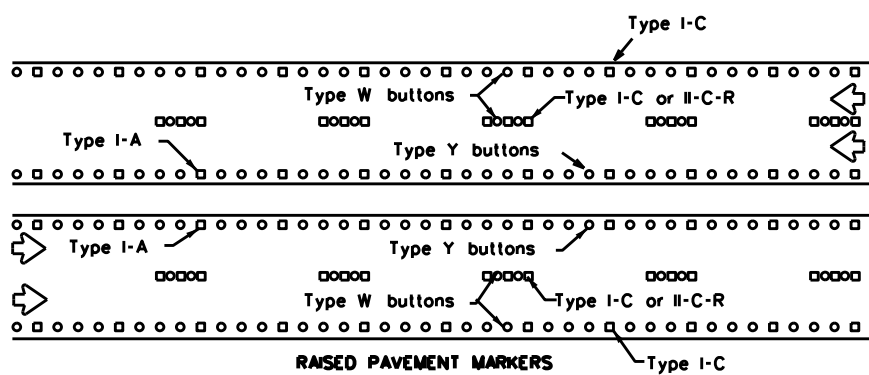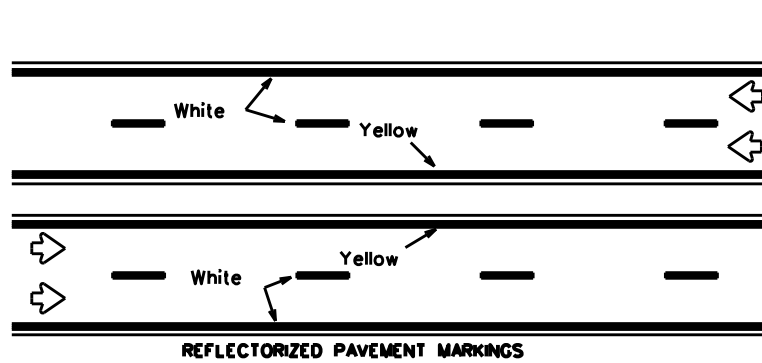



Prefabricated markings may be substituted for reflectorized pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

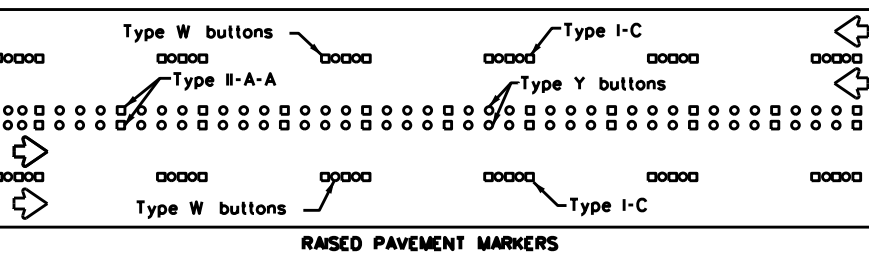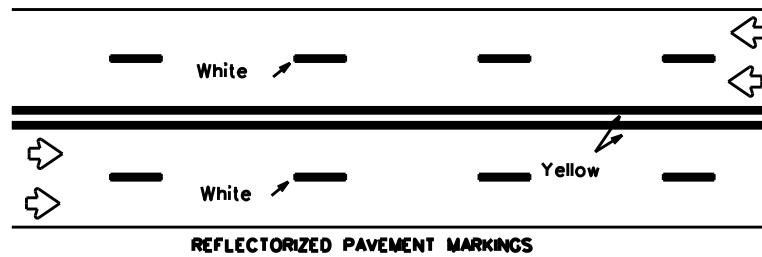

Prefabricated markings may be substituted for reflectorized pavement markings.


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

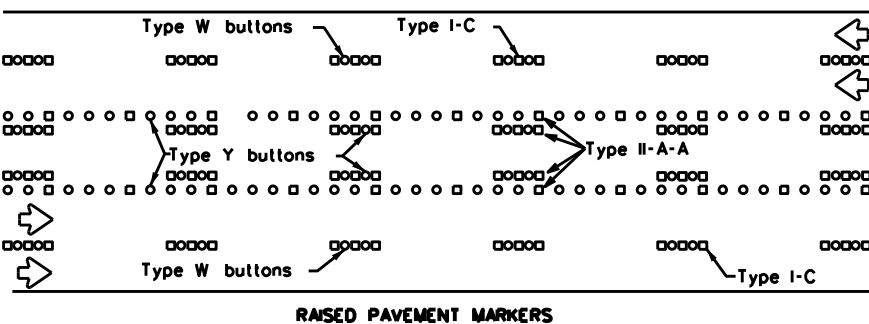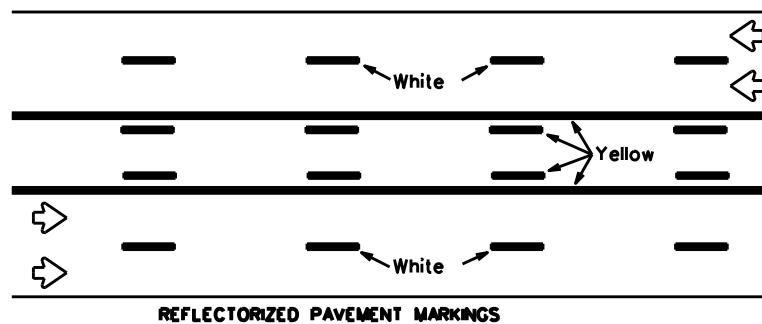




Prefabricated markings may be substituted for reflectorized pavement markings.

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

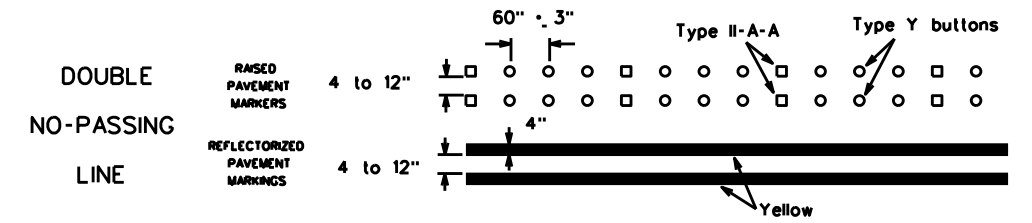

SOLID LINES

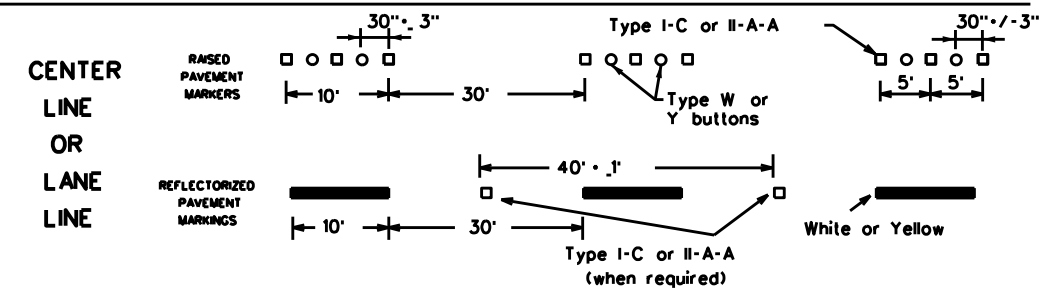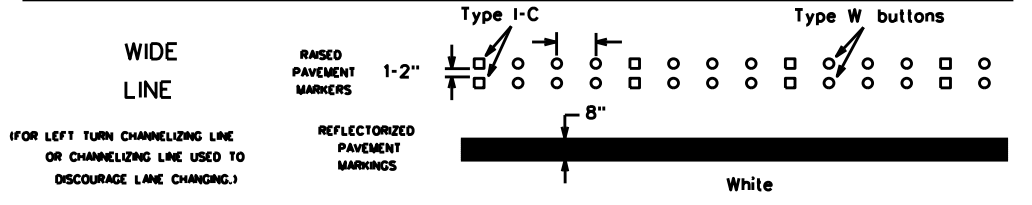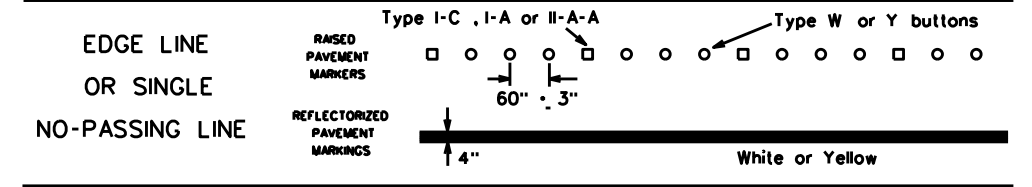


BROKEN LINES

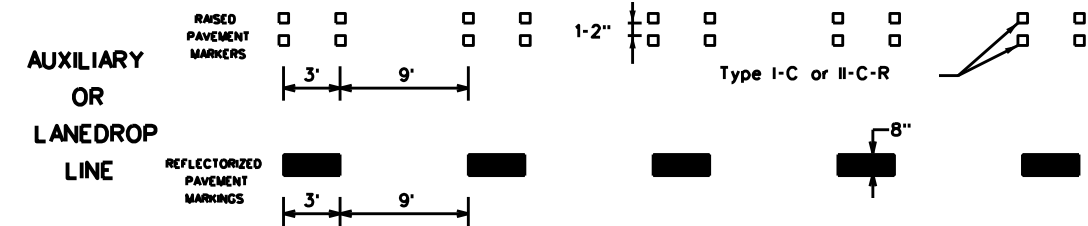

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

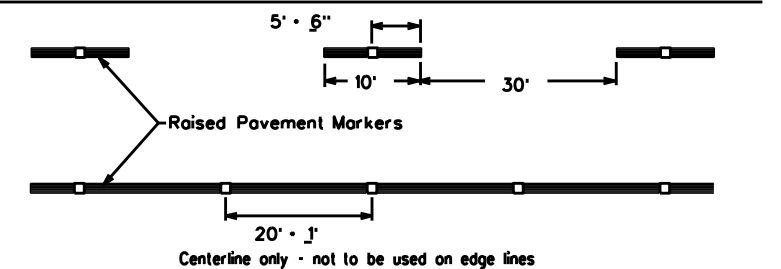

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	FTW	WISE	21	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 4:03:50 PM
FILE: T:\DISMANT_SRA DESIGN\Wise County\PS&E\DCN\010-021 BC-21.dgn

Horizontal Alignment Review Report

Report Created: Monday, April 17, 2023
Time: 11:17:38 AM

Project: 2D Metric Design
Description: TADISMAINTSRA DESIGNWise County\Design
File Name: Files\031_Master_Alignment.dgn
Last Revised: 3/31/2023 10:46

Note: All units in this report are in feet unless specified otherwise.

Alignment Name: TRUCK PARKING		Station		Northing	Easting
Alignment Description:					
Alignment Style:					
Element: Linear					
START	()	100+00.000 R1	7152083.69	2234197.19	
PC	()	105+10.222 R1	7152539.107	2233967.142	
Tangential Direction:		N26°48'00.023"W			
Tangential Length:		510.222			
Element: Circular					
PC	(GeomBL)	105+10.222 R1	7152539.107	2233967.142	
HPI	()	106+95.692 R1	7152712.167	2233900.439	
CC	()	7151873.366	2232239.895		
PCC	()	108+79.927 R1	7152868.553	2233800.728	
Radius:		1851.107			
Delta:		11°26'35.420" Left			
Degree of Curvature (Arc):		10°09'17.610"			
Length:		369.705			
Tangent:		185.469			
Chord:		369.091			
Middle Ordinate:		9.222			
External:		9.268			
Back Tangent Direction:		N21°04'42.259"W			
Back Radial Direction:		N68°55'17.741"E			
Chord Direction:		N26°47'59.969"W			
Ahead Radial Direction:		N67°28'42.321"E			
Ahead Tangent Direction:		N32°31'17.679"W			
Element: Circular					
PCC	()	108+79.927 R1	7152868.553	2233800.728	
HPI	()	111+41.189 R1	7153090.336	2233662.633	
CC	()	7151937.753	2232305.846		
PCC	()	113+98.668 R1	7153262.472	2233466.095	
Radius:		1760.983			
Delta:		16°52'40.354" Left			
Degree of Curvature (Arc):		10°40'28.561"			
Length:		518.741			
Tangent:		261.262			
Chord:		516.867			
Middle Ordinate:		19.066			
External:		19.275			
Back Tangent Direction:		N31°54'31.596"W			
Back Radial Direction:		N58°05'28.404"E			
Chord Direction:		N40°20'51.773"W			
Ahead Radial Direction:		N41°12'48.050"E			
Ahead Tangent Direction:		N48°47'11.950"W			
Element: Circular					
PCC	()	113+98.668 R1	7153262.472	2233466.095	
HPI	()	117+28.527 R1	7153465.544	2233206.154	
CC	()	7147779.705	2229182.838		
PT	()	120+57.893 R1	7153643.112	2232928.167	
Radius:		6957.516			
Delta:		05°25'43.615" Left			
Degree of Curvature (Arc):		02°42'06.466"			
Length:		659.225			
Tangent:		329.86			
Chord:		658.979			
Middle Ordinate:		7.806			
External:		7.815			
Back Tangent Direction:		N52°00'08.192"W			
Back Radial Direction:		N37°59'51.808"E			
Chord Direction:		N54°43'00.000"W			
Ahead Radial Direction:		N32°34'08.192"E			
Ahead Tangent Direction:		N57°25'51.808"W			
Element: Linear					
PT	()	120+57.893 R1	7153643.112	2232928.167	
END	()	122+52.267 R1	7153755.386	2232769.499	
Tangential Direction:		N54°43'00.000"W			
Tangential Length:		194.373			

Horizontal Alignment Review Report

Report Created: Monday, April 17, 2023
Time: 11:32:22 AM

Project: 2D Metric Design
Description: TADISMAINTSRA DESIGNWise County\Design
File Name: Files\031_Master_Alignment.dgn
Last Revised: 3/31/2023 10:46



Note: All units in this report are in feet unless specified otherwise.

Alignment Name: CAR PARKING		Station		Northing	Easting
Alignment Description:					
Alignment Style:					
Element: Circular					
PC	(TRUCK PARKING)	10+00.000 R1	7152539.107	2233967.142	
HPI	()	10+53.714 R1	7152578.583	2233930.717	
CC	()	7127731.193	2207082.094		
PT	()	11+07.427 R1	7152617.951	2233894.175	
Radius:		36581.942			
Delta:		00°10'05.722" Left			
Degree of Curvature (Arc):		00°30'49.876"			
Length:		107.427			
Tangent:		53.714			
Chord:		107.427			
Middle Ordinate:		0.039			
External:		0.039			
Back Tangent Direction:		N42°41'56.292"W			
Back Radial Direction:		N47°18'03.708"E			
Chord Direction:		N42°46'59.153"W			
Ahead Radial Direction:		N47°07'57.986"E			
Ahead Tangent Direction:		N42°52'02.014"W			
Element: Linear					
PT	()	11+07.427 R1	7152617.951	2233894.175	
PC	()	12+46.552 R1	7152713.621	2233793.165	
Tangential Direction:		N46°33'18.904"W			
Tangential Length:		139.125			
Element: Circular					
PC	(GeomBL2)	12+46.552 R1	7152713.621	2233793.165	
HPI	()	13+82.754 R1	7152809.683	2233696.609	
CC	()	7153374.396	2234450.556		
PT	()	15+17.041 R1	7152929.356	2233631.578	
Radius:		932.086			
Delta:		16°37'37.501" Right			
Degree of Curvature (Arc):		20°10'02.757"			
Length:		270.489			
Tangent:		136.202			
Chord:		269.541			
Middle Ordinate:		9.795			
External:		9.899			
Back Tangent Direction:		N45°08'49.643"W			
Back Radial Direction:		N44°51'10.357"E			
Chord Direction:		N36°50'00.892"W			
Ahead Radial Direction:		N61°28'47.858"E			
Ahead Tangent Direction:		N28°31'12.142"W			
Element: Linear					
PT	()	15+17.041 R1	7152929.356	2233631.578	
PC	()	18+35.317 R1	7153203.575	2233470.012	
Tangential Direction:		N30°30'21.543"W			
Tangential Length:		318.276			
Element: Circular					
PC	()	18+35.317 R1	7153203.575	2233470.012	
HPI	()	19+17.089 R1	7153273.404	2233427.459	
CC	()	7152747.561	2232721.692		
PT	()	19+98.389 R1	7153334.153	2233372.723	
Radius:		876.317			
Delta:		10°39'43.345" Left			
Degree of Curvature (Arc):		21°27'03.239"			
Length:		163.072			
Tangent:		81.772			
Chord:		162.837			
Middle Ordinate:		3.79			
External:		3.807			
Back Tangent Direction:		N31°21'27.001"W			
Back Radial Direction:		N58°38'32.999"E			
Chord Direction:		N36°41'18.674"W			
Ahead Radial Direction:		N47°58'49.653"E			
Ahead Tangent Direction:		N42°01'10.347"W			



Elijah Zelekov, PE 5/12/23

HORIZONTAL ALIGNMENT DATA				
REVISIONS	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		22
	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	HIGHWAY NO.
CONTROL	SECTION	JOB	US 81	
	0013	07	087	

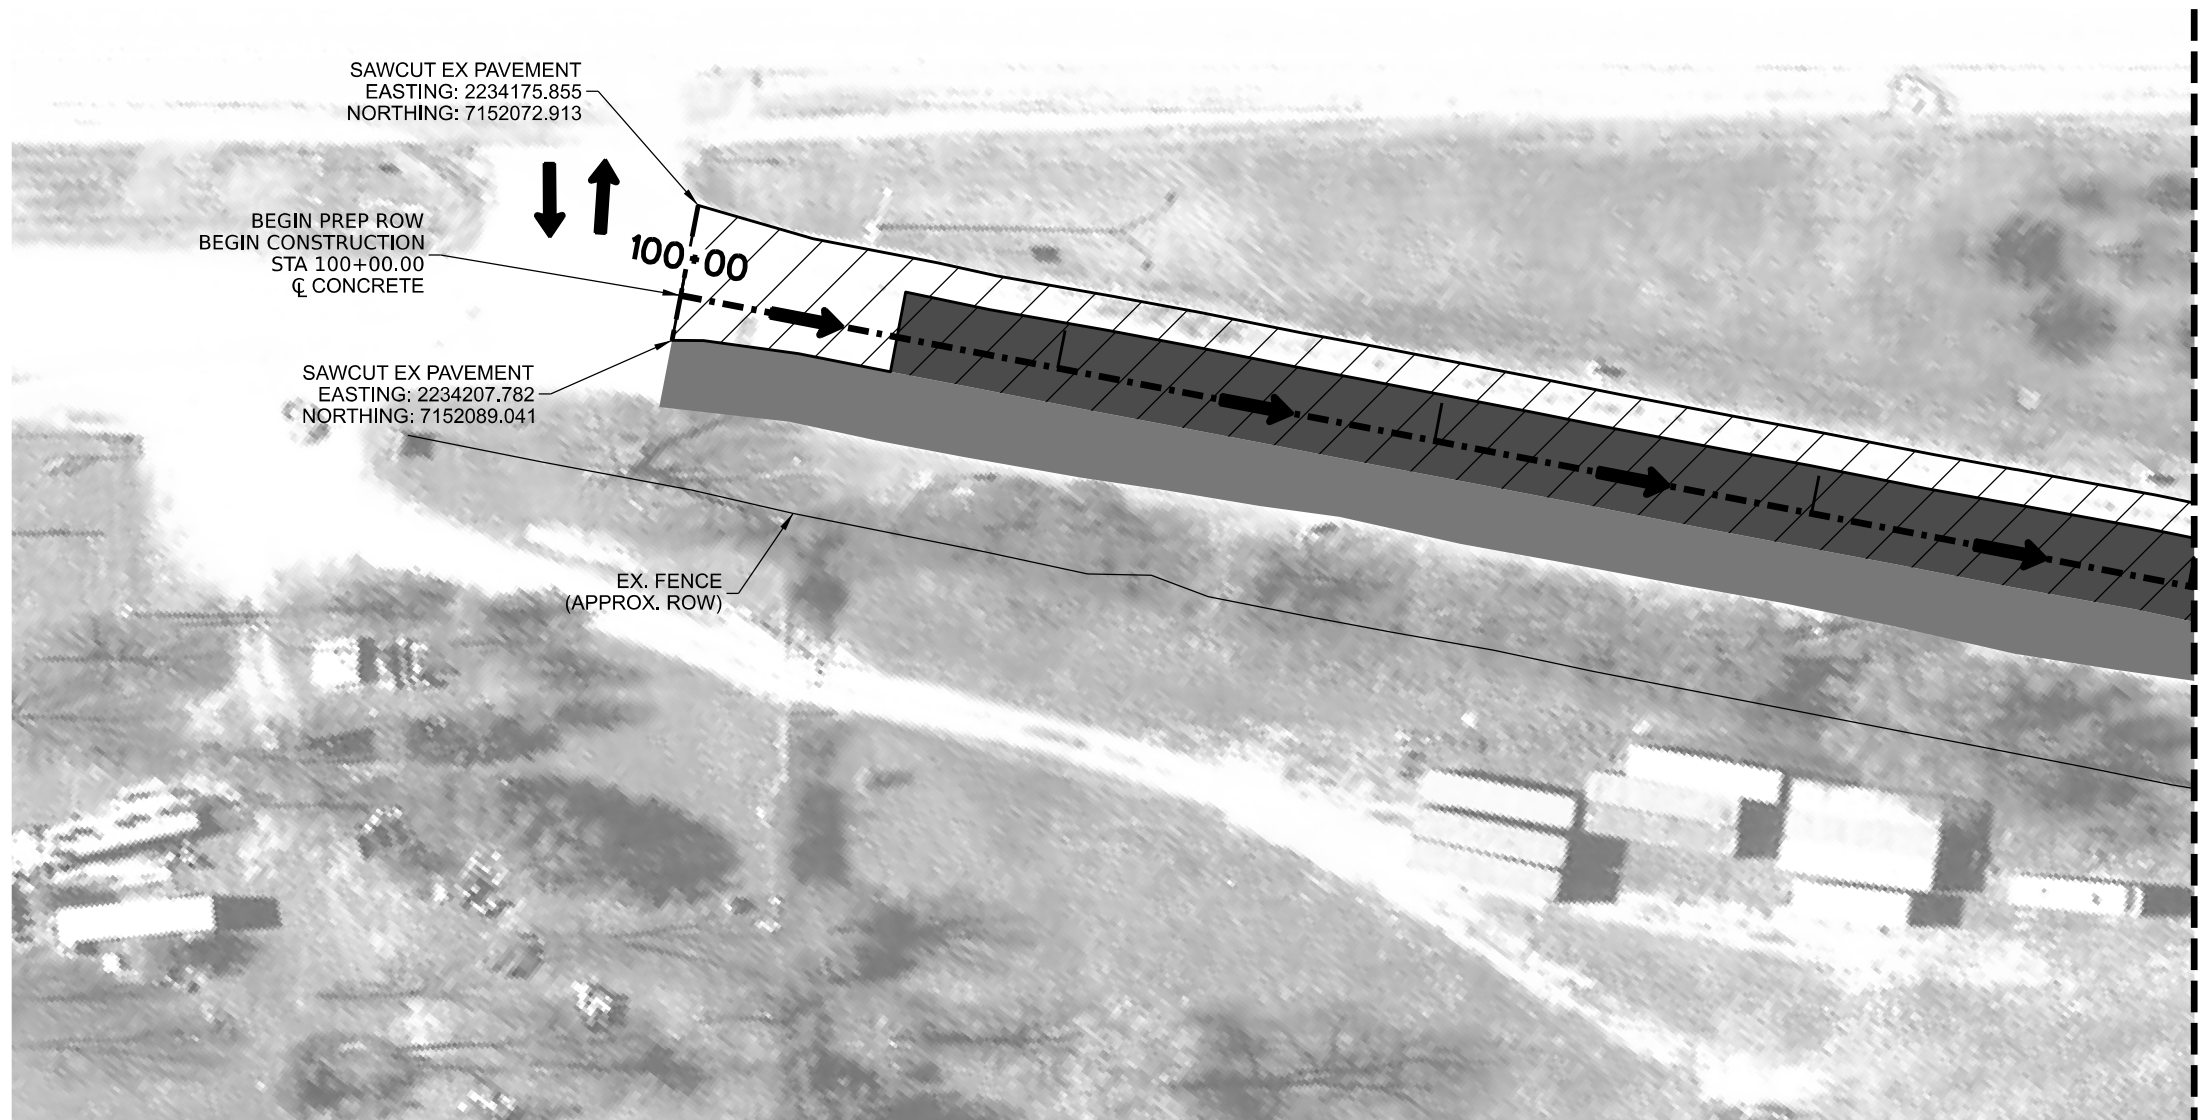

Elijah Zelenov, P.E. 5/12/23

LEGEND	
	REMOVE STAB BASE & ASPH PAV (7'-12")
	REMOVE CONC (PAV) REMOVE CONC (SIDEWALKS)
	EXCAVATION ROADWAY

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0104 6001	REMOVING CONC (PAV)	SY	810
0104 6015	REMOVING CONC (SIDEWALKS)	SY	0
0104 6022	REMOVING CONC (CURB & GUTTER)	LF	370
0105 6014	REMOVING STAB BASE & ASPH PAV (7"-12")	SY	1,350
0110 6001	EXCAVATION (ROADWAY)	CY	250
0644 6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA	0
1002 6025	LANDSCAPE AMENITY (TRASH/RECYCLE BIN)	EA	0


NOTES:
 REMOVE AND REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 USE EXCAVATION SPECIAL AS NEEDED.

SHEET 1 OF 4

Texas Department of Transportation

REMOVAL LAYOUT

	FED. RD. DIV. NO. 6	FEDERAL-AID PROJECT NO. SEE TITLE SHEET		SHEET NO. 23
REVISIONS	STATE	DISTRICT	COUNTY	23
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO. US 81
	0013	07	087	

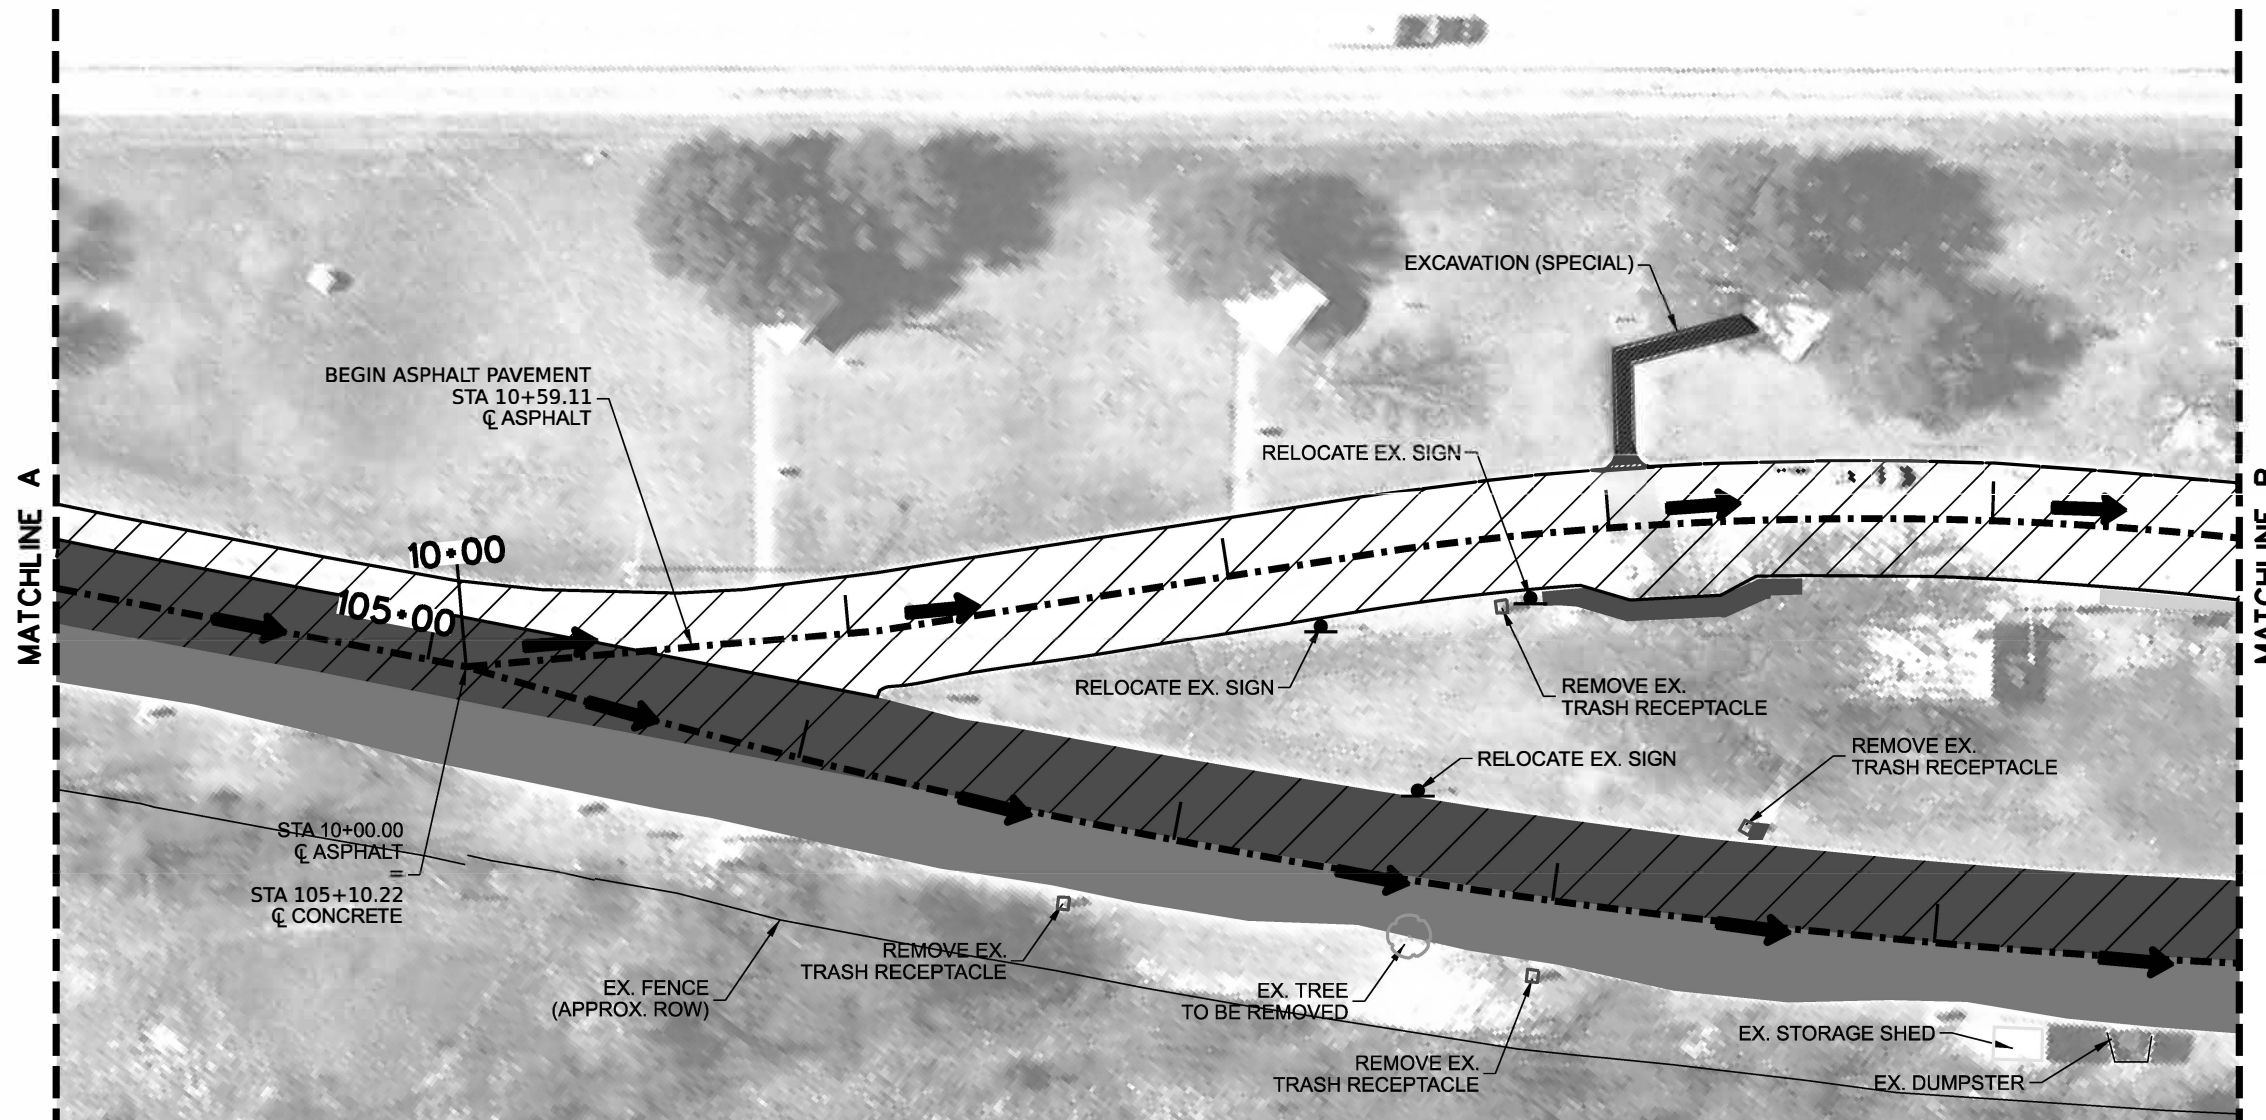

Elijah Zelenov, P.E. 5/12/23

LEGEND	
	REMOVE STAB BASE & ASPH PAV (7-12")
	REMOVE CONC (PAV) REMOVE CONC (SIDEWALKS)
	EXCAVATION ROADWAY

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0104 6001	REMOVING CONC (PAV)	SY	1,330
0104 6015	REMOVING CONC (SIDEWALKS)	SY	70
0104 6022	REMOVING CONC (CURB & GUTTER)	LF	1,270
0105 6014	REMOVING STAB BASE & ASPH PAV (7"-12")	SY	2,860
0110 6001	EXCAVATION (ROADWAY)	CY	370
0644 6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA	3
1002 6025	LANDSCAPE AMENITY (TRASH/RECYCLE BIN)	EA	4



NOTES:
 REMOVE AND REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 USE EXCAVATION SPECIAL AS NEEDED.

SHEET 2 OF 4

Texas Department of Transportation

REMOVAL LAYOUT

REVISIONS	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		24
	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO.
	0013	07	087	US 81

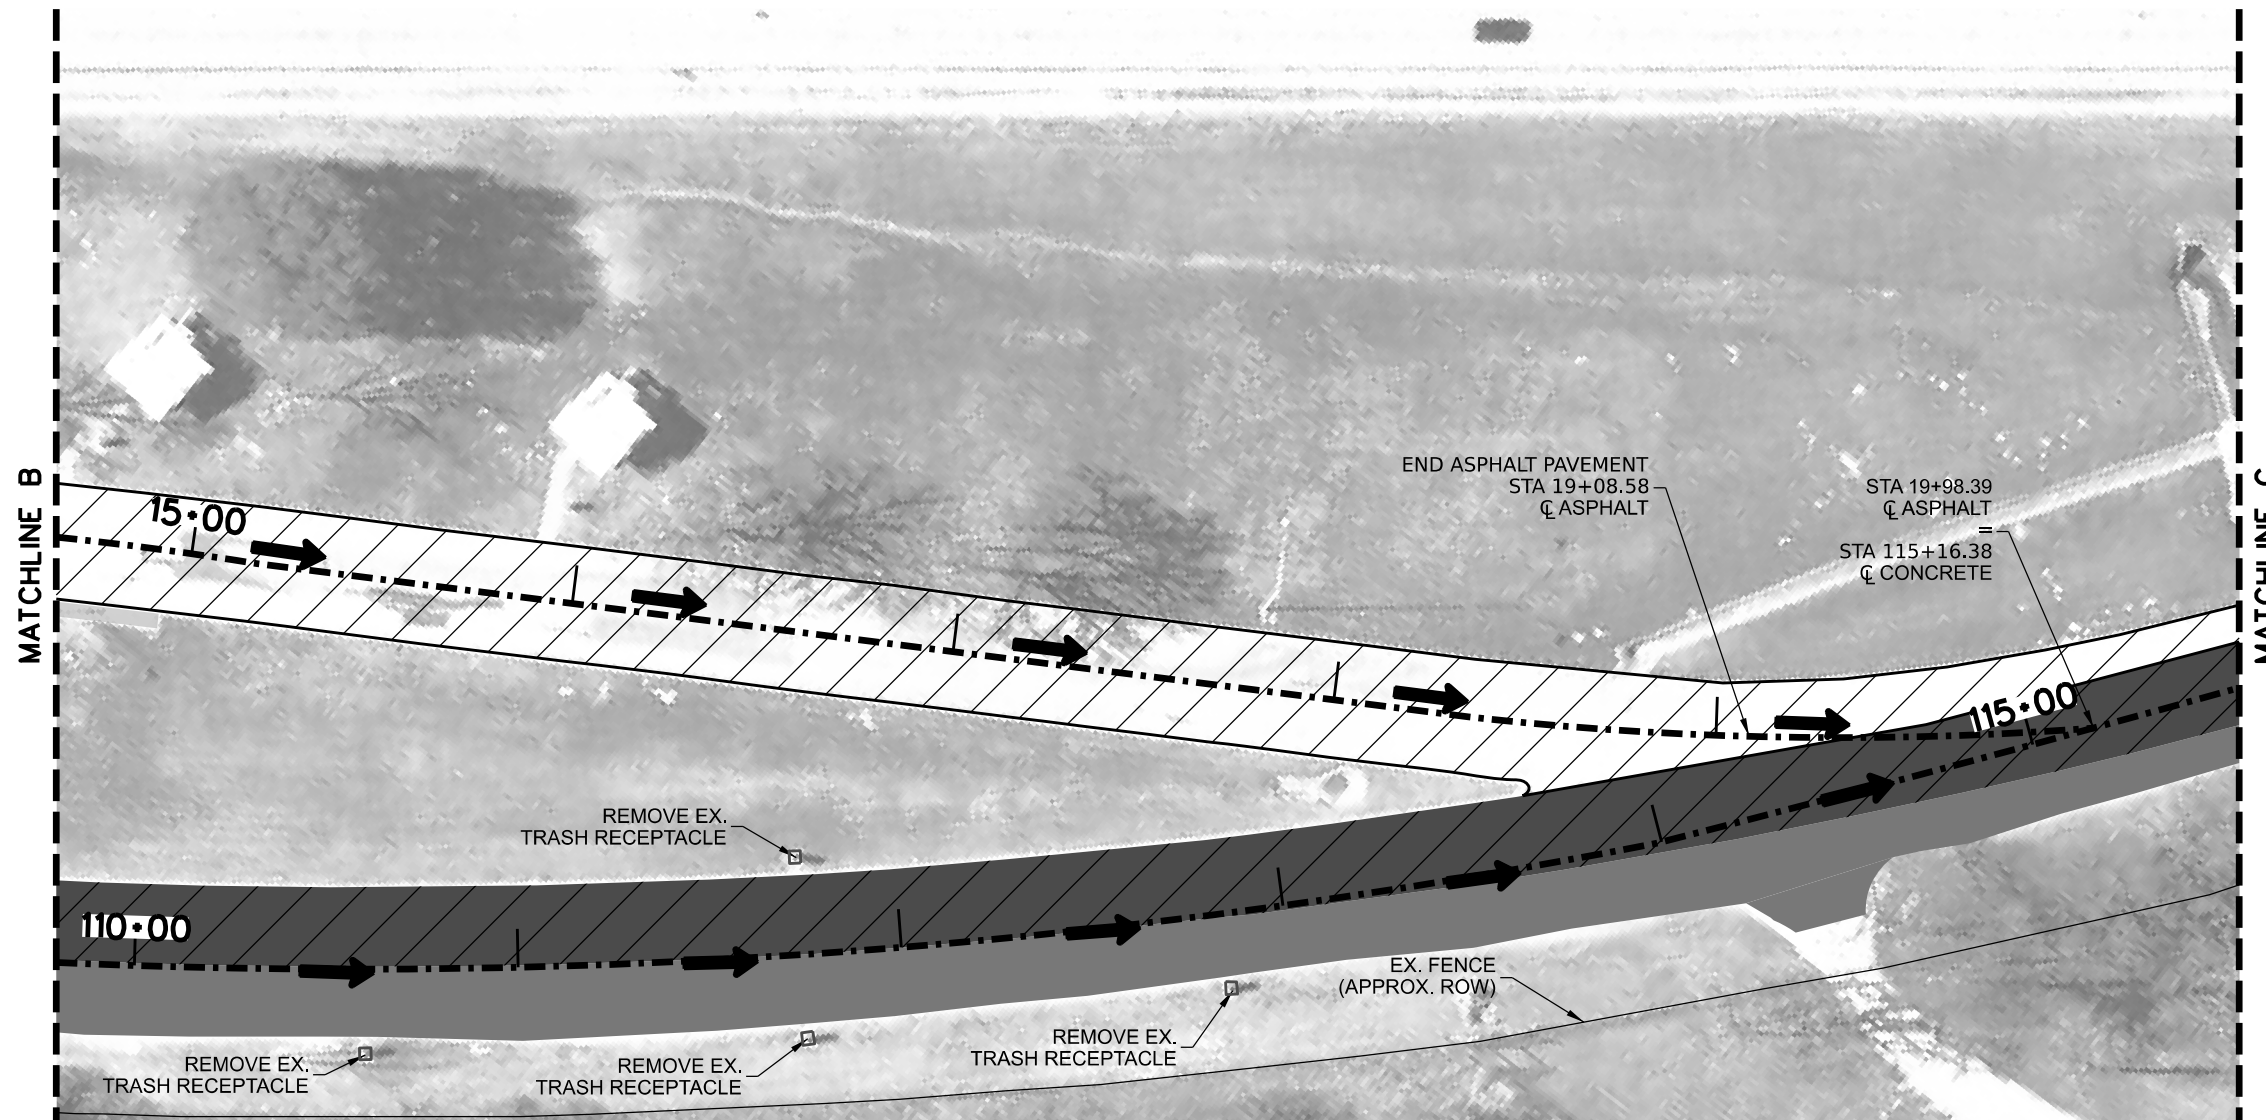

Elijah Zelenov, P.E. 5/12/23


LEGEND	
	REMOVE STAB BASE & ASPH PAV (7'-12")
	REMOVE CONC (PAV) REMOVE CONC (SIDEWALKS)
	EXCAVATION ROADWAY

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0104 6001	REMOVING CONC (PAV)	SY	1,320
0104 6015	REMOVING CONC (SIDEWALKS)	SY	0
0104 6022	REMOVING CONC (CURB & GUTTER)	LF	1,340
0105 6014	REMOVING STAB BASE & ASPH PAV (7"-12")	SY	2,965
0110 6001	EXCAVATION (ROADWAY)	CY	345
0644 6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA	0
1002 6025	LANDSCAPE AMENITY (TRASH/RECYCLE BIN)	EA	4

NOTES:
 REMOVE AND REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 USE EXCAVATION SPECIAL AS NEEDED.

SHEET 3 OF 4

REMOVAL LAYOUT			
	FED. RD. DIV. NO. 6	FEDERAL-AID PROJECT NO. SEE TITLE SHEET	
REVISIONS	STATE	DISTRICT	COUNTY
	TEXAS	FTW	WISE
	CONTROL	SECTION	JOB
	0013	07	087
			HIGHWAY NO. US 81
			SHEET NO. 25

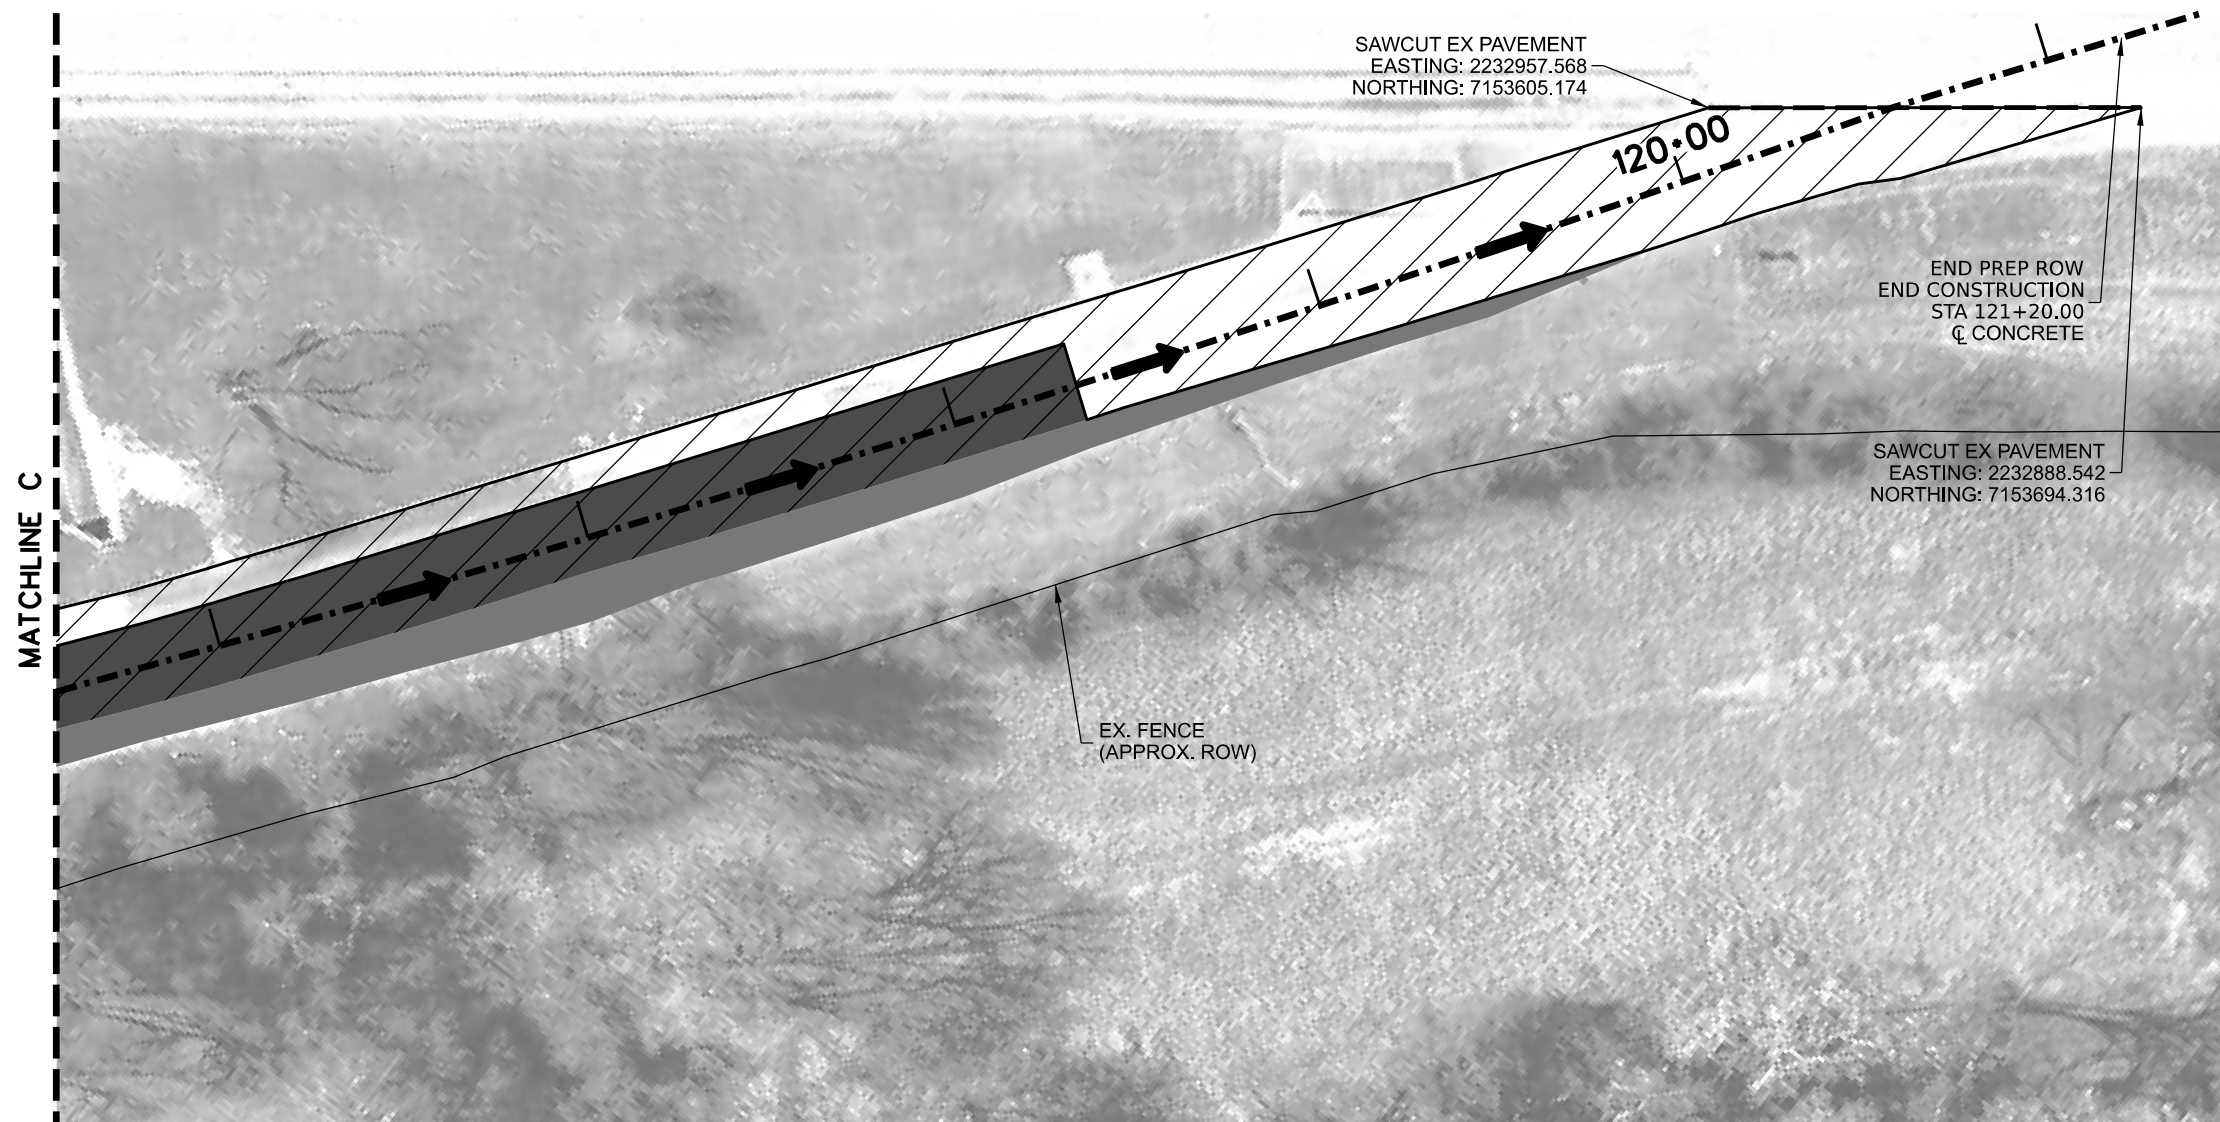


MATCHLINE C

SAWCUT EX PAVEMENT
EASTING: 2232957.568
NORTHING: 7153605.174

END PREP ROW
END CONSTRUCTION
STA 121+20.00
Q CONCRETE

SAWCUT EX PAVEMENT
EASTING: 2232888.542
NORTHING: 7153694.316

EX. FENCE
(APPROX. ROW)



Elijah Zelenov, P.E. 5/12/23



LEGEND	
	REMOVE STAB BASE & ASPH PAV (7-12")
	REMOVE CONC (PAV) REMOVE CONC (SIDEWALKS)
	EXCAVATION ROADWAY

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0104 6001	REMOVING CONC (PAV)	SY	640
0104 6015	REMOVING CONC (SIDEWALKS)	SY	0
0104 6022	REMOVING CONC (CURB & GUTTER)	LF	360
0105 6014	REMOVING STAB BASE & ASPH PAV (7"-12")	SY	1,695
0110 6001	EXCAVATION (ROADWAY)	CY	135
0644 6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA	0
1002 6025	LANDSCAPE AMENITY (TRASH/RECYCLE BIN)	EA	0

NOTES:
REMOVE AND REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
USE EXCAVATION SPECIAL AS NEEDED.

SHEET 4 OF 4

REMOVAL LAYOUT				
	FED. RD. DIV. NO. 6	FEDERAL-AID PROJECT NO. SEE TITLE SHEET		SHEET NO. 26
REVISIONS	STATE	DISTRICT	COUNTY	26
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO. US 81
	0013	07	087	

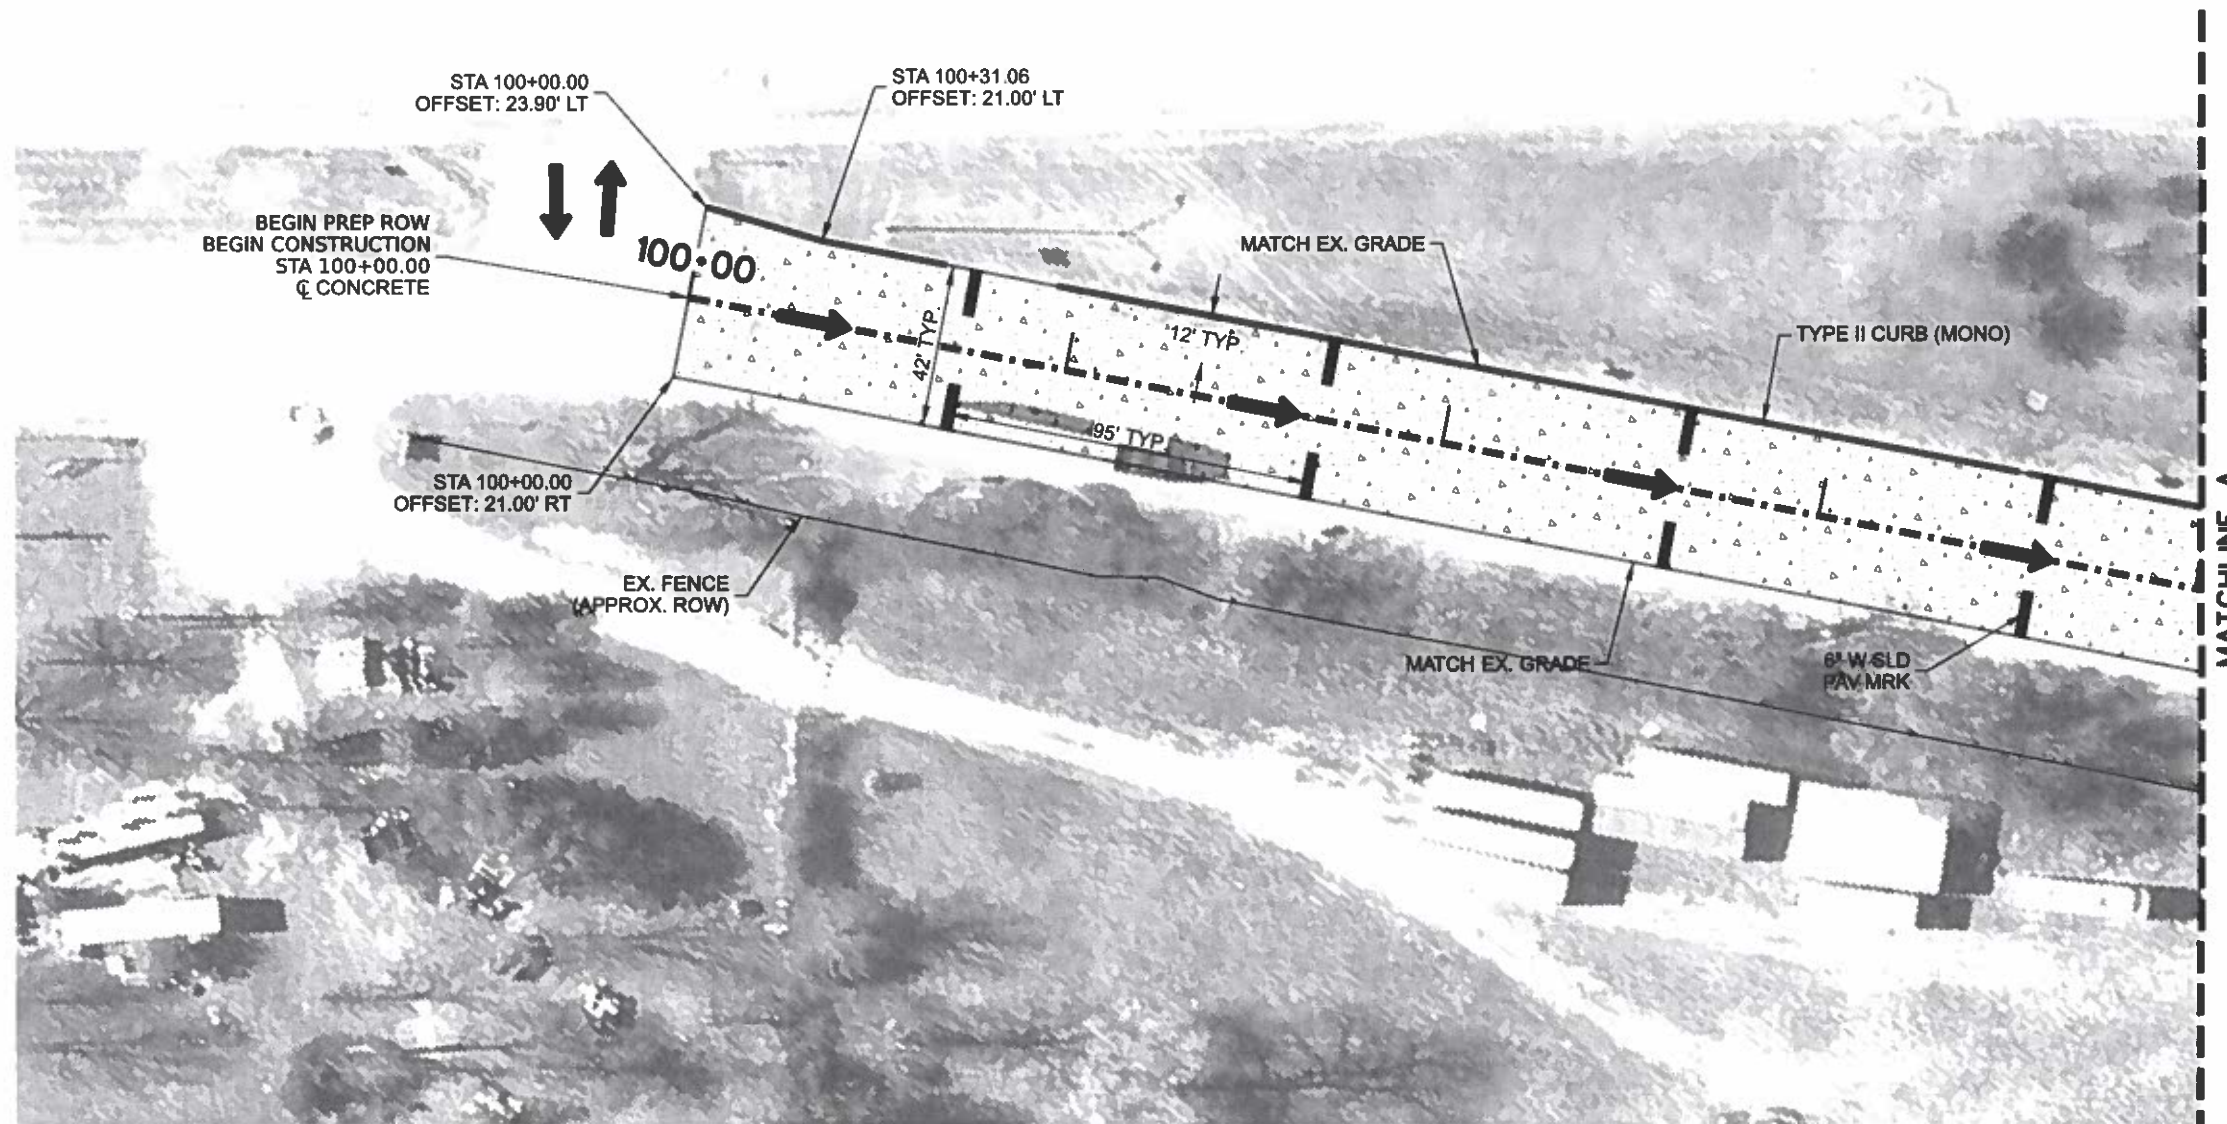

Elijah Zelenov, PE 5/12/23

LEGEND	
	D-GR HMA TY-C SAC-A PG70-28
	CONC PVMT (CONT REINF-CRCP)(8")
	CONC SIDEWALKS (4")
	TYPE II CURB (MONO)
	TYPE II CURB & GUTTER
	6" W SLD PAV MARK
	12" W SLD PAV MARK

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0134 6008	BACKFILL (TY B)	STA	5
0247 6230	FL BS (CMP IN PLACE)(TY A GR 1-2)(8")	SY	0
0260 6002	LIME (HYDRATED LIME (SLURRY))	TON	40.7
0260 6006	LIME TRT (EXT MATL)(6")	SY	0
0260 6027	LIME TRT (EXT MATL)(8")	SY	2,035
0310 6001	PRIME COAT (MULTI-OPTION)	GAL	597
0360 6002	CONC PVMT (CONT REINF-CRCP)(8")	SY	1,880
0529 6005	CONC CURB (MONO)(TY II)	LF	370
0529 6008	CONC CURB & GUTTER (TY II)	LF	0
0531 6001	CONC SIDEWALKS (4")	SY	0
0531 6005	CURB RAMPS (TY 2)	EA	0
0531 6005	CURB RAMPS (TY 7)	EA	0
0666 6041	REFL PAV MRK TY 1(W)12"(SLD)(090MIL)	LF	0
0666 6308	RE PM W/RET REQ TY 1(W)6"(SLD)(090MIL)	LF	96
3076 6001	D-GR HMA TY-B PG64-22	TON	437.8
3076 6015	D-GR HMA TY-C SAC-A PG70-28	TON	0



NOTES:
 REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 MATCH ALL EXISTING GRADES.

SHEET 1 OF 4

Texas Department of Transportation

PAVING & STRIPING LAYOUT

REVISIONS	FED RD DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		27
	STATE	DISTRICT	COUNTY	HIGHWAY NO.
	TEXAS	FTW	WISE	
CONTROL	SECTION	JOB	US 81	
	0013	07	087	

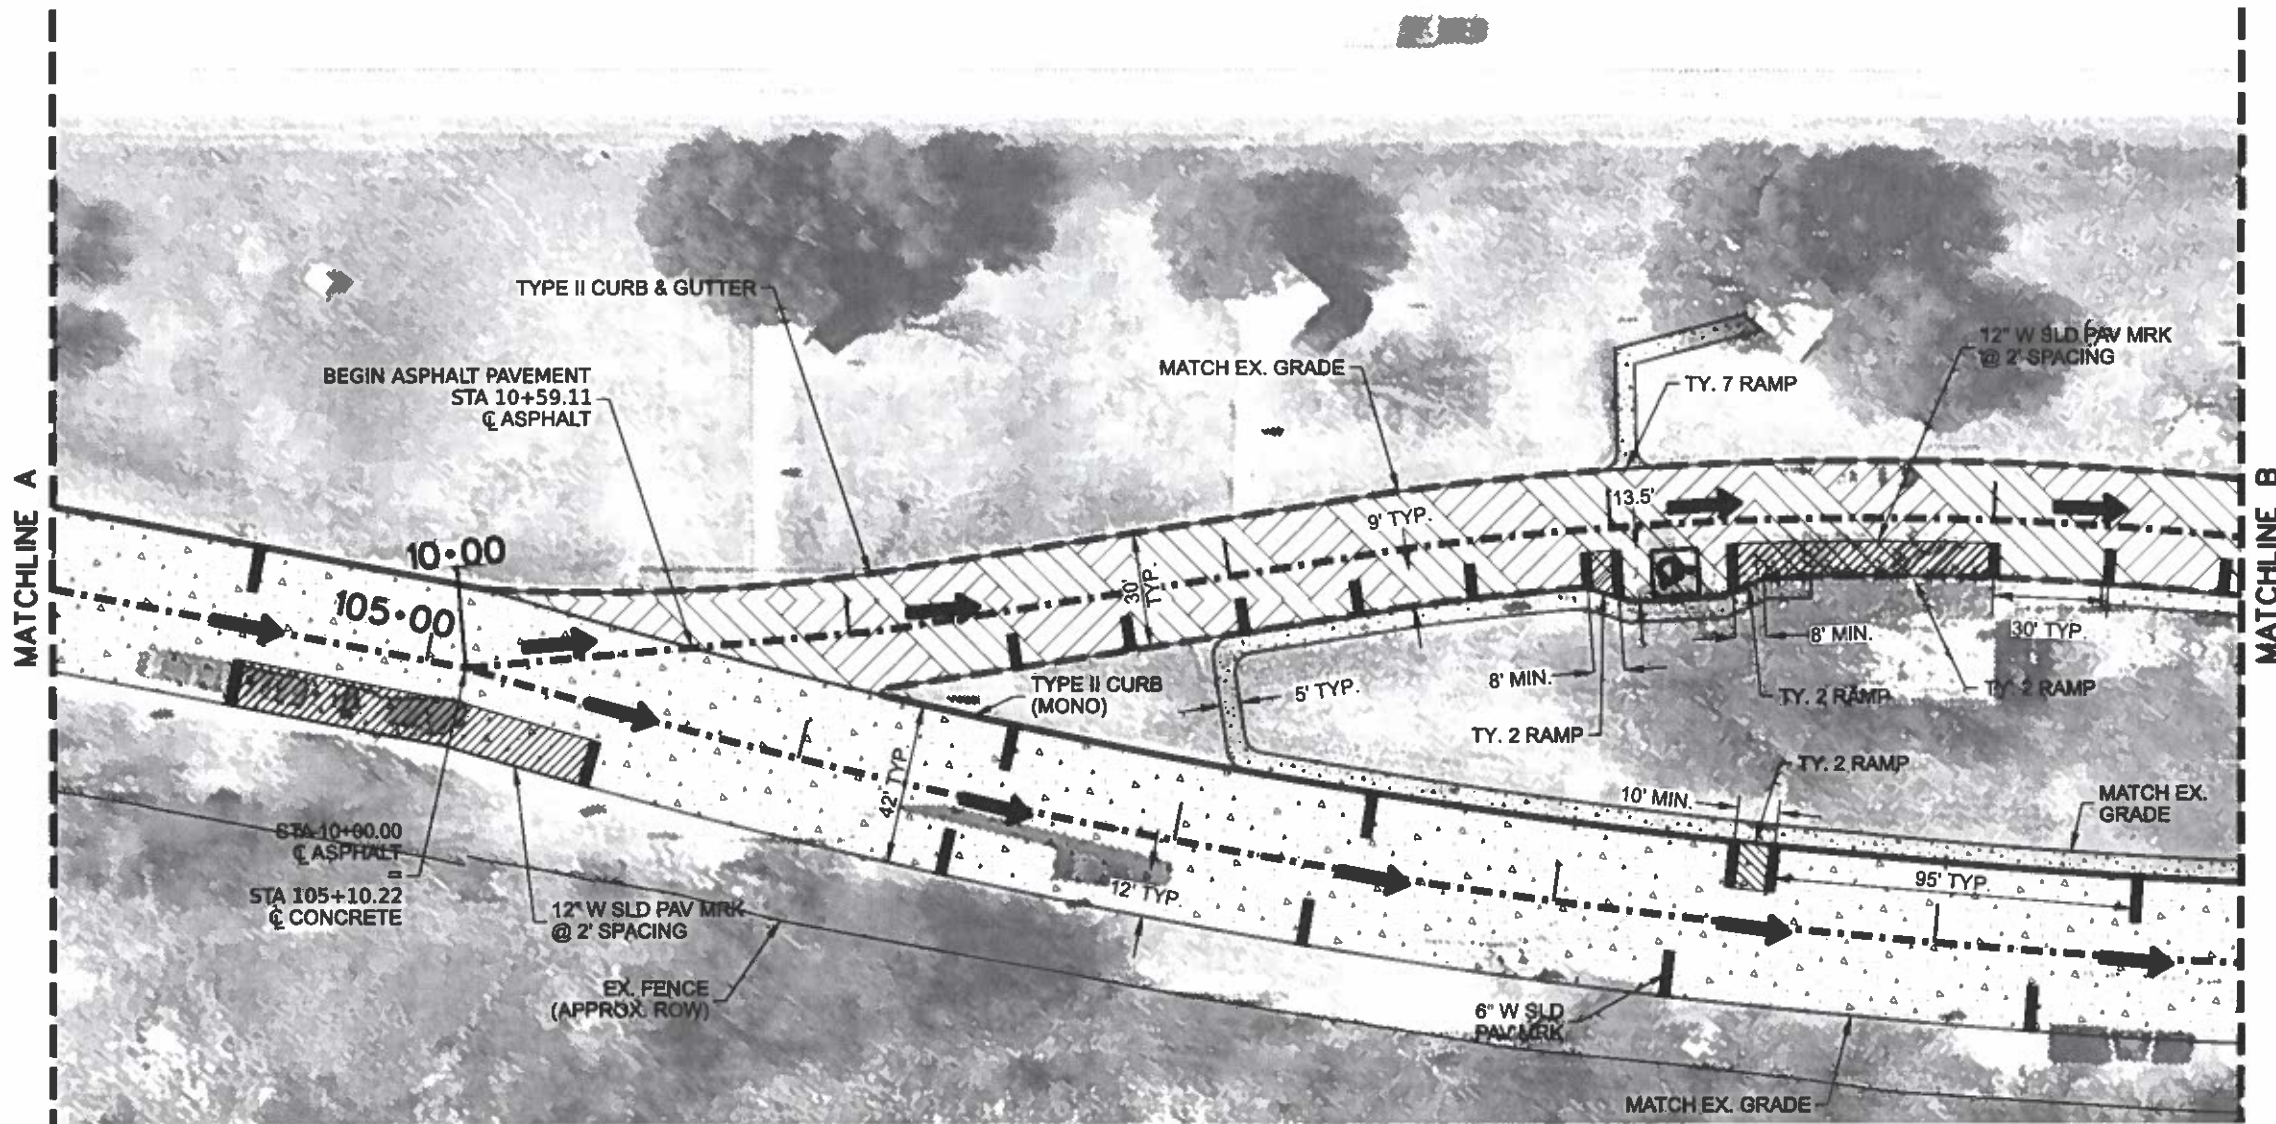

Elijah Zelenov, PE 5112/23

LEGEND	
	D-GR HMA TY-C SAC-A PG70-28
	CONC PVMT (CONT REINF-CRCP)(8")
	CONC SIDEWALKS (4")
	TYPE II CURB (MONO)
	TYPE II CURB & GUTTER
	6" W SLD PAV MARK
	12" W SLD PAV MARK

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0134 6008	BACKFILL (TY B)	STA	10
0247 6230	FL BS (CMP IN PLACE)(TY A GR 1-2)(8")	SY	1,510
0260 6002	LIME (HYDRATED LIME (SLURRY))	TON	81.9
0260 6006	LIME TRT (EXT MATL)(6")	SY	1,560
0260 6027	LIME TRT (EXT MATL)(8")	SY	2,925
0310 6001	PRIME COAT (MULTI-OPTION)	GAL	1,228.9
0360 6002	CONC PVMT (CONT REINF-CRCP)(8")	SY	2,700
0529 6005	CONC CURB (MONO)(TY II)	LF	460
0529 6008	CONC CURB & GUTTER (TY II)	LF	780
0531 6001	CONC SIDEWALKS (4")	SY	315
0531 6005	CURB RAMPS (TY 2)	EA	4
0531 6005	CURB RAMPS (TY 7)	EA	1
0666 6041	REFL PAV MRK TY 1 (W)12"(SLD)(090MIL)	LF	459
0666 6308	RE PM W/RET REQ TY 1 (W)6"(SLD)(090MIL)	LF	243
3076 6001	D-GR HMA TY-B PG64-22	TON	901.2
3076 6015	D-GR HMA TY-C SAC-A PG70-28	TON	136.4
0668 6057	RE PM TY B (ACC PRK)(BLU)(SYMBOL ONLY)	EA	1



NOTES:
 REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 MATCH ALL EXISTING GRADES.

SHEET 2 OF 4

Texas Department of Transportation

PAVING & STRIPING LAYOUT

FED RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		28
STATE	DISTRICT	COUNTY	HIGHWAY NO.
TEXAS	FTW	WISE	
CONTROL	SECTION	JOB	US 81
0013	07	087	

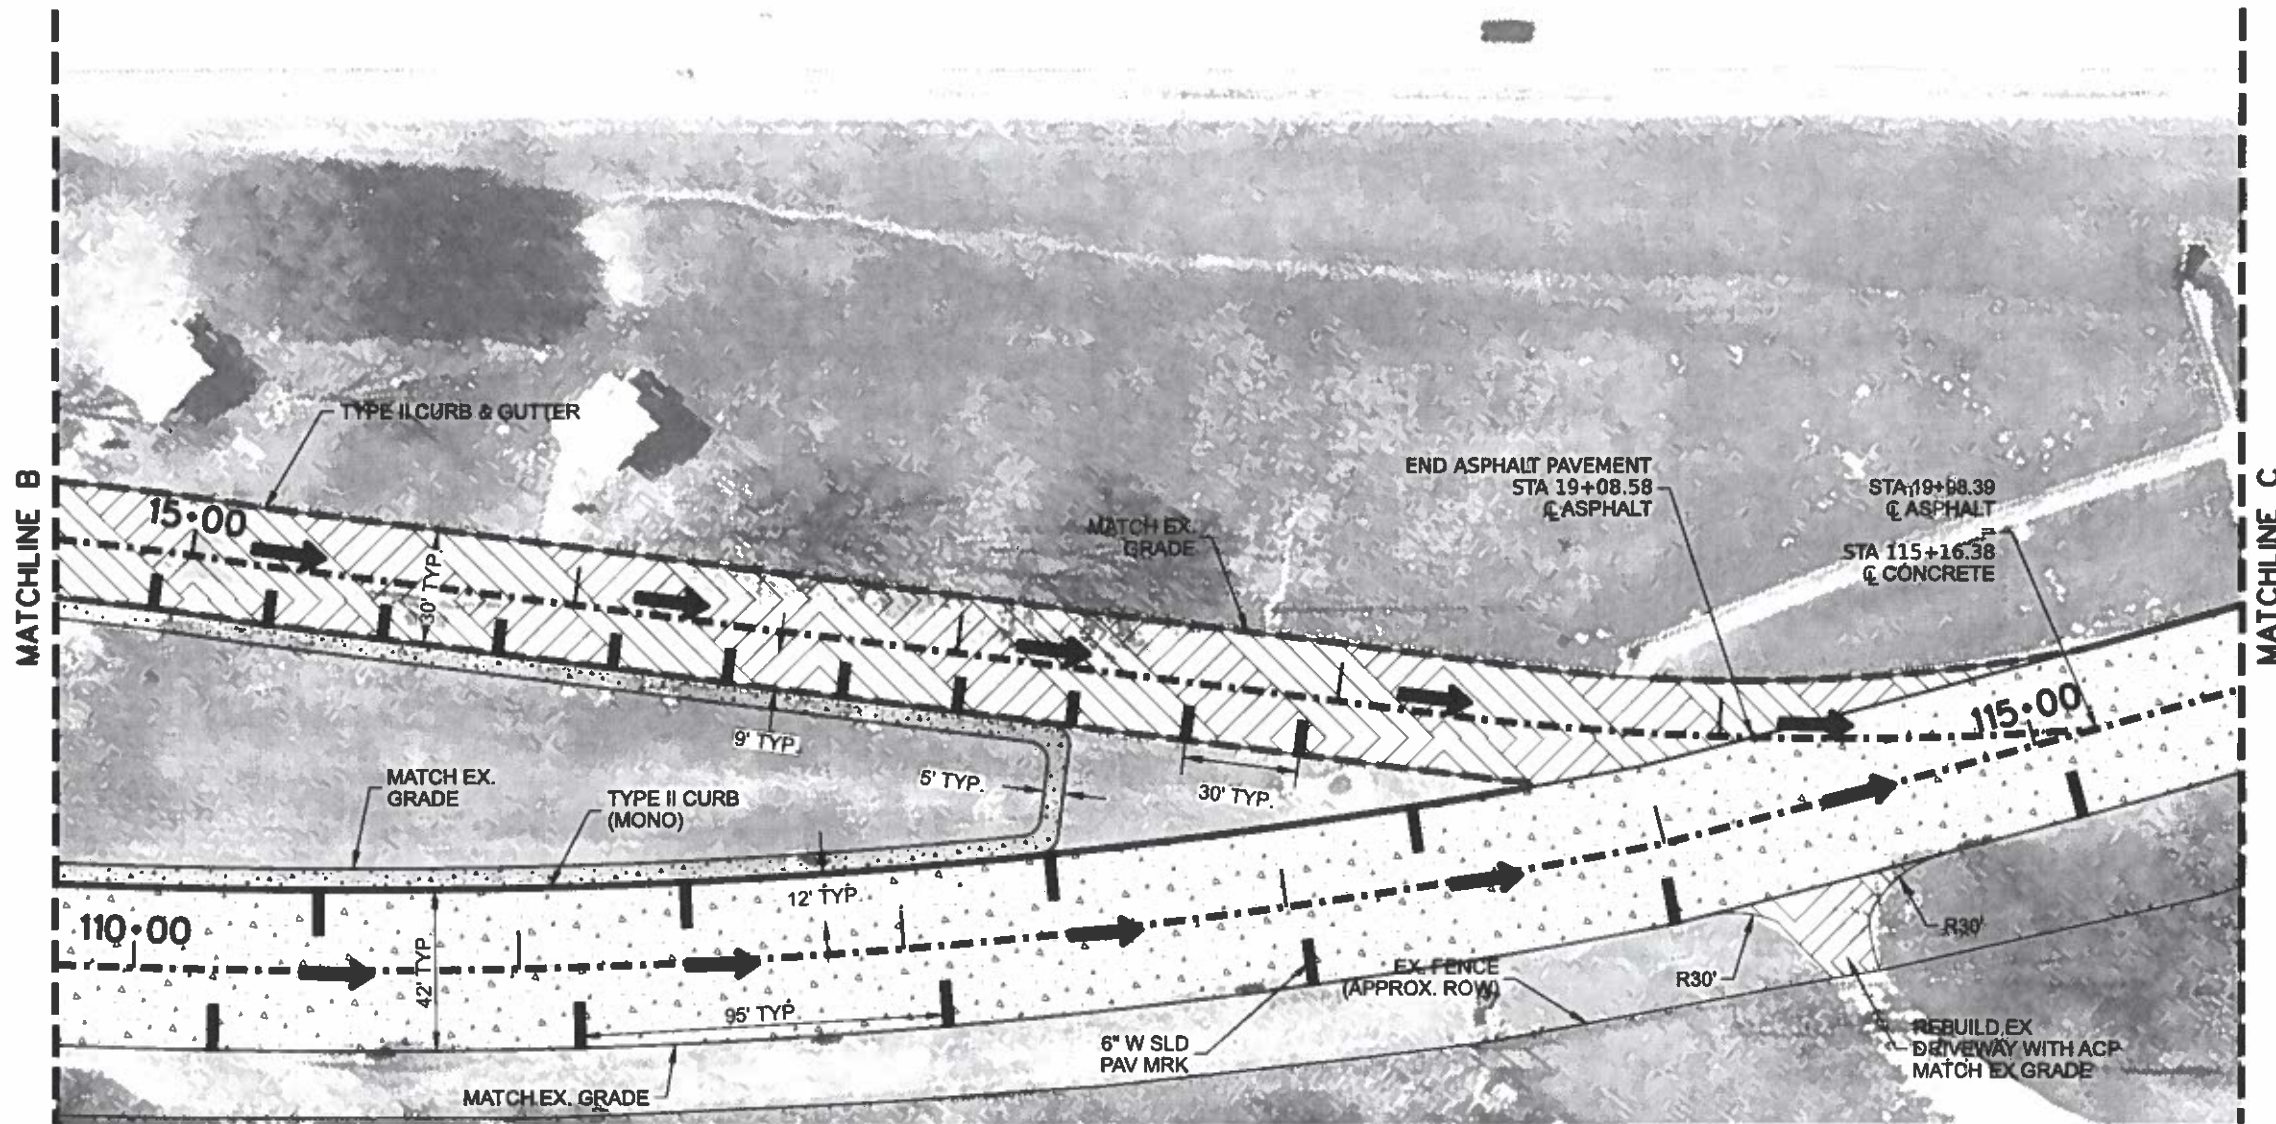

Elijah Zelenov, PE 5/11/23

LEGEND	
	D-GR HMA TY-C SAC-A PG70-28
	CONC PVMT (CONT REINF-CRCP)(8")
	CONC SIDEWALKS (4")
	TYPE II CURB (MONO)
	TYPE II CURB & GUTTER
	6" W SLD PAV MARK
	12" W SLD PAV MARK

ITEM	DESCRIPTION	UNT	SHEET TOTAL
0134 6008	BACKFILL (TY B)	STA	11
0247 6230	FL BS (CMP IN PLACE)(TY A GR 1-2)(8")	SY	1,650
0260 6002	LIME (HYDRATED LIME (SLURRY))	TON	83.7
0260 6006	LIME TRT (EXT MATL)(6")	SY	1,700
0260 6027	LIME TRT (EXT MATL)(8")	SY	2,910
0310 6001	PRIME COAT (MULTI-OPTION)	GAL	1,255.4
0360 6002	CONC PVMT (CONT REINF-CRCP)(8")	SY	2,690
0529 6005	CONC CURB (MONO)(TY II)	LF	430
0529 6008	CONC CURB & GUTTER (TY II)	LF	910
0531 6001	CONC SIDEWALKS (4")	SY	305
0531 6005	CURB RAMPS (TY 2)	EA	0
0531 6005	CURB RAMPS (TY 7)	EA	0
0666 6041	REFL PAV MRK TY 1(W)12"(SLD)(090MIL)	LF	0
0666 6308	RE PM W/RET REQ TY 1(W)6"(SLD)(090MIL)	LF	219
3076 6001	D-GR HMA TY-B PG64-22	TON	920.6
3076 6015	D-GR HMA TY-C SAC-A PG70-28	TON	147.4
0530 6005	DRIVEWAYS (ACP)	SY	65



NOTES:
 REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 MATCH ALL EXISTING GRADES.

SHEET 3 OF 4

Texas Department of Transportation

PAVING & STRIPING LAYOUT

REVISIONS	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		29
	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO.
	0013	07	087	US 81

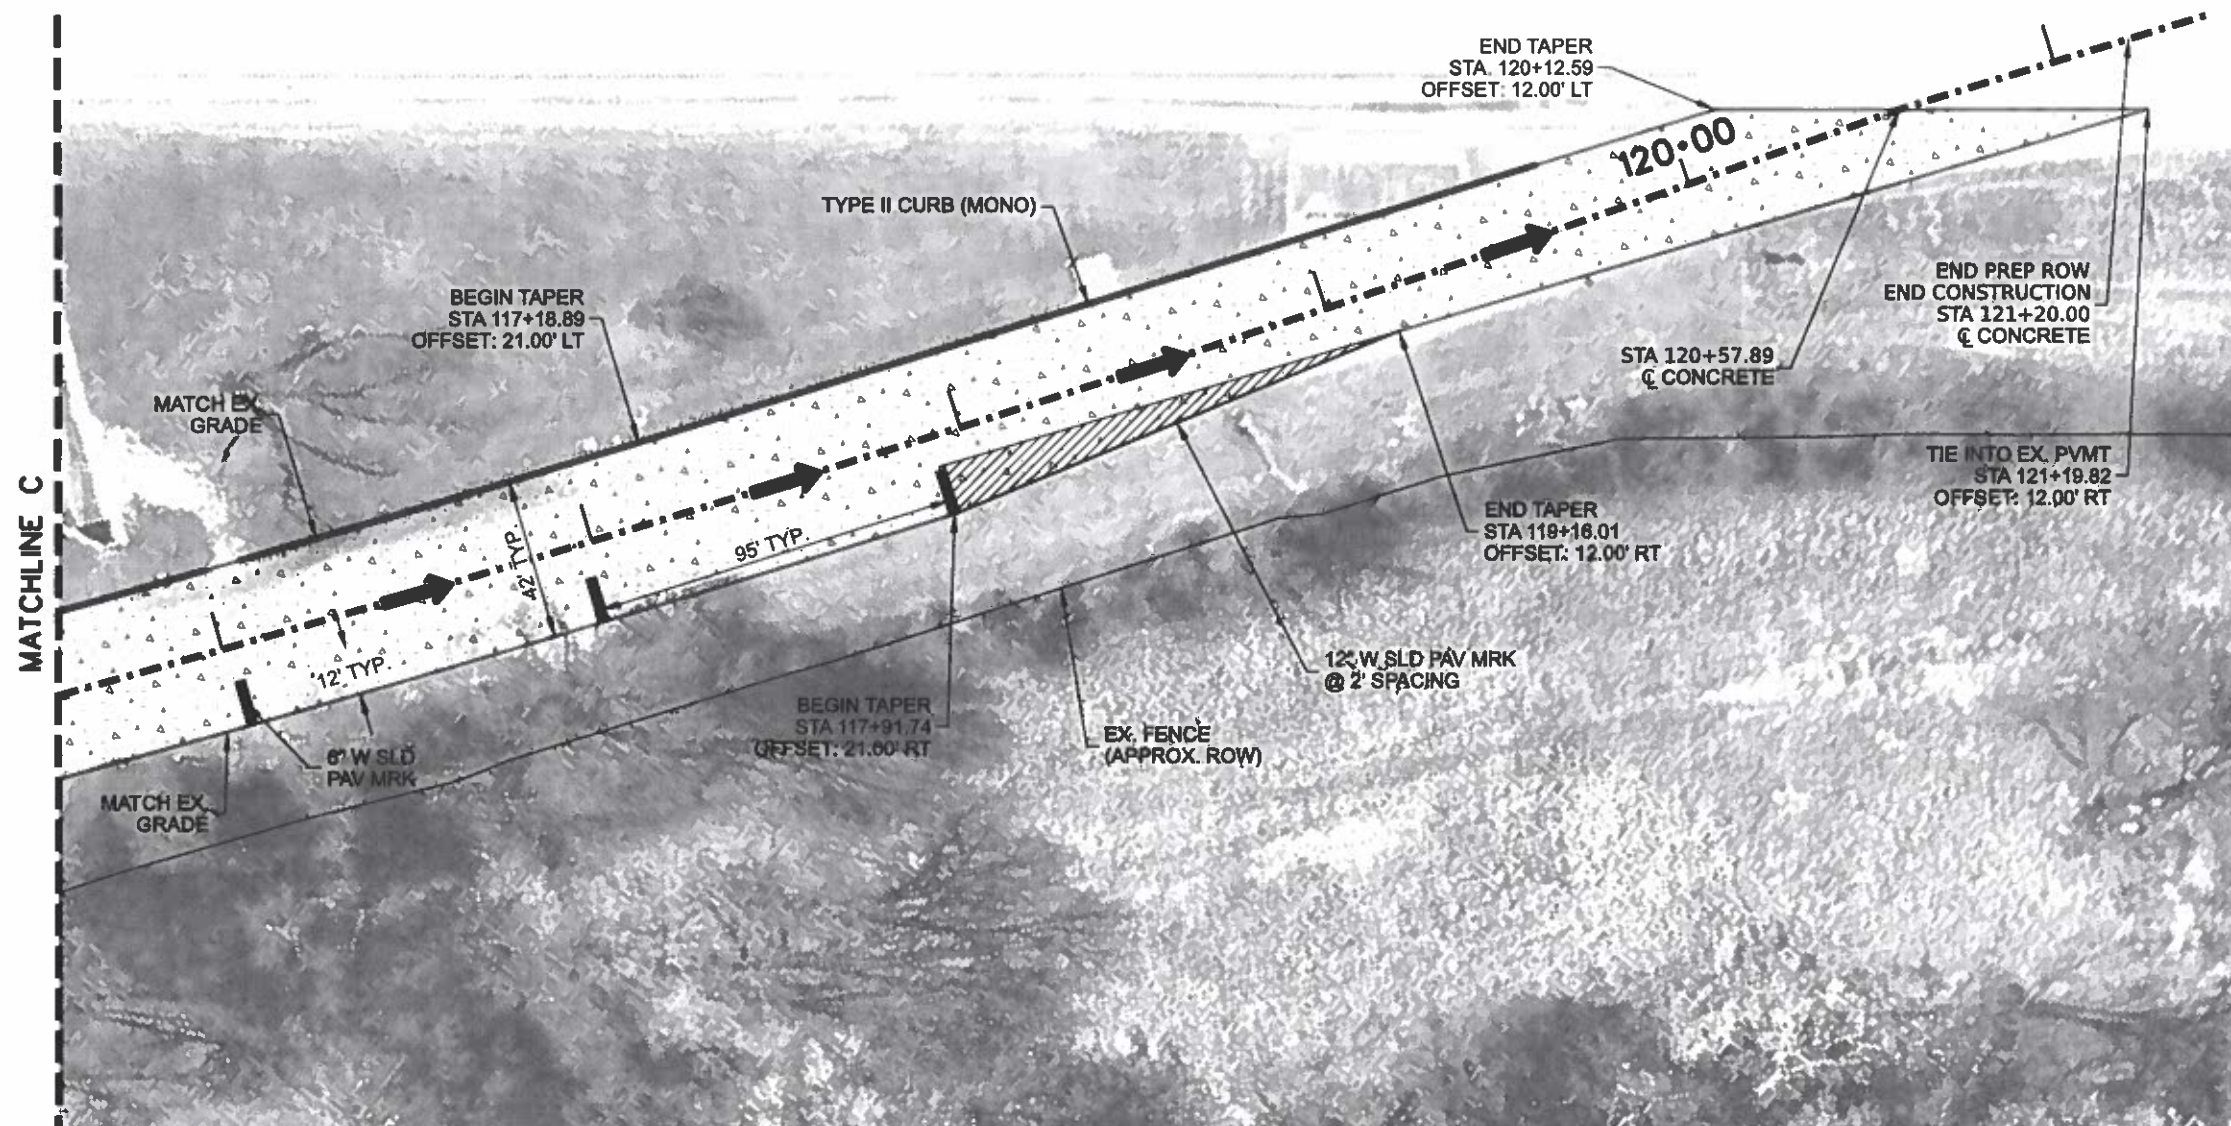

Elijah Zelenov, PE
5/12/23

LEGEND	
	D-GR HMA TY-C SAC-A PG70-28
	CONC PVMT (CONT REINF-CRCP)(8")
	CONC SIDEWALKS (4")
	TYPE II CURB (MONO)
	TYPE II CURB & GUTTER
	6" W SLD PAV MARK
	12" W SLD PAV MARK

ITEM	DESCRIPTION	UNIT	SHEET TOTAL
0134 6008	BACKFILL (TY B)	STA	6
0247 6230	FL BS (CMP IN PLACE)(TY A GR 1-2)(8")	SY	0
0260 6002	LIME (HYDRATED LIME (SLURRY))	TON	46.4
0260 6006	LIME TRT (EXT MATL)(6")	SY	0
0260 6027	LIME TRT (EXT MATL)(8")	SY	2,320
0310 6001	PRIME COAT (MULTI-OPTION)	GAL	678
0360 6002	CONC PVMT (CONT REINF-CRCP)(8")	SY	2,130
0529 6005	CONC CURB (MONO)(TY II)	LF	390
0529 6008	CONC CURB & GUTTER (TY II)	LF	0
0531 6001	CONC SIDEWALKS (4")	SY	0
0531 6005	CURB RAMPS (TY 2)	EA	0
0531 6005	CURB RAMPS (TY 7)	EA	0
0666 6041	REFL PAV MRK TY 1(W)12"(SLD)(090MIL)	LF	174
0666 6308	RE PM W/RET REQ TY 1(W)6"(SLD)(090MIL)	LF	36
3076 6001	D-GR HMA TY-B PG64-22	TON	497.2
3076 6015	D-GR HMA TY-C SAC-A PG70-28	TON	0

NOTES:
 REPLACE ALL EXISTING CURB AND GUTTER ON SITE.
 MATCH ALL EXISTING GRADES.

SHEET 4 OF 4



PAVING & STRIPING LAYOUT

REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		30
	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	HIGHWAY NO.
	0013	07	087	US 81

GENERAL NOTES



1. DETAILS FOR PAVEMENT WIDTH, PAVEMENT THICKNESS AND THE CROWN CROSS-SLOPE SHALL BE SHOWN ELSEWHERE IN THE PLANS. PAVEMENTS WIDER THAN 100 FT. WITHOUT A FREE LONGITUDINAL JOINT ARE NOT COVERED BY THIS STANDARD.
2. USE COARSE AGGREGATES WITH A RATED COEFFICIENT OF THERMAL EXPANSION (C_{OTE}) OF NOT MORE THAN 5.5×10^{-6} IN./IN./°F AS LISTED IN THE CONCRETE RATED SOURCE QUALITY CATALOG (CRSQC).
3. ALL THE REINFORCING STEEL AND TIE BARS SHALL BE DEFORMED STEEL BARS CONFORMING TO ASTM A 615 (GRADE 60) OR ASTM A 996 (GRADE 60) OR ABOVE. STEEL BAR SIZES AND SPACINGS SHALL CONFORM TO TABLE NO.1 AND TABLE NO.2.
4. STEEL BAR PLACEMENT TOLERANCE SHALL BE ± 1 IN. HORIZONTALLY AND ± 0.5 IN. VERTICALLY. CALCULATED AVERAGE BAR SPACING (CONCRETE PLACEMENT WIDTH / NUMBER OF LONGITUDINAL BARS) SHALL CONFORM TO TABLE NO.1
5. PAVEMENT WIDTHS OF MORE THAN 15 FT. SHALL HAVE A LONGITUDINAL JOINT (SECTION Z-Z OR SECTION Y-Y). THESE JOINTS SHALL BE LOCATED WITHIN 6 IN. OF THE LANE LINE UNLESS THE JOINT LOCATION IS SHOWN ELSEWHERE ON THE PLANS.
6. THE SAW CUT DEPTH FOR THE LONGITUDINAL CONTRACTION JOINT (SECTION Z-Z) SHALL BE ONE THIRD OF THE SLAB THICKNESS ($T/3$).
7. WHEN TYING CONCRETE GUTTER AT A LONGITUDINAL JOINT, THE TIE BAR LENGTH OR POSITION MAY BE ADJUSTED. PROVIDE 3 IN. OF CONCRETE COVER FROM THE BACK OF GUTTER TO THE END OF TIE BAR.
8. REPLACE MISSING OR DAMAGED TIE BARS WITHOUT ADDITIONAL COMPENSATION BY DRILLING MIN. 10 IN. DEEP AND GROUTING TIE BARS WITH TYPE III, CLASS C EPOXY. MEET THE PULL-OUT TEST REQUIREMENTS IN ITEM 361.
9. OMIT TIE BARS LOCATED WITHIN 18-IN. OF THE TRANSVERSE CONSTRUCTION JOINTS (SECTION X-X). USE HAND-OPERATED IMMERSION VIBRATORS TO CONSOLIDATE THE CONCRETE ADJACENT TO ALL FORMED JOINTS.
10. LONGITUDINAL REINFORCING STEEL SPLICES SHALL BE A MINIMUM OF 25 IN. STAGGER THE LAP LOCATIONS SO THAT NO MORE THAN 1/3 OF THE LONGITUDINAL STEEL IS SPLICED IN ANY GIVEN 12-FT. WIDTH AND 2-FT. LENGTH OF THE PAVEMENT.
11. THE DETAIL FOR THE JOINT SEALANT AND RESERVOIR IS SHOWN ON STANDARD SHEET "CONCRETE PAVING DETAILS, JOINT SEALS."

TABLE NO.1 LONGITUDINAL STEEL


SLAB THICKNESS AND BAR SIZE		REGULAR STEEL BARS	FIRST SPACING AT EDGE OR JOINT	ADDITIONAL STEEL BARS AT TRANSVERSE CONSTRUCTION JOINT (SECTION X-X)	
T (IN.)	BAR SIZE	SPACING C (IN.)	SPACING a (IN.)	SPACING 2 x c (IN.)	LENGTH L (IN.)
7.0	#5	6.5	3 TO 4	13	50
7.5	#5	6.0	3 TO 4	12	50
8.0	#6	9.0	3 TO 4	18	50
8.5	#6	8.5	3 TO 4	17	50
9.0	#6	8.0	3 TO 4	16	50
9.5	#6	7.5	3 TO 4	15	50
10.0	#6	7.0	3 TO 4	14	50
10.5	#6	6.75	3 TO 4	13.5	50
11.0	#6	6.5	3 TO 4	13	50
11.5	#6	6.25	3 TO 4	12.5	50
12.0	#6	6.0	3 TO 4	12	50
12.5	#6	5.75	3 TO 4	11.5	50
13.0	#6	5.5	3 TO 4	11	50

TABLE NO.2 TRANSVERSE STEEL AND TIE BARS


SLAB THICKNESS (IN.)	TRANSVERSE STEEL		TIE BARS AT LONGITUDINAL CONTRACTION JOINT (SECTION Z-Z)		TIE BARS AT LONGITUDINAL CONTRACTION JOINT (SECTION Y-Y)	
	BAR SIZE	SPACING (IN.)	BAR SIZE	SPACING (IN.)	BAR SIZE	SPACING (IN.)
7.0 - 7.5	#5	48	#5	48	#5	24
8.0 - 13.0	#5	48	#6	48	#6	24

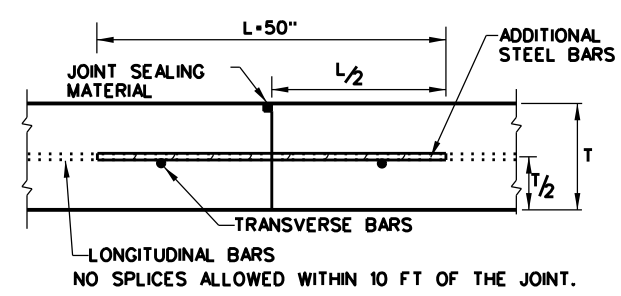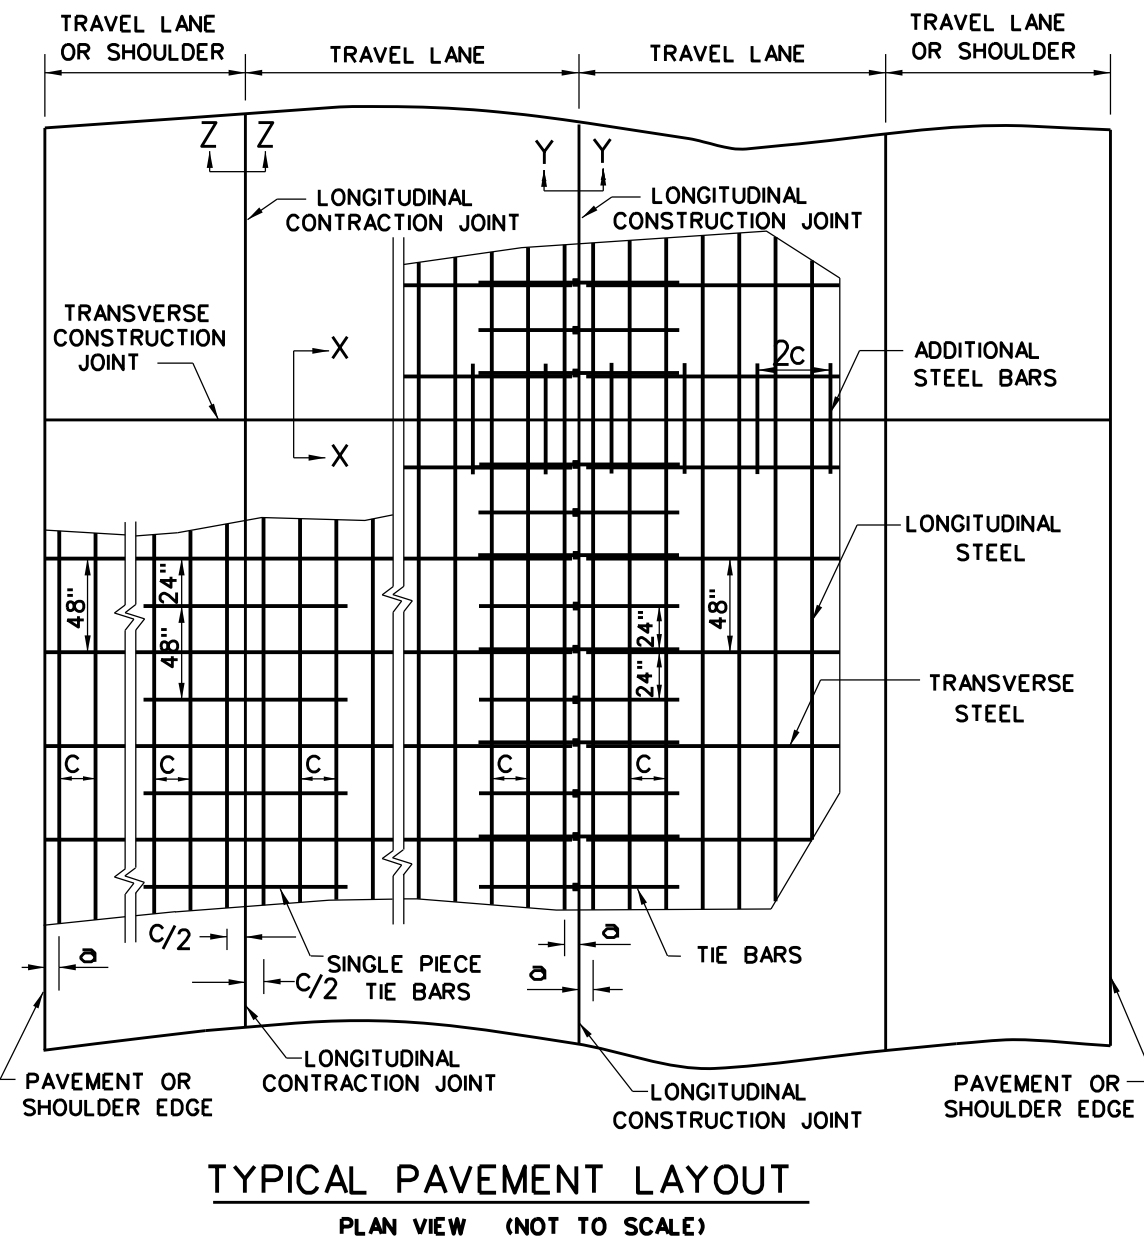

TRANSVERSE CONSTRUCTION JOINT SECTION X - X

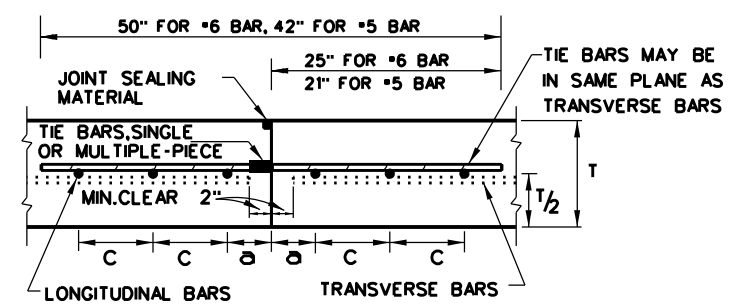

LONGITUDINAL CONSTRUCTION JOINT SECTION Y - Y

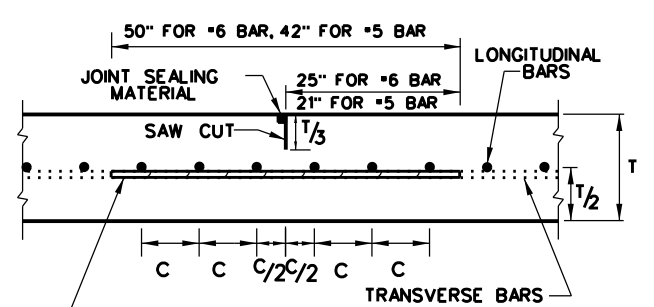

LONGITUDINAL CONTRACTION JOINT SECTION Z - Z

CONTINUOUSLY REINFORCED CONCRETE PAVEMENT
ONE LAYER STEEL BAR PLACEMENT
T - 7 to 13 INCHES
CRCP(1)-20


FILE: crcp120.dgn		DN: TxDOT	CK: KM	DW: AN	CK: VP
© TxDOT: APRIL 2020		CONT	SECT	JOB	HIGHWAY
REVISIONS		0013	07	087	US 81
10/10/2011 ADD CN #12		DIST	COUNTY		SHEET NO.
04/09/2013 REMOVE 6" AND 6.5" ADD CTE REQUIREMENTS		FTW	WISE		31
05/05/2017 CoTE AS RATED 4.3					

Design Division Standard


DATE: 5/10/2023 4:08:59 PM
 FILE: T:\DIS\M\T_SRA DESIGN\Wise County\PS&E\031-032 CRCP(1)-20.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 5/10/2023 4:09:00 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCGN\031-032 CRCP(1)-20.dgn

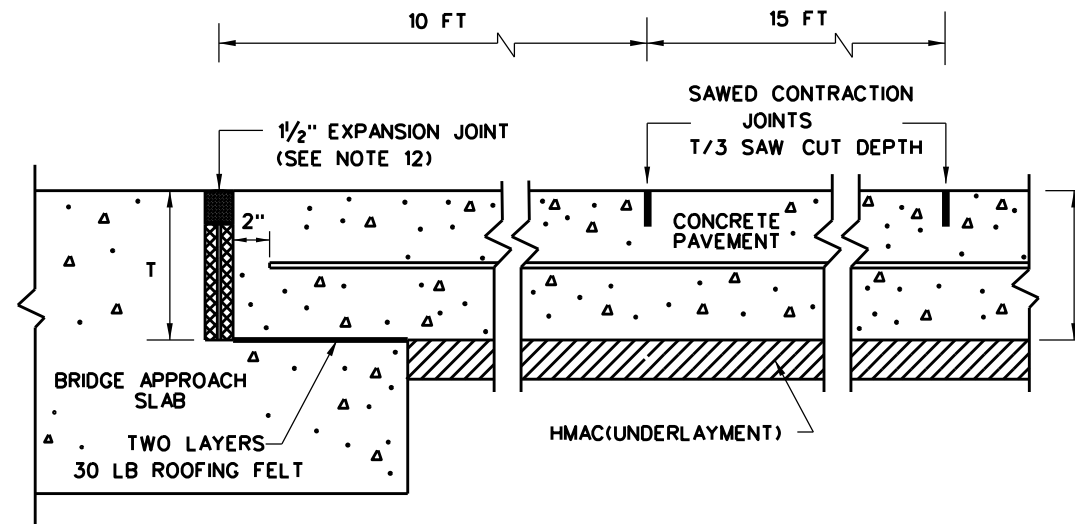

**TRANSVERSE EXPANSION JOINT DETAIL
AT BRIDGE APPROACH**

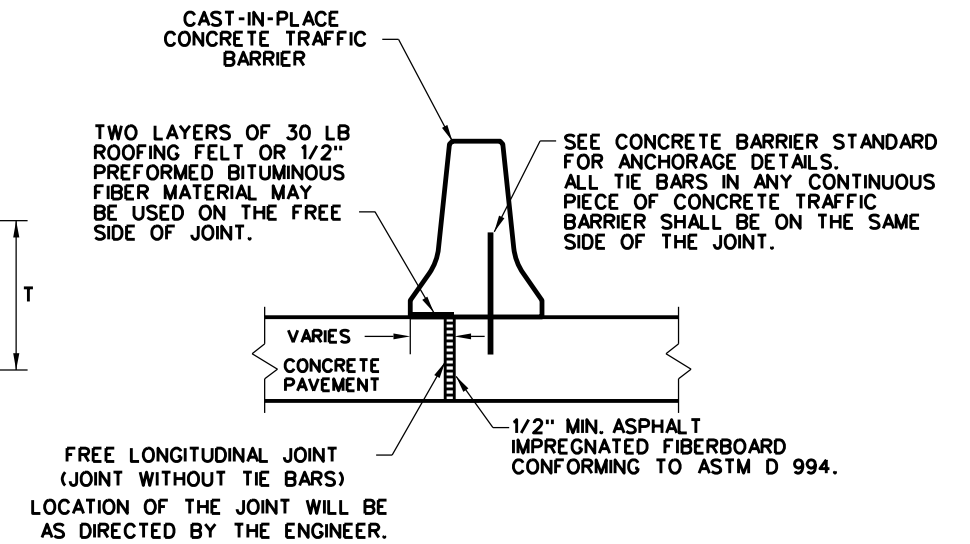


FREE LONGITUDINAL JOINT DETAIL

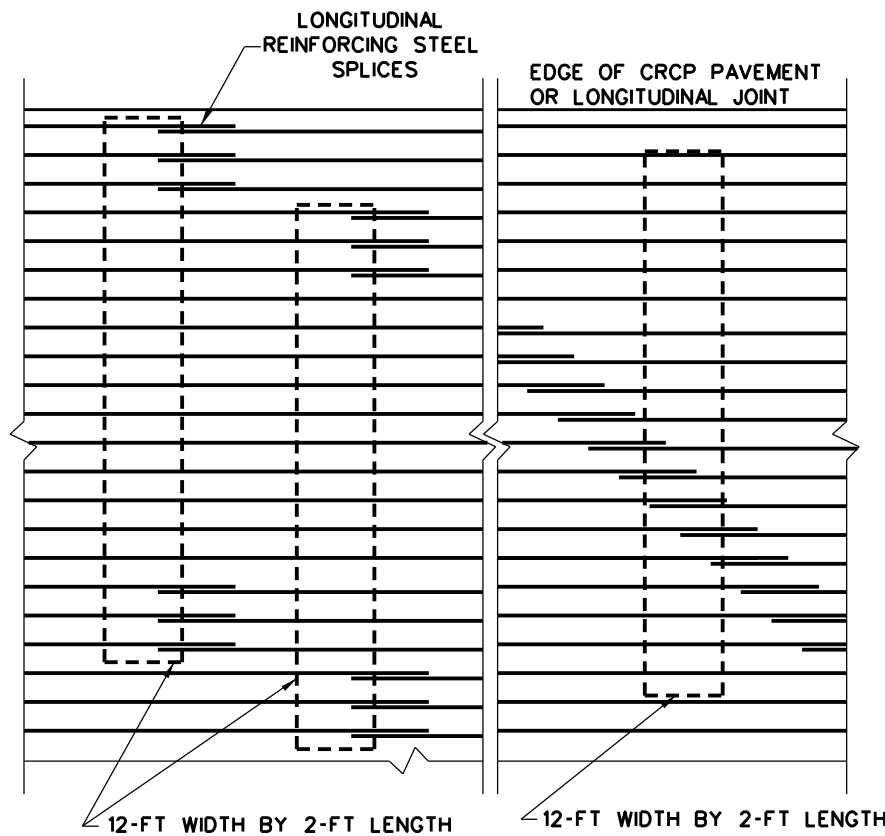


STAGGER THE LAP LOCATIONS SO THAT NO MORE THAN 1/3 OF THE LONGITUDINAL STEEL IS SPLICED IN ANY GIVEN 12-FT. WIDTH AND 2-FT. LENGTH OF THE PAVEMENT. ANY OTHER LAP CONFIGURATION MEETING THIS REQUIREMENT WILL BE ALLOWED.

**EXAMPLES OF LAP CONFIGURATION
PLAN VIEW (NOT TO SCALE)**

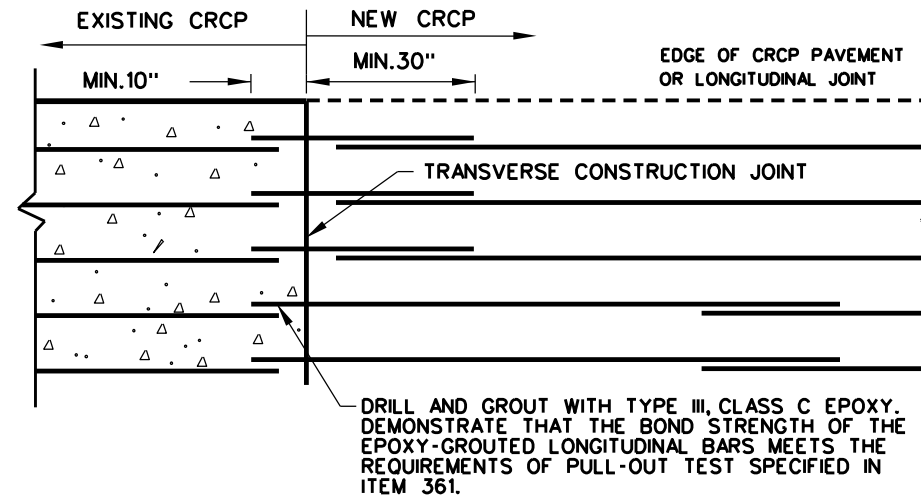


**OPTION A: DRILL AND EPOXY
PLAN VIEW (NOT TO SCALE)**

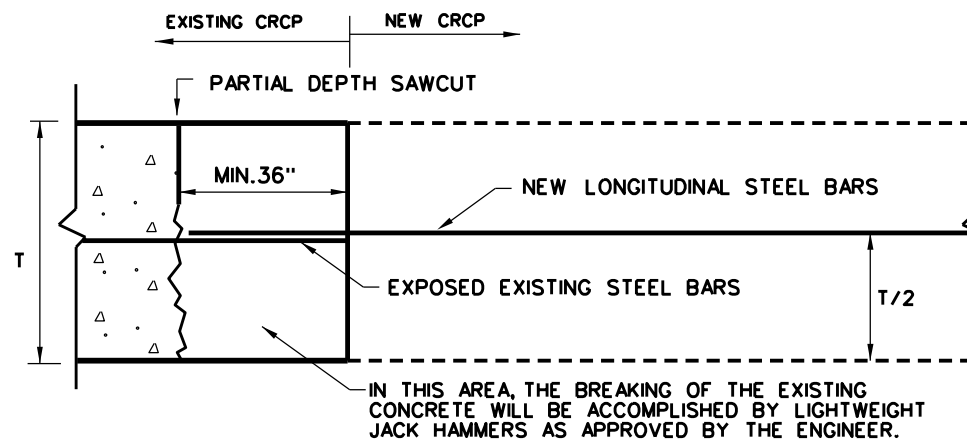

OPTION B: BREAKBACK AND LAP

**TRANSVERSE TIE JOINT DETAIL
EXISTING CRCP TO NEW CRCP**

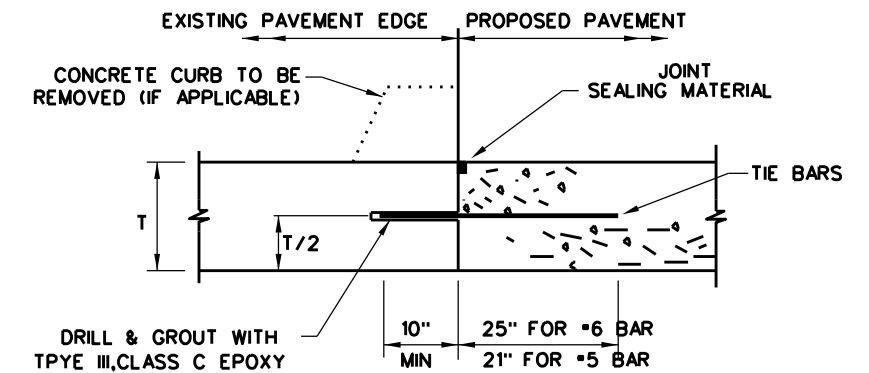

- BEFORE WIDENING WORK, DEMONSTRATE THAT THE BOND STRENGTH OF THE EPOXY-GROUTED TIE BARS MEETS THE REQUIREMENTS OF PULL-OUT TEST SPECIFIED IN ITEM 361.
- SPACE TIE BARS AT 24" SPACING. USE #6 TIE BARS FOR 8" AND THICKER SLABS, USE #5 TIE BARS FOR LESS THAN 8" THICK SLABS.

LONGITUDINAL WIDENING JOINT DETAIL

SHEET 2 OF 2




**CONTINUOUSLY REINFORCED
CONCRETE PAVEMENT
ONE LAYER STEEL BAR PLACEMENT
T - 7 to 13 INCHES
CRCP(1)-20**


FILE: crcp120.dgn	DN: TxDOT	CK: KM	DW: AN	CK: VP
© TxDOT: APRIL 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
03/16/2020 REMOVED TABLE 1A	DIST	COUNTY		SHEET NO.
	FTW	WISE		32

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


DATE: 5/10/2023
 FILE: T:\DISH\MINT_SRA DESIGN\Wise County\PS&E\DCN\033 TRANS-20.dgn

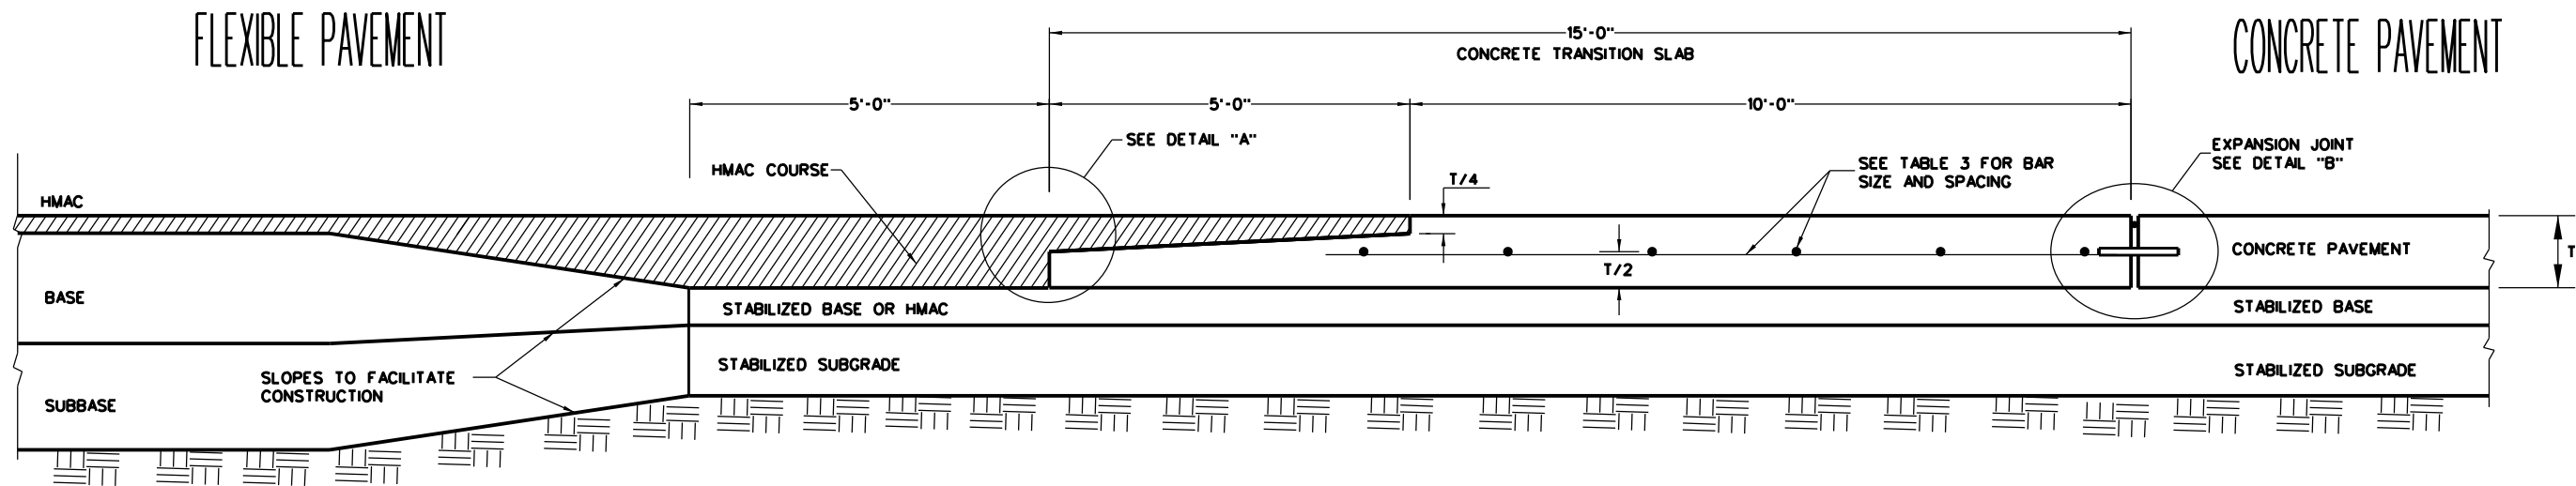

TYPICAL JUNCTION OF CONCRETE PAVEMENT WITH FLEXIBLE PAVEMENT
 (NOT TO SCALE)

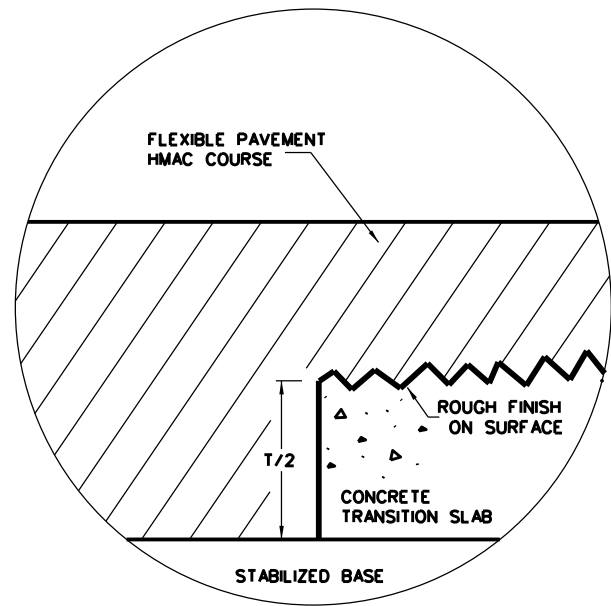

DETAIL "A"

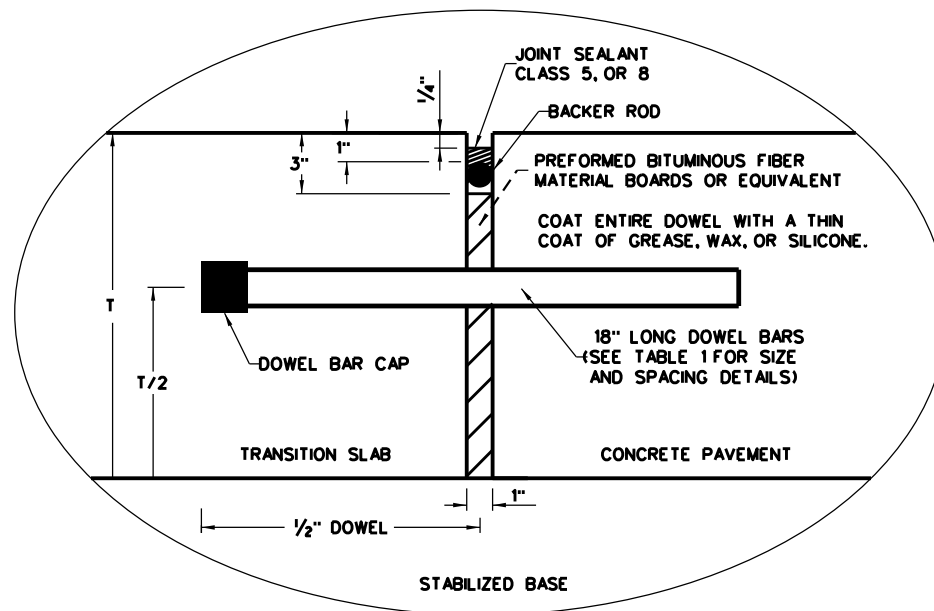

DETAIL "B"

GENERAL NOTES

1. FOR FURTHER INFORMATION REGARDING THE PLACEMENT OF CONCRETE AND LOAD TRANSFER DEVICES REFER TO THE GOVERNING SPECIFICATIONS FOR "CONCRETE PAVEMENT" AND "REINFORCING STEEL."
2. DETAILS FOR PAVEMENT WIDTH AND THE CROWN CROSS-SLOPE SHALL BE SHOWN ELSEWHERE IN THE PLANS.
3. MATCH THE LONGITUDINAL JOINTS OF THE CONCRETE TRANSITION SLAB WITH ADJOINING CONCRETE PAVEMENT. PROVIDE EQUIVALENT TIEBARS OR TRANSVERSE BARS AT THESE LONGITUDINAL JOINTS, SEE TABLE NO. 2.
4. REFER TO DMS-6310, "JOINT SEALANTS AND FILLERS" FOR THE CLASSIFICATIONS.
5. TRANSITION SLABS WILL BE PAID UNDER ITEM 360, "CONCRETE PAVEMENTS."

TABLE NO.1 DOWELS (SMOOTH BARS)		
SLAB THICKNESS T (IN.)	BAR DIA. AND LENGTH	SPACING (IN.)
7 TO 7.5	1" X 18"	12
8 TO 10	1 1/4" X 18"	12
10 TO 13	1 1/2" X 18"	12

TABLE NO.2 TIE BARS (DEFORMED BARS)		
SLAB THICKNESS T (IN.)	BAR SIZE	SPACING (IN.)
7 TO 7.5	#5	24
8 TO 13	#6	24

TABLE NO.3 TRANSITION SLAB STEEL (DEFORMED BARS)			
SLAB THICKNESS T (IN.)	BAR SIZE	SPACING (IN.) TRANSVERSE DIRECTION	SPACING (IN.) LONGITUDINAL DIRECTION
7 TO 7.5	#5	24	12
8 TO 13	#6	24	12

ADJUST SPACING OF LONGITUDINAL BARS AS NEEDED TO ACCOMDATE DOWEL BAR SPACING.

Texas Department of Transportation
 Design Division Standard












CONCRETE PAVEMENT DETAILS
TRANSITION SLAB
T-7 to 13 INCHES

TRANS-20

FILE: transitslab20.dgn	DN: TxDOT	DN: TxDOT	DW: AN	CK: KM
© TxDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
	DIST	COUNTY	SHEET NO.	
	FTW	WISE	33	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\034-037 PED-18.dgn

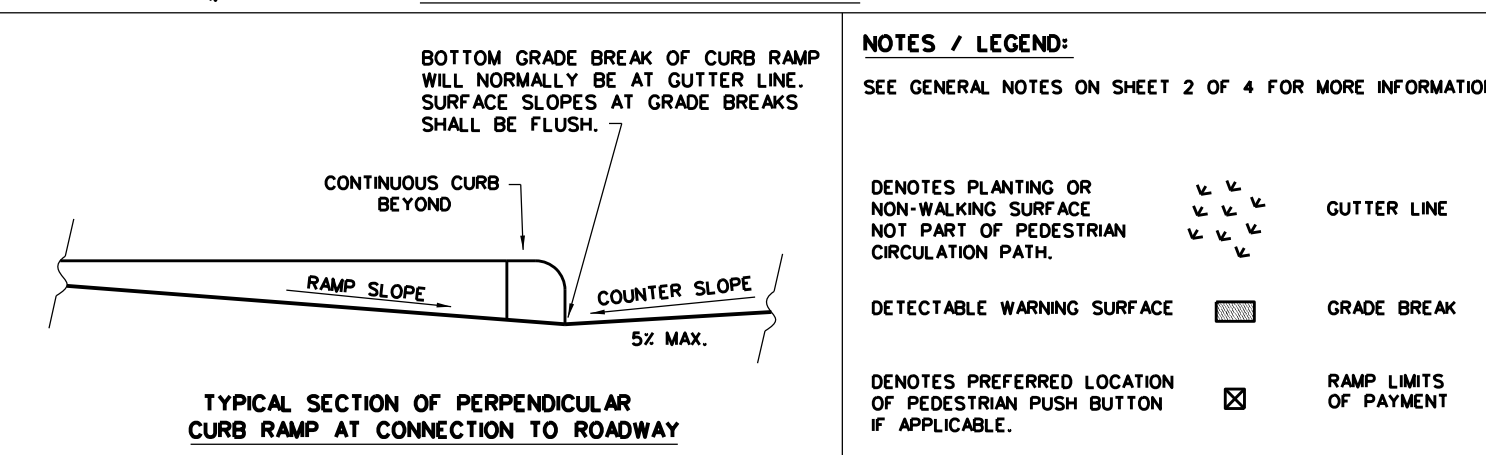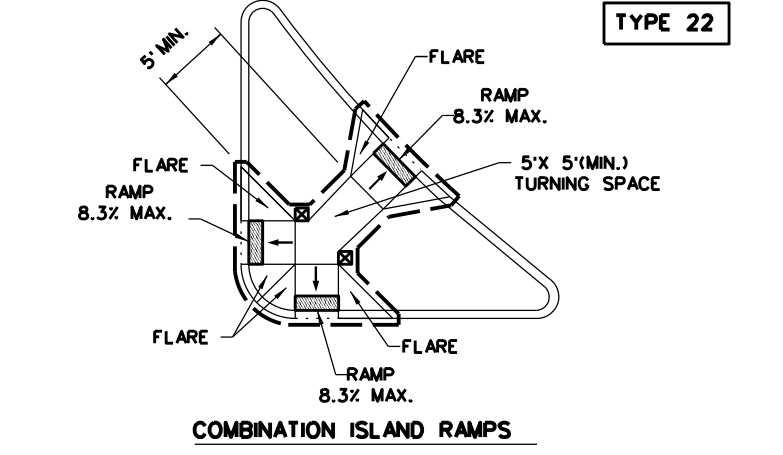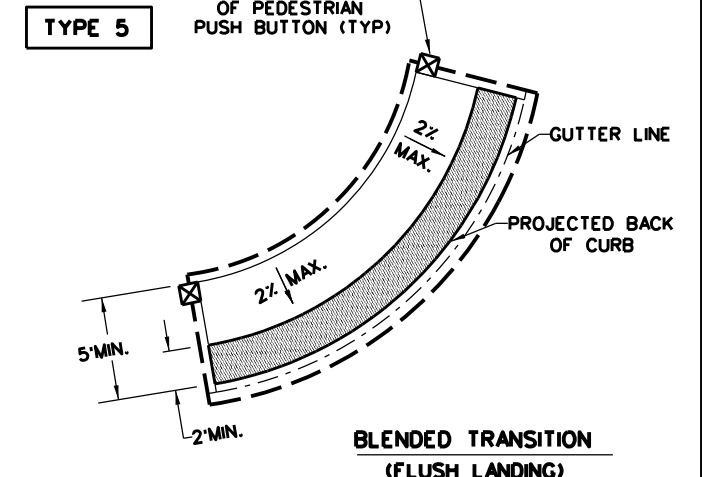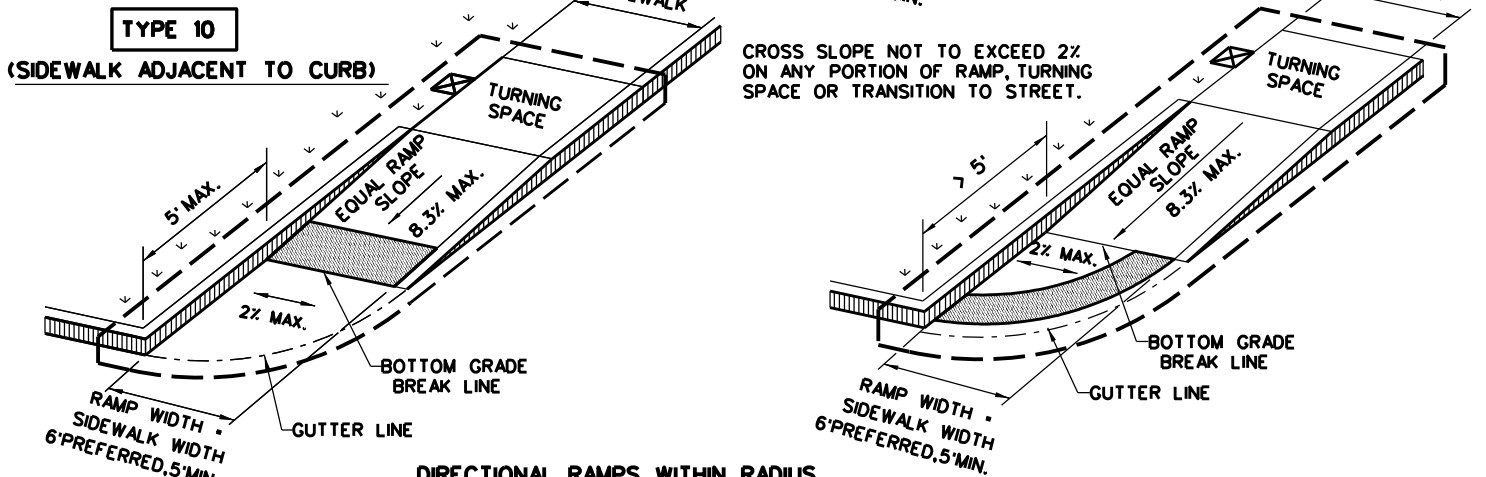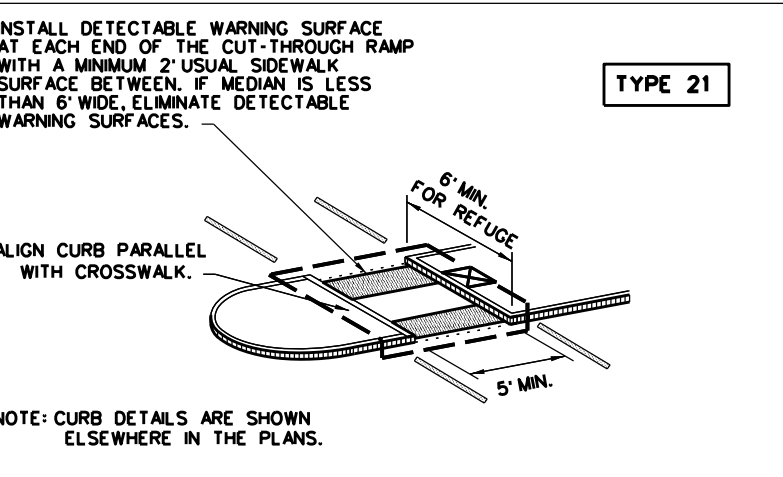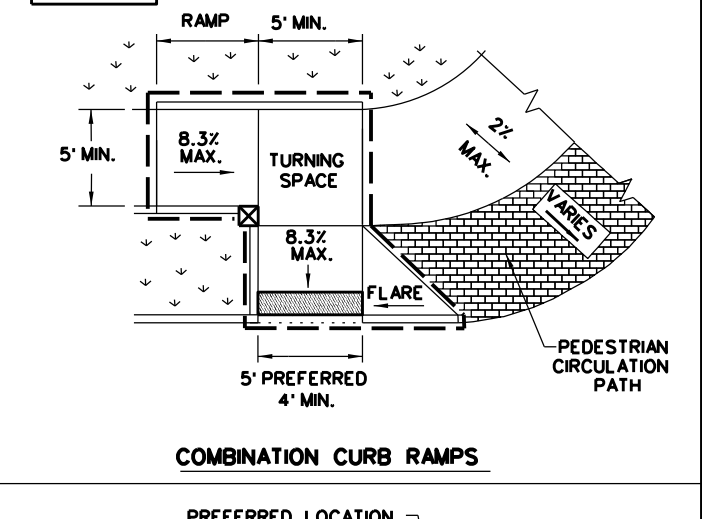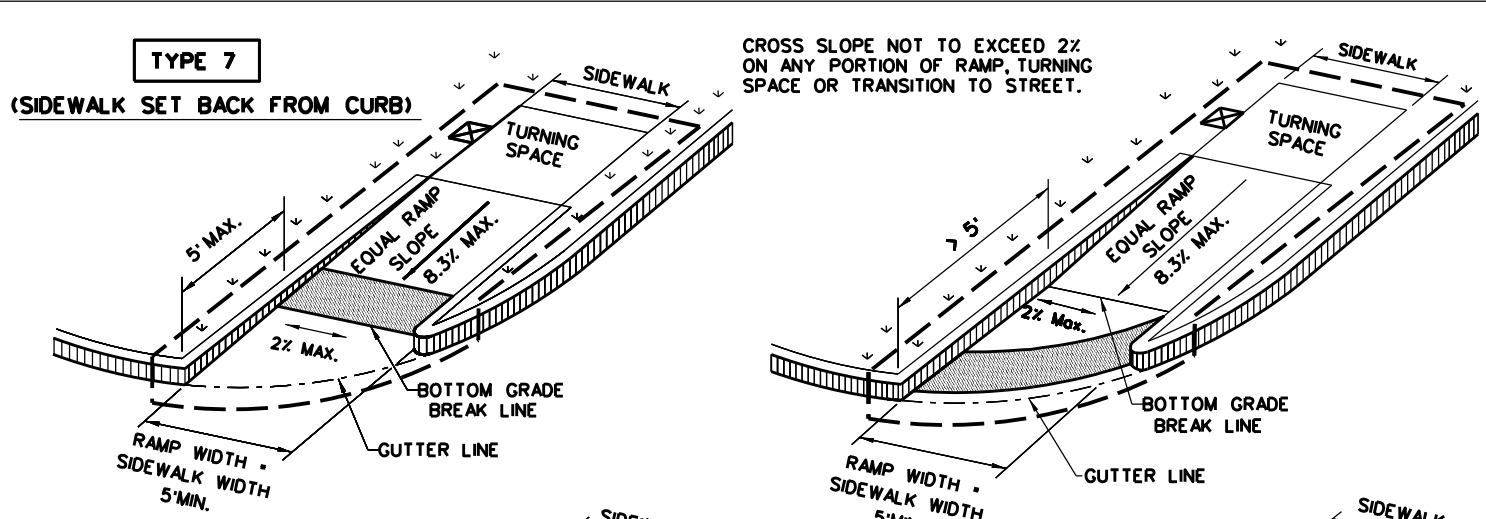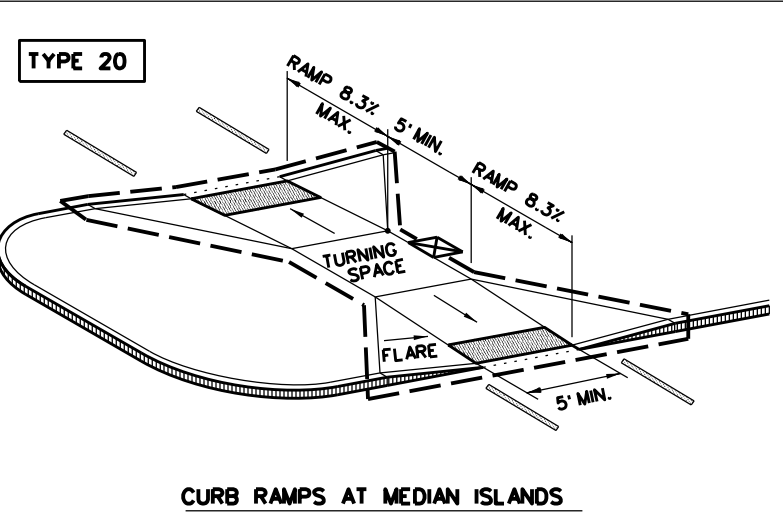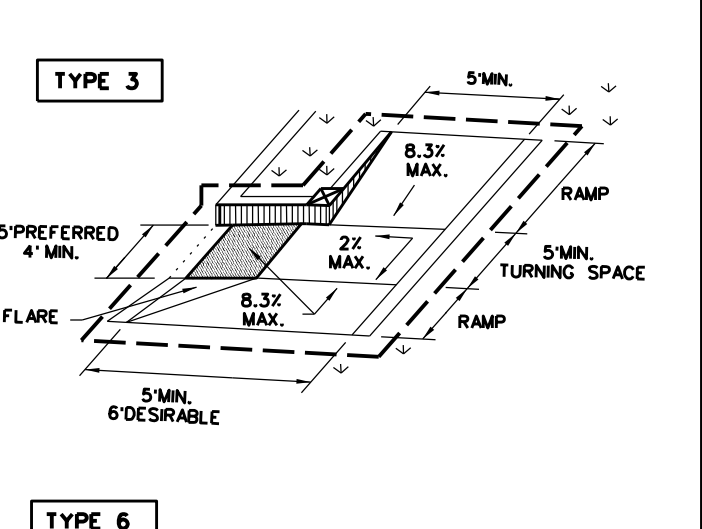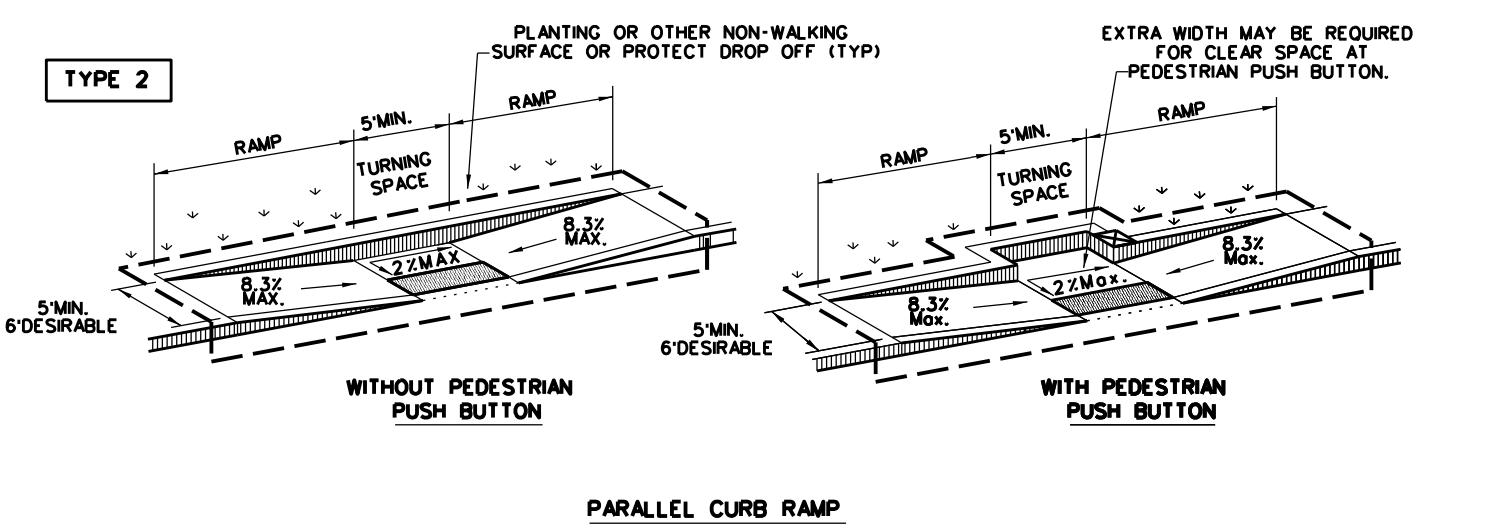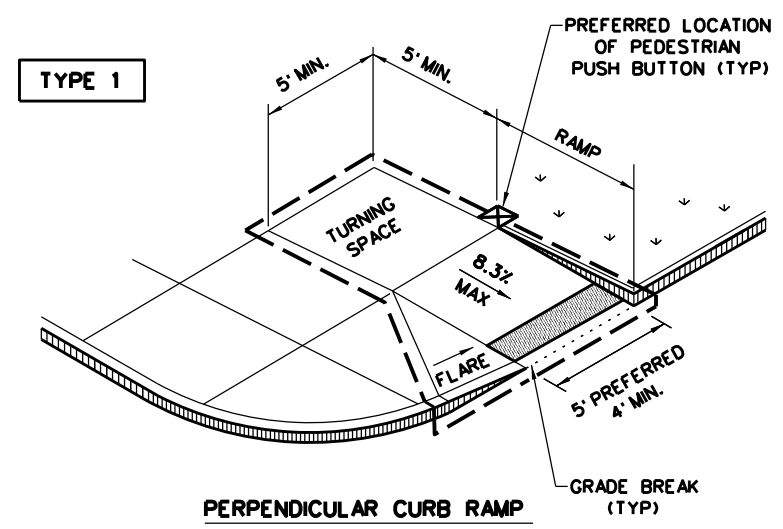

NOTES / LEGEND:
 SEE GENERAL NOTES ON SHEET 2 OF 4 FOR MORE INFORMATION.

DENOTES PLANTING OR NON-WALKING SURFACE NOT PART OF PEDESTRIAN CIRCULATION PATH.

DENOTES PREFERRED LOCATION OF PEDESTRIAN PUSH BUTTON IF APPLICABLE.

Detectable Warning Surface: [Symbol]

Grade Break: [Symbol]

Ramp Limits of Payment: [Symbol]

Gutter Line: [Symbol]

Planting or Non-Walking Surface: [Symbol]

Preferred Location of Pedestrian Push Button: [Symbol]

SHEET 1 OF 4

Design Division Standard

**PEDESTRIAN FACILITIES
 CURB RAMPS
 PED-18**

FILE: ped18	DN: TxDOT	DW: VP	CK: KM	CK: PK & JG
© TxDOT: MARCH, 2002	CONT	SECT	JOB	HIGHWAY
REVISED 08, 2005	0013	07	087	US 81
REVISED 06, 2012	DIST	COUNTY	SHEET NO.	
REVISED 01, 2018	FTW	WISE	34	

GENERAL NOTES

CURB RAMPS

1. Install a curb ramp or blended transition at each pedestrian street crossing.
2. All slopes shown are maximum allowable. Cross slopes of 1.5% and lesser running should be used. Adjust curb ramp length or grade of approach sidewalks as directed.
3. Maximum allowable cross slope on sidewalk and curb ramp surfaces is 2%.
4. The minimum sidewalk width is 5'. Where the sidewalk is adjacent to the back of curb, a 6' sidewalk width is desirable. Where a 5' sidewalk cannot be provided due to site constraints, sidewalk width may be reduced to 4' for short distances. 5' x 5' passing areas at intervals not to exceed 200' are required.
5. Turning Spaces shall be 5' x 5' minimum. Cross slope shall be maximum 2%.
6. Clear space at the bottom of curb ramps shall be a minimum of 4' x 4' wholly contained within the crosswalk and wholly outside the parallel vehicular travel path.
7. Provide flared sides where the pedestrian circulation path crosses the curb ramp. Flared sides shall be sloped at 10% maximum, measured parallel to the curb. Returned curbs may be used only where pedestrians would not normally walk across the ramp, either because the adjacent surface is planted, substantially obstructed, or otherwise protected.
8. Additional information on curb ramp location, design, light reflective value and texture may be found in the latest draft of the Proposed Guidelines for Pedestrian Facilities in the Public Right of Way (PROWAG) as published by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board).
9. To serve as a pedestrian refuge area, the median should be a minimum of 6' wide, measured from back of curbs. Medians should be designed to provide accessible passage over or through them.
10. Small channelization islands, which do not provide a minimum 5' x 5' landing at the top of curb ramps, shall be cut through level with the surface of the street.
11. Crosswalk dimensions, crosswalk markings and stop bar locations shall be as shown elsewhere in the plans. At intersections where crosswalk markings are not required, curb ramps shall align with theoretical crosswalks unless otherwise directed.
12. Provide curb ramps to connect the pedestrian access route at each pedestrian street crossing. Handrails are not required on curb ramps.
13. Curb ramps and landings shall be constructed and paid for in accordance with Item 531 "Sidewalks".
14. Place concrete at a minimum depth of 5" for ramps, flares and landings, unless otherwise directed.
15. Furnish and install No. 3 reinforcing steel bars at 18" o.c. both ways, unless otherwise directed.
16. Provide a smooth transition where the curb ramps connect to the street.
17. Curbs shown on sheet 1 within the limits of payment are considered part of the curb ramp for payment, whether it is concrete curb, gutter, or combined curb and gutter.
18. Existing features that comply with applicable standards may remain in place unless otherwise shown on the plans.

DETECTABLE WARNING MATERIAL


19. Curb ramps must contain a detectable warning surface that consists of raised truncated domes complying with PROWAG. The surface must contrast visually with adjoining surfaces, including side flares. Furnish and install an approved cast-in-place dark brown or dark red detectable warning surface material adjacent to uncolored concrete, unless specified elsewhere in the plans.
20. Detectable Warning Materials must meet TxDOT Departmental Materials Specification DMS 4350 and be listed on the Material Producer List. Install products in accordance with manufacturer's specifications.
21. Detectable warning surfaces must be firm, stable and slip resistant.
22. Detectable warning surfaces shall be a minimum of 24 inches in depth in the direction of pedestrian travel, and extend the full width of the curb ramp or landing where the pedestrian access route enters the street.
23. Detectable warning surfaces shall be located so that the edge nearest the curb line is at the back of curb and neither end of that edge is greater than 5 feet from the back of curb. Detectable warning surfaces may be curved along the corner radius.
24. Shaded areas on Sheet 1 of 4 indicate the approximate location for the detectable warning surface for each curb ramp type.

DETECTABLE WARNING PAVERS (IF USED)

25. Furnish detectable warning paver units meeting all requirements of ASTM C-936, C-33. Lay in a two by two unit basket weave pattern or as directed.
26. Lay full-size units first followed by closure units consisting of at least 25 percent (25%) of a full unit. Cut detectable warning paver units using a power saw.


SIDEWALKS

27. Provide clear ground space at operable parts, including pedestrian push buttons. Operable parts shall be placed within unobstructed reach range specified in PROWAG section R406.
28. Place traffic signal or illumination poles, ground boxes, controller boxes, signs, drainage facilities and other items so as not to obstruct the pedestrian access route or clear ground space.
29. Street grades and cross slopes shall be as shown elsewhere in the plans.
30. Changes in level greater than 1/4 inch are not permitted.
31. The least possible grade should be used to maximize accessibility. The running slope of sidewalks and crosswalks within the public right of way may follow the grade of the parallel roadway. Where a continuous grade greater than five percent (5%) must be provided, handrails may be desirable to improve accessibility. Handrails may also be needed to protect pedestrians from potentially hazardous conditions. If provided, handrails shall comply with PROWAG R409.
32. Handrail extensions shall not protrude into the usable landing area or into intersecting pedestrian routes.
33. Driveways and turnouts shall be constructed and paid for in accordance with Item "Intersections, Driveways and Turnouts". Sidewalks shall be constructed and paid for in accordance with Item, "Sidewalks".
34. Sidewalk details are shown elsewhere in the plans.

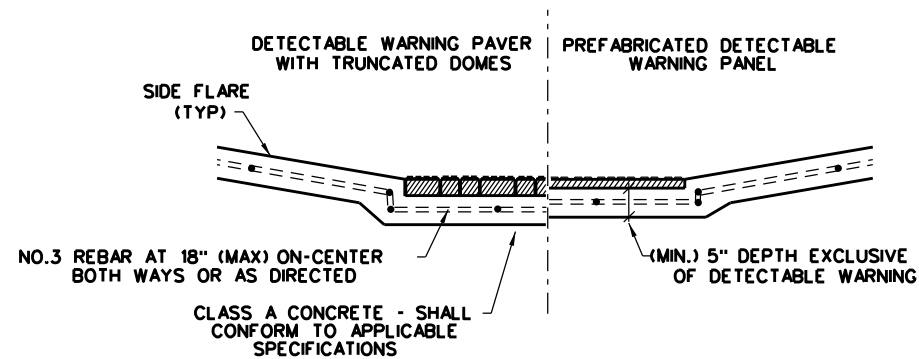


**SECTION VIEW DETAIL
CURB RAMP AT DETECTIBLE WARNINGS**


DETECTABLE WARNING SURFACE DETAILS

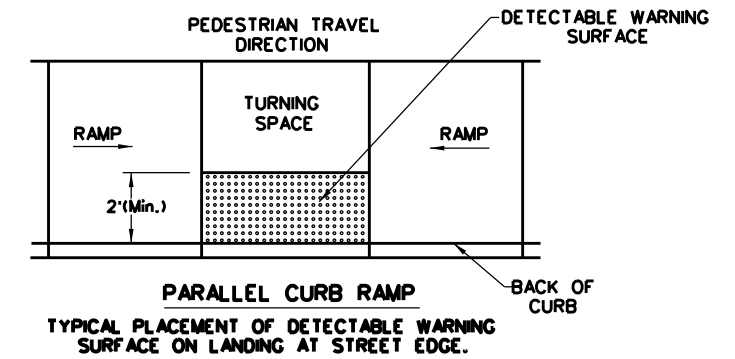

**PARALLEL CURB RAMP
TYPICAL PLACEMENT OF DETECTABLE WARNING SURFACE ON LANDING AT STREET EDGE.**

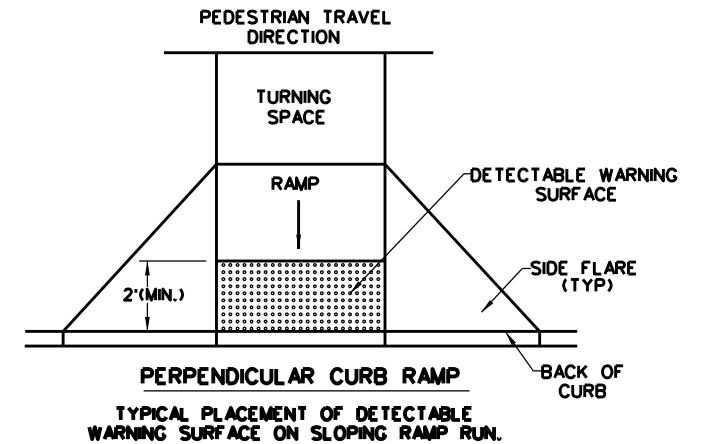

**PERPENDICULAR CURB RAMP
TYPICAL PLACEMENT OF DETECTABLE WARNING SURFACE ON SLOPING RAMP RUN.**

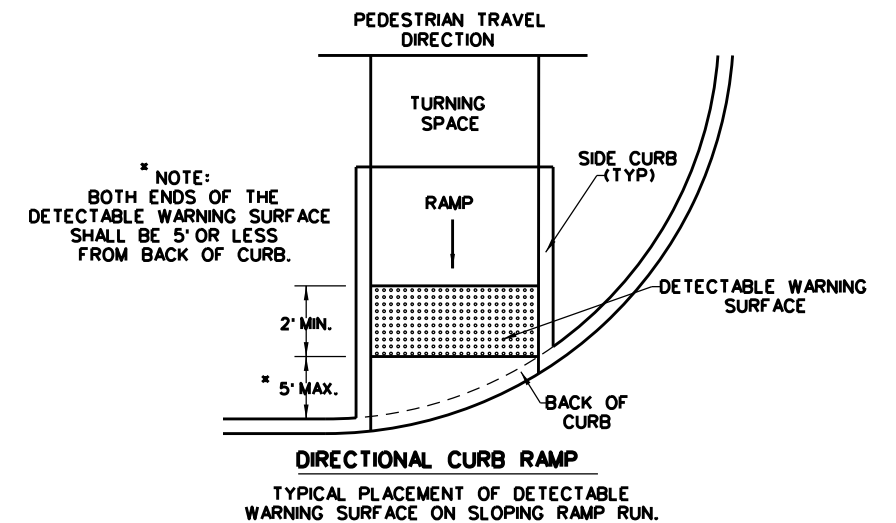

* NOTE:
BOTH ENDS OF THE
DETECTABLE WARNING SURFACE
SHALL BE 5' OR LESS
FROM BACK OF CURB.

**DIRECTIONAL CURB RAMP
TYPICAL PLACEMENT OF DETECTABLE WARNING SURFACE ON SLOPING RAMP RUN.**





SHEET 2 OF 4

		Design Division Standard	
PEDESTRIAN FACILITIES CURB RAMPS			
PED-18			
FILE: ped18	DN: TxDOT	DW: VP	CK: KM
© TxDOT: MARCH, 2002	CONT: 0013	SECT: 07	JOB: 087
REVISIONS			HIGHWAY: US 81
REVISED 08, 2005	DIST: FTW	COUNTY: WISE	SHEET NO.: 35
REVISED 06, 2012			
REVISED 01, 2018			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 5/10/2023
 FILE: T:\DIS\M\T\SRA DESIGN\Wise County\PS&E\DCN\034-037 PED-18.dgn

SIDEWALK TREATMENT AT DRIVEWAYS

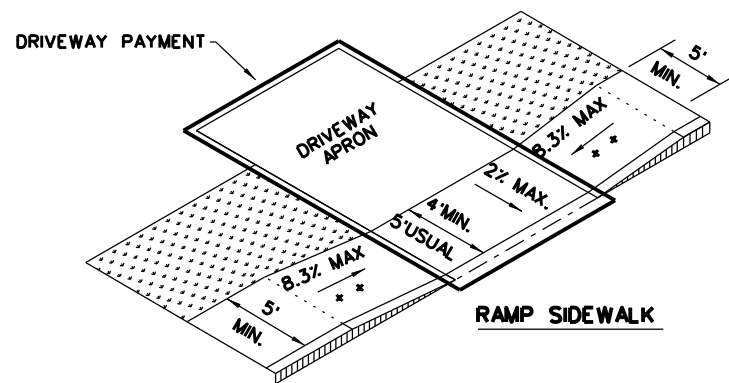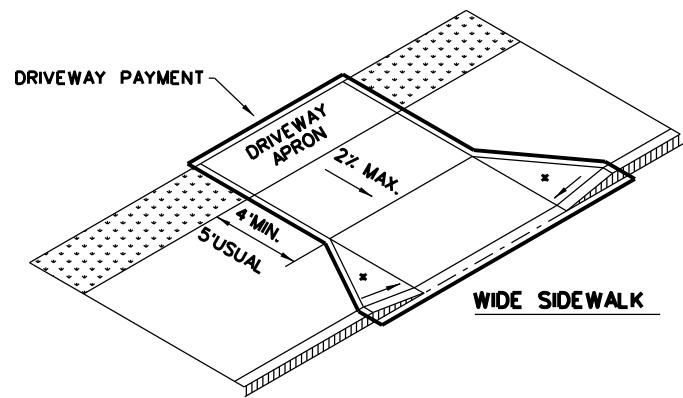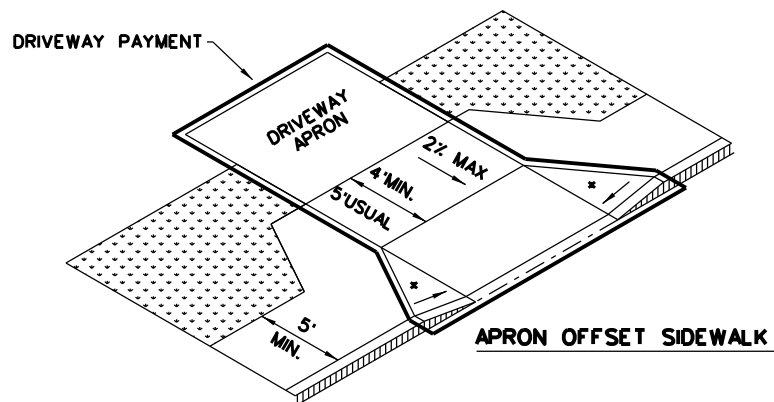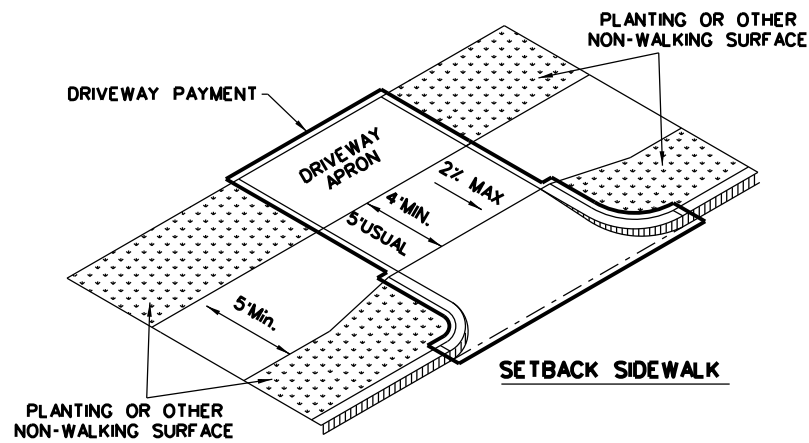


NOTES:

- * WHERE DRIVEWAYS CROSS THE PEDESTRIAN ROUTE, SIDES SHALL BE FLARED AT 10% MAX SLOPE.
- * * IF CURB HEIGHT IS GREATER THAN 6 INCHES, USE GRADE LESS THAN OR EQUAL TO 5%. HANDRAIL AND DETECTABLE WARNING ARE NOT REQUIRED.

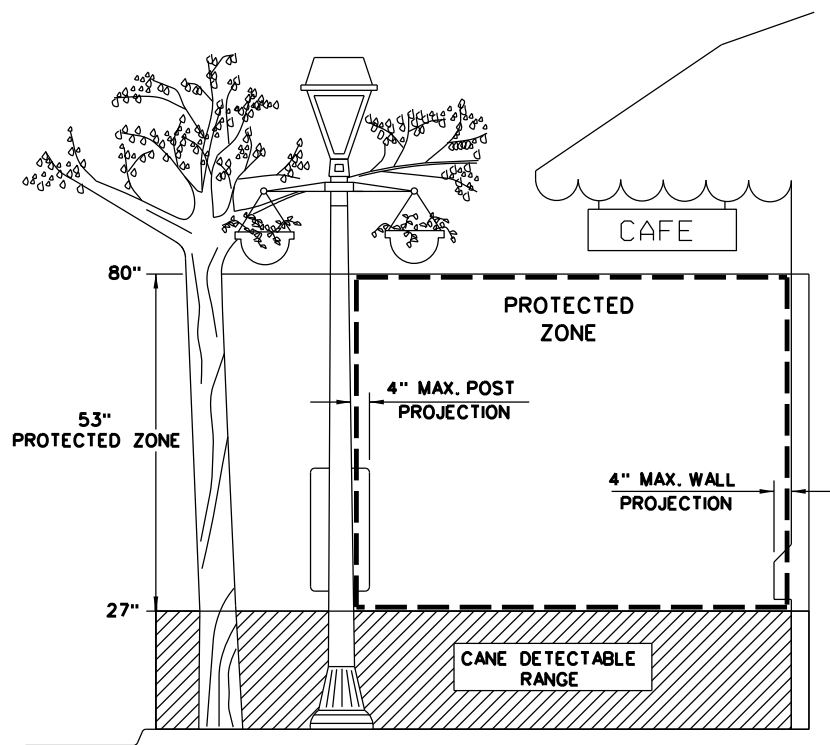


PROTECTED ZONE

NOTE: IN PEDESTRIAN CIRCULATION AREA, MAXIMUM 4" PROJECTION FOR POST OR WALL MOUNTED OBJECTS BETWEEN 27" AND 80" ABOVE THE SURFACE.

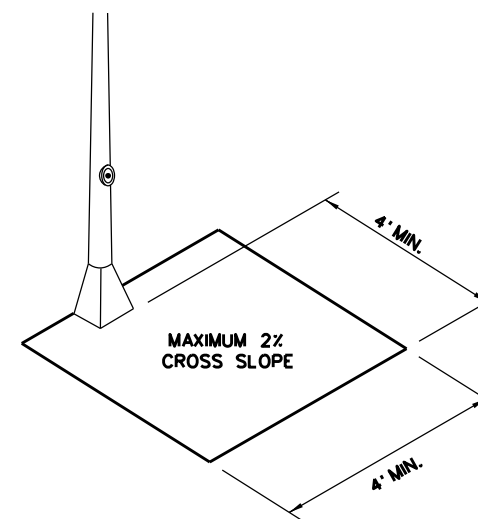


CLEAR SPACE ADJACENT TO PEDESTRIAN PUSH BUTTON

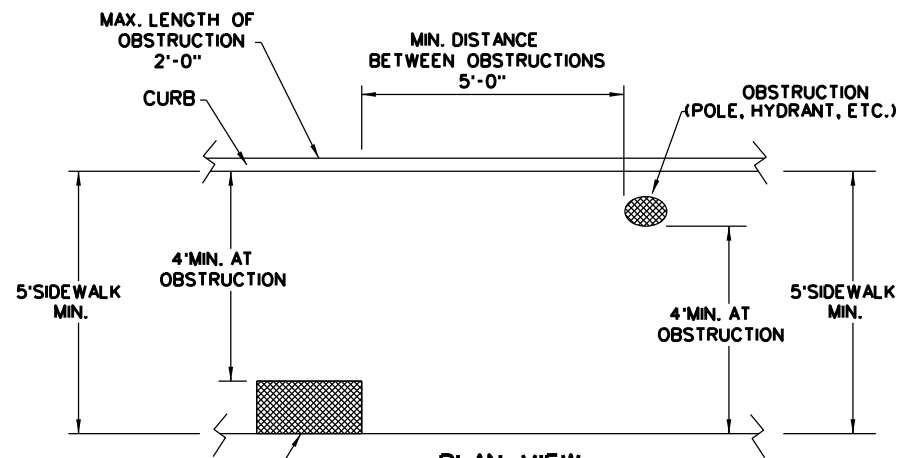

PLAN VIEW
PLACEMENT OF STREET FIXTURES

NOTE: ITEMS NOT INTENDED FOR PUBLIC USE. MINIMUM 4' X 4' CLEAR GROUND SPACE REQUIRED AT PUBLIC USE FIXTURES.

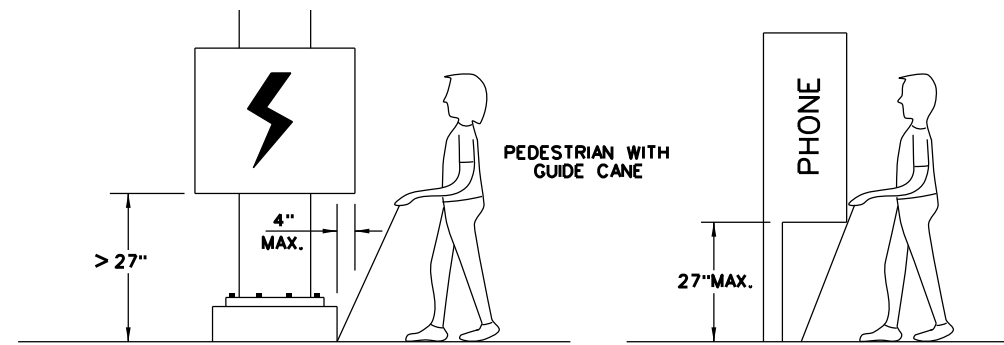


WHEN AN OBSTRUCTION OF A HEIGHT GREATER THAN 27" FROM THE SURFACE WOULD CREATE A PROTRUSION OF MORE THAN 4" INTO THE PEDESTRIAN CIRCULATION AREA, CONSTRUCT ADDITIONAL CURB OR FOUNDATION AT THE BOTTOM TO PROVIDE A MAXIMUM 4" OVERHANG.

PROTRUDING OBJECTS OF A HEIGHT 27" ARE DETECTABLE BY CANE AND DO NOT REQUIRE ADDITIONAL TREATMENT.

DETECTION BARRIER FOR VERTICAL CLEARANCE $\leq 80''$

SHEET 3 OF 4



PEDESTRIAN FACILITIES
CURB RAMPS


PED-18

FILE: ped18	DN: TxDOT	DW: VP	CK: KM	CK: PK & JG
© TxDOT: MARCH, 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
REVISED 08, 2005	DIST	COUNTY	SHEET NO.	
REVISED 06, 2012	FTW	WISE		36
REVISED 01, 2018				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
FILE: T:\DISMAINT\SRA DESIGN\Wise County\PS&E\DNV\034-037 PED-18.dgn


TYPICAL CROSSING LAYOUTS
SEE SHEET 1 OF 4 FOR DETAILS AND DIMENSIONS

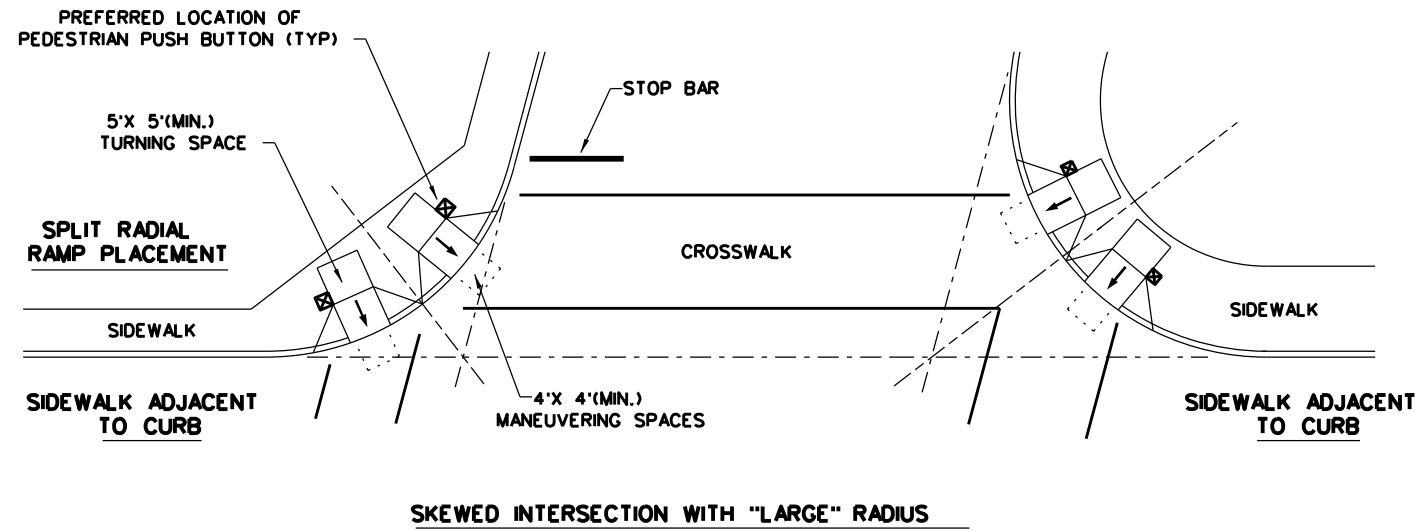



SKewed INTERSECTION WITH "LARGE" RADIUS

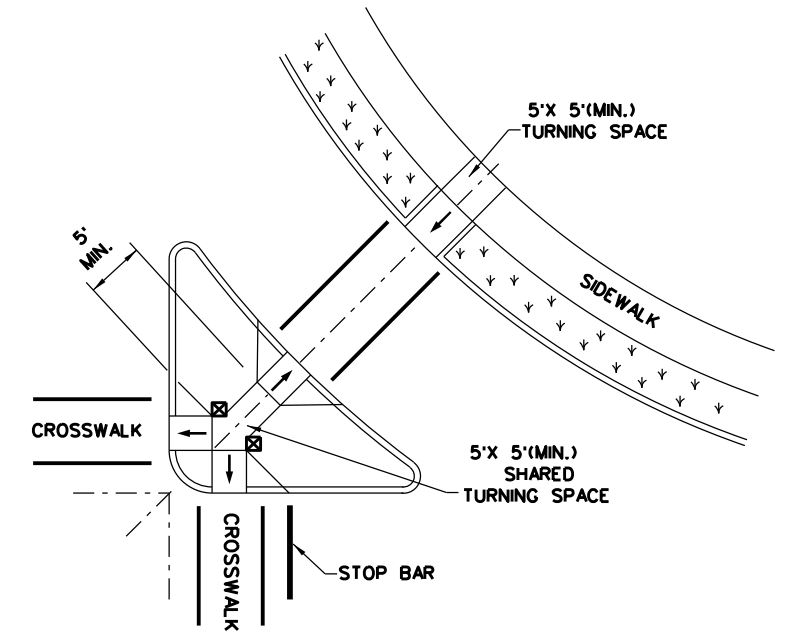


AT INTERSECTION W/FREE RIGHT TURN & ISLAND

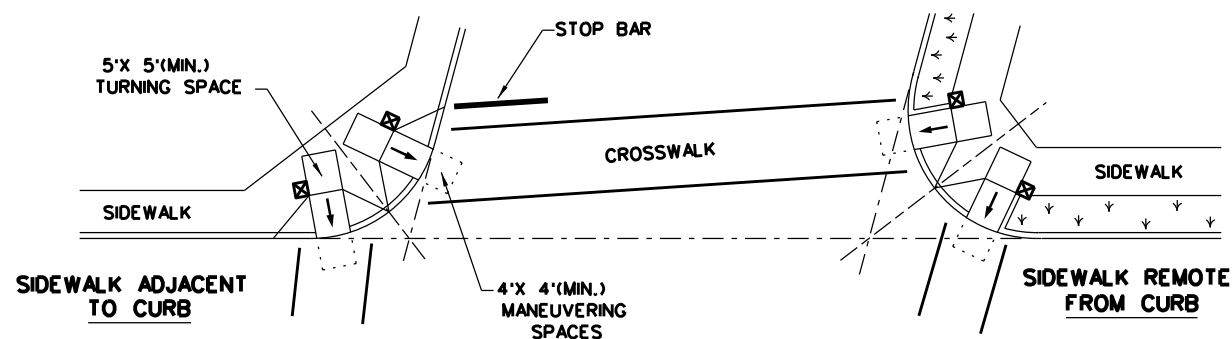

SKewed INTERSECTION WITH "SMALL" RADIUS

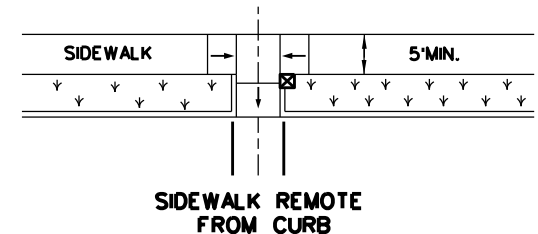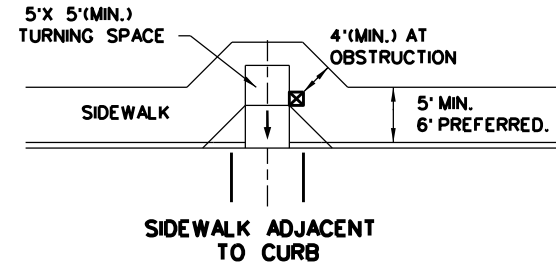

MID-BLOCK PLACEMENT PERPENDICULAR RAMPS

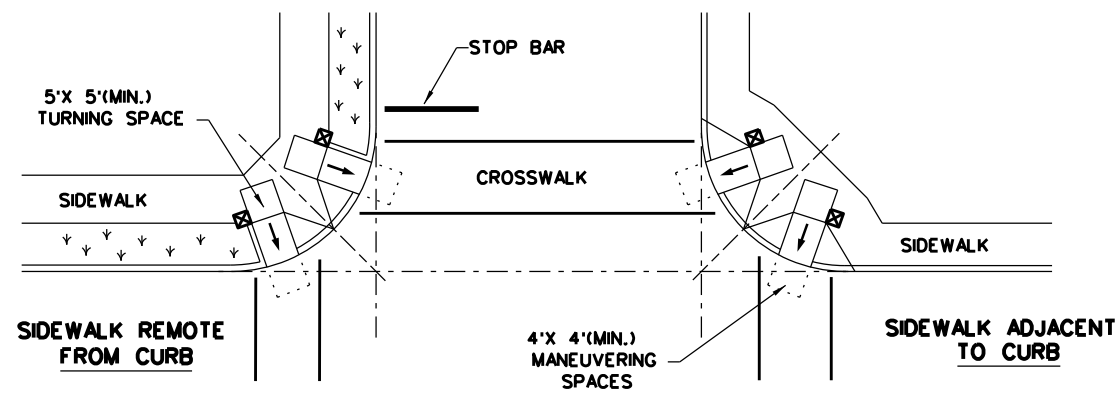

NORMAL INTERSECTION WITH "SMALL" RADIUS

LEGEND:

- SHOWS DOWNWARD SLOPE. →
- DENOTES PREFERRED LOCATION OF PEDESTRIAN PUSH BUTTON (IF APPLICABLE). ☒
- DENOTES PLANTING OR NON-WALKING SURFACE NOT PART OF PEDESTRIAN CIRCULATION PATH. ↙ ↘ ↗ ↖ ↕

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
FILE: T:\DISMAINT\SRA DESIGN\Wise County\PS&E\DCN\034-037 PED-18.dgn




PEDESTRIAN FACILITIES
CURB RAMPS
PED-18


FILE: ped18	DN: TxDOT	DW: VP	CK: KM	CK: PK & JG
© TxDOT: MARCH, 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
REVISED 08, 2005	DIST	COUNTY	SHEET NO.	
REVISED 06, 2012	FTW	WISE		37
REVISED 01, 2018				

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

http://www.dot.state.tx.us/itw/specinfo/standard.htm
 5/10/2023 3:05:55 PM
 T:\DISMANT\SRA DESIGN\Wise County\PS&E\038 CSWD (FTW).dgn

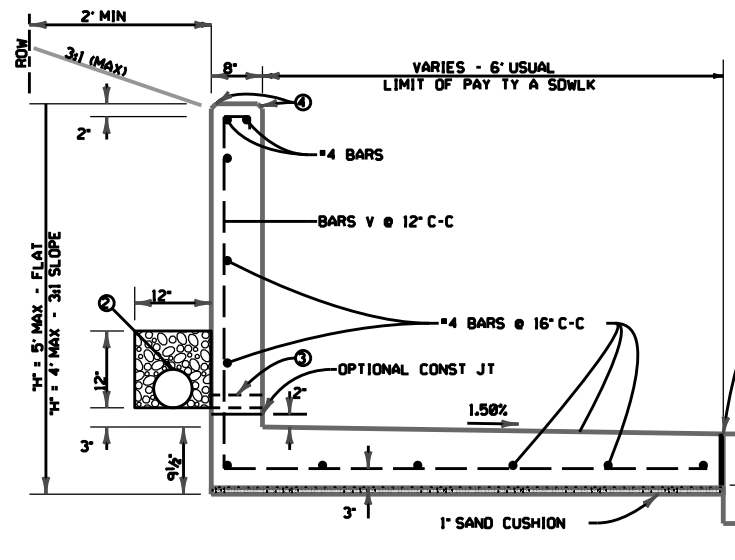


TYPE A SIDEWALK-ADJACENT TO CURB

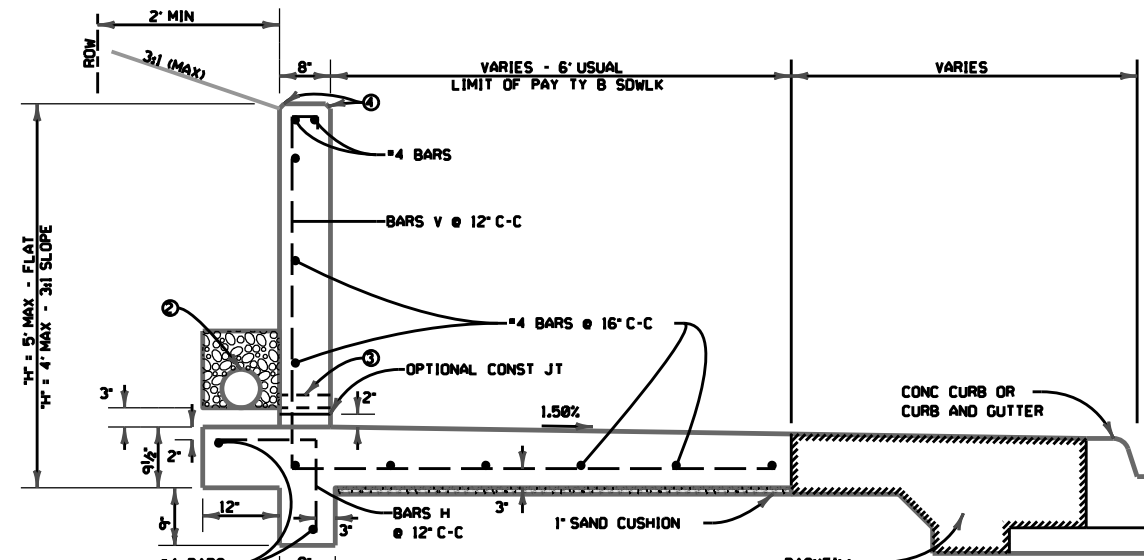


TYPE B SIDEWALK-REMOTE FROM CURB

- ① 2" MINIMUM REQUIRED FOR LATERAL SUPPORT
- ② INSTALL 6" PIPE UNDERDRAIN (TY. 5, 6, 7, OR 8) ENTIRE LENGTH OF WALL. USE TY. 'E' FILTER MATERIAL. SLOPE TO DRAIN AND CONNECT TO STORM DRAIN.
- ③ IF, IN THE OPINION OF THE ENGINEER, USE OF UNDERDRAIN IS IMPRACTICAL, INSTALL WEEP HOLES AS SHOWN.
- ④ 3/8" CHAMFER


SPECIAL CONCRETE SIDEWALK w/ INTEGRATED RETAINING WALL
 N.T.S.

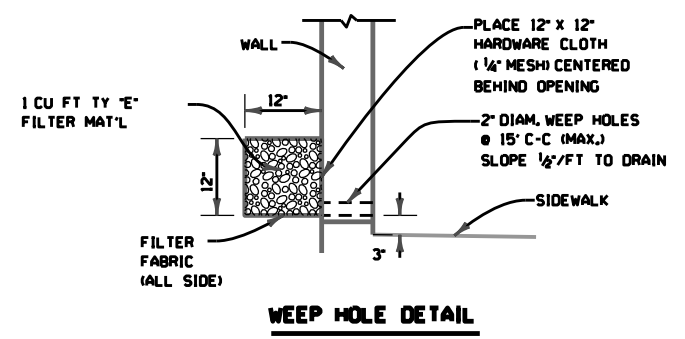


WEEP HOLE DETAIL

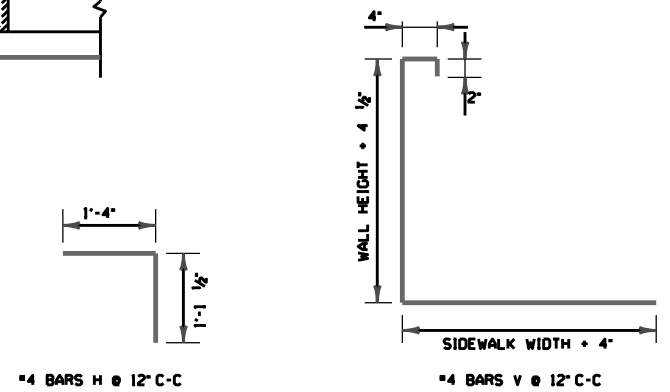

REINFORCING STEEL DETAILS

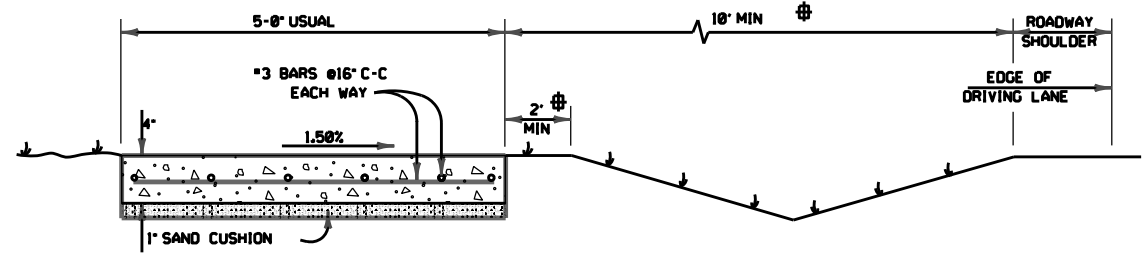


CONCRETE SIDEWALK (ROADWAY W/O CURB)

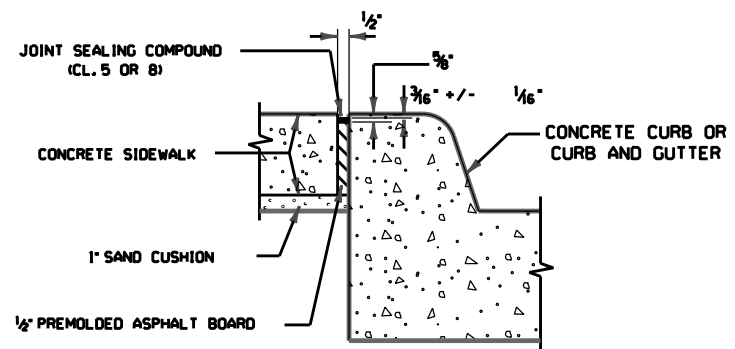


1/2" ISOLATION JOINT (SIDEWALK ADJACENT TO CURB)

GENERAL NOTES:


1. ALL CONCRETE SHALL BE CLASS 'C'.
2. ALL REINFORCING STEEL SHALL BE GRADE 60, # 4 BARS UNLESS OTHERWISE INDICATED.
3. SEE PLAN SHEETS FOR LOCATIONS OF SIDEWALKS AND RETAINING WALLS.
4. LONGITUDINAL SLOPE OF SIDEWALKS SHALL NOT EXCEED 5% EXCEPT IN CASES WHERE THE ADJACENT ROADWAY SLOPE EXCEEDS 5%. IF ROADWAY SLOPE EXCEEDS 5%, LONGITUDINAL SLOPE OF SIDEWALK MAY MATCH THAT OF ROADWAY.
5. IF SIDEWALK WIDTH IS LESS THAN 5', PROVIDE 5' X 5' PASSING AREAS AT INTERVALS NOT TO EXCEED 200' SPACING.
6. RETAINING WALL WILL BE SUBSIDIARY TO THE ITEM, 'CONC SIDEWALKS (SPECIAL) (TYPE A)' OR 'CONC SIDEWALKS (SPECIAL) (TYPE B)', WITH LIMITS OF PAY AS SHOWN.
7. SURFACE TREATMENT OF RETAINING WALL FACE DETAILED ELSEWHERE IN THE PLANS.
8. SEE PED STANDARDS FOR TREATMENT AT INTERSECTIONS AND CROSSWALKS.

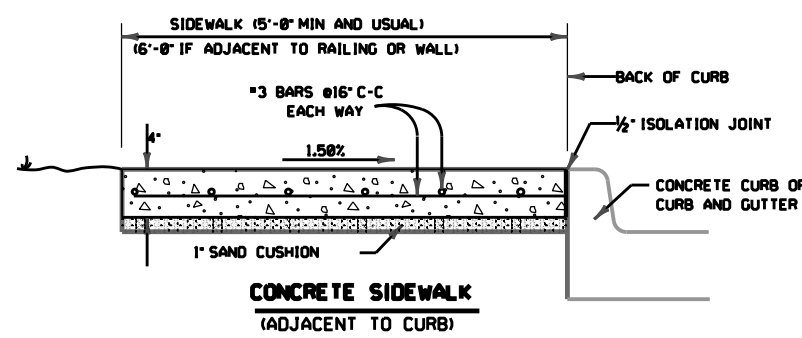

CONCRETE SIDEWALK (ADJACENT TO CURB)

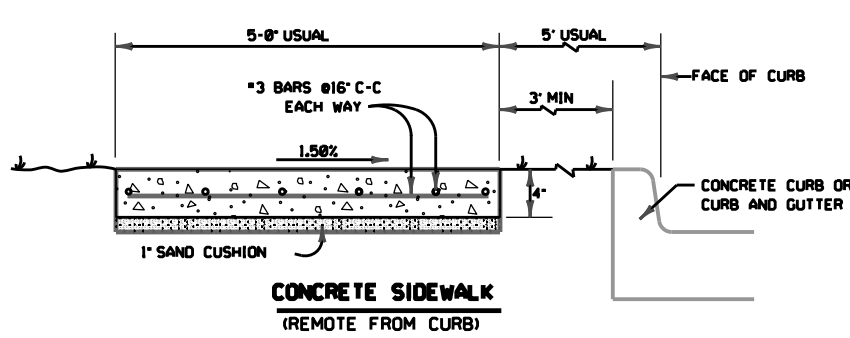

CONCRETE SIDEWALK (REMOTE FROM CURB)

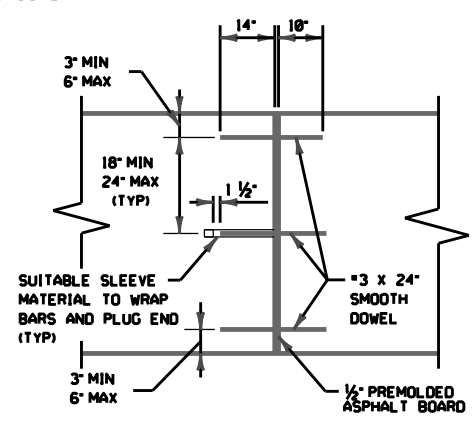

TRANSVERSE EXPANSION JOINT


CONCRETE SIDEWALK DETAILS
 N.T.S.

©2023 by Texas Department of Transportation; All Rights Reserved


		Fort Worth District Standard	
CONCRETE SIDEWALK DETAILS CSWD (FTW)			
ORIGINAL DRAWING: 05/2019	cswd-ftw.dgn	PROJECT NO.	SHEET NO. 38
DATE	REVISIONS	STATE	STATE DIST. NO.
05/2019	NEW STANDARD	TEXAS	FTW
11/2020	REVISE JOINT NOMENCLATURE, REVISE ALLOWABLE SEALANT TYPES	COUNTY	WISE
		CONTRACT	SECTION
		0013	07
		JOB	HIGHWAY NO.
		087	US 81

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


http://www.dot.state.tx.us/itw/specinfo/standard.htm
 5/10/2023 3:06:06 PM
 T:\DISMANT\SRRA DESIGN\Wise County\PS&E\DGN\039 CCCG (FTW).dgn

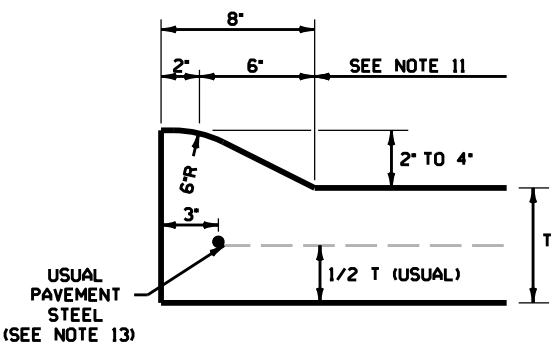


**TYPE I CURB (MONOLITHIC)
2' - 4' HEIGHT**

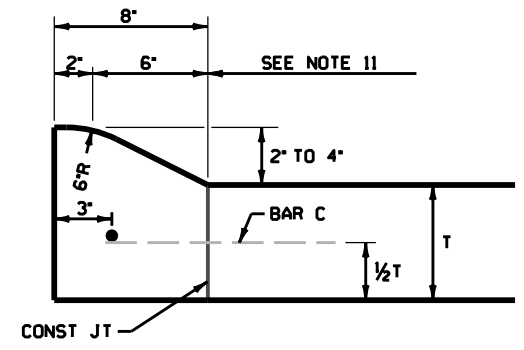


**TYPE I CURB
2' - 4' HEIGHT**

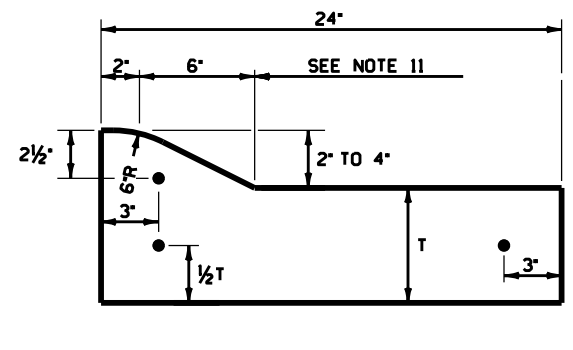


**TYPE I CURB AND GUTTER
2' - 4' HEIGHT**

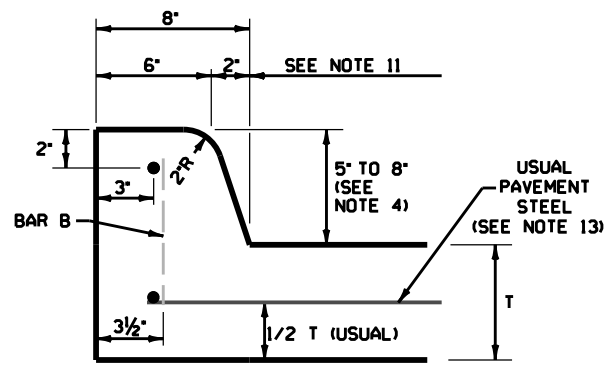


**TYPE II CURB (MONOLITHIC)
5' - 8' HEIGHT**

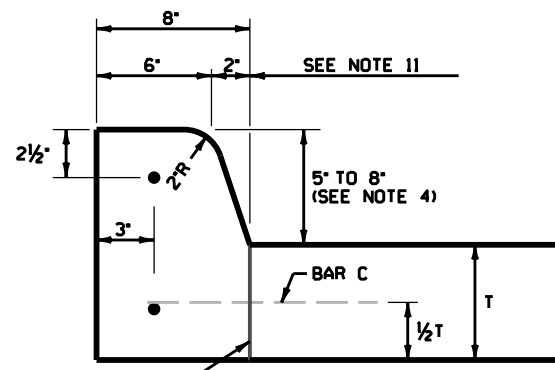

**TYPE II CURB
5' - 8' HEIGHT
DOWELED VERTICAL JOINT**

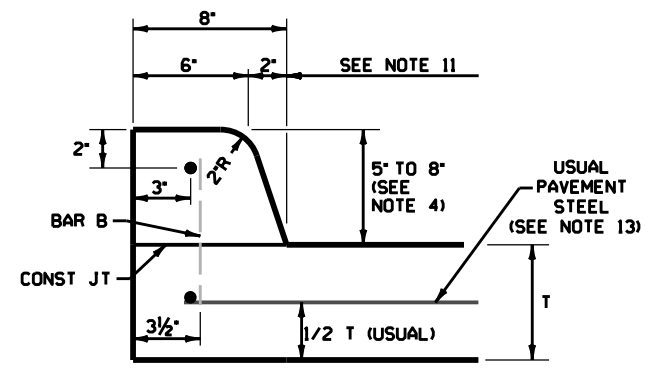

**TYPE II CURB
5' - 8' HEIGHT
DOWELED HORIZONTAL JOINT**

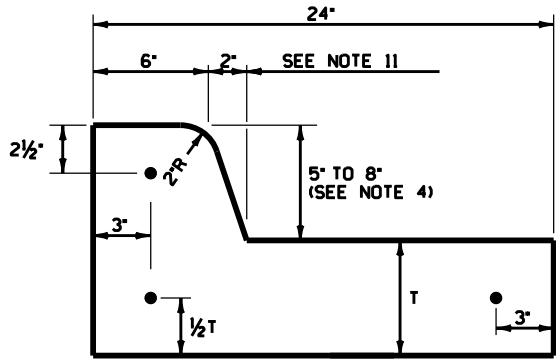


**TYPE II CURB AND GUTTER
5' - 8' HEIGHT**

BAR B
 $L = (T/2) + (H - 1\frac{1}{2}')$
 WHERE 'H' = CURB HEIGHT
 FOR NEW PAVEMENT, EMBED T/2 INTO FRESH CONCRETE.
 FOR EXISTING PAVEMENT, DRILL 3/8" DIAM HOLE T/2 + 1/4" INTO PAVEMENT. SECURE WITH TY III EPOXY, CLASS 'E' OR 'F'.


BAR C
 EMBED 6" INTO EXISTING CONCRETE PAVEMENT. DRILL 3/8" X 6 1/4" HOLE SECURE WITH TY III EPOXY, CLASS 'E' OR 'F'.

VARIES


12"

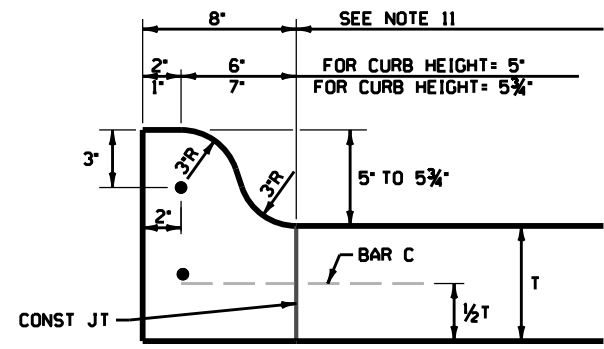

**TYPE IIA CURB
5' - 5 3/4' HEIGHT**

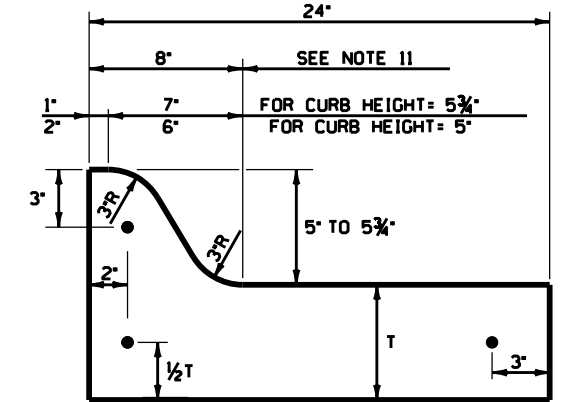


**TYPE IIA CURB AND GUTTER
5' - 5 3/4' HEIGHT**

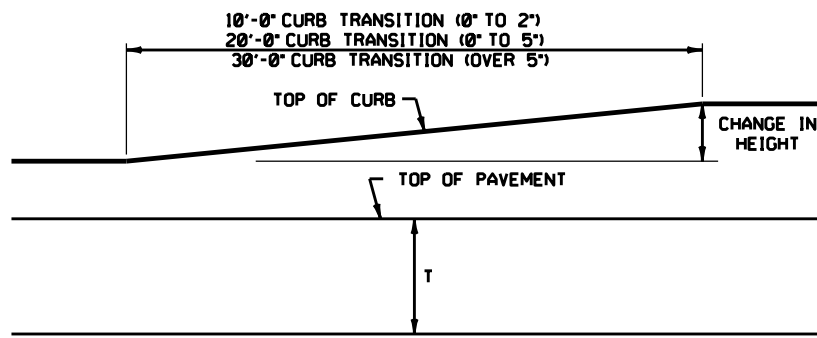

CURB TRANSITION

NOTE: TO BE PAID FOR AS HIGHEST CURB

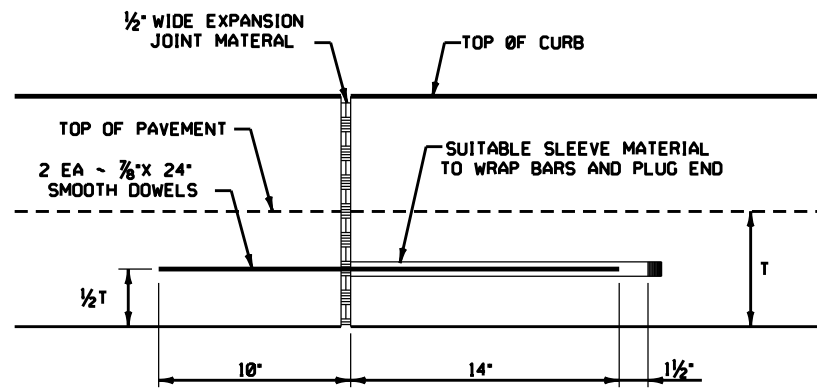


EXPANSION JOINT DETAIL

GENERAL NOTES

- ALL MATERIALS AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH ITEM 529, 'CONCRETE CURB, GUTTER, AND COMBINED CURB AND GUTTER'.
- ALL CONCRETE SHALL BE CLASS 'A'.
- ALL REINFORCING BARS SHALL BE #4, UNLESS OTHERWISE SHOWN.
- UNLESS OTHERWISE SHOWN, ALL TYPE II CURB SHALL BE 6" HEIGHT.
- ROUND EXPOSED SHARP EDGES WITH A ROUNDING TOOL, TO A MINIMUM RADIUS OF 1/4".
- ALL EXISTING CURBS AND DRIVEWAYS TO BE REMOVED SHALL BE SAW CUT FULL DEPTH OR REMOVED AT EXISTING JOINTS.
- WHERE CONCRETE CURB IS PLACED ON EXISTING CONCRETE PAVEMENT, THE PAVEMENT SHALL BE DRILLED AND THE REINFORCING BARS GROUTED OR EPOXIED IN PLACE.
- EXPANSION AND CONTRACTION JOINTS SHALL BE CONSTRUCTED TO MATCH PAVEMENT JOINTS IN ALL CURBS OR CURB AND GUTTER ADJACENT TO JOINTED CONCRETE PAVEMENT. WHERE PLACEMENT OF CURB OR CURB AND GUTTER IS NOT ADJACENT TO CONCRETE PAVEMENT, EXPANSION JOINTS SHALL BE PROVIDED AT STRUCTURES, CURB RETURNS AT STREETS OR DRIVEWAYS, AND AT LOCATIONS DIRECTED BY THE ENGINEER.
- VERTICAL AND HORIZONTAL DOWEL BARS AND TRANSVERSE REINFORCING BARS SHALL BE PLACED AT 4' C-C.
- DIMENSION 'T' SHOWN IS THE THICKNESS OF ADJACENT CONCRETE PAVEMENT, OR, WHEN CURB IS INSTALLED ADJACENT TO FLEXIBLE PAVEMENT, 'T' IS 6" MINIMUM, 8" MAXIMUM.
- USUAL PROFILE GRADE LINE. REFER TO TYPICAL SECTIONS AND PLAN-PROFILE SHEETS FOR EXACT LOCATIONS.
- A SEALED, 1/2" EXPANSION JOINT SHALL BE PROVIDED WHERE CURB AND GUTTER IS ADJACENT TO SIDEWALK OR RIPRAP.
- LONGITUDINAL AND TRANSVERSE PAVEMENT STEEL SHALL BE PLACED IN ACCORDANCE WITH PAVEMENT DETAILS SHOWN ELSEWHERE IN THE PLANS.

©2023 by Texas Department of Transportation; All Rights Reserved


		Fort Worth District Standard	
CONCRETE CURB AND CURB AND GUTTER DETAILS CCCG (FTW)			
ORIGINAL DRAWING: 05/2019	cccg-ftw.dgn	FED. DIV. NO. 6	PROJECT NO.
DATE	REVISIONS	6	SHEET NO. 39
05/2019	NEW STANDARD	STATE DIST. NO. TEXAS	COUNTY FTW
07/2022	DESIGNATE USUAL 6" HEIGHT	CONT. 0013	SECT. 07
		JOB 087	HIGHWAY NO. US 81

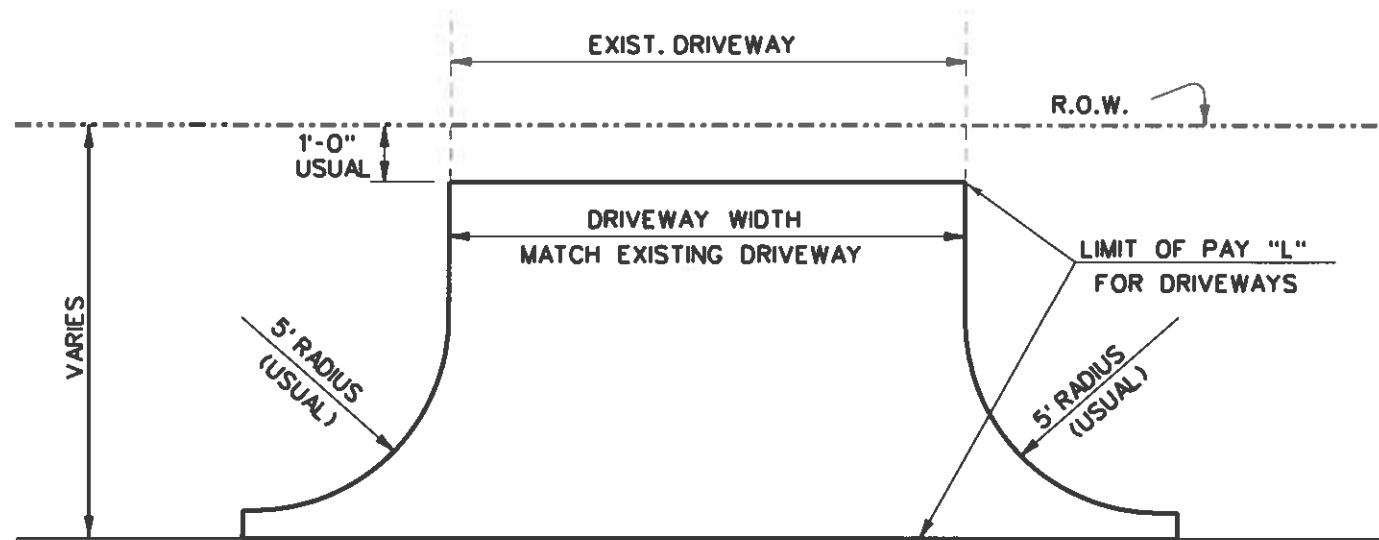

PLAN VIEW

PAY AREA FOR DRIVEWAY SHALL BE THE PRODUCT OF "L" x "W"

S.Y. NON-PAY AREA IN DRIVEWAY RADIUS	
2-90° RADII (FT)	S.Y. NON-PAY
5	0.42
10	3.04
20	15.36
30	37.19

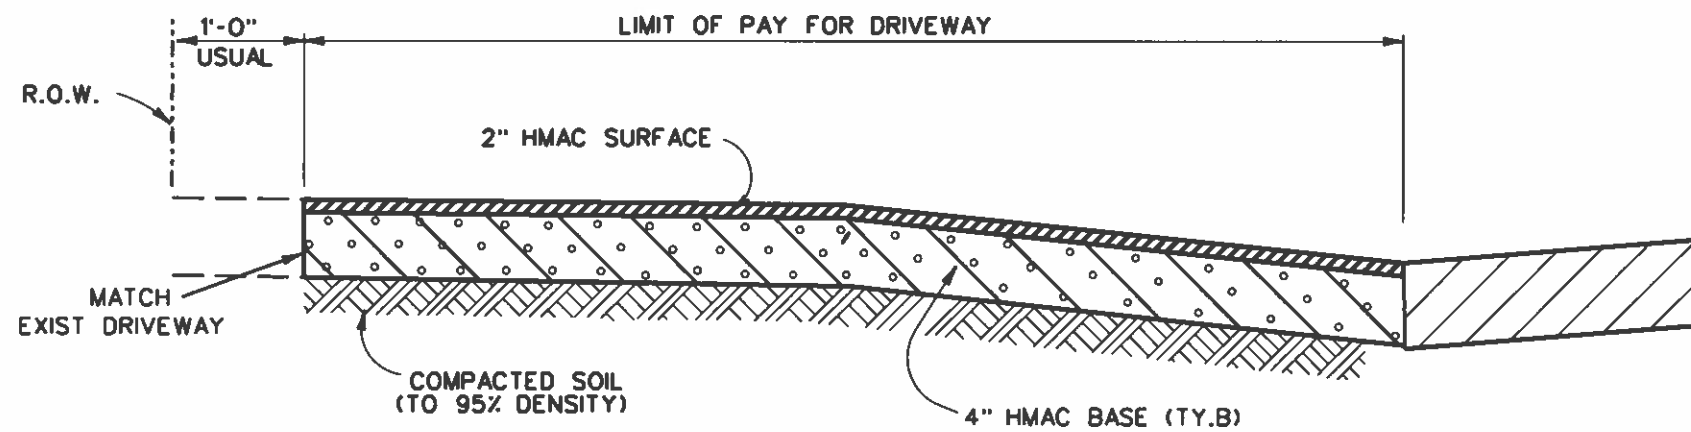

SECTION VIEW

ASPHALT DRIVEWAY DETAILS



Elijah Zelenov, PE
5/12/23




ASPHALT DRIVEWAY DETAIL


	FED. RD. DIV. NO. 6	FEDERAL-AID PROJECT NO. SEE TITLE SHEET		SHEET NO. 40
REVISIONS	STATE	DISTRICT	COUNTY	40
	TEXAS	FTW	WISE	
	CONTROL	SECTION	JOB	
	0013	07	087	HIGHWAY NO. US 81

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 5/10/2023 3:06:15 PM
 FILE: T:\DISMAINT_SRA_DESIGN\Wise County\PS&E\DCN\041 PM(1)-22.dgn

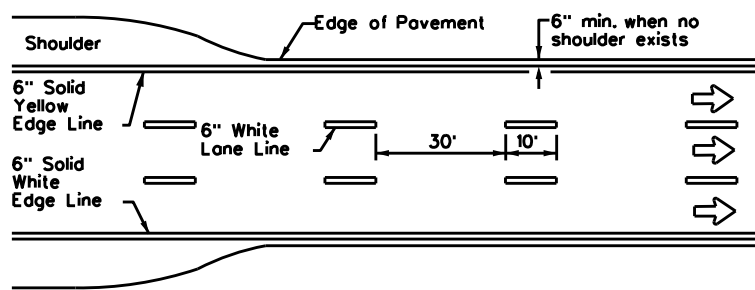



**EDGE LINE AND LANE LINES
 ONE-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

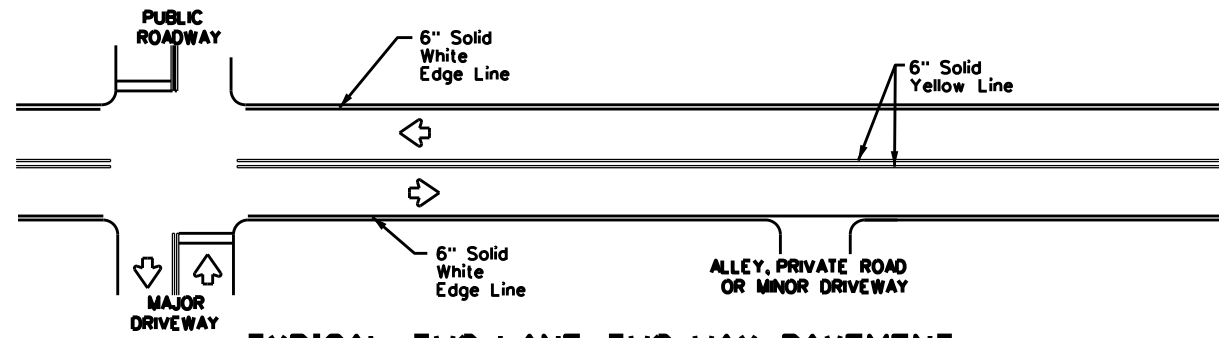


TYPICAL TWO-LANE, TWO-WAY PAVEMENT MARKINGS THROUGH INTERSECTIONS

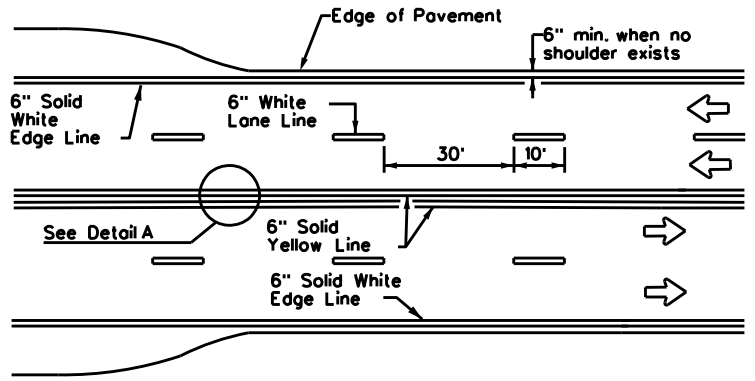



**CENTERLINE AND LANE LINES
 FOUR LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

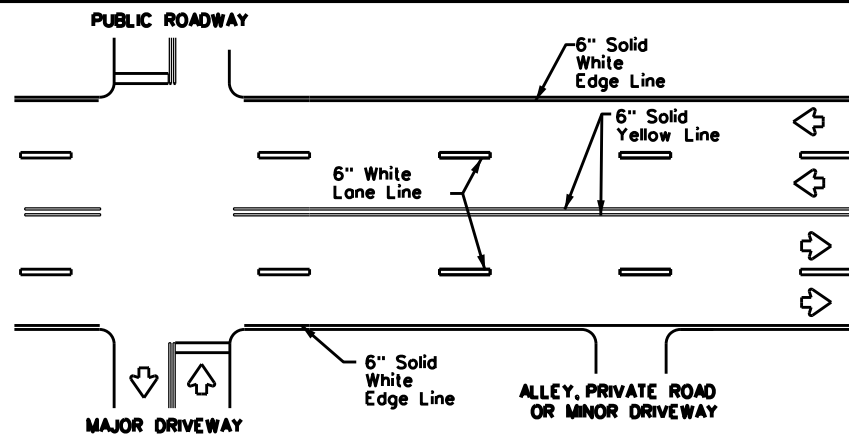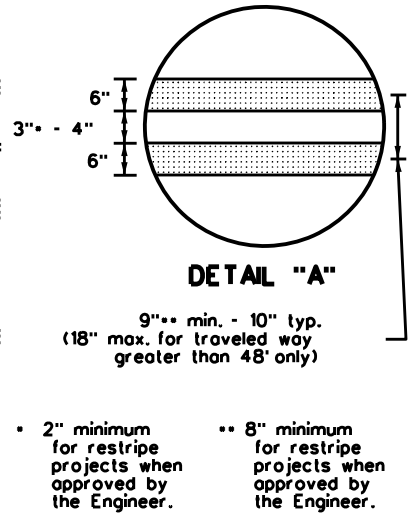


TYPICAL MULTI-LANE, TWO-WAY PAVEMENT MARKINGS THROUGH INTERSECTIONS

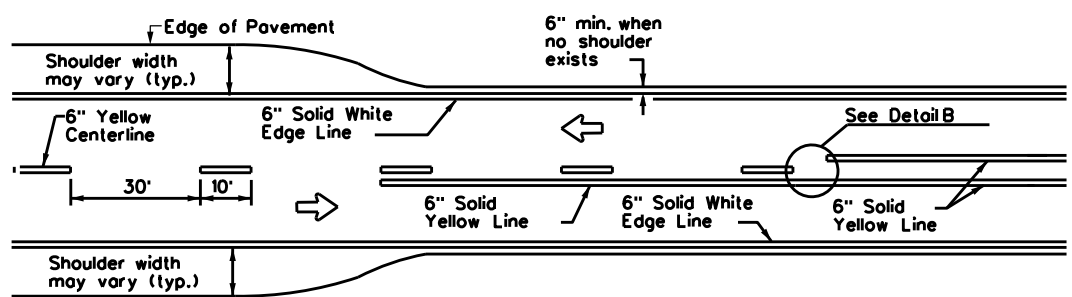


**TWO LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

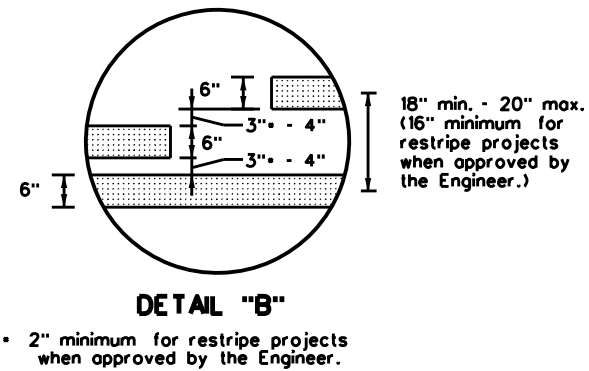

YIELD LINES

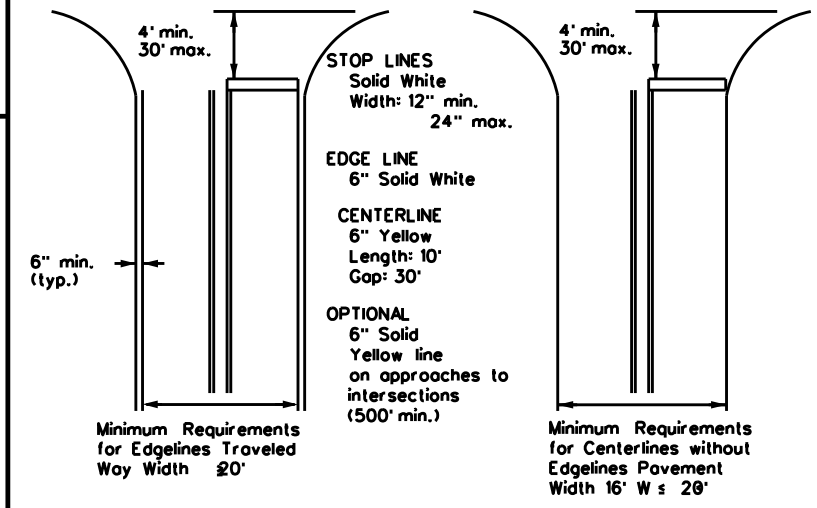

**GUIDE FOR PLACEMENT OF STOP LINES,
 EDGE LINE & CENTERLINE**
 Based on Traveled Way and Pavement Widths
 for Undivided Roadways

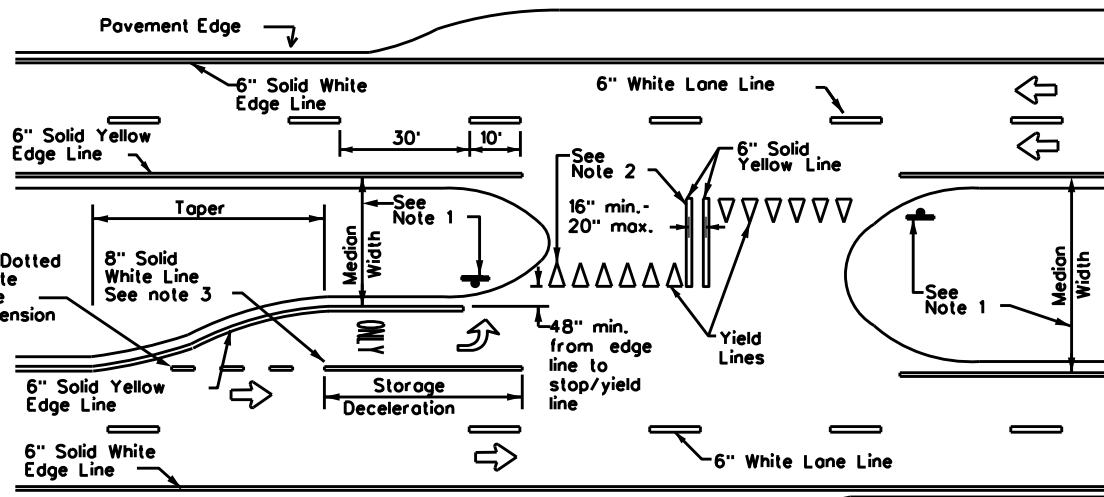

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES

- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.


TYPICAL STANDARD PAVEMENT MARKINGS

PM(1)-22


FILE: pml-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
11-78 8-00 6-20	DIST	COUNTY		SHEET NO.
8-95 3-03 12-22	FTW	WISE		41
5-00 2-12				

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

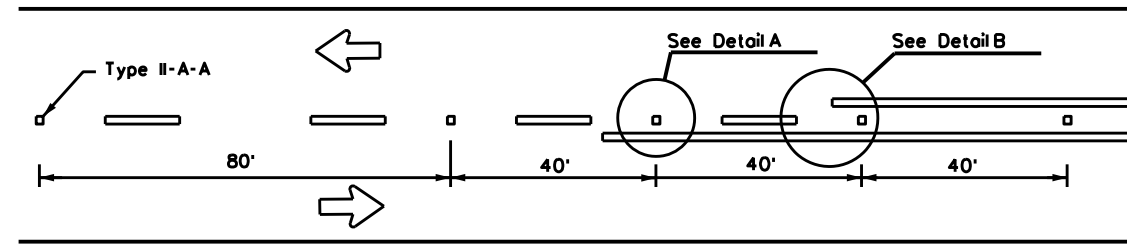


CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

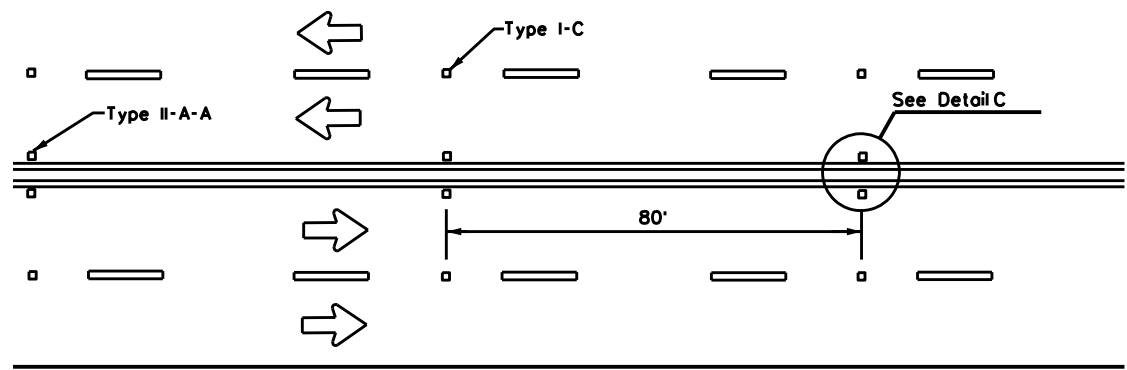

**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY ROADWAYS**

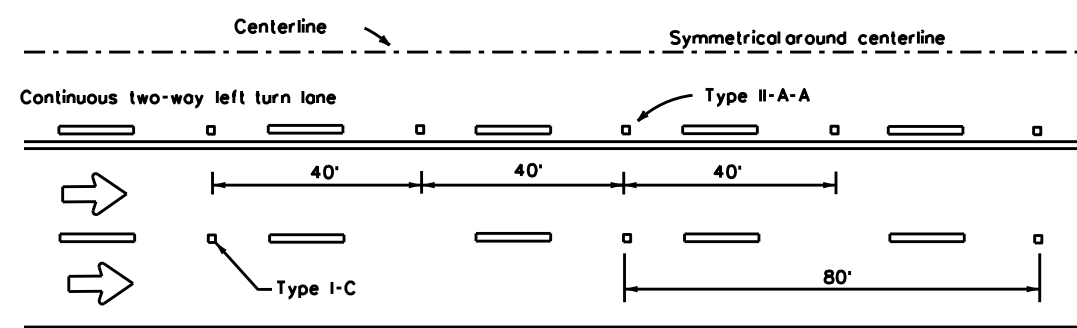
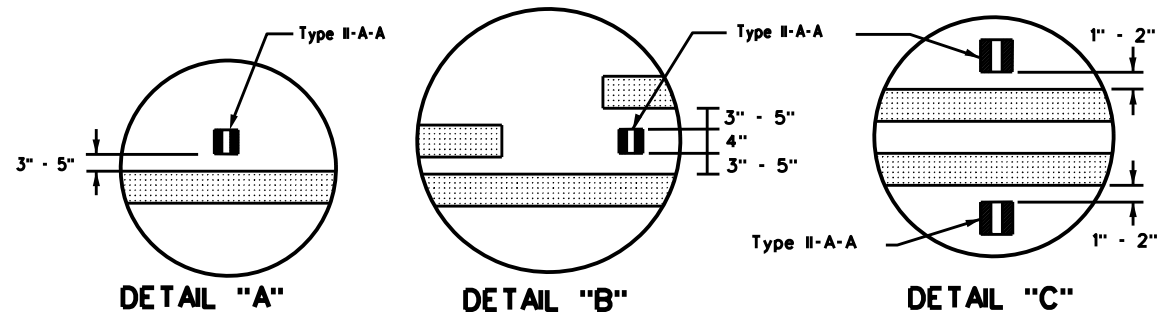


CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

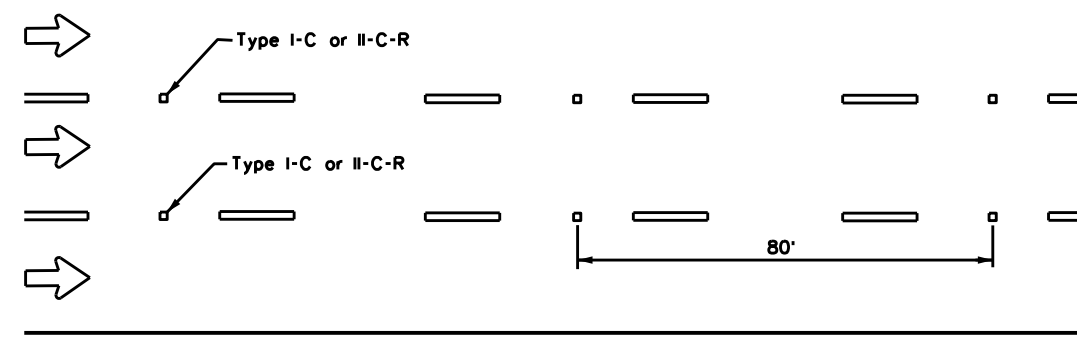


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.
See Note 3.

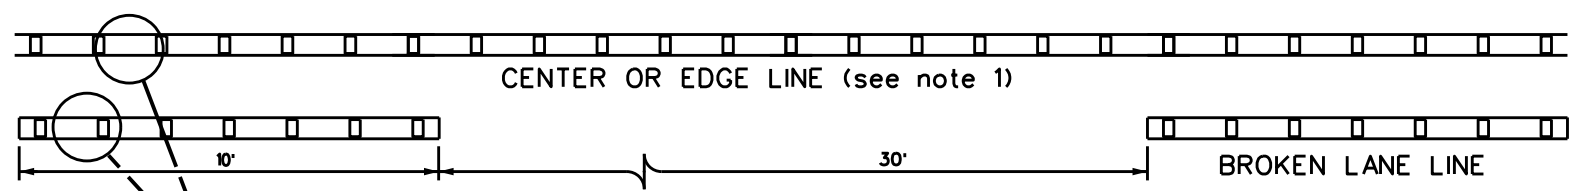

**REFLECTORIZED PROFILE
PATTERN DETAIL
USING REFLECTIVE PROFILE PAVEMENT MARKINGS**

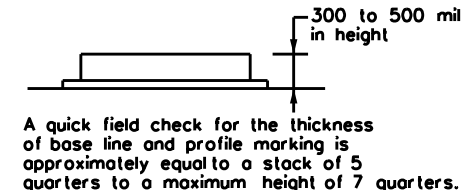

A quick field check for the thickness of base line and profile marking is approximately equal to a stack of 5 quarters to a maximum height of 7 quarters.

NOTES


1. Edge lines should typically be 6" wide and the materials shall be specified in the plans.
2. Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

GENERAL NOTES


1. All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.
2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.
3. Use raised pavement marker Type I-C with undivided roadways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

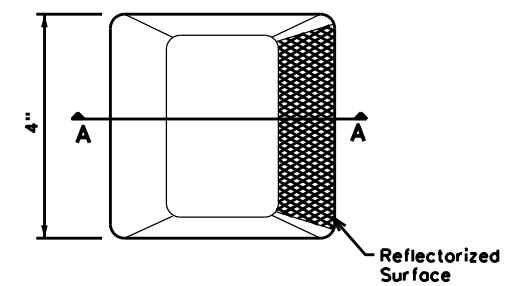

Type I (Top View)

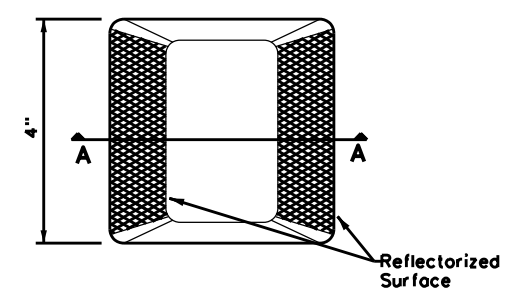

Type II (Top View)

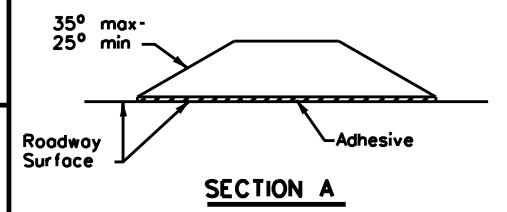

SECTION A

RAISED PAVEMENT MARKERS




**POSITION GUIDANCE USING
RAISED MARKERS
REFLECTORIZED PROFILE
MARKINGS
PM(2)-22**

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	FTW	WISE	42	
5-00 2-12				

DATE: 5/10/2023 3:06:20 PM
FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DN\042 PM(2)-22.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:06:25 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCNV\043 PM(4)-22A.dgn

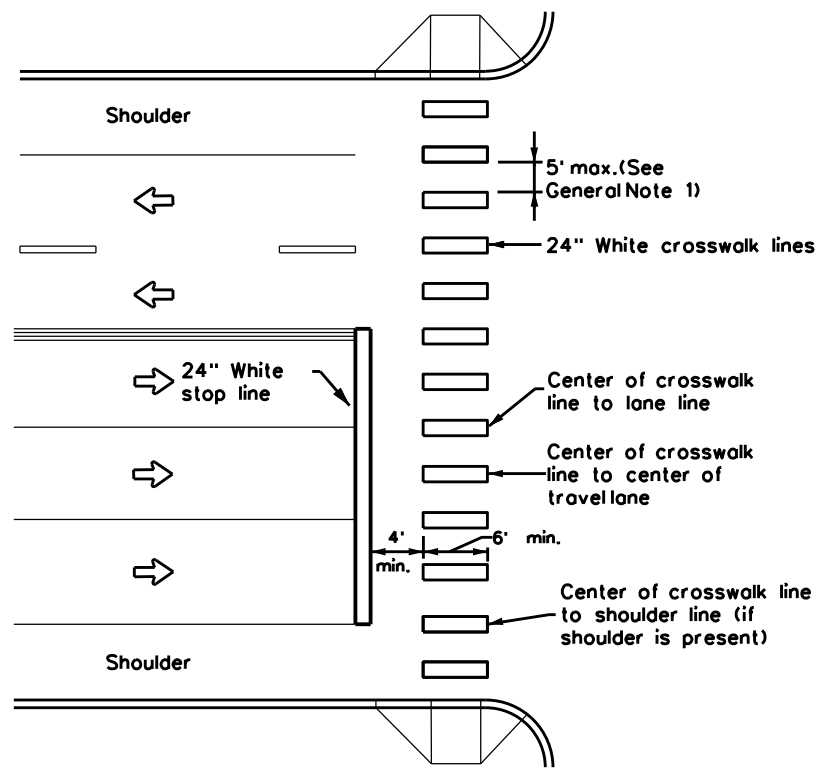


HIGH-VISIBILITY LONGITUDINAL CROSSWALK AT CONTROLLED APPROACH

GENERAL NOTES

1. Longitudinal crosswalk lines should not be placed in the wheel path of vehicles. Center the crosswalk lines on travel lanes, lane lines, and shoulder lines (if present).
2. A minimum 6" clear distance shall be provided to the curb face. If the last crosswalk line falls into this distance it must be omitted.
3. For divided roadways, adjustments in spacing of the crosswalk lines should be made in the median so that the crosswalk lines are maintained in their proper location across the travel portion of the roadway.
4. At skewed crosswalks, the crosswalk lines are to remain parallel to the lane lines.
5. Each crosswalk shall be a minimum of 6' wide.
6. The High-Visibility Longitudinal Crosswalk is the preferred crosswalk pattern on State Highways. Other crosswalk patterns as shown in the "Texas Manual on Uniform Traffic Control Devices" may be used. All crosswalk designs and dimension shall comply with the "Texas Manual on Uniform Traffic Control Devices."
7. Final placement of Stop Bar and Crosswalk shall be approved by the Engineer in the field.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

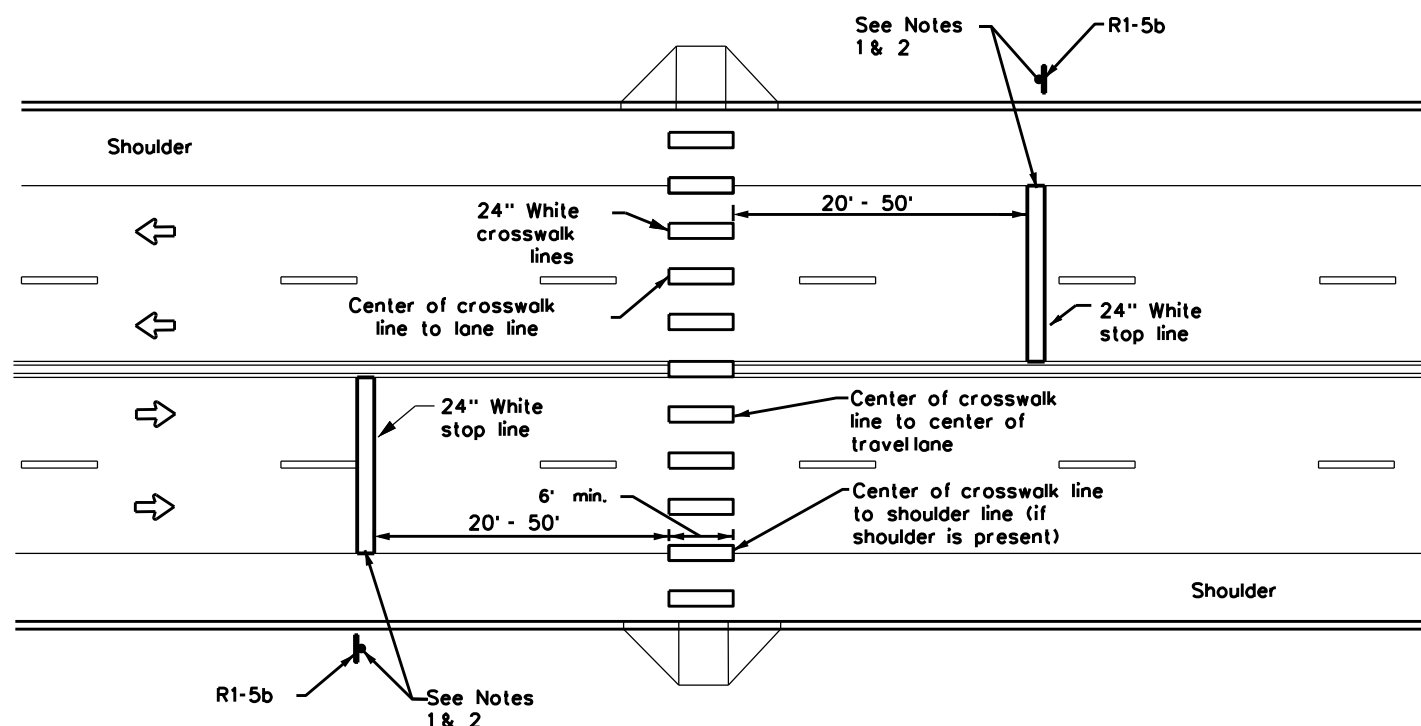

UNSIGNALIZED MIDBLOCK HIGH-VISIBILITY LONGITUDINAL CROSSWALK



NOTES:

1. Use stop bars with Stop Here For Pedestrians (R1-5b) signs at unsignalized midblock crosswalks.
2. Use stop bars with STOP HERE ON RED (R10-6 or R10-6a) signs at midblock crosswalks controlled by traffic signals or pedestrian hybrid beacons.

		Traffic Safety Division Standard	
<h2>CROSSWALK PAVEMENT MARKINGS</h2> <h3>PM(4)-22A</h3>			
FILE: pm4-22a.dgn	DN:	CK:	DW:
© TxDOT December 2022	CONT	SECT	JOB
REVISIONS	0013	07	087
6-20	DIST	COUNTY	HIGHWAY
6-22	FTW	WISE	US 81
12-22			SHEET NO.
			43

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:06:29 PM
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCN\044 PM(AP)-21.dgn

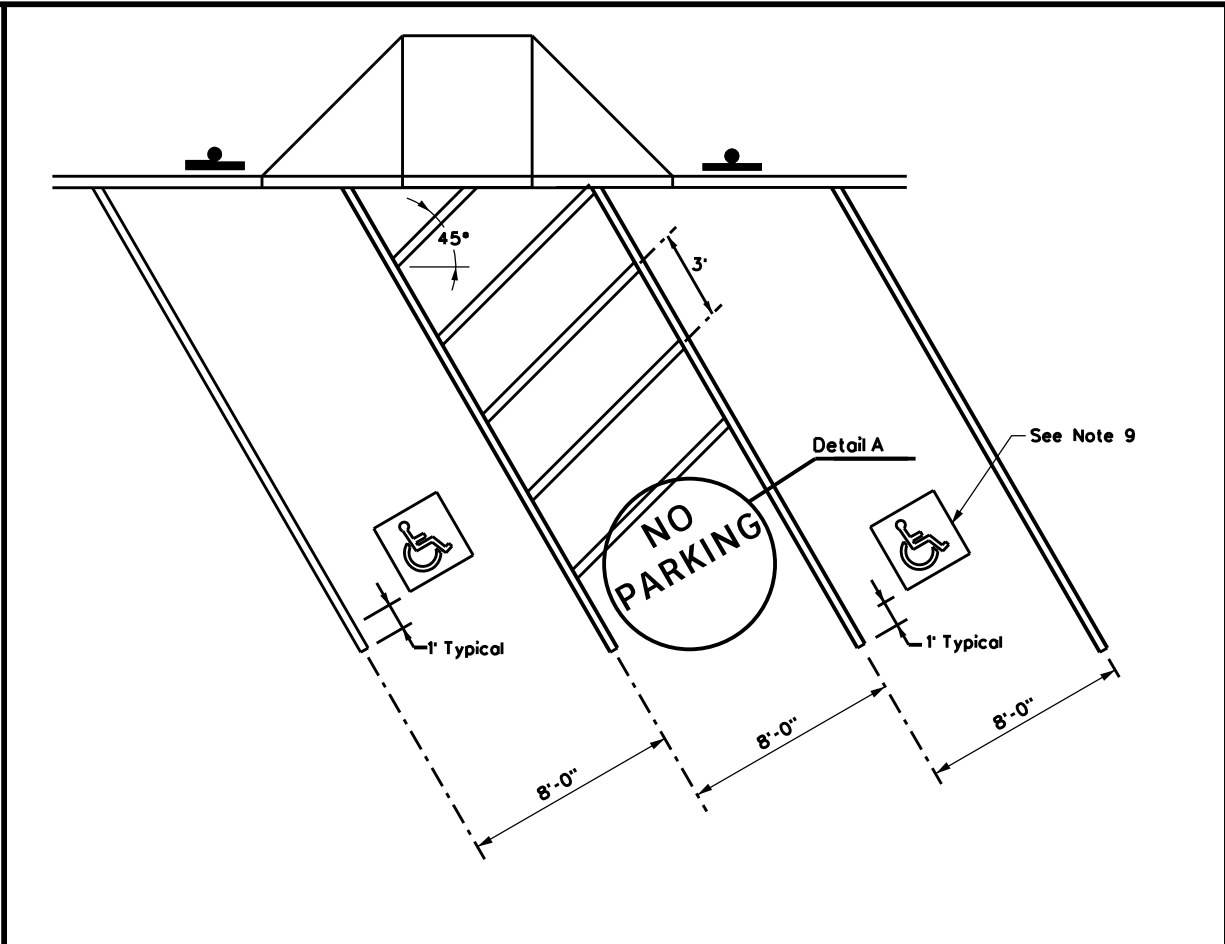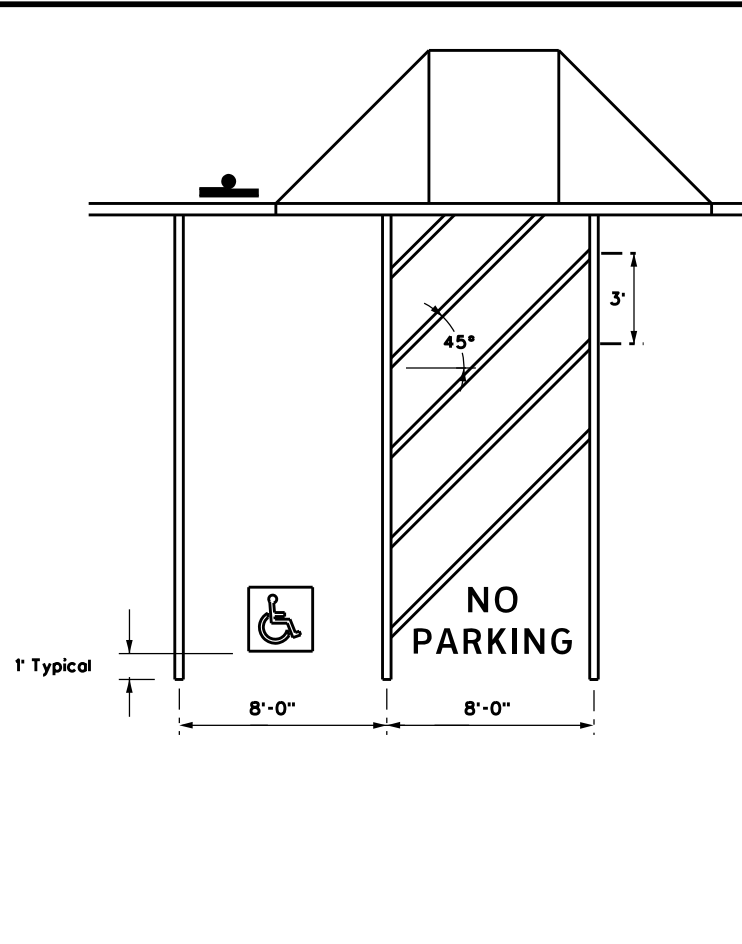


PERPENDICULAR OR ANGLED ACCESSIBLE PARKING SPACE DIMENSIONS



R7-8T



R7-8P



R7-8oPT

ACCESSIBLE PARKING SIGNS



Detail A

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
SIGN FACE MATERIALS	DMS-8300

GENERAL NOTES:

- All paved accessible parking space limit lines shall be 4" solid white lines.
- Paved accessible parking spaces must include a white International Symbol of Accessibility applied conspicuously on the surface in a color that contrasts the pavement. A blue background with white border may supplement the symbol for additional contrast.
- The words "NO PARKING" must be applied on any access aisle adjacent to the parking space. The words must be white, applied:
 - in all capital letters.
 - centered within each access aisle adjacent to the parking space.
- RESERVED PARKING (R7-8T) sign including the International Symbol of Accessibility.
 - shall be REQUIRED for each accessible parking space.
 - shall NOT be placed between two accessible parking spaces.
 - shall NOT be placed in a location that restricts movement of wheelchairs within the adjacent sidewalk.
 - shall have a mounting height of 7 feet to the bottom of the sign.
- A sign identifying the consequences of parking illegally in a paved accessible parking space. Must:
 - at a minimum state "VIOLATORS SUBJECT TO FINE AND TOWING" (Plaque)(R7-8oPT).
 - be mounted on a pole, post, wall or freestanding board.
 - be no more than eight inches (8") below sign R7-8T or a sign required by the Texas Accessibility Standards, 502.6.
 - be installed so that the bottom edge of the sign is no lower than 48 inches and no higher than 80 inches above the ground level.
- Signs identifying van parking spaces shall contain the designation "VAN ACCESSIBLE" (R7-8P) Signs shall be 60 inches minimum above the ground level measured to the bottom of the sign.
- Perpendicular or angled parking spaces shall be 8 feet wide minimum with an access aisle 8 feet minimum wide (van accessible). Two parking spaces are permitted to share a common access aisle.
- Access aisles shall be at street level, extend the full length of the parking space they serve, follow ADA surface requirements, and marked to discourage parking in the access aisle. Curb ramps shall connect the access aisle to the adjacent pedestrian access route. Curb ramps shall not be located within the access aisle.
- International Symbol of Accessibility Parking Space Marking and sign details can be found in The Standard Highway Sign Designs for Texas (SHSD) at the following website. <http://www.txdot.gov/>

Texas Department of Transportation Traffic Safety Division Standard

PAVEMENT MARKINGS AND SIGNING FOR ACCESSIBLE PARKING

PM(AP)-21

FILE: pm(ap)-21	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT July 2021	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
	DIST	COUNTY	SHEET NO.	
	FTW	WISE	44	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

Post Type

- FRP • Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
- TWT • Thin-Walled Tubing (see SMD(TWT))
- 10BWC • 10 BWC Tubing (see SMD(SLIP-1) to (SLIP-3))
- S80 • Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)


Anchor Type

- UA • Universal Anchor - Concreted (see SMD(FRP) and (TWT))
- UB • Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
- WS • Wedge Anchor Steel (see SMD(TWT))
- WP • Wedge Anchor Plastic (see SMD(TWT))
- SA • Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
- SB • Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

Sign Mounting Designation



- P • Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
- T • Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
- U • Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
- IF REQUIRED
- TEXT or 2EXT • Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
- BM • Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
- WC • 1.12 "/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
- EXAL • Extruded Aluminum Sign Panels (see SMD(SLIP-3))

REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT



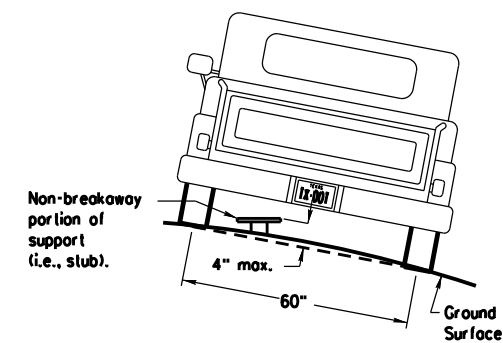


To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheelpaths).

SIGN LOCATION

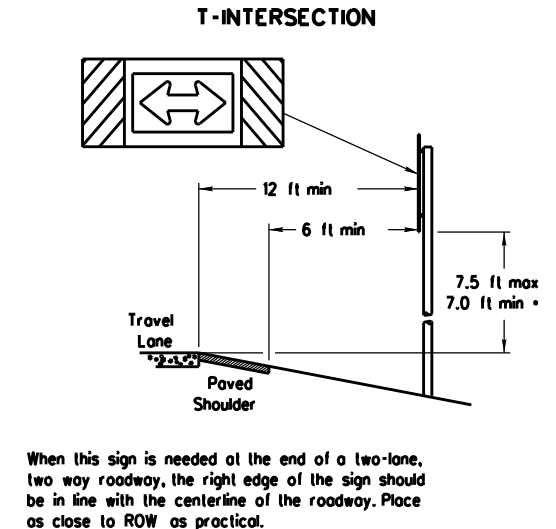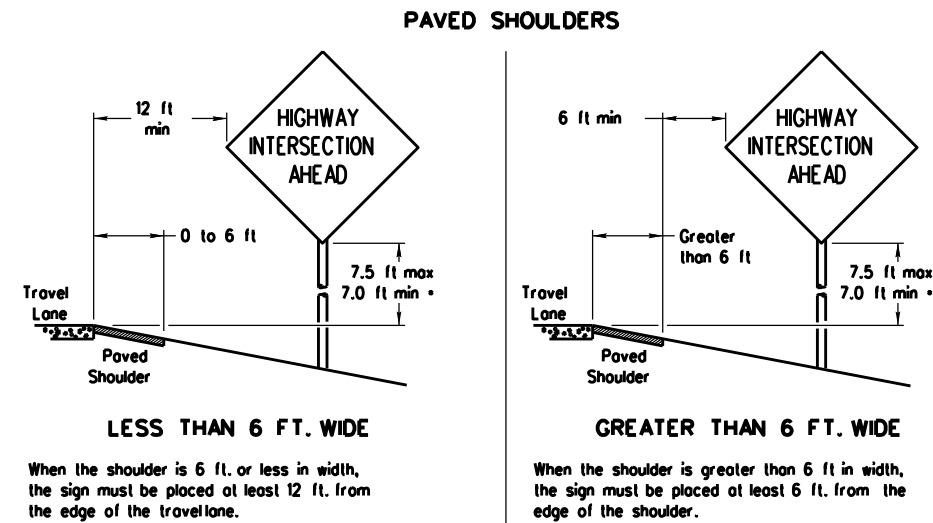


No more than 2 sign posts should be located within a 7 ft. circle.

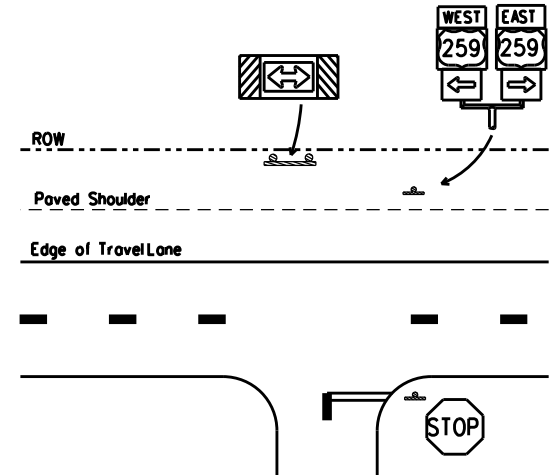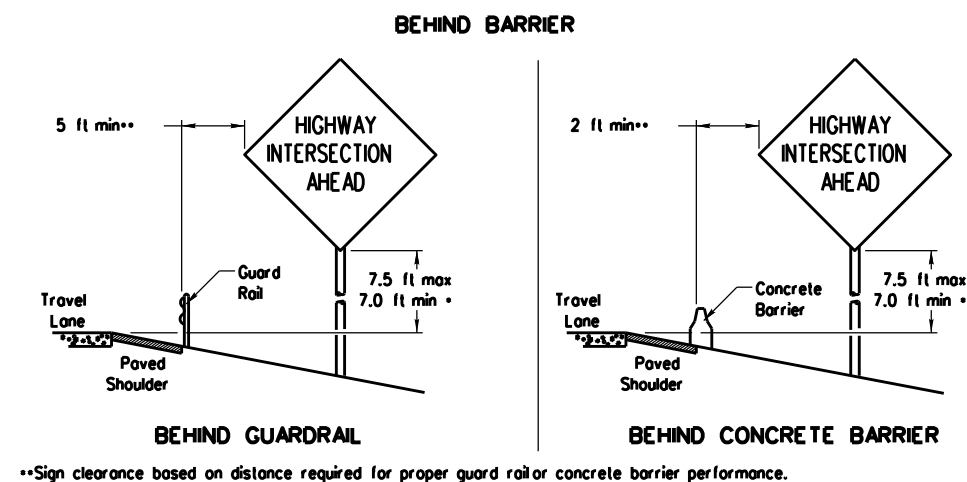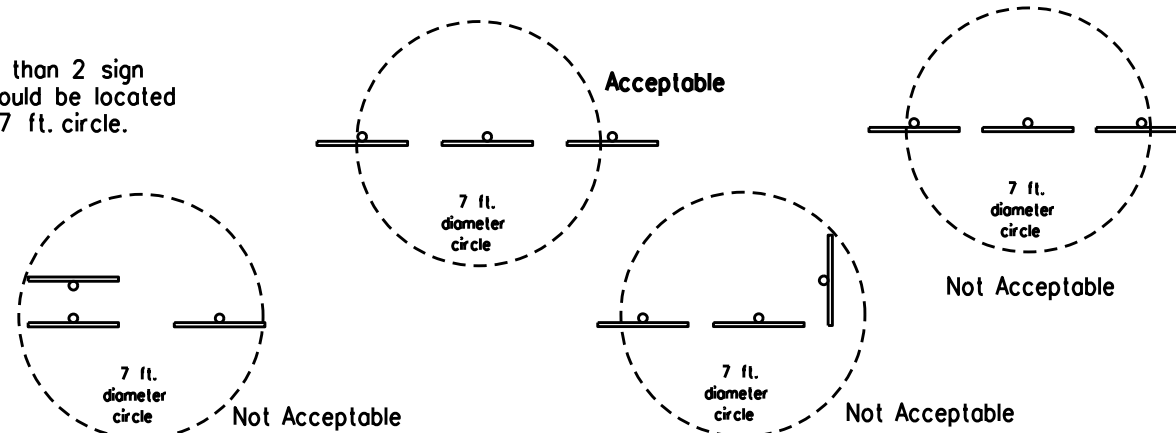

- Signs shall be mounted using the following condition that results in the greatest sign elevation:
 - (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
 - (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.
- The maximum values may be increased when directed by the Engineer.
- See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.
- The website address is: <http://www.txdot.gov/publications/traffic.htm>

TYPICAL SIGN ATTACHMENT DETAIL

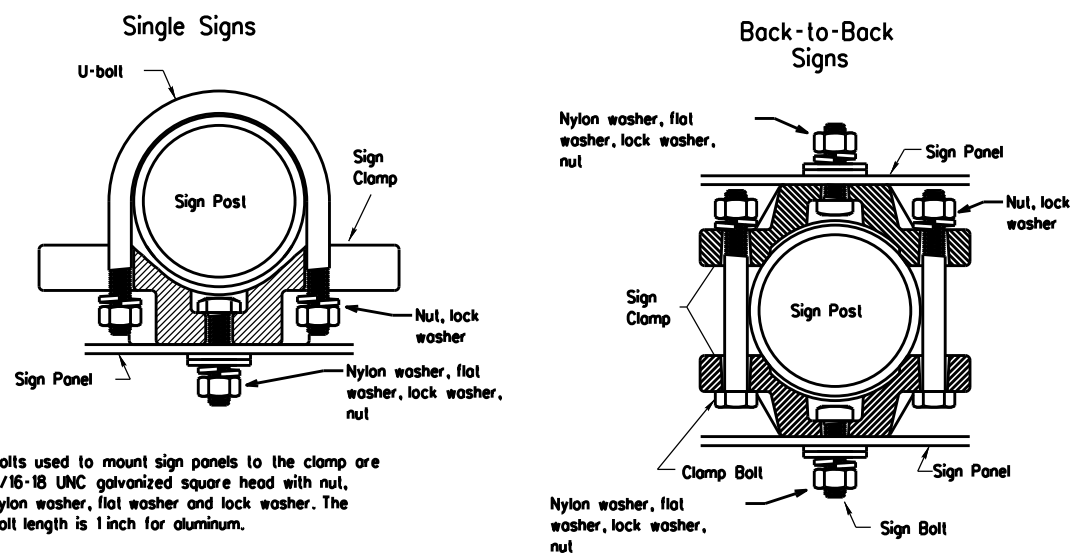


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.


Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

SIGNS WITH PLAQUES

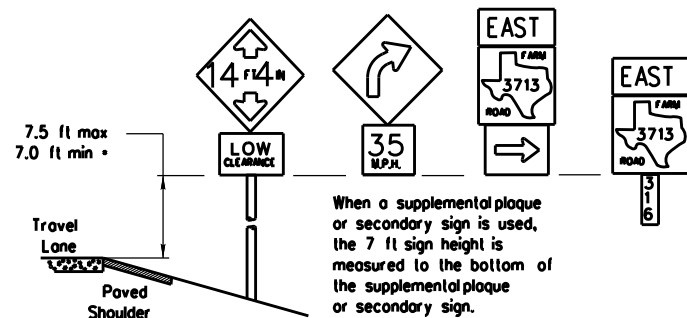


When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

CURB & GUTTER OR RAISED ISLAND

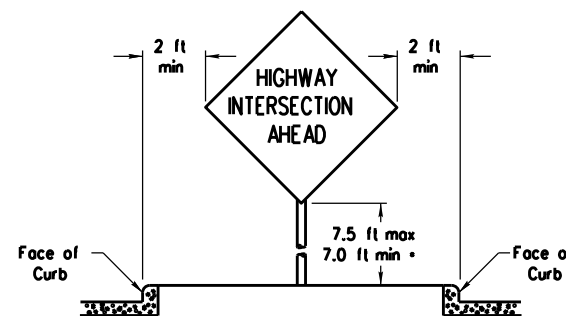

RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

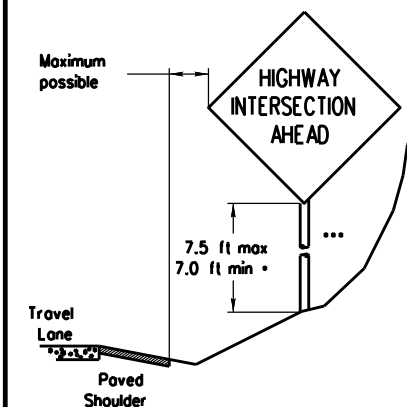

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

Texas Department of Transportation
Traffic Operations Division

SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS


SMD(GEN)-08

© TxDOT July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	CONT: 0013	SECT: 07	JOB: 087	HIGHWAY: US 81
	DIST: FTW	COUNTY: WISE	SHEET NO.: 45	

DATE: 5/10/2023 3:06:33 PM
FILE: T:\DISMANT\SRASIGN\Wise County\PS&E\DCN\045_SMD(GEN)-08.dgn

TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

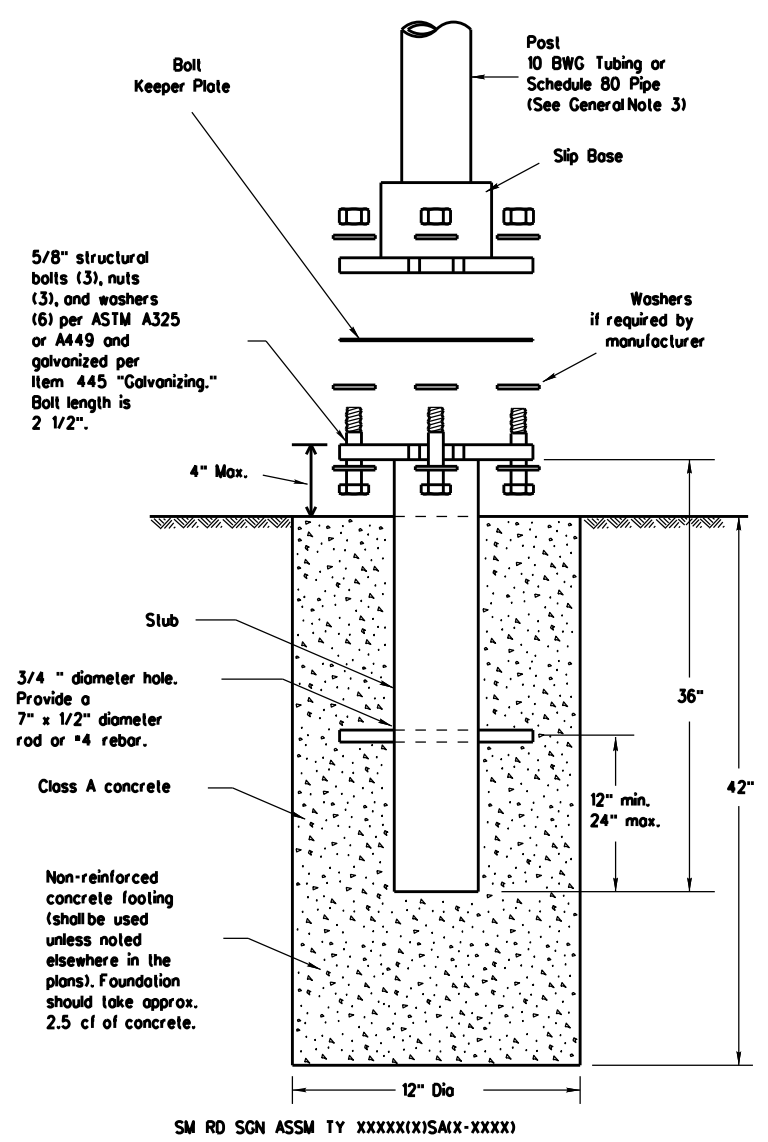

SM RD SGN ASSM TY XXXXX(X)SA(X-XXXX)

NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. http://www.txdot.gov/business/producer_list.htm The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.


GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
 - 10 BWG Tubing (2.875" outside diameter)
 - 0.134" nominal wall thickness
 - Seamless or electric-resistance welded steel tubing or pipe
 - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
 - Other steels may be used if they meet the following:
 - 55,000 PSI minimum yield strength
 - 70,000 PSI minimum tensile strength
 - 20% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
 - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
 - Galvanization per ASTM A123 or ASTM A653 G210. For pre-coated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
 - Schedule 80 Pipe (2.875" outside diameter)
 - 0.276" nominal wall thickness
 - Steel tubing per ASTM A500 Gr C
 - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
 - 46,000 PSI minimum yield strength
 - 62,000 PSI minimum tensile strength
 - 21% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
 - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
 - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

ASSEMBLY PROCEDURE

- Foundation**
- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
 - The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
 - Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
 - Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
 - The triangular slipbase system is multidirectional and is designed to release when struck from any direction.
- Support**
- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
 - Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

CONCRETE ANCHOR

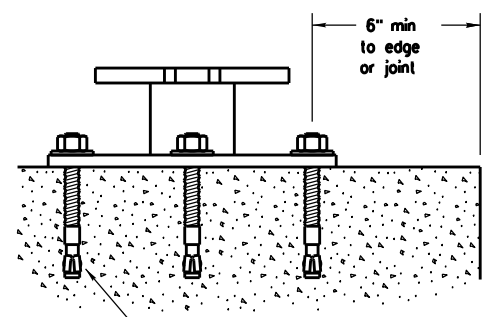

5/8" diameter Concrete Anchor - 8 places (embed a minimum of 5 1/2" and torque to min. of 50 ft-lbs). Anchor may be expansion or adhesive type.

SM RD SGN ASSM TY XXXXX(X)SB(X-XXXX)

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

DATE: 5/10/2023 3:06:38 PM
FILE: T:\DISMANT\SRM DESIGN\Wise County\PS&E\DCN\046_SMD(SLIP-1)-08.dgn












SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-1)-08



© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS		CONTRACT	SECTION	JOB
			0013	07	087
			DISTRICT	COUNTY	HIGHWAY
			FTW	WISE	US 81
				SHEET NO.	46

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the construction of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:06:42 PM
 FILE: T:\DISMANT\SRA DESIGN\Wise County\PS&E\DCN\047_SMD(SLIP-2)-08.dgn

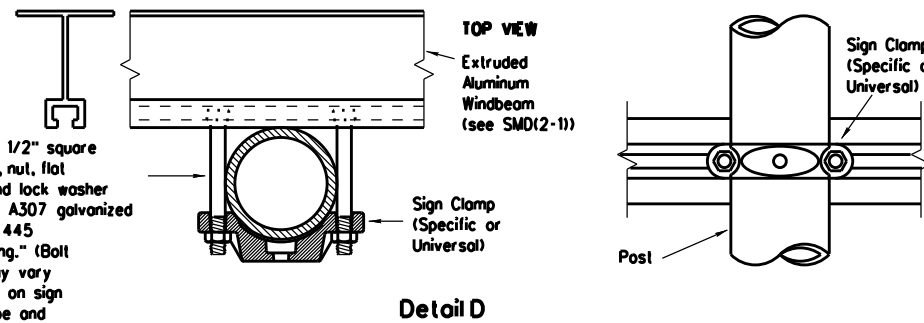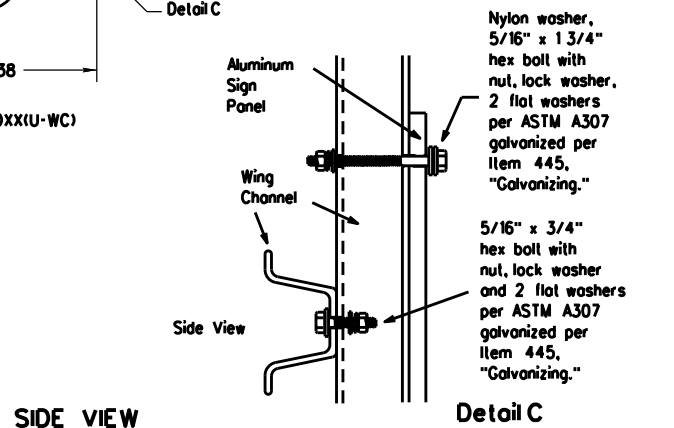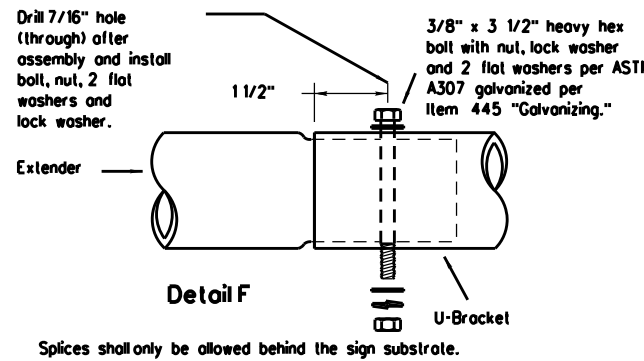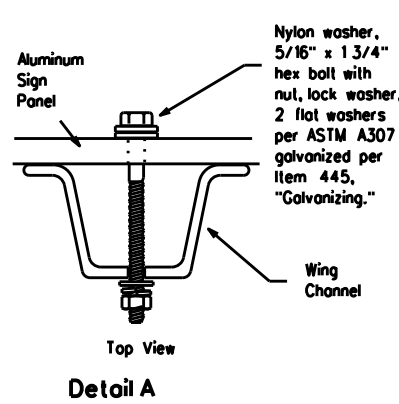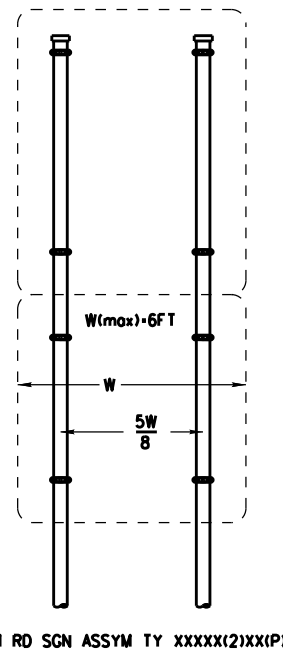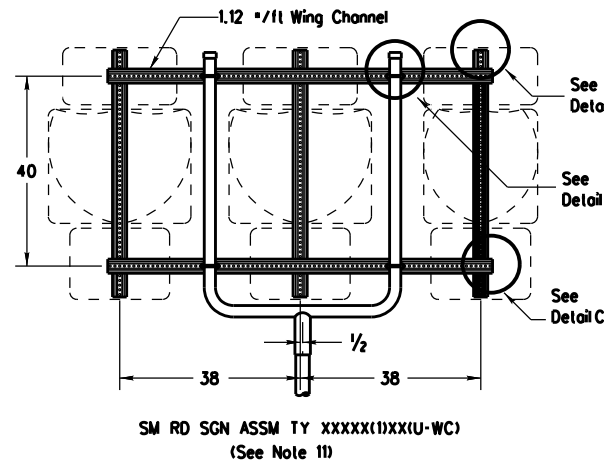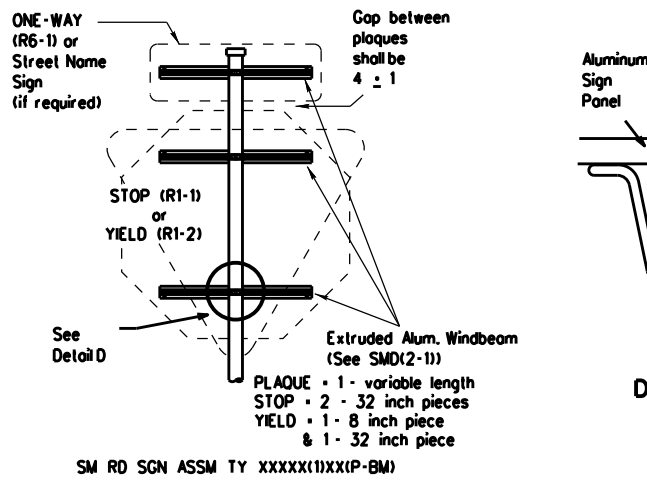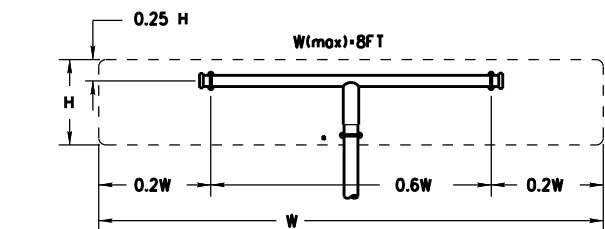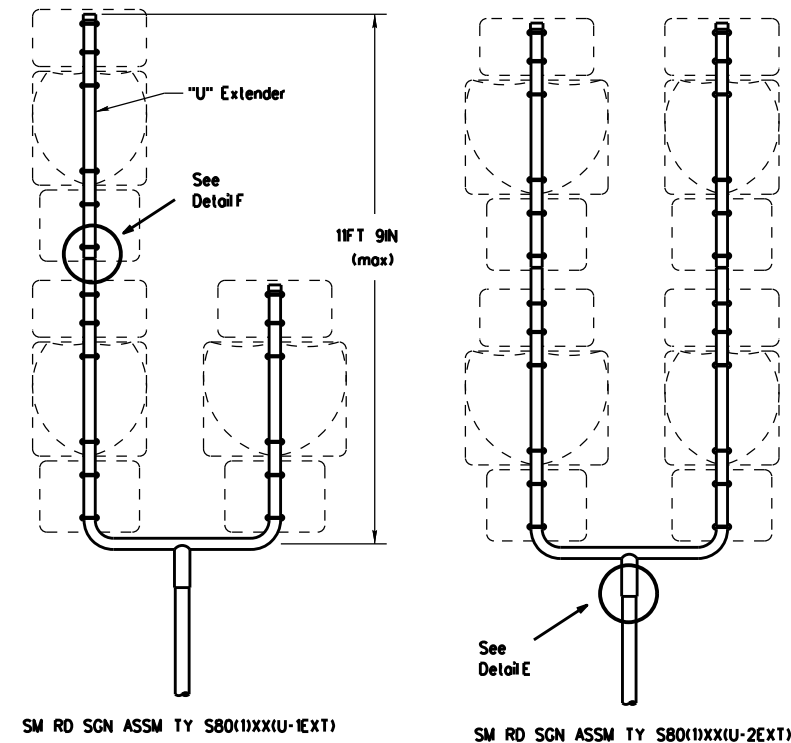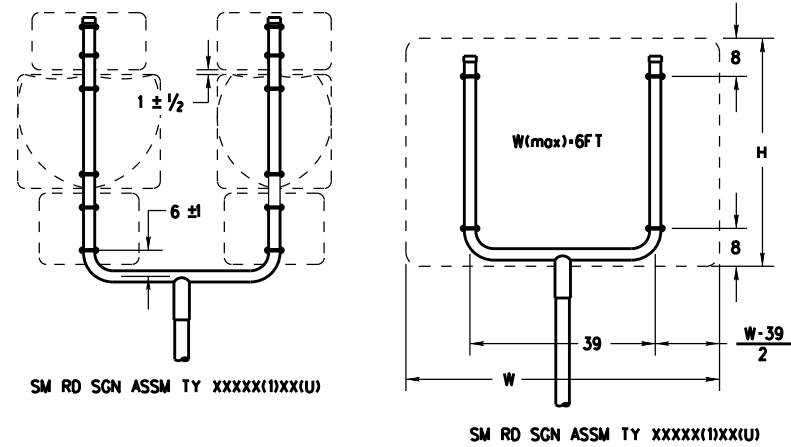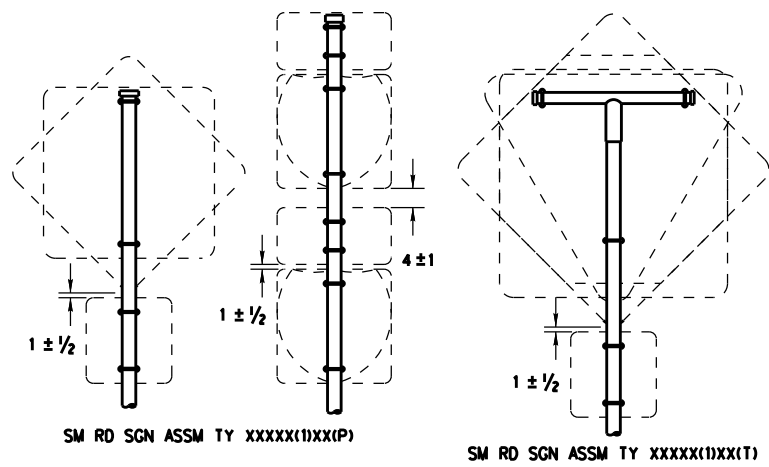

Friction caps may be manufactured from hot rolled or cold rolled steelsheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

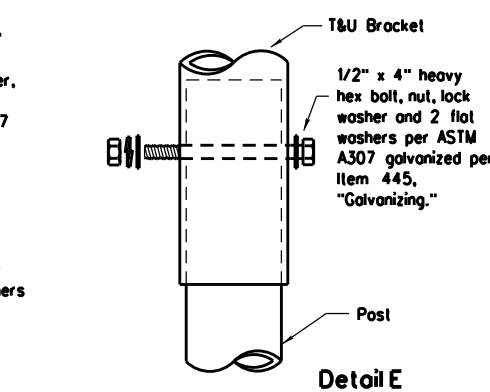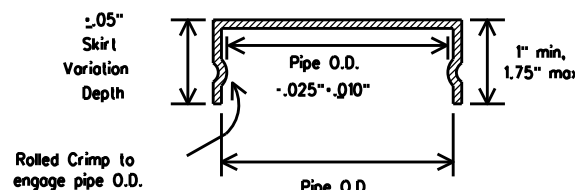

GENERAL NOTES:

- | SIGN SUPPORT | OF POSTS | MAX. SIGN AREA |
|--------------|----------|----------------|
| 10 BWC | 1 | 16 SF |
| 10 BWC | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWC where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT	
SIGN DESCRIPTION	SUPPORT
48-inch STOP sign (R1-1)	TY 10BWC(1)XX(T) TY 10BWC(1)XX(P-BM)
60-inch YIELD sign (R1-2)	TY 10BWC(1)XX(T) TY 10BWC(1)XX(P-BM)
48x16-inch ONE-WAY sign (R6-1)	TY 10BWC(1)XX(T) TY 10BWC(1)XX(P-BM)
36x48, 48x36, and 48x48-inch signs	TY 10BWC(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48x48-inch signs (diamond or square)	TY 10BWC(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48-inch Advance School X-ing sign (S1-1)	TY 10BWC(1)XX(T)
48-inch School X-ing sign (S2-1)	TY 10BWC(1)XX(T)
Large Arrow sign (W1-6 & W1-7)	TY 10BWC(1)XX(T)











Texas Department of Transportation
 Traffic Operations Division

SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-2)-08

© TxDOT July 2002		DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0013	07	087	US 81
		DIST	COUNTY		SHEET NO.
		FTW	WISE		47

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023 3:06:46 PM
 FILE: T:\DISMANT\SRA DESIGN\Wise County\PS&E\DCN\048_SMD(SLIP-3)-08.dgn

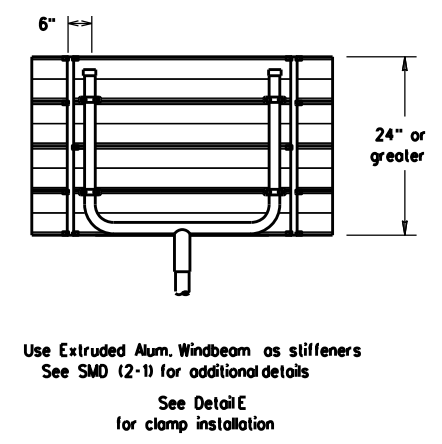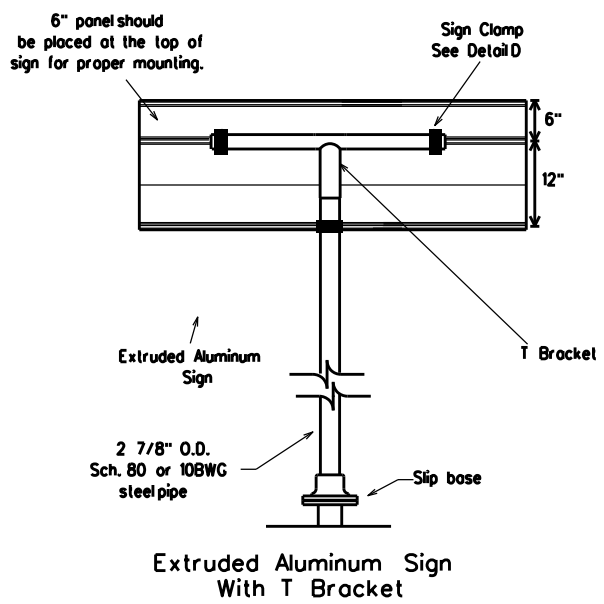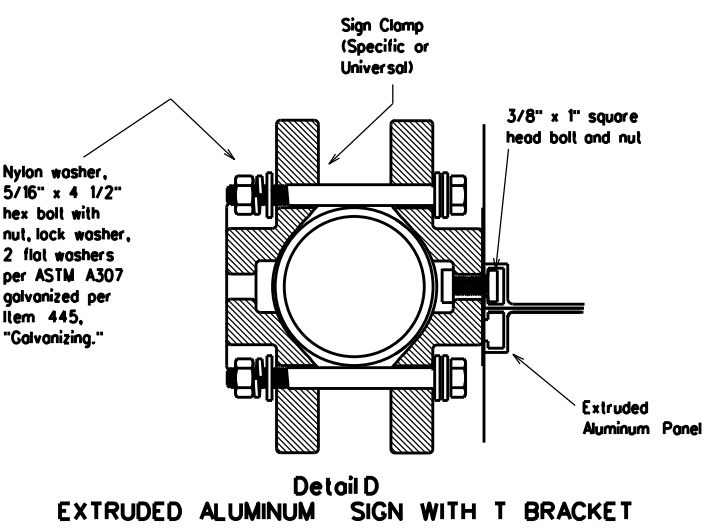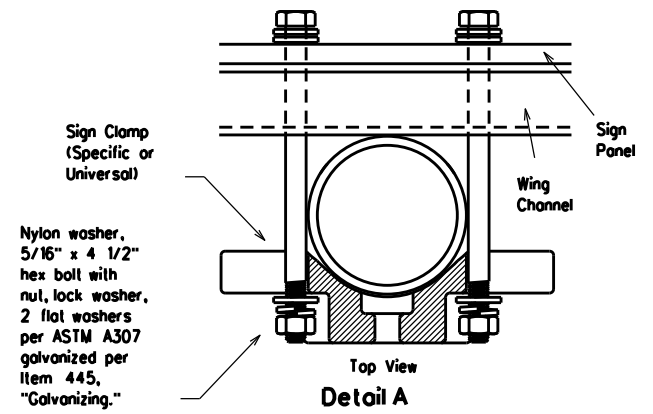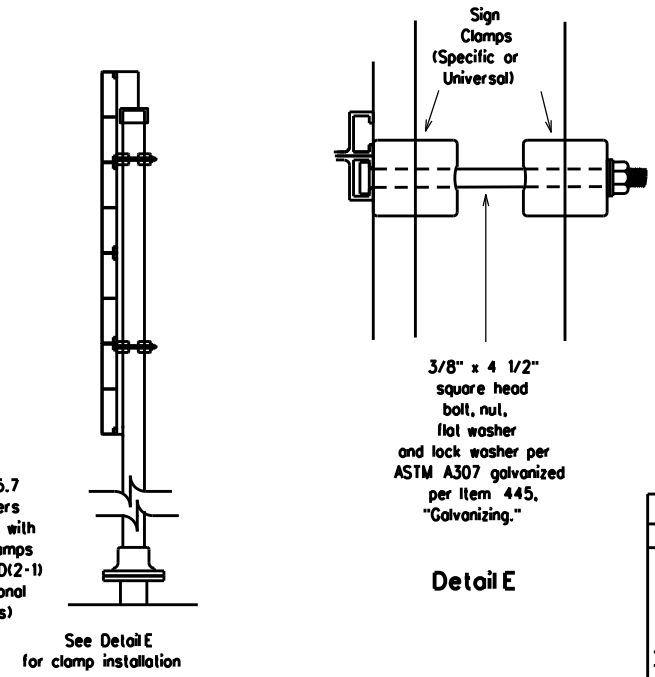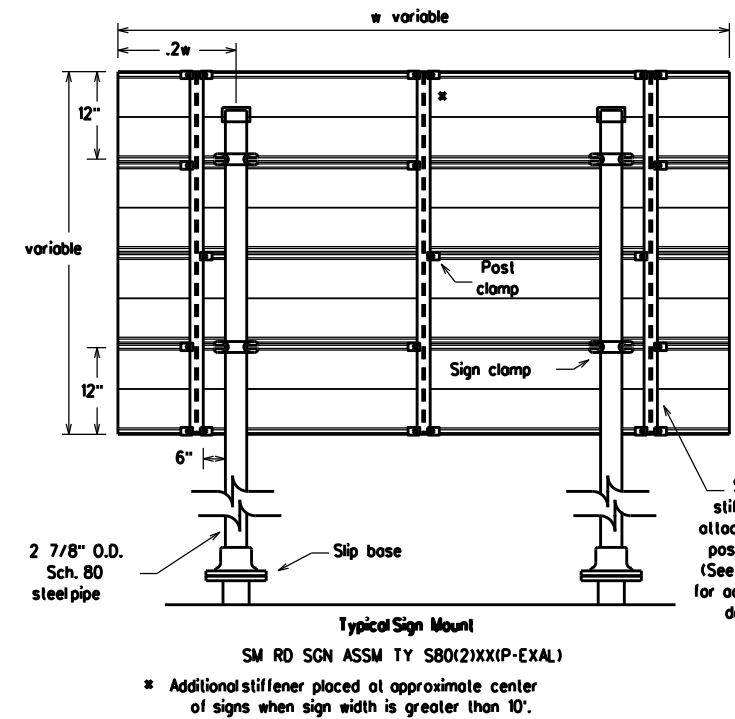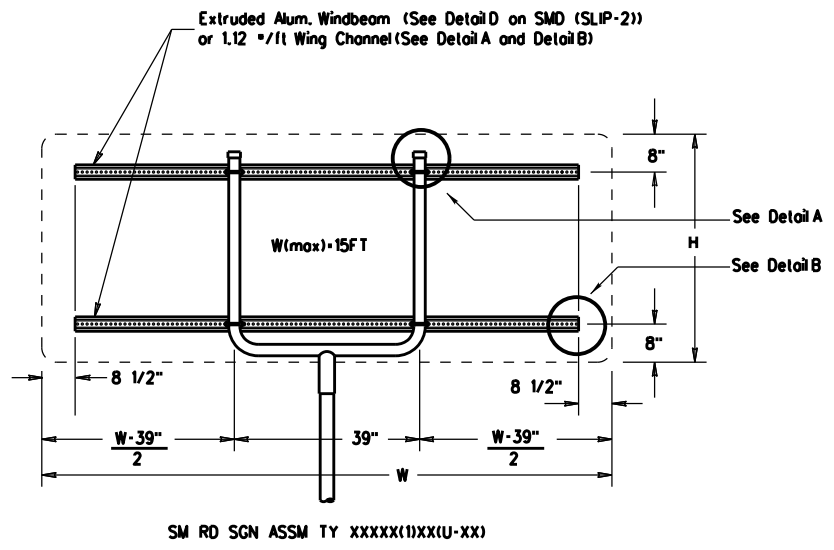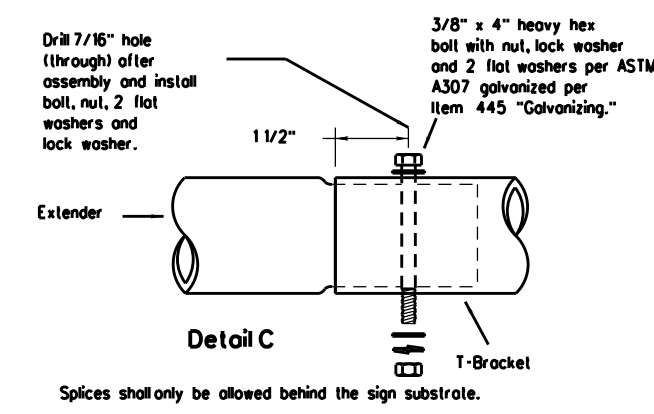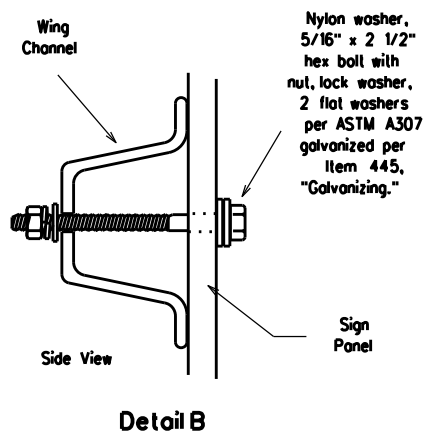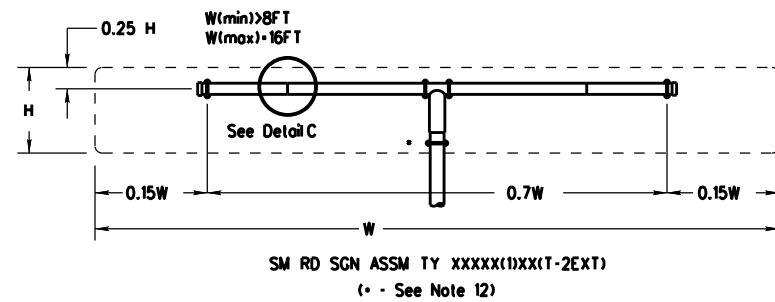

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.

REQUIRED SUPPORT	
SIGN DESCRIPTION	SUPPORT
48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)




SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-3)-08


© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0013	07	087	US 81
		DIST	COUNTY		SHEET NO.
		FTW	WISE		48

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.




Wedge Anchor Steel System

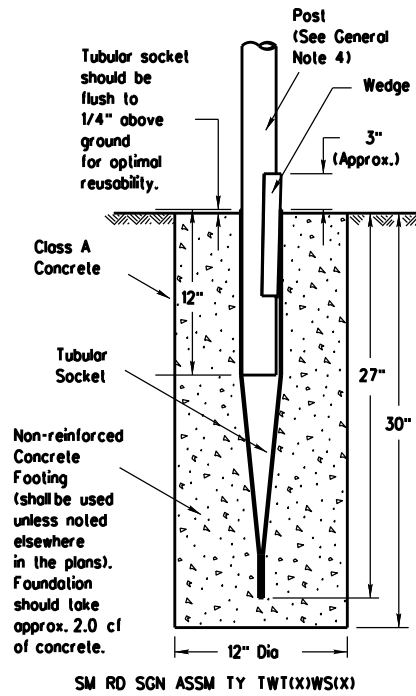

Wedge Anchor High Density Polyethylene (HDPE) System

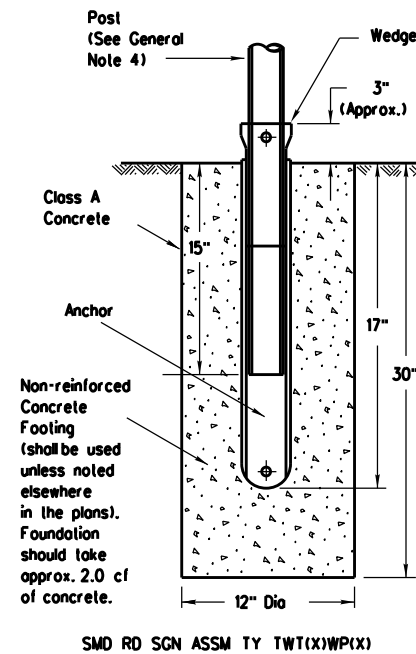


Universal Anchor System with Thin-Walled Tubing Post

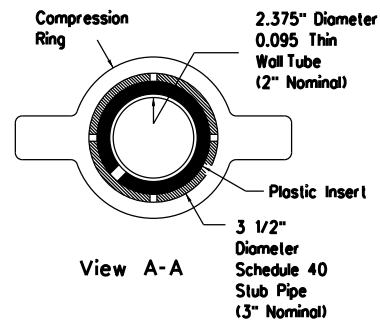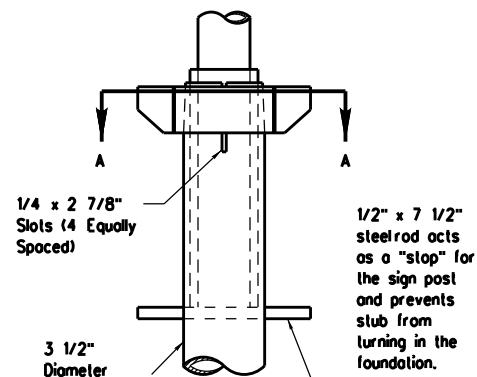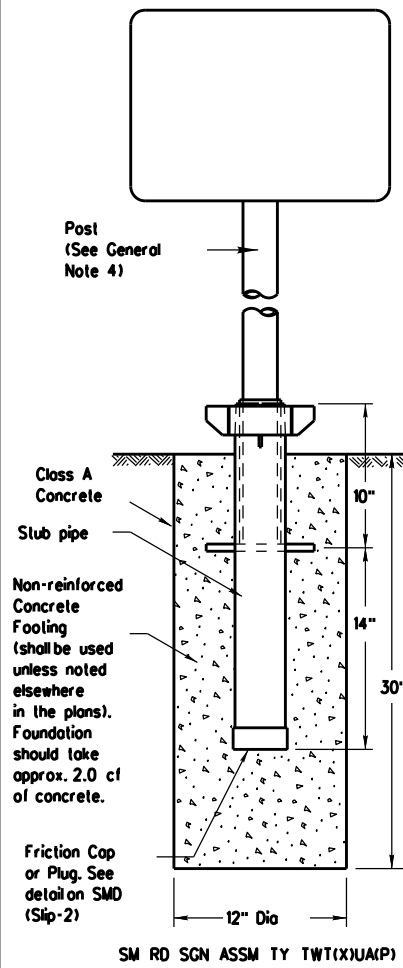


Plastic insert must be used when using the TWT with either the Universal Anchor System or the Bolt Down Universal Anchor System. The insert should be approx. 10" long and cover the tubing from just above the top of the stub pipe to the bottom of the sign post when using the Universal Anchor System. The insert should be cut to approx. 4 1/2" when used with the Bolt Down Universal Anchor System.



5/8" diameter Concrete Anchor - 4 places (embed a min. of 3 3/8" and torque to min. of 50 ft-lbs). Anchor may be expansion or adhesive type.

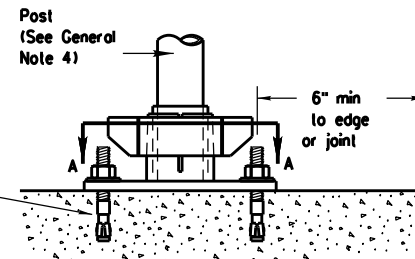

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. A heavy hex nut per ASTM A563 and hardened washer per ASTM F436. The stud bolt shall have minimum yield and ultimate tensile strengths of 50 and 75 ksi, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Top of bolt shall extend at least flush with top of nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 3 3/8" minimum embedment, shall have a minimum allowable tension and shear of 2450 and 1525 psi, respectively. Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations.

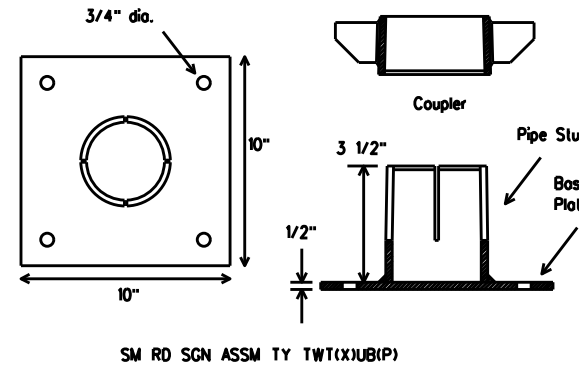

Sign Installation Using a Prefabricated T-Bracket for Thin-Wall Tubing Post

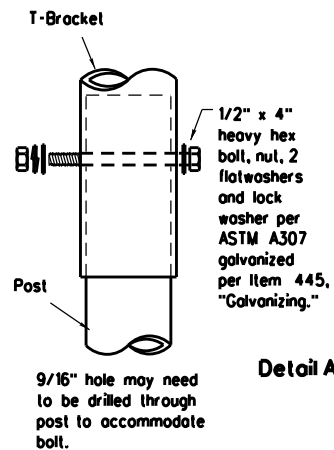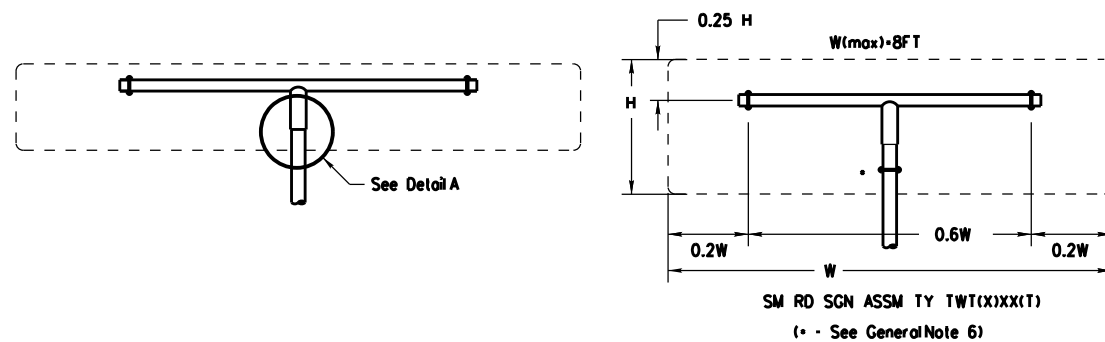

NOTE
The devices shall be installed per manufacturer's recommendations. Installation procedures shall be provided to the Engineer by Contractor.

GENERAL NOTES:

- The Wedge Anchor System and the Universal Anchor System with thin wall tubing post may be used to support up to 10 square feet of sign area.
- The tubular socket, wedge and prefabricated T-bracket shall be permanently marked to indicate manufacturer, Method, design, and location of marking are subject to the approval of the TxDOT Traffic Standards Engineer.
- Except for posts (13 BWG Tubing), clamps, nuts and bolts, all components shall be prequalified. A list of prequalified vendors may be obtained from the Material Producer List web page. The website address is: http://www.txdot.gov/business/producer_list.htm
- Material used as post with this system shall conform to the following specifications:
13 BWG Tubing (2.375" outside diameter) (TWT)
0.095" nominal wall thickness
Seamless or electric-resistance welded steel tubing
Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
Other steels may be used if they meet the following:
55,000 PSI minimum yield strength
70,000 PSI minimum tensile strength
18% minimum elongation in 2"
Wall thickness (uncoated) shall be within the range of .083" to .099"
Outside diameter (uncoated) shall be within the range of 2.369" to 2.381"
Galvanization per ASTM 123 or ASTM A653 G210. For pre-coated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24" high signs. Place clamp at least 3" above bottom of sign when possible.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- See the Traffic Operations Division website for detailed drawings of sign clamps and Wedge Anchor System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>

WEDGE ANCHOR SYSTEM INSTALLATION PROCEDURE

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Place concrete into hole until it is approximately flush with the ground. Concrete shall be Class A.
- Insert tubular socket into concrete until top of socket is approximately 1/4" above the concrete footing.
- Plumb the socket. Allow a minimum 4 days for concrete to set, unless otherwise directed by Engineer.
- Attach the sign to the sign post.
- Insert the sign post into socket and align sign face with roadway.
- Drive the wedge into the socket to secure post. This will leave approximately 3 inches of the wedge exposed.

UNIVERSAL ANCHOR SYSTEM INSTALLATION PROCEDURE

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- Insert base post in hole to depths shown and backfill hole with concrete.
- Level and plumb the base post using a torpedo level and allow concrete adequate time to set. The bottom of the slots provided in the stub pipe shall remain above the top of the concrete foundation.
- Attach the sign to the sign post.
- Install plastic insert around bottom of post.
- Insert sign post into base post. Lower until the post comes to rest on steel rod.
- Seat compression ring using a hammer. Typically, the top of compression ring will be approximately level with top of stub post when optimally installed.
- Check sign post by hand to ensure it is unable to turn. If loose, increase the tightening of the compression ring.



Texas Department of Transportation
Traffic Operations Division

SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS WEDGE & UNIVERSAL ANCHOR WITH THIN WALL TUBING POST SMD(TWT)-08

© TxDOT July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB
		0013	07	087
		DIST	COUNTY	US 81
		FTW	WISE	SHEET NO. 49


Universal Anchor System with Fiberglass Reinforced Plastic (FRP) Post

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

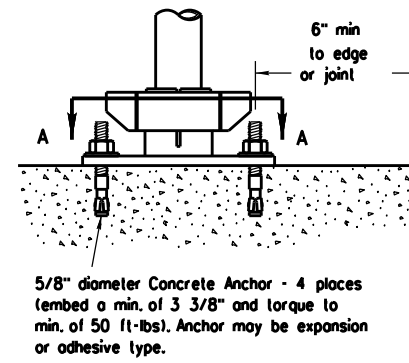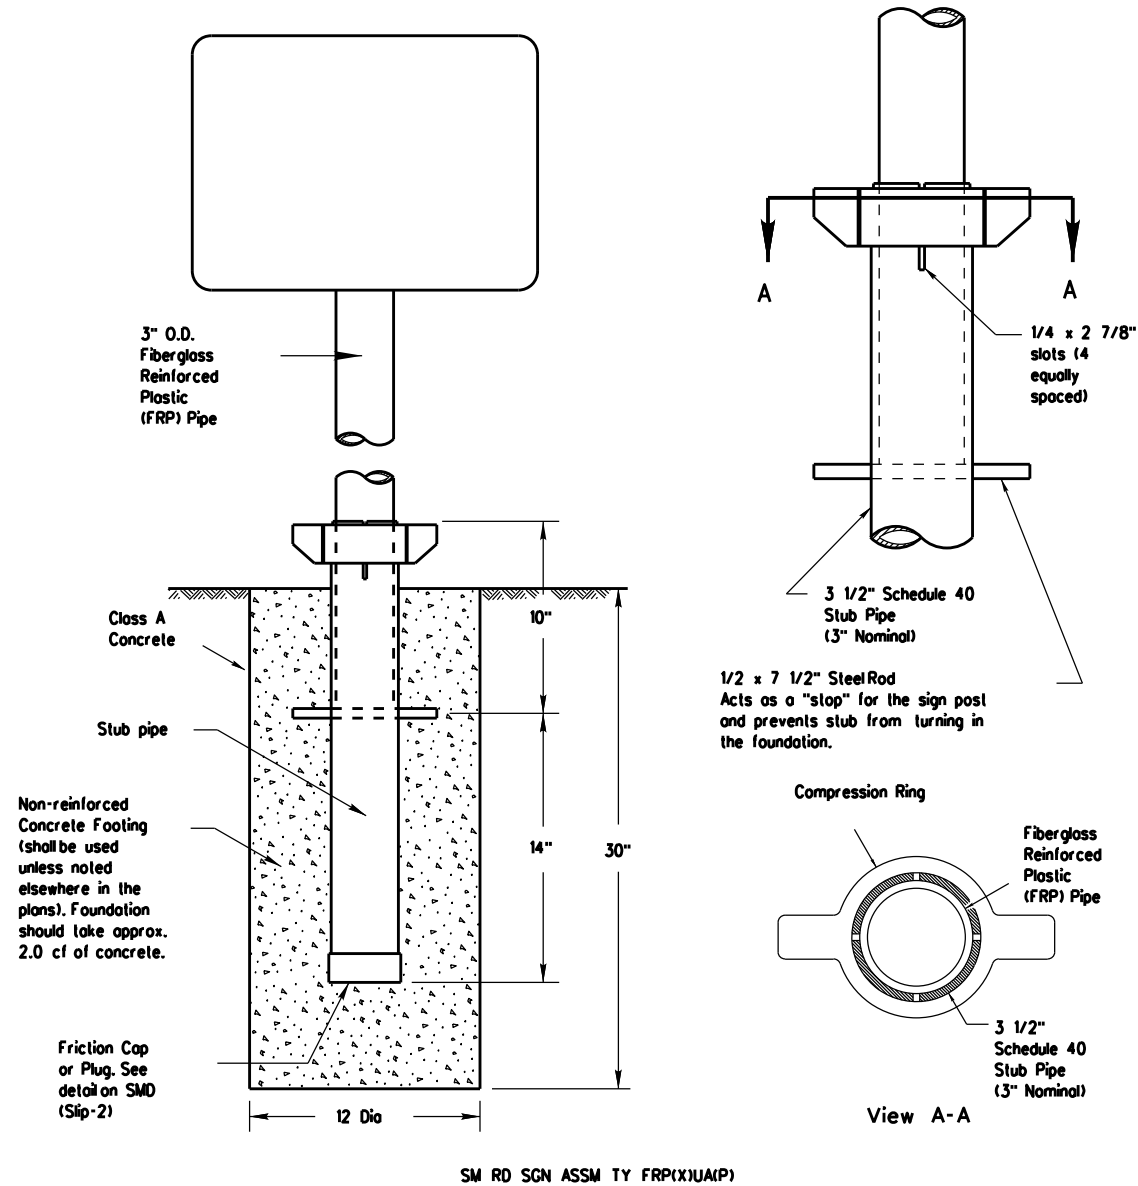

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. A heavy hex nut per ASTM A563 and hardened washer per ASTM F436. The stud bolt shall have minimum yield and ultimate tensile strengths of 50 and 75 ksi, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Top of bolt shall extend at least flush with top of nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 3 3/8" minimum embedment, shall have a minimum allowable tension and shear of 2450 and 1525 psi, respectively. Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxy and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations.

BOLT-DOWN DETAILS

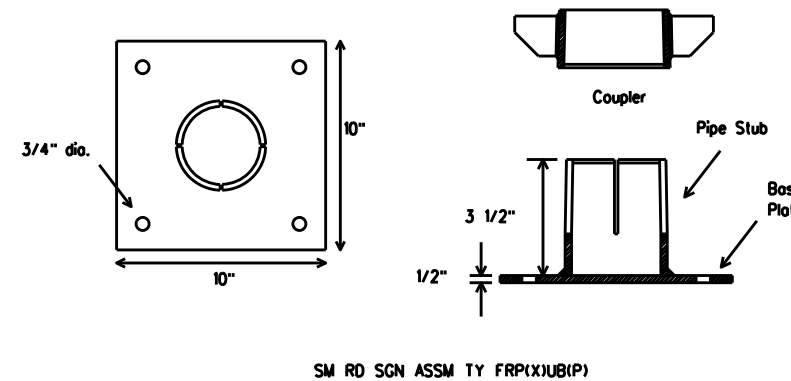

GENERAL NOTES:

- FRP sign supports for a single type sign support may be used for signs up to and including 16 square feet. Dual post installation may be used for signs up to and including 32 square feet.
- All nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing."
- See the Traffic Operations Division website for detailed drawings of sign clamps. The website address is: <http://www.txdot.gov/publications/traffic.htm>

FRP POST REQUIREMENTS

- Materials shall conform to the requirements of Departmental Material Specification DMS-4410 and will be furnished in a yellow or gray color as specified elsewhere in the plans.
- Thickness of FRP sign support is 0.125" ± 0.031", - 0.0".
- FRP sign supports are prequalified by the Traffic Operations Division. Prequalification procedures are obtained by writing:
Texas Department of Transportation
Traffic Operations Division
125 East 11th Street
Austin, Texas 78701-2483


UNIVERSAL ANCHOR SYSTEM INSTALLATION PROCEDURES

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Insert base post in foundation hole to depths shown and fill hole with concrete. Cut base post from bottom and ensure a minimum of 18" embedment if installed in solid rock.
- Level and plumb the base post with coupler using a torpedo level and let concrete set a minimum of 4 days, unless otherwise directed by Engineer. Bottom of base post slots shall be above the concrete footing.
- Attach sign to FRP post.
- Insert sign post into base post. Lower until the post comes to rest on the steel rod.
- Use hammer to ensure the coupler is firmly seated. Top of coupler should be level with top of base post in most instances.
- Check sign to ensure there is no twist. If loose, increase the tightening of coupler.


BOLT DOWN SIGN SUPPORT

- Position base plate with coupler on existing concrete.
- Drill holes into concrete and insert the 5/8" diameter bolts with wedge anchors, and tighten nuts.
- Attach sign to FRP post.
- Insert bottom of sign post into pipe stub.
- Use hammer to ensure the coupler is firmly seated. Top of coupler should be level with top of base post in most instances.
- Check sign to ensure there is no twist. If loose, increase the tightening of coupler.

Typical Sign Mounting Detail for FRP Support with Single Sign

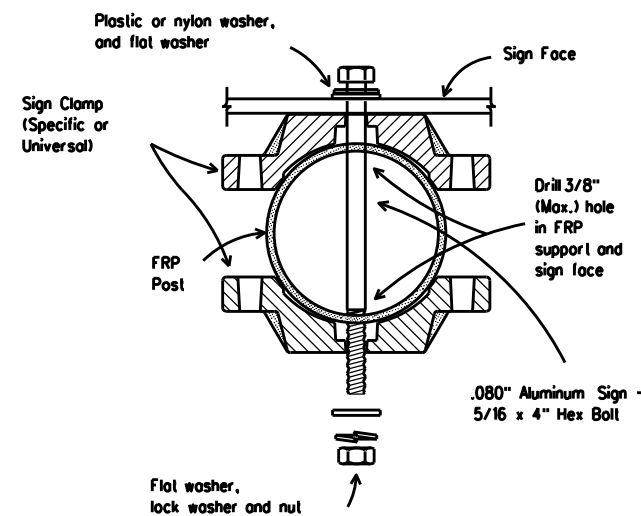

Typical Sign Mounting Detail for FRP Support with Back-to-Back Signs

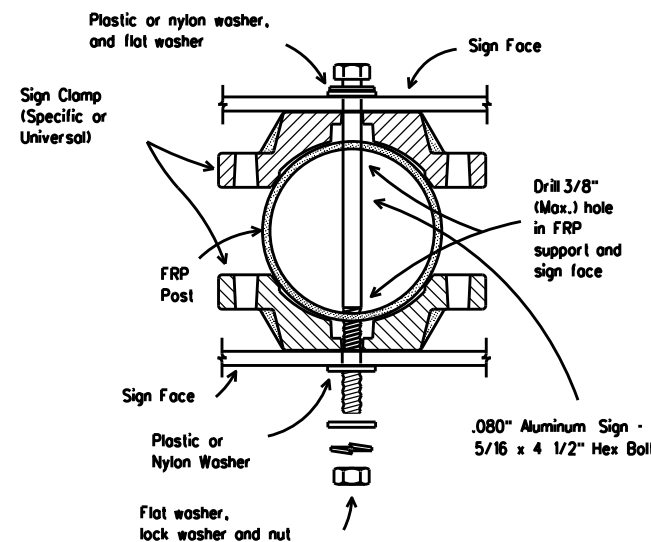


Texas Department of Transportation
Traffic Operations Division

SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS UNIVERSAL ANCHOR SYSTEM WITH FRP POST

SMD(FRP)-08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0013	07	087	US 81
		DIST	COUNTY		SHEET NO.
		FTW	WISE		50

DATE: 5/10/2023 3:06:55 PM
FILE: T:\DISMANT\SRA DESIGN\Wise County\PS&E\DCN\050_SMD(FRP)-08.dgn

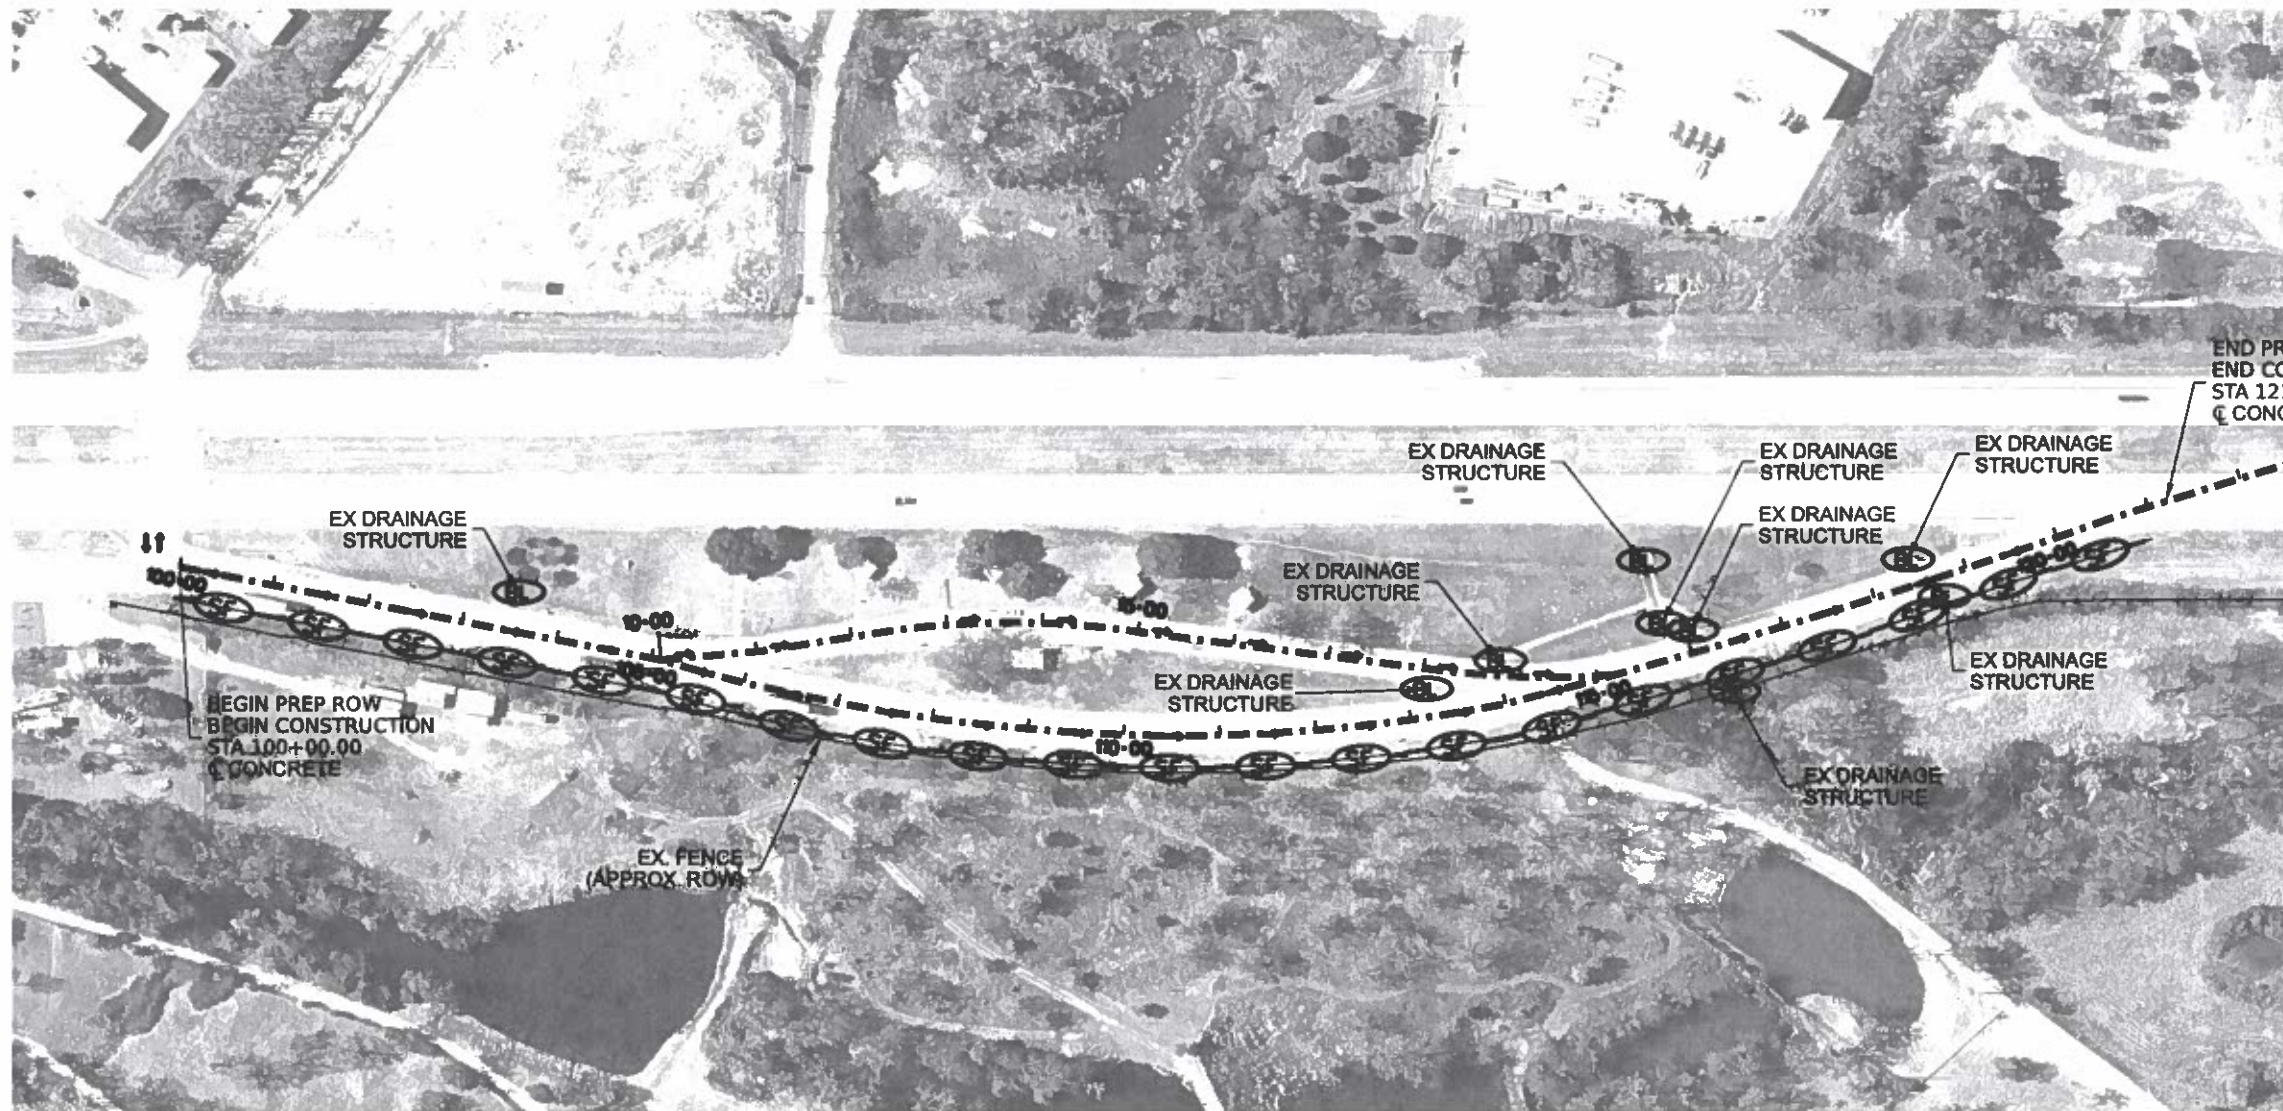

LEGEND	
	TEMPORARY SILT FENCE
	TEMPORARY BIOLOG

NOTES:



Elijah Zelenov, PE
5/12/23

TRAFFIC & EROSION CONTROL PLAN				
	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NO.		SHEET NO.
	6	SEE TITLE SHEET		51
REVISIONS	STATE	DISTRICT	COUNTY	
	TEXAS	FTW	WISE	HIGHWAY NO.
	0013	07	087	US 81

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1.

No Action Required Required Action

Action No.

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

1.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion

- Temporary Vegetation
- Blankets/Mulching
- Mulch
- Sodding
- Interceptor Swale
- Diversion Dike
- Erosion Control Compost
- Mulch Filter Berm and Socks
- Compost Filter Berm and Socks
- Stone Outlet Sediment Traps

Sedimentation

- Silt Fence
- Rock Berm
- Triangular Filter Dike
- Sand Bag Berm
- Straw Bale Dike
- Brush Berms
- Erosion Control Compost
- Mulch Filter Berm and Socks
- Compost Filter Berm and Socks
- Temporary Erosion Control Logs (BIOLOGS)
- Sediment Basins

Post-Construction TSS

- Vegetative Filter Strips
- Retention/Irrigation Systems
- Extended Detention Basin
- Constructed Wetlands
- Wet Basin
- Erosion Control Compost
- Mulch Filter Berm and Socks
- Compost Filter Berm and Socks
- Vegetation Lined Ditches
- Sand Filter Systems
- Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required Required Action

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

No Action Required Required Action

Action No.

1. Areas within the existing ROW, but outside the limits of construction, would not be disturbed. Every effort would be made to preserve trees where they would neither compromise safety nor substantially interfere with the proposed projects.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

No Action Required Required Action

Action No.

1. Between October 1 and February 15, the contractor would remove all old migratory bird nests from any structure that would be affected by the proposed project, and complete any bridge work/demolition and /or vegetation clearing. In addition, the contractor would be prepared to prevent migratory birds from building nests by utilizing nest prevention methods, such as bird-deterrent netting and bird-repelling sprays and/or gels, between February 15 and October 1. In the event that migratory birds are encountered on-site during project construction, adverse impacts on protected birds, active nests, eggs, and/or young would be avoided.
2. The Eagle Protection Act prohibits the taking or possession of and commerce in eagles, parts, feathers, nests, or eggs with limited exceptions. The definition of take includes pursue, shoot, shoot at, poison, wound, kill, capture, trap, collect, molest or disturb. Eagles may not be taken for any purpose unless a permit is issued prior to the taking.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If coves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MSA: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labeling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

No Action Required Required Action

Action No.

1.

2.


3.

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

No Action Required Required Action

Action No.

 Texas Department of Transportation		Design Division Standard	
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC			
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP
© TxDOT: May 2018	CONT	SECT	HIGHWAY
12-12-2011 (DS) REVISIONS	0013	07	087
09-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.
01-23-2015 SECTION I CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	FTW	WSE	52

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT" NO WARRANTY OF ANY KIND IS MADE BY TDOT FOR ANY PURPOSE WHATSOEVER. TDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

http://www.dot.state.tx.us/ftp/specinfo/standard.htm
 5/11/2023 3:46:04 PM
 T:\DISMANT\SRA DESIGN\Wise County\PS&E\DCN\053-054 SW3P.dgn

A. GENERAL SITE DATA

1. PROJECT LIMITS: HWY = US 81

LATITUDE: 33.286346 LONGITUDE: -97.797971

2. PROJECT SITE MAPS:

- Project Location Map: Title Sheet (Sheet 1)
- Drainage Patterns: Drainage Area Maps NA
- Approx. Slopes Anticipated After Major Gradients and Areas of Soil Disturbance: Typical Sections NA
- Major Controls and Locations of Stabilization Practices: NA
- SW3P Site Map Sheets
- Project Specific Locations: NA
- To be specified by Project Field Office and located in the Project SW3P File
- Surface Waters and Discharge Locations: Drainage and Culvert Layout Sheets NA

3. PROJECT DESCRIPTION:

PARKING SPOTS FOR TRUCKERS

4. MAJOR SOIL DISTURBING ACTIVITIES: YES

(Provide description of disturbing activities in sequence of construction)

5. EXISTING CONDITION OF SOIL & VEGETATIVE COVER AND % OF EXISTING VEGETATIVE COVER:

THE SITE IS RURAL AND IN GOOD CONDITION

6. TOTAL PROJECT AREA: 870 Acres

7. TOTAL AREA TO BE DISTURBED: 0.30 Acres (3.44% OF TOTAL PROJECT AREA)

8. WEIGHTED RUNOFF COEFFICIENT

BEFORE CONSTRUCTION: 0.50
 AFTER CONSTRUCTION: 0.50

9. NAME OF RECEIVING WATERS:

WATSON BRANCH

10. ENDANGERED SPECIES, DESIGNATED CRITICAL HABITAT AND HISTORIC PROPERTY:

A. No Endangered Species, Designated Critical Habitat or Historic Property has been found on this project site.

The documentation satisfying TPDES Construction General Permit eligibility pertaining to the existence or of any protective action taken with regards to endangered species or designated critical habitat or historical property in this project area is contained in the project's Environmental document (EA or EIS) and can be viewed under the State Open Records Act at the address shown below:

TEXAS DEPARTMENT OF TRANSPORTATION
 FORT WORTH DISTRICT HEADQUARTERS
 DISTRICT DESIGN SECTION
 2501 SW LOOP
 FORT WORTH, TX 76133
 PHONE: 817-370-6500

B. EROSION AND SEDIMENT CONTROLS

1. SOIL STABILIZATION PRACTICES:

(Select T = Temporary or P = Permanent, as applicable)

- | | |
|--|---|
| <input type="checkbox"/> TEMPORARY SEEDING | <input checked="" type="checkbox"/> P PRESERVATION OF NATURAL RESOURCES |
| <input type="checkbox"/> MULCHING (Hay or Straw) | <input type="checkbox"/> FLEXIBLE CHANNEL LINER |
| <input type="checkbox"/> BUFFER ZONES | <input type="checkbox"/> RIGID CHANNEL LINER |
| <input type="checkbox"/> PLANTING | <input type="checkbox"/> SOIL RETENTION BLANKET |
| <input type="checkbox"/> SEEDING | <input type="checkbox"/> COMPOST MANUFACTURED TOPSOIL |
| <input type="checkbox"/> SODDING | <input type="checkbox"/> OTHER: (Specify Practice) |

2. STRUCTURAL PRACTICES:

(Select T = Temporary or P = Permanent, as applicable)

- | | |
|---|--|
| <input checked="" type="checkbox"/> T SILT FENCES | <input type="checkbox"/> DIVERSION, INTERCEPTOR, OR PERIMETER DIKES |
| <input type="checkbox"/> HAY BALES | <input type="checkbox"/> DIVERSION, INTERCEPTOR, OR PERIMETER SWALES |
| <input checked="" type="checkbox"/> T ROCK FILTER DAMS | <input type="checkbox"/> DIVERSION DIKE AND SWALE COMBINATIONS |
| <input type="checkbox"/> PIPE SLOPE DRAINS | <input type="checkbox"/> ROCK BEDDING AT CONSTRUCTION EXIT |
| <input type="checkbox"/> PAVED FLUMES | <input type="checkbox"/> TIMBER MATTING AT CONSTRUCTION EXIT |
| <input type="checkbox"/> CHANNEL LINERS | <input type="checkbox"/> STONE OUTLET STRUCTURES |
| <input type="checkbox"/> SEDIMENT TRAPS | <input type="checkbox"/> VELOCITY CONTROL DEVICES |
| <input type="checkbox"/> SEDIMENT BASINS | <input checked="" type="checkbox"/> P CURBS AND GUTTERS |
| <input type="checkbox"/> STORM SEWERS | <input type="checkbox"/> STORM INLET SEDIMENT TRAP |
| <input checked="" type="checkbox"/> T OTHER: (BIO LOGS) | |

3. STORM WATER MANAGEMENT:

1. Storm water drainage will be provided by the ditches, inlets and storm water systems that will carry drainage within the R.O.W. to the low points within the roadway and project site which drain to natural facilities.

2. Other permanent erosion controls include hydraulic design to limit structure outlet velocities and grading design generally consisting of 4:1 or flatter slopes with permanent vegetative cover.


4. STORM WATER MANAGEMENT ACTIVITIES: (Sequence of Construction)

THE ORDER OF ACTIVITIES SHALL BE AS FOLLOWS:

- 1) THE CONTRACTOR SHALL PLACE SILT FENCE AT PROPOSED LOCATIONS
- 2) THE CONTRACTOR SHALL CONSTRUCT CONCRETE PAVEMENT REPAIR ADJUSTMENT OF EXISTING CONTROLS SHALL BE PERFORMED AND REMOVAL OF SEDIMENT AS NEEDED.
- 3) ADJUSTMENT OF EXISTING CONTROLS SHALL BE PERFORMED AND REMOVAL OF SEDIMENT AS NEEDED.

5. NON-STORM WATER DISCHARGES:

Non-storm water discharges should be filtered, or held in retention basins, before being allowed to mix with storm water. These discharges consist of non-polluted ground water, spring water, foundation and/or footing drain water, and water used for dust control, pavement washing and vehicle washwater containing no detergents.

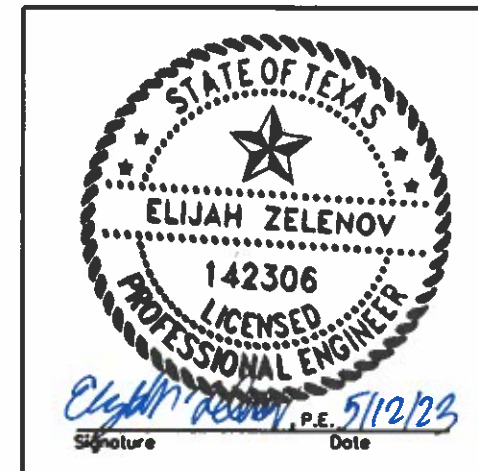

©2023 by Texas Department of Transportation; All Rights Reserved

 Texas Department of Transportation		Fort Worth District Standard
<h2>STORM WATER POLLUTION PREVENTION PLAN (SW3P)</h2>		
SHEET 1 OF 2 SHEETS		
ORIGINAL DRAWING: 09/2002 DATE: 04/2000 01/2012 05/2013	sw3p-ftw.dgn REVISIONS: 6 STATE: TEXAS COUNTY: FTW JOB: 0013 07 087 HIGHWAY NO: US 81	PROJECT NO.: SHEET NO.: 53

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

https://www.dot.state.tx.us/itw/specinfo/standard.htm
 5/11/2023 3:46:06 PM
 I:\DISMANT\SRA DESIGN\Wise County\PS&E\DCM\053-054 SW3P.dgn

C. OTHER REQUIREMENTS & PRACTICES

1. MAINTENANCE:

All erosion and sediment controls shall be maintained in good working order. If a repair is necessary, it shall be performed at the earliest date possible but no later than 7 calendar days after the surrounding exposed ground has dried sufficiently to prevent further damage from heavy equipment. Disturbed areas on which construction activities have ceased, temporarily or permanently, shall be stabilized within 14 calendar days unless they are scheduled to and do resume within 21 calendar days. The areas adjacent to creeks and drainageways shall have priority followed by devices protecting storm sewer inlets.

2. INSPECTION:

An inspection shall be performed by a TxDOT Inspector every 14 calendar days as well as within 24 hours after any rainfall of one-half inch or more is recorded on a non-freezing rain gauge to be located at the project site, or every 7 calendar days. An Inspection and Maintenance Report shall be filed for each inspection. Based on the inspection results, the controls shall be revised in accordance with the inspection report.

3. WASTE MATERIALS:

Except as noted below, all waste materials shall be collected in a metal dumpster having a secure cover. The dumpster shall meet all state and local solid waste management regulations. All trash and debris from construction shall be deposited in the dumpster. The dumpster shall be emptied, as necessary or as required by local regulation, and hauled to a local approved land fill site. The burying of construction waste on the project site shall not be permitted.

Concrete washout areas shall be required and shall consist of a pit, lined with an impervious material, of sufficient size to contain, until evaporation, all water used and washout material produced during concrete washout operations. The concrete washout locations shall be as directed by the engineer.

Lime slaking tanks shall be surrounded by an earthen berm, capable of containing any overflow.

4. HAZARDOUS WASTE (INCLUDING SPILL REPORTING):

As a minimum, any products in the following categories are considered to be hazardous: paints, acids, solvents, asphalt products, chemical additives for soil stabilization, and concrete curing compounds or additives. In the event of a spill which may be hazardous, the spill coordinator shall be contacted immediately.

5. SANITARY WASTE:

All sanitary waste shall be collected from the portable units, as necessary or as required by local regulation, by a licensed sanitary waste management contractor.

6. OFFSITE VEHICLE TRACKING:

The Contractor shall be required, on a regular basis or as may be directed by the Engineer, to dampen haul roads for dust control, stabilize construction entrances and to remove excess dirt from the roadway.


7. MANAGEMENT PRACTICES: (Example Below - May be used as applicable, revised or expanded)

1. Disposal areas, stockpiles and haul roads shall be constructed in a manner that will minimize and control the amount of sediment that may enter receiving waters. Disposal areas shall not be located in any wetland, waterbody or streambed.
2. Construction staging areas and vehicle maintenance areas shall be constructed by the Contractor in a manner to minimize the runoff of pollutants.
3. All temporary fills placed in waterways shall be built of erosion resistant material. (NWP 14)
4. All waterways shall be cleared as soon as practicable of temporary embankment, temporary bridges, matting, falsework, piling, debris or other obstructions placed during construction operations that are not a part of the finished work.


8. OTHER:

1. Listing of construction materials stored on site to be provided by Project Field Office.
2. The Project SW3P File located at the project field office shall contain the N.D.J., CGP Coverage Notice, TCEO TPDES Form, Signature Authorization, Certification/Qualification Statements, Inspection Reports, Required Maps, and a copy of the TPDES General Permit No. TXR150000.

STORM WATER POLLUTION PREVENTION PLAN PERMIT POSTING

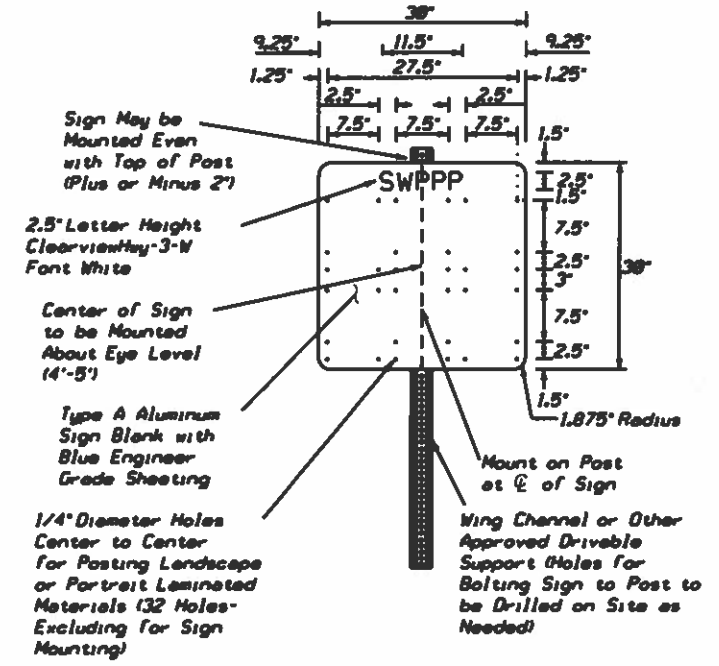


No Permanent Installation Allowed. Sign to be Removed After Project Completion.

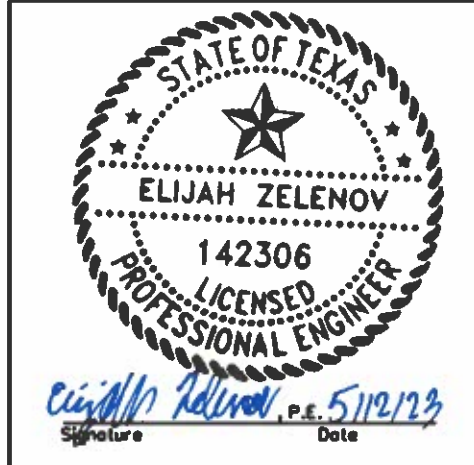

Texas Department of Transportation		Fort Worth District Standard	
STORM WATER POLLUTION PREVENTION PLAN (SW3P)			
SHEET 2 OF 2 SHEETS			
DATE	REVISIONS	PROJECT NO.	SHEET NO.
09/2000	6		54
01/2012		SEE TITLE PAGE	
09/2013		STATE	COUNTY
09/2014		TEXAS	FTW
		CONTRACT	SECTION
		0013	07
		JOB	087
		HIGHWAY NO.	US 81


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

5/10/2023 T:\DISMAINT\SRA DESIGN\Wise County\PS&E\DDGN\055 EC(1)-16.dgn

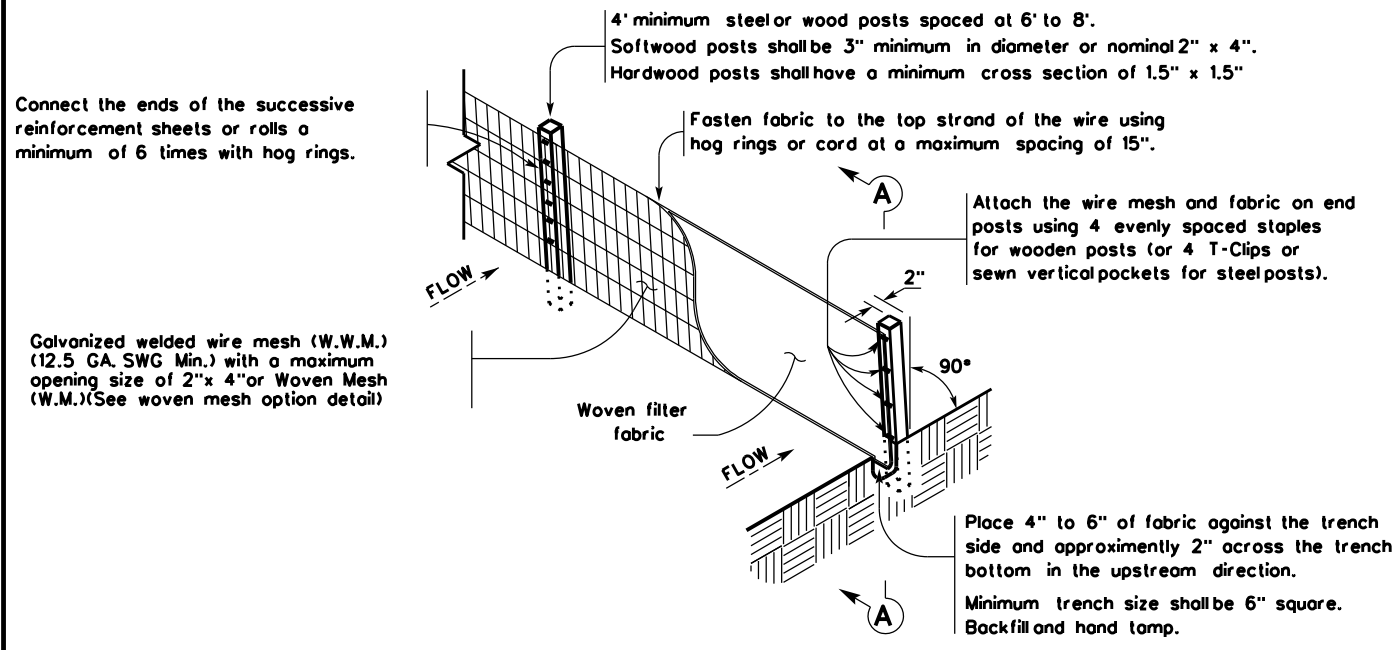

TEMPORARY SEDIMENT CONTROL FENCE

SCF

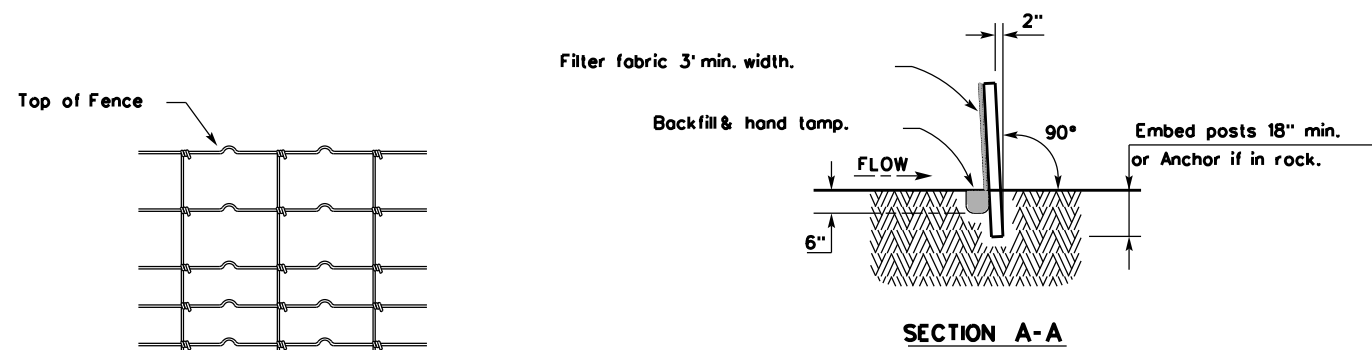

HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL

Galvanized hinge joint knot woven mesh (12.5 GA. SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

SEDIMENT CONTROL FENCE USAGE GUIDELINES

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.

Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT. Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.


LEGEND

Sediment Control Fence

SCF

GENERAL NOTES


1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise approved.
2. Perform vertical tracking on slopes to temporarily stabilize soil.
3. Provide equipment with a track undercarriage capable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
4. Do not exceed 12" between track impressions.
5. Install continuous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

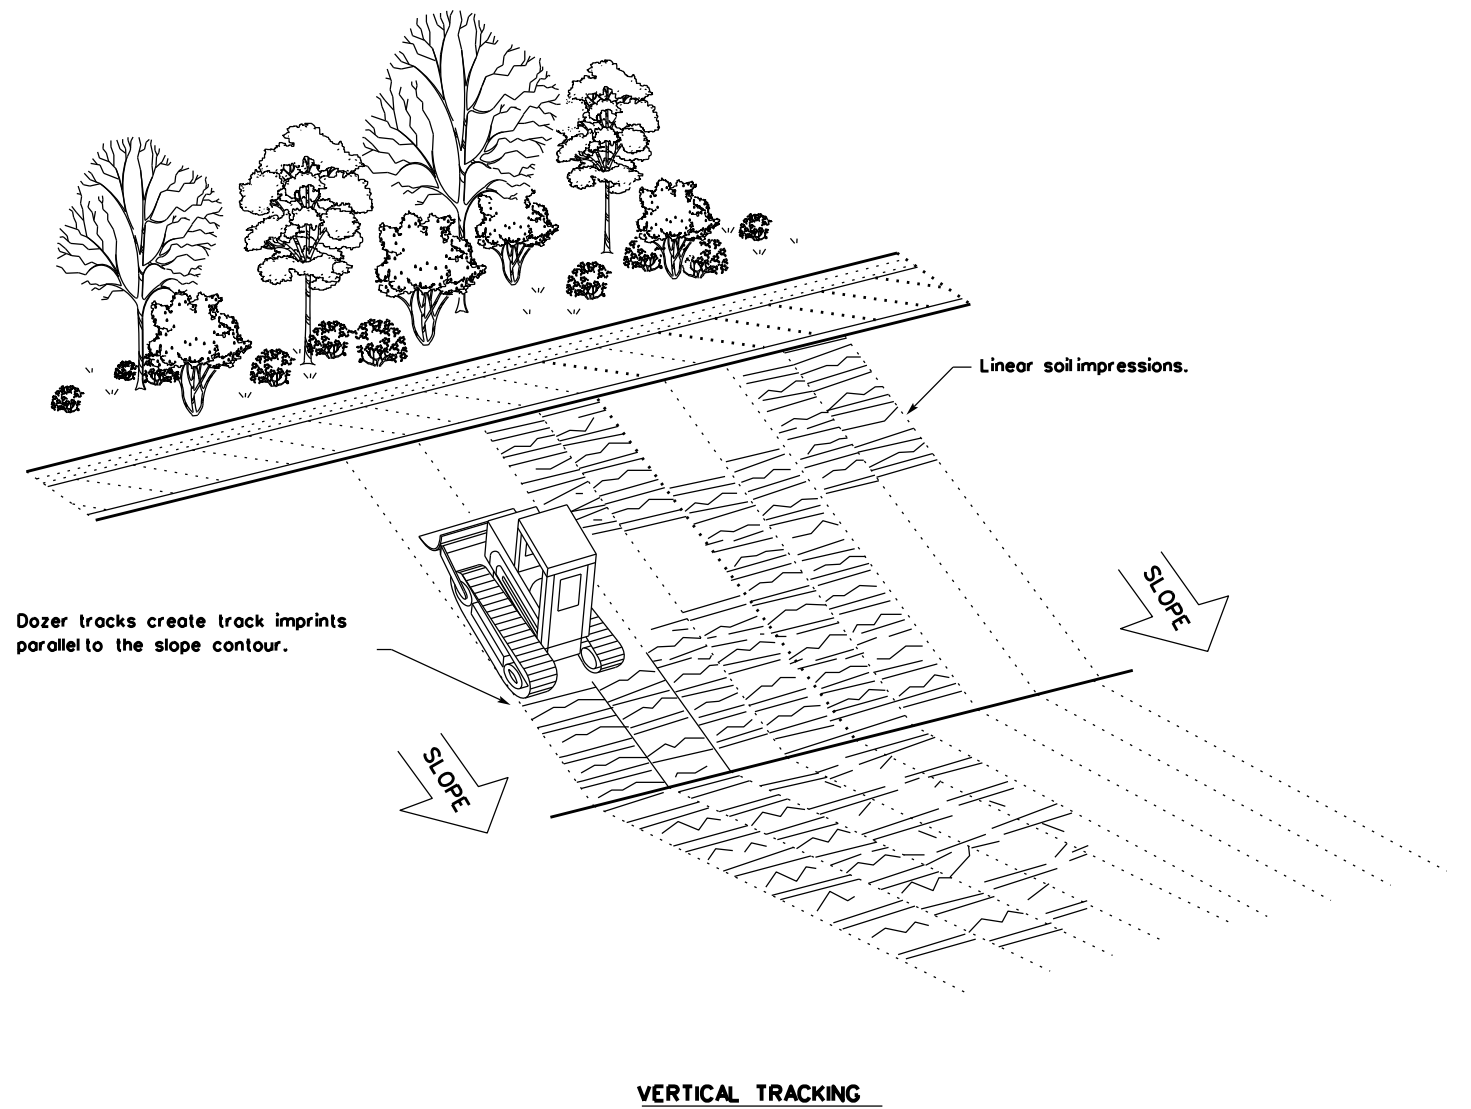

Texas Department of Transportation				Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES FENCE & VERTICAL TRACKING EC(1)-16					
FILE: ec116	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS	
© TxDOT: JULY 2016	CONT: 0013	SECT: 07	JOB: 087	HIGHWAY: US 81	
REVISIONS		DIST: FTW	COUNTY: WISE	SHEET NO.: 55	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
 FILE: TRNDISMAINT_SRA DESIGN\Wise County\PS&E\DCNN\056 EC(2)-16.dgn

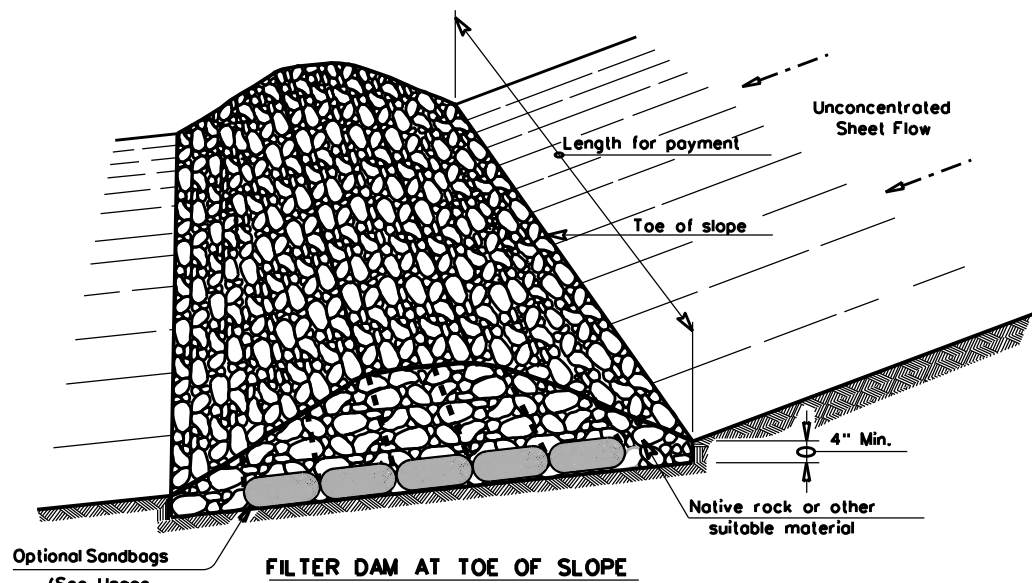


FILTER DAM AT TOE OF SLOPE

RFD1

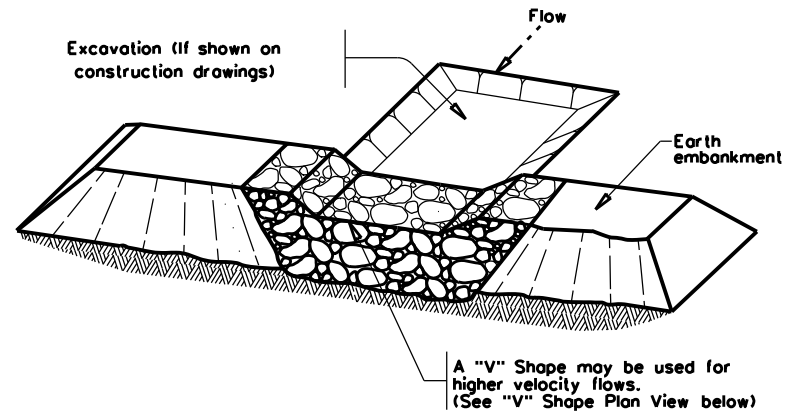

FILTER DAM AT SEDIMENT TRAP

RFD1 OR RFD2

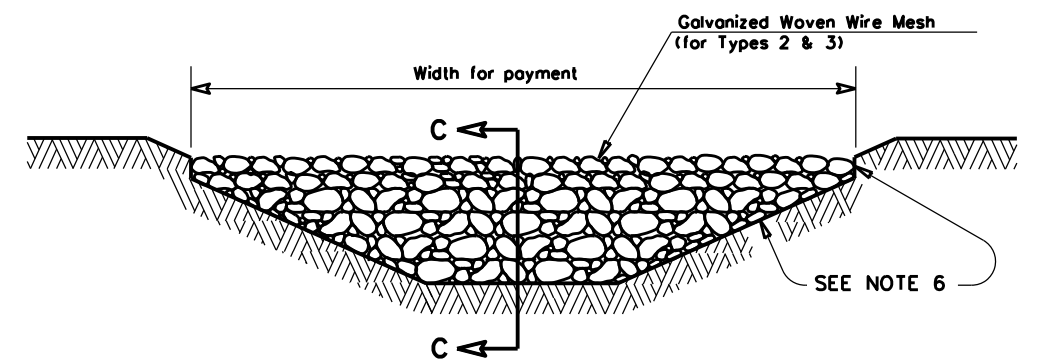


FILTER DAM AT CHANNEL SECTIONS

RFD1 OR RFD2 OR RFD3


GENERAL NOTES

1. If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
2. Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
4. Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
6. Filter dams should be embedded a minimum of 4" into existing ground.
7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified. The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
9. Sack Gabions should be staked down with 3/4" dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 1/2" x 3 1/4".
10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
11. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

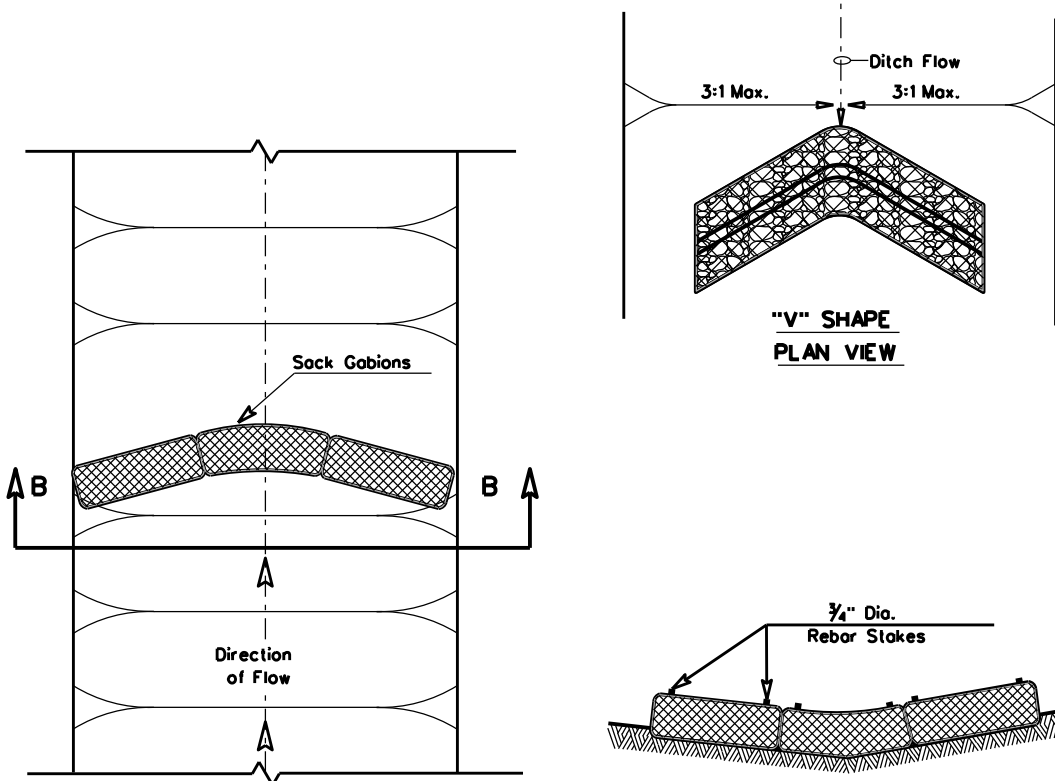


"V" SHAPE PLAN VIEW


PLAN VIEW

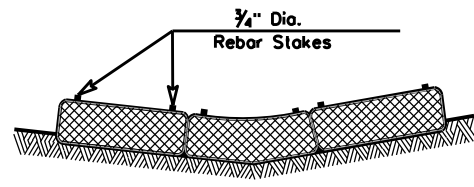

SECTION B-B

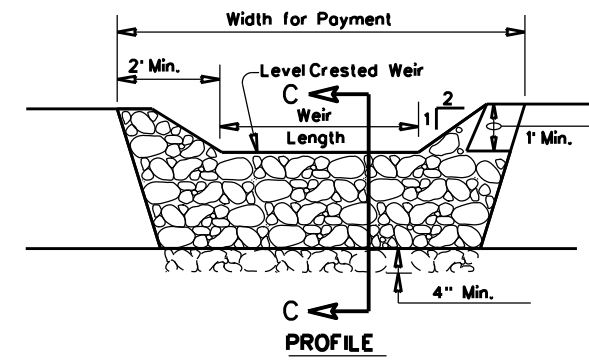

PROFILE

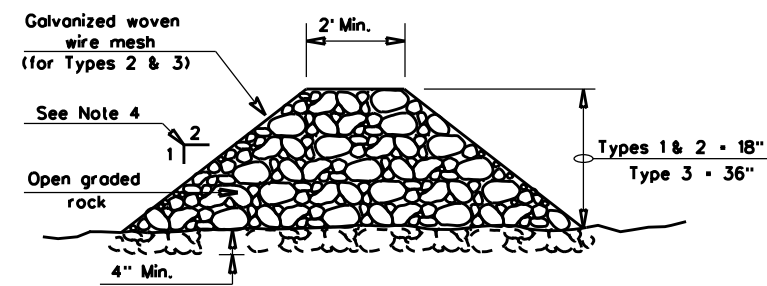

SECTION C-C

ROCK FILTER DAM USAGE GUIDELINES

Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT² of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.


Type 1 (18" high with no wire mesh) (3" to 6" aggregate): Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximately 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

Type 2 (18" high with wire mesh) (3" to 6" aggregate): Type 2 may be used in ditches and at dike or swale outlets.

Type 3 (36" high with wire mesh) (4" to 8" aggregate): Type 3 may be used in stream flow and should be secured to the stream bed.


Type 4 (Sack gabions) (3" to 6" aggregate): Type 4 May be used in ditches and smaller channels to form an erosion control dam.

Type 5: Provide rock filter dams as shown on plans.

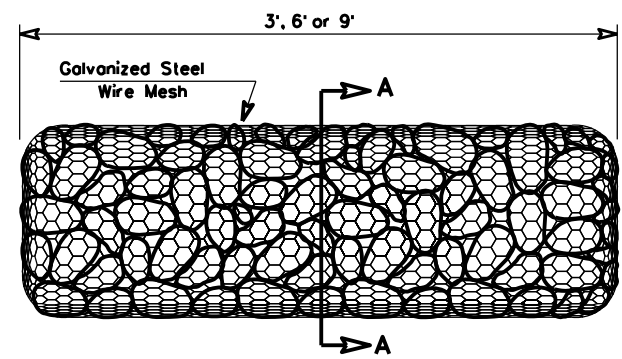

TYPE 4 (SACK GABIONS)

RFD4



SECTION A-A


PLAN SHEET LEGEND

- Type 1 Rock Filter Dam — RFD1
- Type 2 Rock Filter Dam — RFD2
- Type 3 Rock Filter Dam — RFD3
- Type 4 Rock Filter Dam — RFD4


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES ROCK FILTER DAMS EC(2)-16			
FILE: ec216	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2016	CONT: 0013	SECT: 07	JOB: 087
REVISIONS:	DIST: FTW	COUNTY: WISE	HIGHWAY: US 81
			SHEET NO.: 56

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\DCNV\057 EC(3)-16.dgn

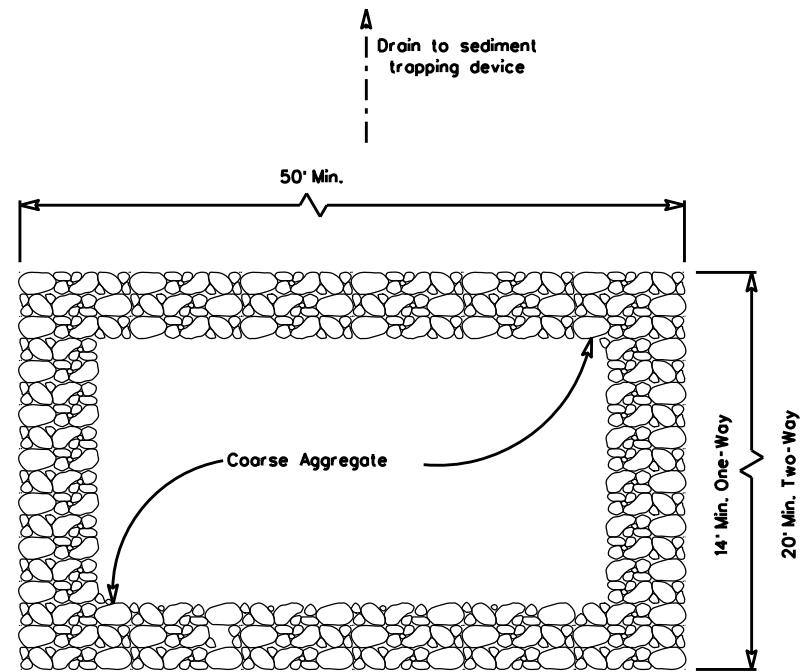

PLAN VIEW

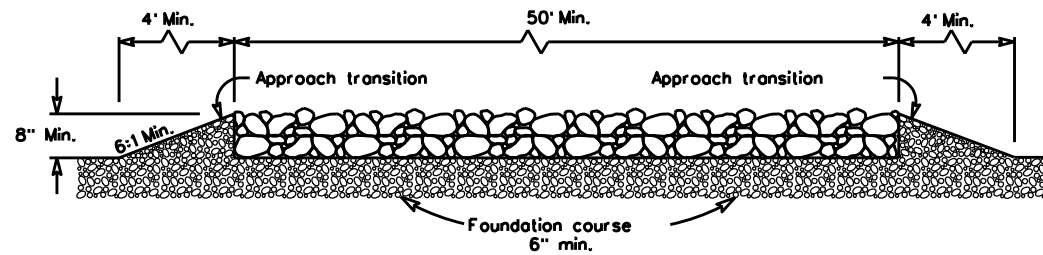


ELEVATION VIEW


CONSTRUCTION EXIT (TYPE 1)
 ROCK CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 1)

1. The length of the type 1 construction exit shall be as indicated on the plans, but not less than 50'.
2. The coarse aggregate should be open graded with a size of 4" to 8".
3. The approach transitions should be no steeper than 6:1 and constructed as directed by the Engineer.
4. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other materials approved by the Engineer.
5. The construction exit shall be graded to allow drainage to a sediment trapping device.
6. The guidelines shown hereon are suggestions only and may be modified by the Engineer.
7. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the fullwidth of the exit, or as directed by the engineer.

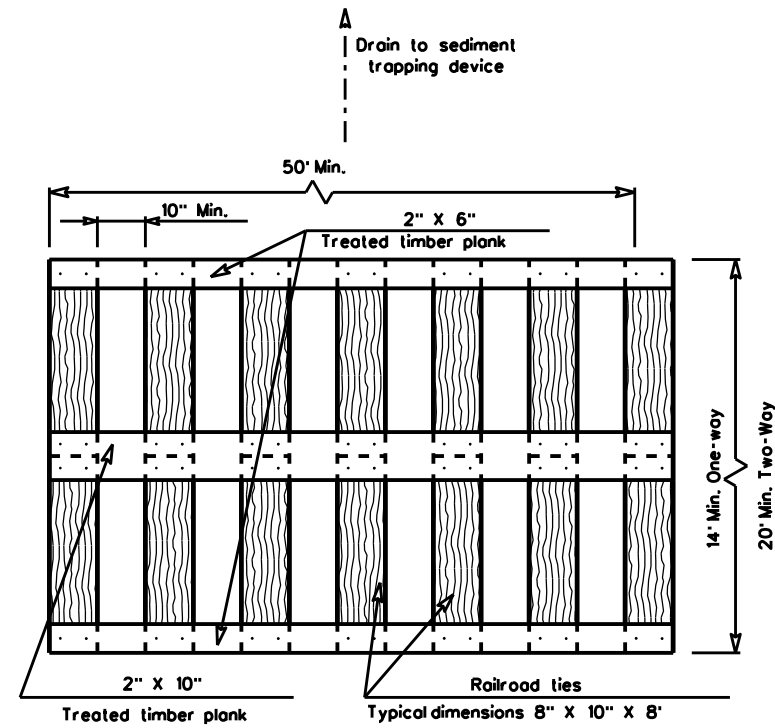

PLAN VIEW

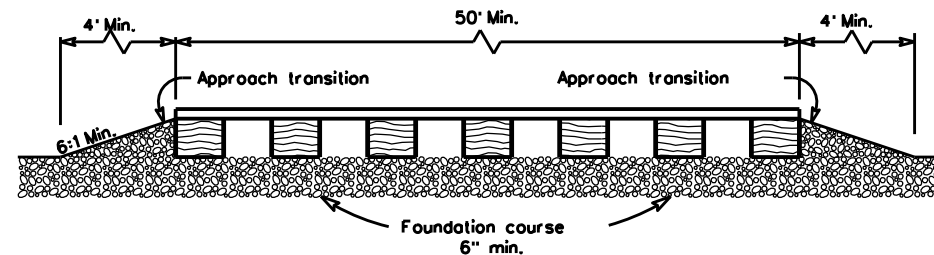


ELEVATION VIEW


CONSTRUCTION EXIT (TYPE 2)
 TIMBER CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 2)

1. The length of the type 2 construction exit shall be as indicated on the plans, but not less than 50'.
2. The treated timber planks shall be attached to the railroad ties with 1/2"x 6" min. lag bolts. Other fasteners may be used as approved by the Engineer.
3. The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
4. The approach transitions shall be no steeper than 6:1 and constructed as directed by the Engineer.
5. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other material as approved by the Engineer.
6. The construction exit should be graded to allow drainage to a sediment trapping device.
7. The guidelines shown hereon are suggestions only and may be modified by the Engineer.
8. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the fullwidth of the exit, or as directed by the engineer.

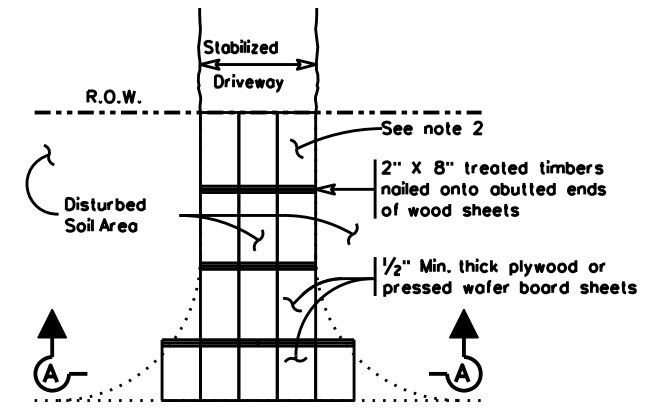

PLAN VIEW

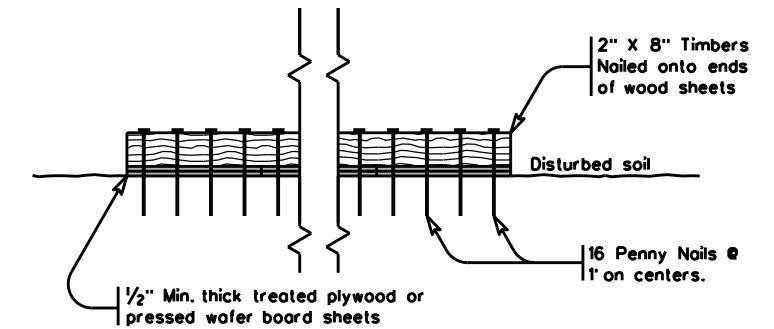

SECTION A-A
 CONSTRUCTION EXIT (TYPE 3)
 SHORT TERM

GENERAL NOTES (TYPE 3)

1. The length of the type 3 construction exit shall be as shown on the plans, or as directed by the Engineer.
2. The type 3 construction exit may be constructed from open graded crushed stone with a size of two to four inches spread a min. of 4" thick to the limits shown on the plans.
3. The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
4. The guidelines shown hereon are suggestions only and may be modified by the Engineer.




**TEMPORARY EROSION,
 SEDIMENT AND WATER
 POLLUTION CONTROL MEASURES
 CONSTRUCTION EXITS
 EC(3)-16**


FILE: ec316	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	0013	07	087	US 81
	DIST	COUNTY	SHEET NO.	
	FTW	WISE	57	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 5/10/2023
 FILE: T:\DISMAINT\SRA DESIGN\Wise County\PS&E\DCN\058-060 EC(9)-16.dgn

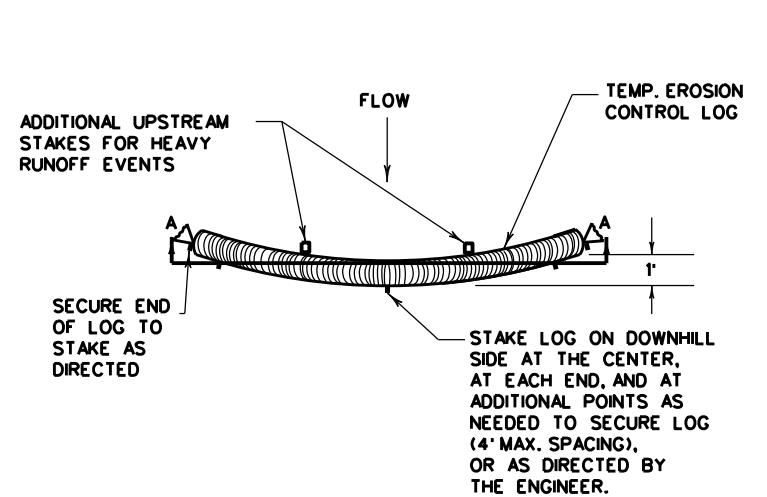


PLAN VIEW

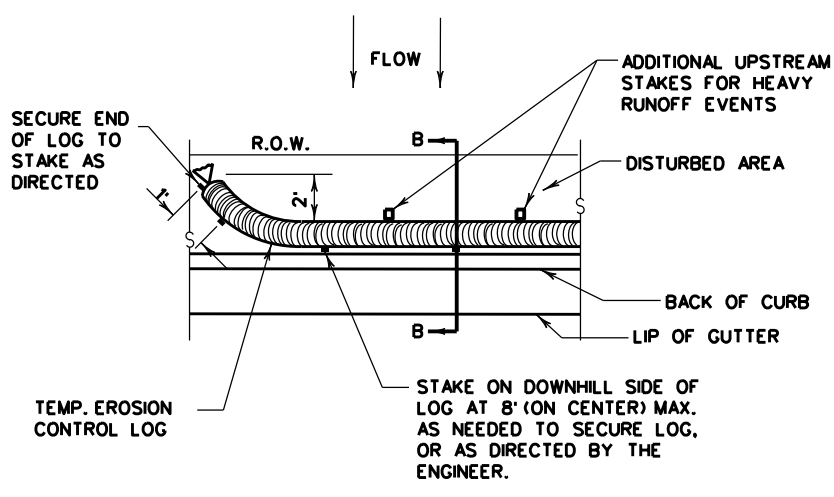

PLAN VIEW

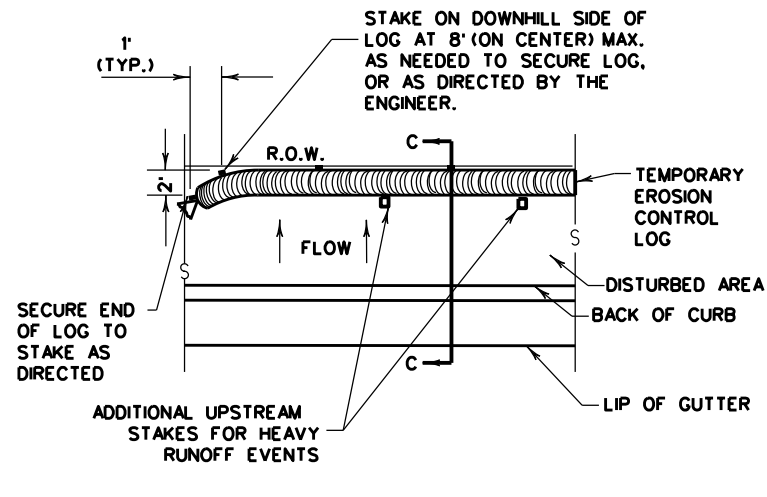


PLAN VIEW

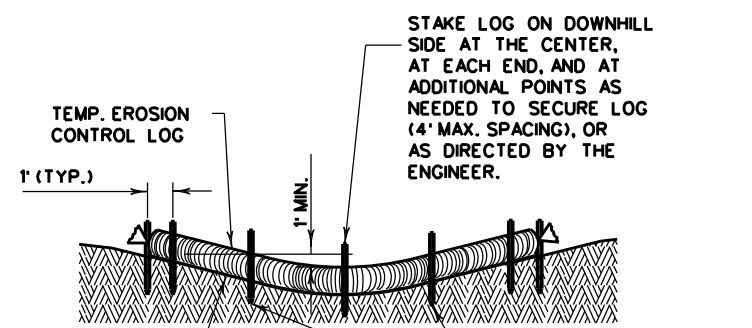

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

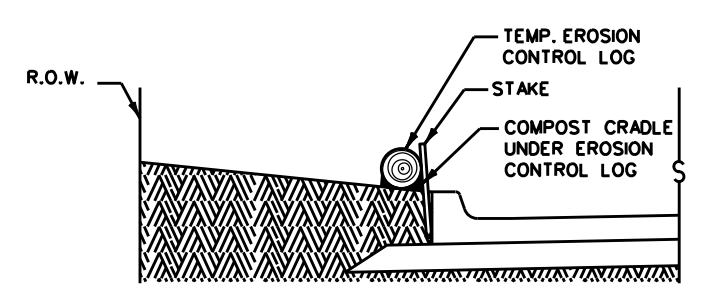

SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC

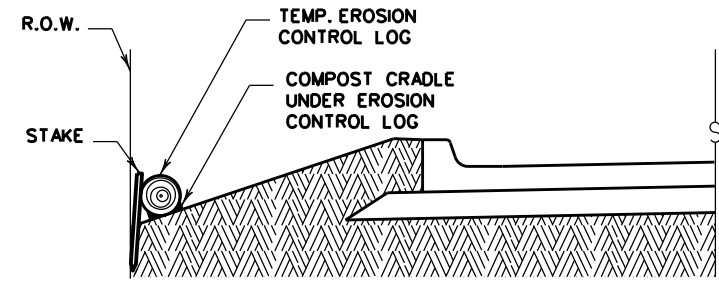

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

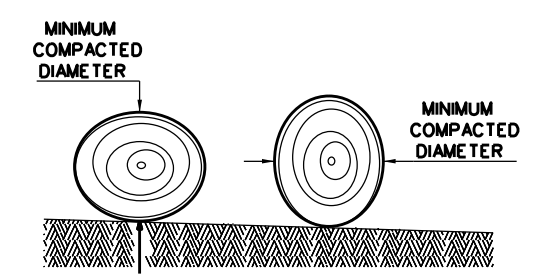

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND**
- CL-D EROSION CONTROL LOG DAM
 - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
 - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
 - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
 - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
 - CL-DI EROSION CONTROL LOG AT DROP INLET
 - CL-CI EROSION CONTROL LOG AT CURB INLET
 - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion controllog sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" the drainage area).

Controllogs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

GENERAL NOTES:


1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4" LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0013	SECT: 07	JOB: 087
REVISIONS	DIST: FTW	COUNTY: WISE	SHEET NO.: 58


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
 FILE: T:\DISMAINT_SRA DESIGN\Wise County\PS&E\058-060 EC(9)-16.dgn

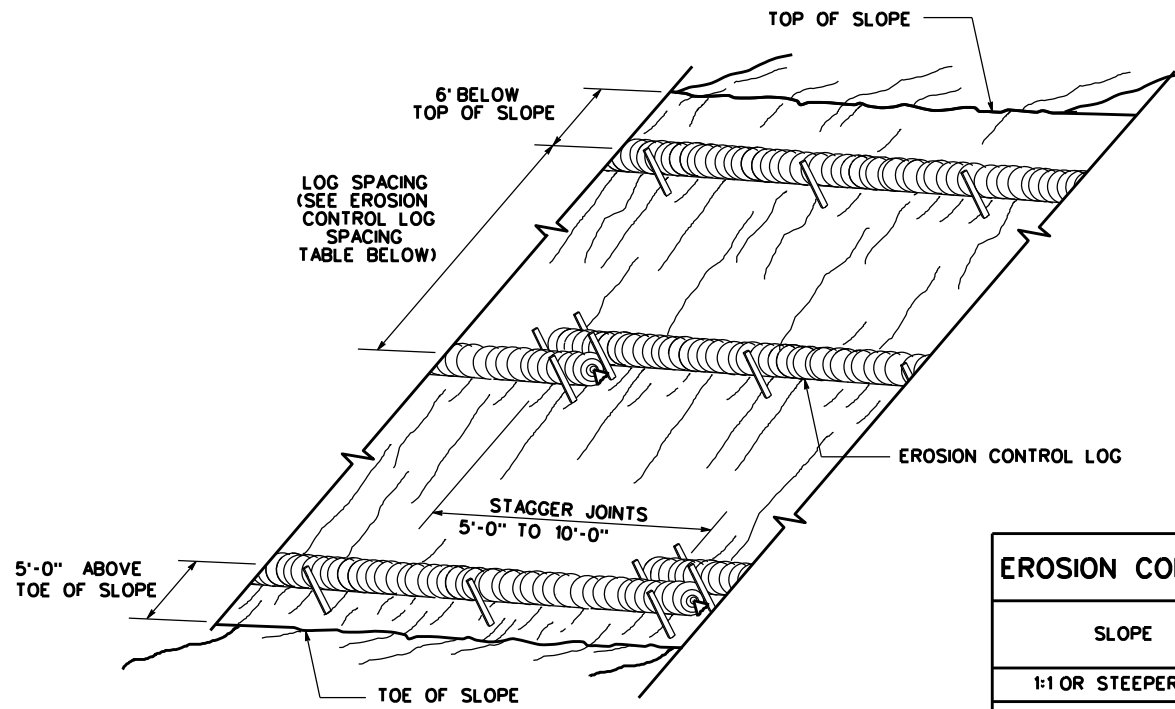

**EROSION CONTROL LOGS ON SLOPES
 STAKE AND TRENCHING ANCHORING**


CL-SST

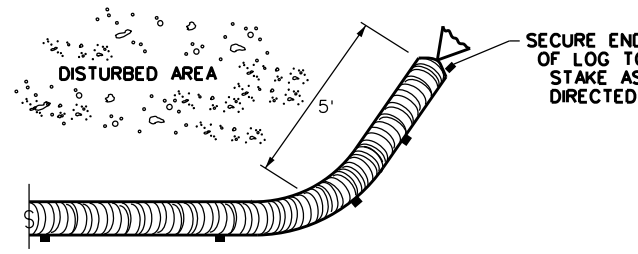

END SECTION RAP DETAIL


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

• ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

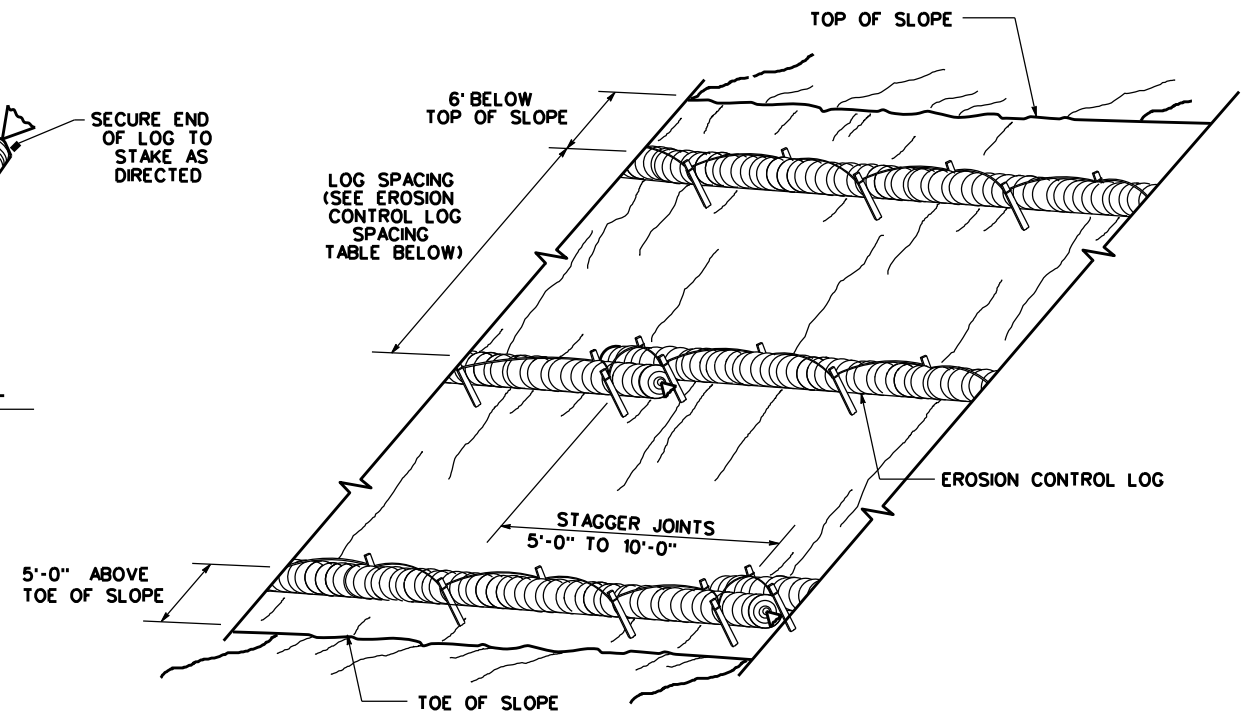


**EROSION CONTROL LOGS ON SLOPES
 STAKE AND LASHING ANCHORING**

CL-SSL

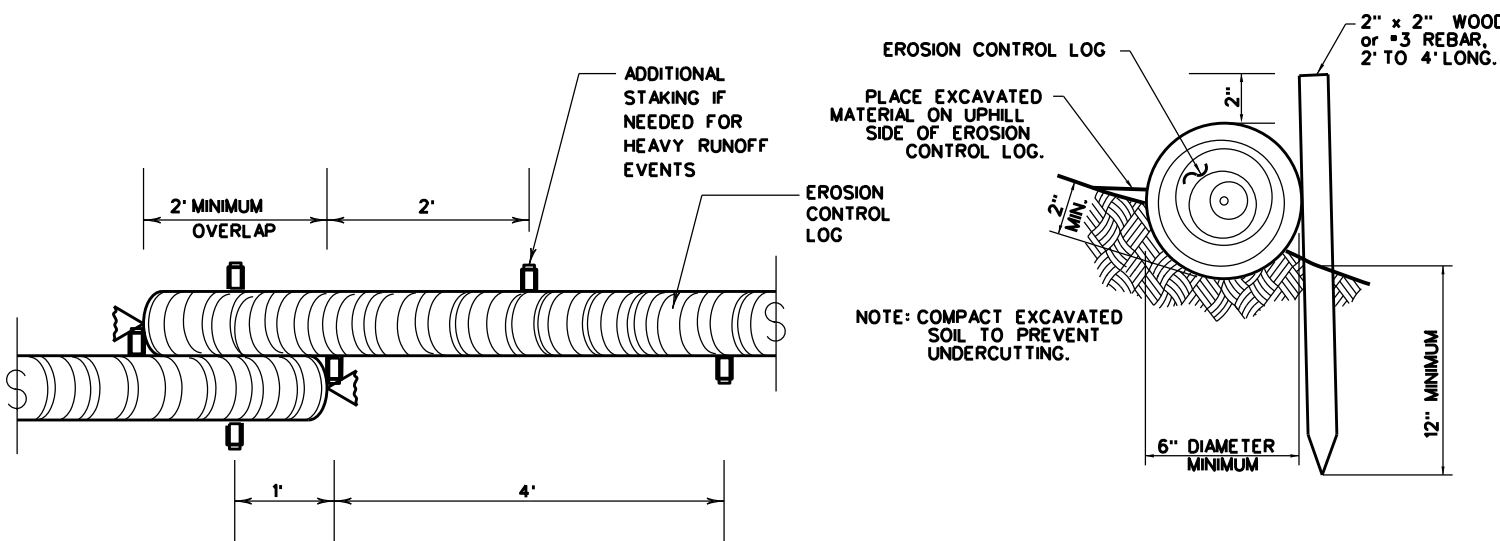

STAKE AND TRENCHING ANCHORING DETAIL

CL-SST

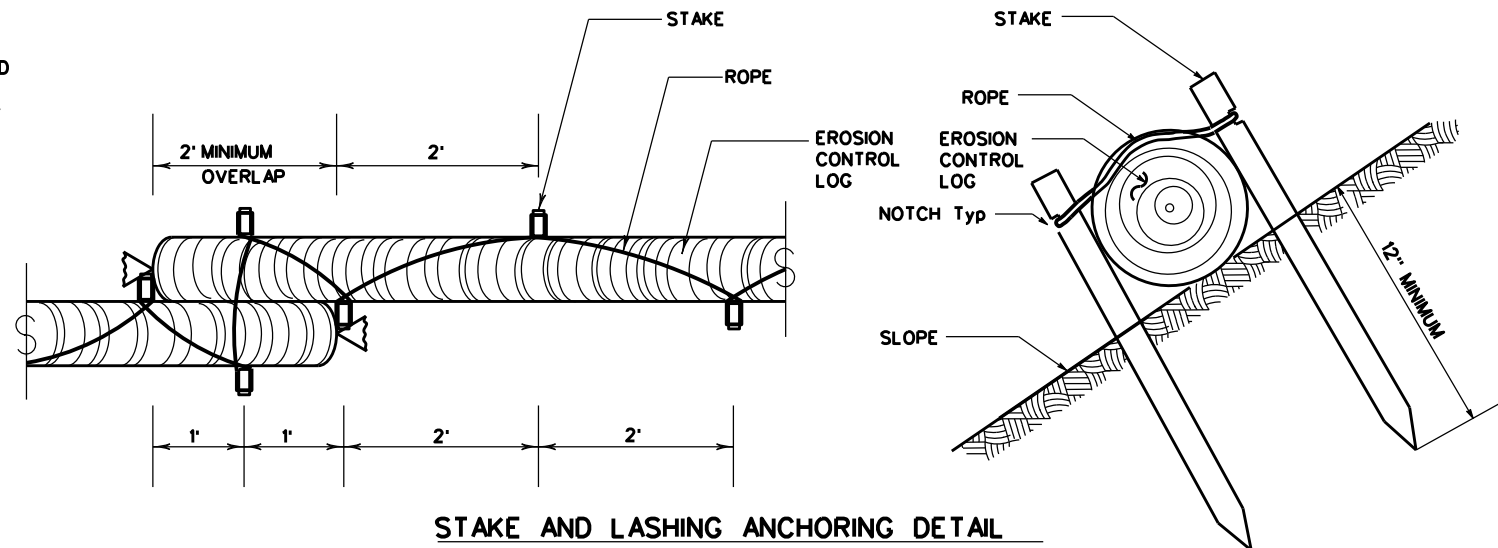


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"

TRENCH DEPTH TABLE




STAKE NOTCH DETAIL

SHEET 2 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	0013 07	087	US 81
DIST	COUNTY	SHEET NO.	
FTW	WISE	59	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 5/10/2023
 FILE: TRANSMANT_SRA DESIGN\Wise County\PS&E\DCN\058-060 EC(9)-16.dgn

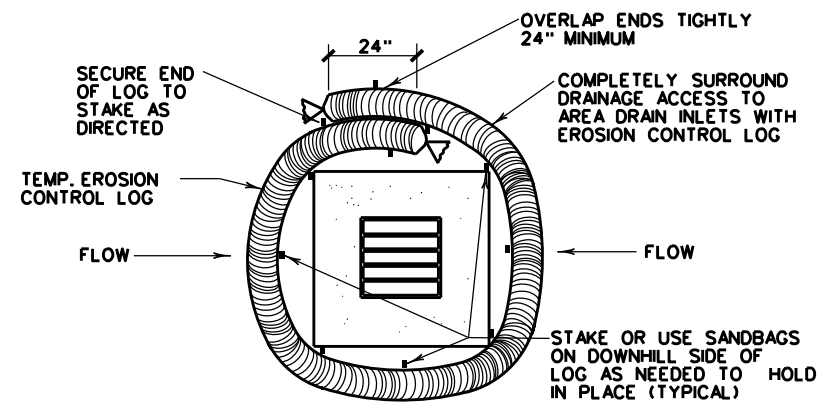


EROSION CONTROL LOG AT DROP INLET

CL-DI

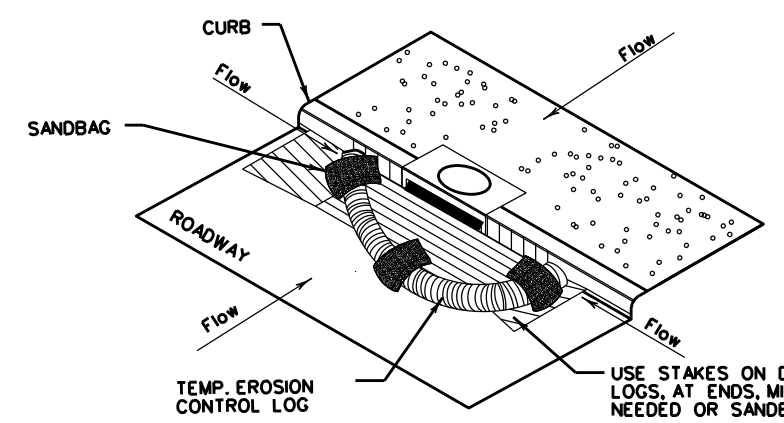

EROSION CONTROL LOG AT CURB INLET


CL-CI

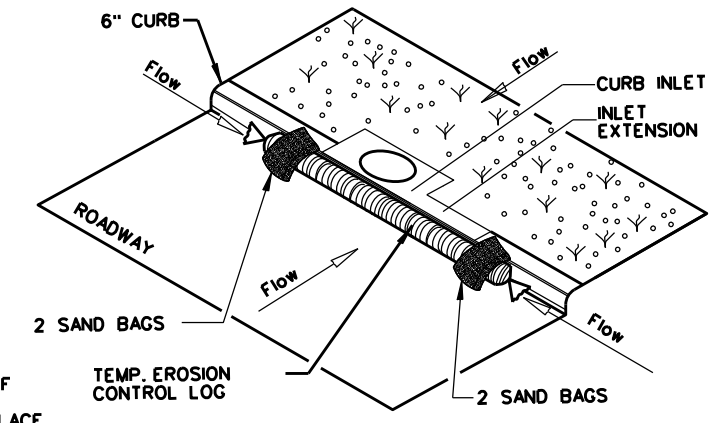

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

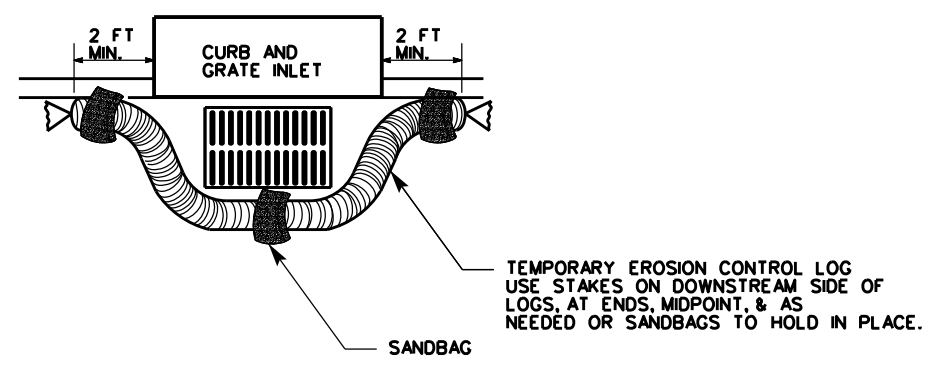

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

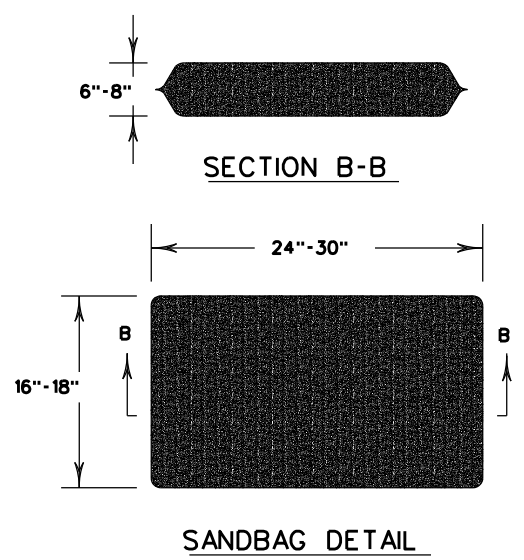

SHEET 3 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0013	SECT: 07	JOB: 087
REVISIONS:	DIST: FTW	COUNTY: WISE	HIGHWAY: US 81
			SHEET NO. 60